

Prüfbericht-Nr.: Test report no.:	60374756 003	Auftrags-Nr.: Order no.:	168264720	Seite 1 von 22 Page 1 of 22
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2020-05-13	
Auftraggeber: Client:	i.safe MOBILE GmbH i_Park Tauberfranken 10, 97922 Lauda-Koenigshofen, Germany			
Prüfgegenstand: Test item:	Rugged tablet computer			
Bezeichnung / Typ-Nr.: Identification / Type no.:	M93A01			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 2 CFR47 FCC Part 15: Subpart C Section 15.207 RSS-Gen Issue 5 CFR47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2020-05-13			
Prüfmuster-Nr.: Test sample no.:	A002024323-004 A002024323-005			
Prüfzeitraum: Testing period:	2020-05-24 – 2020-06-10			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by: Lin Lin		genehmigt von: authorized by: Winnie Hou		
Datum: Date: 2020-10-09		Ausstellungsdatum: Issue date: 2020-10-09		
Stellung / Position:	Senior Project Manager	Stellung / Position:	Technical Certifier	
Sonstiges / Other: FCC ID: 2AACZ-M93A01 IC: 11122A-M93A01 HVIN: M93A01				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

V05

Test Summary

5.1.1 Antenna Requirement

RESULT: Pass

5.1.2 Maximum Peak Conducted Output Power

RESULT: Pass

5.1.3 Conducted Power Spectral Density

RESULT: Pass

5.1.4 6dB Bandwidth

RESULT: Pass

5.1.5 99% Bandwidth

RESULT: Pass

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT: Pass

5.1.7 Radiated Spurious Emission

RESULT: Pass

5.1.8 Conducted Emission on AC Mains

RESULT: Pass

Contents

1	General Remarks	4
1.1	Complementary Materials	4
2	Test Sites	5
2.1	Test Facilities	5
2.2	List of Test and Measurement Instruments.....	5
2.3	Traceability	6
2.4	Calibration	6
2.5	Measurement Uncertainty	6
2.6	Location of Original Data.....	6
2.7	Status of Facility Used for Testing	7
3	General Product Information	8
3.1	Product Function and Intended Use	8
3.2	Ratings and System Details	8
3.3	Independent Operation Modes	10
3.4	Noise Generating and Noise Suppressing Parts	10
3.5	Submitted Documents.....	10
4	Test Set-up and Operation Modes	11
4.1	Principle of Configuration Selection	11
4.2	Test Operation and Test Software	11
4.3	Special Accessories and Auxiliary Equipment.....	11
4.4	Countermeasures to Achieve EMC Compliance	11
4.5	Test Setup Diagram	12
5	Test Results	14
5.1	Transmitter Requirement & Test Suites	14
5.1.1	<i>Antenna Requirement.....</i>	<i>14</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>15</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>16</i>
5.1.4	<i>6dB Bandwidth.....</i>	<i>17</i>
5.1.5	<i>99% Bandwidth.....</i>	<i>18</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....</i>	<i>19</i>
5.1.7	<i>Radiated Spurious Emission.....</i>	<i>20</i>
5.1.8	<i>Conducted Emission on AC Mains</i>	<i>21</i>
6	Photographs of the Test Set-Up	22
7	List of Tables	22

Prüfbericht - Nr.: 60374756 003
*Test Report No.***Seite 4 von 22**
Page 4 of 22

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Wi-Fi 802.11 b/g/n

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment
TÜV Rheinland (Shenzhen) Co., Ltd.

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	20.08.2020
OSP	R&S	OSP 150	101017	17.12.2020
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	17.12.2020
Wideband Power Sensor	R&S	NRP-Z81	105350	17.12.2020
Shielding Room 8#	Albatross	SR8	APC17151-SR8	23.07.2020
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	19.08.2020
Signal Analyzer	R&S	FSV 40	101439	21.08.2020
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	21.08.2020
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	20.08.2020
Amplifier	R&S	SCU-18F	180070	20.08.2020
Amplifier	R&S	SCU40A	100475	20.09.2020
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	02.09.2020
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	02.09.2020
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	02.09.2020
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	01.09.2020
Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	02.09.2020
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	06.07.2020

Conducted Emission on AC Mains

Equipment	Manufacturer	Model No.	Serial No.	Cali. until
EMI Test Receiver	R&S	ESR3	102428	03.09.2020
Artificial Mains Network	R&S	ENV216	102333	19.08.2020
Artificial Mains Network	R&S	ENV432	101411	19.08.2020
Attenuator	R&S	ESH2Z31	100300	19.08.2020
EMC32 test software	R&S	EMC32(Ver.10.50.01)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

Prüfbericht - Nr.: 60374756 003
*Test Report No.***Seite 7 von 22**
Page 7 of 22

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a tablet which supports Bluetooth, 2.4G Wi-Fi 802.11 b/g/n, 5G Wi-Fi 802.11a/n/ac, NFC and GSM/WCDMA/LTE wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Rugged tablet computer
Type Designation	M93A01
Trade Mark	i.safe MOBILE
FCC ID	2AACZ-M93A01
IC	11122A-M93A01
HVIN	M93A01
Operating Voltage:	DC 5V@2A input via power adapter
Testing Voltage	Fully charged li-ion battery charged by power adapter (Adapter input AC 120V@60Hz)
Power Adapter	Model: ICP12-050-2000B Input: AC 100-240V~50/60Hz, 0.3A Output: DC5V@2A
Other accessories	USB Cable Magnetic absorption charging cable 3.5mm Earphone
Technical Specification of Wi-Fi 802.11 b/g/n	
Operating Frequency	2412 - 2462 MHz for 802.11b/g/n(HT20)
Type of Modulation	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
Channel Number	13 channels for 802.11b/g/n(HT20)
Channel Separation	5 MHz
Antenna Type	Integral antenna
Gain of 2.4G Wi-Fi	1.2 dBi

Table 3: RF Channel and Frequency of Wi-Fi 802.11 b/g/n

RF Channel	802.11 b/g/n(HT20)
	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 b/g/n wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Normal operation with Wi-Fi mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

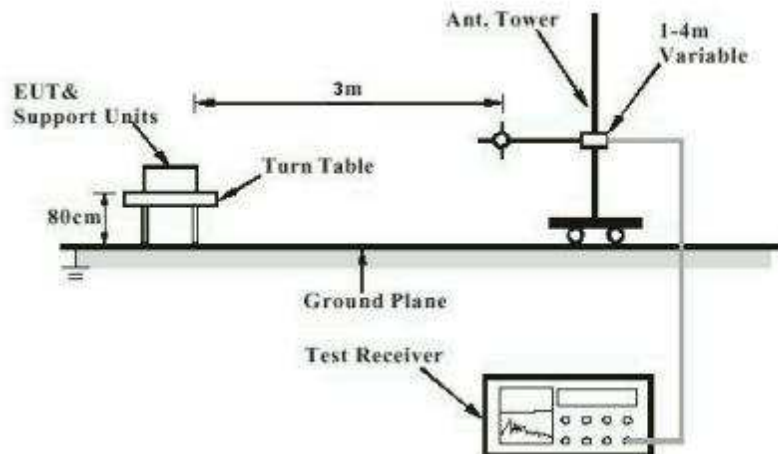


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

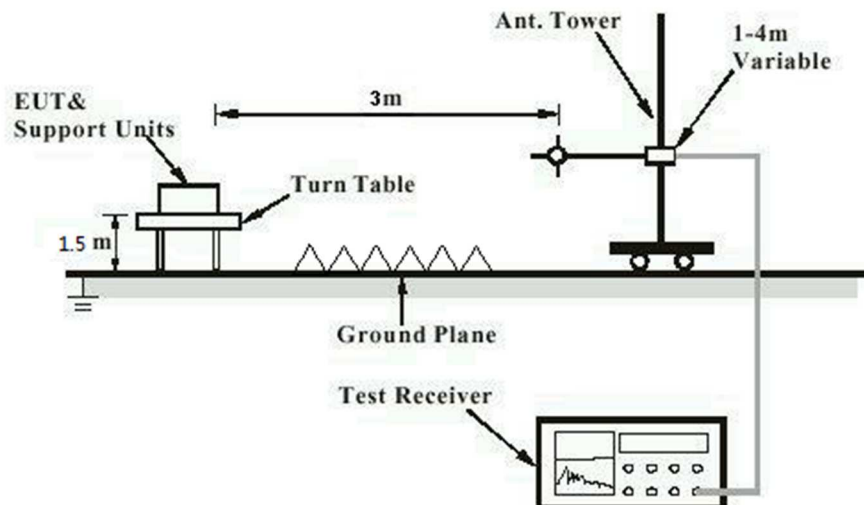


Diagram of Measurement Configuration for Mains Conduction Measurement


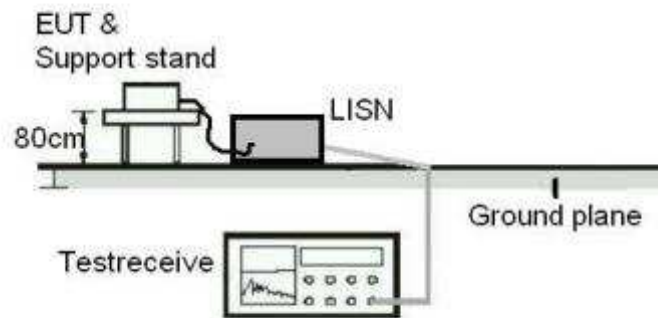


Diagram of Measurement Configuration for Conducted Transmitter Measurement

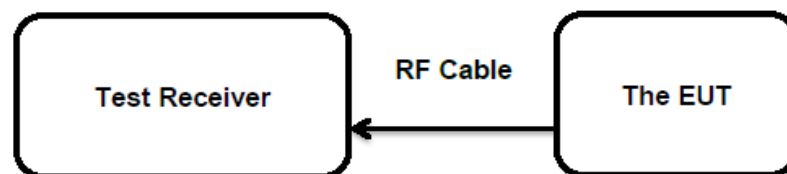

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1.2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: 60374756 003
Test Report No.

Seite 15 von 22
Page 15 of 22

5.1.2 Maximum Peak Conducted Output Power
RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(3)
RSS-247 Clause 5.4(d)

Basic standard : ANSI C63.10: 2013

Limits : 1.0 Watts

Kind of test site : Shielded Room

Test Setup

Date of testing : 2020-05-24 – 2020-06-10

Input voltage : Fully charged li-ion battery charged by power adapter
(Adapter input AC 120V@60Hz)

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

Table 5: Test Result of Maximum Peak Conducted Output Power, Wi-Fi 802.11 b/g/n

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)
			(dBm)	(W)	
802.11b	1 Mbps	2412	18.9	0.0776	< 1.0
		2437	18.6	0.0724	
		2462	19.1	0.0813	
802.11g	6 Mbps	2412	17.9	0.0617	
		2437	17.9	0.0617	
		2462	18.2	0.0661	
802.11n (HT20)	MCS0	2412	17.0	0.0501	
		2437	16.9	0.0490	
		2462	17.1	0.0523	
Maximum Measured Value			19.1	0.0813	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G) of 802.11 b/g/n: 1.2 dBi,
e.i.r.p.=P_(Peak power)+ G, which is far below the 4 W

Prüfbericht - Nr.: 60374756 003*Test Report No.***Seite 16 von 22**
*Page 16 of 22***5.1.3 Conducted Power Spectral Density****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(e)
RSS-247 Clause 5.2(b)
Basic standard : ANSI C63.10: 2013
Limits : < 8 dBm / 3kHz
Kind of test site : Shielded Room

Test Setup

Date of testing : 2020-05-24 – 2020-06-10
Input voltage : Fully charged li-ion battery charged by power adapter
(Adapter input AC 120V@60Hz)
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: 60374756 003*Test Report No.***Seite 17 von 22**
*Page 17 of 22***5.1.4 6dB Bandwidth****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(a)(2)
RSS-247 Clause 5.2(a)
Basic standard : ANSI C63.10: 2013
Limits : > 500 KHz
Kind of test site : Shielded Room

Test Setup

Date of testing : 2020-05-24 – 2020-06-10
Input voltage : Fully charged li-ion battery charged by power adapter
(Adapter input AC 120V@60Hz)
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: 60374756 003
*Test Report No.***Seite 18 von 22**
*Page 18 of 22***5.1.5 99% Bandwidth****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(a)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2020-05-24 – 2020-06-10
Input voltage : Fully charged li-ion battery charged by power adapter
(Adapter input AC 120V@60Hz)
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: 60374756 003*Test Report No.***Seite 19 von 22**
*Page 19 of 22***5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-05-24 – 2020-06-10
Input voltage	: Fully charged li-ion battery charged by power adapter (Adapter input AC 120V@60Hz)
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: 60374756 003*Test Report No.***Seite 20 von 22**
*Page 20 of 22***5.1.7 Radiated Spurious Emission****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 5
Kind of test site	:	3m Semi-anechoic Chamber

Test Setup

Date of testing	:	2020-05-24 – 2020-06-10
Input voltage	:	Fully charged li-ion battery charged by power adapter (Adapter input AC 120V@60Hz)
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: 60374756 003*Test Report No.***Seite 21 von 22**
*Page 21 of 22***5.1.8 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) RSS-Gen Table 3
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2020-05-24 – 2020-06-10
Input voltage	:	Fully charged li-ion battery charged by power adapter (Adapter input AC 120V@60Hz)
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	22 °C
Relative humidity	:	64 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Technical Specification of EUT	8
Table 3: RF Channel and Frequency of Wi-Fi 802.11 b/g/n	9
Table 4: Auxiliary Equipment Used during Test	11
Table 5: Test Result of Maximum Peak Conducted Output Power, Wi-Fi 802.11 b/g/n	15