

Test Report No:
2630266R-RFUSV03S-A

TEST REPORT

FCC Rules & Regulations

Product Name	Wi-Fi/Bluetooth Module
Brand Name	Ability
Model No.	AP6256
FCC ID	2AAD3AP6256
Applicant's Name / Address	Ability Enterprise Co., Ltd. No.200, Sec. 3, Zhonghuan Rd., Xinzhuang Dist., New Taipei City 24242, Taiwan
Manufacturer's Name	Ability Enterprise Co., Ltd.
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407
Verdict Summary	IN COMPLIANCE
Documented by Hailey Peng	<i>Hailey Peng</i>
Approved by Alan Chen	<i>Alan Chen</i>
Date of Receipt	2026/03/10
Date of Issue	2026/06/03
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions.....	4
Revision History.....	5
Summary of Test Result.....	6
1. General Information.....	7
1.1. EUT Description	7
1.2. EUT Information	8
1.3. Testing Applied Standards.....	8
1.4. Testing Location Information	9
1.5. Ambient Conditions In The Laboratory.....	10
1.6. Measurement Uncertainty	10
1.7. List of Test Equipment	11
2. Test Configuration of EUT.....	12
2.1. Test Condition.....	12
2.2. Test Frequency Mode.....	12
2.3. Duty Cycle	13
2.4. Measurement Configuration	14
2.5. Tested System Details.....	15
2.6. Configuration of Tested System	15
3. AC Power Line Conducted Emission	16
3.1. Test Setup.....	16
3.2. Test Limit	16
3.3. Test Procedure	16
3.4. Test Result of AC Power Line Conducted Emission.....	16
4. Emission Bandwidth	17
4.1. Test Setup.....	17
4.2. Test Limit	17
4.3. Test Procedure	17
4.4. Test Result of Emission Bandwidth	17
5. Maximum Conducted Output Power	18
5.1. Test Setup.....	18
5.2. Test Limit	19
5.3. Test Procedure	19
5.4. Test Result of Maximum Conducted Output Power	19
6. Maximum Power Spectral Density	20
6.1. Test Setup.....	20

6.2.	Test Limit	20
6.3.	Test Procedure	20
6.4.	Test Result of Maximum Power Spectral Density	20
7.	Radiated Emission.....	21
7.1.	Test Setup.....	21
7.2.	Test Limit	22
7.3.	Test Procedure	23
7.4.	Test Result of Radiated Emission (Below 30 MHz).....	23
7.5.	Test Result of Radiated Emission.....	23
Appendix A. Test Result of AC Power Line Conducted Emission		
Appendix B. Test Result of Emission Bandwidth		
Appendix C. Test Result of Maximum Conducted Output Power		
Appendix D. Test Result of Maximum Power Spectral Density		
Appendix E. Test Result of Radiated Emission		
Appendix F. Test Setup Photograph		

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	2026/06/03

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Emission Bandwidth	PASS	-
5	Maximum Conducted Output Power	PASS	-
6	Maximum Power Spectral Density	PASS	-
7	Radiated Emission	PASS	-

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1. General Information

1.1. EUT Description

Frequency Band	5150 ~ 5250 MHz	
Operating Frequency / Channel Number	IEEE 802.11a/n/ac (20 MHz)	5180 ~ 5240 MHz / 4 Channels
	IEEE 802.11n/ac (40 MHz)	5190 ~ 5230 MHz / 2 Channels
	IEEE 802.11ac (80 MHz)	5210 MHz / 1 Channel
Type of Modulation	IEEE 802.11a/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
	IEEE 802.11ac	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM

Antenna Information				
No.	Brand Name	Part No.	Type	Gain (dBi)
1	Quectel	YXU00A0AA	SMD	2.4

For IEEE 802.11a/n/ac Mode: (1TX, 1RX)

Note: The antenna of EUT conforms to FCC 15.203.

1.2. EUT Information

EUT Power Type	From Test Fixture			
EUT Function	☒	Point-to-multipoint	☐	Point-to-point
Operating Mode	☐	Master		
	☐	Slave with radar detection		
	☒	Slave without radar detection		

1.3. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC CFR Title 47 Part 15 Subpart E Section 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
V	Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
	Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
	Phone/Fax Number	TEL: +886-3-275-7255 FAX: +886-3-327-8031
	USA	FCC Designation Number: TW0033 / FCC Registration Number: 647365
	Canada	CAB Identifier Number: TW3023 / Company Number: 26930
	Site Description	Accredited by TAF Accredited Number: 3023
	Address/ Performed Location	No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
	Phone/Fax Number	TEL: +886-3-582-8001 FAX: +886-3-582-8958
	USA	Test site Designation No. TW3024 with FCC.
	Canada	CAB Identifier Number: TW3024 / Company Number: 22397
	Site Description	Accredited by TAF Accredited Number: 3024
	Address/ Performed Location	No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
	Phone/Fax Number	TEL: +886-3-582-8001 FAX: +886-3-582-8958
	USA	Test site Designation No. TW3024 with FCC.
	Canada	CAB Identifier Number: TW3024 / Company Number: 22397
	Site Description	Accredited by TAF Accredited Number: 3024

1.5. Ambient Conditions In The Laboratory

Performed Item	Items	Required	Actual	Test Date	Tested By
AC Power Line	Temperature (°C)	10~40 °C	25.4 °C	2026/04/15	Kevin Lai
Conducted Emission	Humidity (%RH)	10~90 %	50.6 %		
RF Conducted Emission	Temperature (°C)	10~40 °C	22.3~26.2 °C	2026/03/26 ~ 2026/04/01	Kevin Lai
	Humidity (%RH)	10~90 %	55.5~72.6 %		
Radiated Emission	Temperature (°C)	10~40 °C	24.1~24.2 °C	2026/04/07 ~ 2026/04/14	Bob Chiu
	Humidity (%RH)	10~90 %	62.2~66.3 %		

1.6. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
AC Power Line Conducted Emission	± 3.50 dB
Emission Bandwidth	± 1580.61 Hz
Maximum Conducted Output Power	Spectrum Analyzer: ± 2.13 dB Power Meter: ± 1.05 dB
Maximum Power Spectral Density	± 2.13 dB
Transmitter Radiated Spurious Emission	9 kHz~30 MHz: ± 3.30 dB 30 MHz~1 GHz: ± 5.19 dB 1 GHz~18 GHz: ± 4.46 dB 18 GHz~40 GHz: ± 4.19 dB
Duty Cycle	± 0.62 %

1.7. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2025/04/28	2026/04/27
V	Two-Line V-Network	R&S	ENV216	101306	2026/03/27	2028/03/26
V	Two-Line V-Network	R&S	ENV216	101307	2025/08/06	2027/08/05
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2026/01/10	2027/01/09

Note:

1. Two-Line V-Network is calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103467	2025/05/29	2026/05/28
V	Spectrum Analyzer	KEYSIGHT	N9010A	MY54510317	2025/08/04	2026/08/03
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2025/05/05	2026/05/04
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240002	2025/05/07	2026/05/06
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240003	2025/05/07	2026/05/06

Note:

1. All equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version : DTC_RF_Tool_Release V2.0.37.

For Radiated Measurements /HY-CB02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
V	Loop Antenna	TESEQ	HLA6121	49611	2026/02/04	2027/02/03
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2025/08/14	2027/08/13
V	Horn Antenna	RF SPIN	DRH18-E	210503A18ES	2026/02/06	2028/02/05
V	Horn Antenna	Com-Power	AH-840	101100	2025/10/07	2027/10/06
V	Pre-Amplifier	Queitek	MPA0301	AP-180C	2026/01/10	2027/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200203	2026/01/10	2027/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980285	2026/01/10	2027/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2026/01/10	2027/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	160311	2026/01/10	2027/01/09
V	Coaxial Cable	SGH	HC360-2.92M/2.92M-7.0M	202108-1	2026/01/10	2027/01/09
	Filter	MICRO TRONICS	BRM20887	G002	2026/01/05	2027/01/04
V	Filter	MICRO TRONICS	BRM50716	G067	2026/01/05	2027/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2025/12/01	2026/11/30
V	Spectrum Analyzer	R&S	FSV3044	101113	2025/12/23	2026/12/22
V	Coaxial Cable	SGH	HA800	GD20110223-2	2026/01/10	2027/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-4	2026/01/10	2027/01/09
V	Coaxial Cable	SGH	SGH18	202108-5	2026/01/10	2027/01/09
V	Coaxial Cable	SGH	HA800-SMASMA-10M	202212-1	2026/01/10	2027/01/09

Note:

1. Bi-Log Antenna and Horn Antenna are calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 3.3V

2.2. Test Frequency Mode


Test Software Version	CMD / Version: 10.0.26200.8039
-----------------------	--------------------------------

Modulation	Frequency (MHz)	Power Setting			
		SISO A	SISO B	MIMO A	MIMO B
802.11a (20 MHz)	5180	47	--	--	--
	5200	47	--	--	--
	5240	47	--	--	--
802.11ac (20 MHz)	5180	48	--	--	--
	5200	48	--	--	--
	5240	48	--	--	--
802.11ac (40 MHz)	5190	50	--	--	--
	5230	50	--	--	--
802.11ac (80 MHz)	5210	51	--	--	--

2.3. Duty Cycle

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a (20 MHz)	2.0400	2.1000	97.14	0.13	500
802.11ac (20 MHz)	1.9100	1.9700	96.95	0.13	1000
802.11ac (40 MHz)	0.9400	0.9850	95.43	0.20	2000
802.11ac (80 MHz)	0.4520	0.4880	92.62	0.33	3000

Note: The duty factor will compensate for the total power and power spectral density.

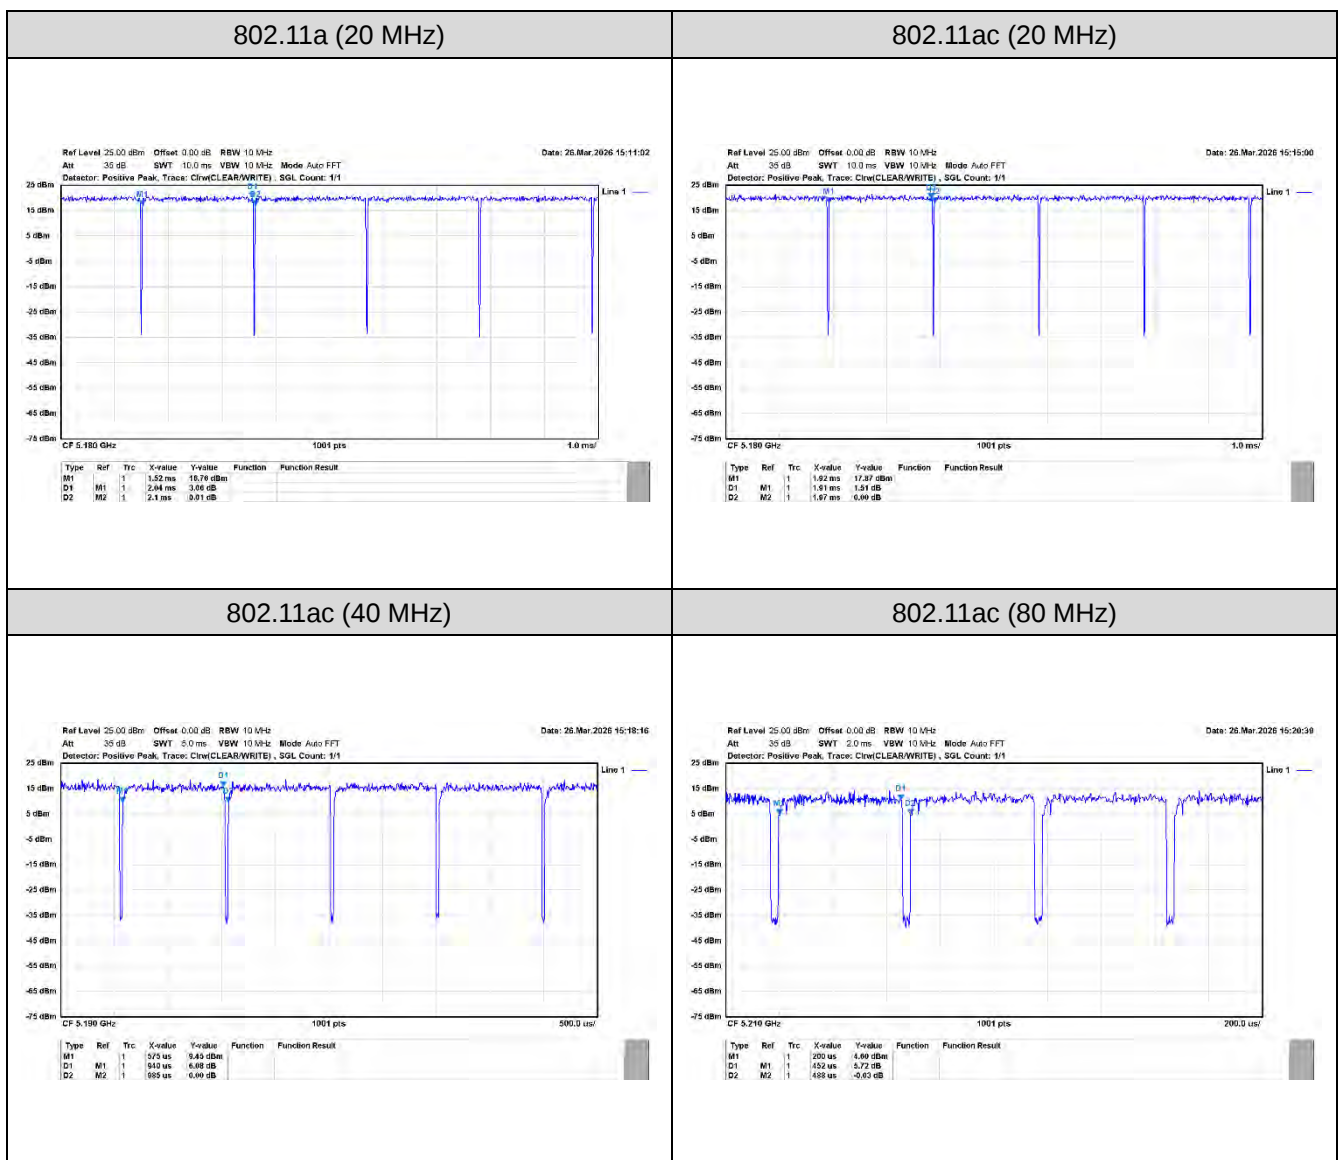

2.4. Measurement Configuration

Tests Item	AC Power Line Conducted Emission
Test Condition	AC power line conducted measurement for line and neutral
Operating Mode	Transmit

Tests Item	Emission Bandwidth Maximum Conducted Output Power Maximum Power Spectral Density
Test Condition	Conducted measurement at transmit chains
Operating Mode	Transmit

Tests Item	Radiated Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
Operating Mode > 1GHz	Transmit


Note:

1. Determining compliance shall be based on the results of the compliance measurement, without taking measurement instrumentation uncertainty into account.
2. For radiated emissions below 1 GHz and AC power line conducted emissions, all modes of operation were investigated, and the worst-case emissions are reported.
3. The modulation and bandwidth are similar across 802.11n mode, 802.11ac mode. Therefore, the worst case was evaluated and selected to represent the 802.11ac modes in the test report.
4. The lowest data rates are tested in each mode. Only the worst case is shown in the report.
(802.11a is 6 Mbps, 802.11ac is MCS0)

2.5. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	DC Power Supply	KEYSIGHT	E36234A	MY59001234	Non-shielded, 1.8m
2	Notebook PC	DELL	Latitude E5440	74BTK32	N/A
3	Control Board	ability	A113D-EVB-V01	N/A	N/A
4	SD card adapter board	ability	AP6256_EVB	N/A	N/A

2.6. Configuration of Tested System

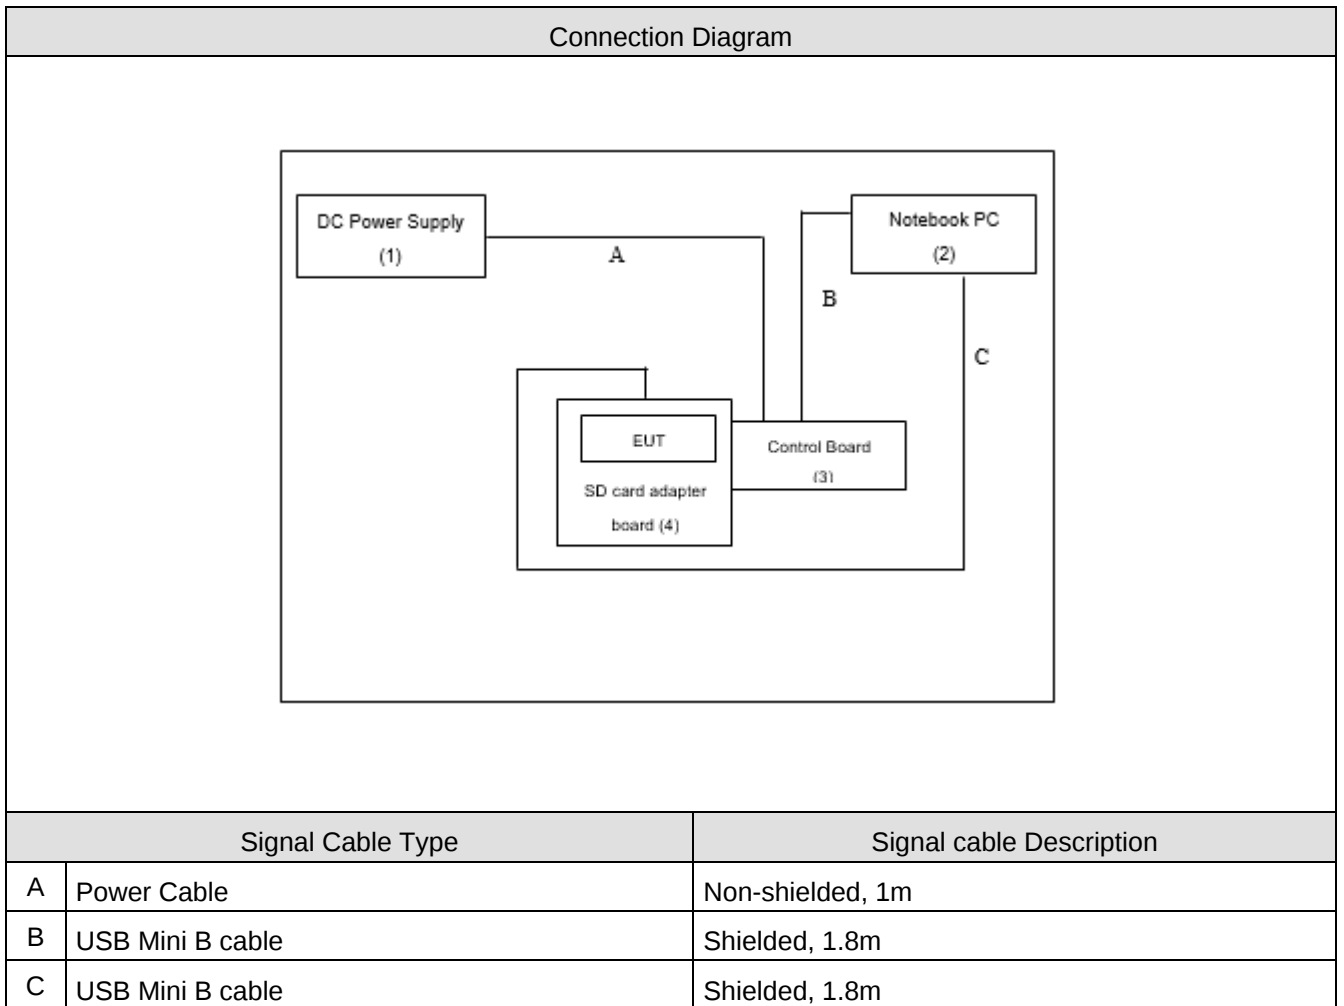

3. AC Power Line Conducted Emission

3.1. Test Setup

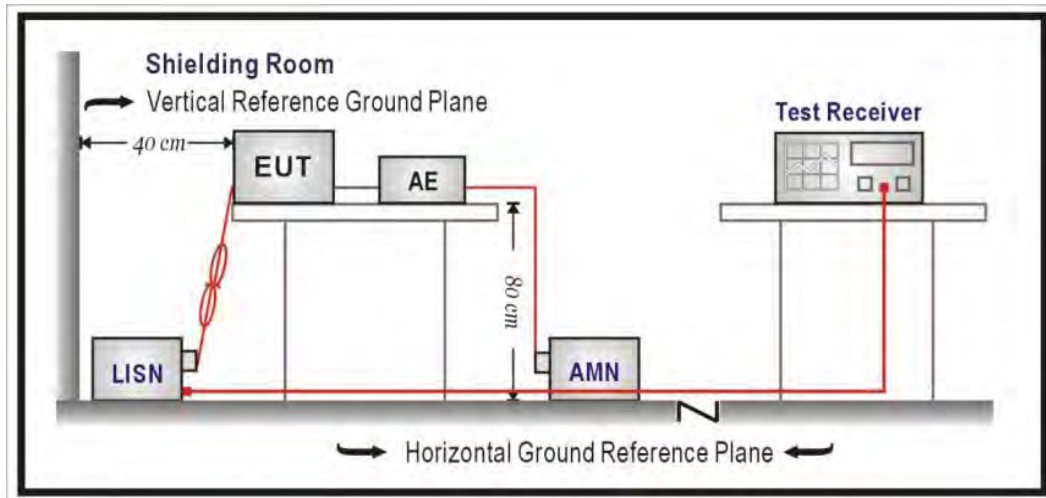

3.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure


The EUT was setup according to ANSI C63.10-2020 for AC Power Line Conducted Emissions.

3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

4. Emission Bandwidth

4.1. Test Setup

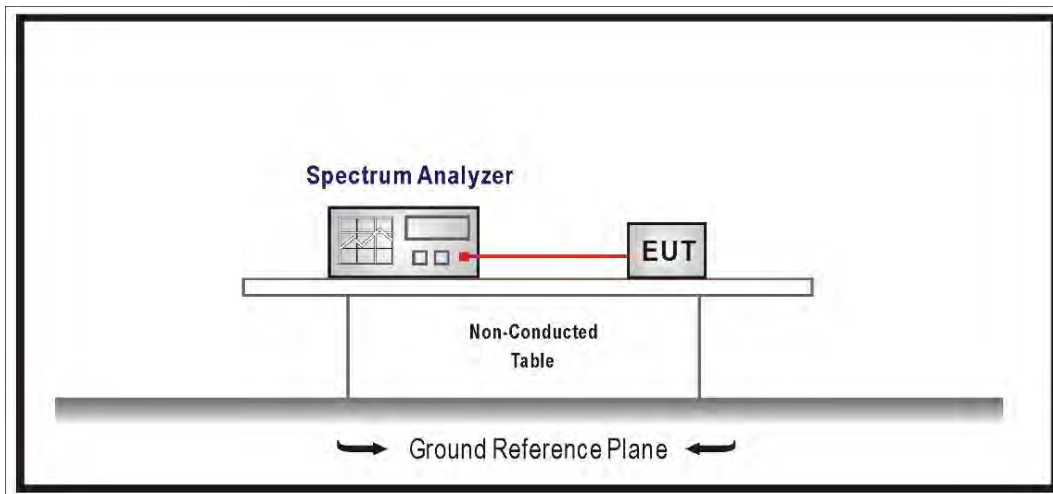

4.2. Test Limit

26dB Bandwidth & 99% Occupied Bandwidth : No Required

DTS Bandwidth $\geq$ 500kHz

4.3. Test Procedure

The EUT was setup to ANSI C63.10-2020; tested to U-NII test procedure of KDB 789033.


4.4. Test Result of Emission Bandwidth

Refer as Appendix B


5. Maximum Conducted Output Power

5.1. Test Setup

For straddle channels:

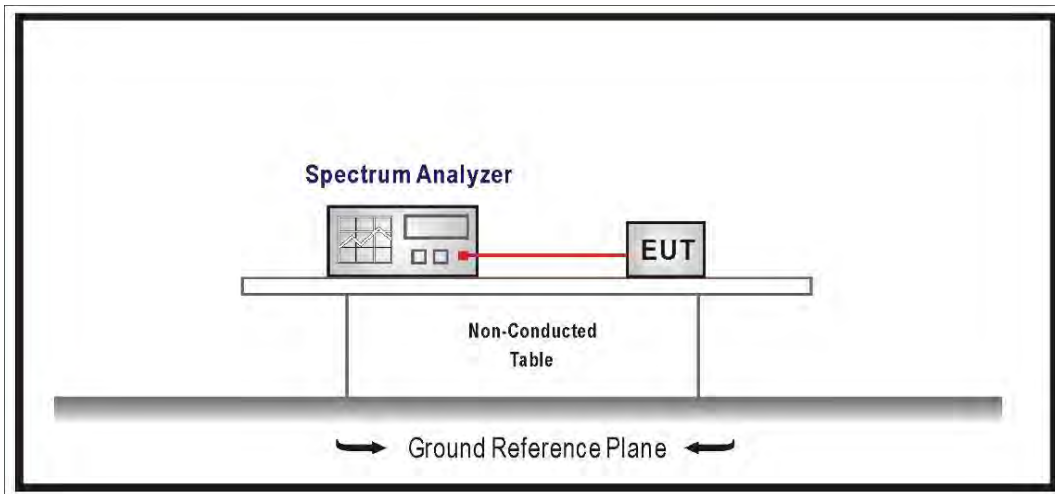

For other channels:

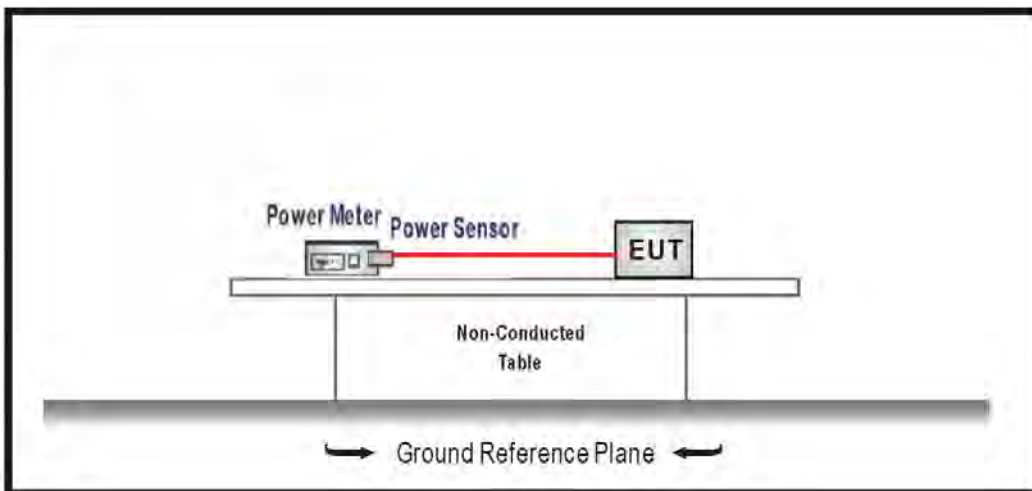

5.2. Test Limit

1. For an outdoor access point and an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure


The EUT was setup to ANSI C63.10-2020; tested to U-NII test procedure of KDB 789033.

5.4. Test Result of Maximum Conducted Output Power

Refer as Appendix C

6. Maximum Power Spectral Density

6.1. Test Setup

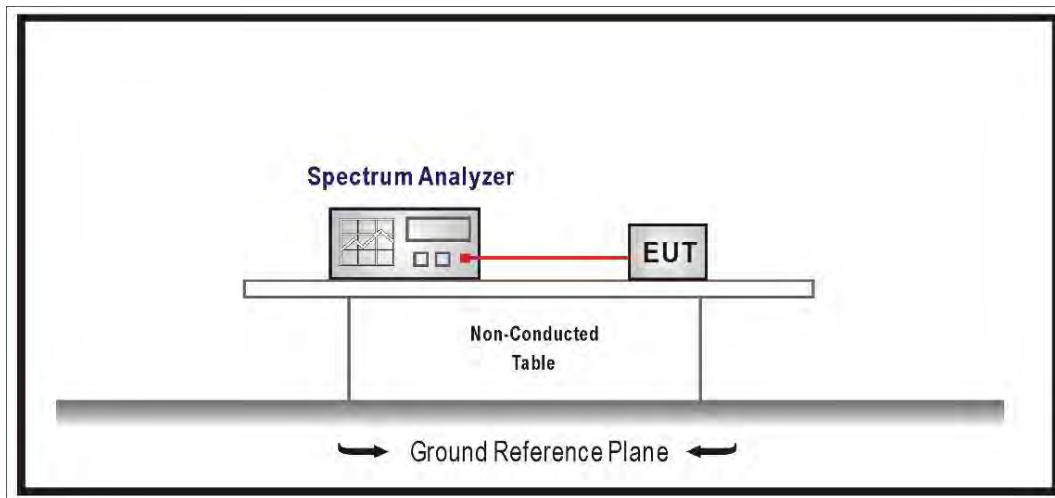

6.2. Test Limit

1. For the band 5.15 ~ 5.25 GHz, the peak power spectral density shall not exceed 17 dBm in any 1 MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For client devices in the 5.15 ~ 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi
3. For the 5.25 ~ 5.35 GHz ,5470 ~ 5600 MHz and 5650 ~ 5725 MHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
4. For the band 5.725 ~ 5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

6.3. Test Procedure

The EUT was setup to ANSI C63.10-2020; tested to U-NII test procedure of KDB 789033.


6.4. Test Result of Maximum Power Spectral Density

Refer as Appendix D


7. Radiated Emission

7.1. Test Setup


9 kHz ~ 30 MHz

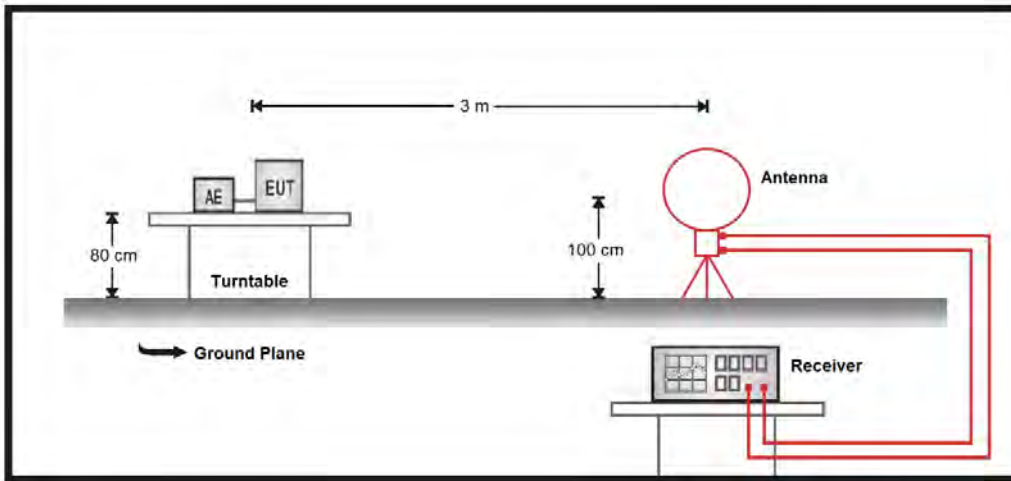

30 MHz ~ 1 GHz

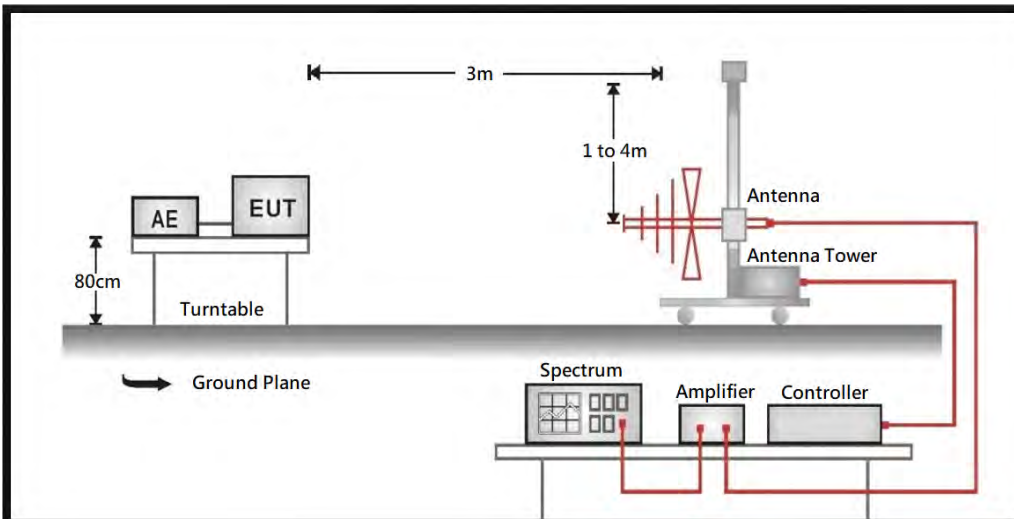

Above 1 GHz

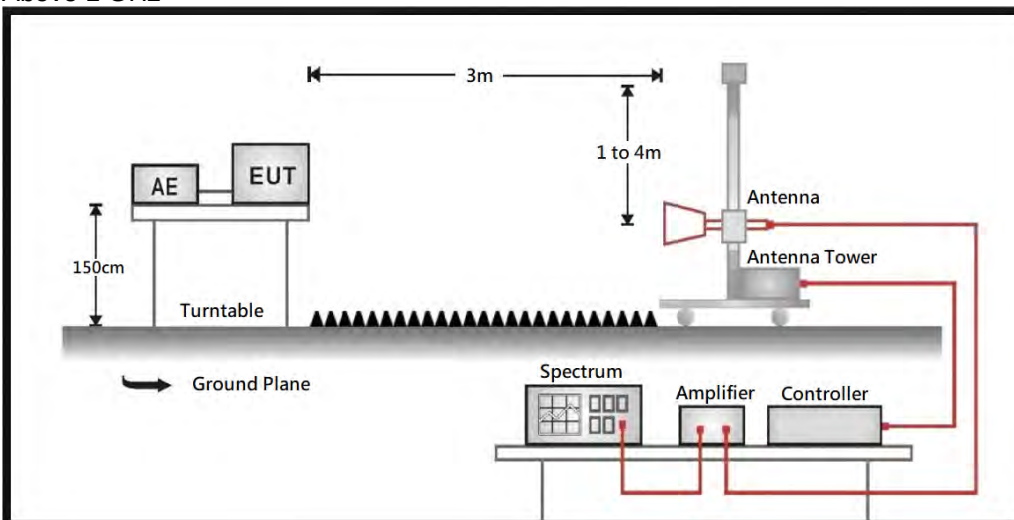

7.2. Test Limit

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBμV/m) = 20 log Field strength (μV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Unwanted Emission out of the restricted bands Test Limit

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBμV/m@3m)
5150 – 5250	-27	68.2
5250 – 5350	-27	68.2
5470 – 5725	-27	68.2
5725 – 5850	-27 ^{*1}	68.2 ^{*1}
	10 ^{*2}	105.2 ^{*2}
	15.6 ^{*3}	110.8 ^{*3}
	27 ^{*4}	122.2 ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts).}$$

7.3. Test Procedure

The EUT and all the supporting units are placed on a turn table which is 0.8 or 1.5 meters above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10-2020 on radiated measurement.

On any frequency or frequencies from 9 kHz (include the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

7.4. Test Result of Radiated Emission (Below 30 MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

7.5. Test Result of Radiated Emission

Refer as Appendix E

Appendix A. Test Result of AC Power Line Conducted Emission

TX_ac80_5210MHz_Line

Site :HY-SR01
Condition :Line
Mode :TX_ac80_5210MHz
test by :Kevin

Date: 2026-04-15

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.152	45.48	65.89	-20.40	19.86	9.63	QP
2	0.152	22.40	55.89	-33.49	12.77	9.63	Average
3	0.248	33.36	61.84	-28.48	23.71	9.65	QP
4	0.248	28.50	51.84	-23.34	18.85	9.65	Average
5	0.399	32.50	57.86	-25.36	22.84	9.66	QP
6	0.395	24.40	47.88	-23.40	14.80	9.65	Average
7	2.302	29.83	56.00	-26.17	20.06	9.77	QP
8	2.302	28.13	46.00	-25.87	18.36	9.77	Average
9	6.835	38.65	60.00	-29.35	20.51	10.14	QP
10	6.835	20.80	50.00	-29.20	10.66	10.14	Average
11	19.279	29.86	60.00	-30.14	19.96	9.90	QP
12	19.279	17.79	50.00	-32.21	7.89	9.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX_ac80_5210MHz_Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX_ac80_5210MHz
test by :Kevin

Date: 2026-04-15

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.154	47.37	65.77	-18.40	37.73	9.64	QP
2	0.154	22.79	55.77	-32.98	13.15	9.64	Average
3	0.187	49.40	64.41	-15.01	39.75	9.63	QP
4	0.182	23.60	54.41	-30.81	13.95	9.65	Average
5	0.395	33.51	57.96	-24.45	23.66	9.65	QP
6	0.395	25.75	47.96	-22.22	16.10	9.65	Average
7	2.256	27.08	56.00	-28.92	17.33	9.75	QP
8	2.256	15.88	46.00	-30.12	6.13	9.75	Average
9	7.516	32.58	60.00	-27.42	22.43	10.15	QP
10	7.516	22.28	50.00	-27.72	12.13	10.15	Average
11	18.184	29.35	60.00	-30.65	19.47	9.88	QP
12	18.184	18.45	50.00	-31.55	8.57	9.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of Emission Bandwidth


Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
				99% Occupied Bandwidth & 26dB Bandwidth
802.11a (20MHz)	5180	16.50	20.88	-
	5200	16.58	20.76	-
	5240	16.50	20.48	-

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
				99% Occupied Bandwidth & 26dB Bandwidth
802.11ac (20MHz)	5180	17.74	21.00	-
	5200	17.74	20.96	-
	5240	17.58	21.16	-


Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
				99% Occupied Bandwidth & 26dB Bandwidth
802.11ac (40MHz)	5190	36.12	39.92	-
	5230	36.04	39.36	-

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
				99% Occupied Bandwidth & 26dB Bandwidth
802.11ac (80MHz)	5210	75.12	80.48	-


For 99% Occupied Bandwidth:

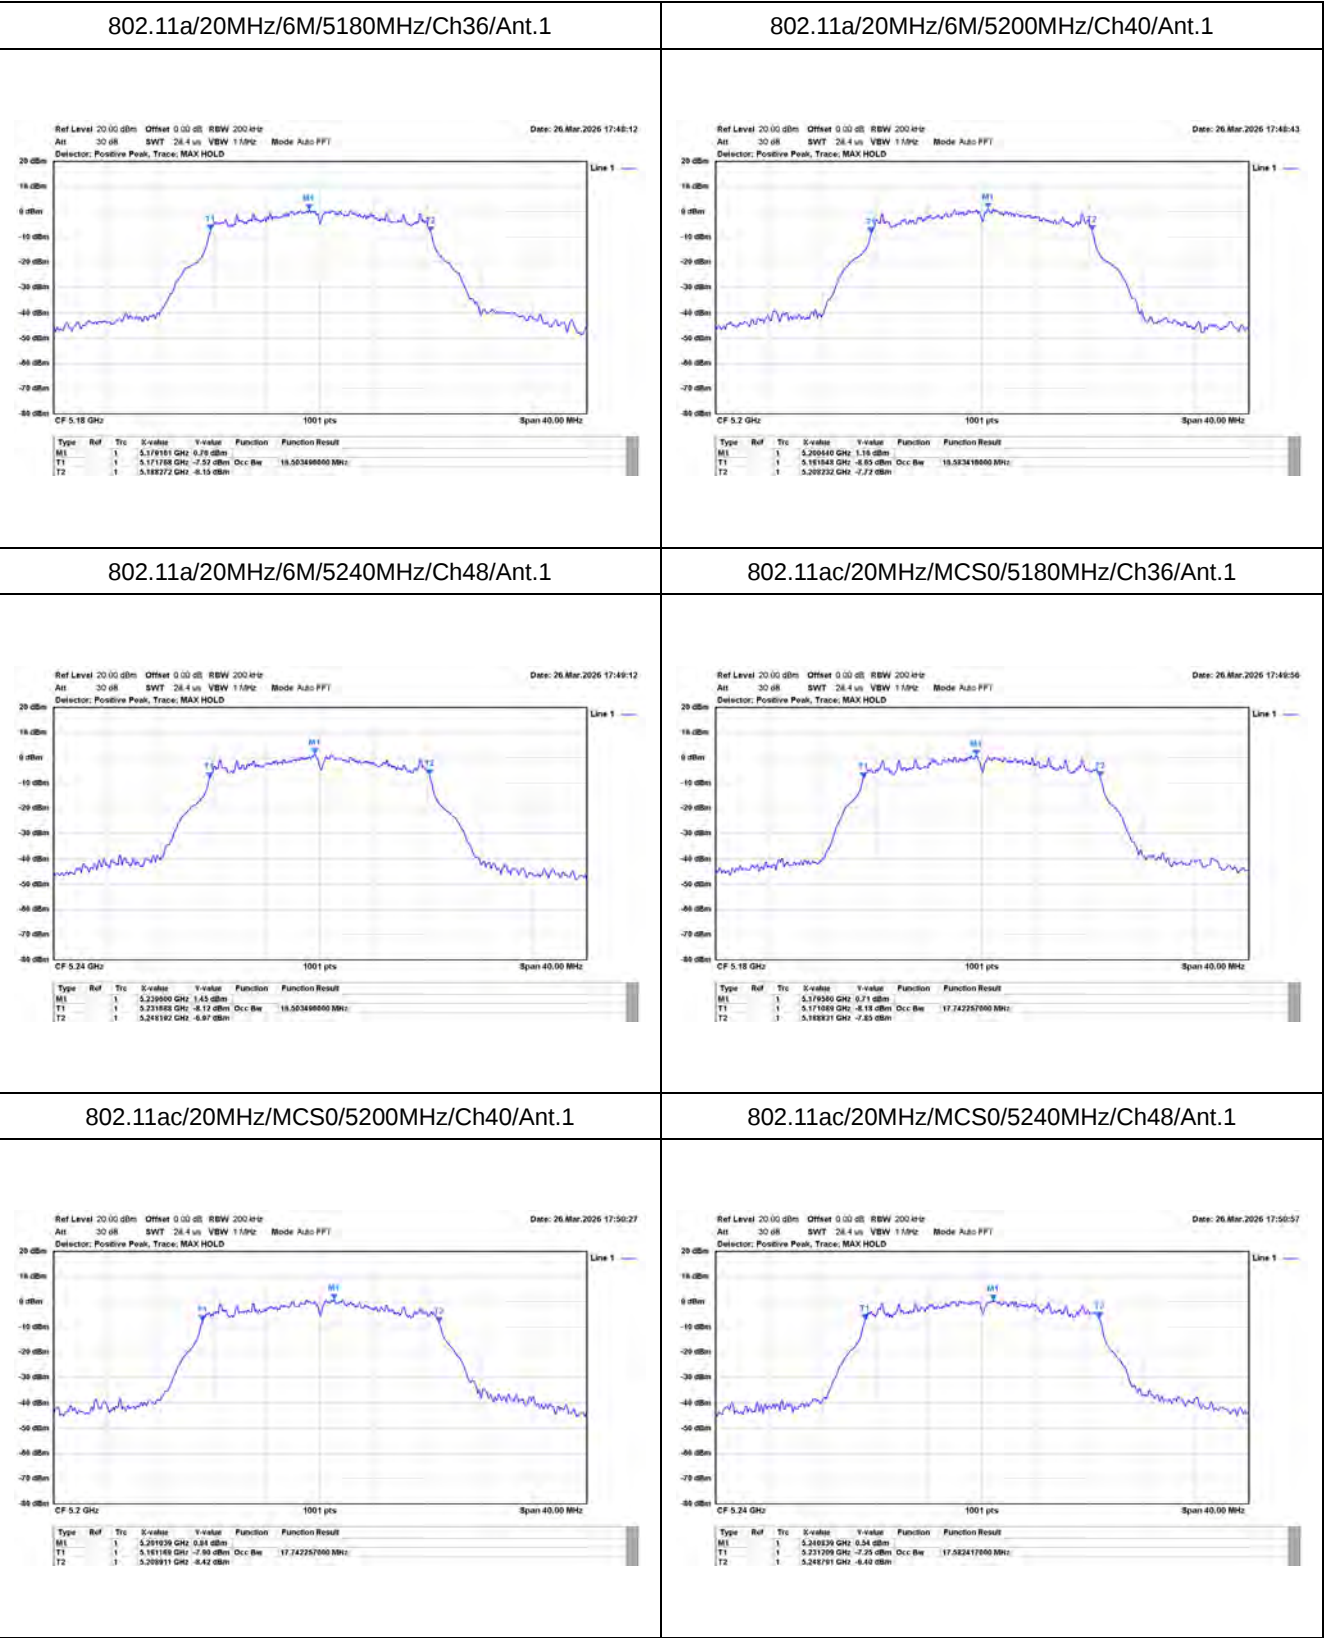


802.11ac/40MHz/MCS0/5190MHz/Ch38/Ant.1

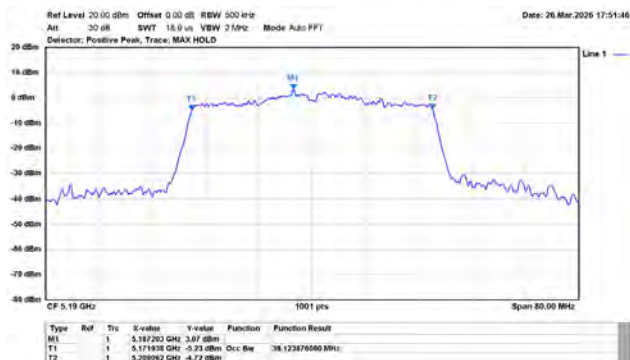

802.11ac/40MHz/MCS0/5230MHz/Ch46/Ant.1

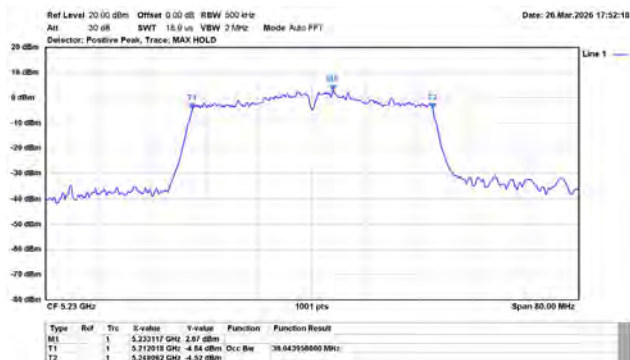


802.11ac/80MHz/MCS0/5210MHz/Ch42/Ant.1

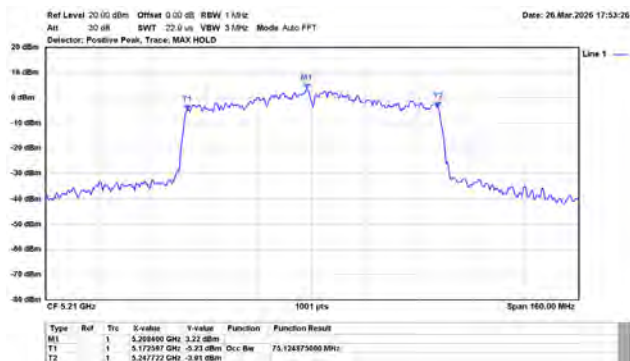


For 26dB Bandwidth:


802.11a/20MHz/6M/5180MHz/Ch36/Ant.1

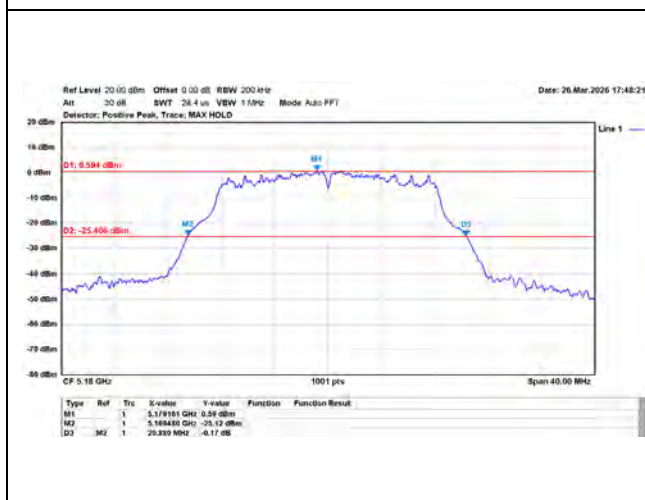


802.11a/20MHz/6M/5200MHz/Ch40/Ant.1

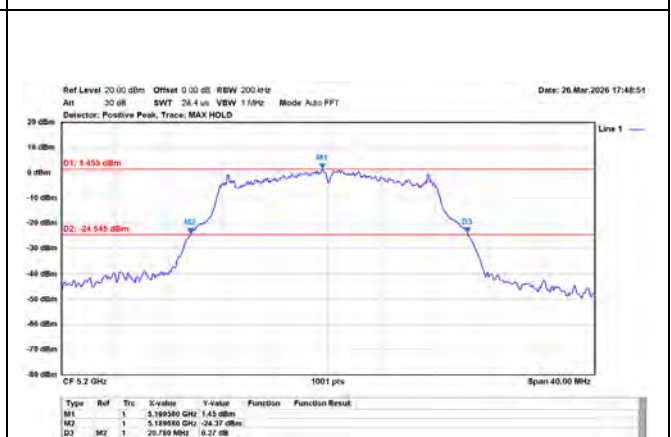


802.11a/20MHz/6M/5240MHz/Ch48/Ant.1

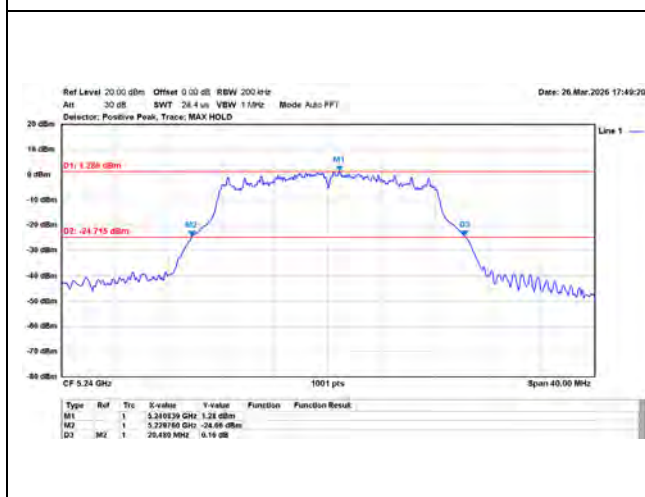


802.11ac/20MHz/MCS0/5180MHz/Ch36/Ant.1

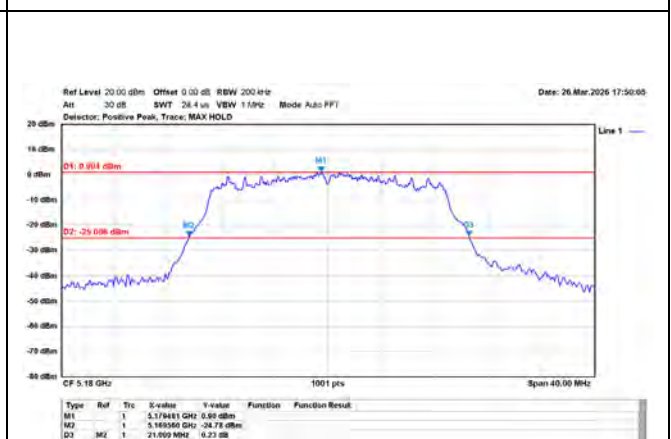


802.11ac/20MHz/MCS0/5200MHz/Ch40/Ant.1

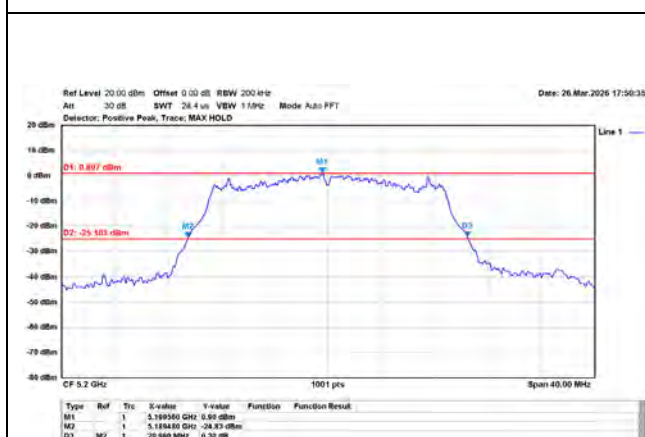


802.11ac/20MHz/MCS0/5240MHz/Ch48/Ant.1

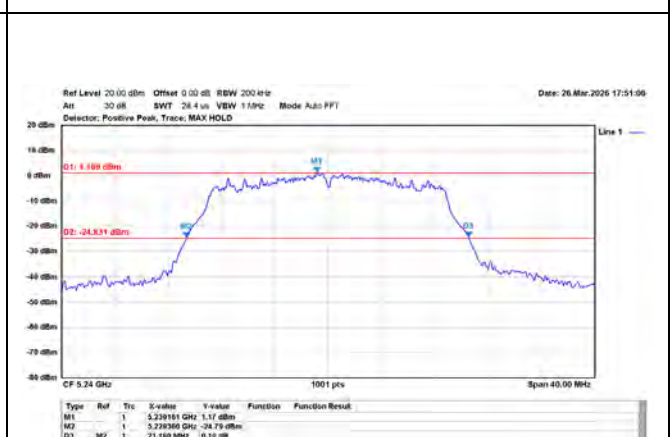


802.11ac/40MHz/MCS0/5190MHz/Ch38/Ant.1

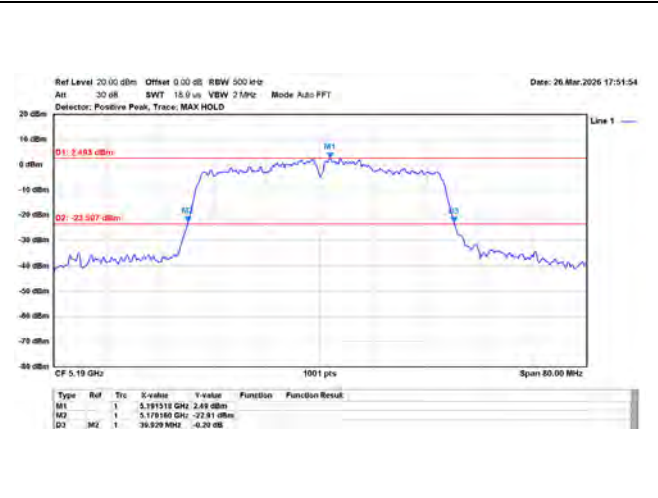

802.11ac/40MHz/MCS0/5230MHz/Ch46/Ant.1

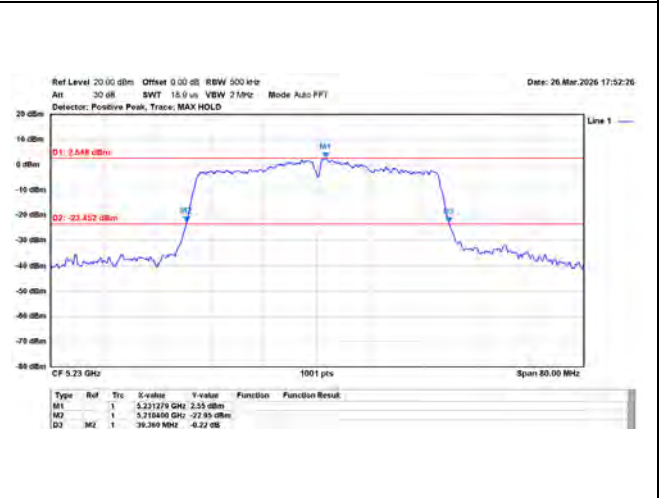

802.11ac/80MHz/MCS0/5210MHz/Ch42/Ant.1

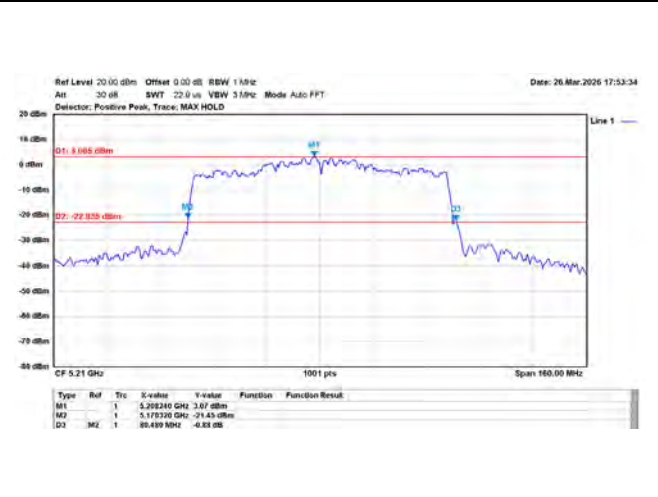


Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a (20MHz)	5180	12.60	24.00	Pass
	5200	12.71	24.00	Pass
	5240	12.73	24.00	Pass
802.11ac (20MHz)	5180	12.80	24.00	Pass
	5200	12.69	24.00	Pass
	5240	12.70	24.00	Pass
802.11ac (40MHz)	5190	12.79	24.00	Pass
	5230	12.88	24.00	Pass
802.11ac (80MHz)	5210	12.95	24.00	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a (20MHz)	5180	1.10	11.00	Pass
	5200	0.93	11.00	Pass
	5240	1.24	11.00	Pass
802.11ac (20MHz)	5180	0.38	11.00	Pass
	5200	0.57	11.00	Pass
	5240	0.63	11.00	Pass
802.11ac (40MHz)	5190	-1.17	11.00	Pass
	5230	-1.73	11.00	Pass
802.11ac (80MHz)	5210	-4.46	11.00	Pass


802.11a/20MHz/6M/5180MHz/Ch36/Ant.1

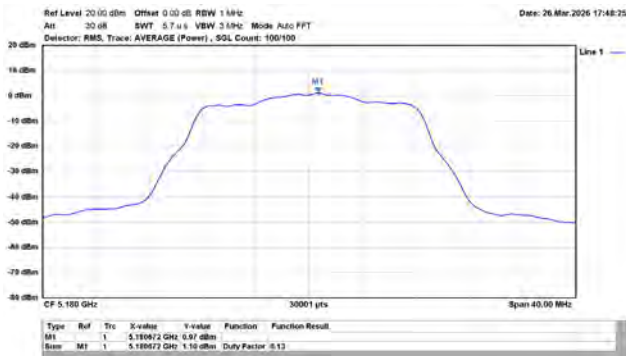


802.11a/20MHz/6M/5200MHz/Ch40/Ant.1

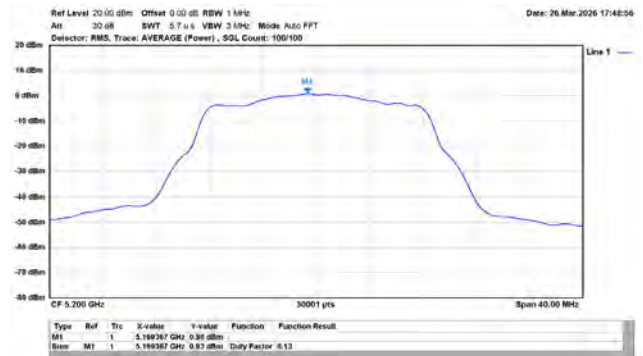


802.11a/20MHz/6M/5240MHz/Ch48/Ant.1

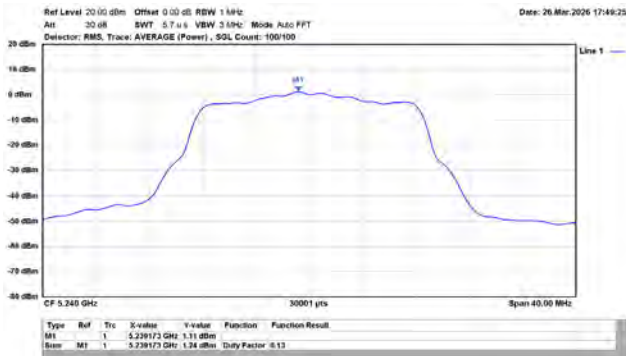

802.11ac/20MHz/MCS0/5180MHz/Ch36/Ant.1

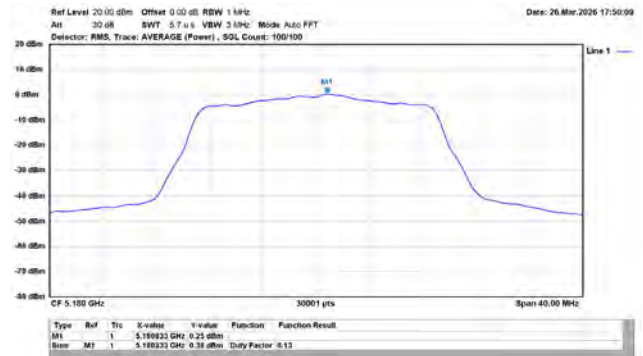


802.11ac/20MHz/MCS0/5200MHz/Ch40/Ant.1

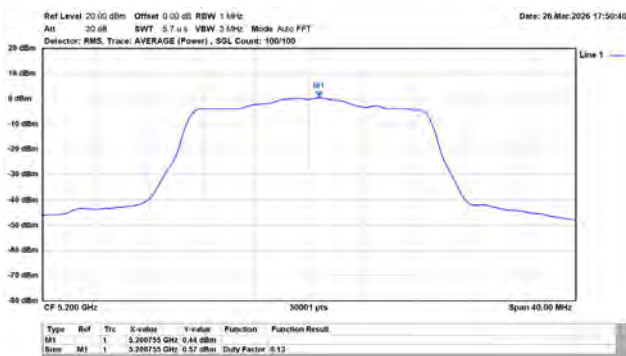


802.11ac/20MHz/MCS0/5240MHz/Ch48/Ant.1




802.11ac/40MHz/MCS0/5190MHz/Ch38/Ant.1

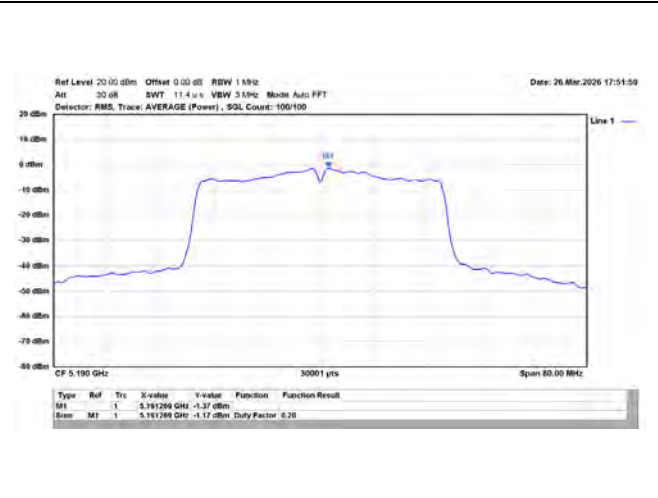

802.11ac/40MHz/MCS0/5230MHz/Ch46/Ant.1

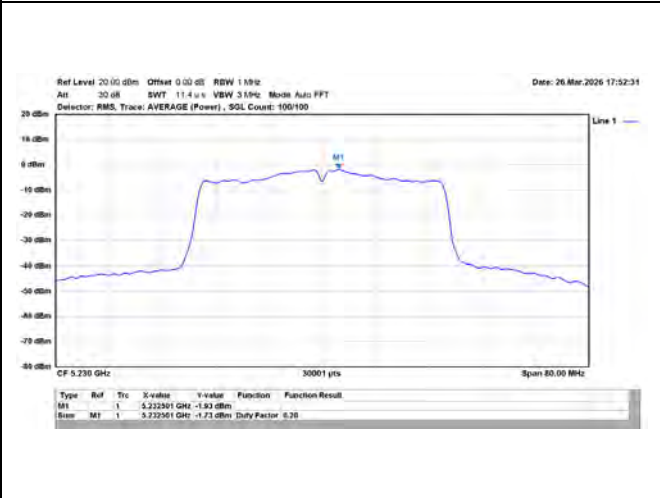


802.11ac/80MHz/MCS0/5210MHz/Ch42/Ant.1

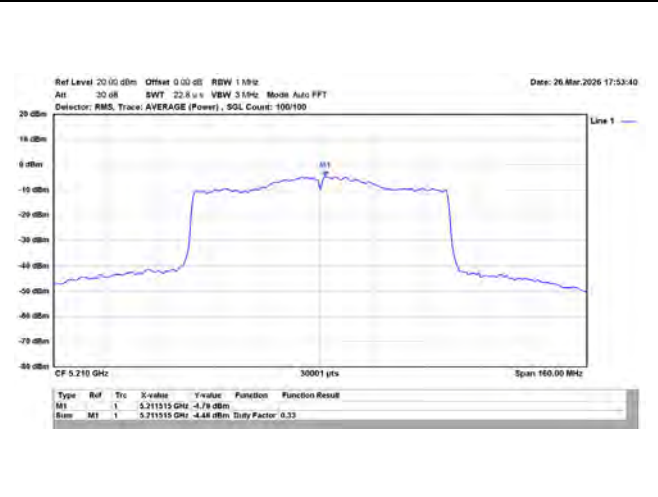

Appendix E. Test Result of Radiated Emission**TX_a_5180MHz_H**

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5180MHz
Test by :Nova

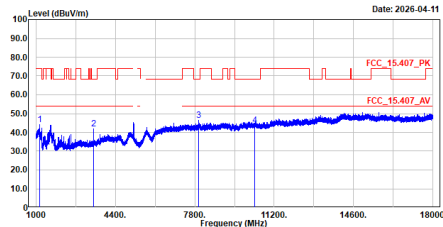


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1146.625	44.33	74.00	-29.67	67.79	-23.46	Peak
2	3453.313	41.72	68.22	-26.50	60.06	-18.34	Peak
3	7976.375	46.38	68.22	-21.84	52.26	-5.88	Peak
4	10360.000	43.71	68.22	-24.51	48.89	-5.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5180MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :Nova

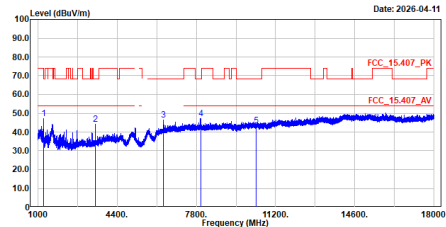


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1244.375	47.10	68.22	-21.12	70.56	-23.46	Peak
2	3453.313	44.10	68.22	-24.12	62.44	-18.34	Peak
3	6380.500	46.27	68.22	-21.95	52.22	-5.95	Peak
4	7989.656	47.19	68.22	-21.03	53.13	-5.94	Peak
5	10360.000	43.27	68.22	-24.95	48.45	-5.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5200MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5200MHz
Test by :Nova

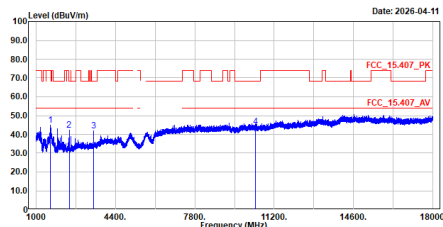


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1615.188	45.03	74.00	-28.97	68.04	-23.01	Peak
2	2411.000	42.44	68.22	-25.78	63.23	-20.79	Peak
3	3466.594	42.03	68.22	-26.19	60.30	-18.27	Peak
4	10400.000	44.13	68.22	-24.09	49.39	-5.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5200MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5200MHz
Test by :Nova

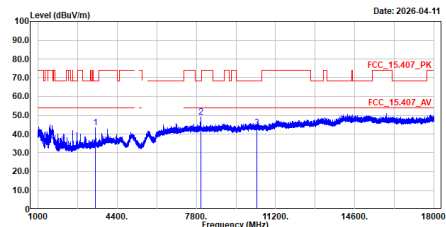


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3466.594	43.29	68.22	-24.93	61.56	-18.27	Peak
2	7992.313	49.02	68.22	-19.20	54.98	-5.96	Peak
3	10400.000	43.22	68.22	-25.00	48.48	-5.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5240MHz_H


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :Nova

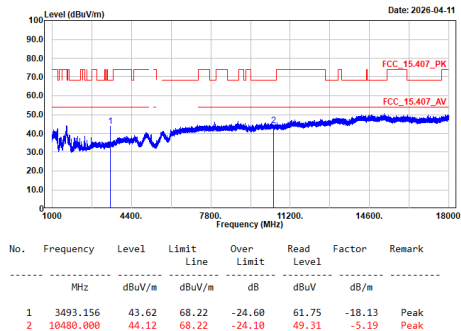

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5240MHz_V


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :Nova

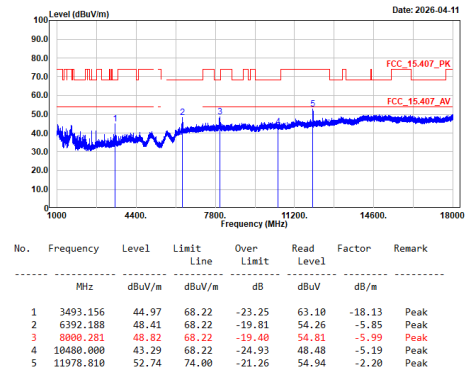

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5180MHz
Test by :Nova

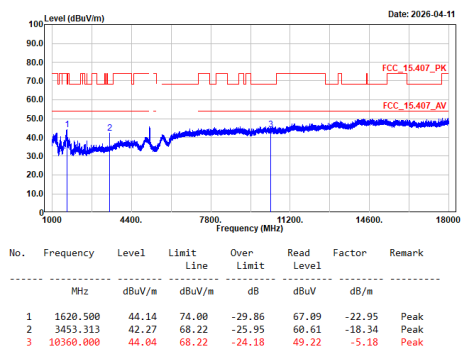

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5180MHz
Test by :Nova

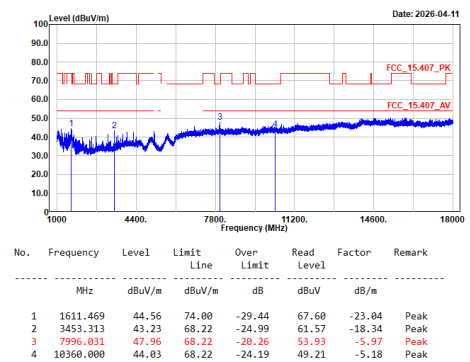

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5200MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5200MHz
Test by :Nova

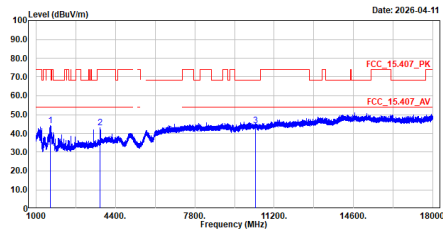


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1610.406	44.29	74.00	-29.71	67.34	-23.05	Peak
2	3743.906	43.05	74.00	-30.95	59.56	-16.51	Peak
3	10480.000	43.98	68.22	-24.24	49.24	-5.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5200MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5200MHz
Test by :Nova

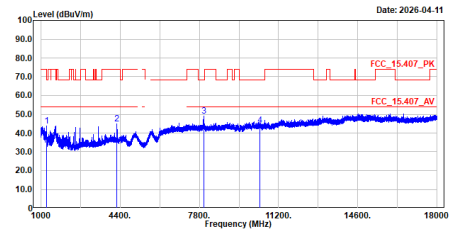


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1247.563	43.81	68.22	-24.41	67.27	-23.46	Peak
2	4247.531	44.75	74.00	-29.25	59.94	-15.19	Peak
3	7983.281	48.88	68.22	-19.34	54.79	-5.91	Peak
4	10480.000	43.98	68.22	-24.24	49.24	-5.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5240MHz
Test by :Nova

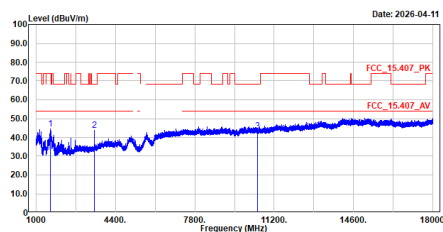


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1609.875	44.44	74.00	-29.56	67.49	-23.05	Peak
2	3493.156	43.81	68.22	-24.41	61.94	-18.13	Peak
3	10480.000	43.48	68.22	-24.74	48.67	-5.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5240MHz
Test by :Nova

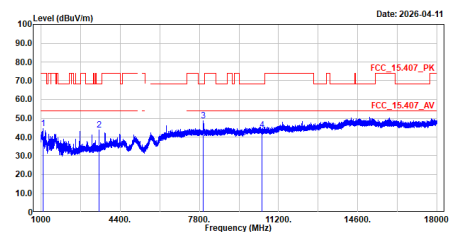


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1084.469	44.47	74.00	-29.53	68.54	-24.07	Peak
2	3493.156	43.90	68.22	-24.32	62.03	-18.13	Peak
3	7971.063	48.50	68.22	-19.72	54.35	-5.85	Peak
4	10480.000	43.64	68.22	-24.58	48.83	-5.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac40_5190MHz
Test by :nova

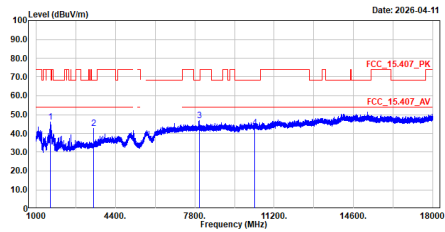


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1608.813	46.16	74.00	-27.84	69.22	-23.06	Peak
2	3459.688	42.54	68.22	-25.68	60.84	-18.30	Peak
3	7991.250	46.90	68.22	-21.32	52.84	-5.94	Peak
4	10380.000	43.00	68.22	-25.22	48.22	-5.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac40_5190MHz
Test by :nova

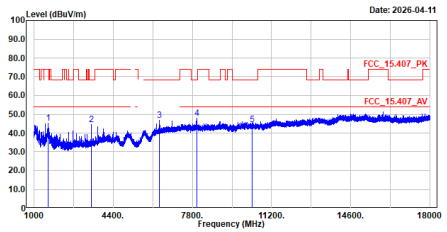


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1618.375	45.24	74.00	-28.76	68.21	-22.97	Peak
2	3459.688	44.37	68.22	-23.85	62.67	-18.30	Peak
3	6389.531	46.84	68.22	-21.38	52.71	-5.87	Peak
4	7990.563	47.88	68.22	-20.34	53.85	-5.97	Peak
5	10380.000	44.34	68.22	-23.88	49.56	-5.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac40_5230MHz
Test by :nova

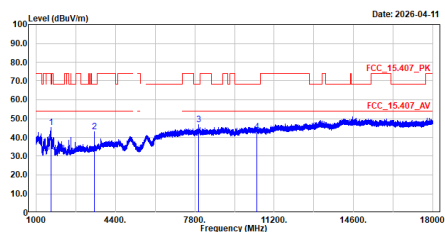


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1626.344	45.40	74.00	-28.60	68.36	-22.96	Peak
2	3486.250	42.85	68.22	-25.37	61.02	-18.17	Peak
3	7964.156	46.61	68.22	-21.61	52.46	-5.85	Peak
4	10460.000	43.06	68.22	-25.16	48.34	-5.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5230MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac40_5230MHz
Test by :nova

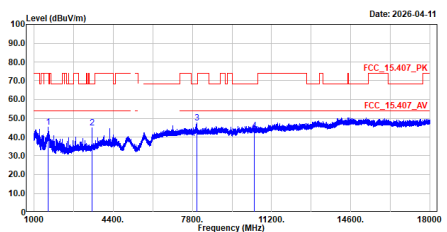


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1592.344	45.12	74.00	-28.88	68.27	-23.15	Peak
2	3486.781	44.87	68.22	-23.35	63.04	-18.17	Peak
3	7993.906	47.53	68.22	-20.69	53.49	-5.96	Peak
4	10460.000	43.53	68.22	-24.69	48.81	-5.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5210MHz
Test by :nova

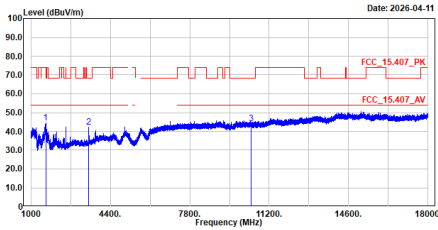


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1619.438	44.47	74.00	-29.53	67.43	-22.96	Peak
2	3472.969	42.38	68.22	-25.84	60.63	-18.25	Peak
3	18420.000	44.12	68.22	-24.10	49.41	-5.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5210MHz
Test by :nova

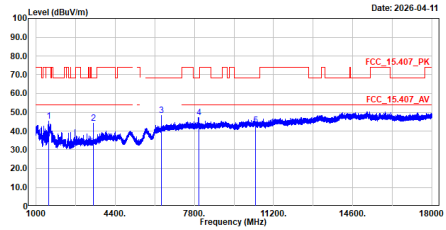


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1529.656	45.11	74.00	-28.89	68.48	-23.37	Peak
2	3472.969	44.24	68.22	-23.98	62.49	-18.25	Peak
3	6367.750	48.33	68.22	-19.89	54.36	-6.03	Peak
4	7990.188	47.15	68.22	-21.07	53.09	-5.94	Peak
5	18420.000	42.94	68.22	-25.28	48.23	-5.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_QP

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac80_5210MHz
Test by :Bob Chiu

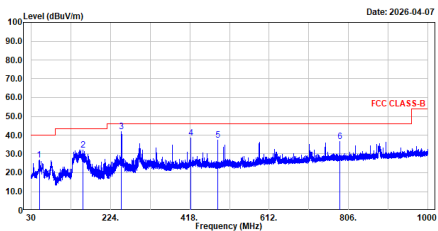


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.701	26.68	40.00	-13.32	36.72	-10.04	QP
2	155.707	32.17	43.50	-11.33	42.91	-10.74	QP
3	249.961	41.06	46.00	-4.94	53.90	-12.04	QP
4	420.070	38.66	46.00	-7.34	46.21	-7.55	QP
5	486.224	37.37	46.00	-8.63	43.38	-6.01	QP
6	785.439	36.56	46.00	-9.44	37.52	-0.96	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ac80_5210MHz_V_QP

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac80_5210MHz
Test by :Bob Chiu

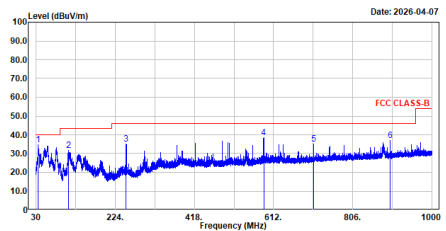


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	35.000	34.55	40.00	-5.45	45.44	-10.89	QP
2	109.154	31.62	43.50	-11.88	45.45	-13.83	QP
3	249.961	35.05	46.00	-10.95	47.09	-12.04	QP
4	587.979	38.67	46.00	-7.33	42.51	-3.84	QP
5	718.635	35.00	46.00	-11.00	37.01	-2.01	QP
6	897.645	36.80	46.00	-9.20	36.70	0.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_a_5180MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Bob Chiu

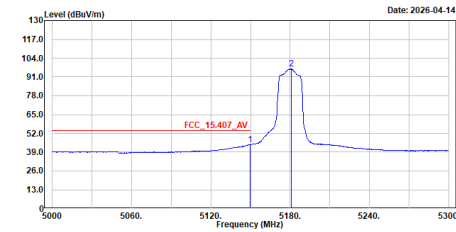


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	44.24	54.00	-9.76	29.80	14.44	Average
2	5180.900	96.56	-----	-----	82.16	14.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5180MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Bob Chiu

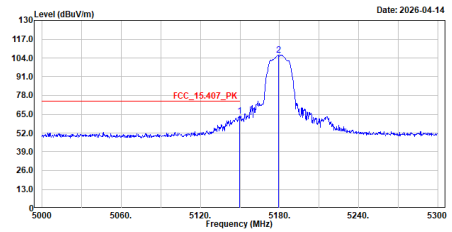


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	63.59	74.00	-10.41	49.15	14.44	Peak
2	5179.400	106.20	-----	-----	91.80	14.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5180MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Bob Chiu

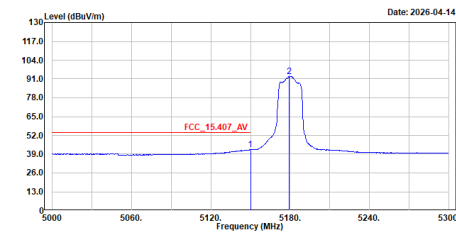


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	42.02	54.00	-11.98	27.58	14.44	Average
2	5179.100	92.84	-----	-----	78.44	14.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5180MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Bob Chiu

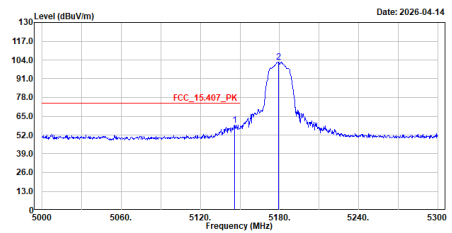


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5145.800	58.81	74.00	-15.19	44.38	14.43	Peak
2	5179.400	102.49	-----	-----	88.09	14.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac20_5180MHz
Test by :Bob Chiu

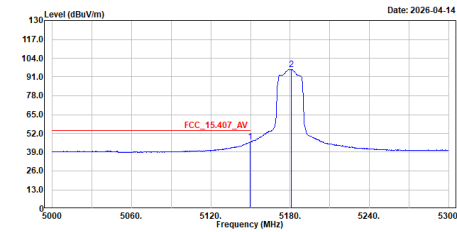


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	46.00	54.00	-8.00	31.56	14.44	Average
2	5180.900	96.30	-----	-----	81.90	14.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac20_5180MHz
Test by :Bob Chiu

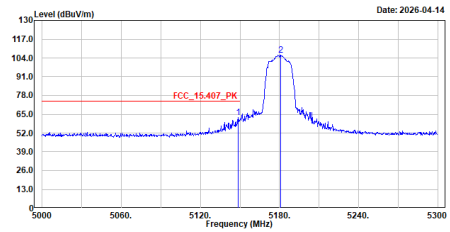


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	62.68	74.00	-11.32	48.24	14.44	Peak
2	5180.900	106.11	-----	-----	91.71	14.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac20_5180MHz
Test by :Bob Chiu

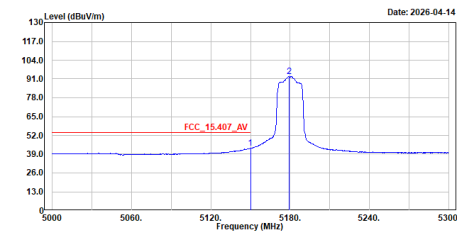


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	43.31	54.00	-10.69	28.87	14.44	Average
2	5179.100	92.73	-----	-----	78.33	14.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac20_5180MHz
Test by :Bob Chiu

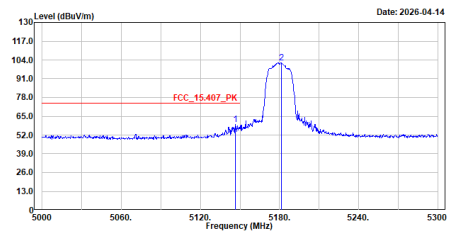


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.700	59.43	74.00	-14.57	44.99	14.44	Peak
2	5181.200	102.28	-----	-----	87.88	14.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac40_5190MHz
Test by :Bob Chiu

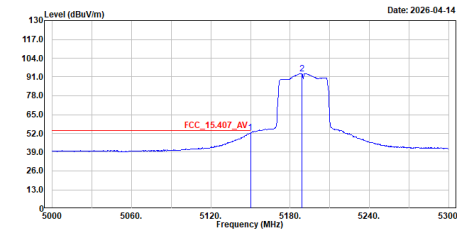


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	52.38	54.00	-1.62	37.94	14.44	Average
2	5188.700	93.43	-----	-----	79.04	14.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ac40_5190MHz
Test by :Bob Chiu

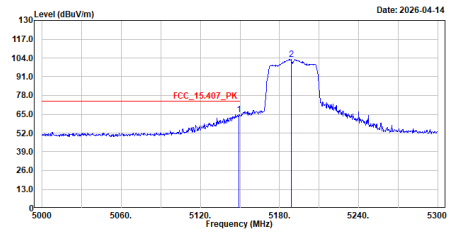


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	64.92	74.00	-9.08	50.48	14.44	Peak
2	5188.700	102.90	-----	-----	88.51	14.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac40_5190MHz
Test by :Bob Chiu

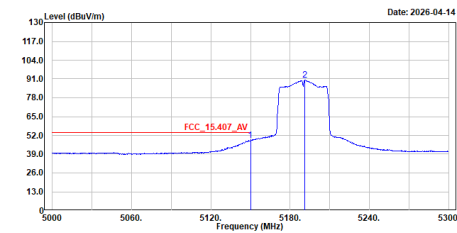


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	48.63	54.00	-5.37	34.19	14.44	Average
2	5191.100	90.14	-----	-----	75.75	14.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ac40_5190MHz
Test by :Bob Chiu

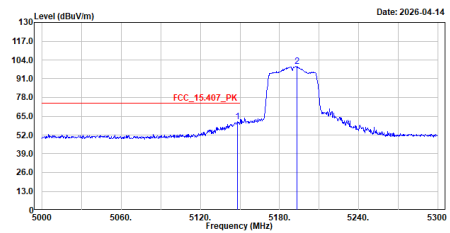


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.200	61.33	74.00	-12.67	46.89	14.44	Peak
2	5193.200	99.54	-----	-----	85.16	14.38	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ac80_5210MHz_H_Average

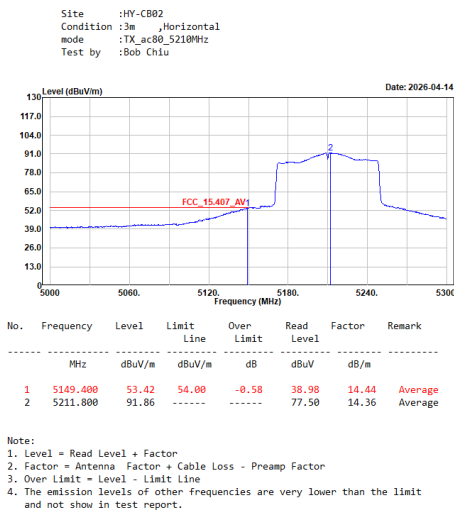


TX_ac80_5210MHz_H_Peak

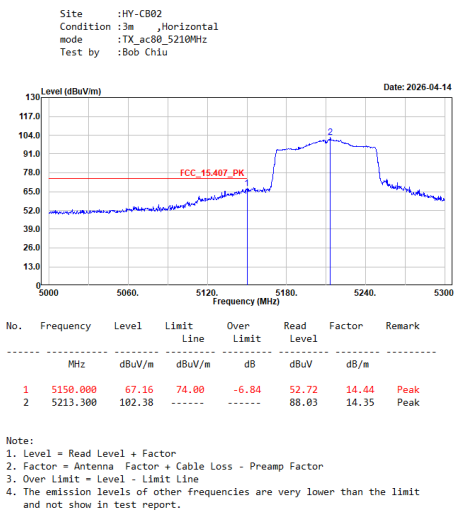


TX_ac80_5210MHz_V_Average

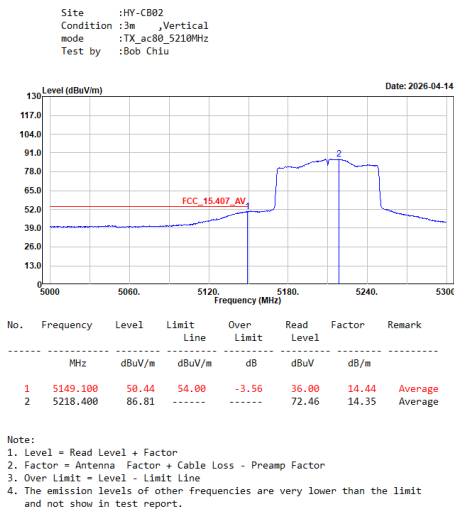

TX_ac80_5210MHz_V_Peak

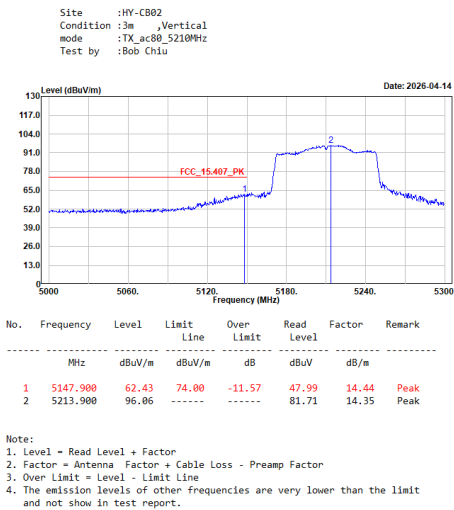


Worst-Case Emissions Above 18 GHz

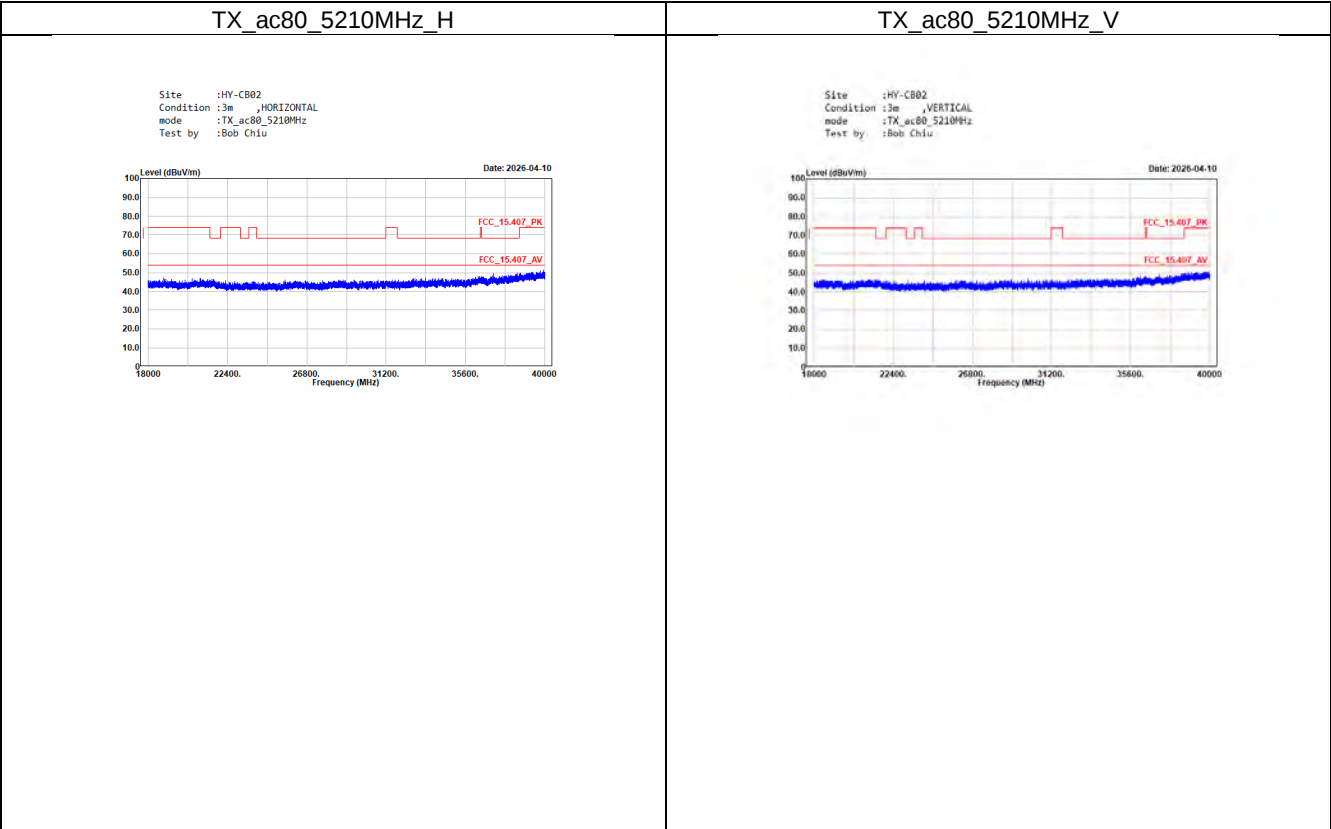


Band Edge Data 802.11a (20 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.192	<5250	PASS

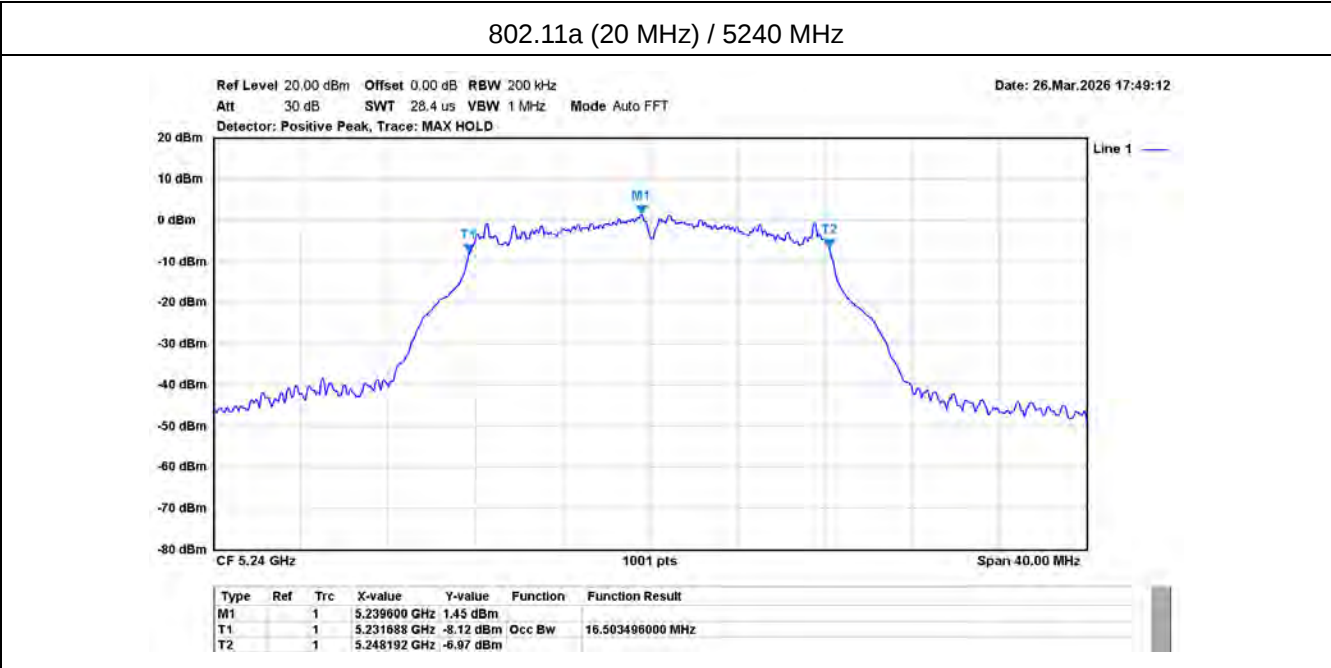


Band Edge Data 802.11ac (20 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.791	<5250	PASS

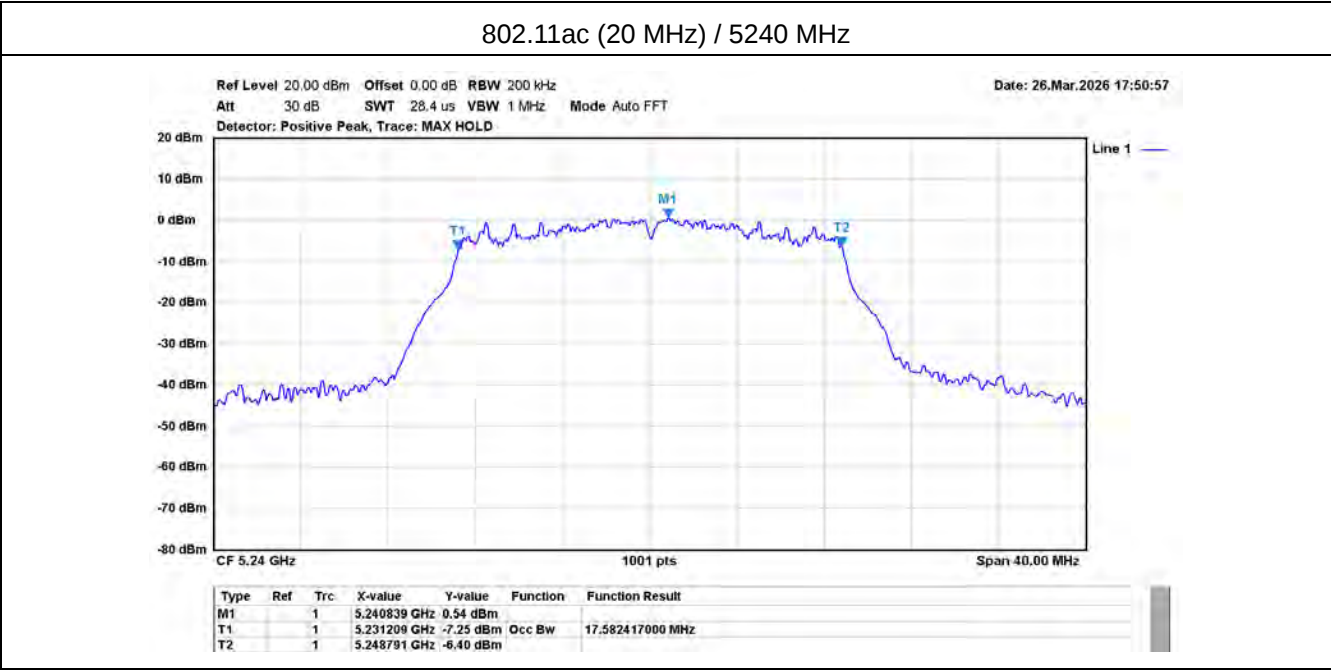

Band Edge Data 802.11ac (40 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.062	<5250	PASS

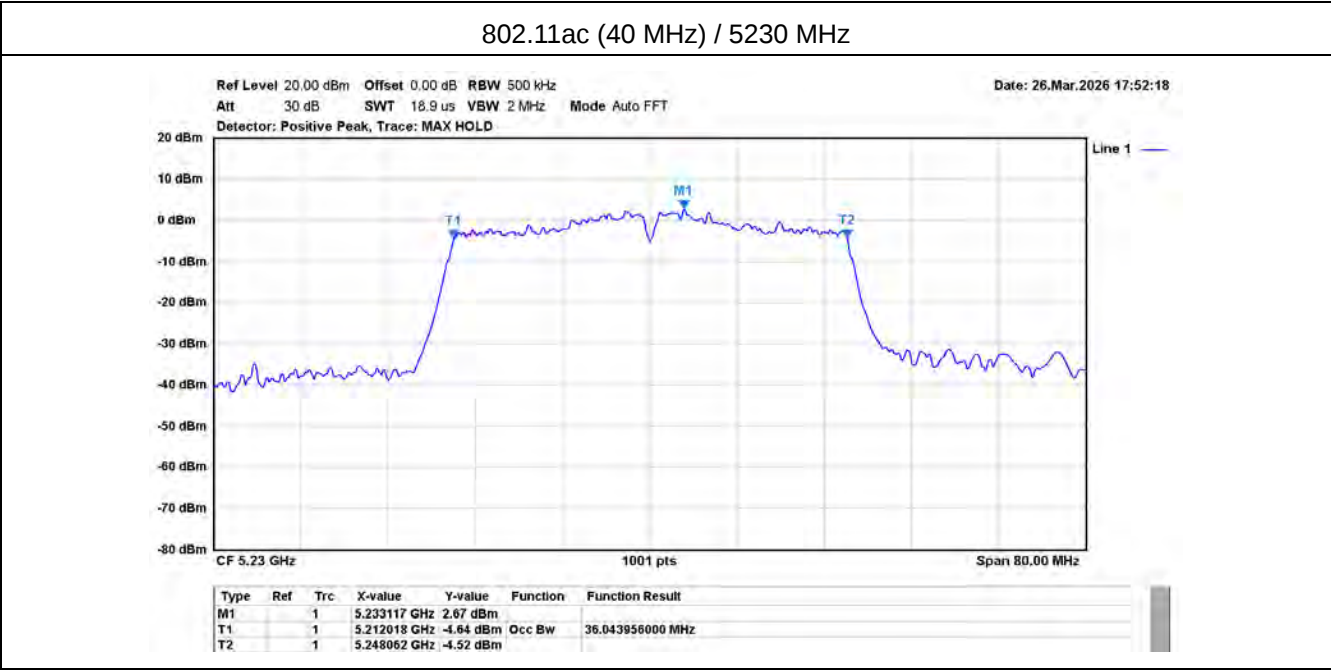

Band Edge Data 802.11ac (80 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5247.722	<5250	PASS

