

TEST REPORT

Reference No. : WTD19S01004744W
FCC ID..... : 2AADC-WS1
Applicant..... : Inspectron Inc.
Address : 39625 Lewis Drive/Suite 900 Novi,Michigan, 48377 United states
Manufacturer : Inspectron Inc.
Address : 39625 Lewis Drive/Suite 900 Novi,Michigan, 48377 United states
Product..... : WiScope
Model(s)..... : WS1
Standards..... : FCC CFR47 Part 15 C Section 15.247:2018
Date of Receipt sample..... : 2019-01-23
Date of Test..... : 2019-01-23 to 2019-02-21
Date of Issue : 2019-02-22
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

Jack Wen

Jack Wen / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

In Preparations for Conformity Assessment (International)			
Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013.			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
2.1 TEST FACILITY.....	3
3 CONTENTS.....	4
4 REVISION HISTORY.....	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.....	7
5.2 DETAILS OF E.U.T.....	7
5.3 CHANNEL LIST.....	8
5.4 TEST MODE.....	8
6 EQUIPMENT USED DURING TEST.....	9
6.1 EQUIPMENTS LIST.....	9
6.2 MEASUREMENT UNCERTAINTY.....	10
6.3 TEST EQUIPMENT CALIBRATION.....	10
7 TEST SUMMARY.....	11
8 CONDUCTED EMISSION.....	12
8.1 E.U.T. OPERATION.....	12
8.2 EUT SETUP.....	12
8.3 MEASUREMENT DESCRIPTION.....	12
8.4 CONDUCTED EMISSION TEST RESULT.....	13
9 RADIATED EMISSIONS.....	15
9.1 EUT OPERATION.....	15
9.2 TEST SETUP.....	16
9.3 SPECTRUM ANALYZER SETUP.....	17
9.4 TEST PROCEDURE.....	18
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
9.6 SUMMARY OF TEST RESULTS.....	19
10 BAND EDGE MEASUREMENT.....	31
10.1 TEST PRODUCE.....	31
10.2 TEST RESULT.....	32
11 BANDWIDTH MEASUREMENT.....	36
11.1 TEST PROCEDURE:.....	36
11.2 TEST RESULT:.....	36
12 MAXIMUM PEAK OUTPUT POWER.....	43
12.1 TEST PROCEDURE:.....	43
12.2 TEST RESULT:.....	43
13 POWER SPECTRAL DENSITY.....	44
13.1 TEST PROCEDURE:.....	44
13.2 TEST RESULT:.....	44
14 ANTENNA REQUIREMENT.....	51
15 RF EXPOSURE.....	52
TEST REQUIREMENT: FCC PART 1.1307.....	52
15.1 REQUIREMENTS.....	52
15.2 TEST RESULT.....	52
16 PHOTOGRAPHS – TEST SETUP PHOTOS.....	53

16.1	RADIATED EMISSION	53
16.2	CONDUCTED EMISSION	54
17	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	55
17.1	EUT – APPEARANCE VIEW	55
17.2	INTERNAL PHOTOS	60

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD19S01004744W	2019-01-23	2019-01-23 to 2019-02-21	2019-02-22	original	-	Valid

5 General Information

5.1 General Description of E.U.T

Product Name:	WiScope
Model No.:	WS1
Model Difference:	N/A
Operation Frequency:	802.11b/g/n HT20/n HT40: 2412MHz ~ 2462MHz
RF output power:	9.95dBm
Antenna installation:	Integrated antenna
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)

5.2 Details of E.U.T

Ratings:	Input: DC 5V 1A
	Adapter: Input: 100-240V~ 50/60Hz 0.18A
	Output: DC 5V 1A
	Battery: DC 3.7V 2600mAh

5.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	101155	2018.09.15	2019.09.14
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018.09.15	2019.09.14
3	Limiter	York	MTS-IMP-136	261115-001-0024	2018.09.15	2019.09.14
4	Cable	LARGE	RF300	-	2018.07.18	2019.07.17
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2018.04.29	2019.04.28
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2018.04.29	2019.04.28
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018.04.29	2019.04.28
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2018.04.29	2019.04.28
5	Spectrum Analyzer	R&S	FSP40	100501	2018.10.24	2019.10.23
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170651	2018.10.24	2019.10.23
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2018.10.24	2019.10.23
8	Cable	Top	18-40GHz	-	2018.10.24	2019.10.23
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018.04.20	2019.04.19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018.04.19	2019.04.18
3	Amplifier	ANRITSU	MH648A	M43381	2018.04.20	2019.04.19
4	Cable	HUBER+SUHNER	CBL2	525178	2018.04.20	2019.04.19
5	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2018.04.17	2019.04.16
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-13	2019-09-12
2	Spectrum Analyzer	R&S	FSL6	100959	2018-09-11	2019-09-10

	(9k-6GHz)					
3	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-11	2019-09-10

6.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

7 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	Pass
Conducted Emissions	15.207(a)	Pass
Bandwidth	15.247(a)(2)	Pass
Maximum Peak Output Power	15.247(b)(3),(4)	Pass
Power Spectral Density	15.247(e)	Pass
Band Edge	15.247(d)	Pass
Antenna Requirement	15.203	Pass
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

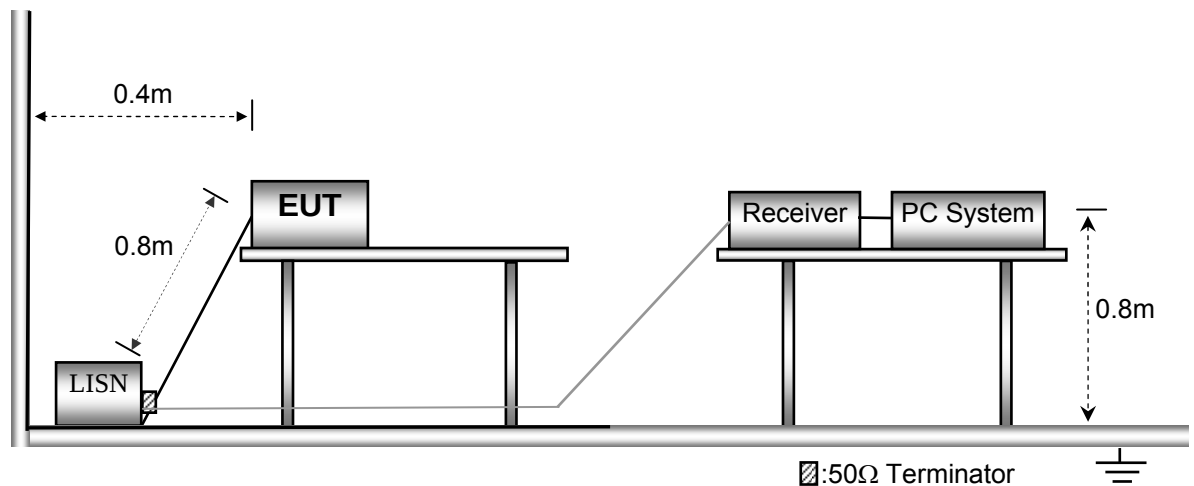

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Only the worst case (WIFI transmitting mode) test data were record in the report.

Live line:

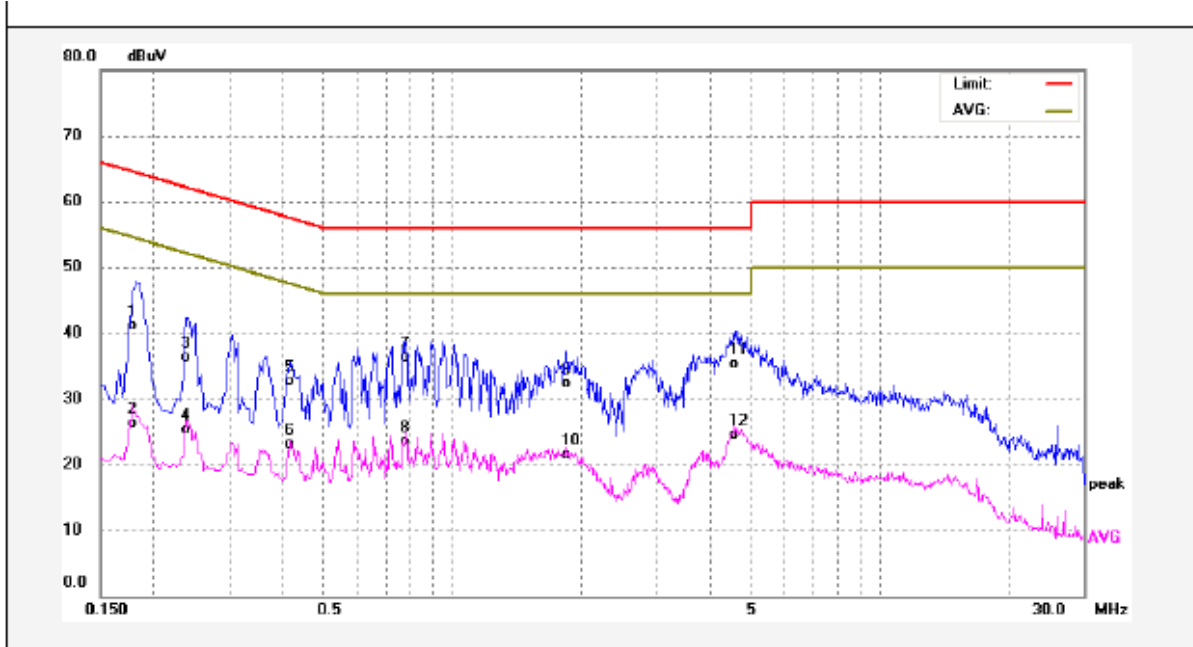

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	30.76	10.30	41.06	64.57	-23.51	QP	
2	0.1780	16.03	10.30	26.33	54.57	-28.24	AVG	
3	0.2380	25.90	10.37	36.27	62.16	-25.89	QP	
4	0.2380	15.03	10.37	25.40	52.16	-26.76	AVG	
5	0.4180	22.31	10.42	32.73	57.49	-24.76	QP	
6	0.4180	12.69	10.42	23.11	47.49	-24.38	AVG	
7	0.7820	25.96	10.44	36.40	56.00	-19.60	QP	
8	0.7820	12.99	10.44	23.43	46.00	-22.57	AVG	
9	1.8500	21.71	10.54	32.25	56.00	-23.75	QP	
10	1.8500	10.95	10.54	21.49	46.00	-24.51	AVG	
11	4.5939	24.41	10.80	35.21	56.00	-20.79	QP	
12	4.5939	13.67	10.80	24.47	46.00	-21.53	AVG	

Neutral line:

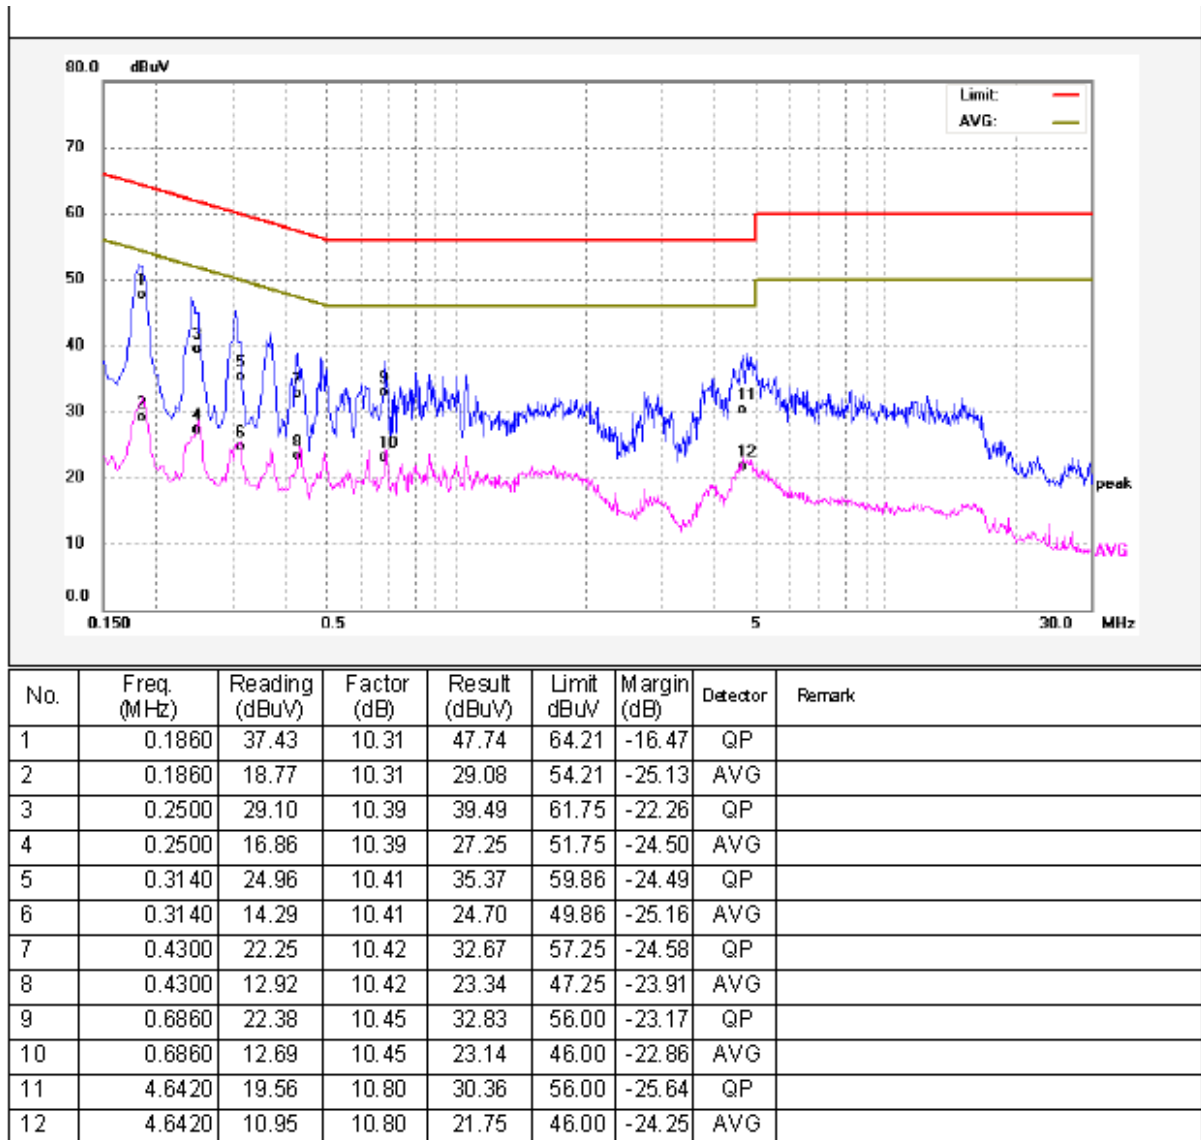

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

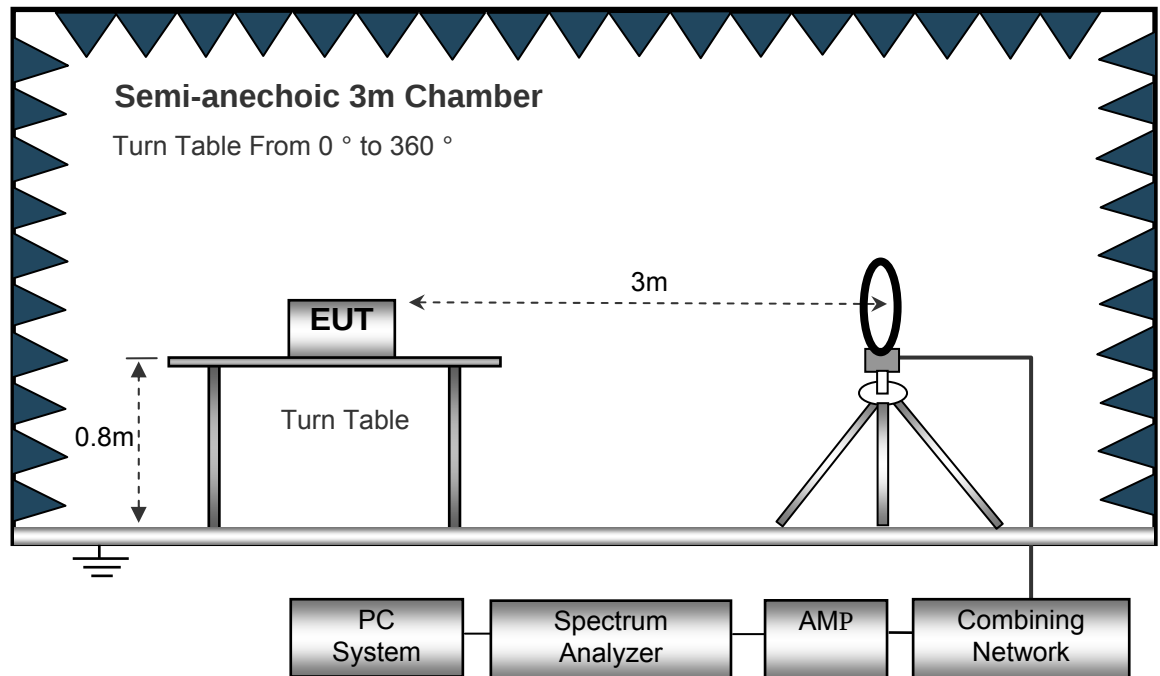

The test setup for emission measurement from 30 MHz to 1 GHz.

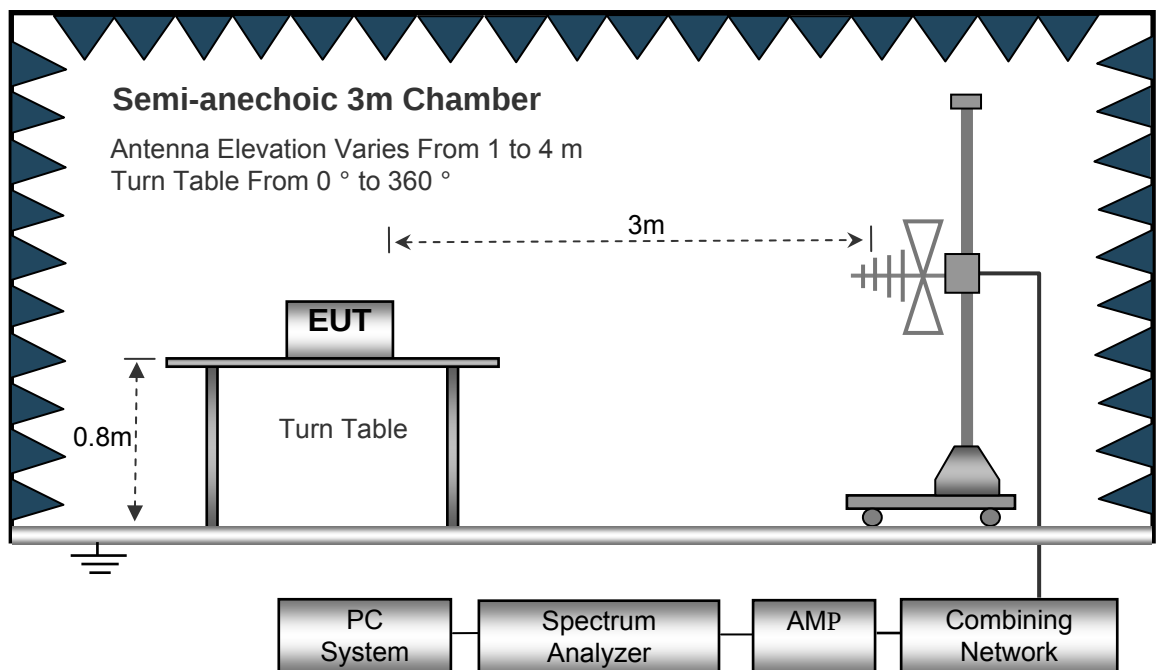

The test setup for emission measurement above 1 GHz.

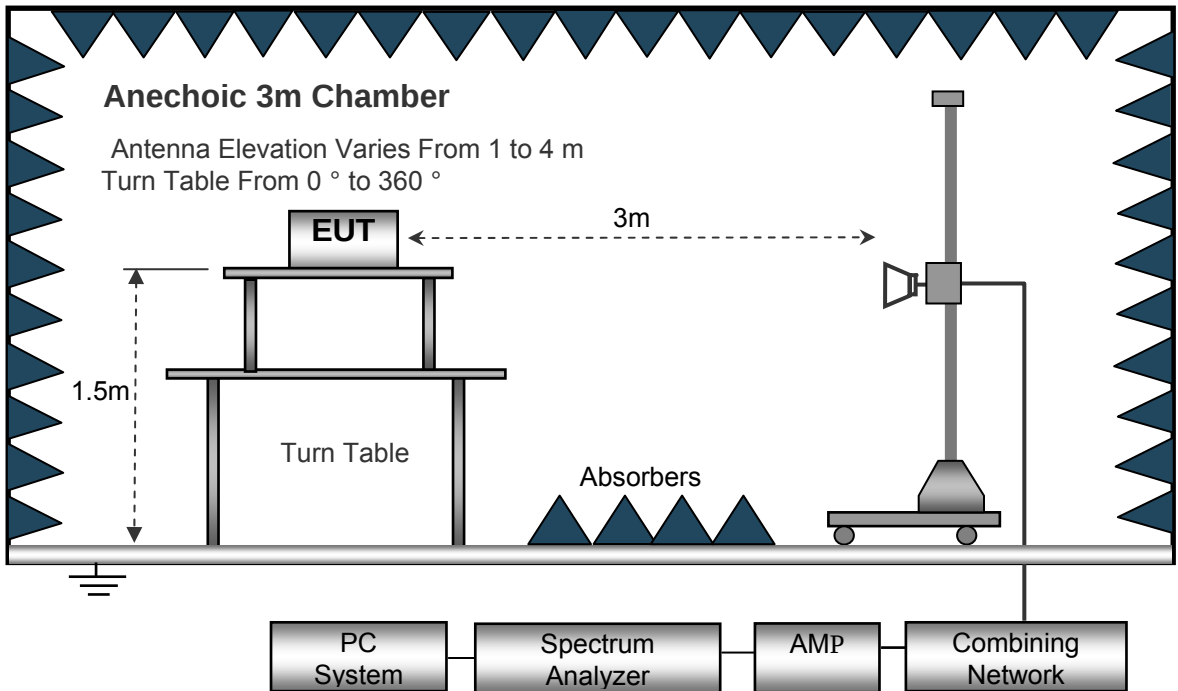

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency : 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
486.22	12.81	PK	248	1.6	H	21.09	33.90	45.00	-11.10
486.22	12.22	PK	213	1.6	V	21.09	33.31	45.00	-11.69
4824.00	50.49	PK	253	1.2	V	-1.05	49.44	74.00	-24.56
4824.00	42.74	Ave	253	1.2	V	-1.05	41.69	54.00	-12.31
7236.00	46.19	PK	205	1.5	H	1.34	47.53	74.00	-26.47
7236.00	41.24	Ave	205	1.5	H	1.34	42.58	54.00	-11.42
2343.68	46.35	PK	124	1.7	V	-13.19	33.16	74.00	-40.84
2343.68	37.34	Ave	124	1.7	V	-13.19	24.15	54.00	-29.85
2364.52	44.67	PK	86	1.0	H	-13.15	31.52	74.00	-42.48
2364.52	37.91	Ave	86	1.0	H	-13.15	24.76	54.00	-29.24
2497.37	44.33	PK	73	1.5	V	-13.08	31.25	74.00	-42.75
2497.37	36.47	Ave	73	1.5	V	-13.08	23.39	54.00	-30.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
486.22	14.38	PK	83	1.7	H	21.09	35.47	45.00	-9.53
486.22	13.39	PK	287	1.5	V	21.09	34.48	45.00	-10.52
4874.00	49.46	PK	317	1.2	V	-0.63	48.83	74.00	-25.17
4874.00	44.24	Ave	317	1.2	V	-0.63	43.61	54.00	-10.39
7311.00	45.24	PK	250	1.7	H	2.21	47.45	74.00	-26.55
7311.00	42.79	Ave	250	1.7	H	2.21	45.00	54.00	-9.00
2347.74	46.38	PK	130	1.4	V	-13.19	33.19	74.00	-40.81
2347.74	38.91	Ave	130	1.4	V	-13.19	25.72	54.00	-28.28
2377.00	43.40	PK	327	1.0	H	-13.14	30.26	74.00	-43.74
2377.00	37.95	Ave	327	1.0	H	-13.14	24.81	54.00	-29.19
2497.95	44.51	PK	246	1.4	V	-13.09	31.42	74.00	-42.58
2497.95	37.32	Ave	246	1.4	V	-13.09	24.23	54.00	-29.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
486.22	13.41	PK	144	1.2	H	21.09	34.50	45.00	-10.50
486.22	13.40	PK	213	1.2	V	21.09	34.49	45.00	-10.51
4924.00	50.34	PK	143	1.7	V	-0.25	50.09	74.00	-23.91
4924.00	44.75	Ave	143	1.7	V	-0.25	44.50	54.00	-9.50
7386.00	48.22	PK	158	1.7	H	2.85	51.07	74.00	-22.93
7386.00	41.31	Ave	158	1.7	H	2.85	44.16	54.00	-9.84
2310.75	46.56	PK	339	1.7	V	-13.19	33.37	74.00	-40.63
2310.75	38.95	Ave	339	1.7	V	-13.19	25.76	54.00	-28.24
2388.94	43.46	PK	277	1.3	H	-13.14	30.32	74.00	-43.68
2388.94	36.68	Ave	277	1.3	H	-13.14	23.54	54.00	-30.46
2495.81	44.73	PK	72	1.3	V	-13.09	31.64	74.00	-42.36
2495.81	36.00	Ave	72	1.3	V	-13.09	22.91	54.00	-31.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
486.22	14.67	PK	131	1.8	H	21.09	35.76	45.00	-9.24
486.22	12.58	PK	149	1.8	V	21.09	33.67	45.00	-11.33
4824.00	51.66	PK	77	2.0	V	-1.06	50.60	74.00	-23.40
4824.00	48.37	Ave	77	2.0	V	-1.06	47.31	54.00	-6.69
7236.00	47.10	PK	284	1.6	H	1.35	48.45	74.00	-25.55
7236.00	46.46	Ave	284	1.6	H	1.35	47.81	54.00	-6.19
2318.97	45.44	PK	345	1.6	V	-13.19	32.25	74.00	-41.75
2318.97	37.16	Ave	345	1.6	V	-13.19	23.97	54.00	-30.03
2379.89	42.43	PK	344	1.9	H	-13.14	29.29	74.00	-44.71
2379.89	38.35	Ave	344	1.9	H	-13.14	25.21	54.00	-28.79
2484.35	44.59	PK	227	1.7	V	-13.08	31.51	74.00	-42.49
2484.35	36.24	Ave	227	1.7	V	-13.08	23.16	54.00	-30.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
486.22	14.48	PK	75	1.8	H	21.09	35.57	45.00	-9.43
486.22	12.56	PK	229	1.4	V	21.09	33.65	45.00	-11.35
4874.00	49.64	PK	47	1.0	V	-0.62	49.02	74.00	-24.98
4874.00	48.79	Ave	47	1.0	V	-0.62	48.17	54.00	-5.83
7311.00	47.47	PK	358	1.3	H	2.20	49.67	74.00	-24.33
7311.00	46.28	Ave	358	1.3	H	2.20	48.48	54.00	-5.52
2327.86	46.90	PK	153	1.3	V	-13.19	33.71	74.00	-40.29
2327.86	39.87	Ave	153	1.3	V	-13.19	26.68	54.00	-27.32
2359.10	43.60	PK	316	1.8	H	-13.15	30.45	74.00	-43.55
2359.10	36.35	Ave	316	1.8	H	-13.15	23.20	54.00	-30.80
2488.50	42.96	PK	72	1.8	V	-13.09	29.87	74.00	-44.13
2488.50	38.73	Ave	72	1.8	V	-13.09	25.64	54.00	-28.36

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
486.22	14.52	PK	7	1.8	H	21.09	35.61	45.00	-9.39
486.22	13.87	PK	168	1.6	V	21.09	34.96	45.00	-10.04
4924.00	50.76	PK	230	2.0	V	-0.25	50.51	74.00	-23.49
4924.00	46.47	Ave	230	2.0	V	-0.25	46.22	54.00	-7.78
7386.00	47.69	PK	151	1.3	H	2.86	50.55	74.00	-23.45
7386.00	42.41	Ave	151	1.3	H	2.86	45.27	54.00	-8.73
2346.06	45.50	PK	2	1.9	V	-13.19	32.31	74.00	-41.69
2346.06	37.74	Ave	2	1.9	V	-13.19	24.55	54.00	-29.45
2377.43	42.14	PK	313	1.9	H	-13.14	29.00	74.00	-45.00
2377.43	38.26	Ave	313	1.9	H	-13.14	25.12	54.00	-28.88
2485.53	44.82	PK	268	1.2	V	-13.08	31.74	74.00	-42.26
2485.53	38.45	Ave	268	1.2	V	-13.08	25.37	54.00	-28.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
486.22	14.48	PK	192	1.0	H	21.09	35.57	45.00	-9.43
486.22	12.43	PK	110	1.6	V	21.09	33.52	45.00	-11.48
4824.00	50.58	PK	329	1.1	V	-1.06	49.52	74.00	-24.48
4824.00	48.90	Ave	329	1.1	V	-1.06	47.84	54.00	-6.16
7236.00	47.07	PK	168	1.1	H	1.34	48.41	74.00	-25.59
7236.00	45.54	Ave	168	1.1	H	1.34	46.88	54.00	-7.12
2325.04	45.06	PK	310	2.0	V	-13.19	31.87	74.00	-42.13
2325.04	38.70	Ave	310	2.0	V	-13.19	25.51	54.00	-28.49
2383.40	44.01	PK	199	1.0	H	-13.14	30.87	74.00	-43.13
2383.40	38.28	Ave	199	1.0	H	-13.14	25.14	54.00	-28.86
2492.85	42.66	PK	314	1.2	V	-13.08	29.58	74.00	-44.42
2492.85	37.26	Ave	314	1.2	V	-13.08	24.18	54.00	-29.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
486.22	13.14	PK	336	1.1	H	21.09	34.23	45.00	-10.77
486.22	12.98	PK	189	2.0	V	21.09	34.07	45.00	-10.93
4874.00	50.37	PK	240	1.4	V	-0.61	49.76	74.00	-24.24
4874.00	48.41	Ave	240	1.4	V	-0.61	47.80	54.00	-6.20
7311.00	47.65	PK	141	1.7	H	2.21	49.86	74.00	-24.14
7311.00	45.35	Ave	141	1.7	H	2.21	47.56	54.00	-6.44
2347.91	46.54	PK	196	1.0	V	-13.19	33.35	74.00	-40.65
2347.91	38.29	Ave	196	1.0	V	-13.19	25.10	54.00	-28.90
2385.45	42.67	PK	200	2.0	H	-13.14	29.53	74.00	-44.47
2385.45	38.55	Ave	200	2.0	H	-13.14	25.41	54.00	-28.59
2498.40	43.02	PK	173	1.8	V	-13.09	29.93	74.00	-44.07
2498.40	36.16	Ave	173	1.8	V	-13.09	23.07	54.00	-30.93

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
486.22	13.35	PK	302	1.7	H	21.09	34.44	45.00	-10.56
486.22	14.06	PK	357	1.9	V	21.09	35.15	45.00	-9.85
4924.00	50.65	PK	356	1.9	V	-0.24	50.41	74.00	-23.59
4924.00	48.86	Ave	356	1.9	V	-0.24	48.62	54.00	-5.38
7386.00	47.37	PK	141	1.9	H	2.83	50.20	74.00	-23.80
7386.00	45.05	Ave	141	1.9	H	2.83	47.88	54.00	-6.12
2311.63	46.64	PK	278	1.2	V	-13.19	33.45	74.00	-40.55
2311.63	37.03	Ave	278	1.2	V	-13.19	23.84	54.00	-30.16
2366.68	44.68	PK	97	1.4	H	-13.14	31.54	74.00	-42.46
2366.68	38.59	Ave	97	1.4	H	-13.14	25.45	54.00	-28.55
2488.23	43.95	PK	201	1.9	V	-13.08	30.87	74.00	-43.13
2488.23	37.73	Ave	201	1.9	V	-13.08	24.65	54.00	-29.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
N40: Low Channel 2422MHz									
486.22	14.43	PK	259	1.2	H	21.09	35.52	45.00	-9.48
486.22	14.04	PK	34	2.0	V	21.09	35.13	45.00	-9.87
4844.00	50.74	PK	112	1.4	V	-1.06	49.68	74.00	-24.32
4844.00	48.56	Ave	112	1.4	V	-1.06	47.50	54.00	-6.50
7266.00	48.27	PK	161	1.4	H	1.34	49.61	74.00	-24.39
7266.00	42.83	Ave	161	1.4	H	1.34	44.17	54.00	-9.83
2347.17	46.53	PK	326	1.4	V	-13.19	33.34	74.00	-40.66
2347.17	38.18	Ave	326	1.4	V	-13.19	24.99	54.00	-29.01
2388.37	44.97	PK	173	1.7	H	-13.15	31.82	74.00	-42.18
2388.37	37.76	Ave	173	1.7	H	-13.15	24.61	54.00	-29.39
2497.39	44.17	PK	10	1.9	V	-13.08	31.09	74.00	-42.91
2497.39	38.72	Ave	10	1.9	V	-13.08	25.64	54.00	-28.36

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
N40: Middle Channel 2437MHz									
486.22	12.93	PK	174	1.7	H	21.09	34.02	45.00	-10.98
486.22	13.31	PK	99	1.7	V	21.09	34.40	45.00	-10.60
4874.00	49.06	PK	219	1.2	V	-0.62	48.44	74.00	-25.56
4874.00	48.47	Ave	219	1.2	V	-0.62	47.85	54.00	-6.15
7311.00	47.37	PK	121	1.3	H	2.21	49.58	74.00	-24.42
7311.00	43.85	Ave	121	1.3	H	2.21	46.06	54.00	-7.94
2319.11	46.18	PK	299	1.4	V	-13.19	32.99	74.00	-41.01
2319.11	39.29	Ave	299	1.4	V	-13.19	26.10	54.00	-27.90
2388.26	44.36	PK	256	1.5	H	-13.16	31.20	74.00	-42.80
2388.26	38.54	Ave	256	1.5	H	-13.16	25.38	54.00	-28.62
2495.16	43.80	PK	278	1.6	V	-13.08	30.72	74.00	-43.28
2495.16	37.89	Ave	278	1.6	V	-13.08	24.81	54.00	-29.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
N40: High Channel 2452MHz									
486.22	13.94	PK	110	1.3	H	21.09	35.03	45.00	-9.97
486.22	13.07	PK	39	1.8	V	21.09	34.16	45.00	-10.84
4904.00	50.88	PK	150	1.7	V	-0.24	50.64	74.00	-23.36
4904.00	44.32	Ave	150	1.7	V	-0.24	44.08	54.00	-9.92
7356.00	48.80	PK	159	1.1	H	2.85	51.65	74.00	-22.35
7356.00	42.86	Ave	159	1.1	H	2.85	45.71	54.00	-8.29
2337.05	46.65	PK	106	1.2	V	-13.19	33.46	74.00	-40.54
2337.05	38.06	Ave	106	1.2	V	-13.19	24.87	54.00	-29.13
2384.19	42.01	PK	270	1.5	H	-13.14	28.87	74.00	-45.13
2384.19	38.02	Ave	270	1.5	H	-13.14	24.88	54.00	-29.12
2488.83	43.97	PK	11	1.0	V	-13.08	30.89	74.00	-43.11
2488.83	37.24	Ave	11	1.0	V	-13.08	24.16	54.00	-29.84

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Band Edge Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 15.247 Meas Guidance v05
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result


Test result plots shown as follows:

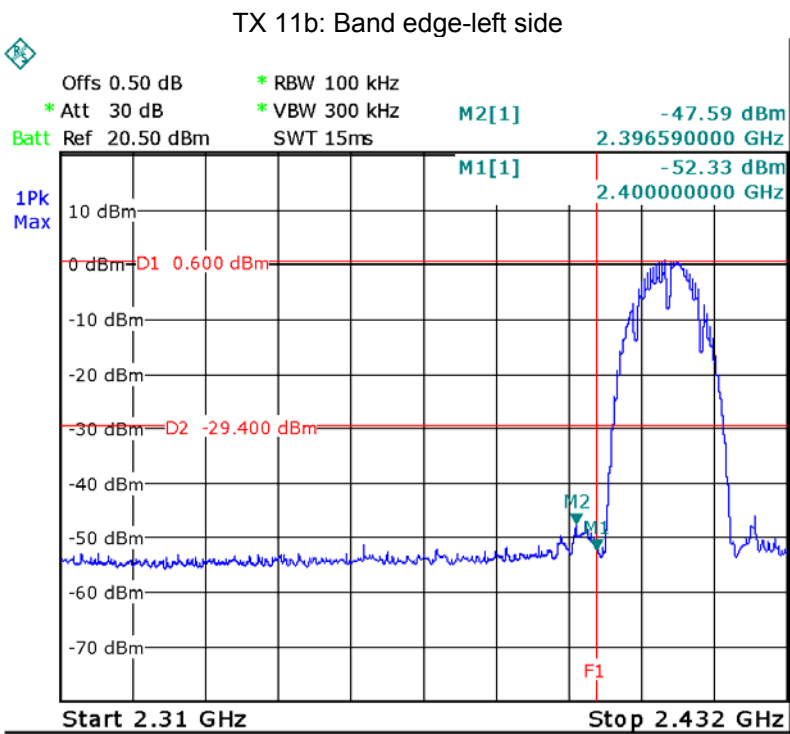


TX 11b: Band edge-right side


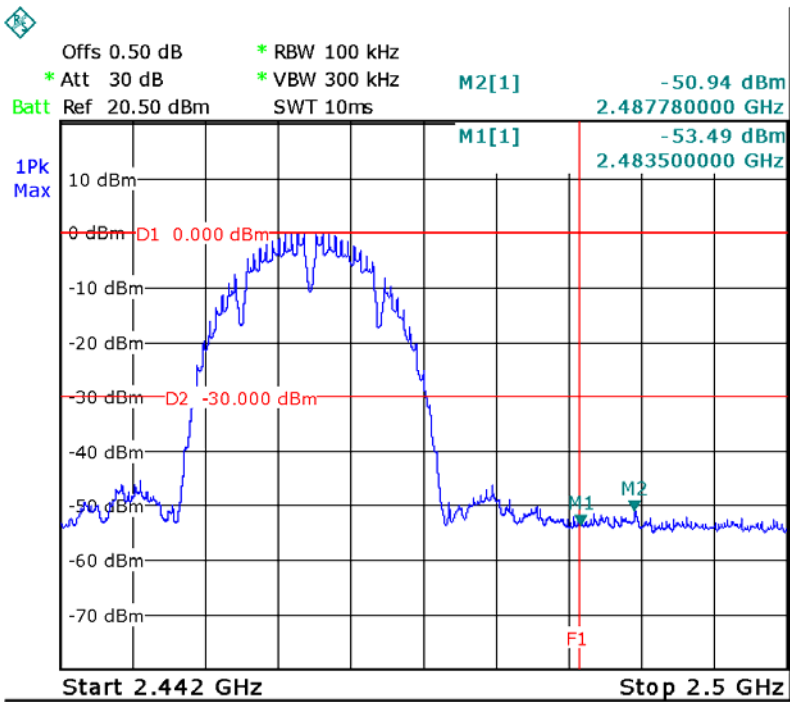


TX 11g: Band edge-left side

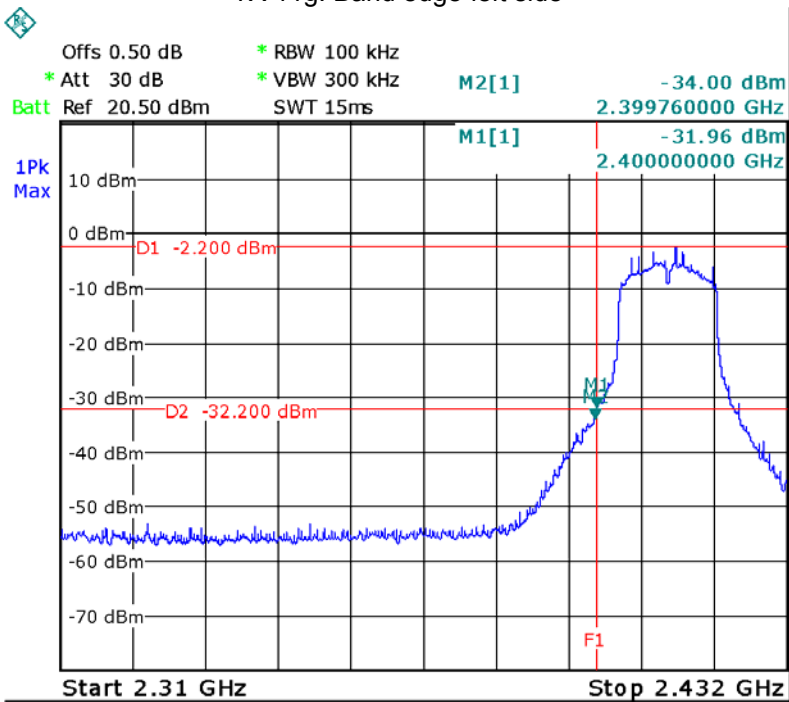


TX 11g: Band edge-right side

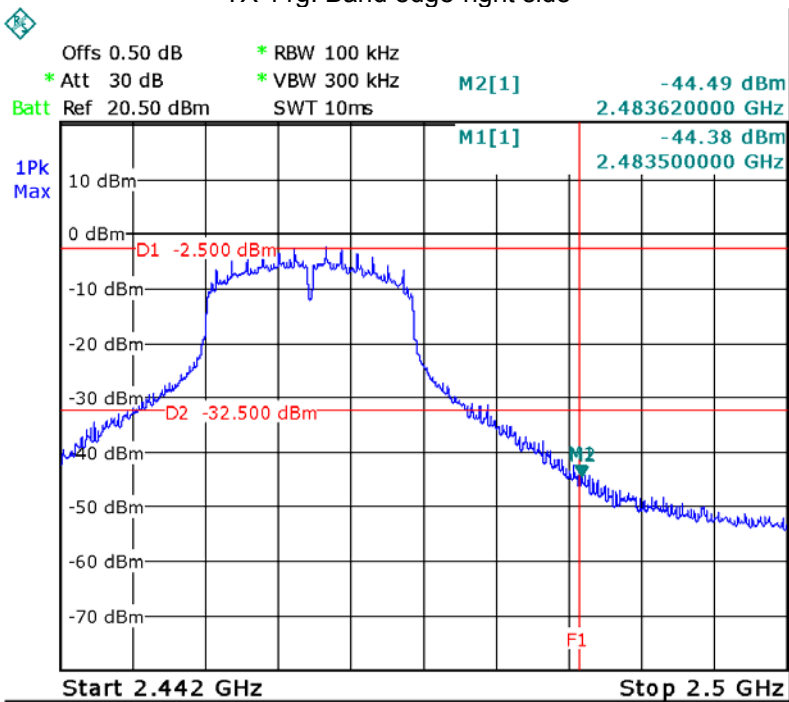


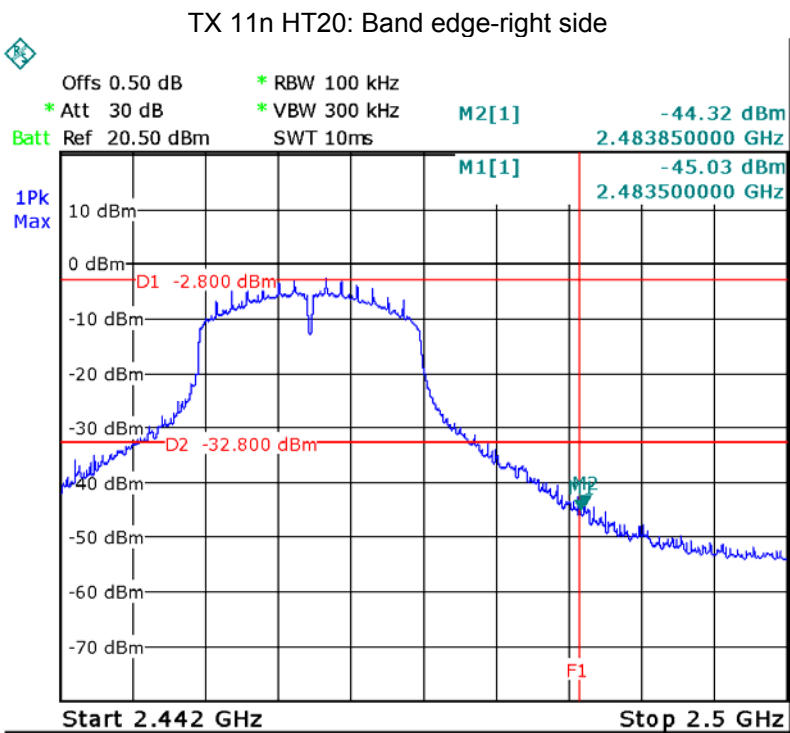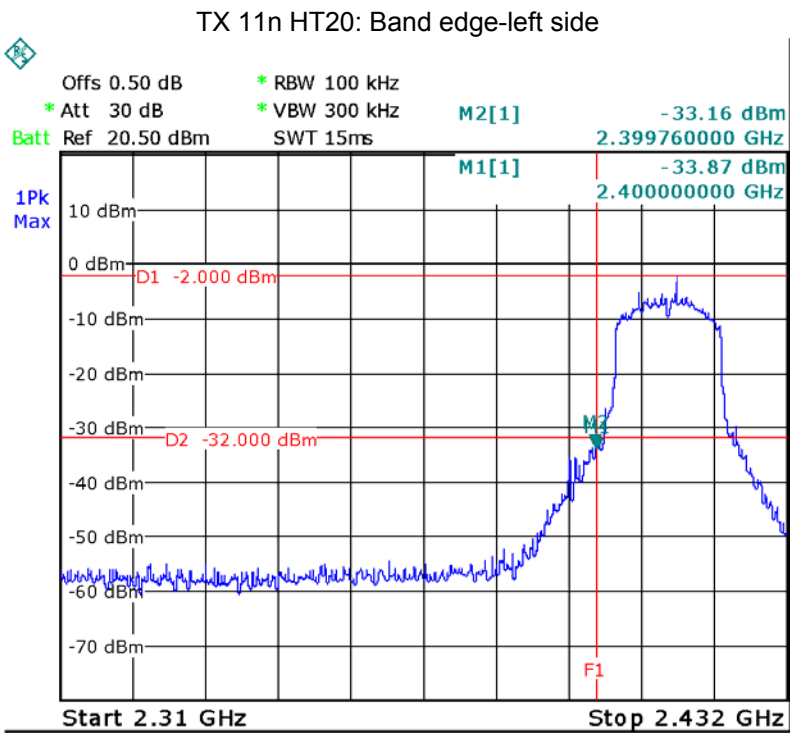

TX 11n HT40: Band edge-left side

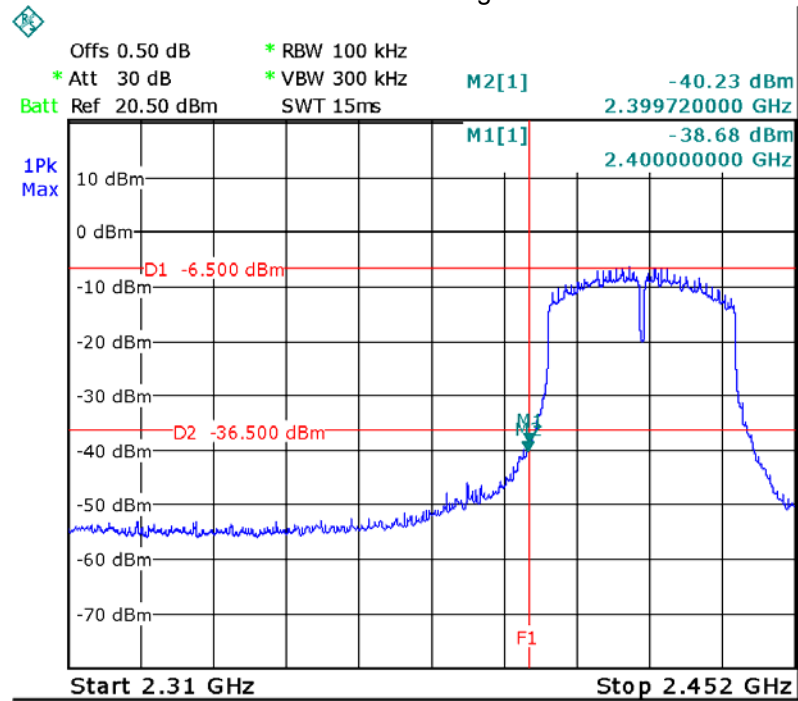

TX 11n HT40: Band edge-right side

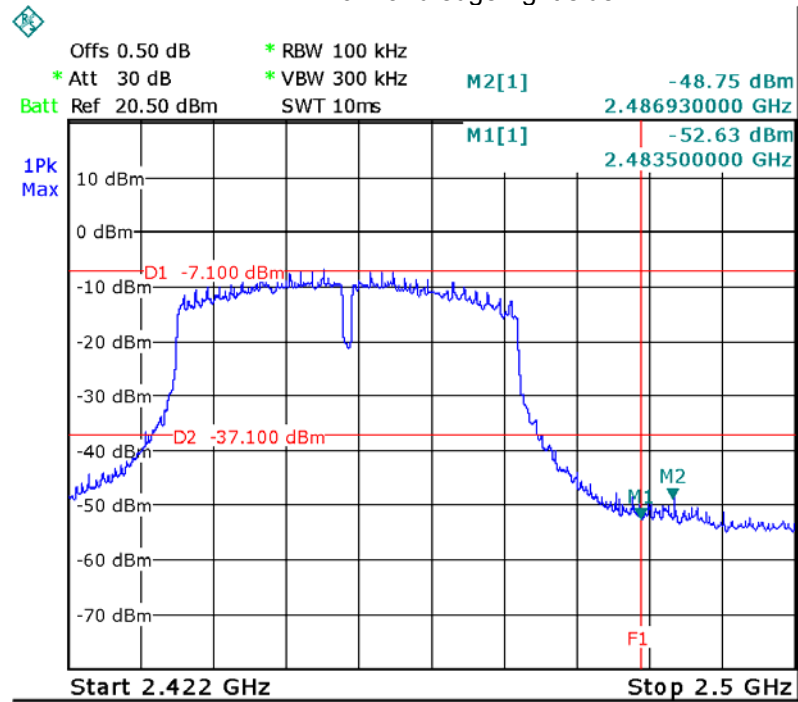

11 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 15.247 Meas Guidance v05

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



11.2 Test Result:



Operation mode	6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	10.060	10.060	10.060	14.084	14.148	14.084
TX 11g	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	15.685	15.120	15.120	16.417	16.367	16.367
TX 11n HT20	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	16.006	15.198	15.629	17.515	17.515	17.515
TX 11n HT40	Channel 3	Channel 6	Channel 9	Channel 3	Channel 6	Channel 9
	35.240	35.280	35.650	35.788	35.679	35.788



Wifi: Test result plot as follows:



Mode: TX 11b channel 1


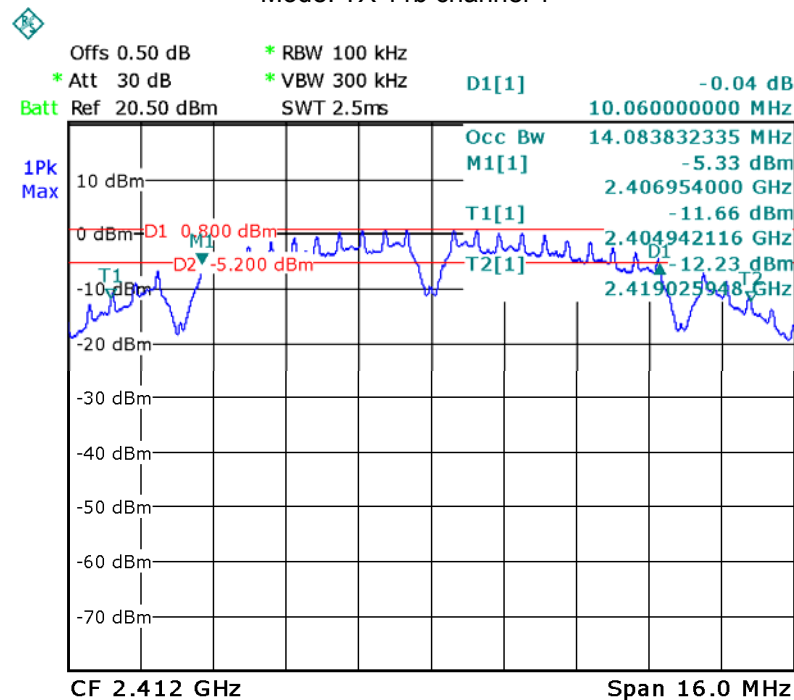


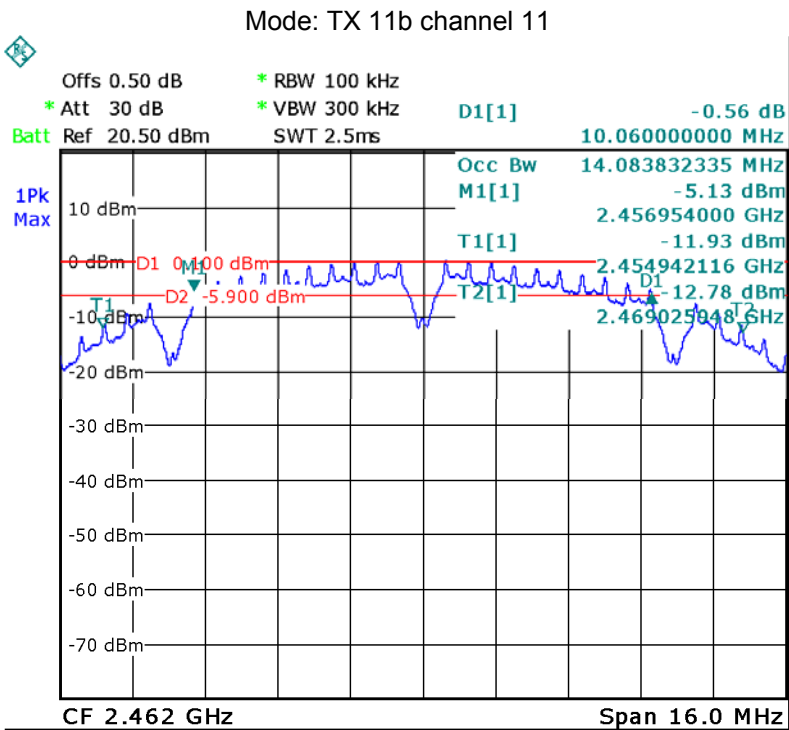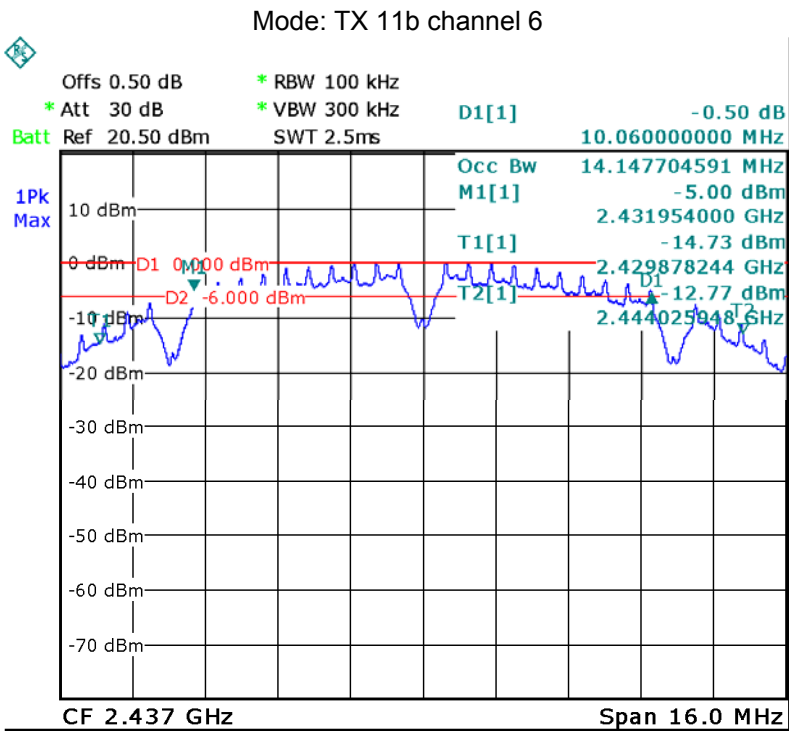


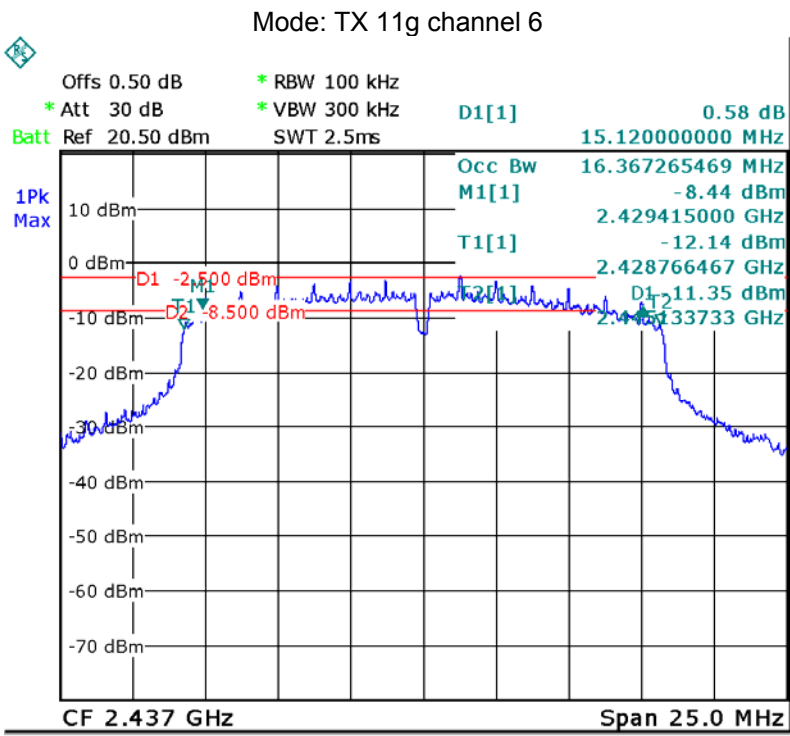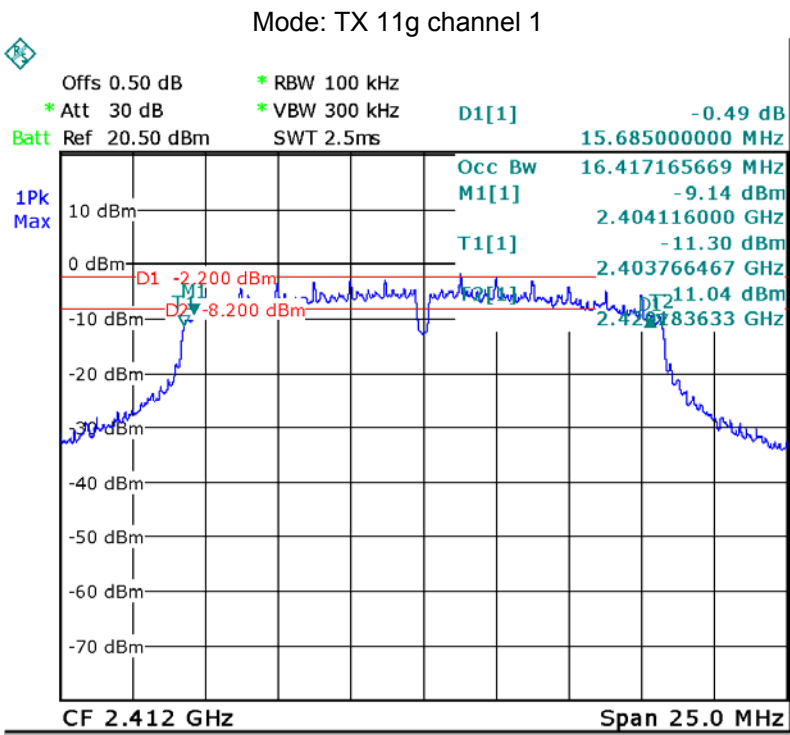

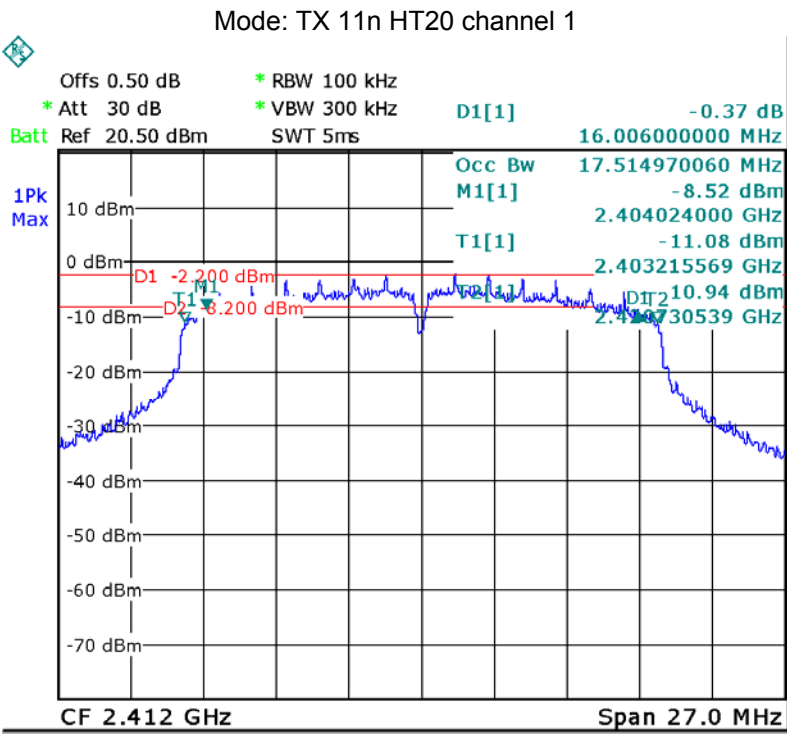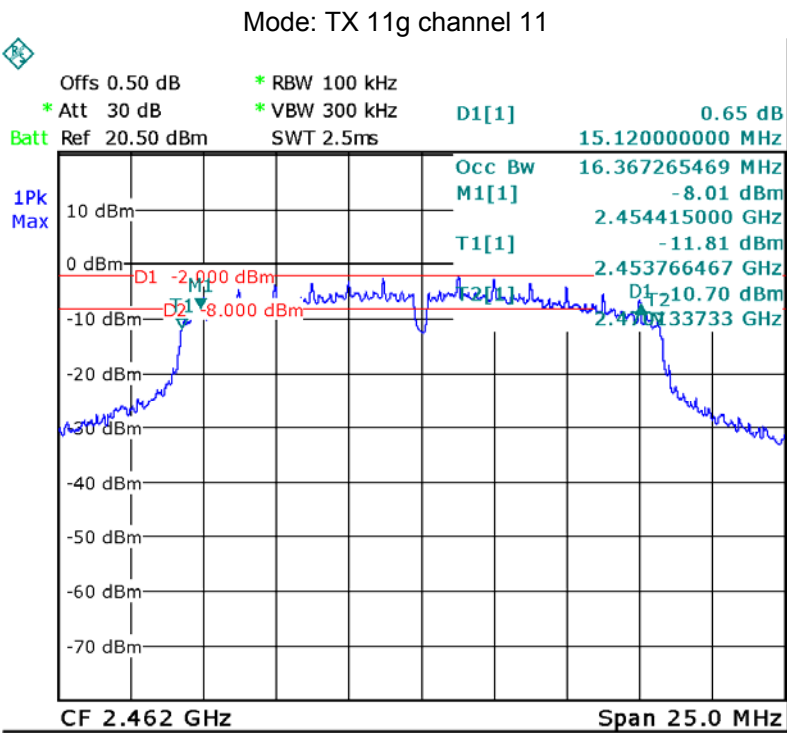

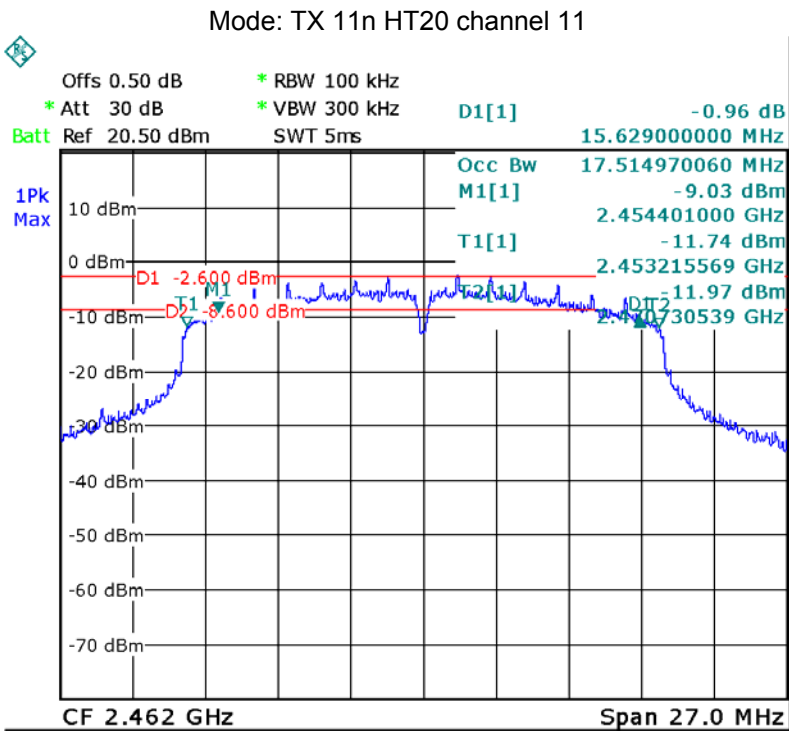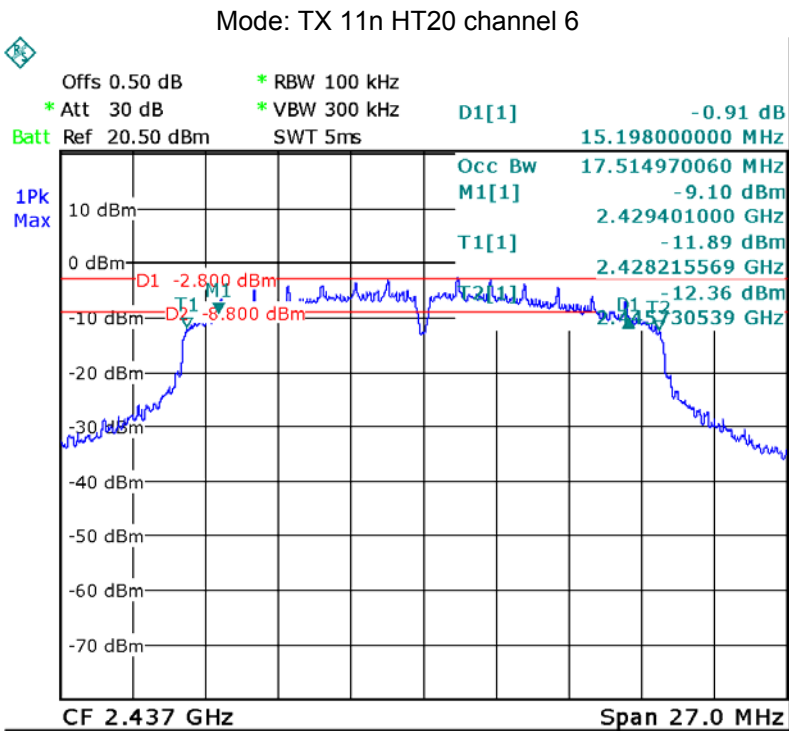

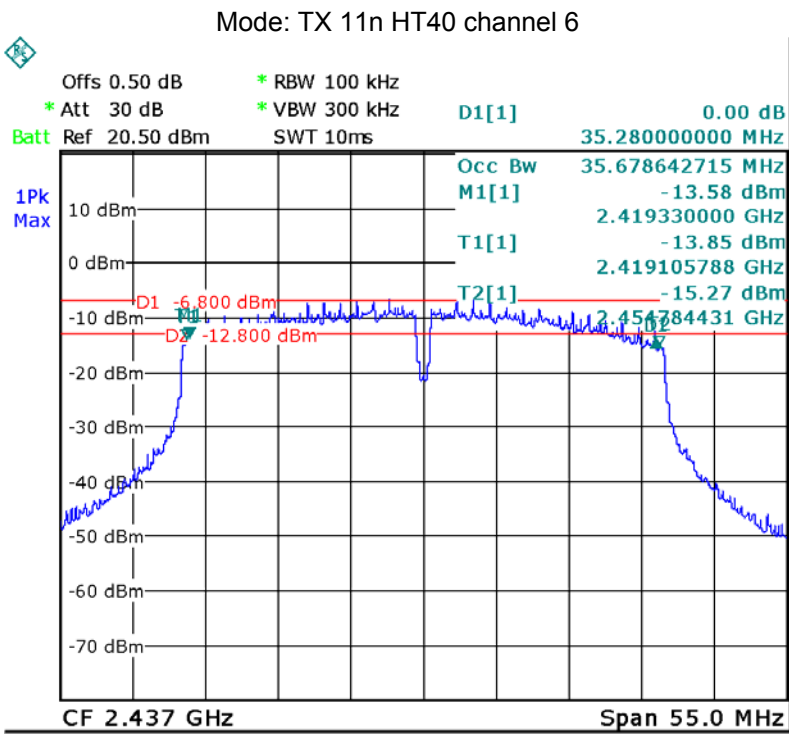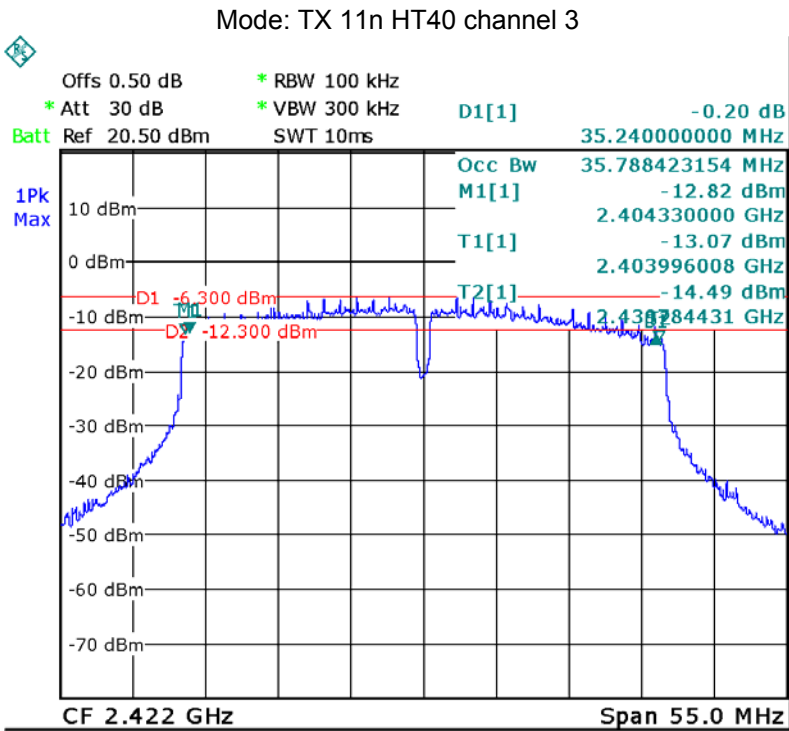

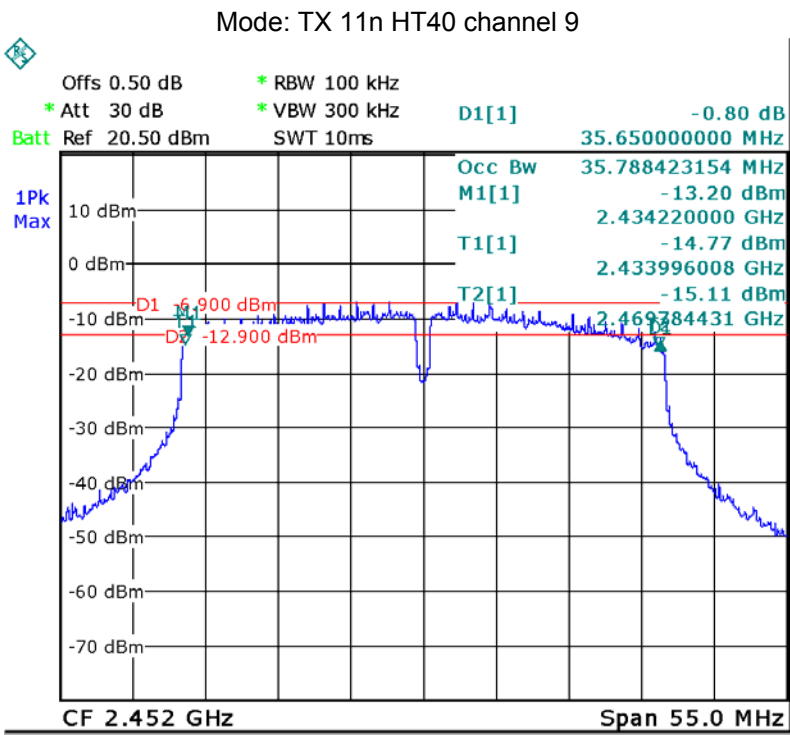

12 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 15.247 Meas Guidance v05

12.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.72	9.29	9.68
Limit: 1W/30dBm		

Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.58	9.56	9.67
Limit: 1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.62	9.34	9.50
Limit: 1W/30dBm		

Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.49	9.50	9.27
Limit: 1W/30dBm		

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05

13.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



13.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-11.57	-14.16	-11.77
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-16.72	-17.14	-16.85
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-16.09	-17.33	-18.01
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-21.97	-21.64	-22.19
Limit: 8dBm per 3kHz		

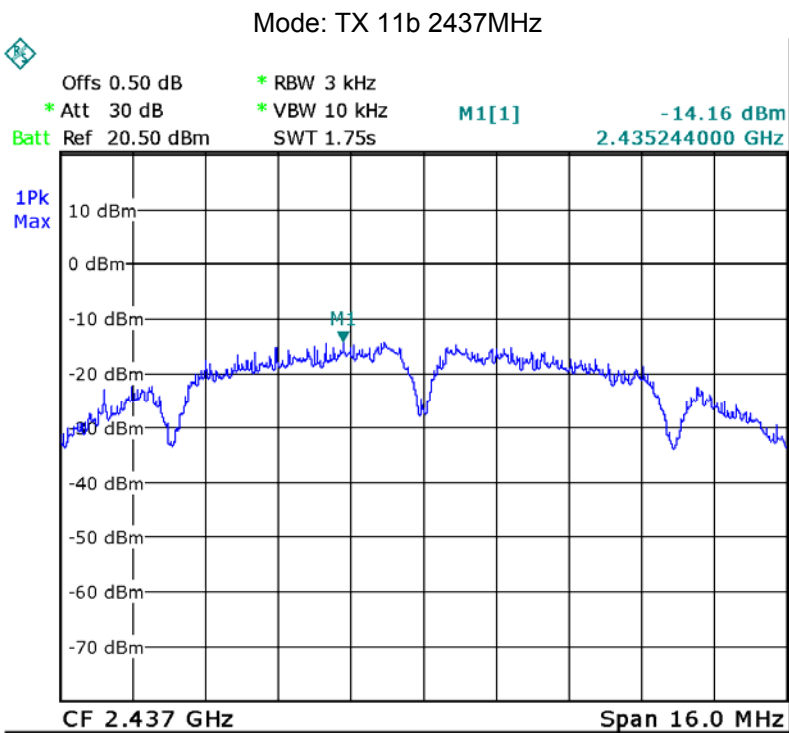
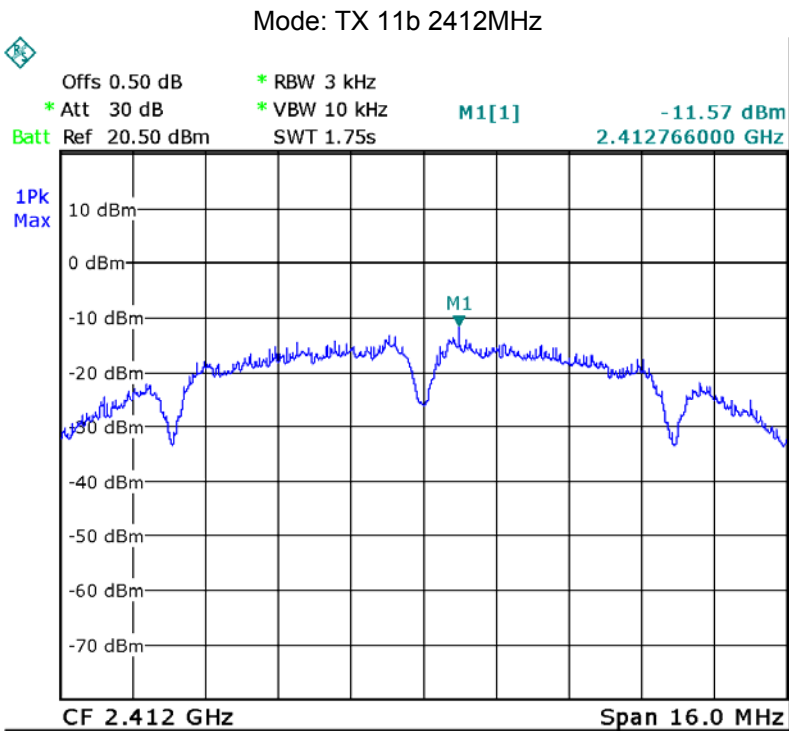


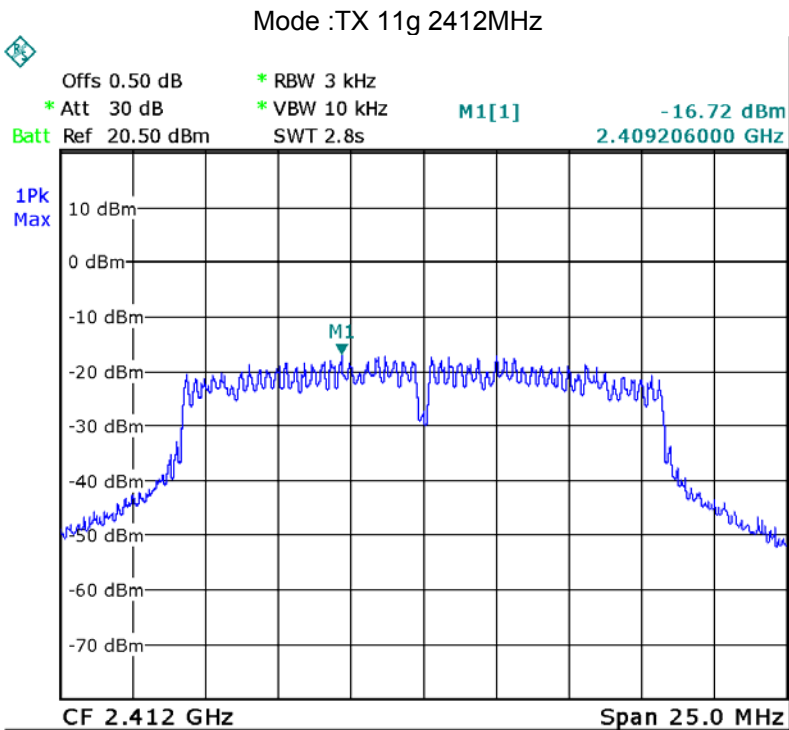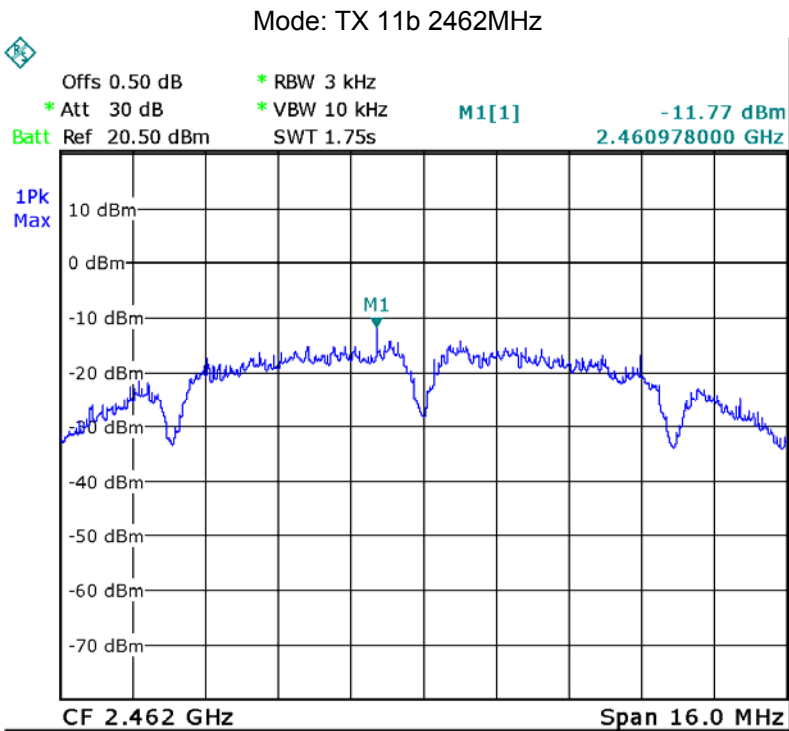

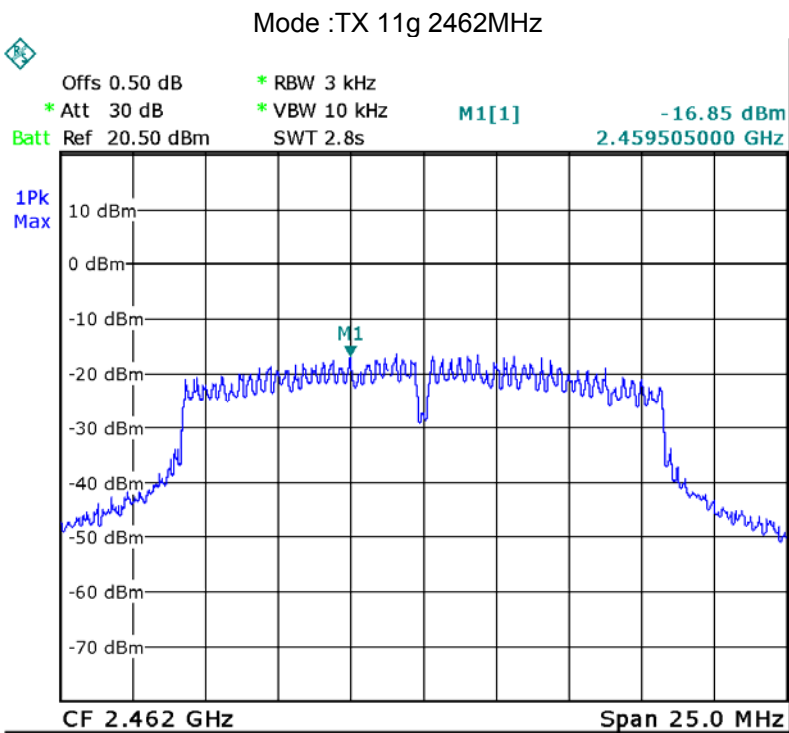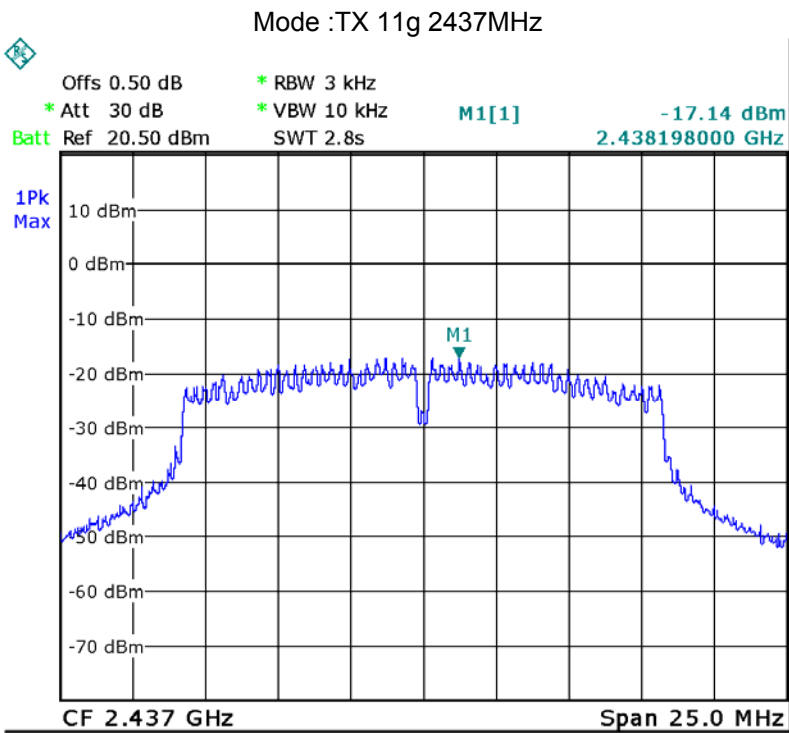

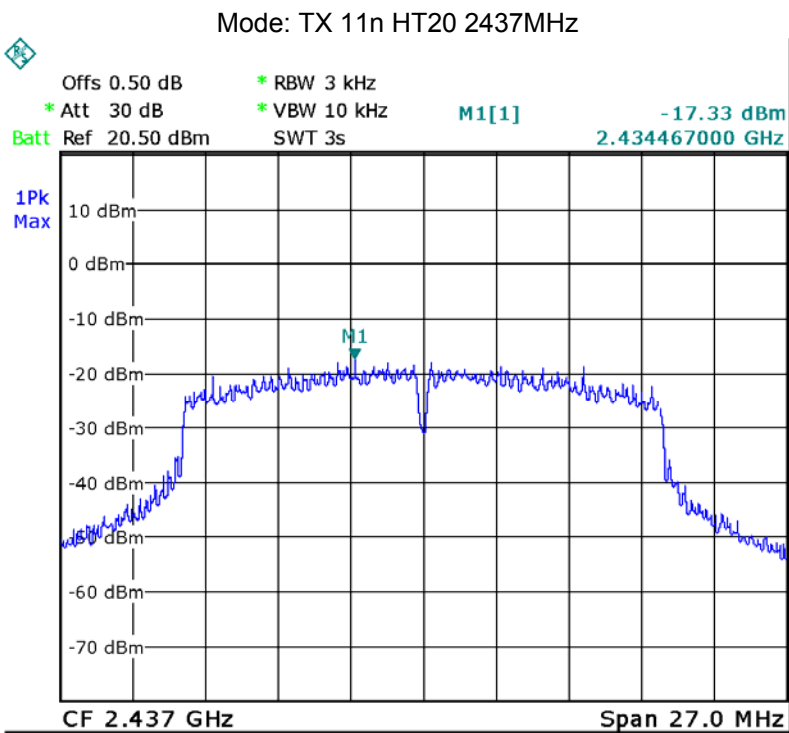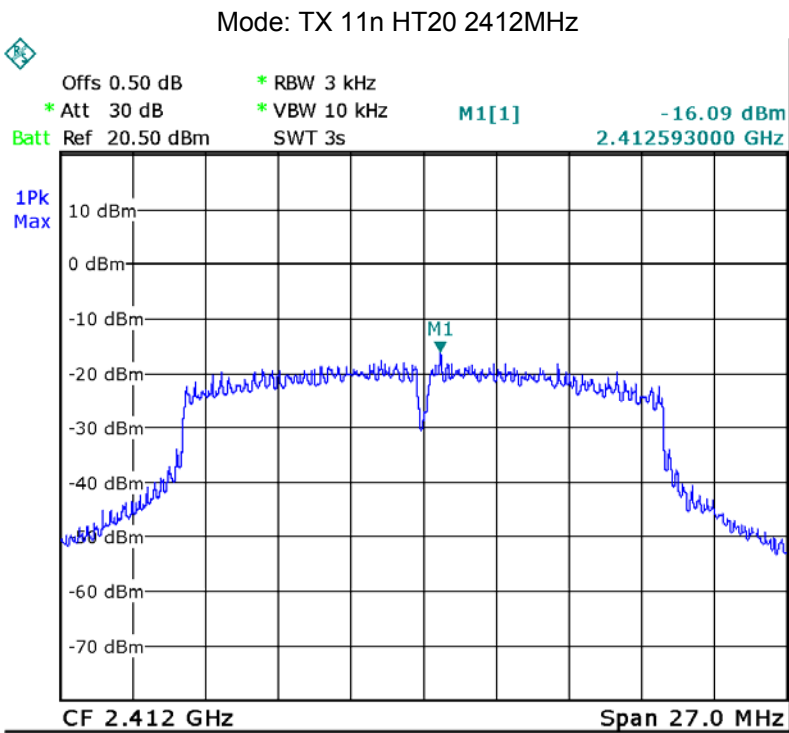

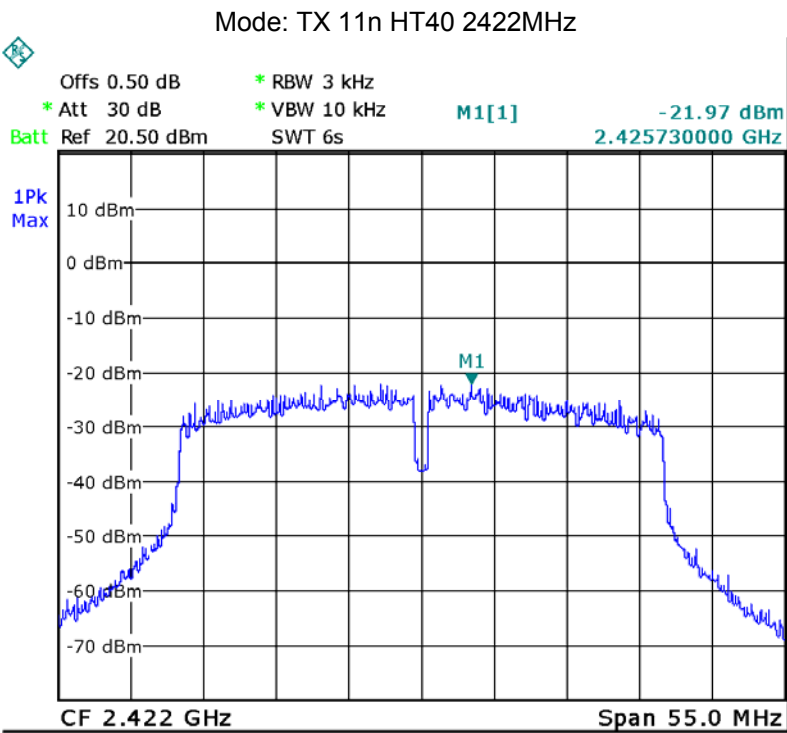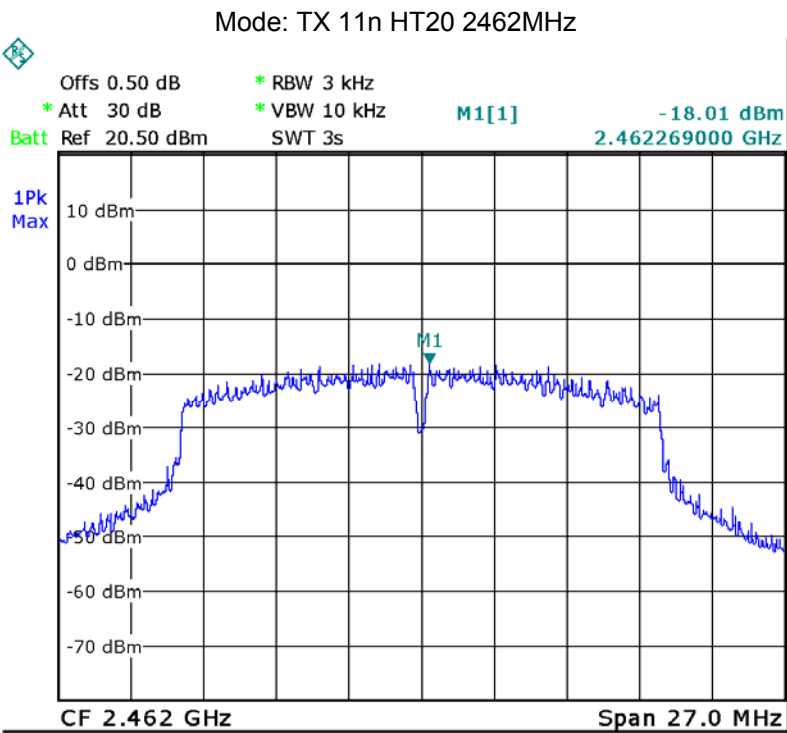

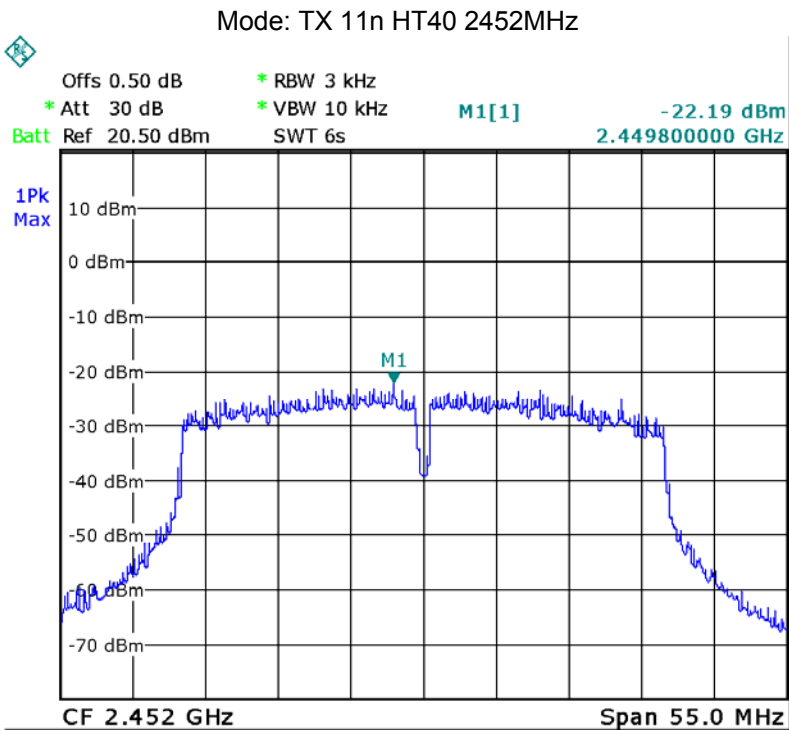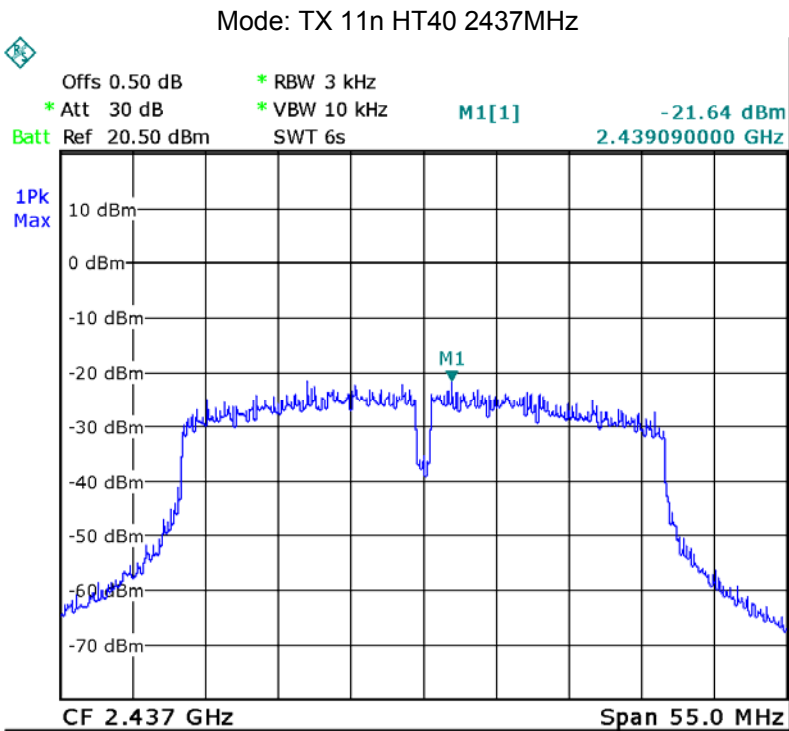


14 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a Integrated Antenna, meets the requirements of FCC 15.203.

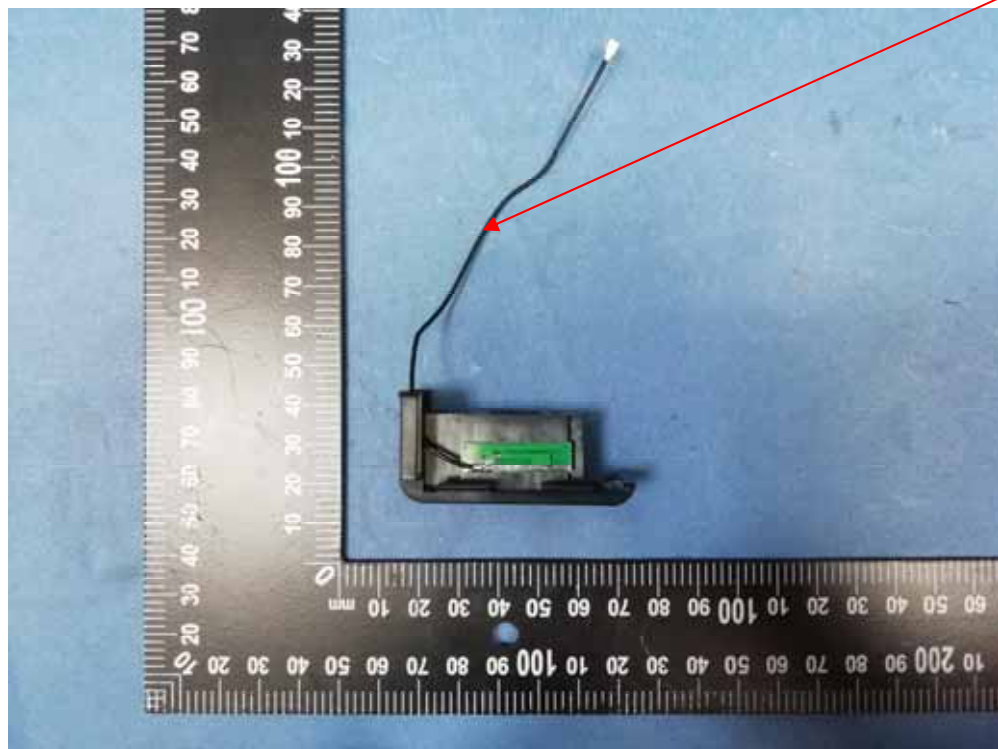

15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part2.1093 & KDB 447498 D01 General RF Exposure Guidance v06

15.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

15.2 Test result

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds Calculation Value	SAR Test Exclusion Thresholds Limit	Result
9.72	9.38	9.38	5	2.91	3.0	Compliance
Note: No SAR measurement is required.						


Remark: Max. duty factor is 100%

Result: Compliance.


16 Photographs – Test Setup Photos

16.1 Radiated Emission

Test frequency Below 30MHz

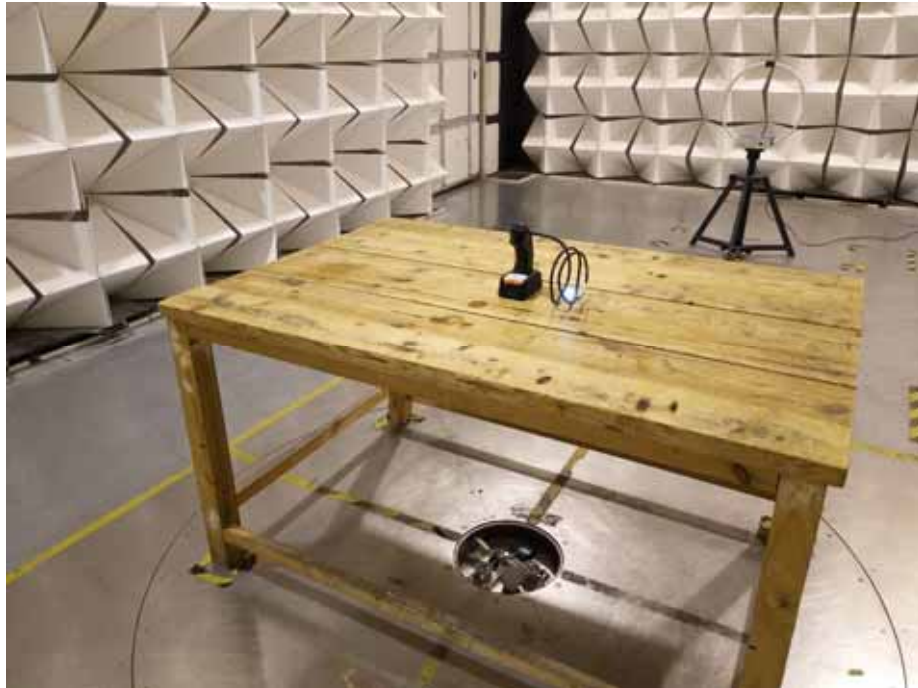

Test frequency from 30MHz to 1GHz

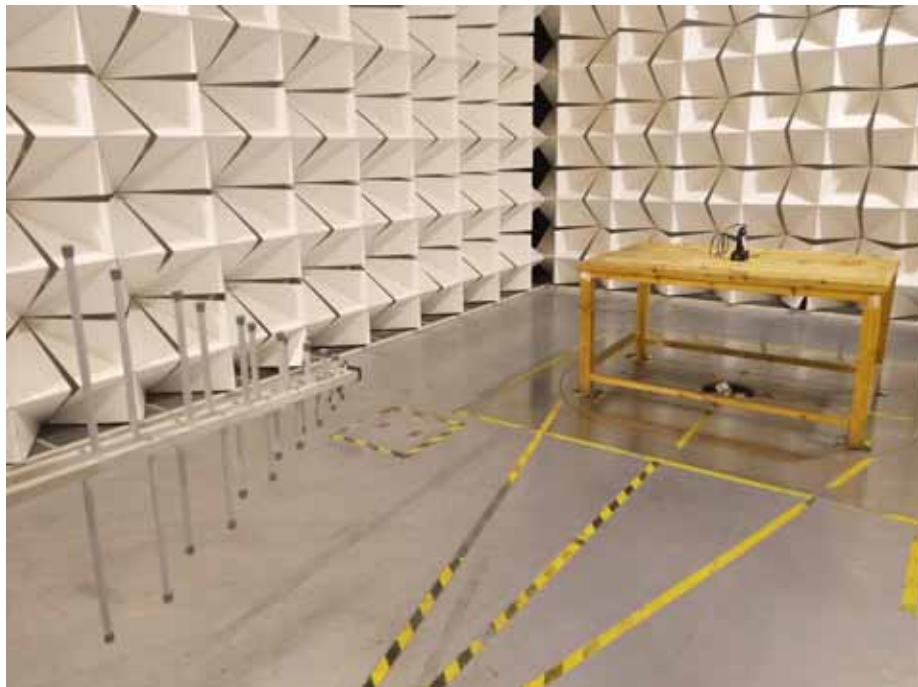

Test frequency above 1GHz



16.2 Conducted Emission



17 Photographs – Constructional Details

17.1 EUT – Appearance View

















17.2 Internal Photos


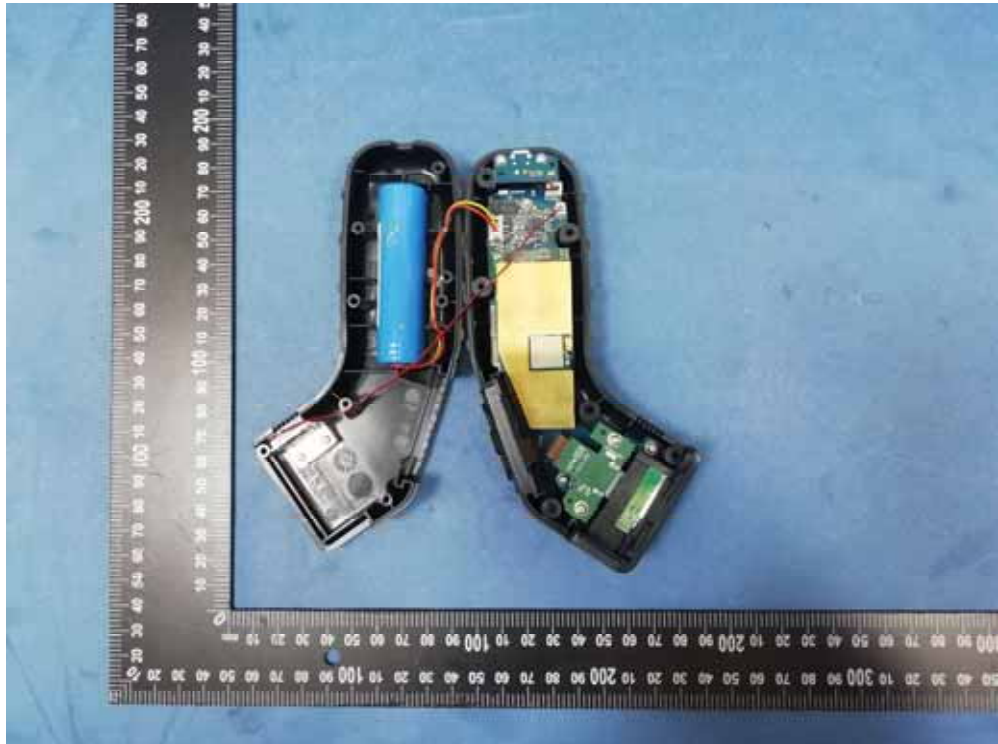





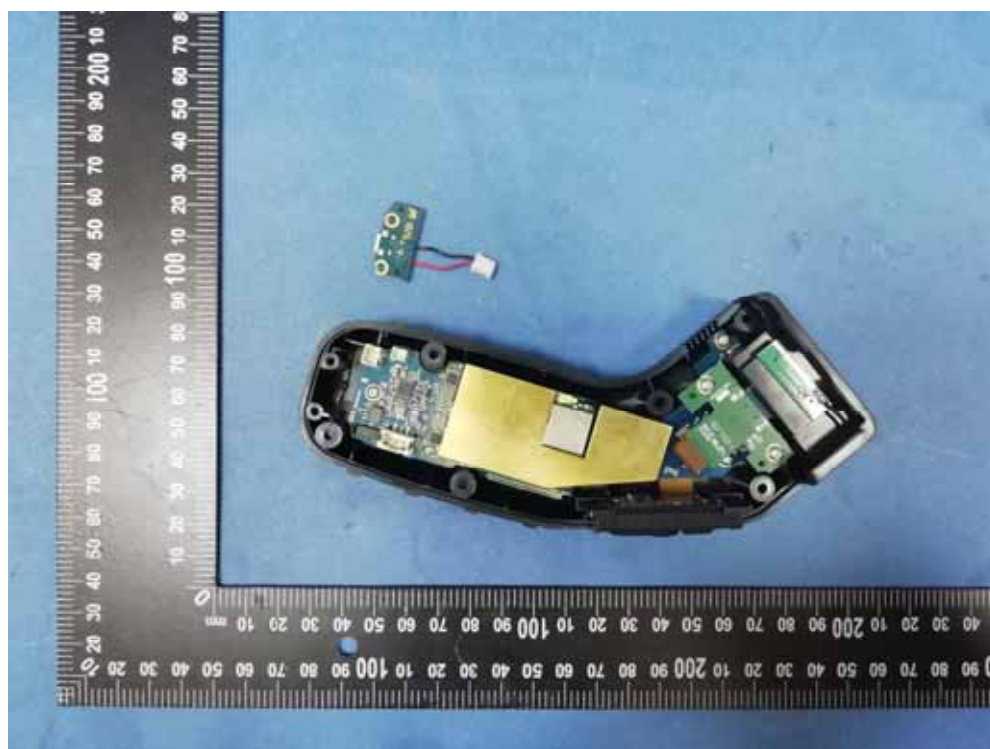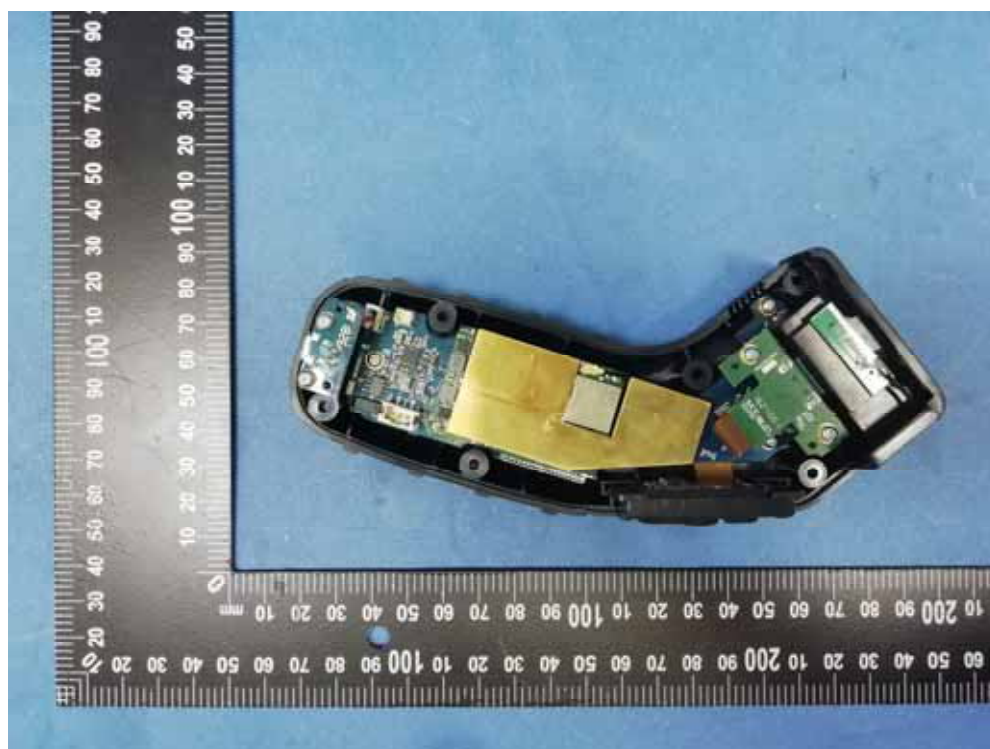

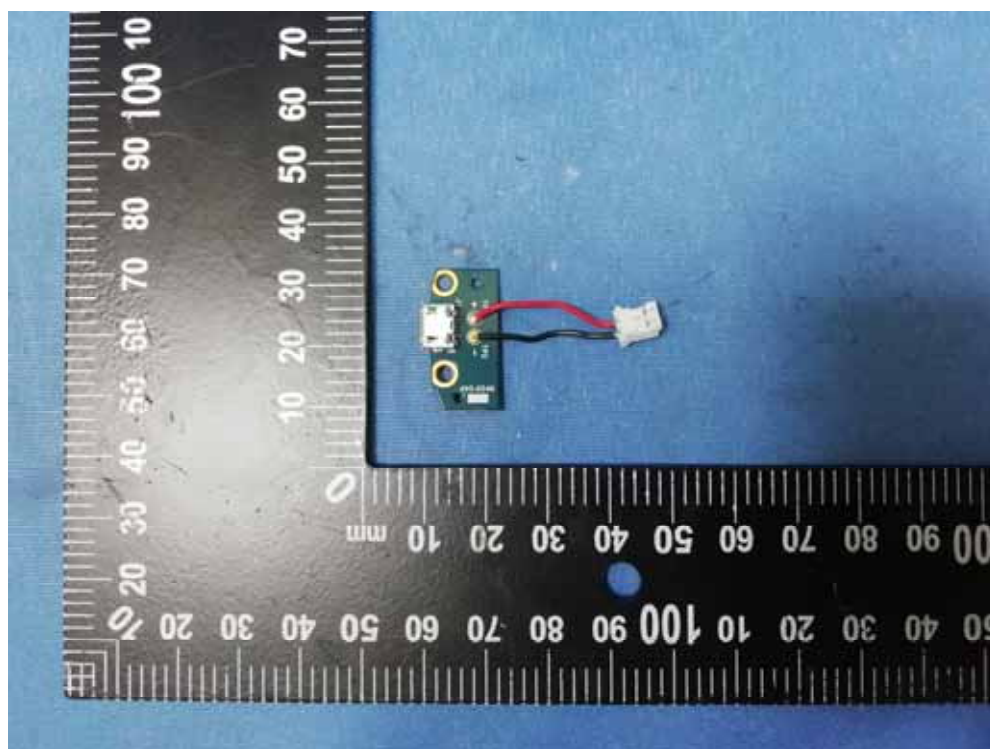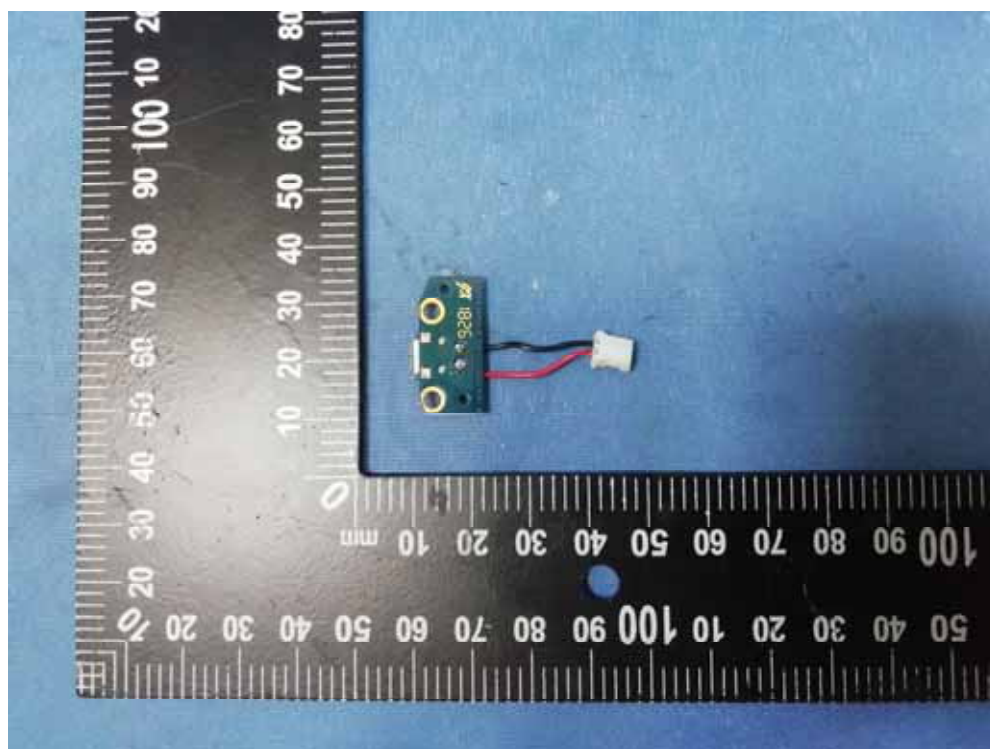

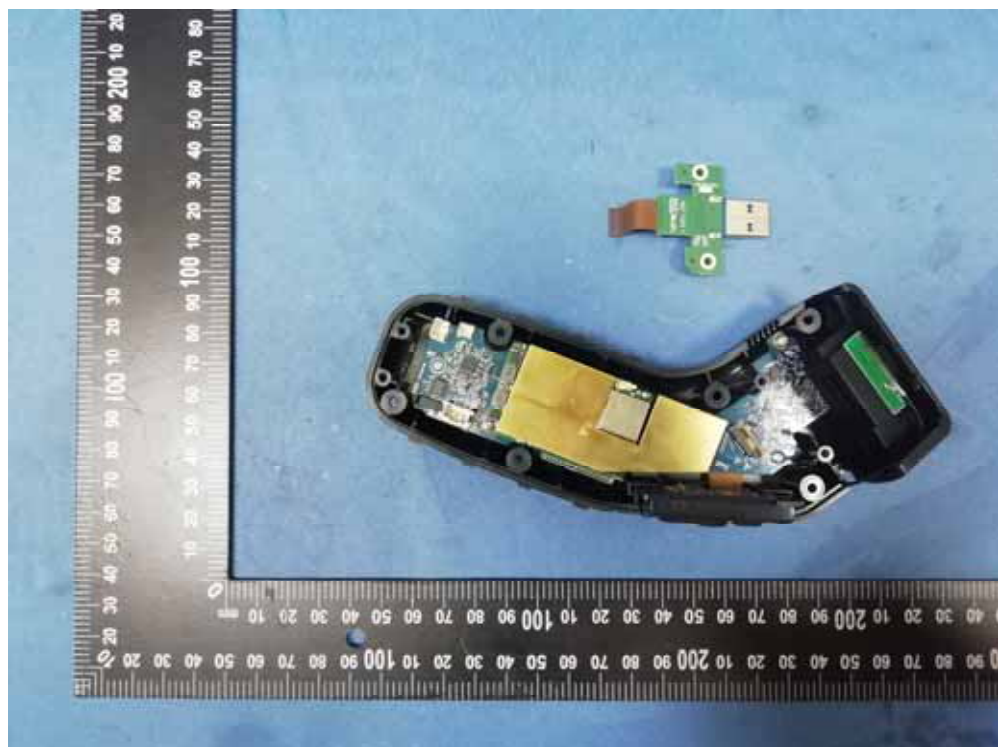


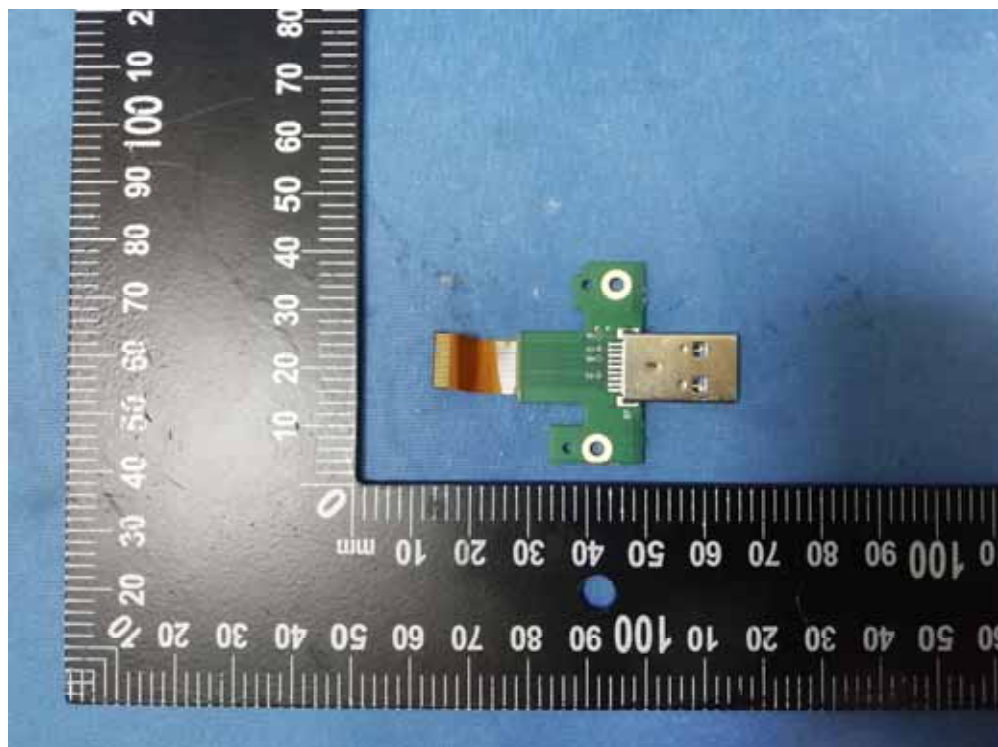
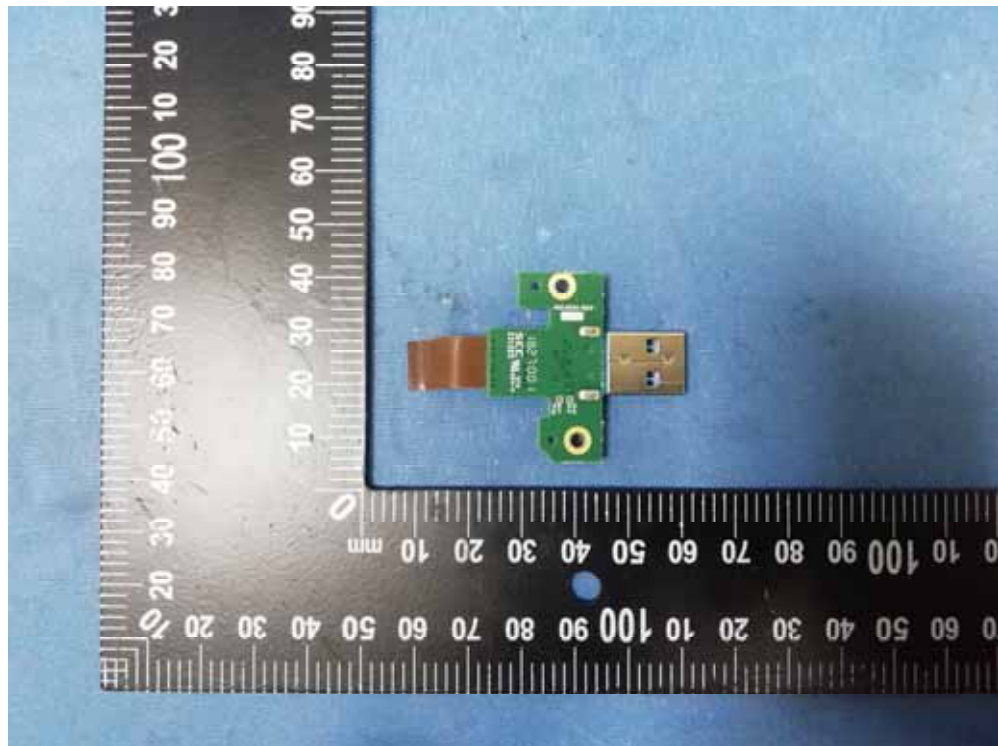



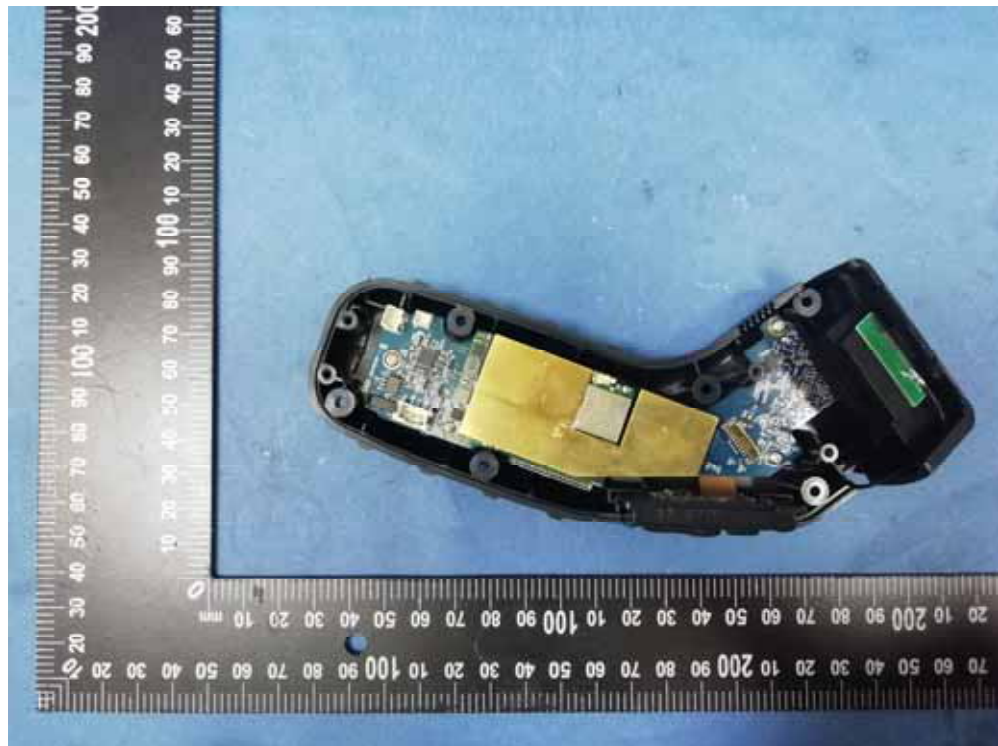








ANT

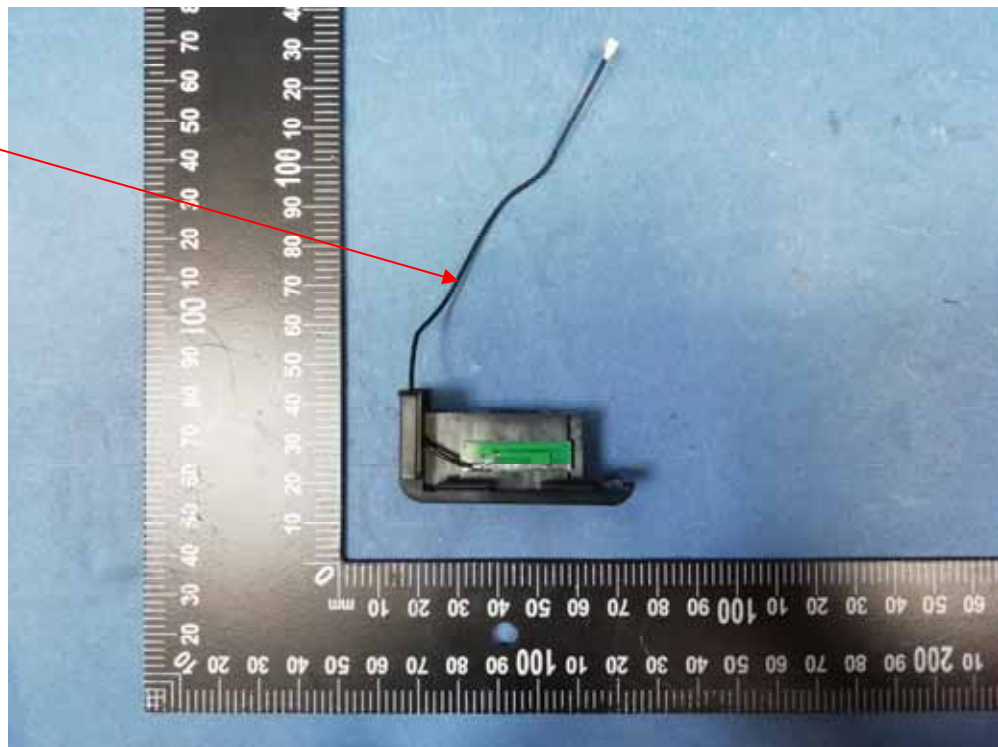


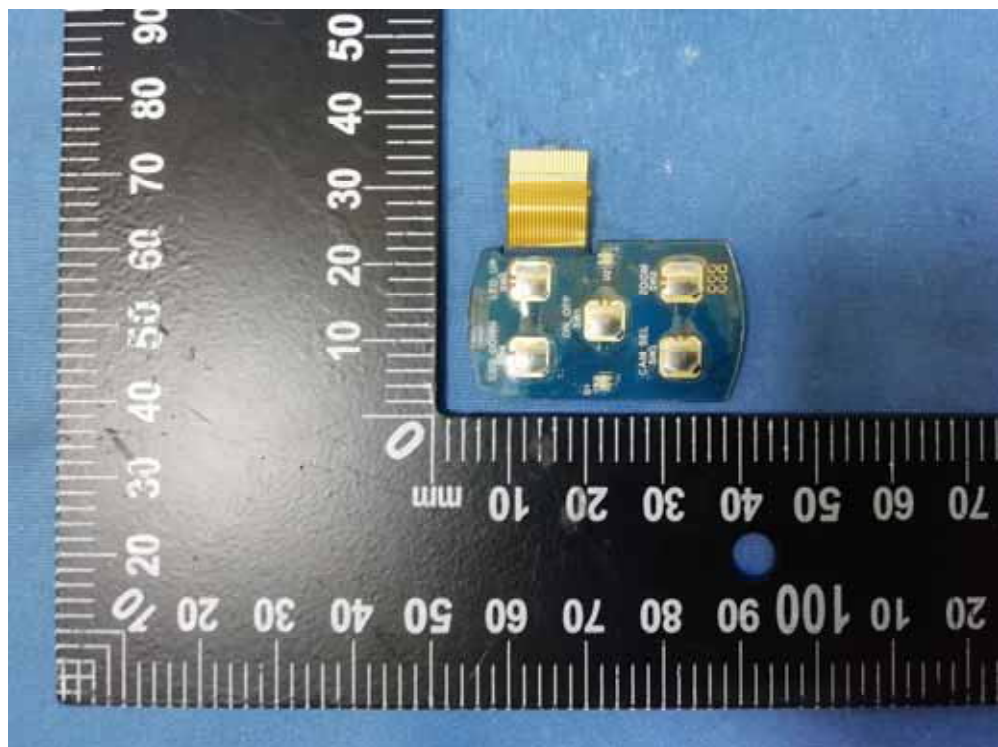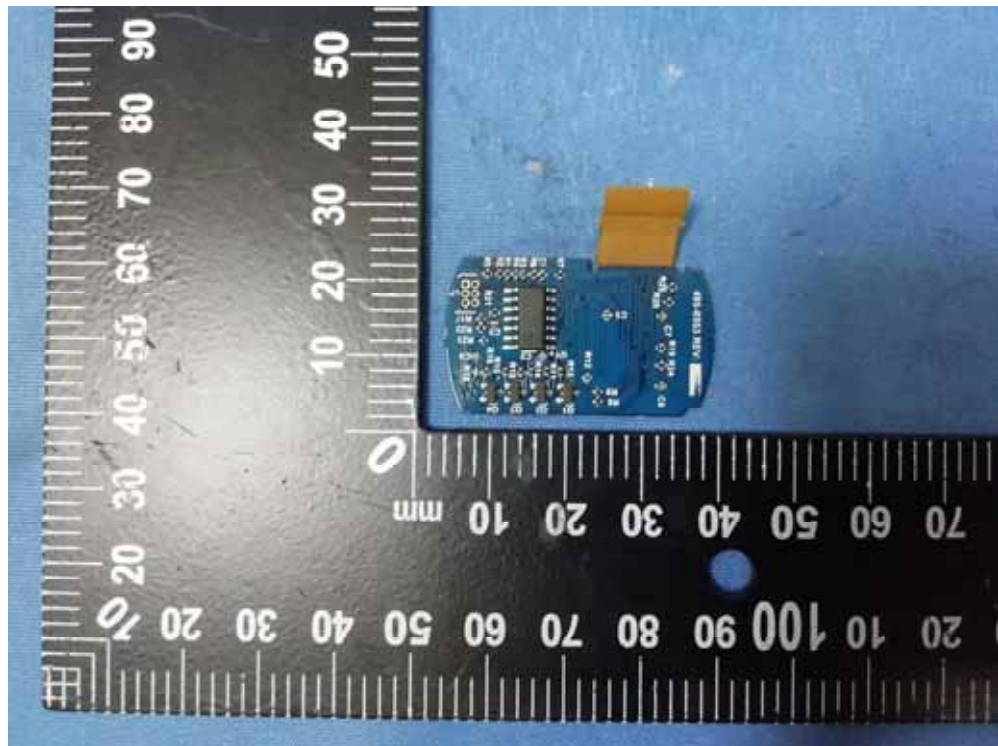


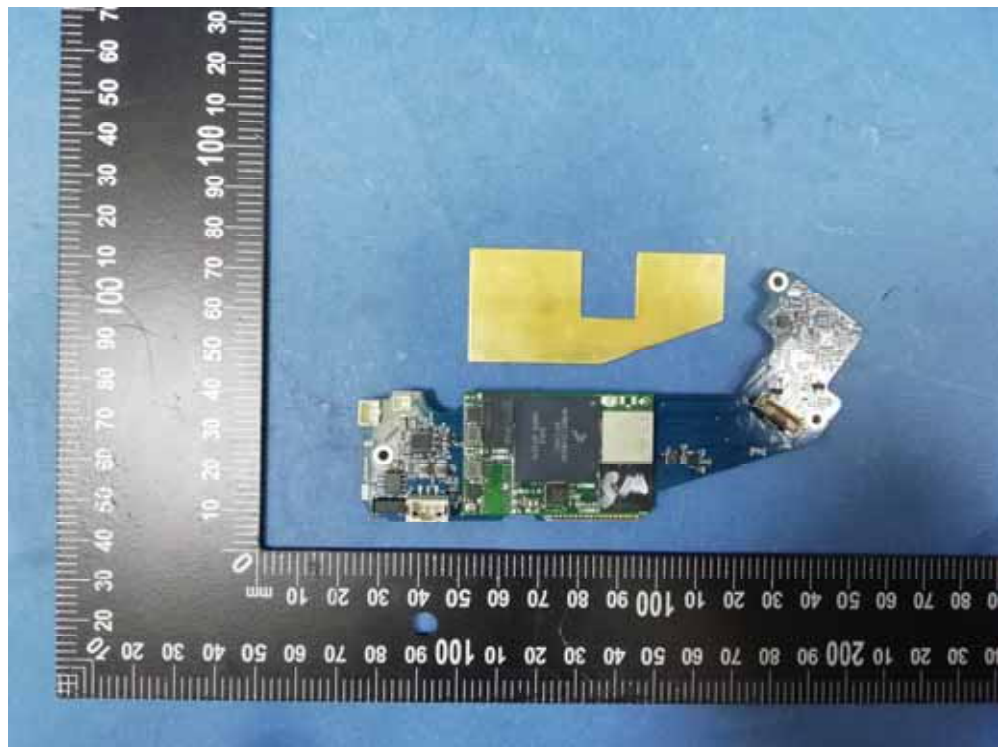
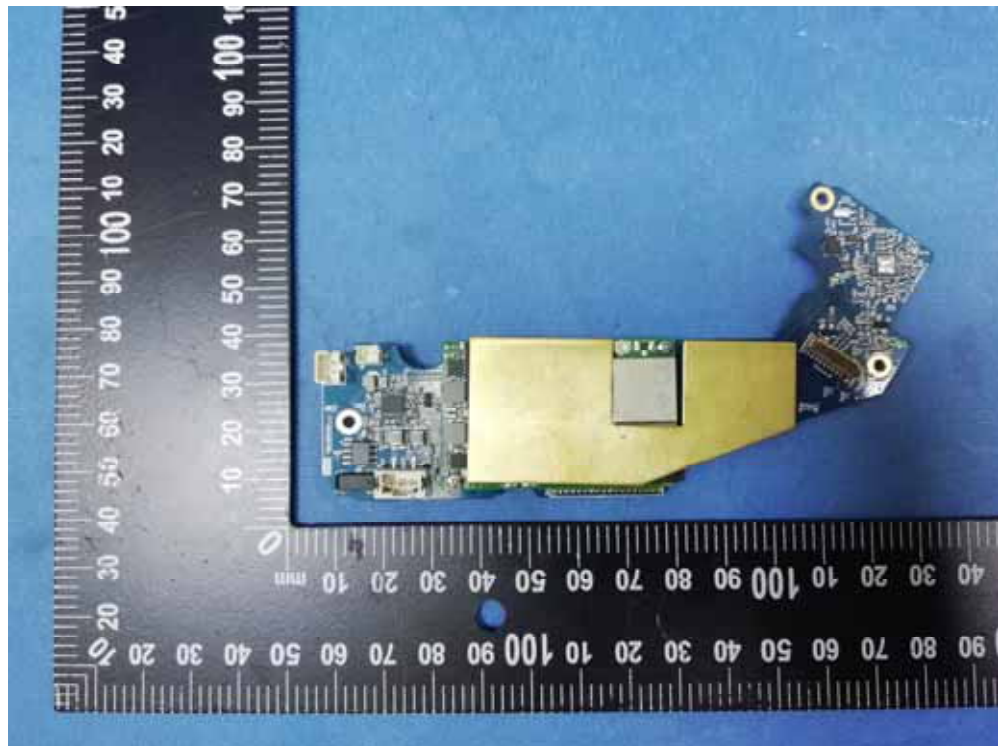


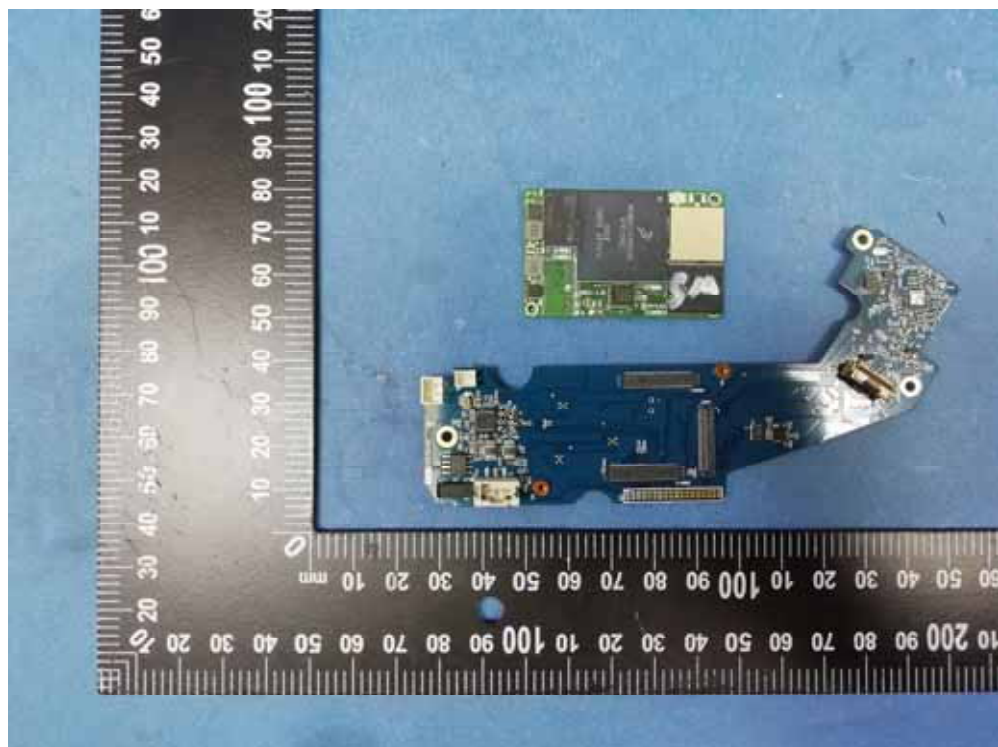
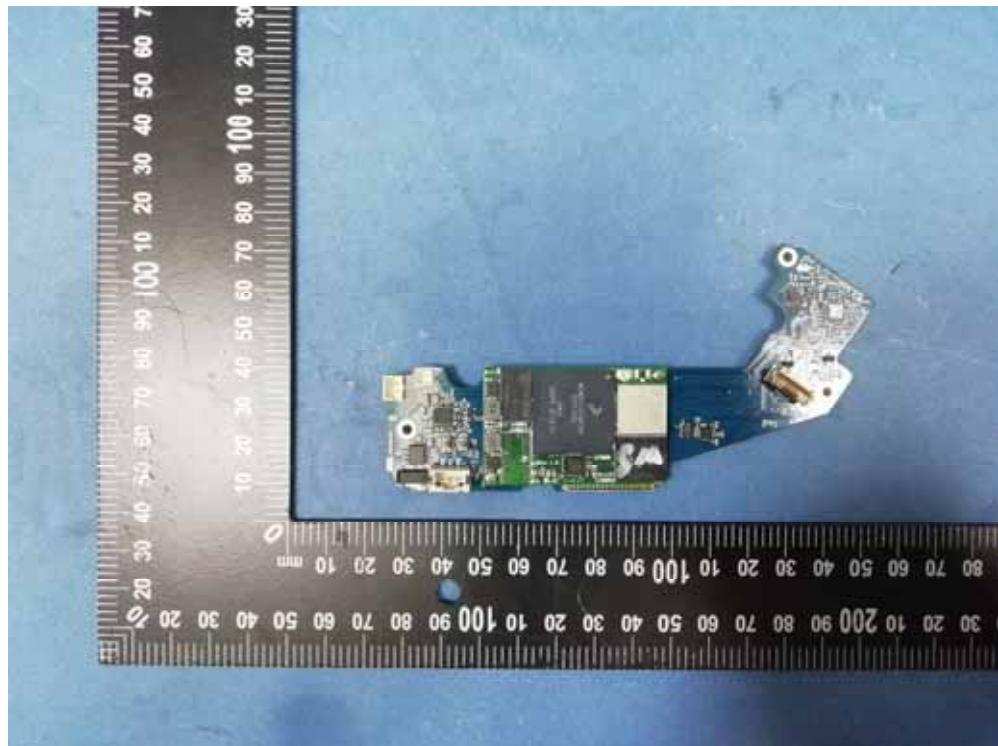


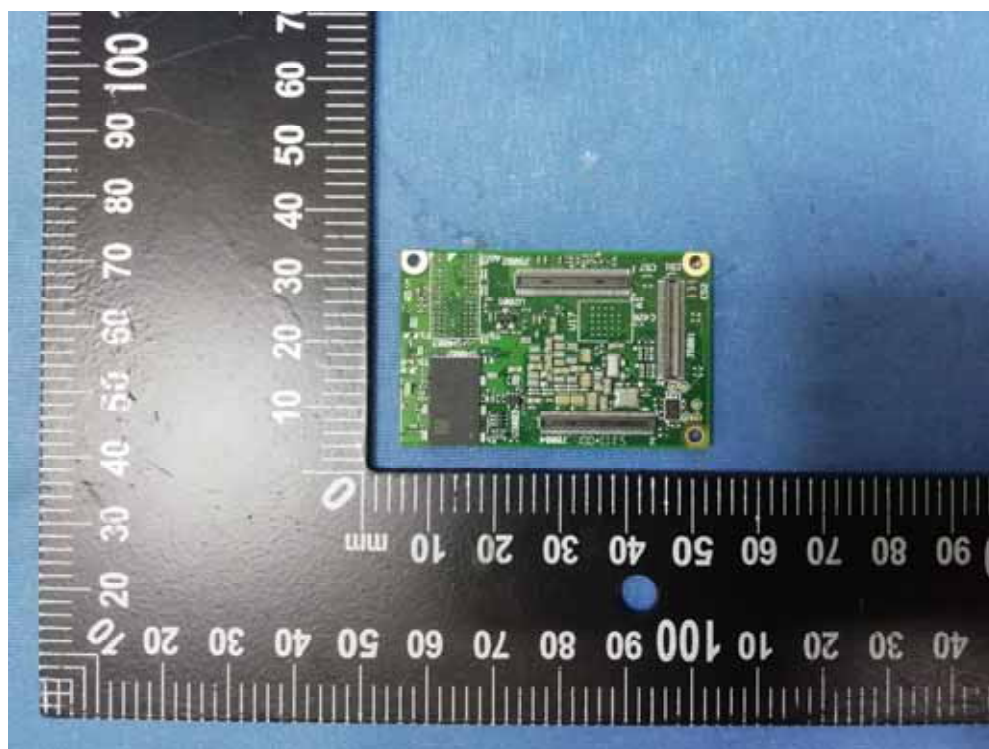
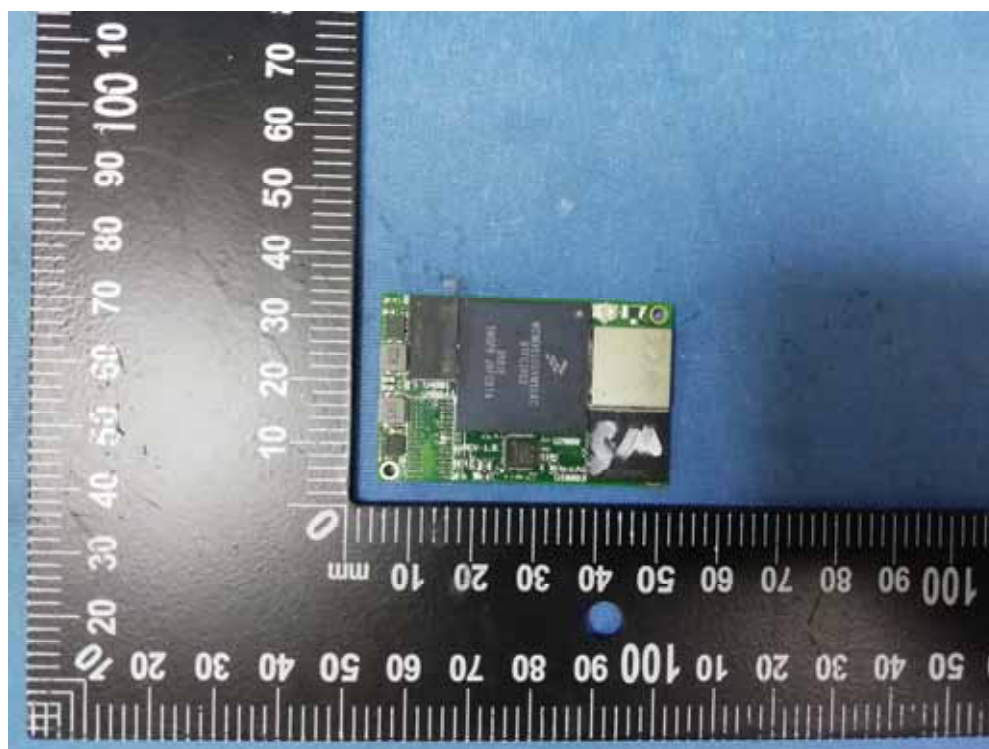


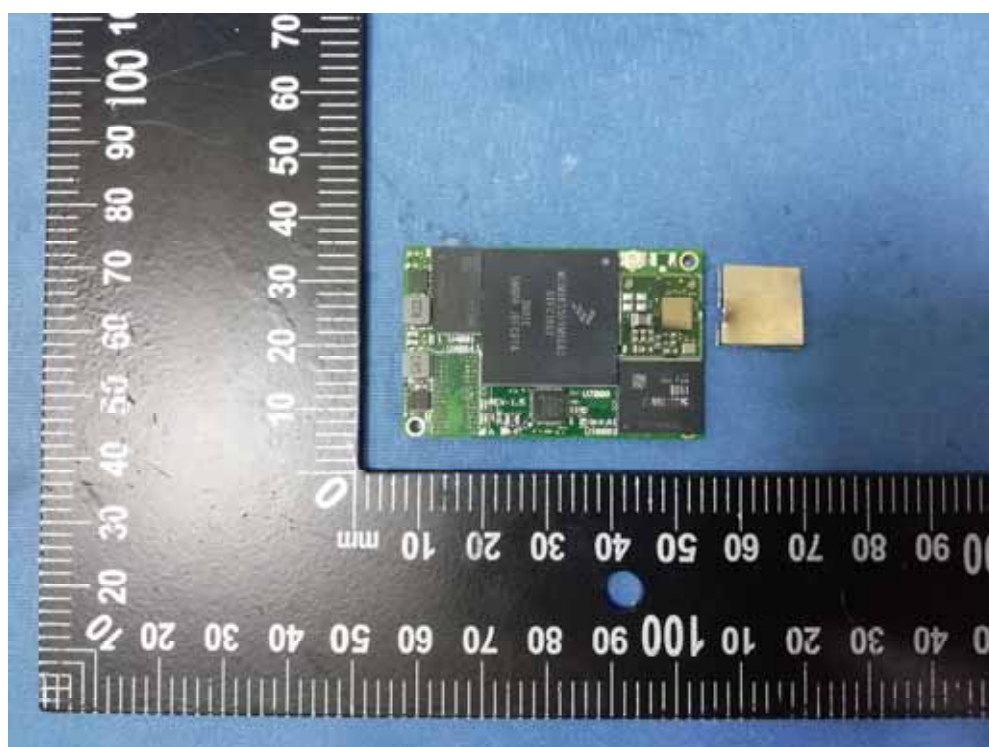


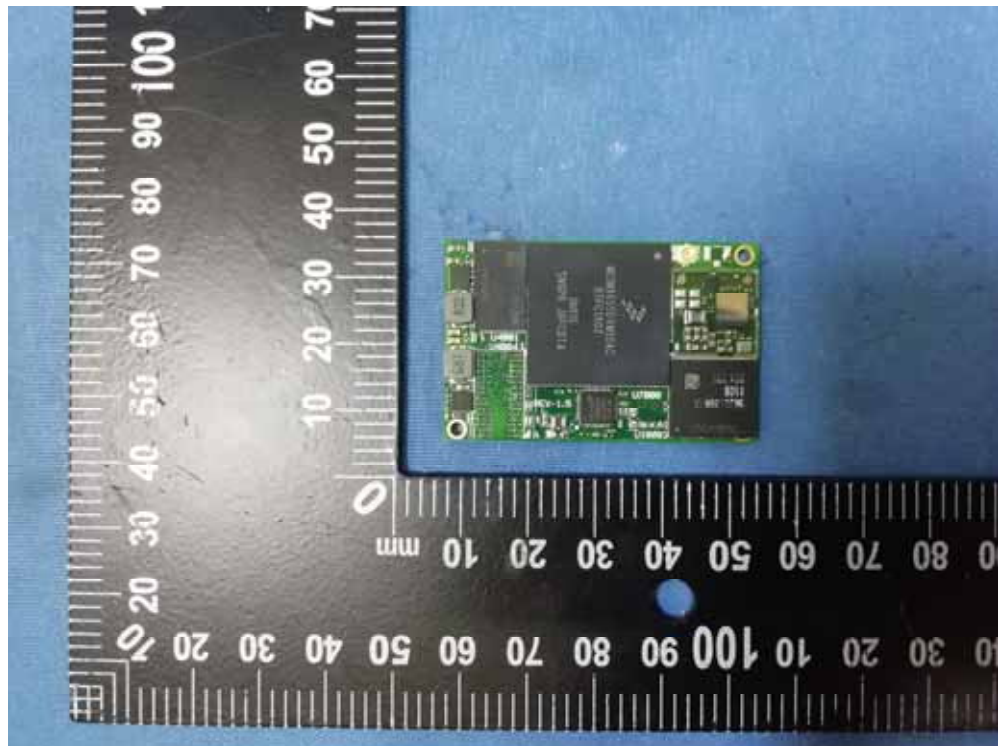

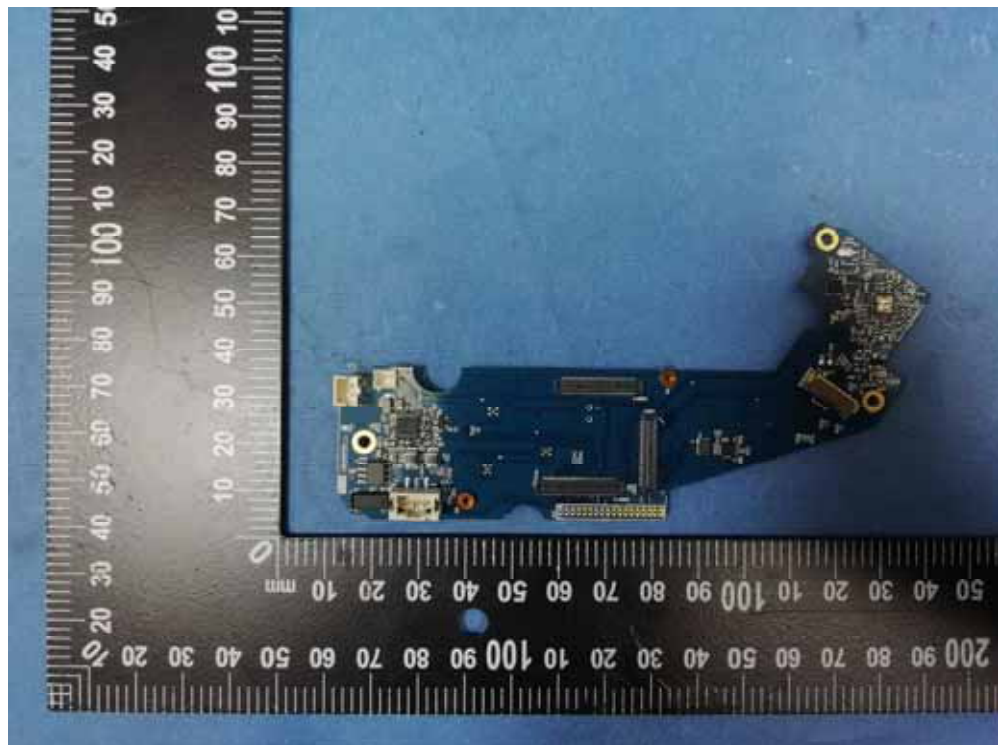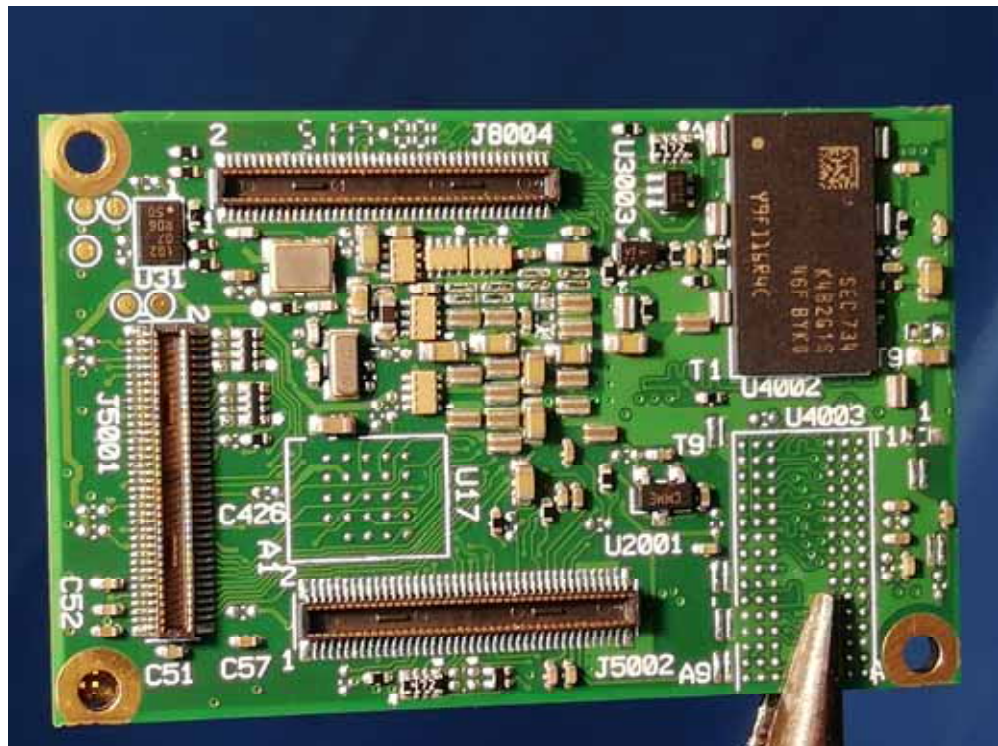

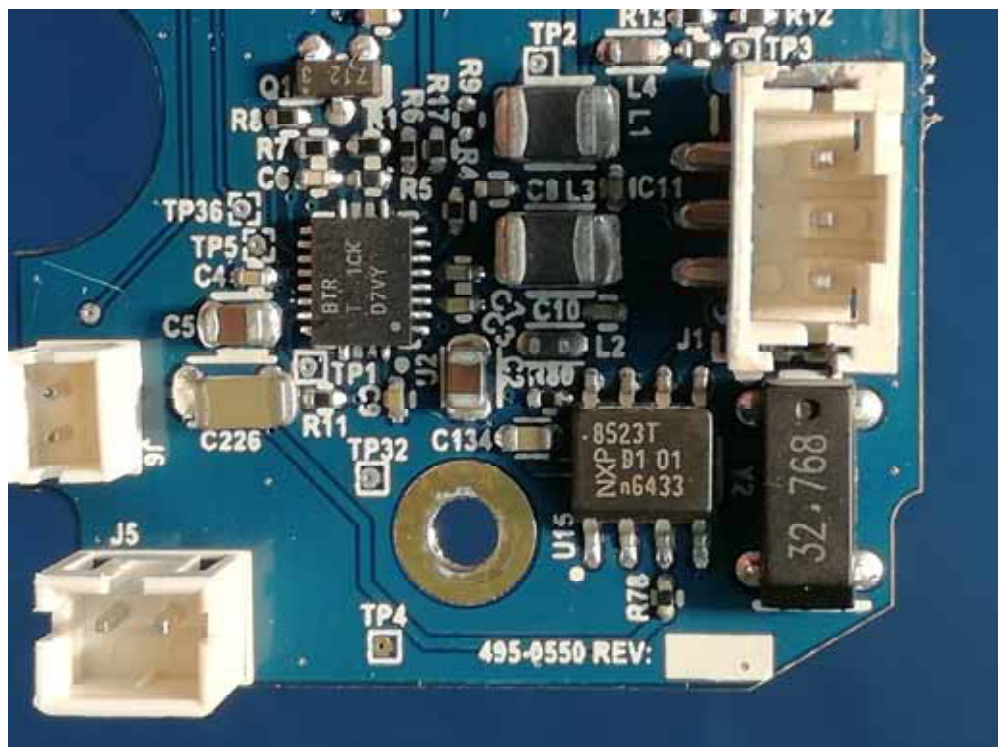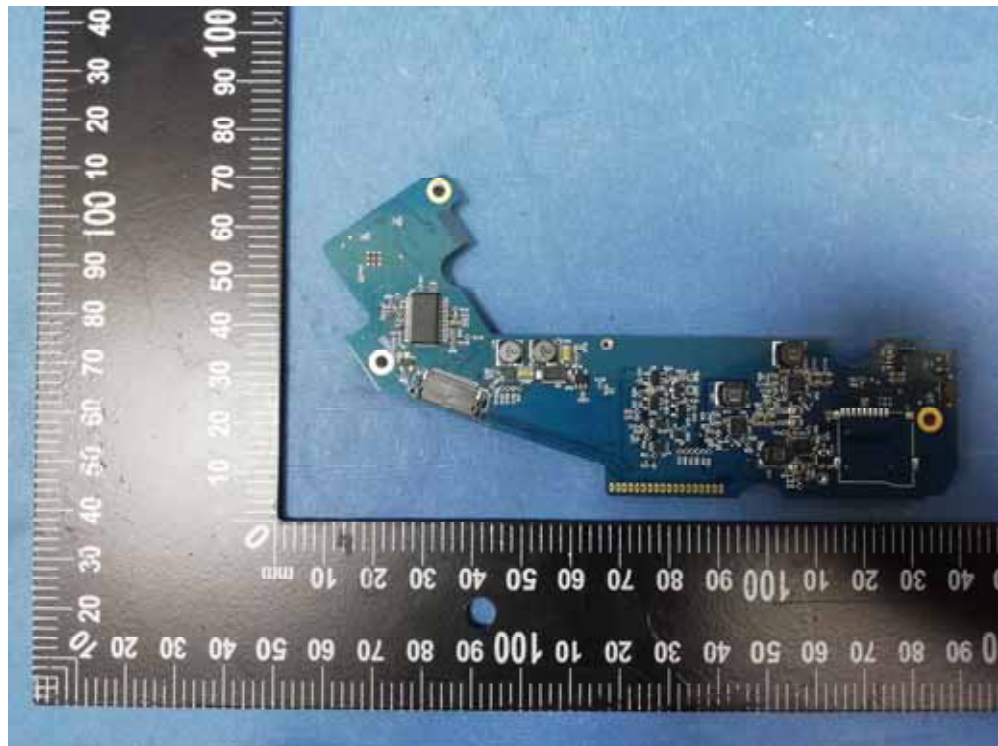

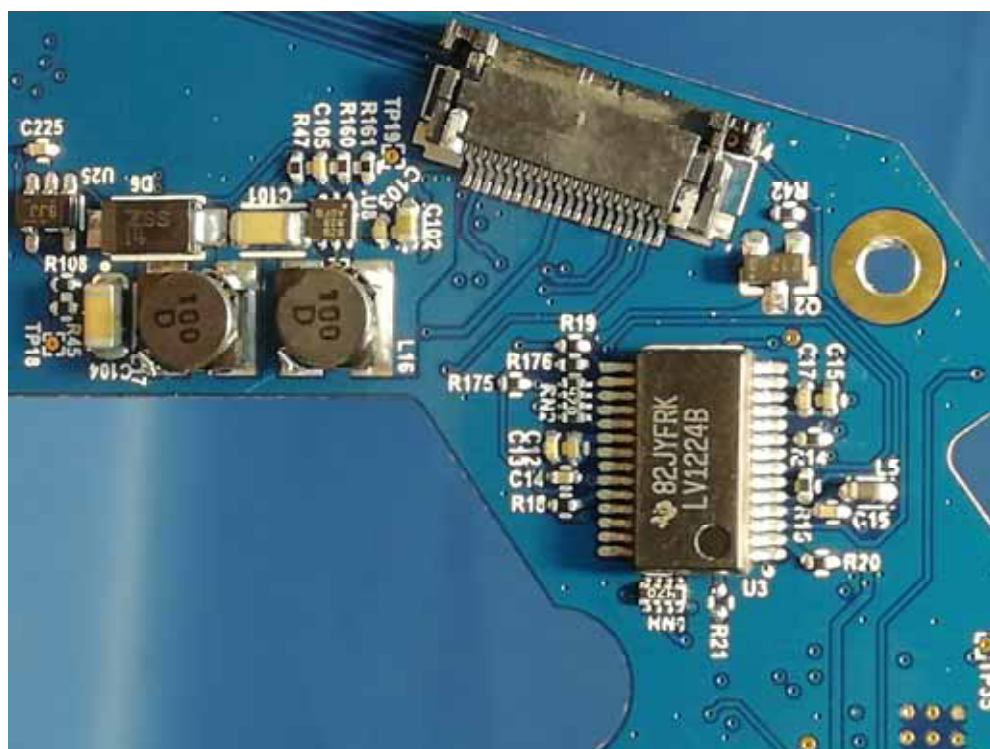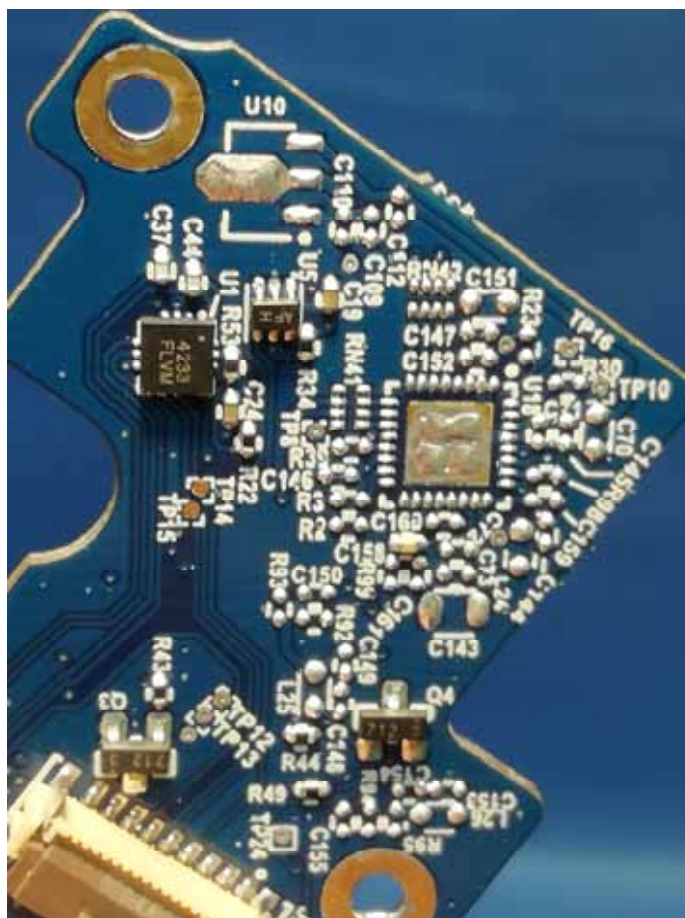

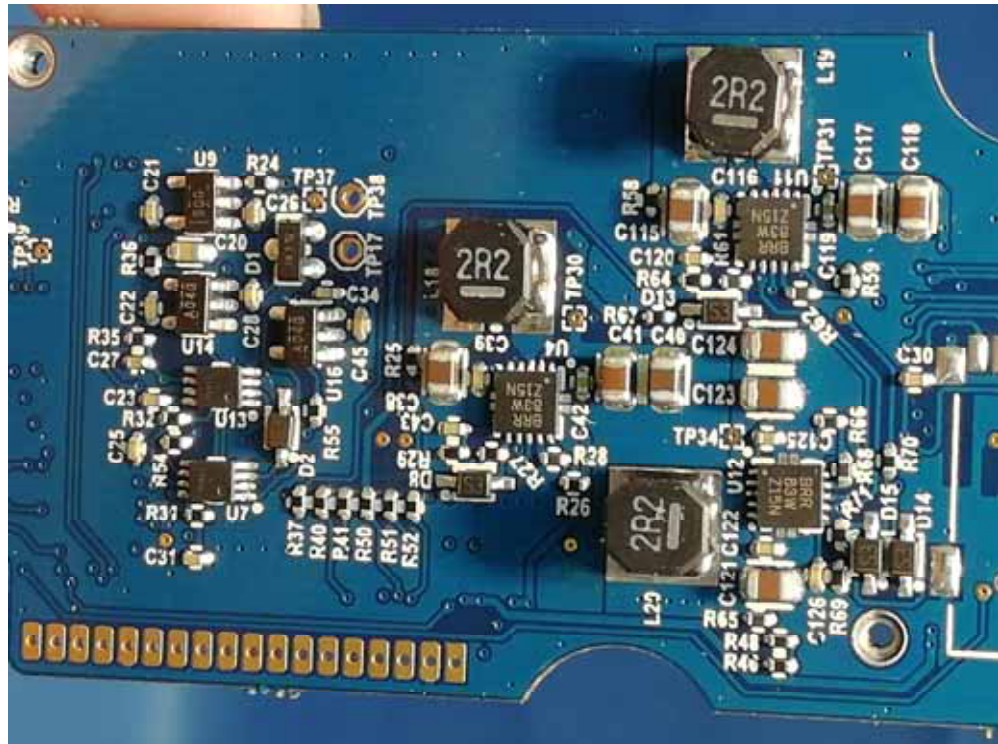

=====End of Report=====