



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

Intelligent Backhaul Radio

MODEL NUMBER: IBR-120x-38-NA

FCC ID: 2AAEH-104

REPORT NUMBER: 14U18829-1 Revision A

ISSUE DATE: JANUARY 13, 2015

Prepared for

**CBF NETWORKS, INC., DBA FASTBACK NETWORKS
2460 N. FIRST STREET, SUITE 200
SAN JOSE, CA 95131, USA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	1/9/15	Initial Issue	F. de Anda
A	1/13/15	Updated high frequency for 10/20/40MHz to clear 5250MHz edge.	C. Xiong

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE.....	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	12
8. ANTENNA PORT TEST RESULTS	13
8.1. ON TIME AND DUTY CYCLE	13
8.2. 10MHz 2Tx MODE IN THE 5.2 GHz BAND.....	15
8.2.1. 26 dB BANDWIDTH.....	15
8.2.2. OUTPUT POWER AND PSD	19
8.2.3. OUT-OF-BAND EMISSIONS	24
8.3. 20MHz 2Tx MODE IN THE 5.2 GHz BAND.....	28
8.3.1. 26 dB BANDWIDTH.....	28
8.3.2. OUTPUT POWER AND PSD	33
8.3.3. OUT-OF-BAND EMISSIONS	40
8.4. 40MHz 2TX MODE IN THE 5.2 GHz BAND.....	45
8.4.1. 26 dB BANDWIDTH.....	45
8.4.2. OUTPUT POWER AND PSD	51
8.4.3. OUT-OF-BAND EMISSIONS	59
9. RADIATED TEST RESULTS.....	66
9.1. LIMITS AND PROCEDURE	66
9.2. TRANSMITTER ABOVE 1 GHz	67
9.2.1. TX ABOVE 1 GHz 10MHz 2 TX MODE IN THE 5.2 GHz BAND	67

9.2.2.	TX ABOVE 1 GHz 20MHz 2 TX MODE IN THE 5.2 GHz BAND	73
9.2.3.	TX ABOVE 1 GHz 40MHz 2 TX MODE IN THE 5.2 GHz BAND	81
9.3.	<i>WORST-CASE BELOW 1 GHz</i>	91
9.4.	<i>WORST-CASE 18 to 26 GHz</i>	93
9.5.	<i>WORST-CASE 26 to 40 GHz</i>	94
10.	AC POWER LINE CONDUCTED EMISSIONS	95
11.	SETUP PHOTOS	100

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: CBF NETWORKS, INC., DBA FASTBACK NETWORKS
2460 N. FIRST STREET, SUITE 200
SAN JOSE, CA 95131, USA

EUT DESCRIPTION: Intelligent Backhaul Radio

MODEL: IBR-120x-38-NA

SERIAL NUMBER: 40314380088 (conducted) 40314390023 (radiated)


DATE TESTED: October 21, 2014 – January 13, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



Francisco de Anda
PROJECT LEAD/ PROGRAM MANAGER
UL VERIFICATION SERVICES INC.

Tested By:



Tony Wagoner
EMC ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street		47266 Benicia Street	
☐ Chamber A		☐ Chamber D	☒ Chamber G
☐ Chamber B		☐ Chamber E	☒ Chamber H
☐ Chamber C		☒ Chamber F	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Fixed Point-to-Point radio in 5.2GHz unlicensed band with a proprietary communication management interface Intelligent Backhaul Radio.

This device uses 40MHz, 20MHz and 10MHz bandwidths with QAM4, QAM16, QAM64, QAM256 modulation. It transmits dual stream uncorrelated MIMO.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2 GHz BAND

Bandwidth (MHz)	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.2 GHz Band, 2Tx				
10	5166-5240	FDD	24.90	309.03
20	5181-5235	FDD	27.97	626.61
40	5190-5225	FDD	29.78	950.60

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Dipole array antenna, with a maximum gain of 10.6 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Build SVN Revision: 5248

The test utility software used during testing was Micro monitor 1.6.0

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

All radiated testing was performed with the EUT in normal use orientation.

Based on the baseline scan, the worst-case data rates were:

10MHz bandwidth QAM 4
20MHz bandwidth QAM 4
40MHz bandwidth QAM 4
Data rate 30 Msamples/s for all bandwidths

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	Think Pad	R9-D497T 11/04	QDS-BRCM 1046
POE	PHIHONG	POE36U-1AT-R	P21601123D1	N/A
AC/DC Adapter	Lenovo	N/A	11S45N0113Z1ZH819P0FN	N/A

I/O CABLES


I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	U.FL	Sheilded	0.3	N/A
2	AC	2	3 Prong	Un-Sheilded	1	N/A
3	POE/LAN	1	RJ45	Sheilded	1	N/A
4	USB	1	USB	Sheilded	0.3	N/A
5	Serial	1	9 Pin Sub D	Sheilded	1	N/A
6	AC	2	3 Prong	Un-Sheilded	1	N/A
7	DC	1	Barrel	Un-Sheilded	1	N/A

TEST SETUP


The EUT is a P-P outdoor radio used as a stand-alone device. Test software exercised the radio module.

SETUP DIAGRAM FOR TESTS


CONDUCTED

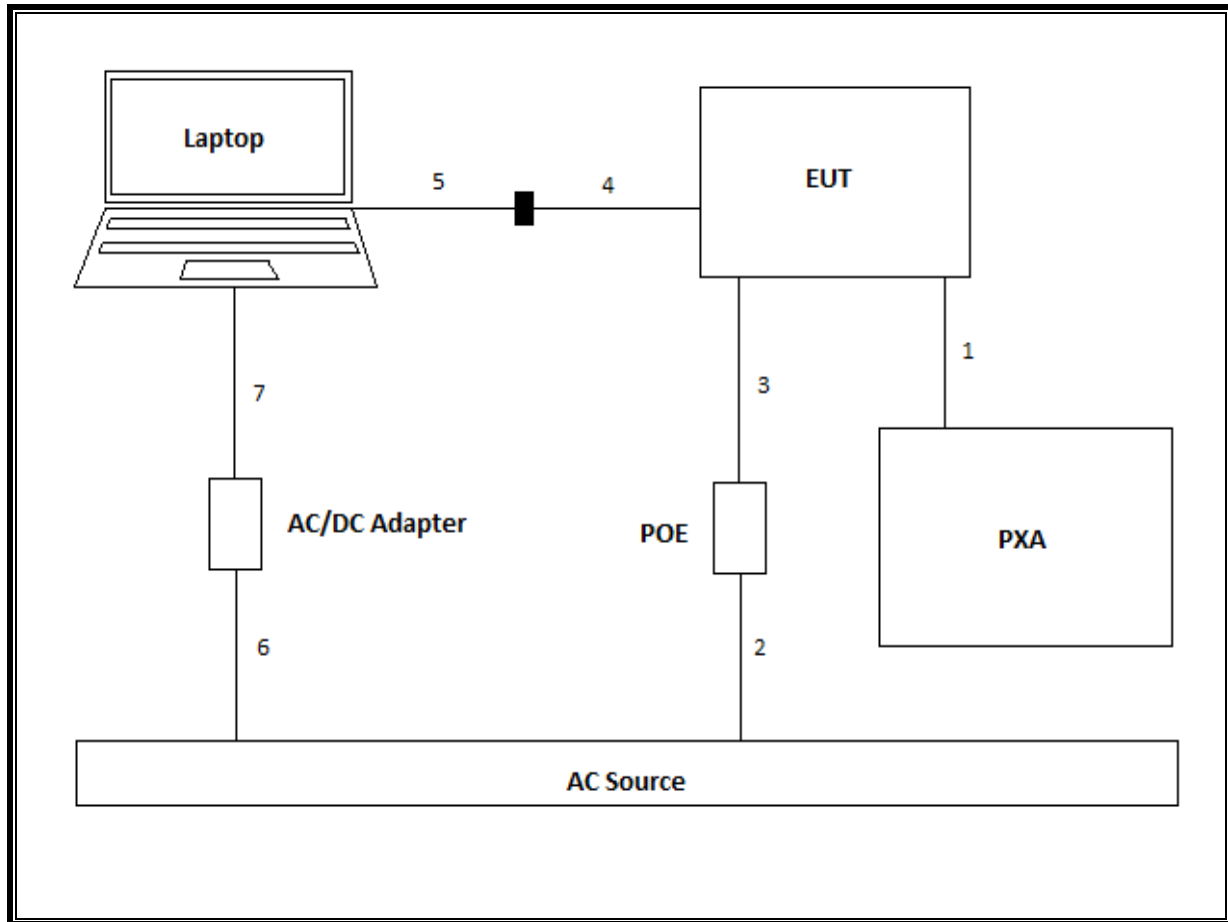

RADIATED

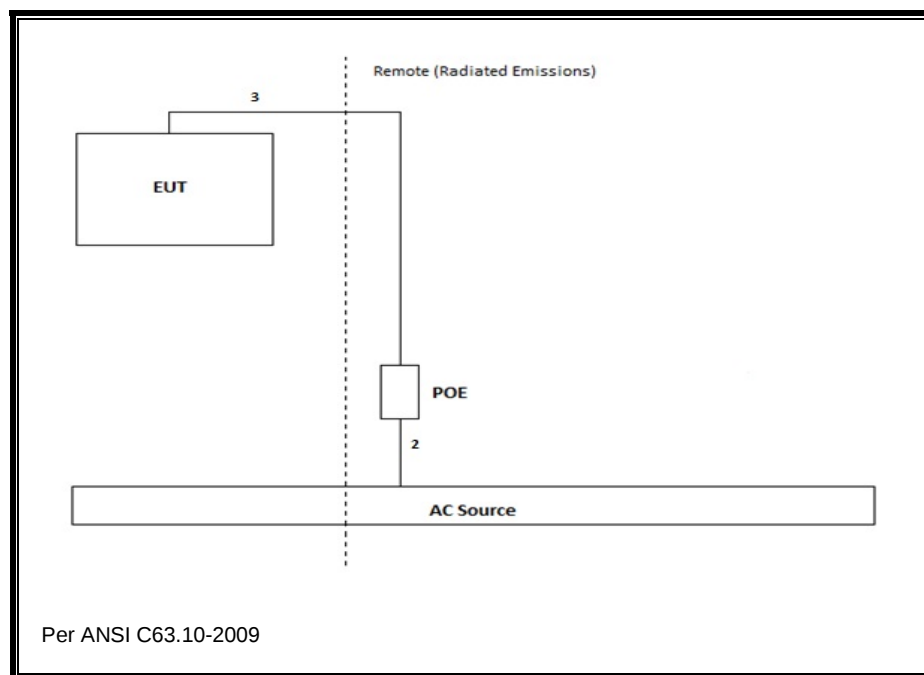

AC LINE CONDUCTED

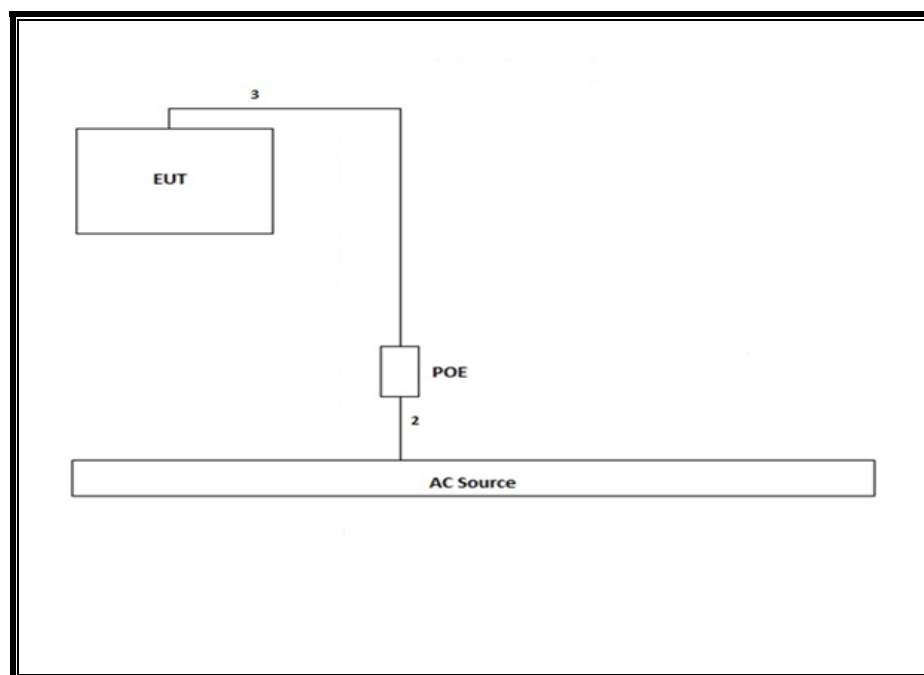

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
Chamber F					
Antenna, Horn 18 GHz	ETS Lindgren	3117	120	03/20/14	03/20/15
Antenna, Biconolog, 30MHz-1GHz	Sunol Sciences	JB1	122	04/22/14	01/28/15
High Pass Filter, fc: 3.0GHz, 50 Ohms	Micro-Tronics	HPM17543	427	01/20/14	01/20/15
Low Pass Filter, fc: 5GHz, 50 Ohms	Micro-Tronics	LPS17541	421	01/20/14	01/20/15
High Pass Filter, fc: 6GHz, 50 Ohms	Micro-Tronics	HPS17542	425	01/20/14	01/20/15
RF PreAmplifier, 1-18GHz	Miteq	AFS42-00101800-25-S-42	742	01/20/14	01/20/15
Preamp, 1000MHz	Sonoma	310N	173	06/07/14	06/07/15
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	341	02/12/14	02/12/15
Chamber G					
Antenna, Horn 18 GHz	ETS Lindgren	3117	862	04/14/14	04/14/15
Antenna, Biconolog, 30MHz-1GHz	Sunol Sciences	JB3	899	05/14/14	04/27/15
High Pass Filter, fc: 3.0GHz, 50 Ohms	Micro-Tronics	HPM17543	898	05/13/14	05/13/15
Low Pass Filter, fc: 5GHz, 50 Ohms	Micro-Tronics	LPS17541	892	05/13/14	05/13/15
High Pass Filter, fc: 6GHz, 50 Ohms	Micro-Tronics	HPS17542	893	05/14/14	05/13/15
RF PreAmplifier, 1-18GHz	Miteq	AFS42-00101800-25-S-42	491	05/15/15	06/05/15
Preamp, 1000MHz	Sonoma	310N	834	05/16/15	06/05/15
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	905	05/17/15	05/17/15
Chamber H					
Antenna, Horn 18 GHz	ETS Lindgren	3117	863	04/14/14	04/14/15
Antenna, Biconolog, 30MHz-1GHz	Sunol Sciences	JB3	900	05/14/14	04/27/15
High Pass Filter, fc: 3.0GHz, 50 Ohms	Micro-Tronics	HPM17543	897	05/14/14	05/13/15
Low Pass Filter, fc: 5GHz, 50 Ohms	Micro-Tronics	LPS17541	891	05/13/14	05/13/15
High Pass Filter, fc: 6GHz, 50 Ohms	Micro-Tronics	HPS17542	894	05/13/14	05/13/15
RF PreAmplifier, 1-18GHz	Miteq	AFS42-00101800-25-S-42	495	06/05/14	06/05/15
Preamp, 1000MHz	Sonoma	310N	835	06/05/14	06/05/15
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	906	05/07/14	05/07/15
Conducted					
Spectrum Analyzer	Agilent	E4440A	189	05/09/14	05/09/15
Power Meter, P-series single channel	Agilent	N1911A	382	04/09/14	04/09/15
Power Sensor, Peak and average, 50 MHz to 6 GHz, 5 MHz BW	Agilent	E9323A	400	05/02/14	05/02/15
Power Meter, P-series single channel	Agilent	N1911A	385	04/30/14	04/30/15
Power Sensor, Peak and average, 50 MHz to 18 GHz, 5 MHz BW	Agilent	E9327A	117	05/15/14	05/15/15
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	24	01/17/14	01/17/15
Rohde & Schwarz	ESCI 7	100773	212	08/14/14	08/14/15

Test Equipment List (cont.)					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
Above 18GHz					
Antenna, Horn 18 to 26.5GHz	ARA	SWH-28	T125	05/09/14	05/09/15
Amp. 26GHz	Agilent	8449B	T404	03/25/14	03/25/15
Antenna, Horn 26 to 40GHz	ARA	MWh-2640	T90	07/15/14	07/15/15
Amp. 26 to 40GHz	Miteq	NSP4000-SP2	T88	09/03/14	09/03/15
Spectrum Analyzer, 40 GHz	HP	8564E	T106	08/06/14	08/06/15

7. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 v01r, Section C.

Conducted Output Power: KDB 789033 D02 v01, Section E.2.b (Method SA-1).

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.6.

KDB 662911 D02 MIMO with Cross-Polarized Antennas v01

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 10MHz 2TX	3.963	4.023	0.985	98.51%	0.00	0.010
802.11n 20MHz 2TX	3.965	4.025	0.985	98.51%	0.00	0.010
802.11n 40MHz 2TX	3.970	4.030	0.985	98.51%	0.00	0.010

DUTY CYCLE PLOTS

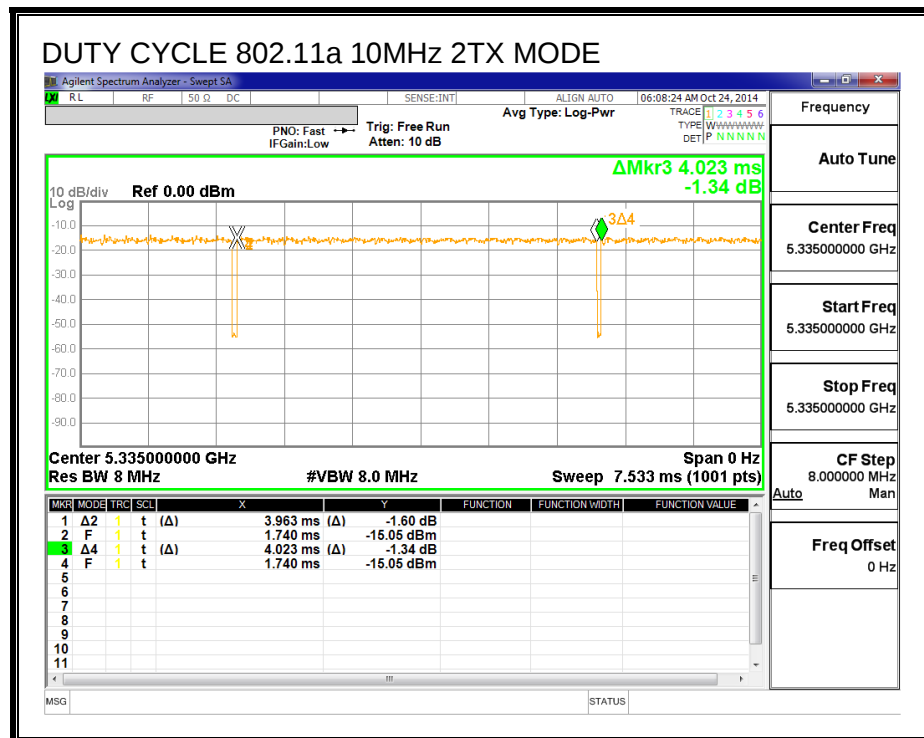

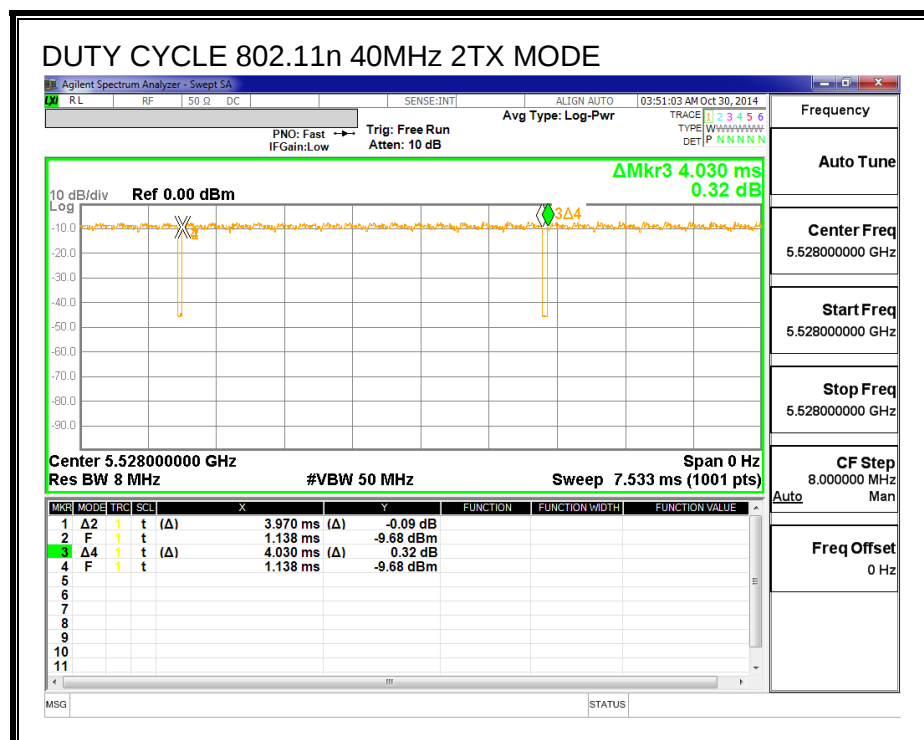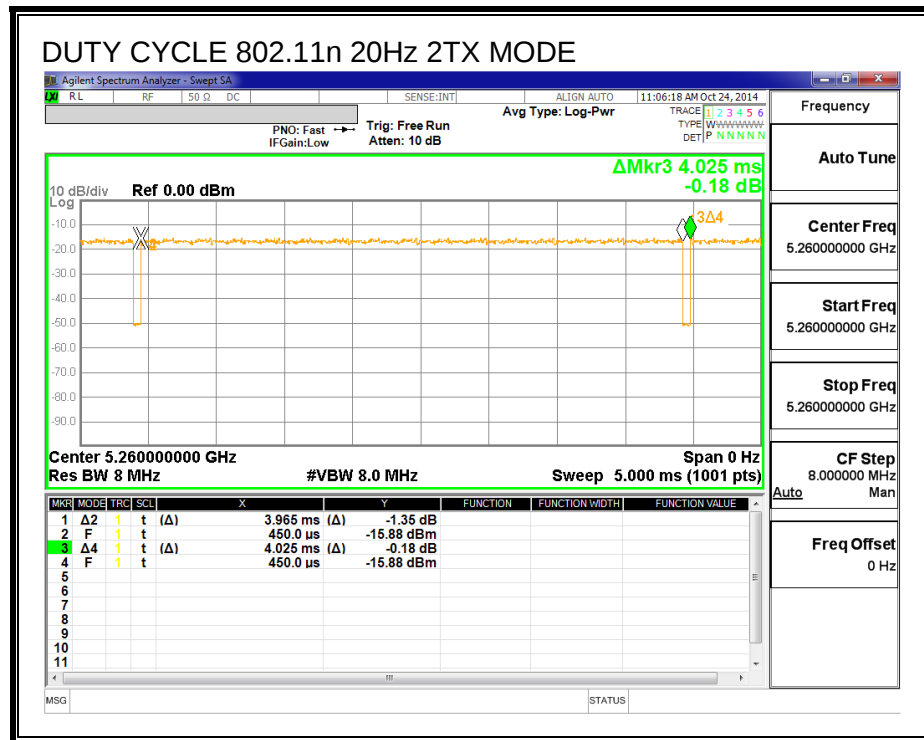

8.2. 10MHz 2Tx MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5166	10.64	10.67
Mid	5200	10.67	10.67
High	5240	10.86	10.89



26 dB BANDWIDTH, Chain 0

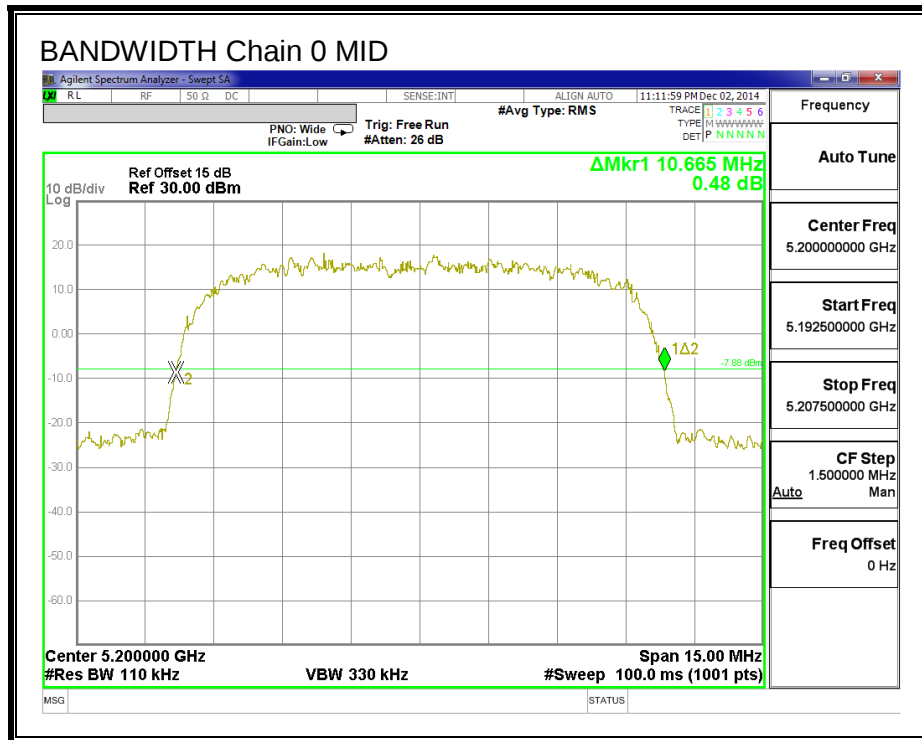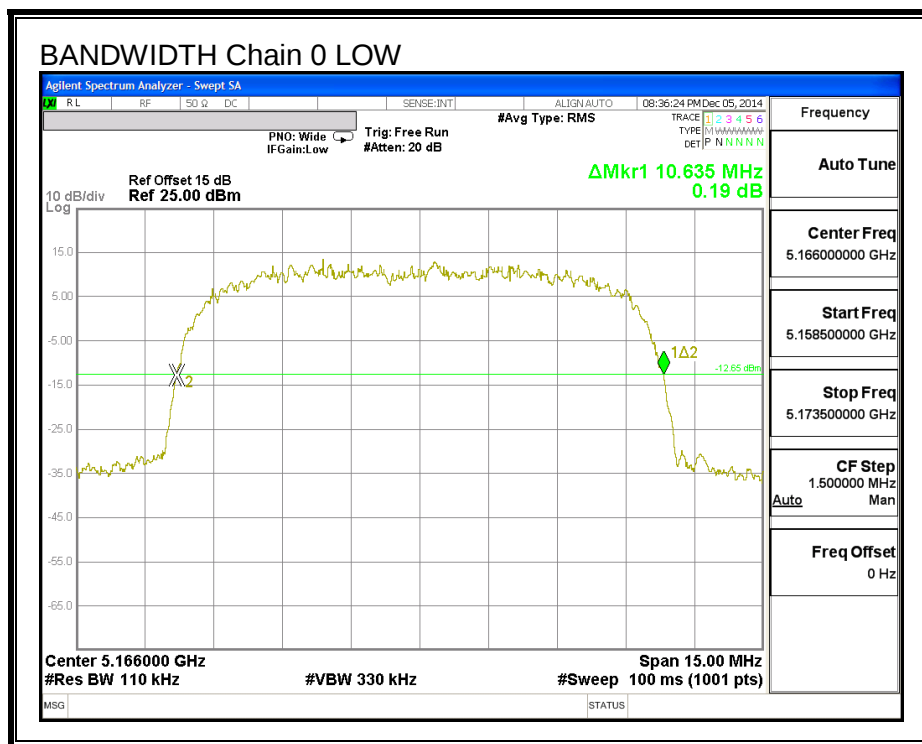

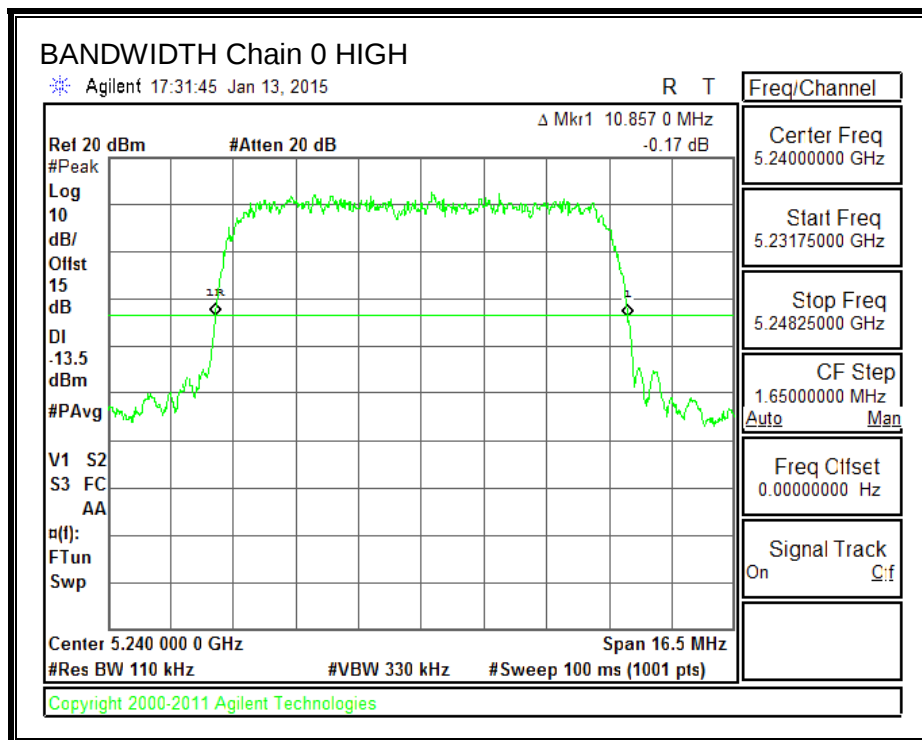

26 dB BANDWIDTH, Chain 1

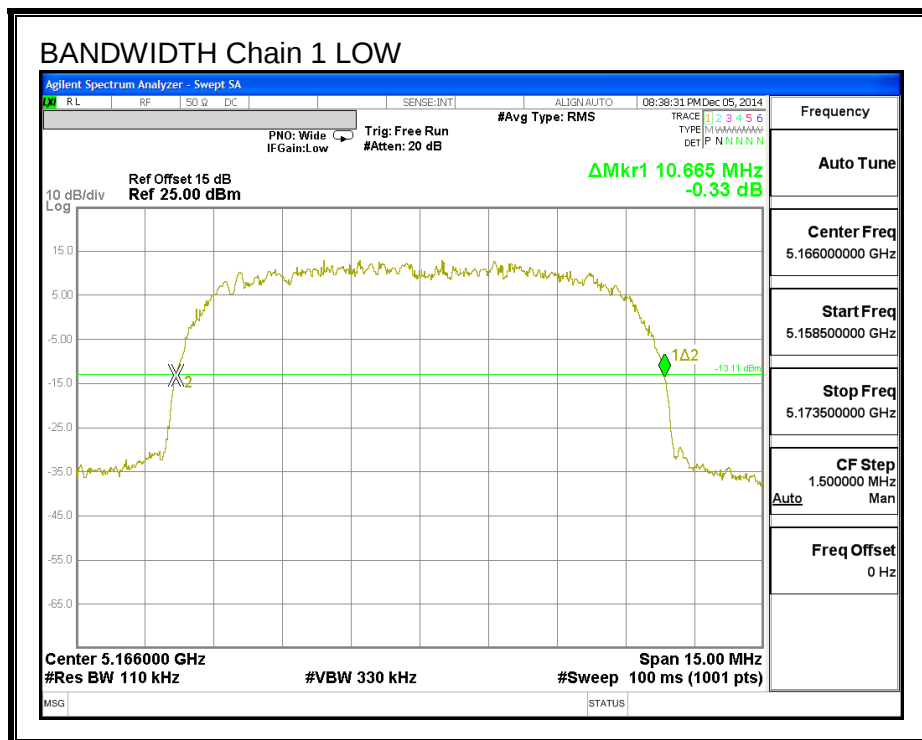

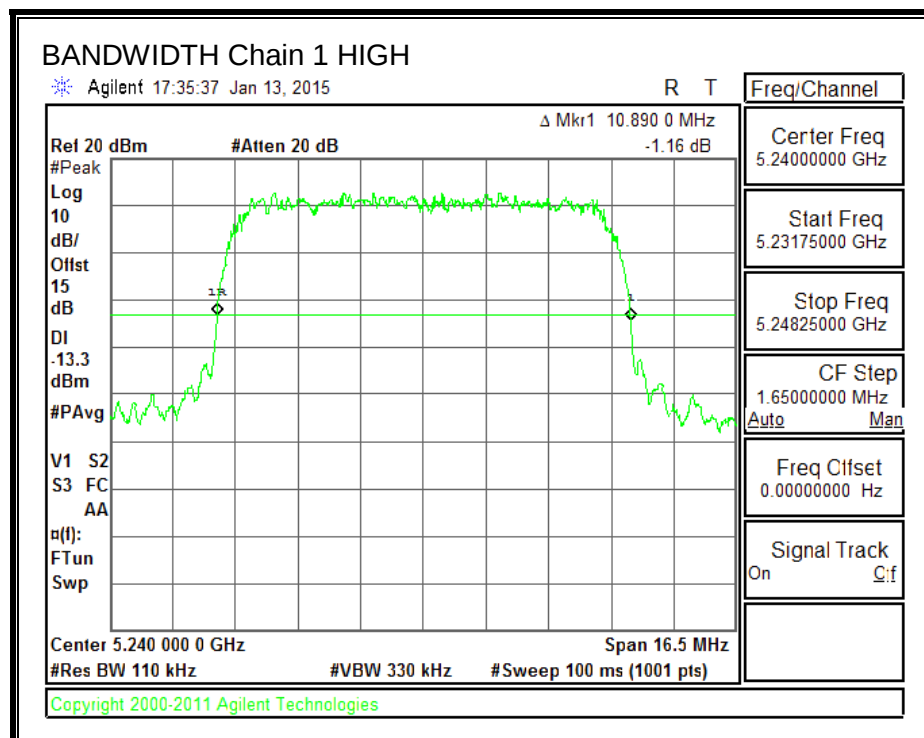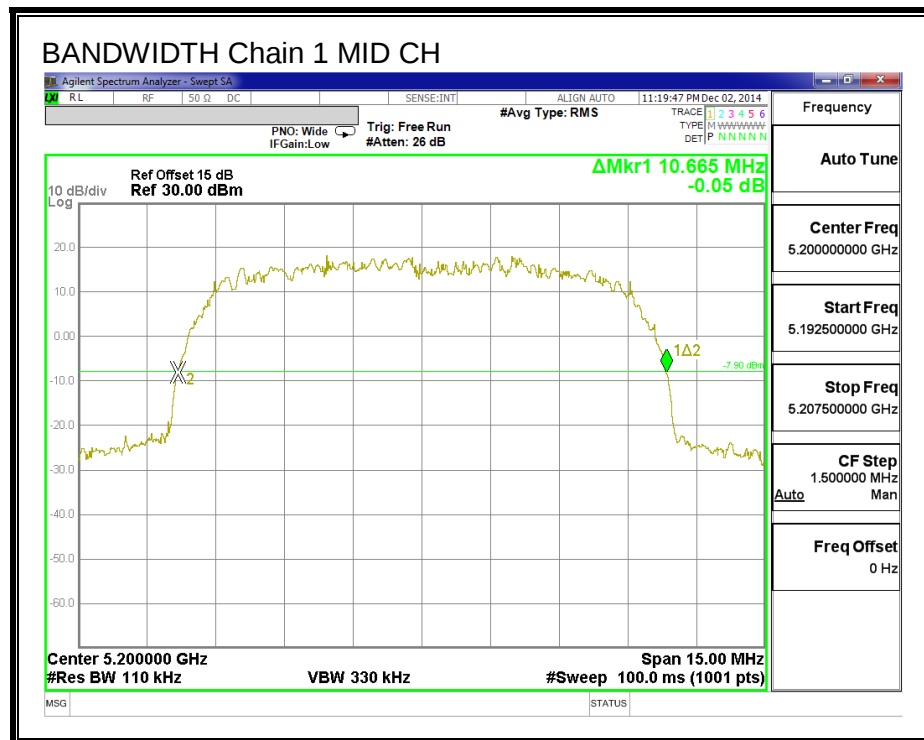

8.2.2. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
10.60	10.60	10.60

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5166	10.60	10.60	30.00	17.00
Mid	5200	10.60	10.60	30.00	17.00
High	5240	10.60	10.60	30.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5166	21.35	21.37	24.37	30.00	-5.63
Mid	5200	21.90	21.89	24.90	30.00	-5.10
High	5240	21.79	21.75	24.78	30.00	-5.22

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5166	13.41	13.57	16.50	17.00	-0.50
Mid	5200	13.68	13.53	16.62	17.00	-0.38
High	5240	13.81	13.84	16.84	17.00	-0.16



OUTPUT POWER AND PSD, Chain 0

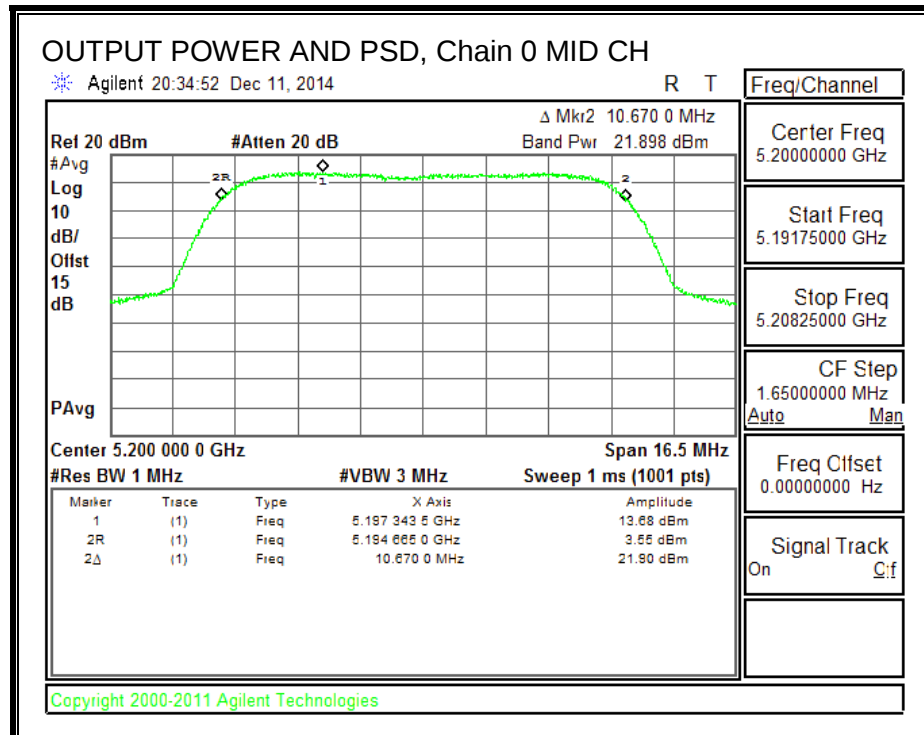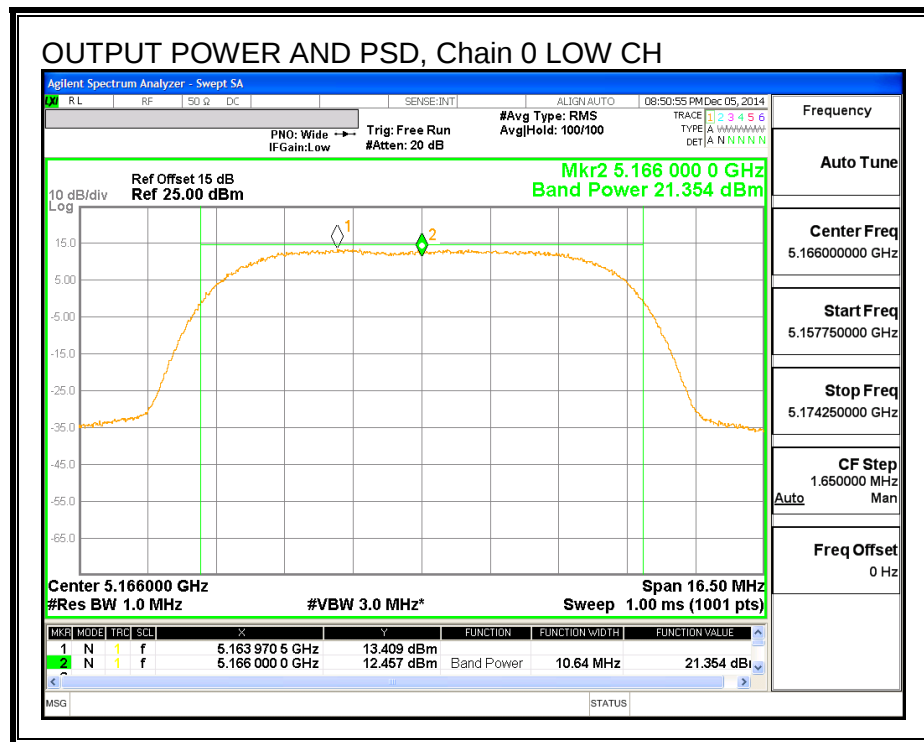

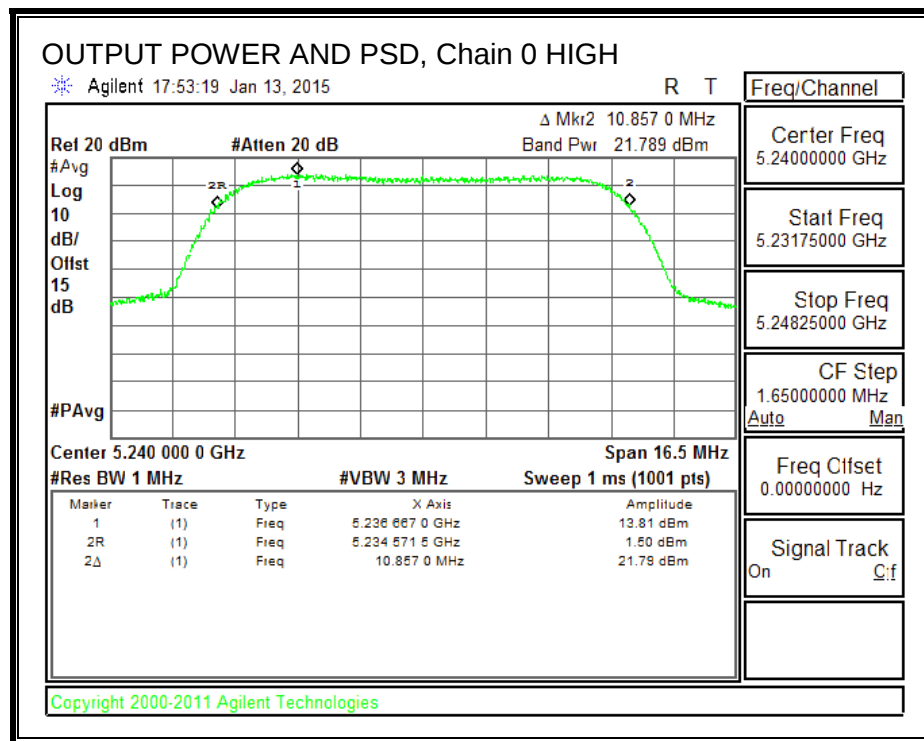

OUTPUT POWER AND PSD, Chain 1

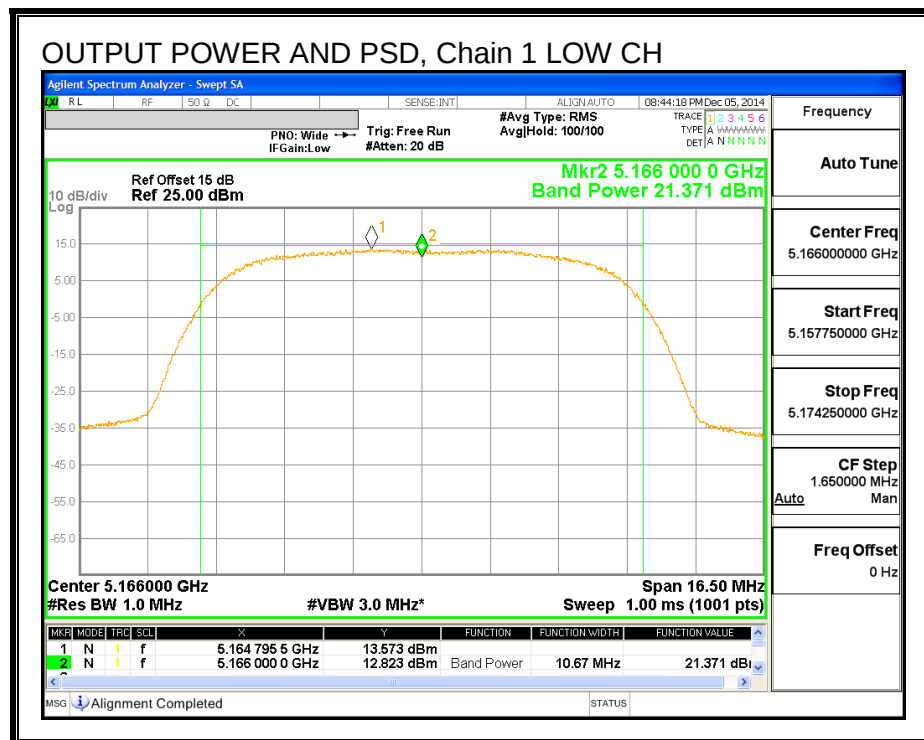

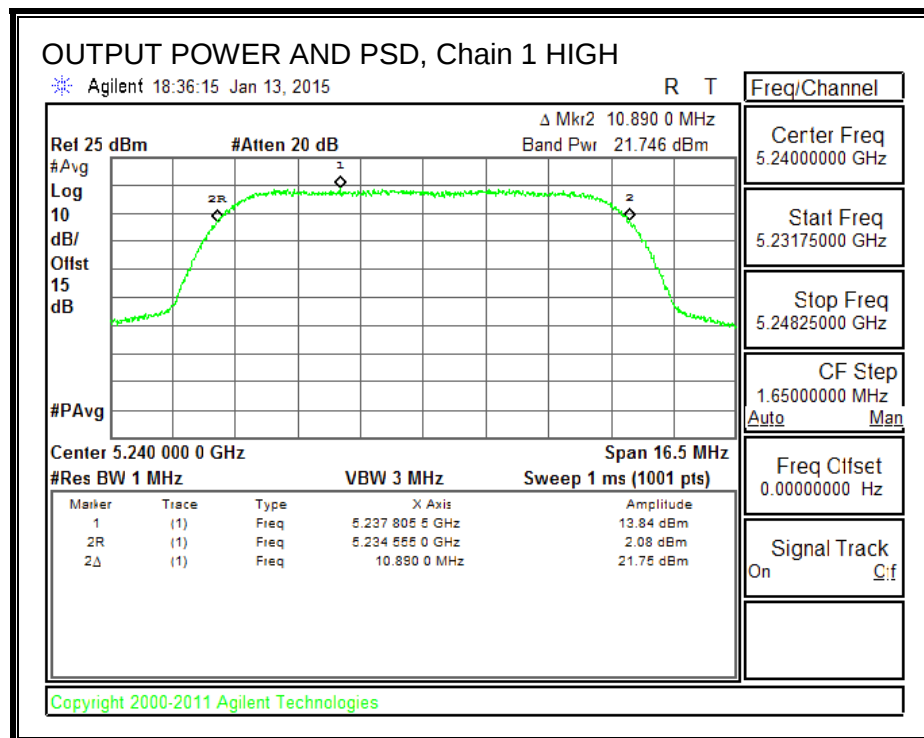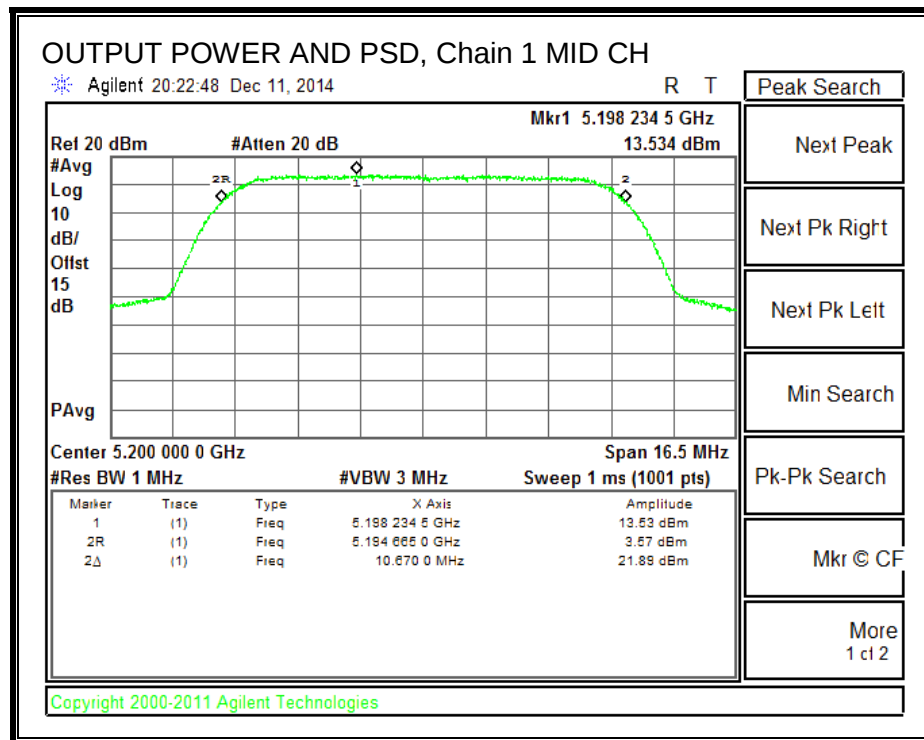

8.2.3. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.205 and §15.209

PART 15, SUBPART E

Radiated LIMIT:



(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v01, Section II, G5

RESULTS

LOW CHANNEL BANDEDGE, Chain 0

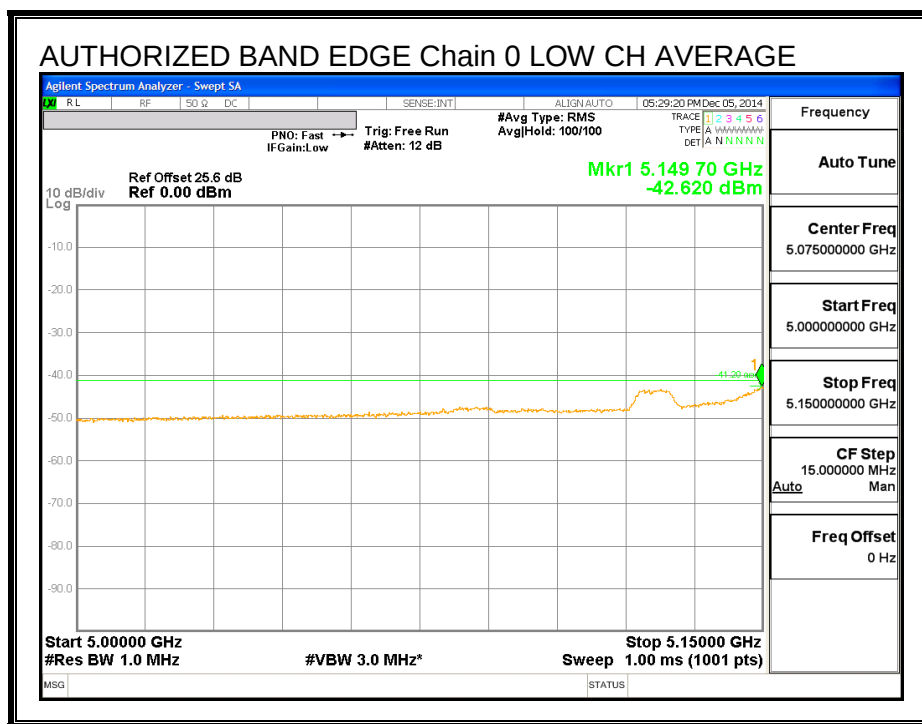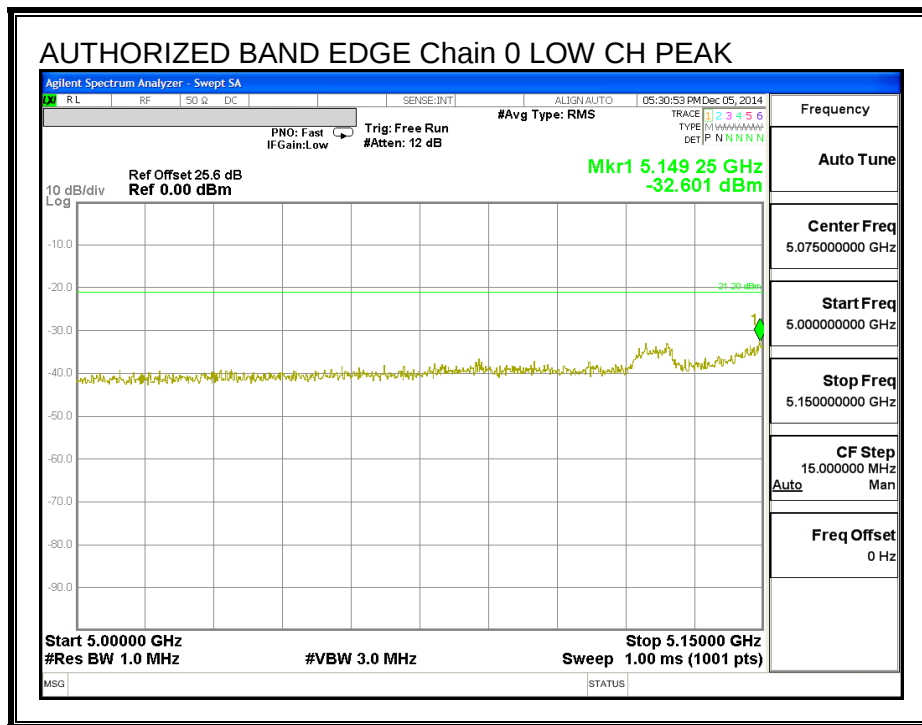

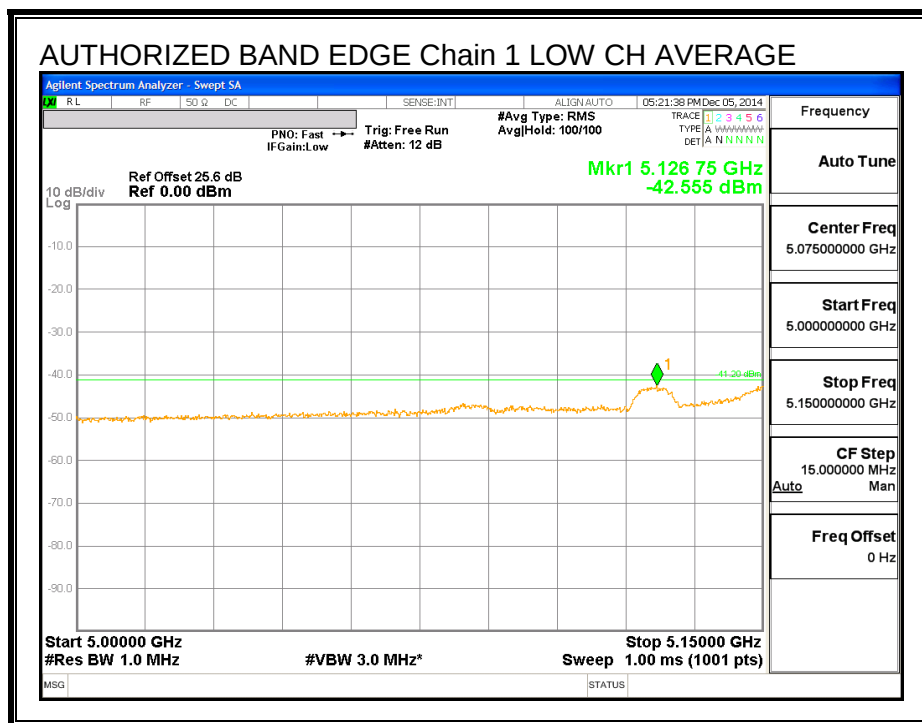

8.3. 20MHz 2Tx MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low 1	5181	21.22	21.12
Low 2	5191	21.22	21.15
Mid	5200	21.22	21.19
High	5235	21.65	21.62



26 dB BANDWIDTH, Chain 0

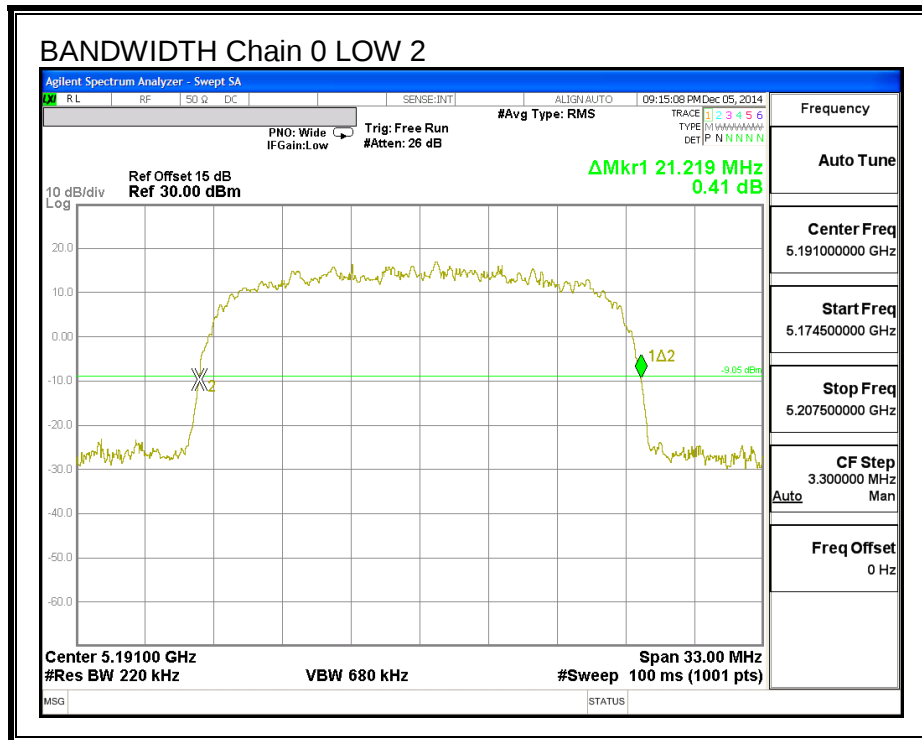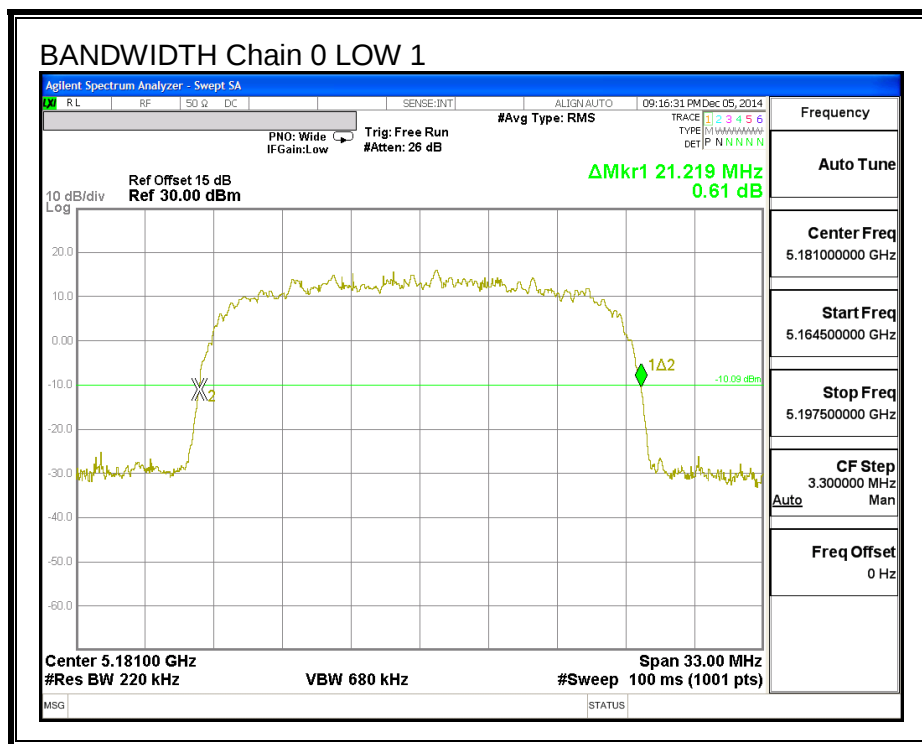

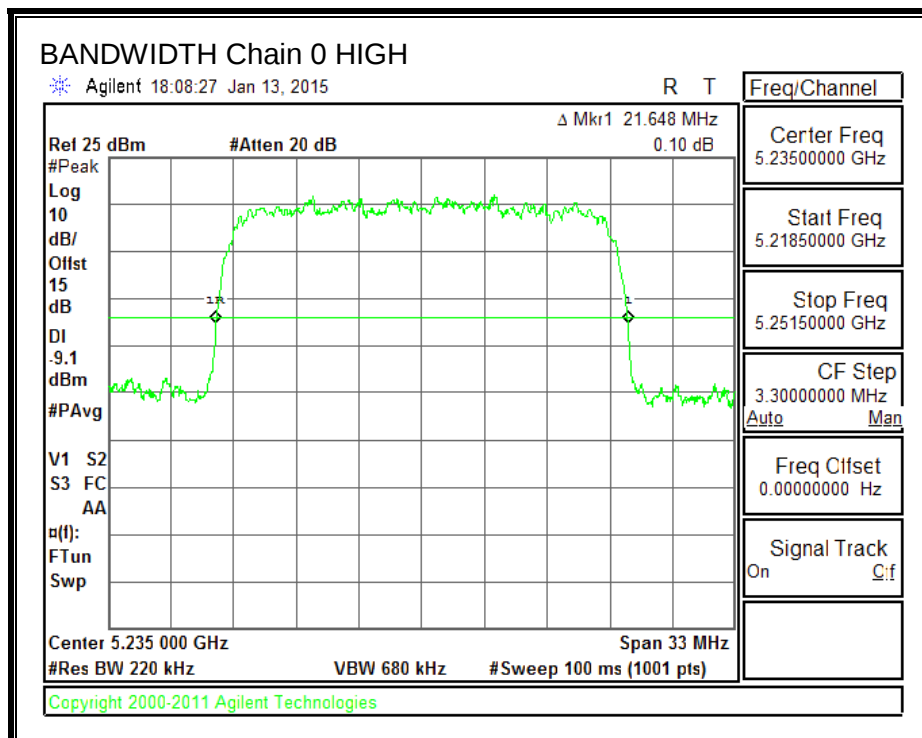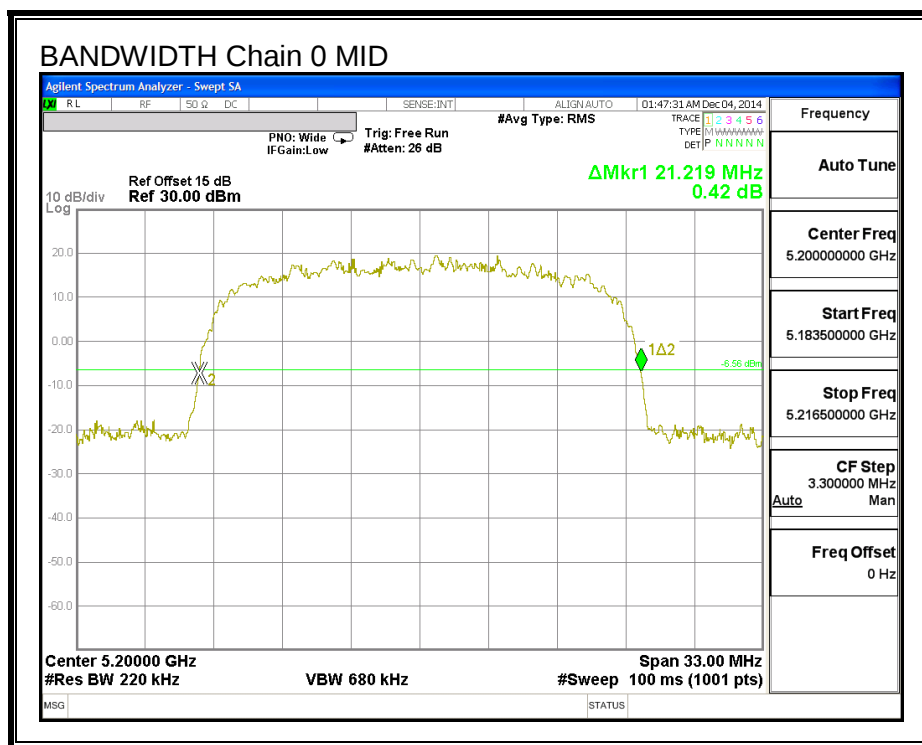

26 dB BANDWIDTH, Chain 1

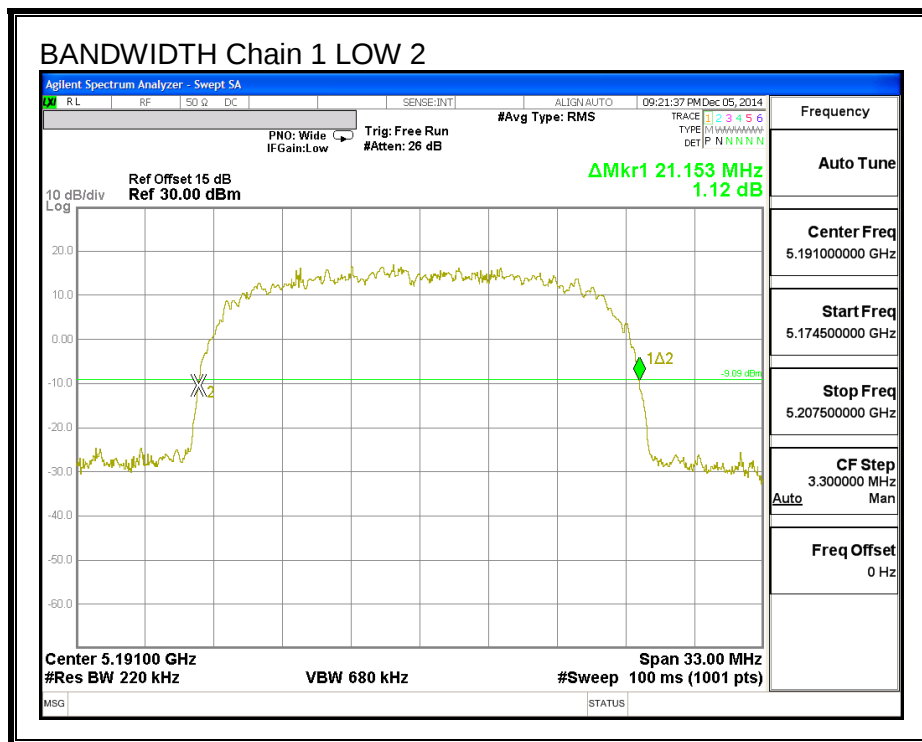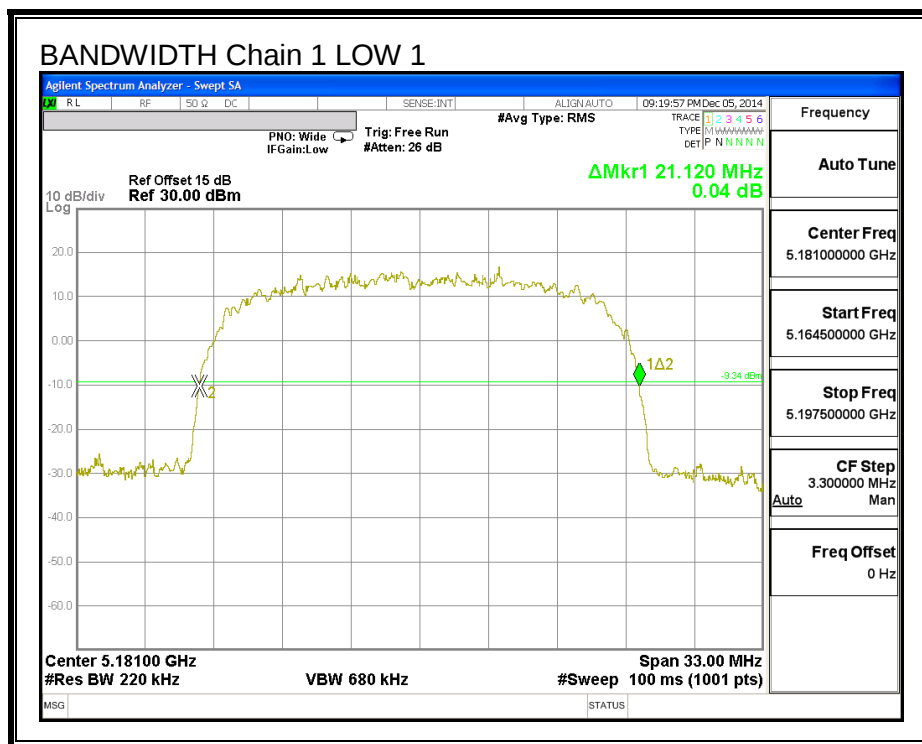

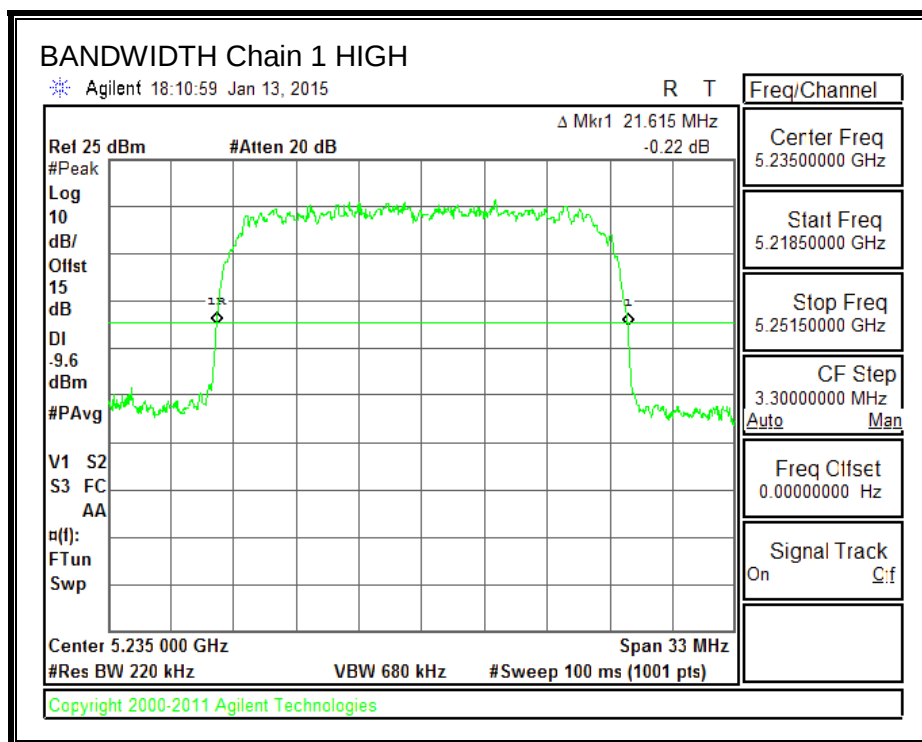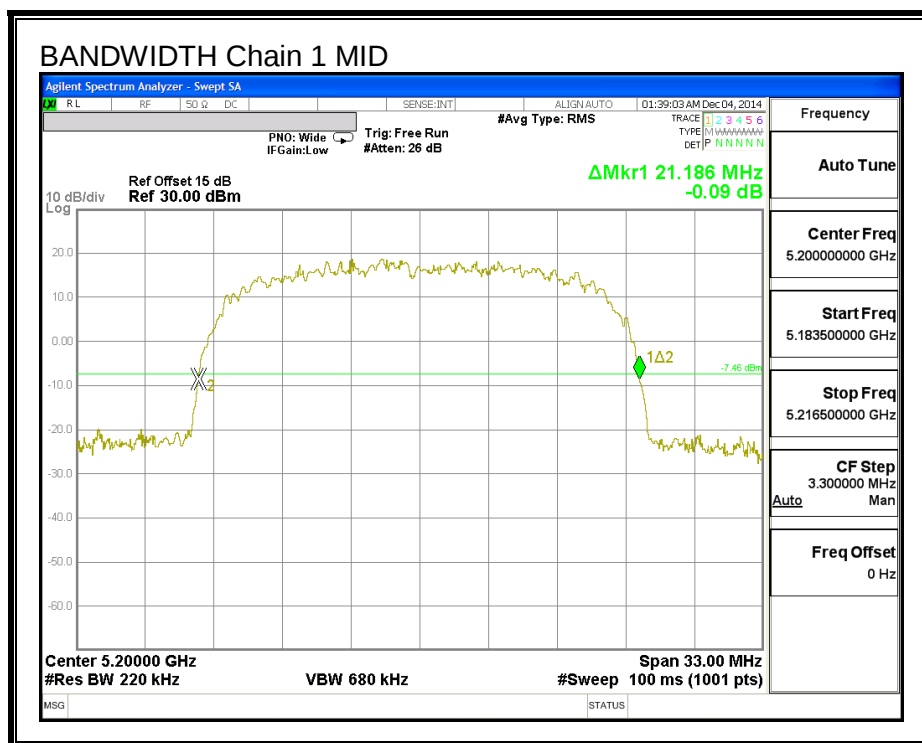

8.3.2. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
10.60	10.60	10.60

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low 1	5181	10.60	10.60	30.00	17.00
Low 2	5191	10.60	10.60	30.00	17.00
Mid	5200	10.60	10.60	30.00	17.00
High	5235	10.60	10.60	30.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low 1	5181	23.57	23.54	26.56	30.00	-3.44
Low 2	5191	24.68	24.68	27.69	30.00	-2.31
Mid	5200	24.58	24.59	27.60	30.00	-2.40
High	5235	24.90	25.01	27.97	30.00	-2.03

PSD Results



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low 1	5181	12.95	12.94	15.95	17.00	-1.05
Low 2	5191	13.97	13.95	16.97	17.00	-0.03
Mid	5200	13.21	13.14	16.19	17.00	-0.81
High	5235	13.96	13.73	16.86	17.00	-0.14



OUTPUT POWER AND PSD, Chain 0

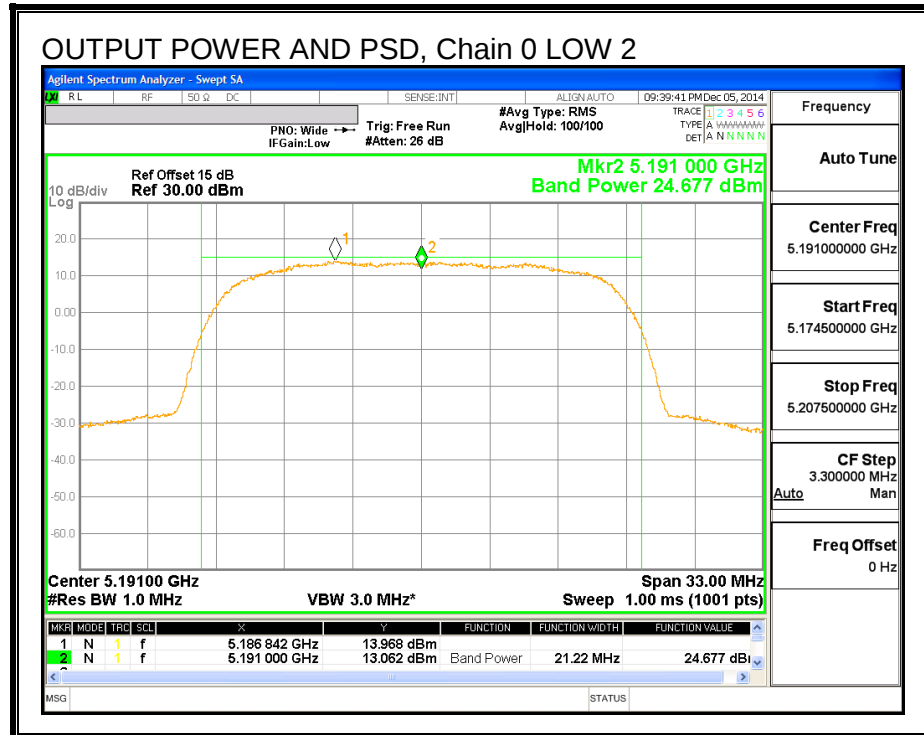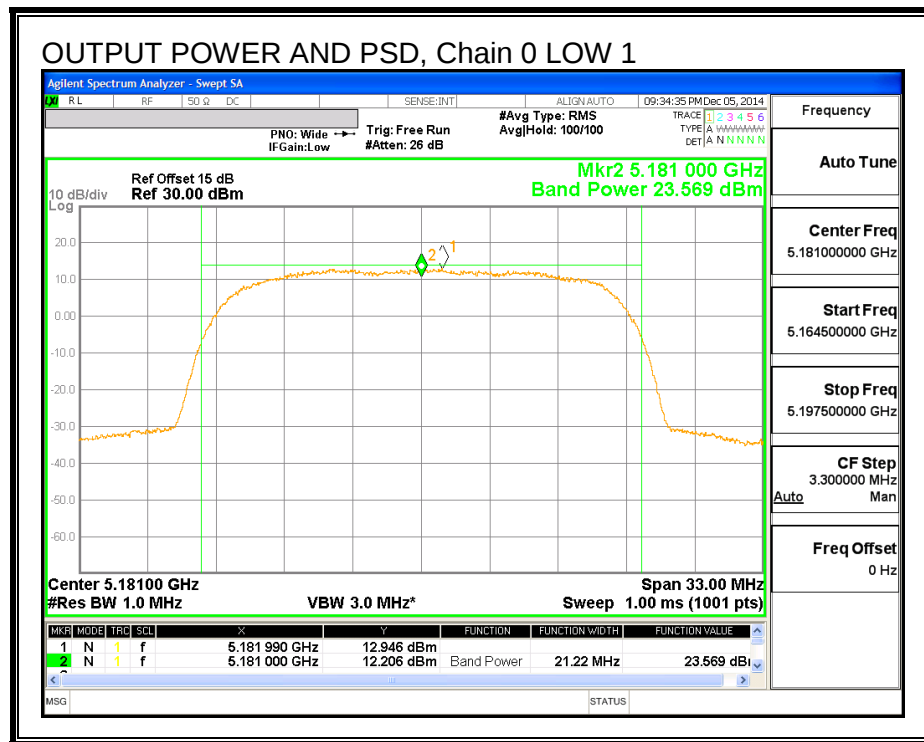

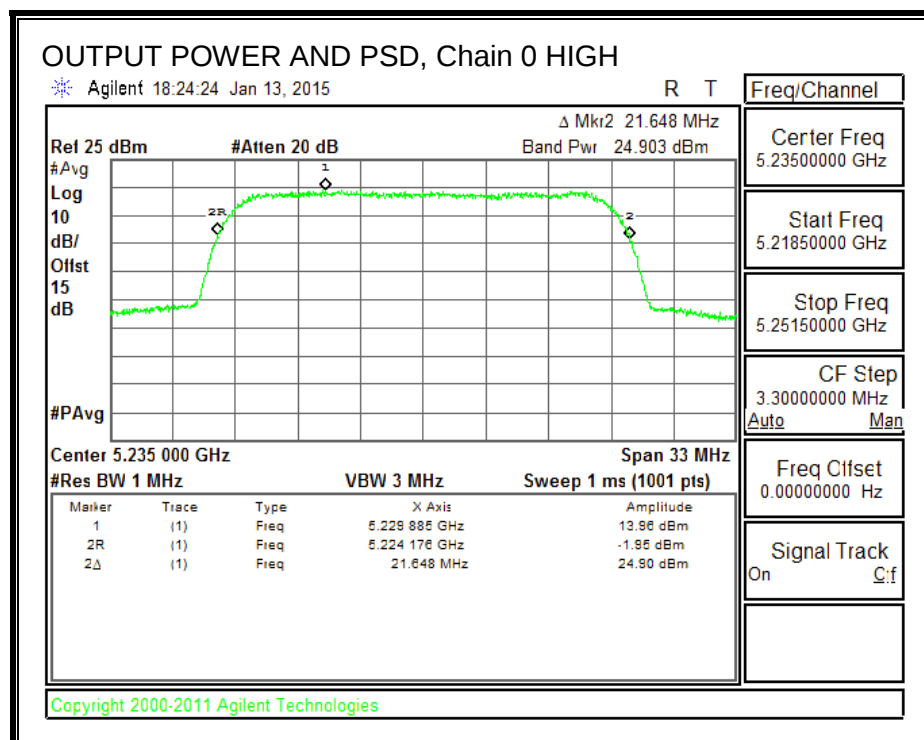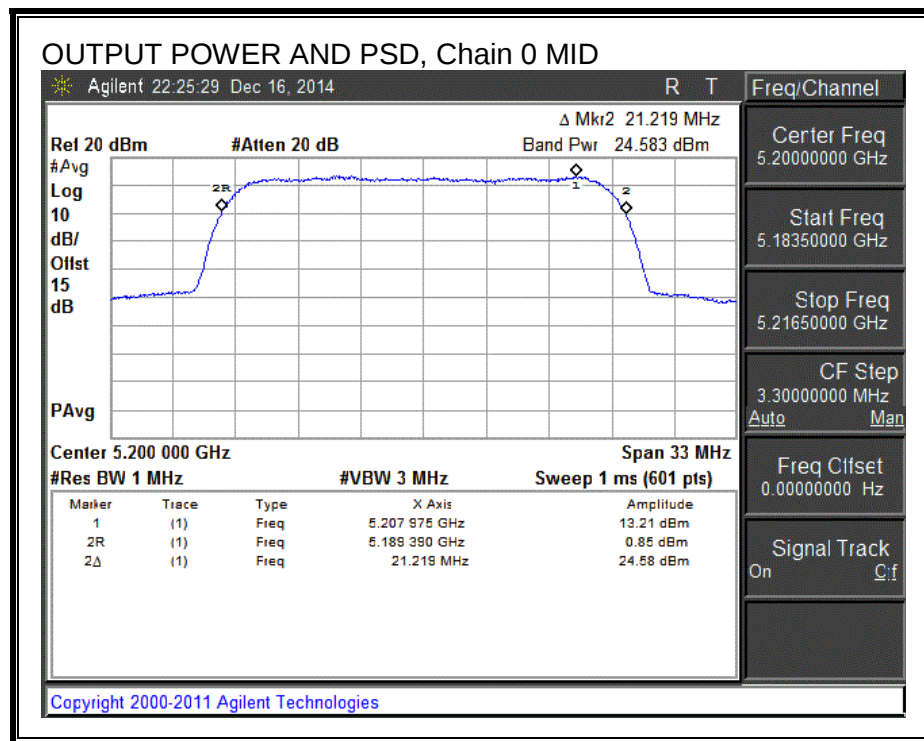

OUTPUT POWER AND PSD, Chain 1

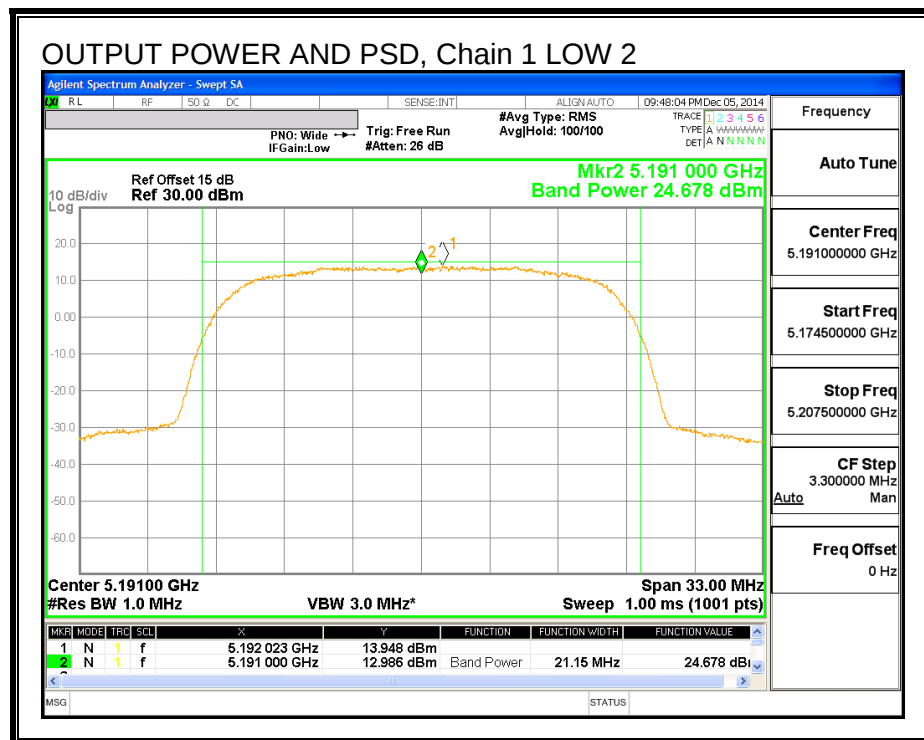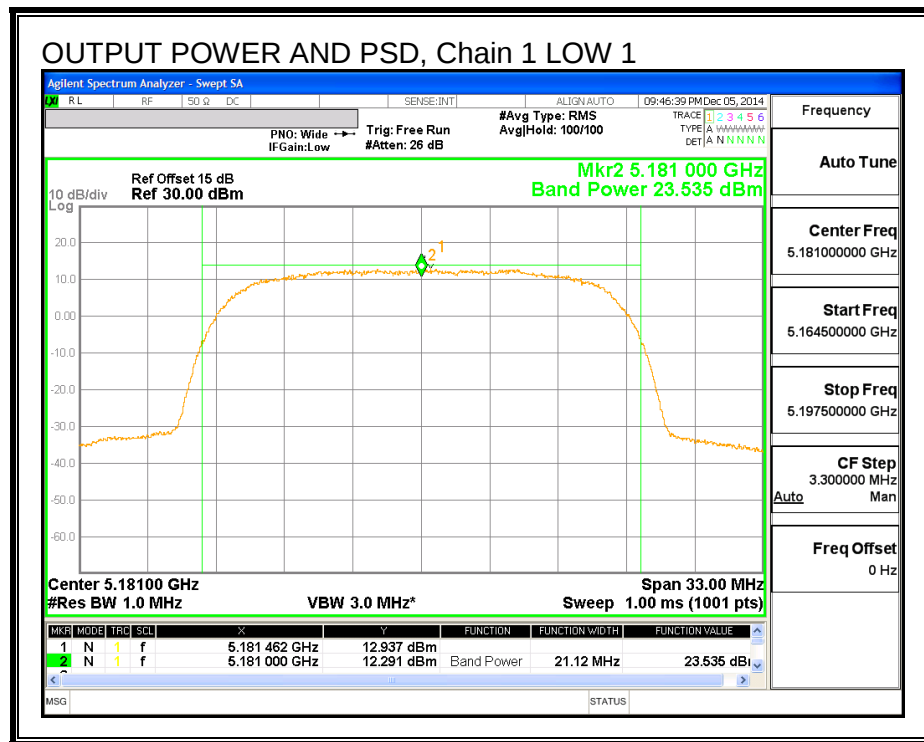

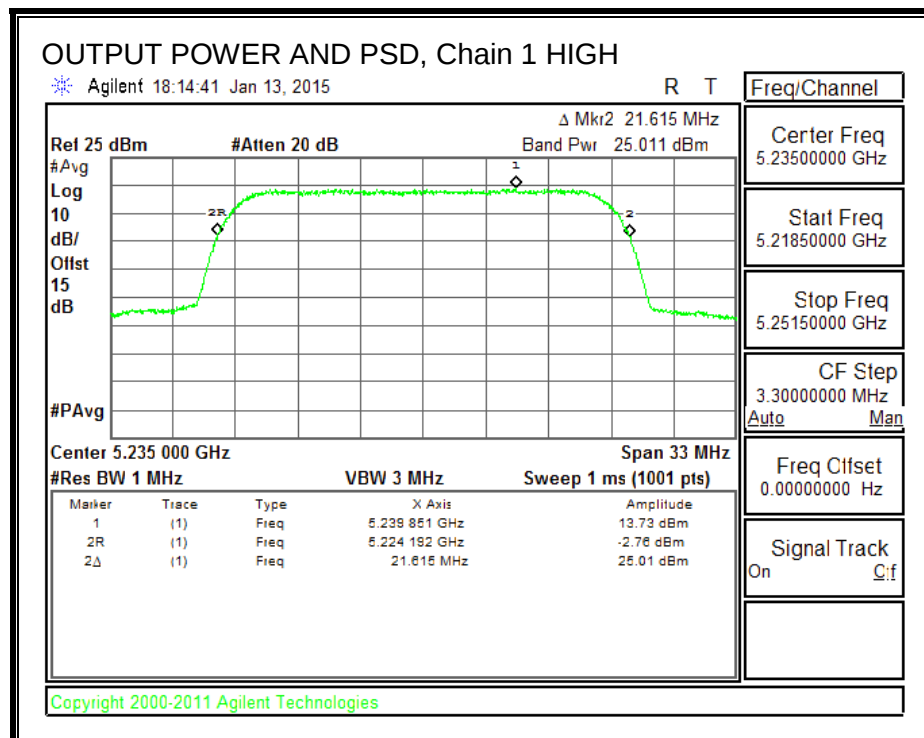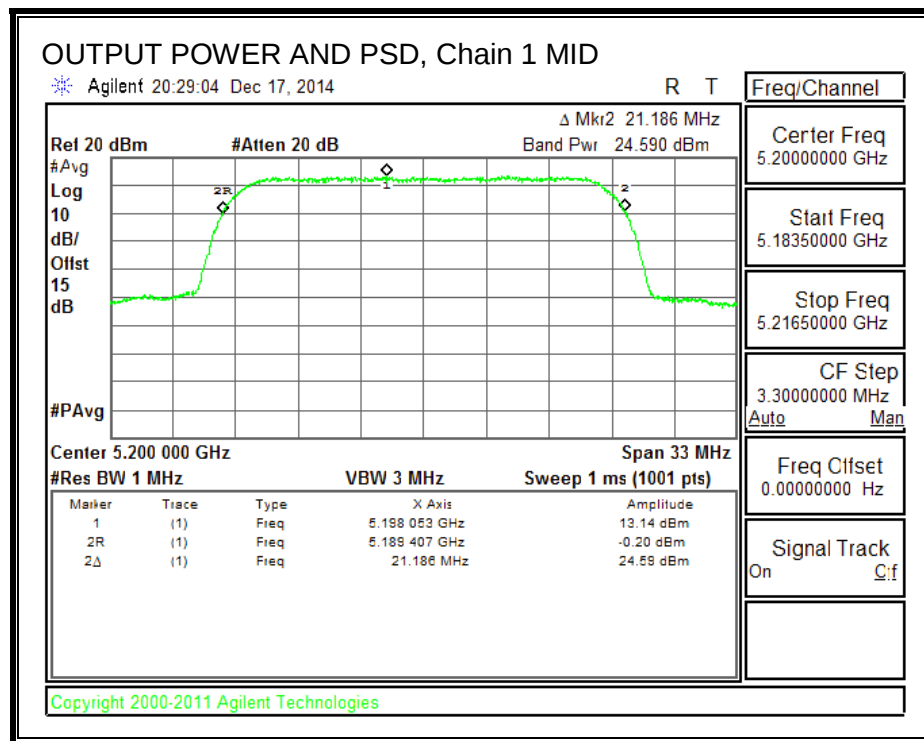

8.3.3. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.205 and §15.209

PART 15, SUBPART E

Radiated LIMIT:



(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.



Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v01, Section II, G5



RESULTS



LOW CHANNEL BANDEDGE, Chain 0

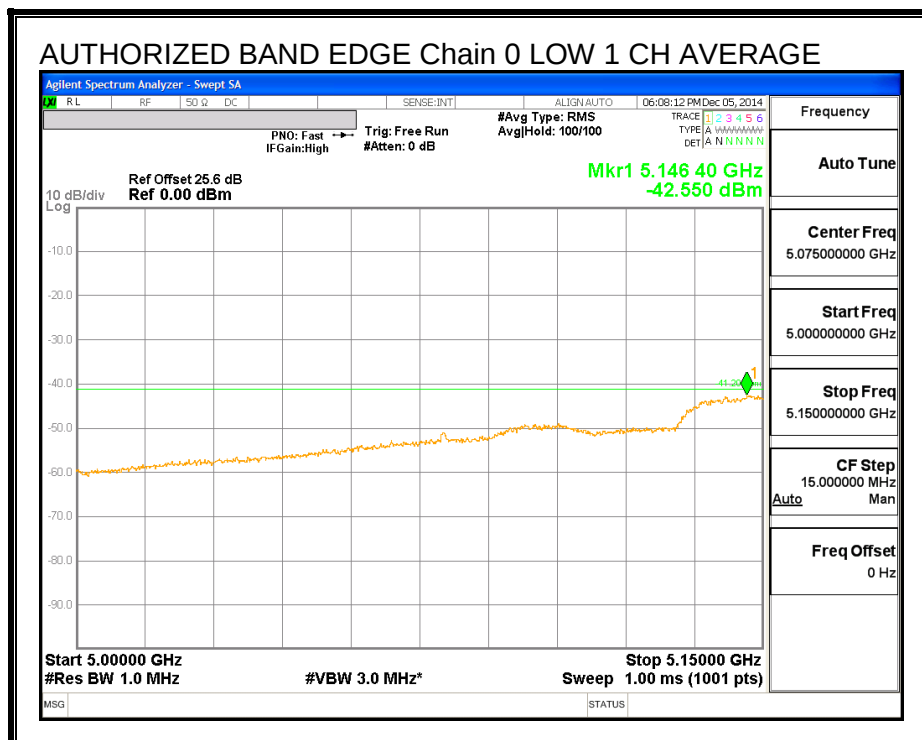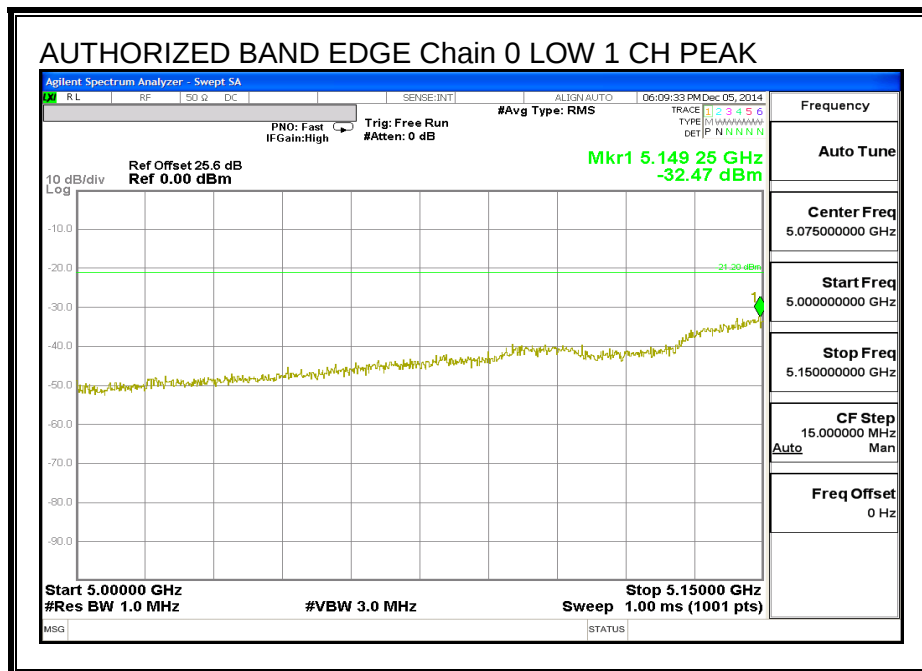

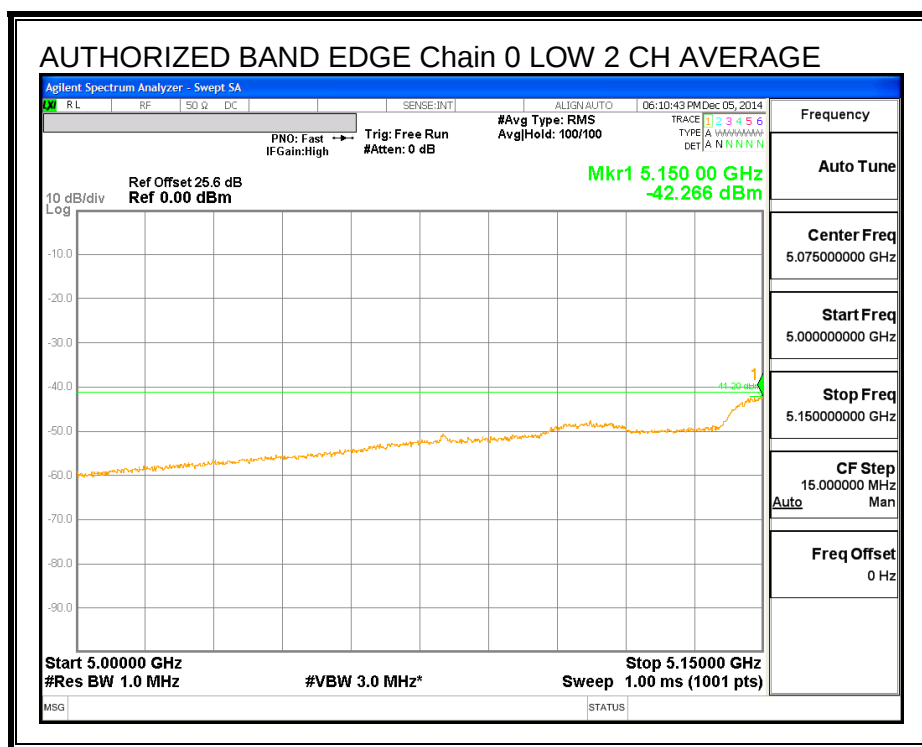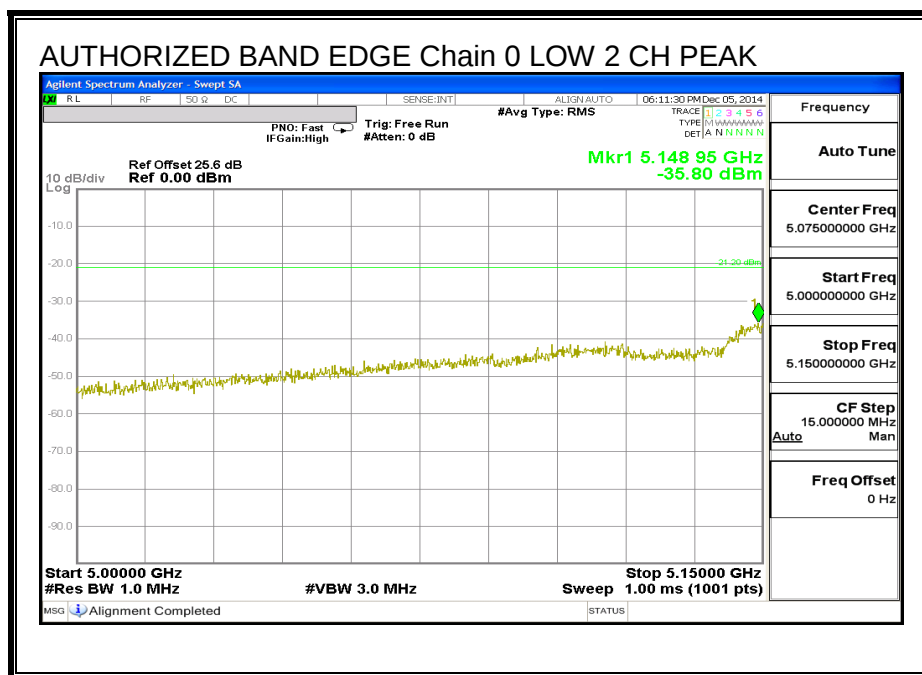

LOW CHANNEL BANDEDGE, Chain 1

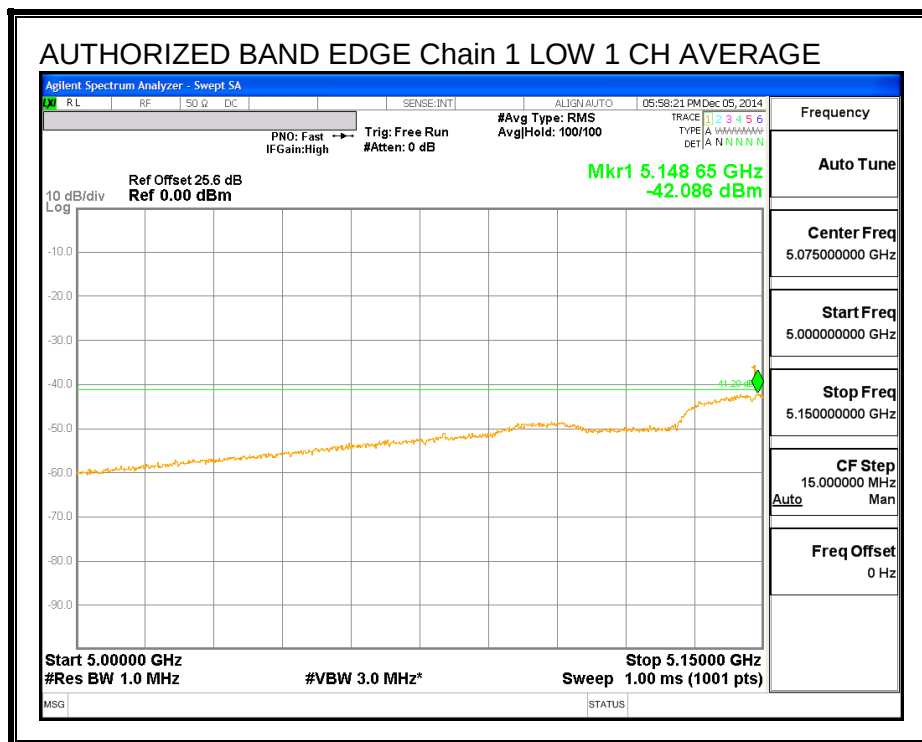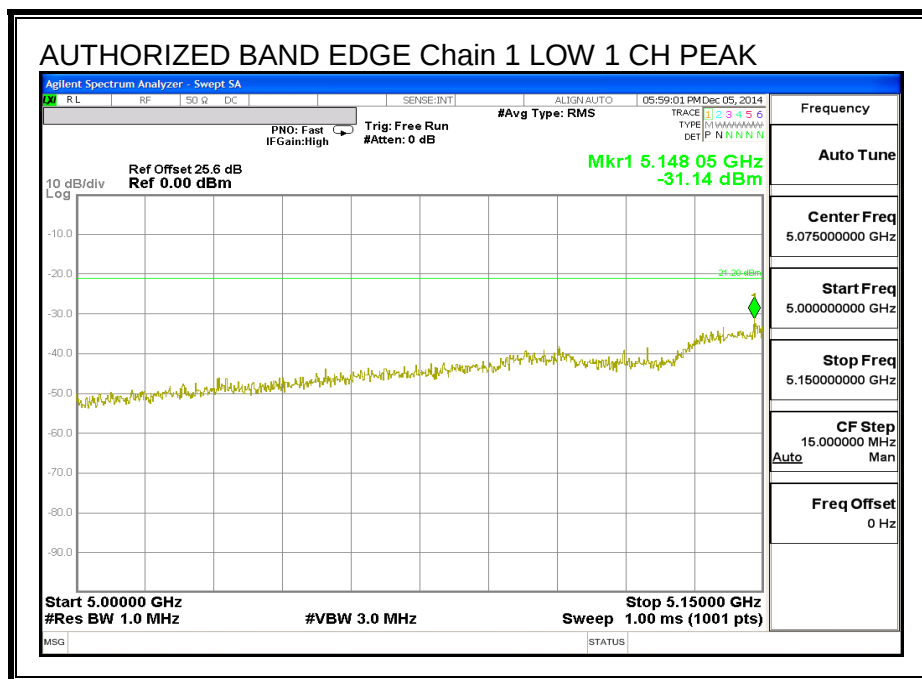

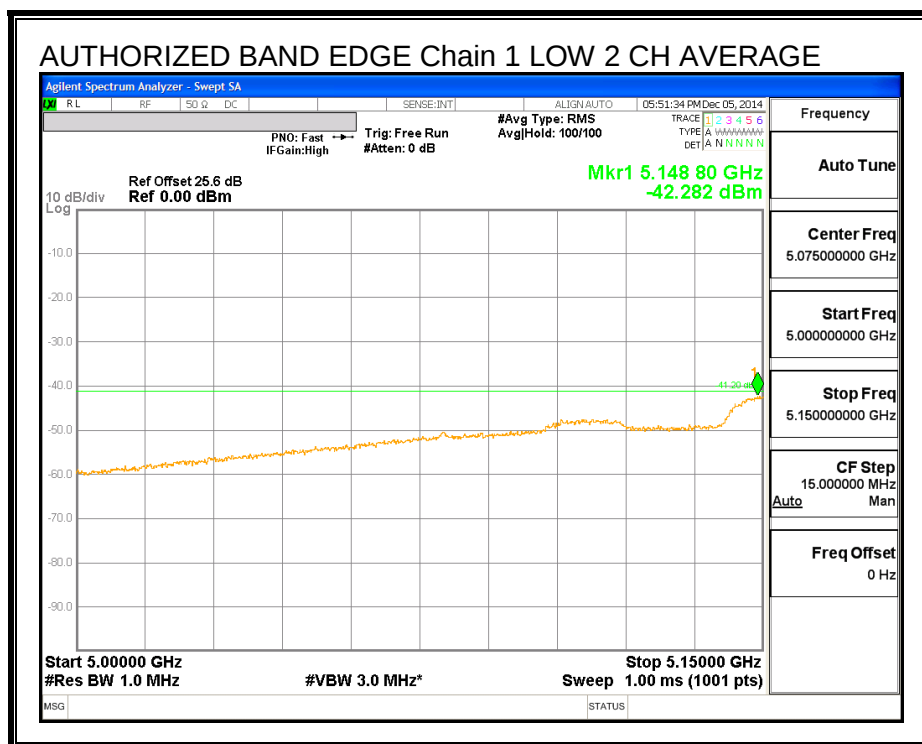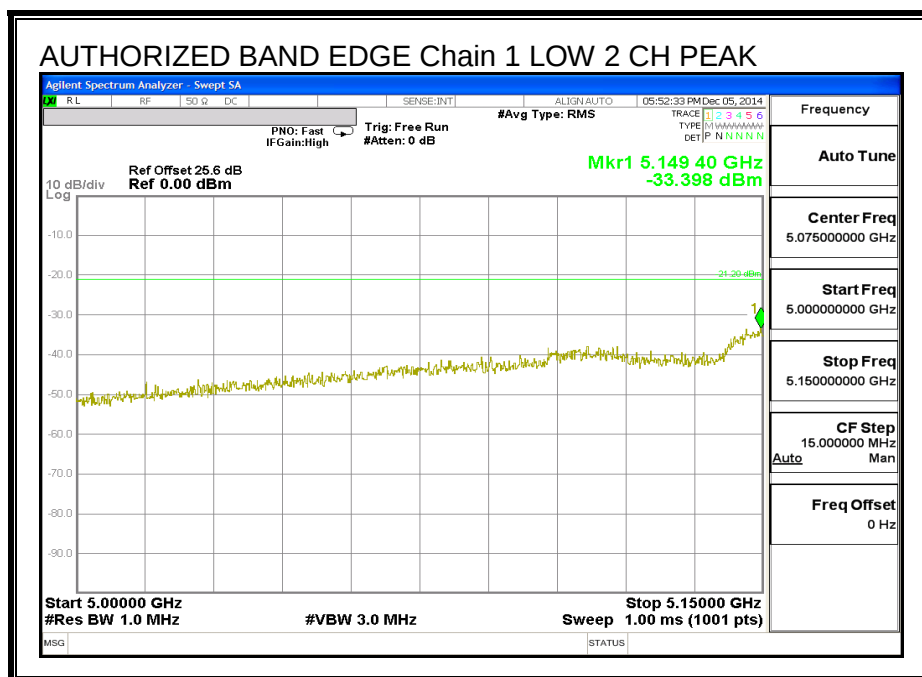

8.4. 40MHz 2TX MODE IN THE 5.2 GHz BAND

8.4.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low 1	5190	40.610	40.424
Low 2	5200	41.130	41.130
Low 3	5210	40.548	40.424
Mid	5220	40.548	40.424
High	5225	40.486	40.300


26 dB BANDWIDTH, Chain 0

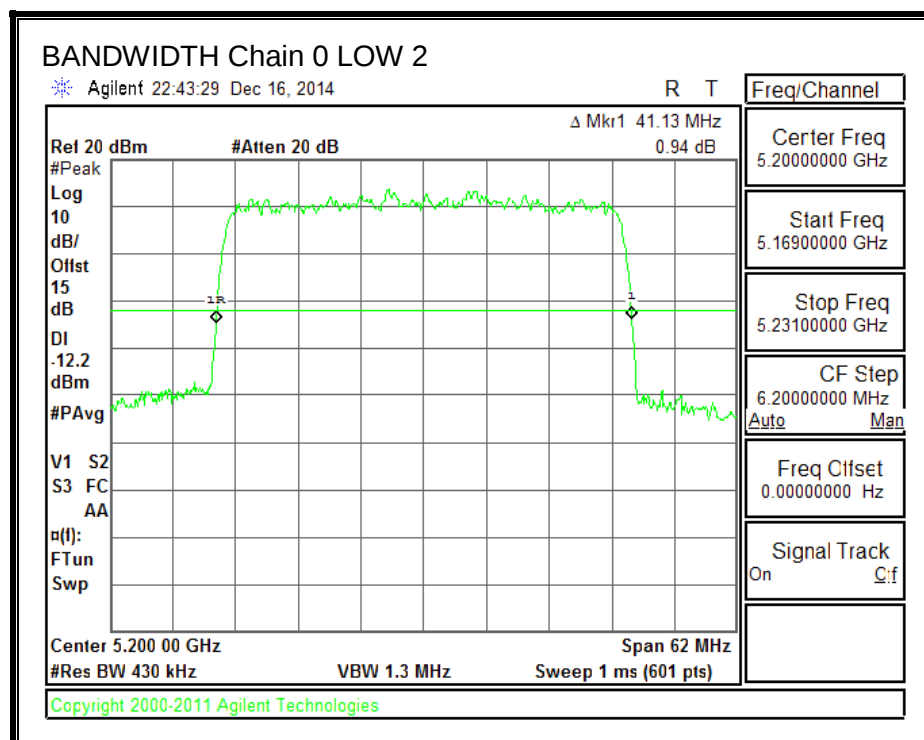
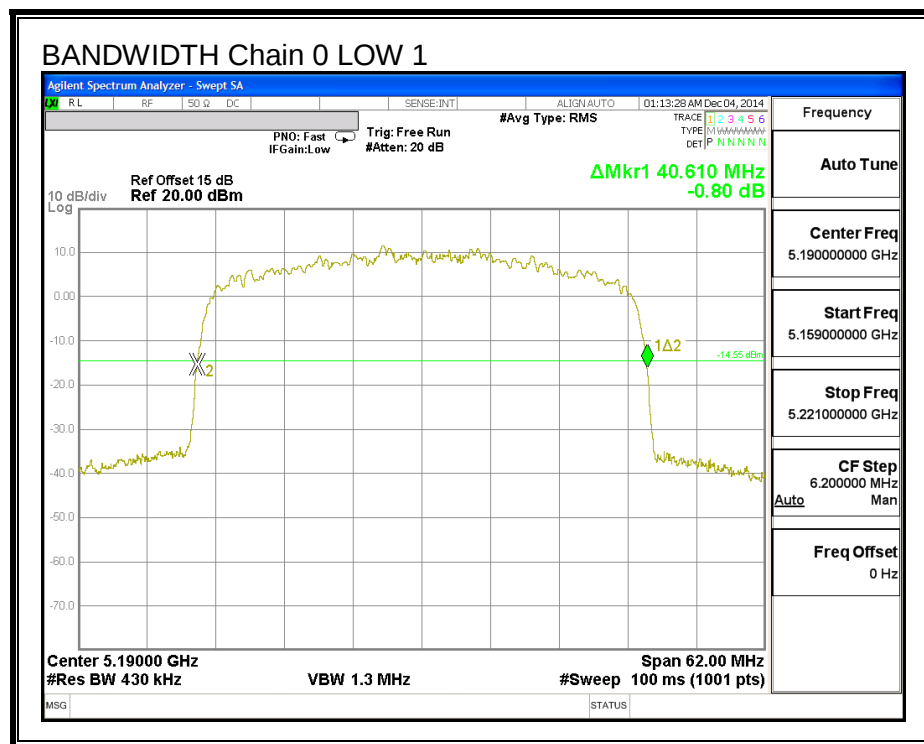


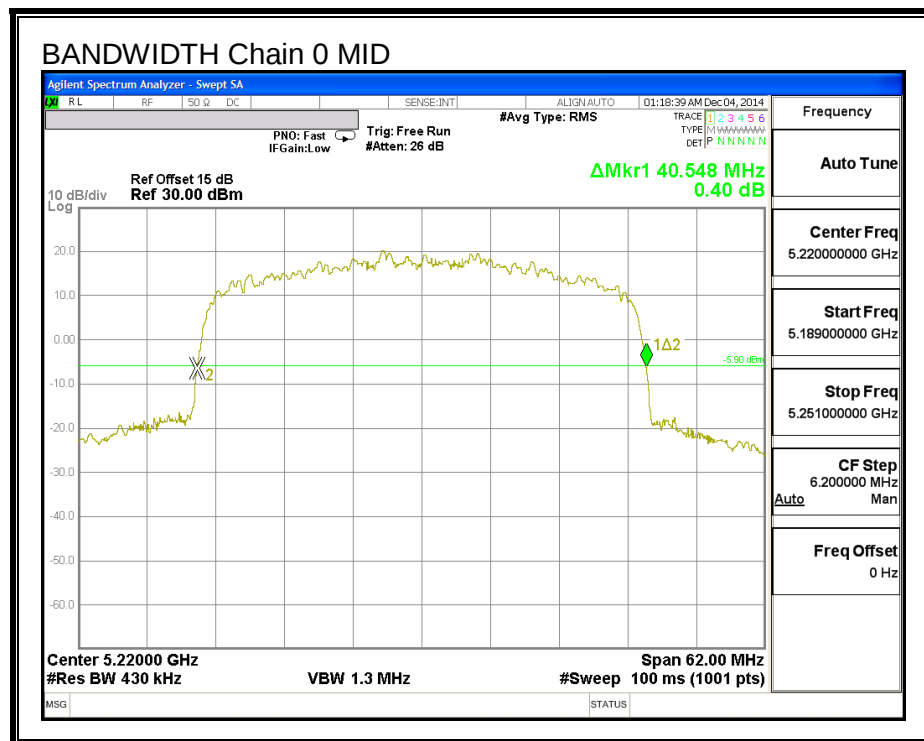
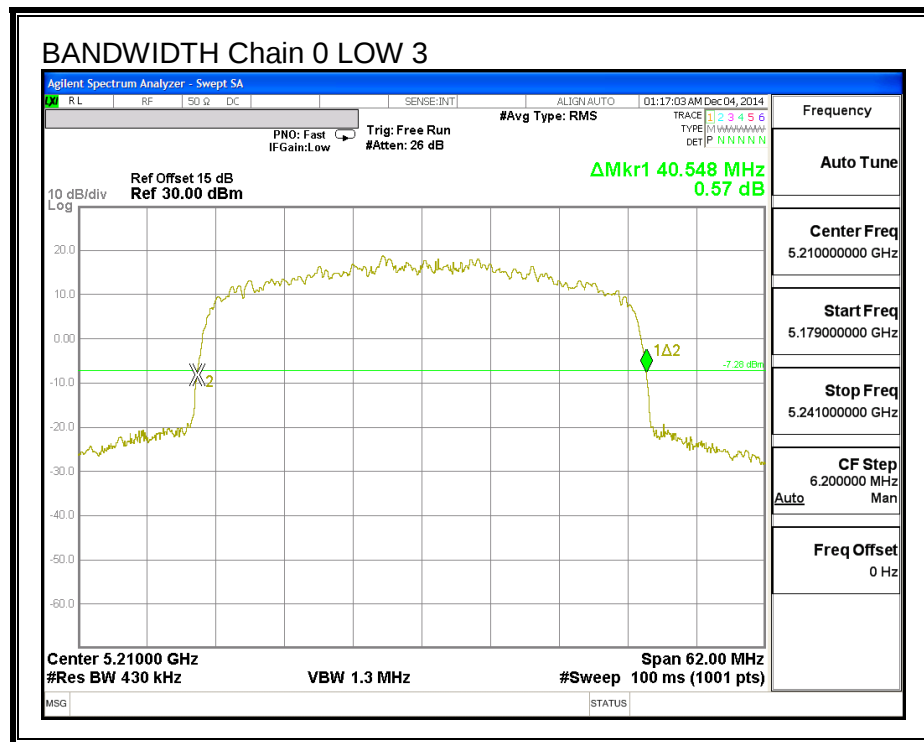


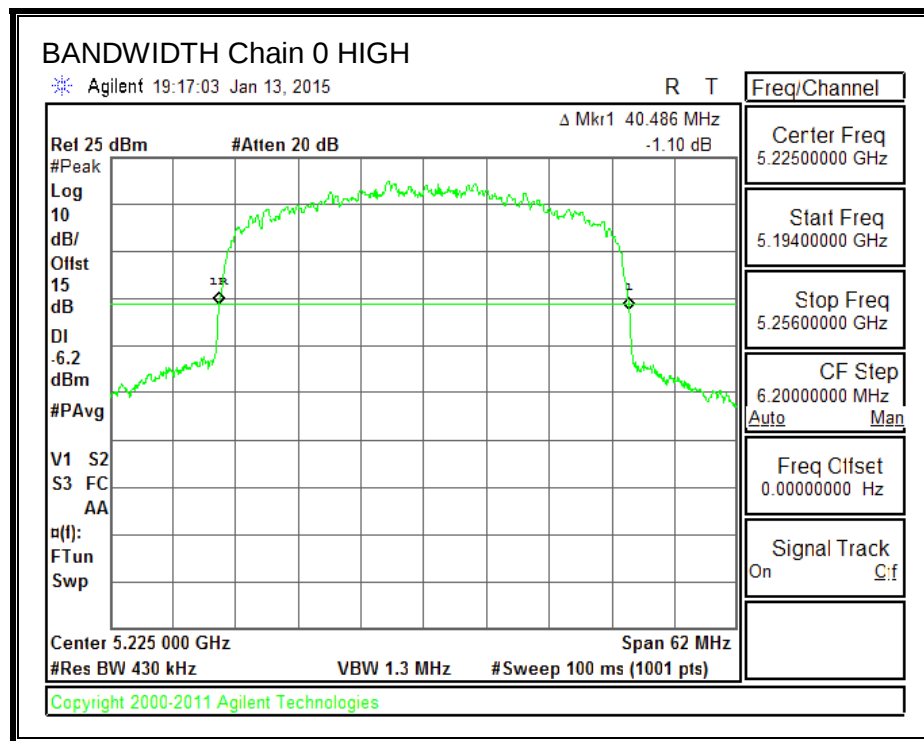

26 dB BANDWIDTH, Chain 1

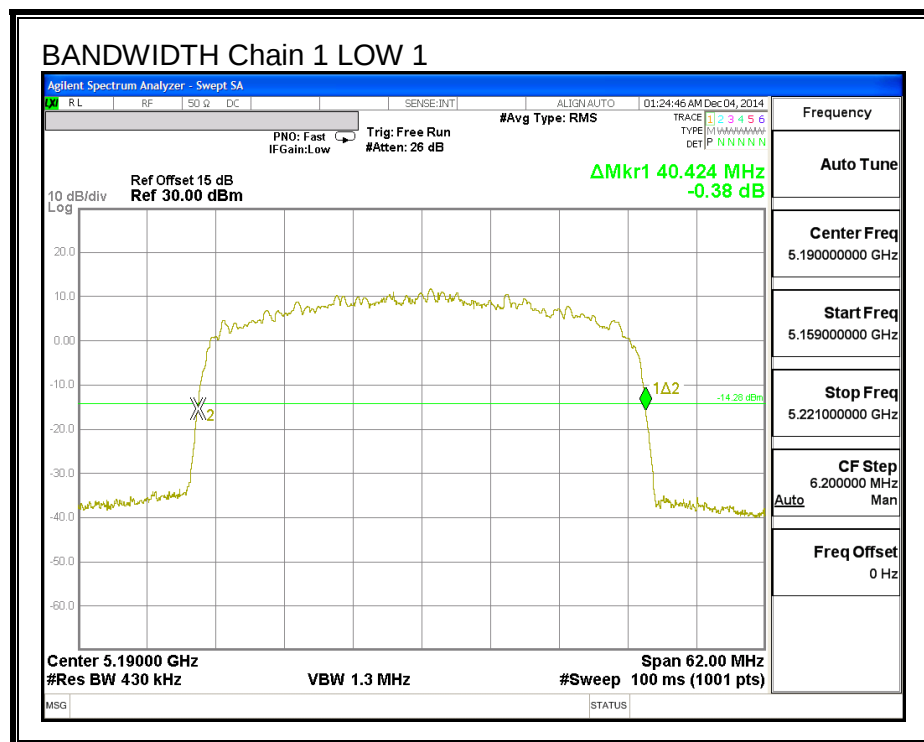

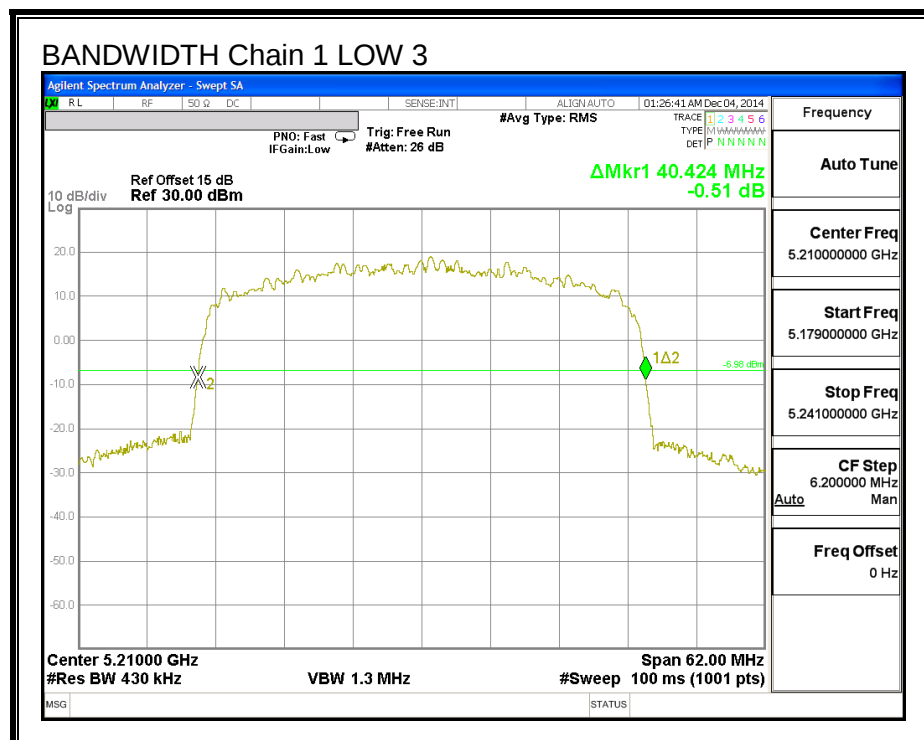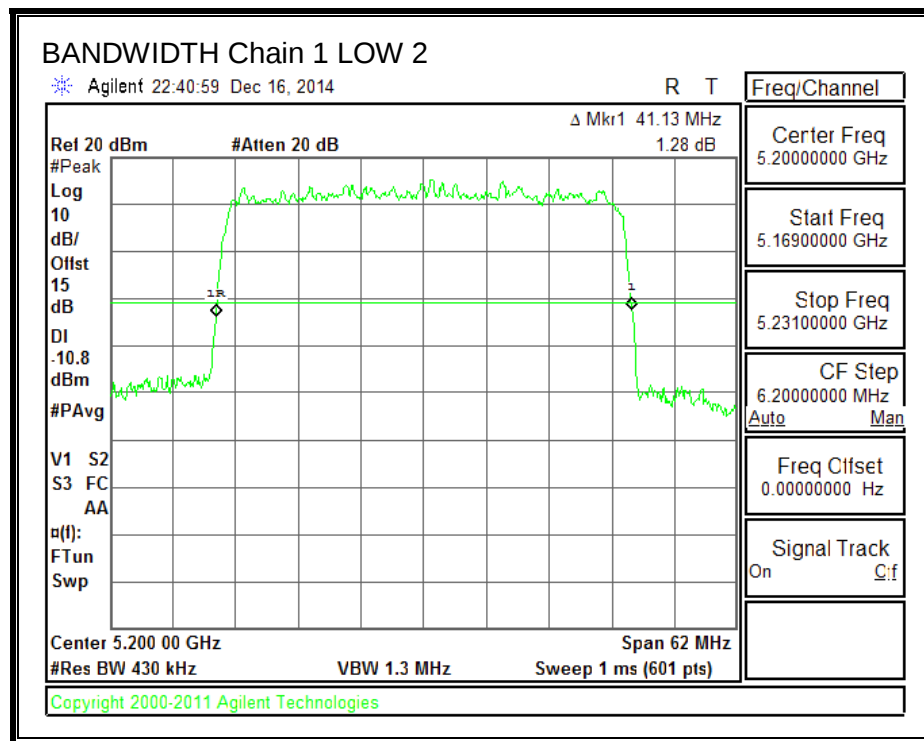

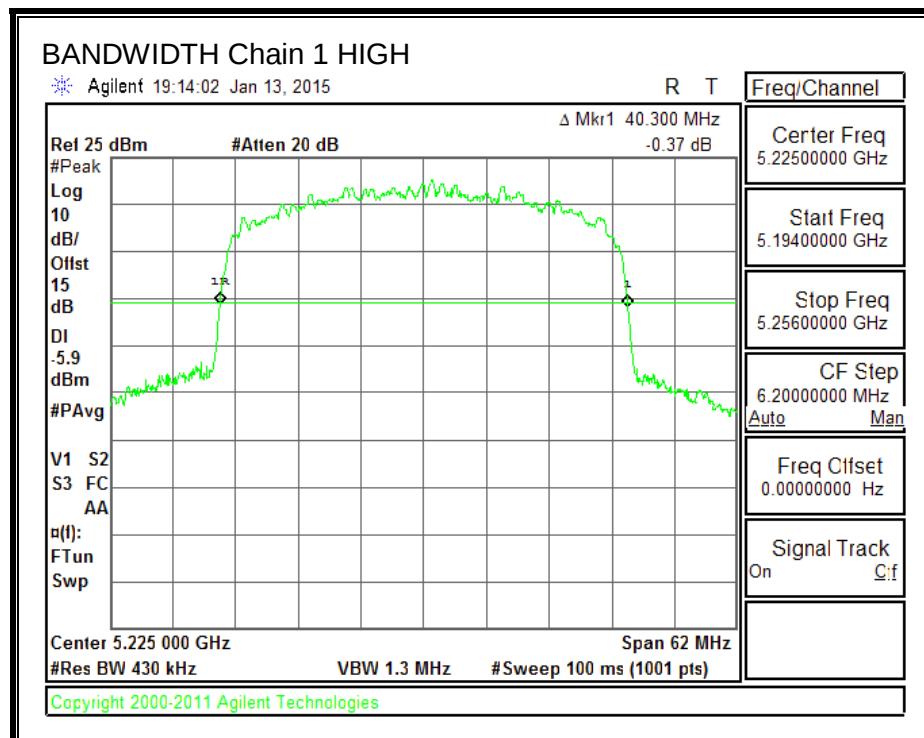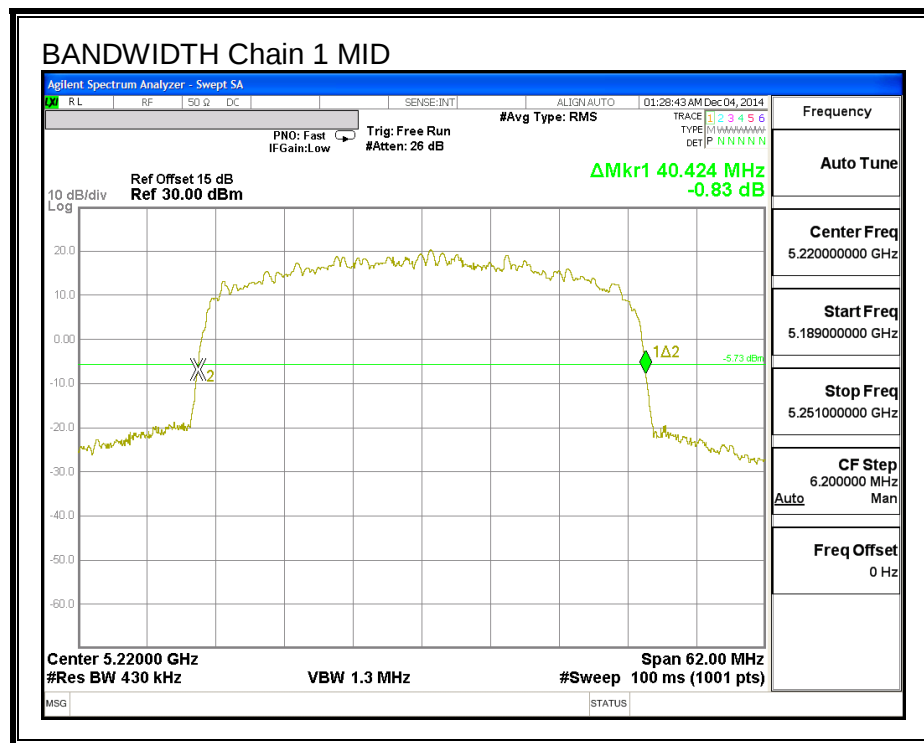

8.4.2. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
10.60	10.60	10.60

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low 1	5190	10.60	10.60	30.00	17.00
Low 2	5200	10.60	10.60	30.00	17.00
Low 3	5210	10.60	10.60	30.00	17.00
Mid	5220	10.60	10.60	30.00	17.00
High	5225	10.60	10.60	30.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low 1	5190	17.81	18.51	21.19	30.00	-8.81
Low 2	5200	21.76	22.97	25.41	30.00	-4.59
Low 3	5210	25.27	25.75	28.53	30.00	-1.47
Mid	5220	26.90	26.63	29.78	30.00	-0.22
High	5225	26.70	26.15	29.44	30.00	-0.56


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low 1	5190	4.72	5.53	8.16	17.00	-8.84
Low 2	5200	7.61	8.69	11.19	17.00	-5.81
Low 3	5210	12.10	12.76	15.45	17.00	-1.55
Mid	5220	13.65	13.78	16.73	17.00	-0.27
High	5225	13.89	13.71	16.81	17.00	-0.19


OUTPUT POWER AND PSD, Chain 0

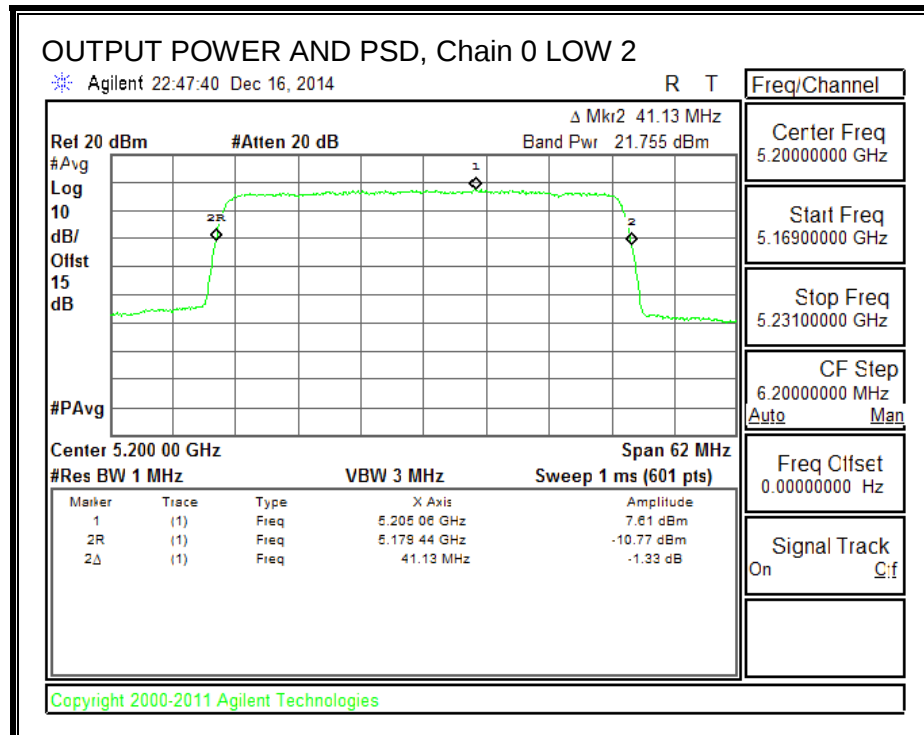
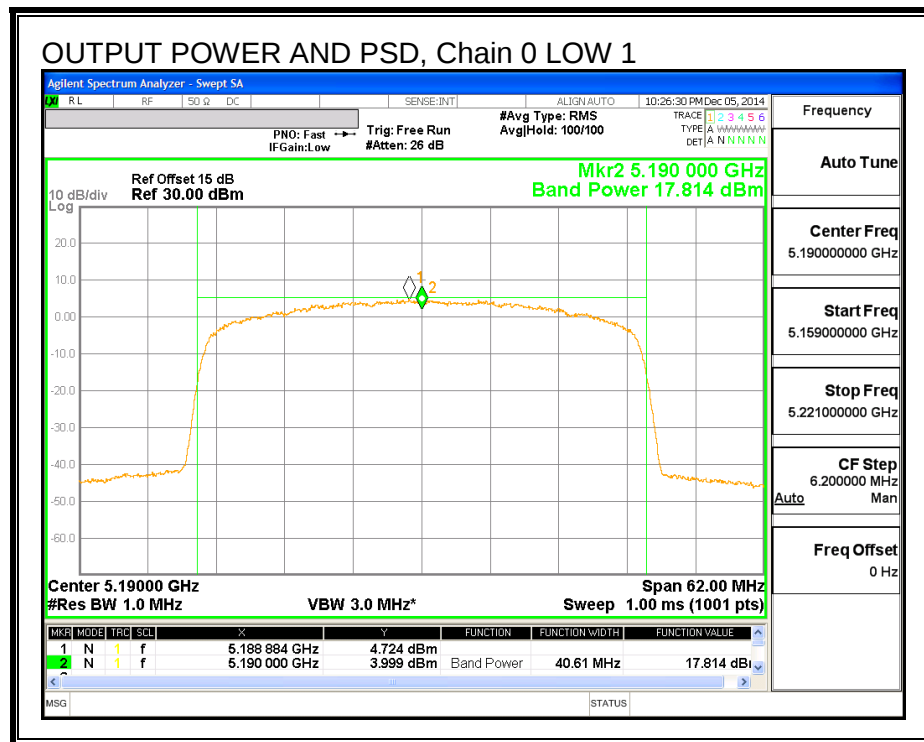


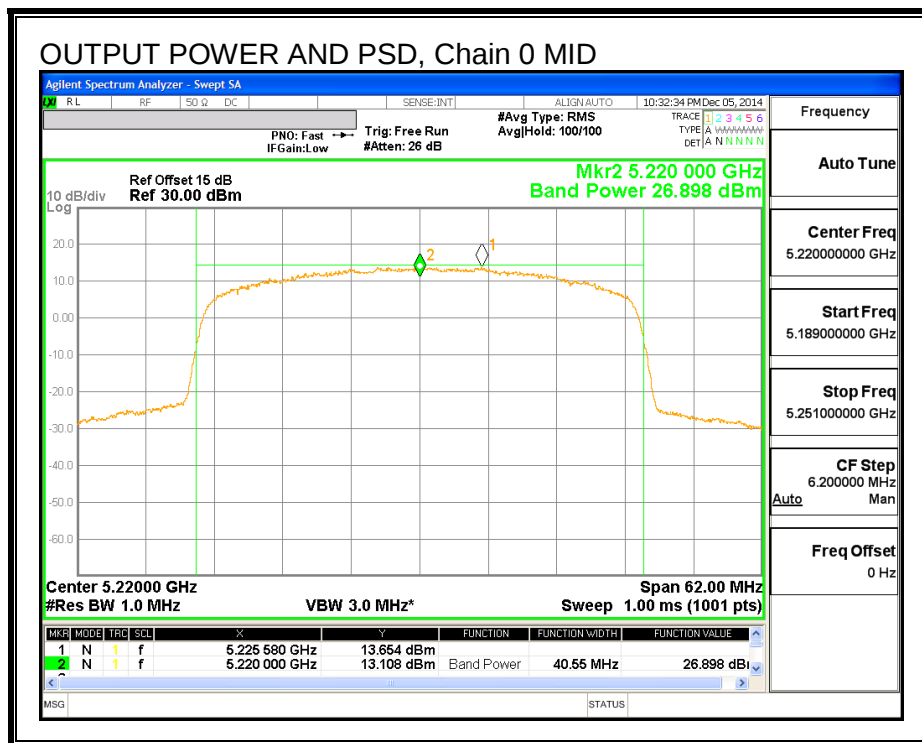
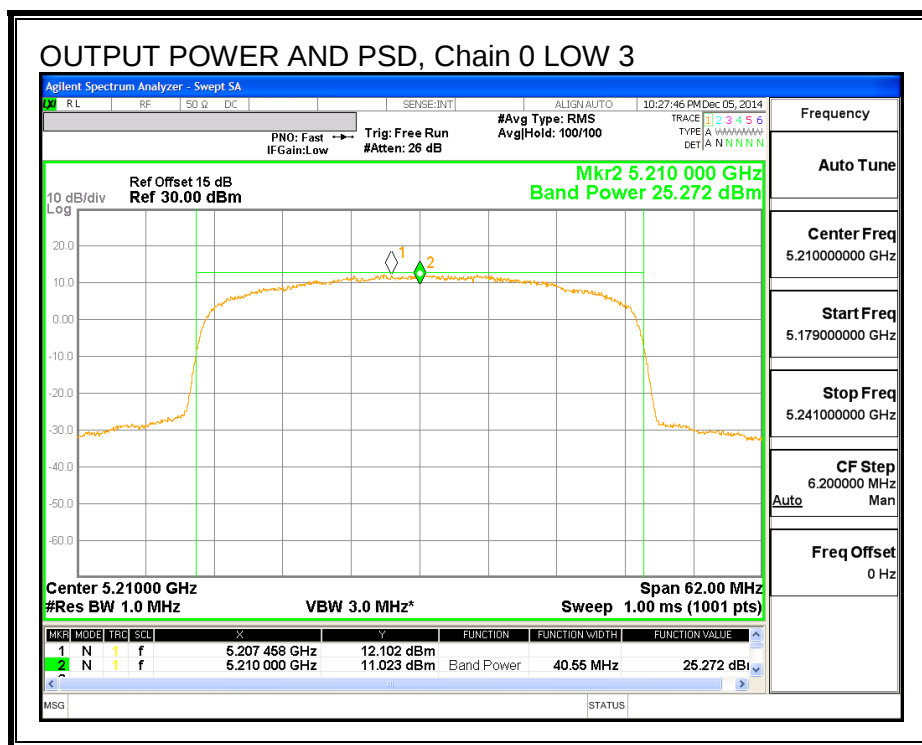


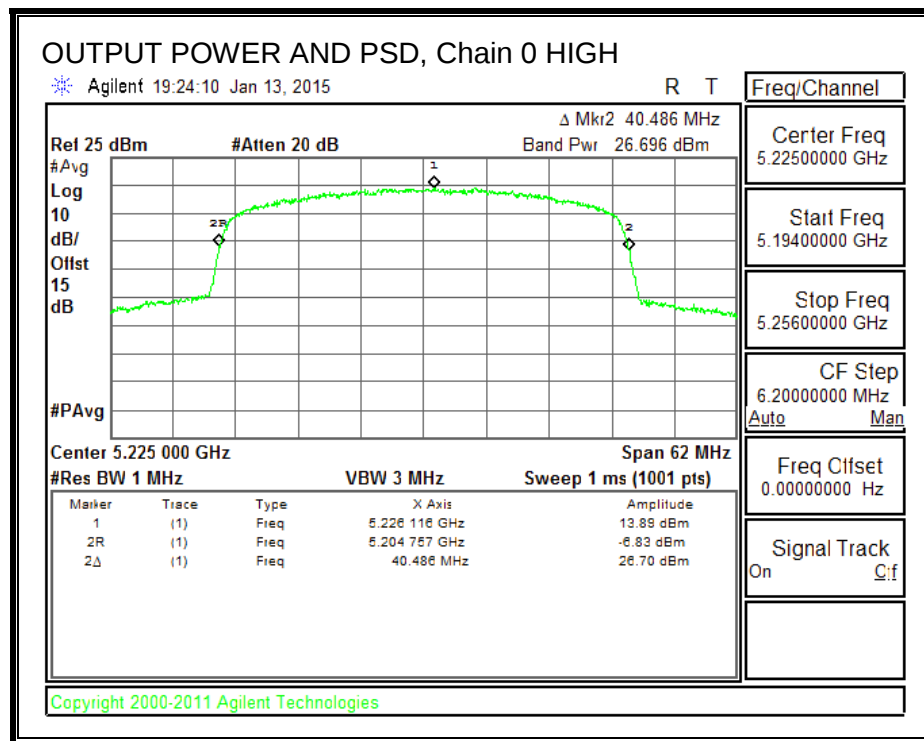

OUTPUT POWER AND PSD, Chain 1

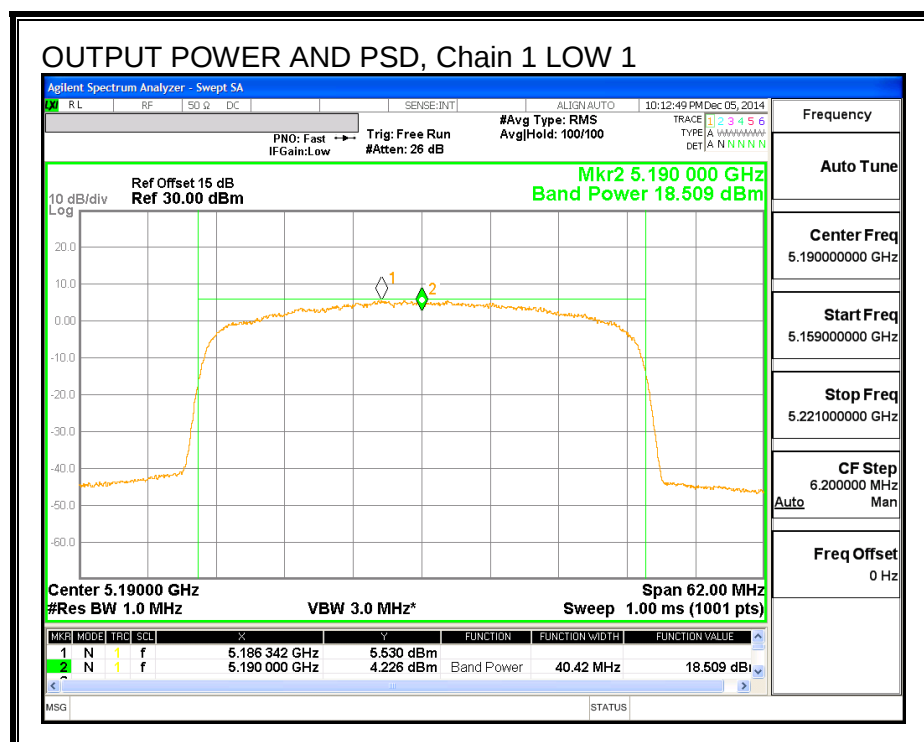

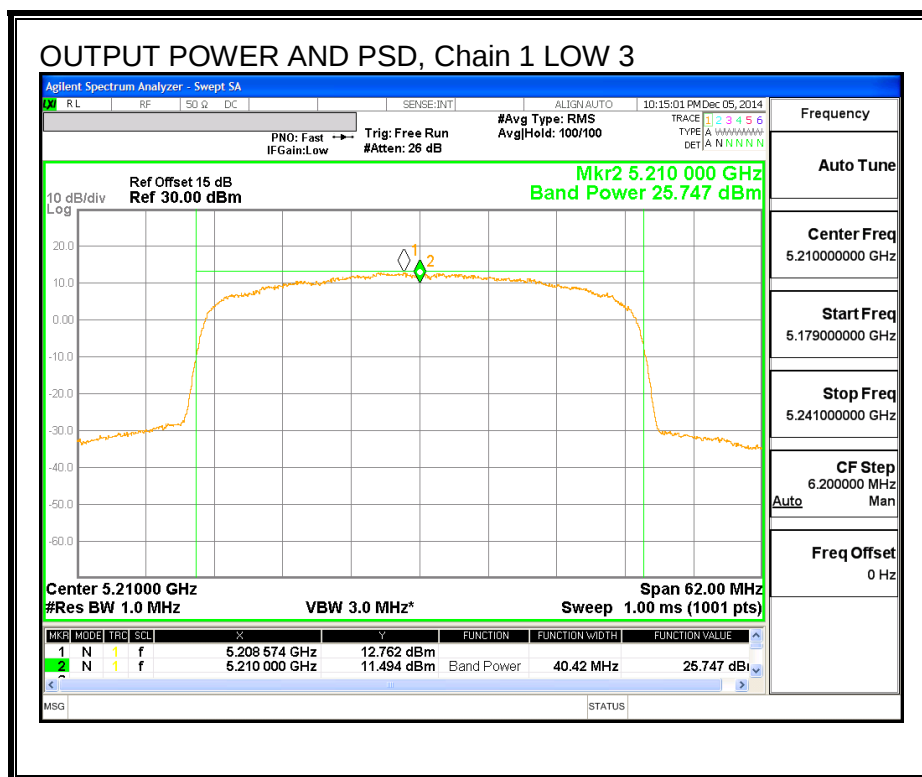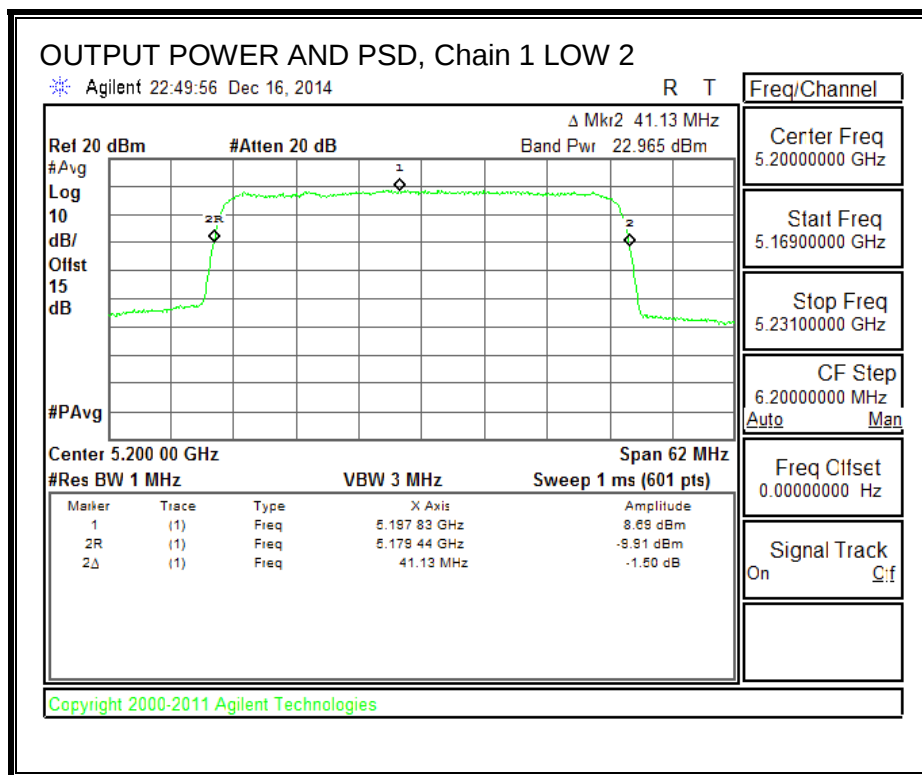

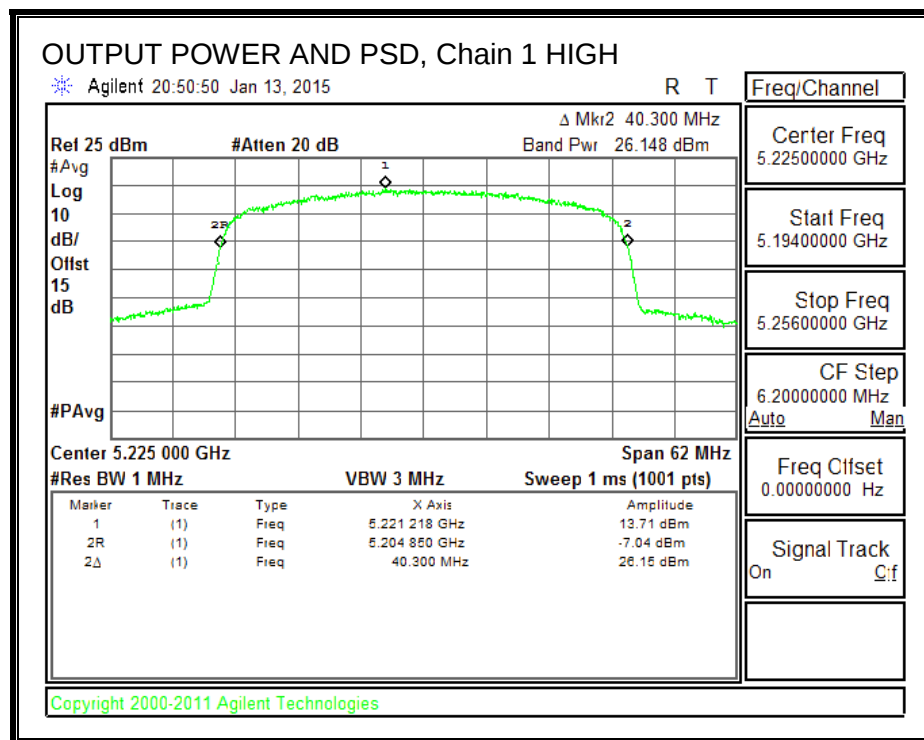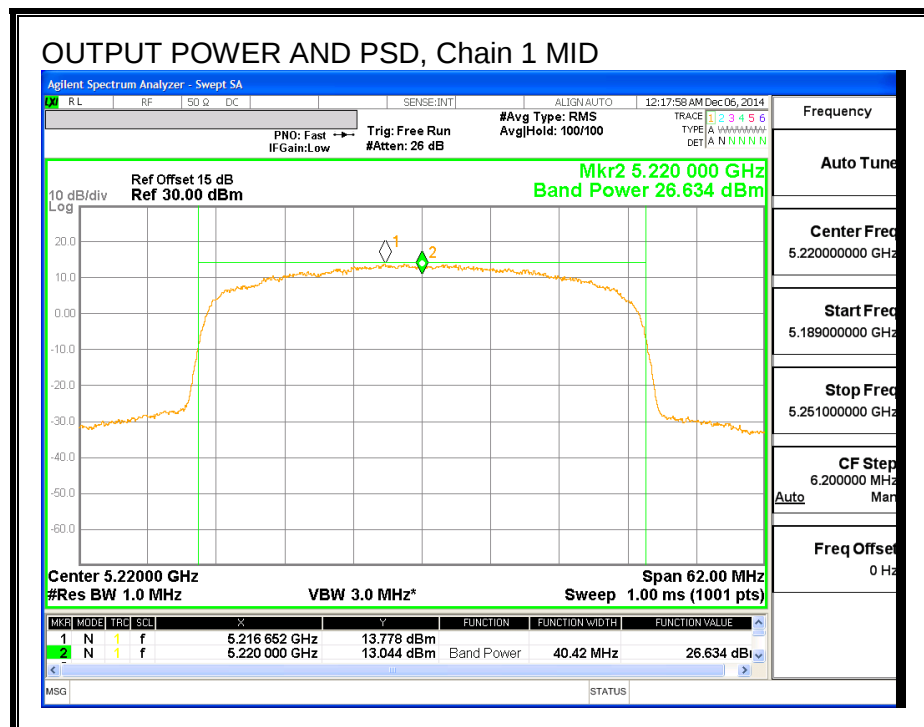

8.4.3. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.205 and §15.209

PART 15, SUBPART E

Radiated LIMIT:



(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.



Procedure



KDB 789033 D02 General UNII Test Procedures New Rules v01, Section II, G5

RESULTS



LOW CHANNEL BANDEDGE, Chain 0

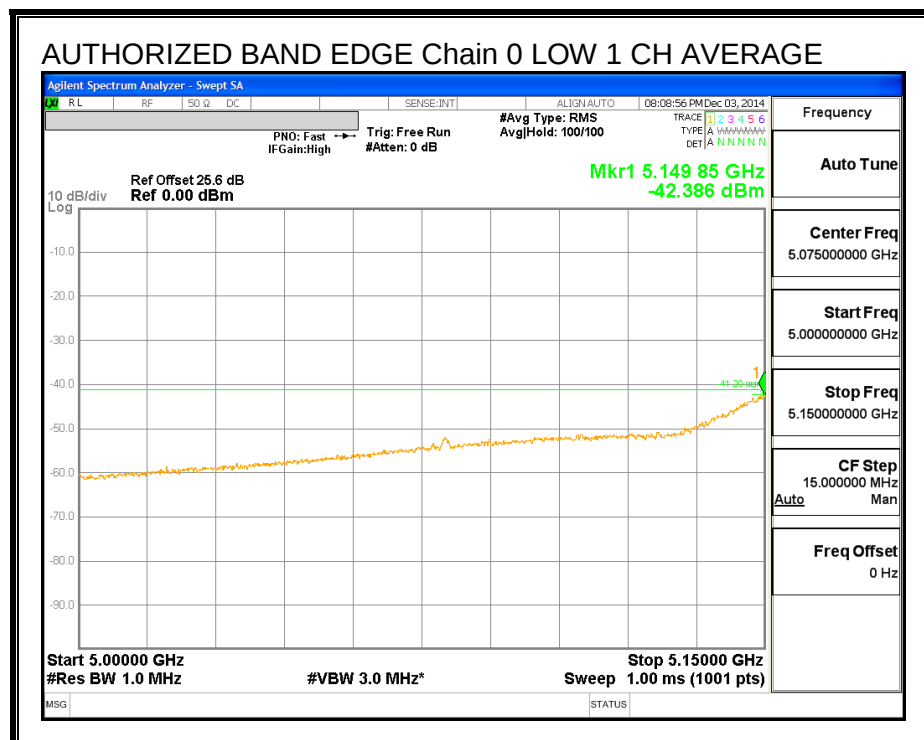
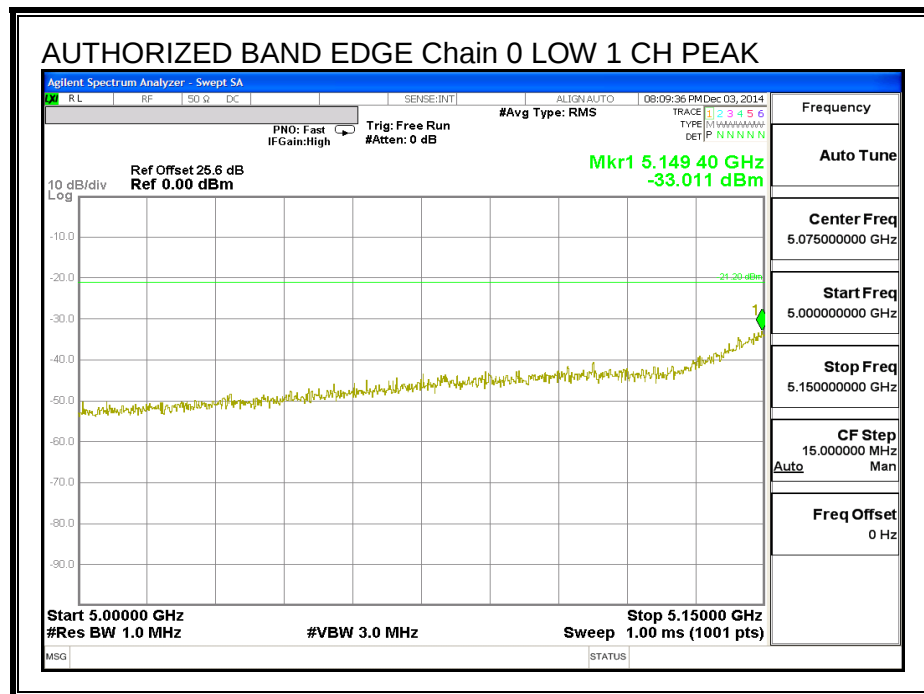


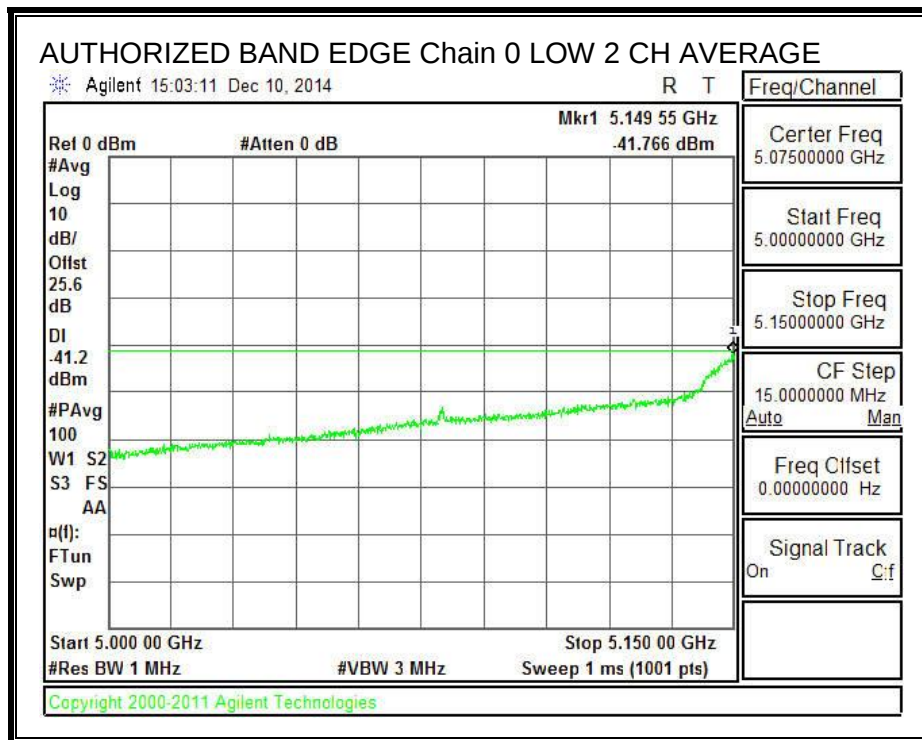
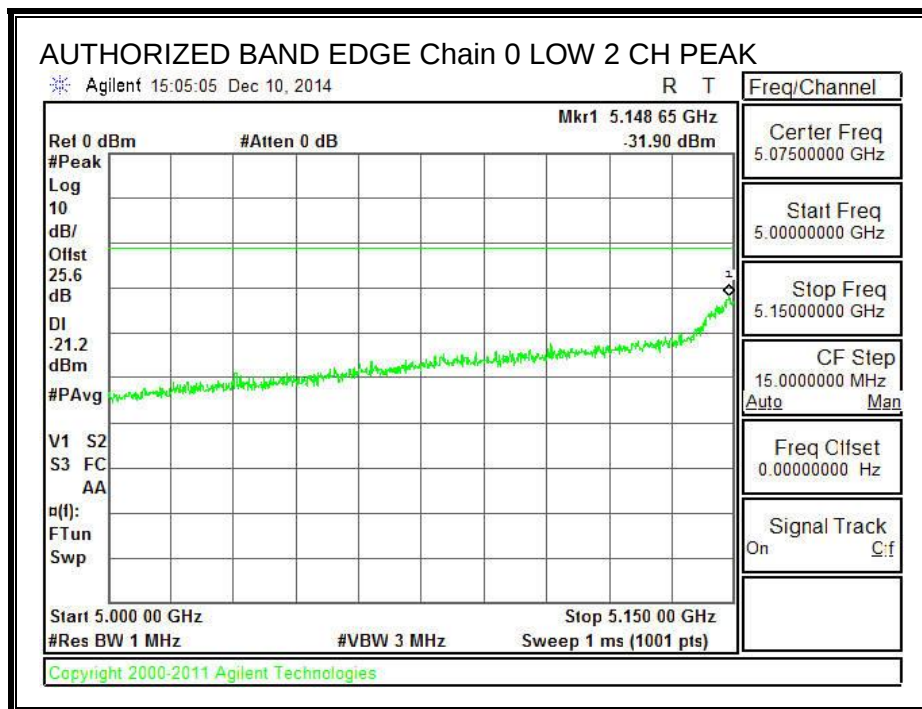


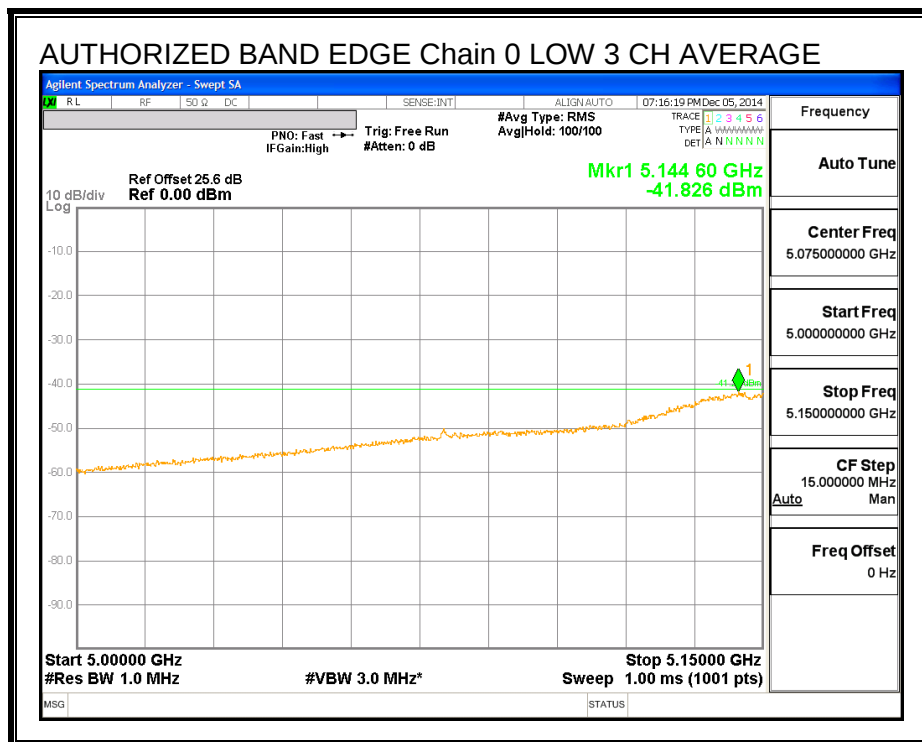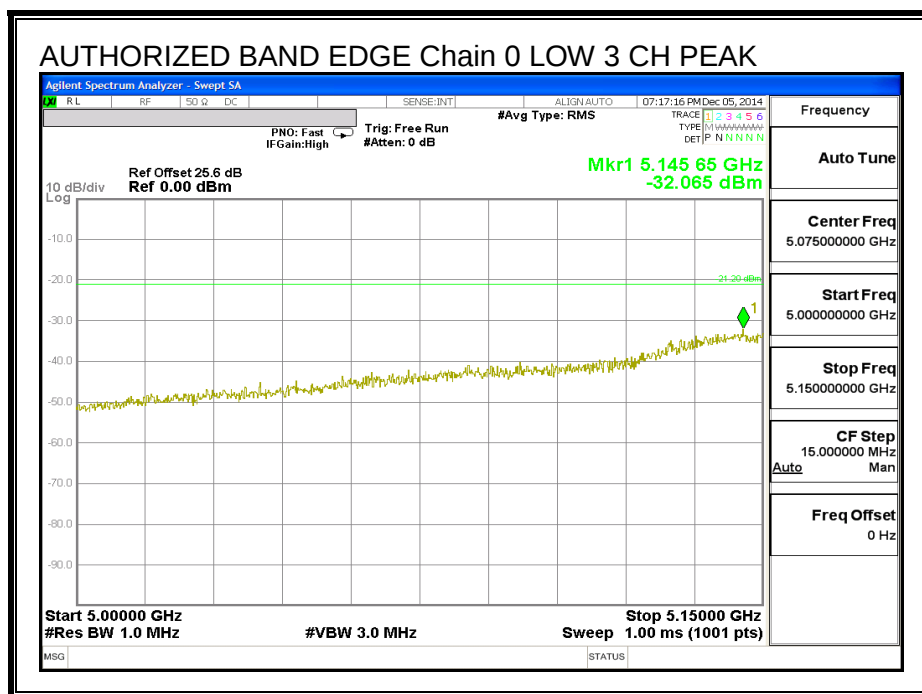

LOW CHANNEL BANDEDGE, Chain 1

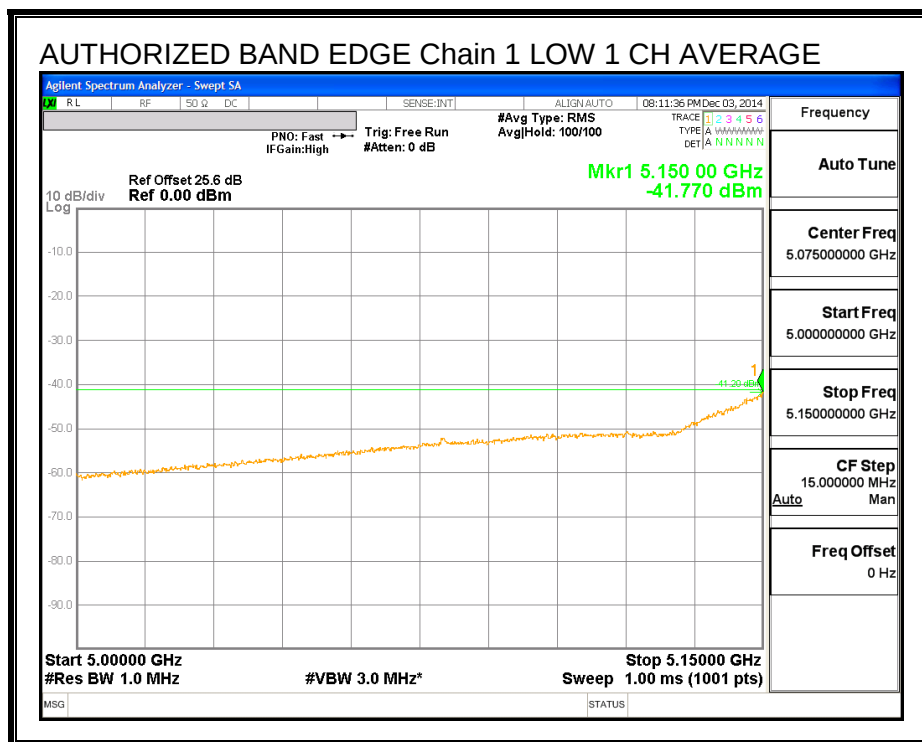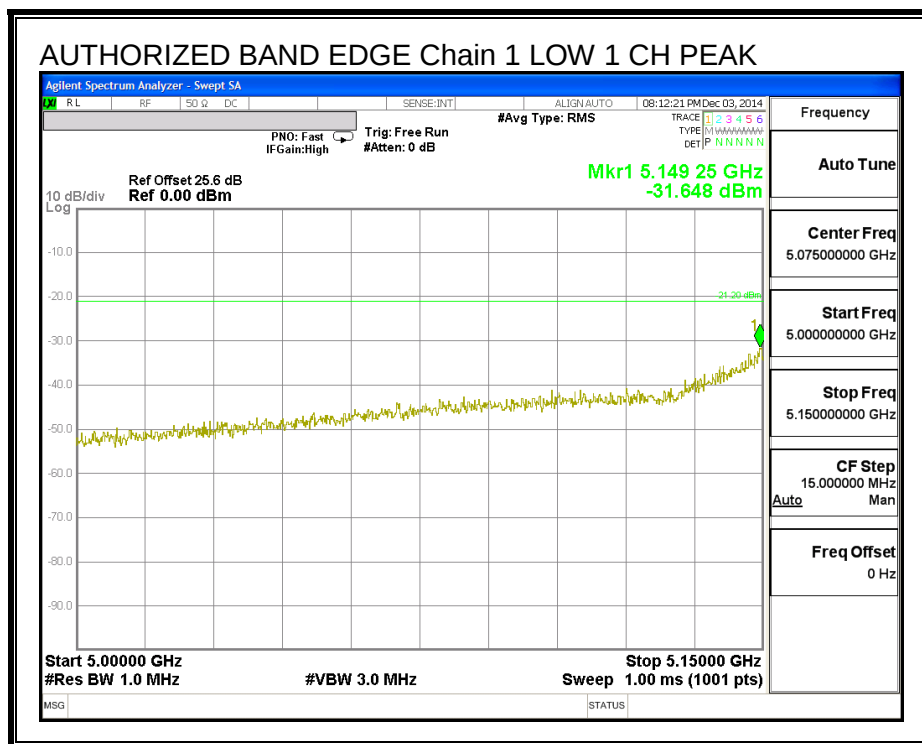

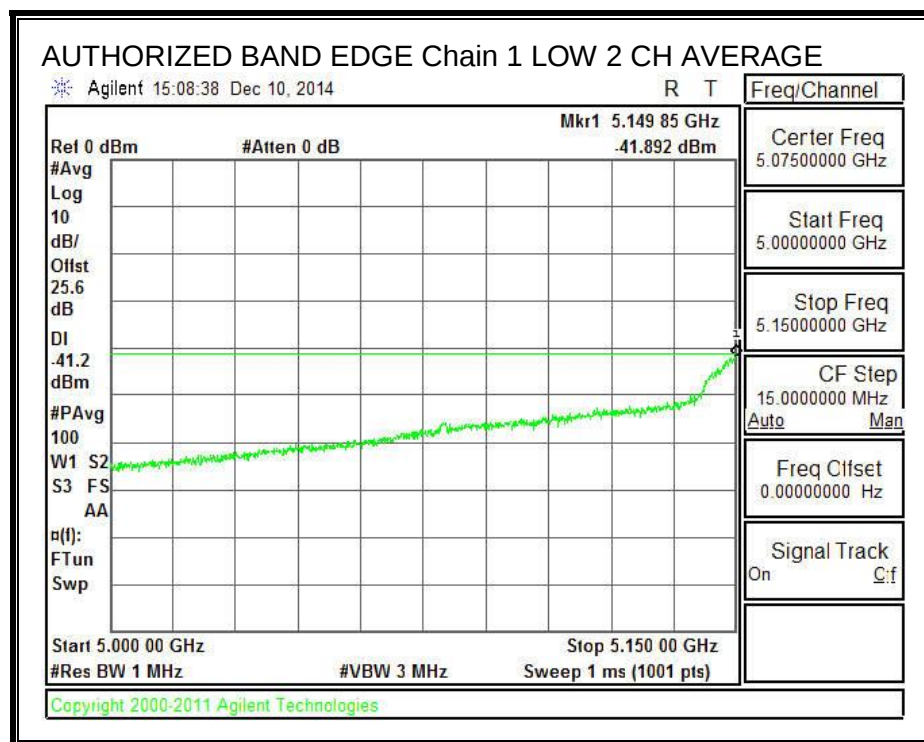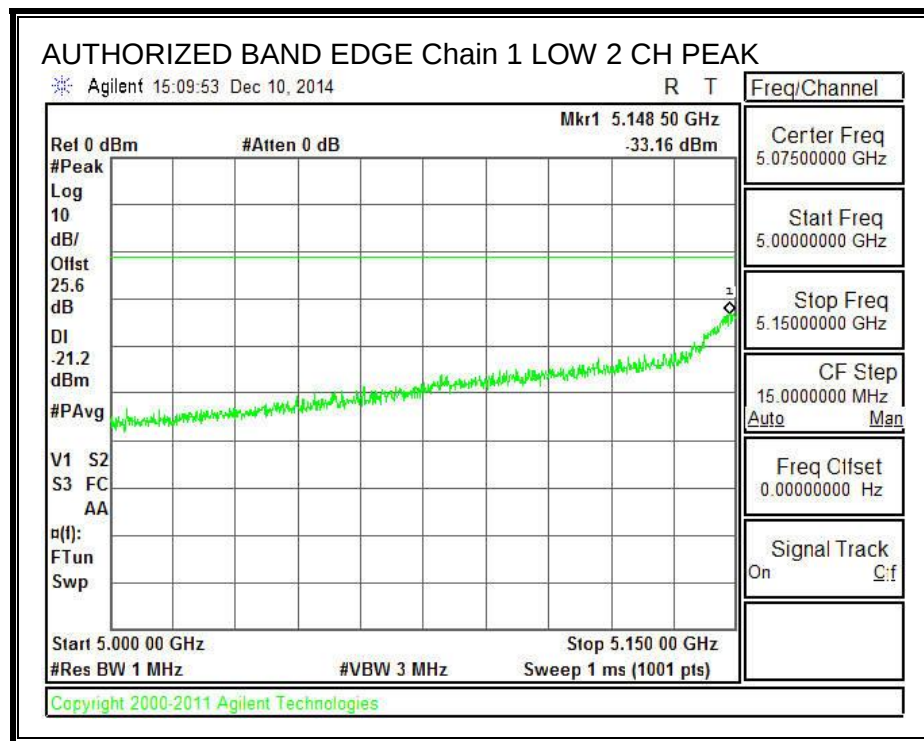

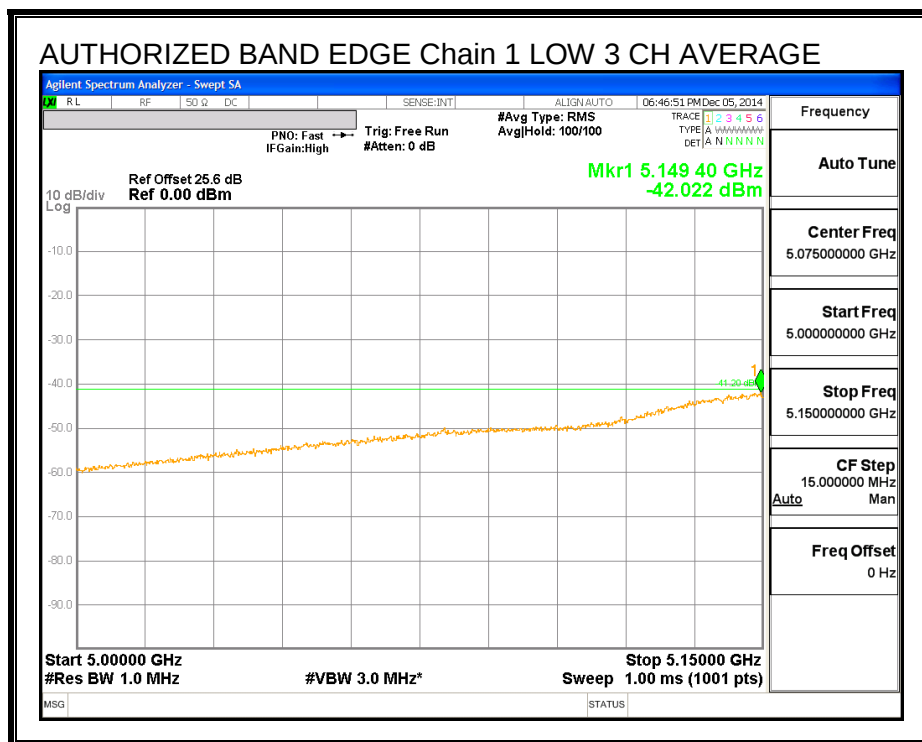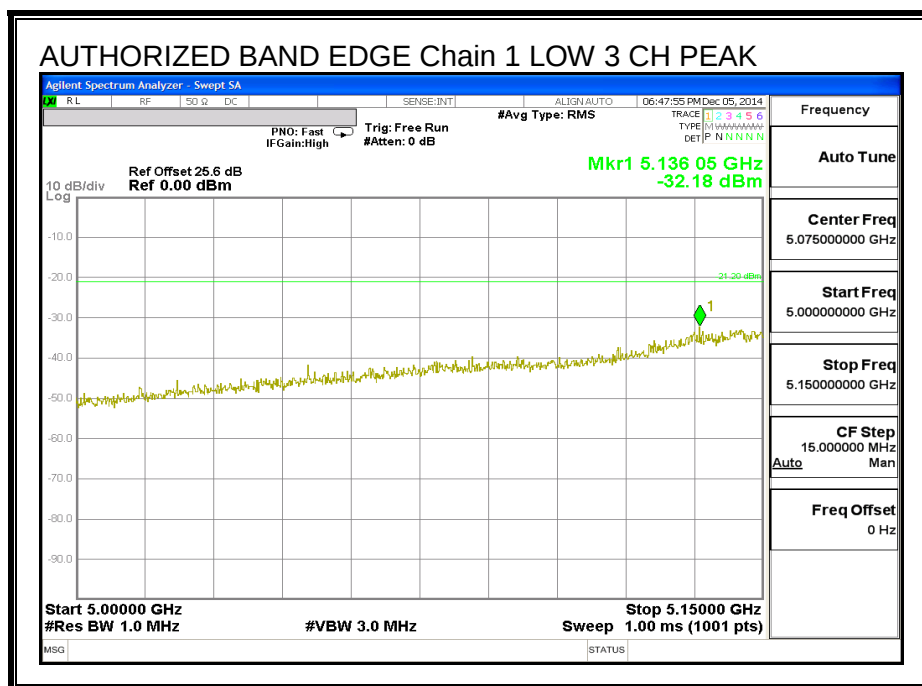

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS



FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. TX ABOVE 1 GHz 10MHz 2 TX MODE IN THE 5.2 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

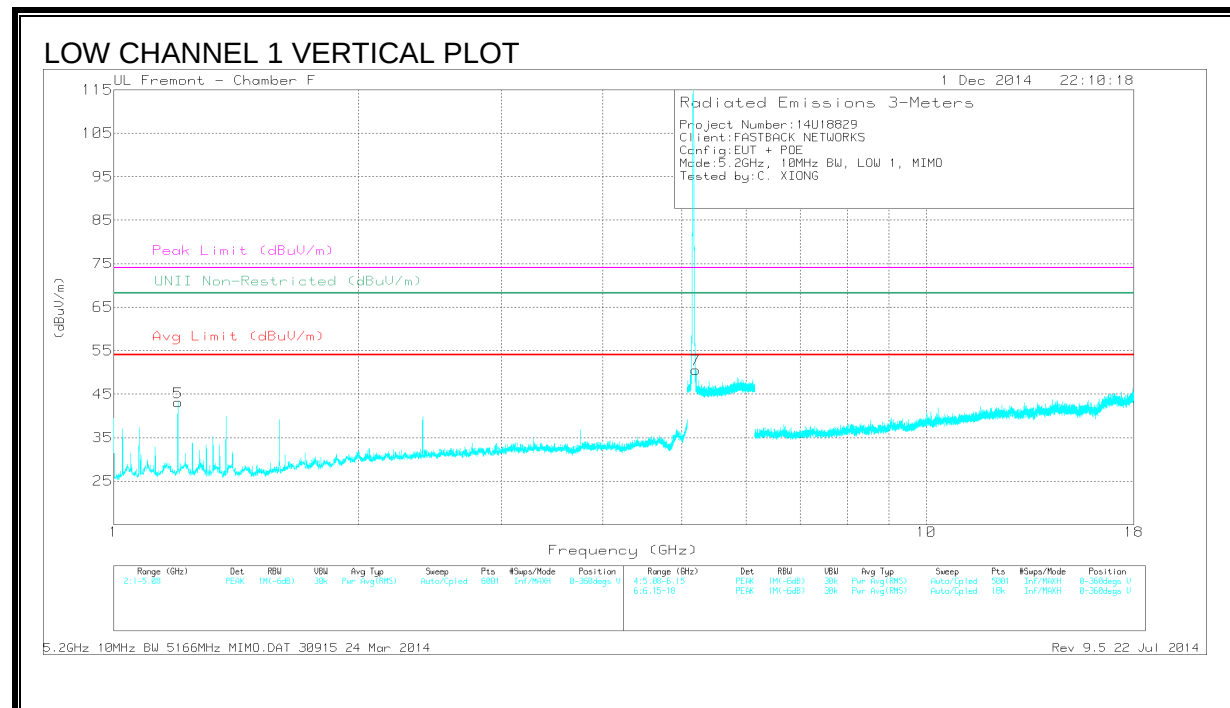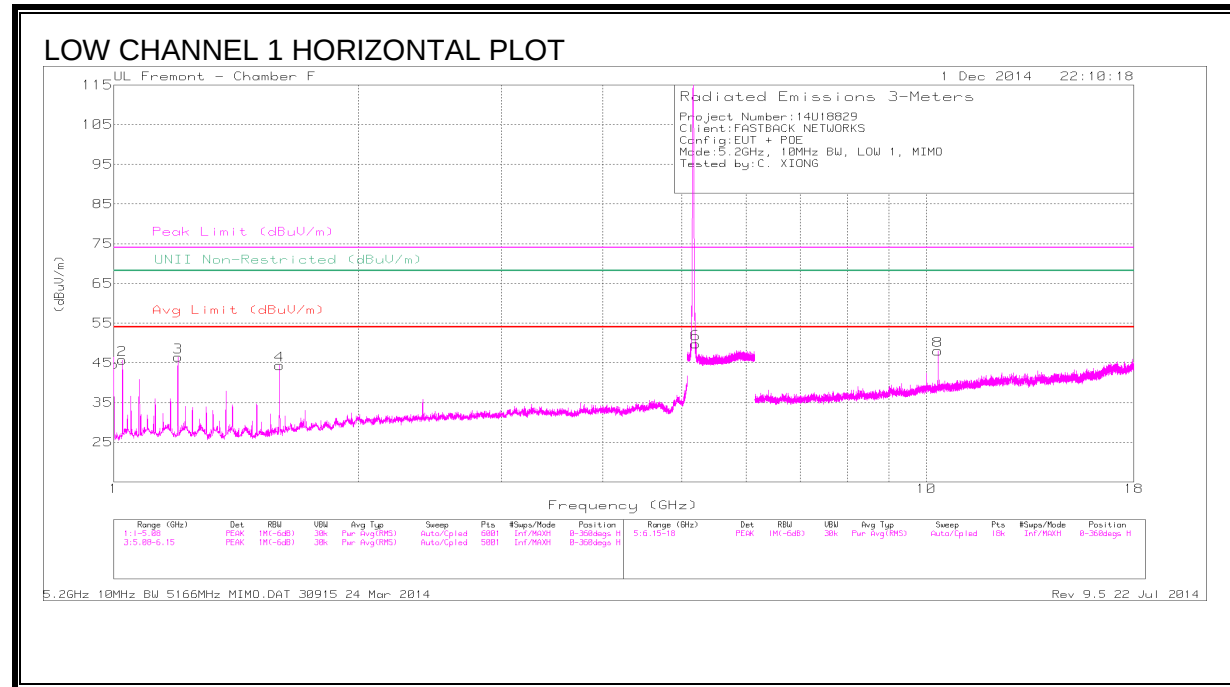

DATA



Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1	56.3	PK1	28	-35.9	48.4	-	-	74	-25.6	-	-	360	181	H
1	* 1	51.49	AD1	28	-35.9	43.59	54	-10.41	-	-	-	-	360	181	H
2	* 1.025	55.98	PK1	28.1	-35.9	48.18	-	-	74	-25.82	-	-	43	115	H
2	* 1.025	51.7	AD1	28.1	-35.9	43.9	54	-10.1	-	-	-	-	43	115	H
3	* 1.2	55.28	PK1	29	-35.7	48.58	-	-	74	-25.42	-	-	35	189	H
3	* 1.2	52.23	AD1	29	-35.7	45.53	54	-8.47	-	-	-	-	35	189	H
4	* 1.6	53.4	PK1	28.6	-35.3	46.7	-	-	74	-27.3	-	-	67	176	H
4	* 1.6	49.95	AD1	28.6	-35.3	43.25	54	-10.75	-	-	-	-	67	176	H
5	* 1.2	55.02	PK1	29	-35.7	48.32	-	-	74	-25.68	-	-	50	248	V
5	* 1.2	52.29	AD1	29	-35.7	45.59	54	-8.41	-	-	-	-	50	248	V
6	5.204	47.65	PK1	34.4	-23.7	58.35	-	-	-	-	68.2	-9.85	5	104	H
7	5.198	49.37	PK1	34.4	-23.7	60.07	-	-	-	-	68.2	-8.13	27	105	V
8	10.492	44.4	PK1	37.6	-27.4	54.6	-	-	-	-	68.2	-13.6	46	102	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

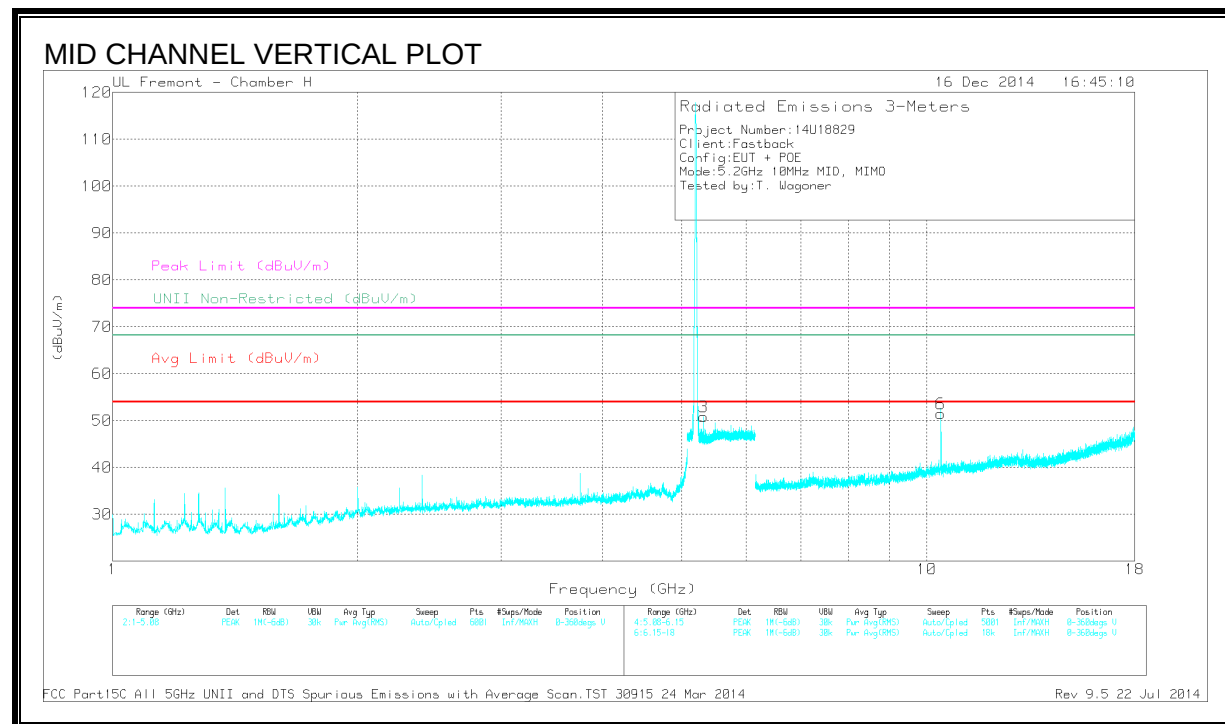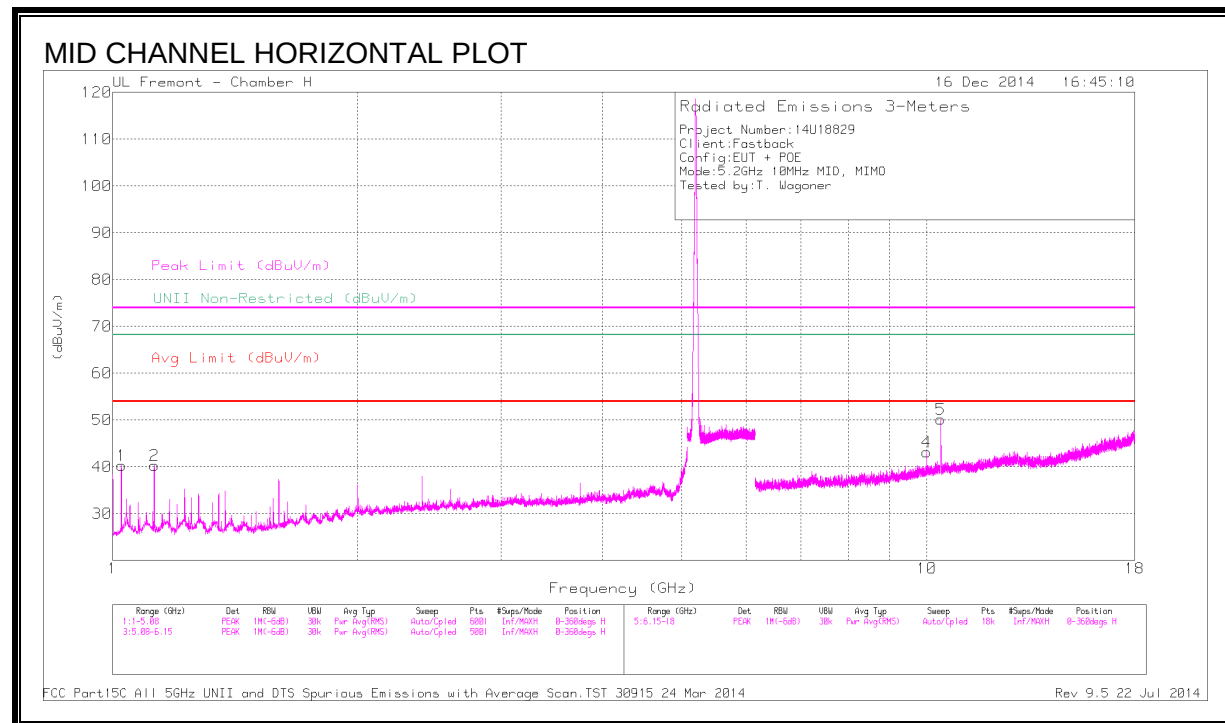

DATA

Radiated Emissions


Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	52.14	PK1	27.8	-35.5	44.44	-	-	74	-29.56	-	-	323	125	H
1	* 1.025	47.18	AD1	27.8	-35.5	39.48	54	-14.52	-	-	-	-	323	125	H
2	* 1.125	51.31	PK1	28.4	-35.6	44.11	-	-	74	-29.89	-	-	38	103	H
2	* 1.125	45.97	AD1	28.4	-35.6	38.77	54	-15.23	-	-	-	-	38	103	H
3	5.32	44.38	PK1	34.8	-22.6	56.58	-	-	-	-	68.2	-11.62	350	115	V
4	10	38.96	PK1	37.3	-26.4	49.86	-	-	-	-	68.2	-18.34	184	125	H
5	10.4	46.95	PK1	37.5	-25.8	58.65	-	-	-	-	68.2	-9.55	317	104	H
6	10.4	41.15	PK1	37.5	-25.8	52.85	-	-	-	-	68.2	-15.35	317	133	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL PLOT

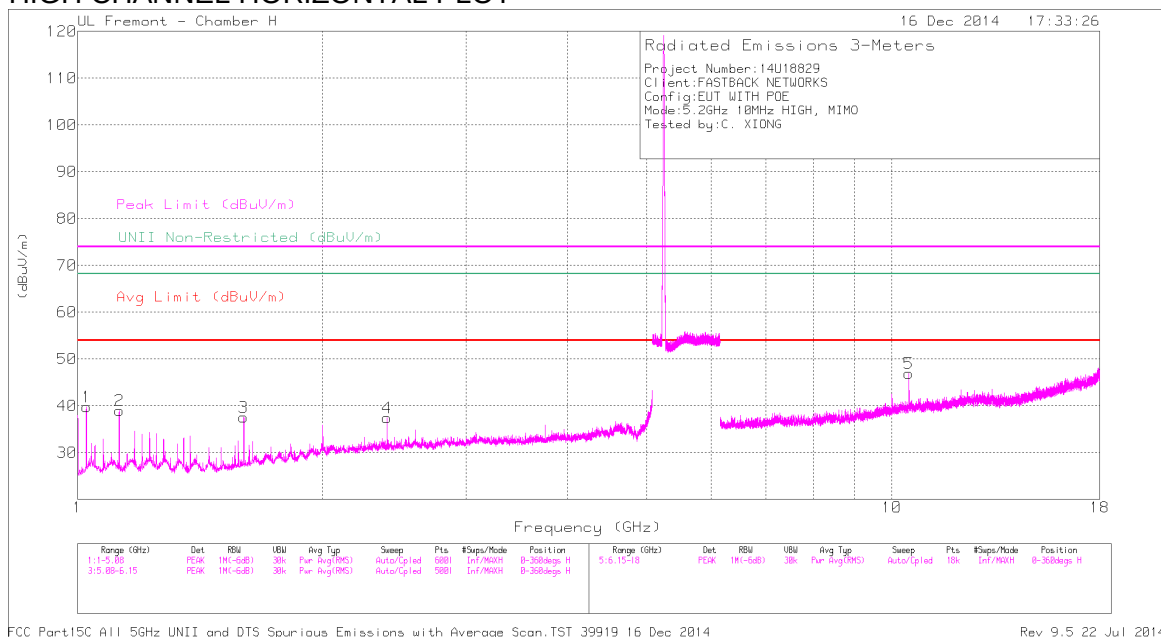

HIGH CHANNEL VERTICAL PLOT

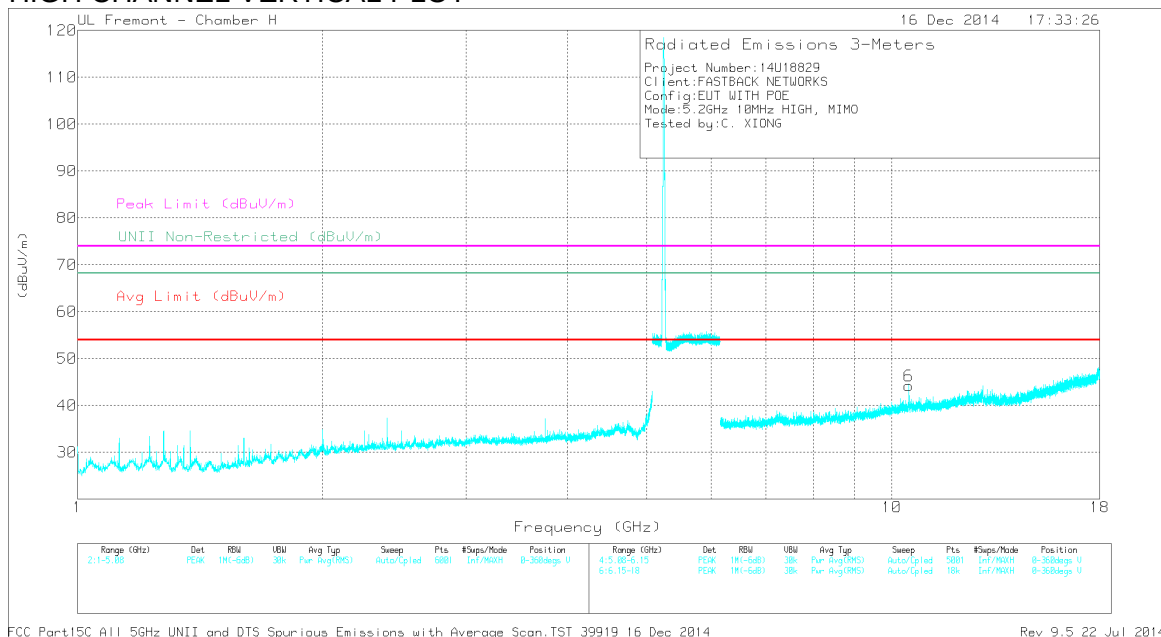

DATA

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	52.66	PK1	27.8	-35.5	44.96	-	-	74	-29.04	-	-	314	116	H
1	* 1.025	47.01	AD1	27.8	-35.5	39.31	54	-14.69	-	-	-	-	314	116	H
2	* 1.125	50.51	PK1	28.3	-35.6	43.21	-	-	74	-30.79	-	-	37	110	H
2	* 1.125	45.35	AD1	28.3	-35.6	38.05	54	-15.95	-	-	-	-	37	110	H
3	* 1.6	49.42	PK1	28.6	-35.3	42.72	-	-	74	-31.28	-	-	63	190	H
3	* 1.6	47.5	AD1	28.6	-35.3	40.8	54	-13.2	-	-	-	-	63	190	H
4	2.4	46.57	PK1	32	-34	44.57	-	-	-	-	68.2	-23.63	0	341	H
5	10.49	44.77	PK1	37.6	-25.6	56.77	-	-	-	-	68.2	-11.43	42	101	H
6	10.492	43.03	PK1	37.6	-25.5	55.13	-	-	-	-	68.2	-13.07	32	102	V



* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.2.2. TX ABOVE 1 GHz 20MHz 2 TX MODE IN THE 5.2 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

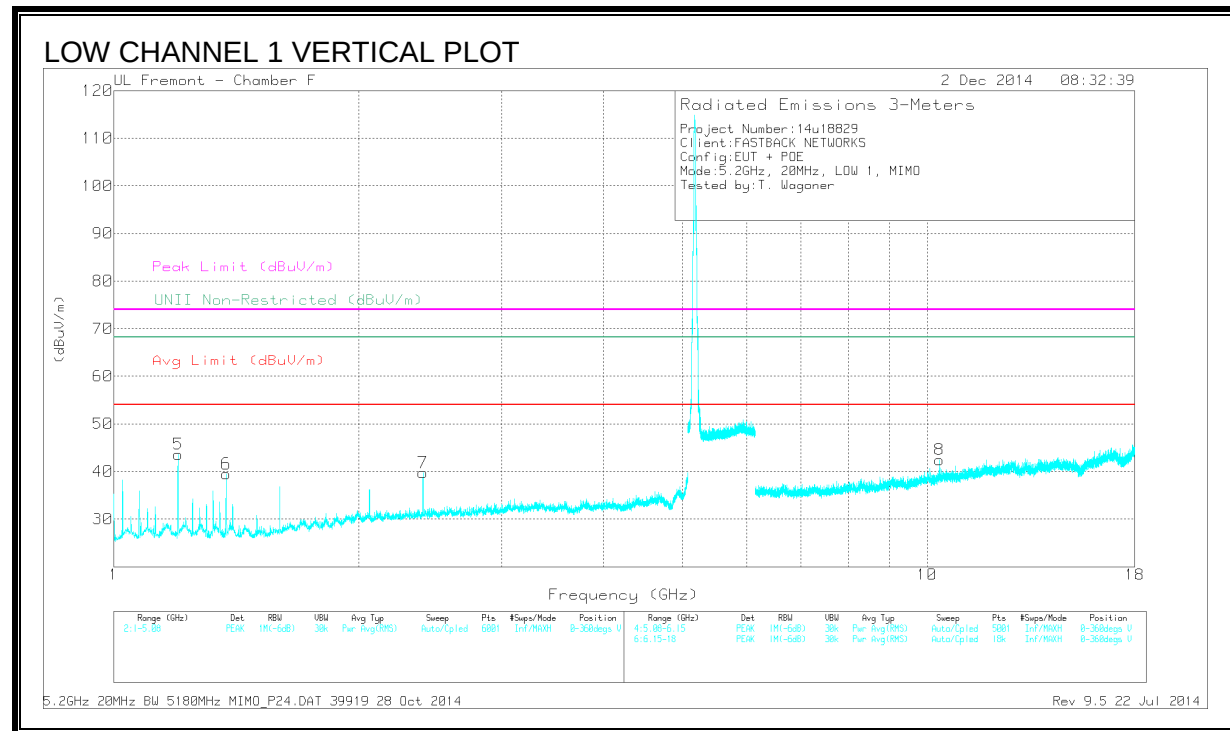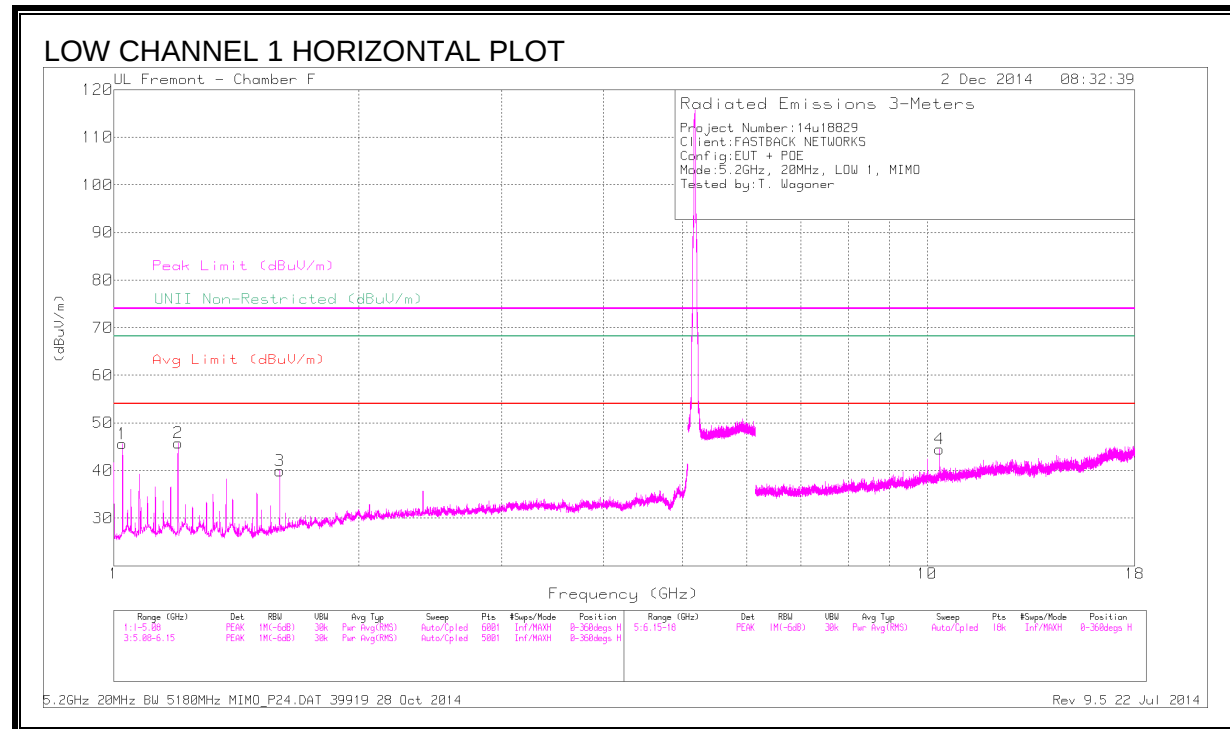

DATA

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	56.45	PK1	28.1	-35.9	48.65	-	-	74	-25.35	-	-	42	122	H
1	* 1.025	52.31	AD1	28.1	-35.9	44.51	54	-9.49	-	-	-	-	42	122	H
2	* 1.2	54.21	PK1	29	-35.7	47.51	-	-	74	-26.49	-	-	34	190	H
2	* 1.2	52.73	AD1	29	-35.7	46.03	54	-7.97	-	-	-	-	34	190	H
3	* 1.6	47.52	PK1	28.6	-35.3	40.82	-	-	74	-33.18	-	-	334	102	H
3	* 1.6	45.16	AD1	28.6	-35.3	38.46	54	-15.54	-	-	-	-	334	102	H
4	10.36	38.12	PK1	37.5	-27.5	48.12	-	-	-	-	68.2	-20.08	7	103	H
4	10.36	32.91	AD1	37.5	-27.5	42.91	-	-	-	-	-	-	7	103	H
5	* 1.2	54.9	PK1	29	-35.7	48.2	-	-	74	-25.8	-	-	50	245	V
5	* 1.2	53.51	AD1	29	-35.7	46.81	54	-7.19	-	-	-	-	50	245	V
6	* 1.375	47.37	PK1	28.6	-35.3	40.67	-	-	74	-33.33	-	-	4	210	V
6	* 1.375	44.68	AD1	28.6	-35.3	37.98	54	-16.02	-	-	-	-	4	210	V
7	2.4	45.02	PK1	31.8	-34.5	42.32	-	-	-	-	68.2	-25.88	38	112	V
7	2.4	42.06	AD1	31.8	-34.5	39.36	-	-	-	-	-	-	38	112	V
8	10.36	37.16	PK1	37.5	-27.5	47.16	-	-	-	-	68.2	-21.04	26	246	V
8	10.36	29.53	AD1	37.5	-27.5	39.53	-	-	-	-	-	-	26	246	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

LOW CHANNEL 2 HORIZONTAL PLOT

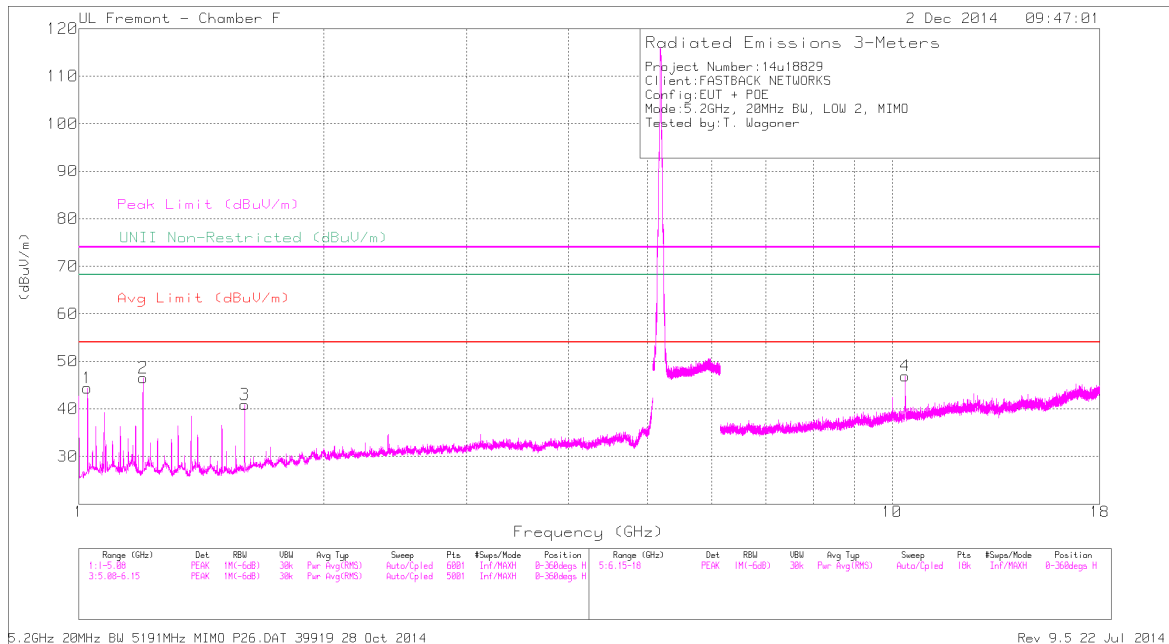

LOW CHANNEL 2 VERTICAL PLOT

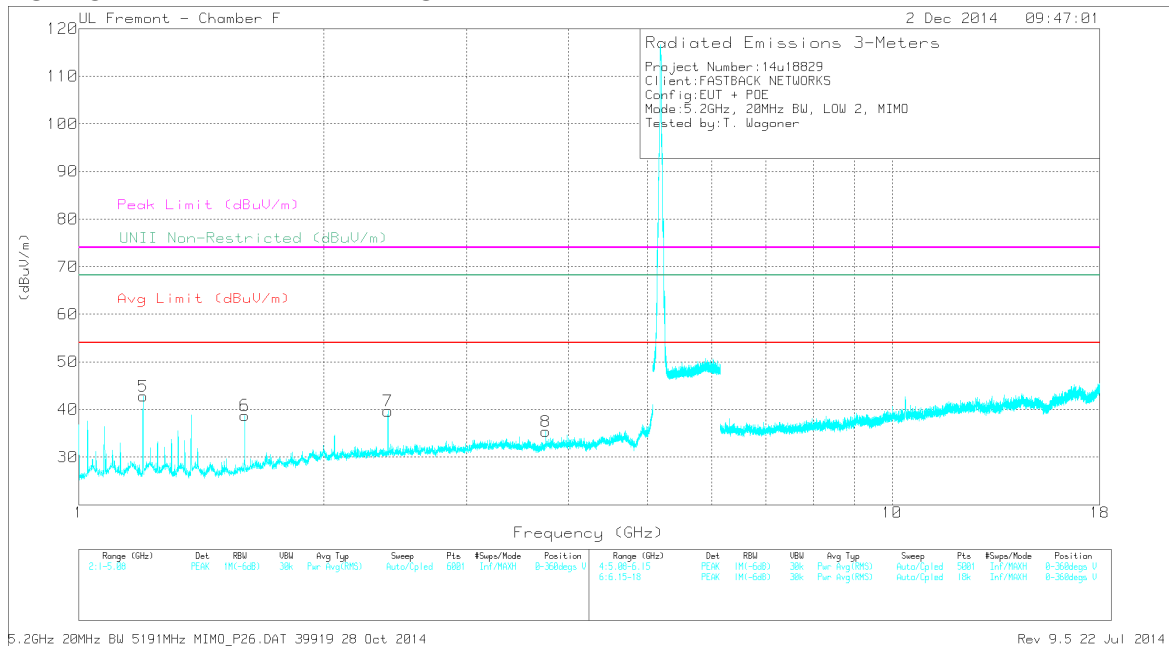

DATA

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	53.61	PK1	28.1	-35.9	45.81	-	-	74	-28.19	-	-	43	115	H
1	* 1.025	51.71	AD1	28.1	-35.9	43.91	54	-10.09	-	-	-	-	43	115	H
2	* 1.2	54.08	PK1	29	-35.7	47.38	-	-	74	-26.62	-	-	26	187	H
2	* 1.2	52.63	AD1	29	-35.7	45.93	54	-8.07	-	-	-	-	26	187	H
3	* 1.6	49.61	PK1	28.6	-35.3	42.91	-	-	74	-31.09	-	-	63	136	H
3	* 1.6	47.75	AD1	28.6	-35.3	41.05	54	-12.95	-	-	-	-	63	136	H
4	10.382	39.54	PK1	37.6	-27.3	49.84	-	-	-	-	68.2	-18.36	6	110	H
4	10.382	34.72	AD1	37.6	-27.3	45.02	-	-	-	-	-	-	6	110	H
5	* 1.2	53.8	PK1	29	-35.7	47.1	-	-	74	-26.9	-	-	50	244	V
5	* 1.2	52.42	AD1	29	-35.7	45.72	54	-8.28	-	-	-	-	50	244	V
6	* 1.6	46.8	PK1	28.6	-35.3	40.1	-	-	74	-33.9	-	-	28	102	V
6	* 1.6	44.33	AD1	28.6	-35.3	37.63	54	-16.37	-	-	-	-	28	102	V
7	2.4	45.15	PK1	31.8	-34.5	42.45	-	-	-	-	68.2	-25.75	39	108	V
7	2.4	42.2	AD1	31.8	-34.5	39.5	-	-	-	-	-	-	39	108	V
8	* 3.75	38.7	PK1	32.9	-33.5	38.1	-	-	74	-35.9	-	-	334	204	V
8	* 3.75	32.72	AD1	32.9	-33.5	32.12	54	-21.88	-	-	-	-	334	204	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL PLOT

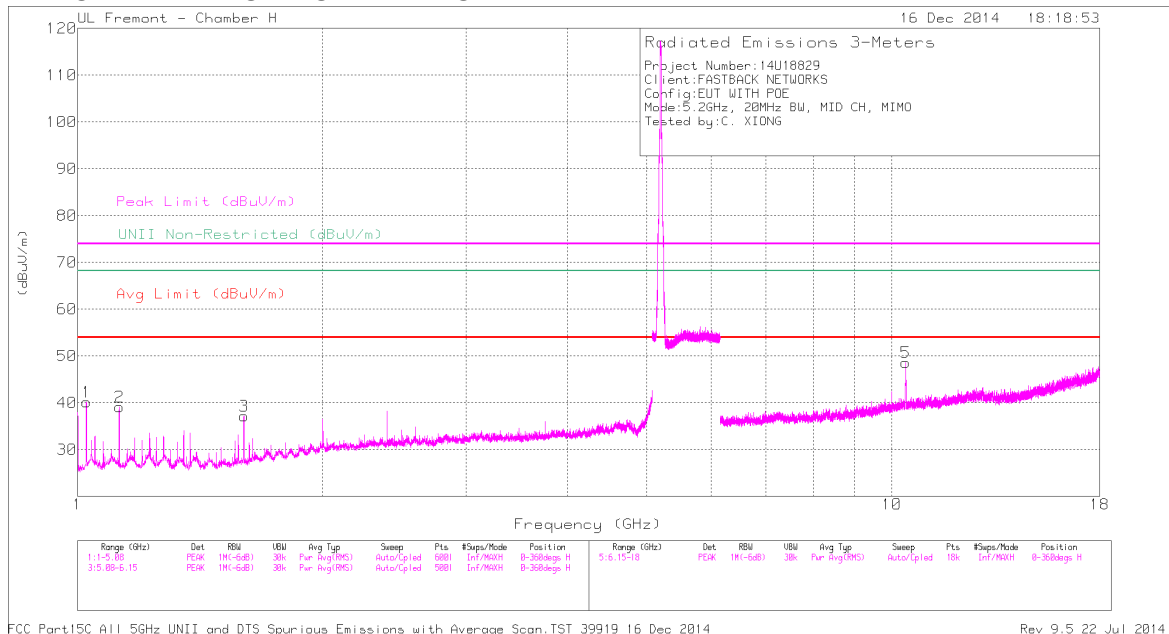

MID CHANNEL VERTICAL PLOT

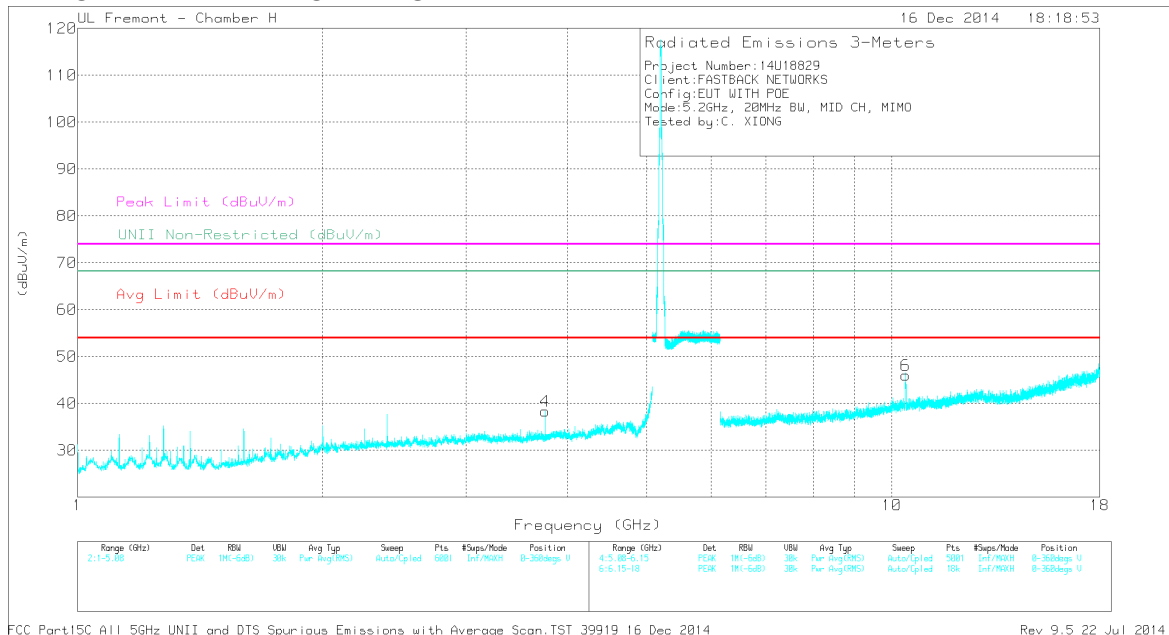

DATA

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	52.53	PK1	27.8	-35.5	44.83	-	-	74	-29.17	-	-	318	127	H
1	* 1.025	47.1	AD1	27.8	-35.5	39.4	54	-14.6	-	-	-	-	318	127	H
2	* 1.125	50.73	PK1	28.3	-35.6	43.43	-	-	74	-30.57	-	-	36	101	H
2	* 1.125	44.94	AD1	28.4	-35.6	37.74	54	-16.26	-	-	-	-	36	101	H
3	* 1.6	48.56	PK1	28.5	-35	42.06	-	-	74	-31.94	-	-	346	193	H
3	* 1.6	42.94	AD1	28.5	-35	36.44	54	-17.56	-	-	-	-	346	193	H
4	* 3.75	44.96	PK1	33.2	-33.1	45.06	-	-	74	-28.94	-	-	7	203	V
4	* 3.75	38.04	AD1	33.2	-33.1	38.14	54	-15.86	-	-	-	-	7	203	V
5	10.4	41.41	PK1	37.5	-25.8	53.11	-	-	-	-	68.2	-15.09	312	101	H
6	10.4	43.76	PK1	37.5	-25.8	55.46	-	-	-	-	68.2	-12.74	335	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL PLOT

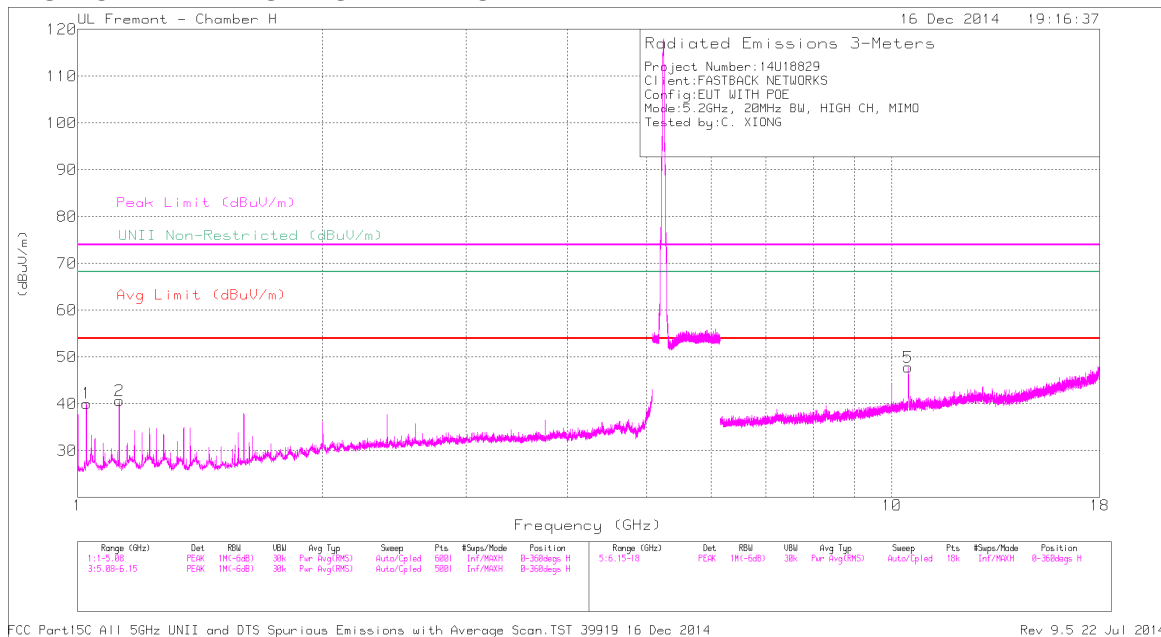

HIGH CHANNEL VERTICAL PLOT

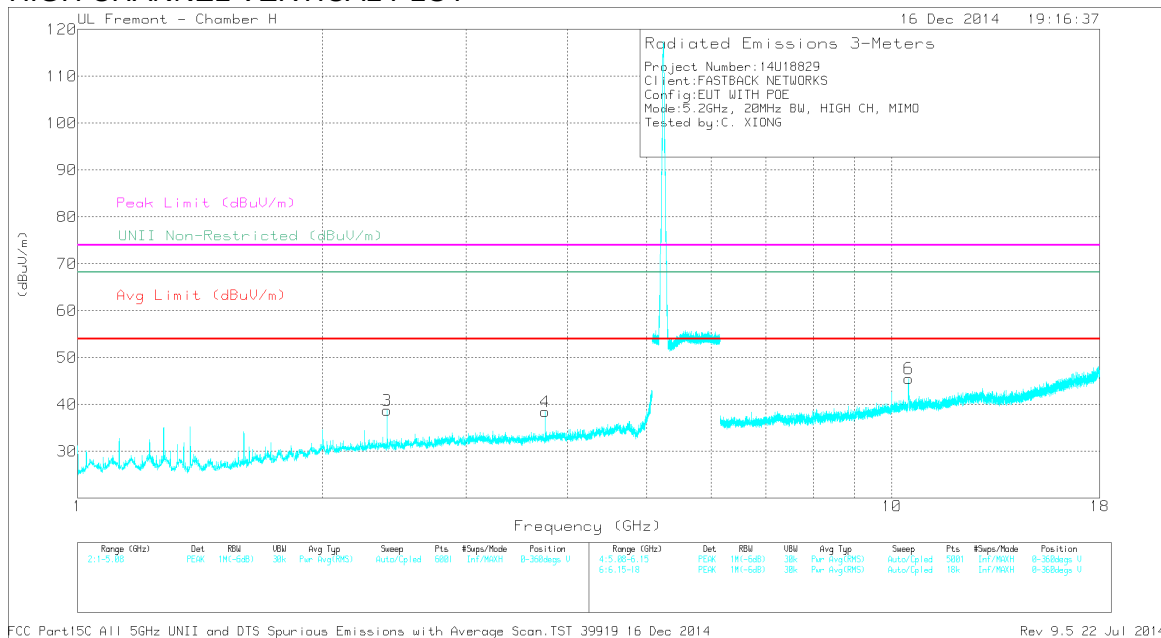

DATA

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	52.54	PK1	27.8	-35.5	44.84	-	-	74	-29.16	-	-	316	123	H
1	* 1.025	46.99	AD1	27.8	-35.5	39.29	54	-14.71	-	-	-	-	316	123	H
2	* 1.125	50.63	PK1	28.3	-35.6	43.33	-	-	74	-30.67	-	-	44	104	H
2	* 1.125	45.49	AD1	28.4	-35.6	38.29	54	-15.71	-	-	-	-	44	104	H
3	* 3.75	44.78	PK1	33.2	-33.1	44.88	-	-	74	-29.12	-	-	8	202	V
3	* 3.75	38.27	AD1	33.2	-33.1	38.37	54	-15.63	-	-	-	-	8	202	V
4	2.4	46.68	PK1	32	-34	44.68	-	-	-	-	68.2	-23.52	14	339	V
5	10.48	45.68	PK1	37.6	-25.8	57.48	-	-	-	-	68.2	-10.72	41	102	H
6	10.48	42.56	PK1	37.6	-25.8	54.36	-	-	-	-	68.2	-13.84	358	103	V



* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.2.3. TX ABOVE 1 GHz 40MHz 2 TX MODE IN THE 5.2 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

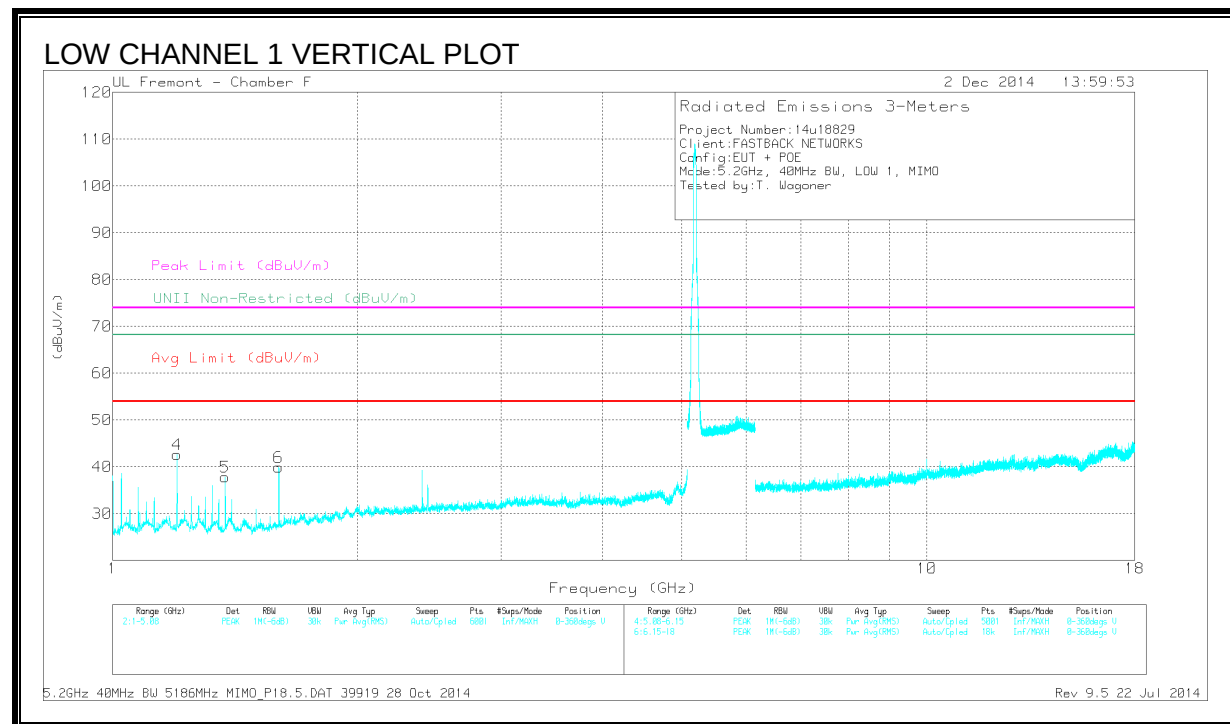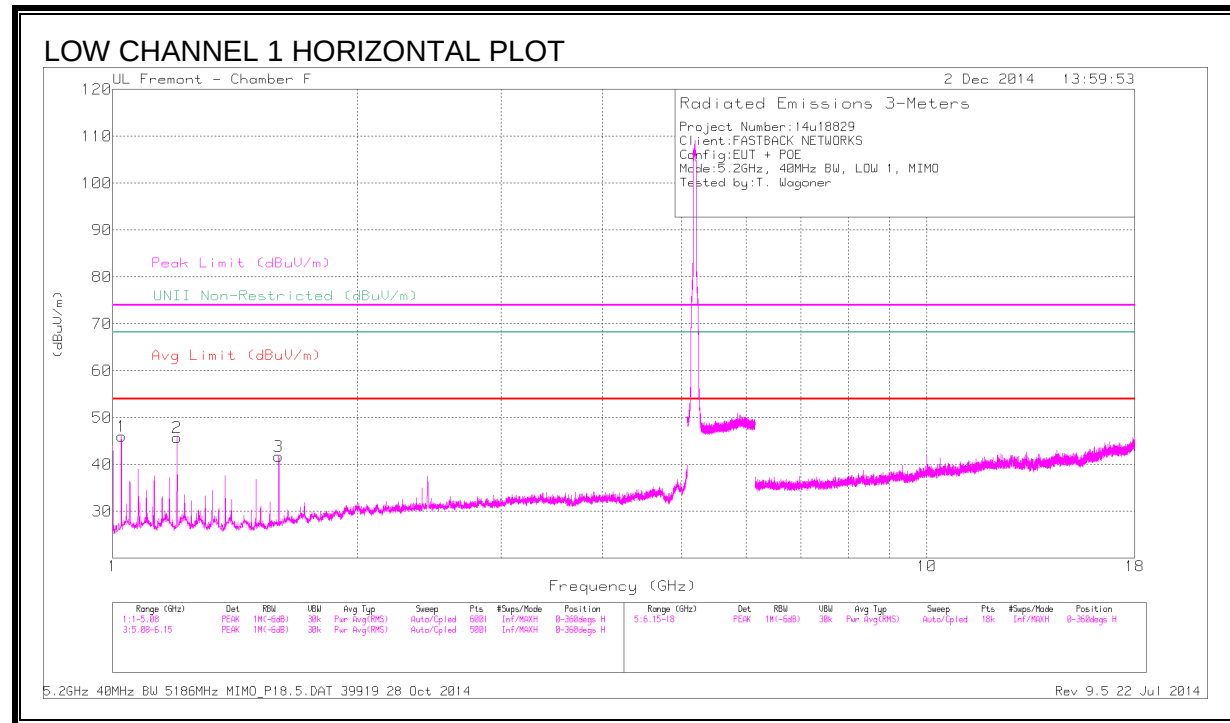

DATA

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	53.81	PK1	28.1	-35.9	46.01	-	-	74	-27.99	-	-	44	115	H
1	* 1.025	51.91	AD1	28.1	-35.9	44.11	54	-9.89	-	-	-	-	44	115	H
2	* 1.2	52.96	PK1	29	-35.7	46.26	-	-	74	-27.74	-	-	68	316	H
2	* 1.2	51.46	AD1	29	-35.7	44.76	54	-9.24	-	-	-	-	68	316	H
3	* 1.6	49.04	PK1	28.6	-35.3	42.34	-	-	74	-31.66	-	-	70	124	H
3	* 1.6	47.05	AD1	28.6	-35.3	40.35	54	-13.65	-	-	-	-	70	124	H
4	* 1.2	53.74	PK1	29	-35.7	47.04	-	-	74	-26.96	-	-	52	247	V
4	* 1.2	52.32	AD1	29	-35.7	45.62	54	-8.38	-	-	-	-	52	247	V
5	* 1.375	46.98	PK1	28.6	-35.3	40.28	-	-	74	-33.72	-	-	2	280	V
5	* 1.375	44.23	AD1	28.6	-35.3	37.53	54	-16.47	-	-	-	-	2	280	V
6	* 1.6	46.54	PK1	28.6	-35.3	39.84	-	-	74	-34.16	-	-	28	104	V
6	* 1.6	44.04	AD1	28.6	-35.3	37.34	54	-16.66	-	-	-	-	28	104	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Avg - Video bandwidth < Resolution bandwidth


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

LOW CHANNEL 2 HORIZONTAL PLOT

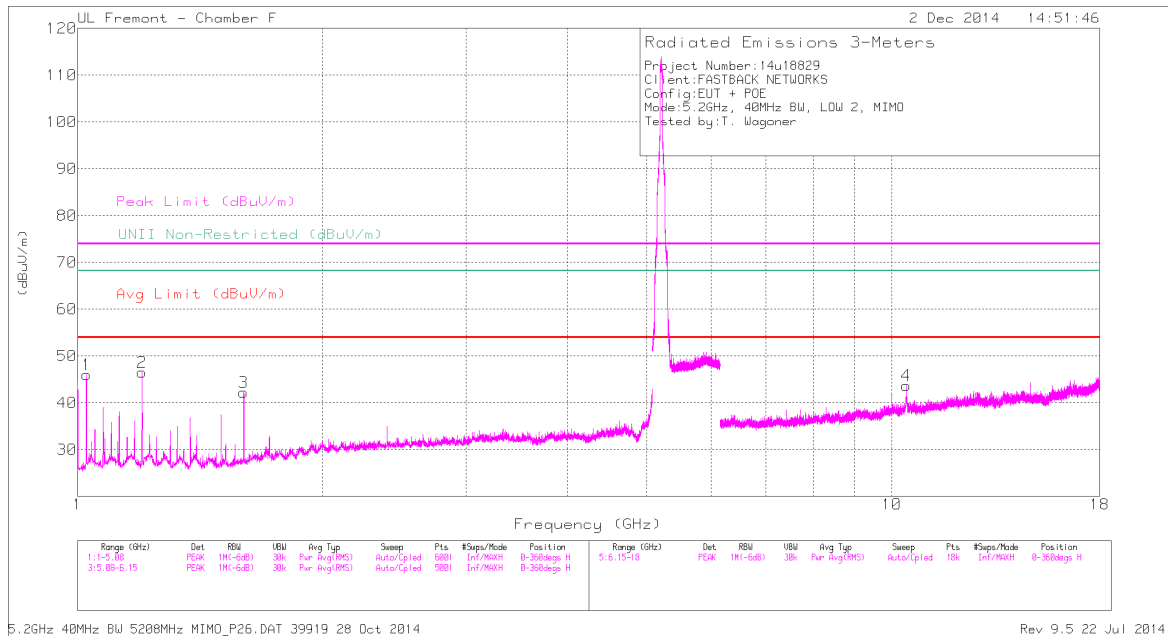

LOW CHANNEL 2 VERTICAL PLOT

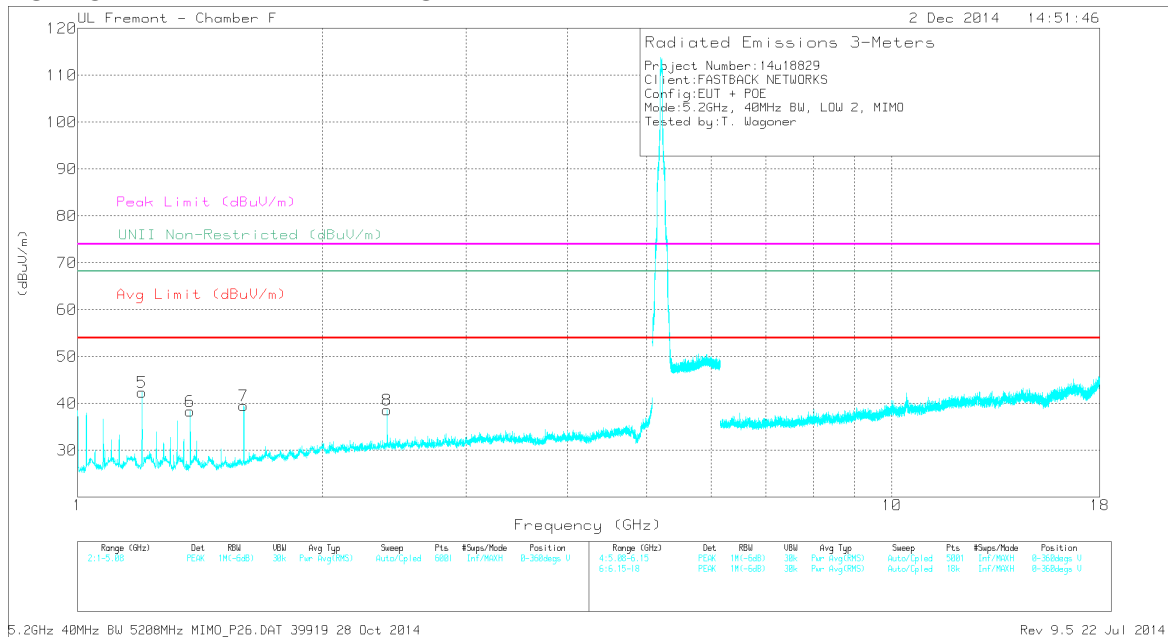

DATA

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	53.83	PK1	28.1	-35.9	46.03	-	-	74	-27.97	-	-	48	115	H
1	* 1.025	51.7	AD1	28.1	-35.9	43.9	54	-10.1	-	-	-	-	48	115	H
2	* 1.2	53.33	PK1	29	-35.7	46.63	-	-	74	-27.37	-	-	39	198	H
2	* 1.2	51.95	AD1	29	-35.7	45.25	54	-8.75	-	-	-	-	39	198	H
3	* 1.6	51.01	PK1	28.6	-35.3	44.31	-	-	74	-29.69	-	-	63	133	H
3	* 1.6	49.33	AD1	28.6	-35.3	42.63	54	-11.37	-	-	-	-	63	133	H
4	10.416	39.35	PK1	37.6	-27.8	49.15	-	-	-	-	68.2	-19.05	9	101	H
4	10.416	34.42	AD1	37.6	-27.8	44.22	-	-	-	-	-	-	9	101	H
5	* 1.2	53.56	PK1	29	-35.7	46.86	-	-	74	-27.14	-	-	58	246	V
5	* 1.2	52.09	AD1	29	-35.7	45.39	54	-8.61	-	-	-	-	58	246	V
6	* 1.375	46.98	PK1	28.5	-35.3	40.18	-	-	74	-33.82	-	-	0	281	V
6	* 1.375	44.16	AD1	28.6	-35.3	37.46	54	-16.54	-	-	-	-	0	281	V
7	* 1.6	47.73	PK1	28.6	-35.3	41.03	-	-	74	-32.97	-	-	33	102	V
7	* 1.6	45.48	AD1	28.6	-35.3	38.78	54	-15.22	-	-	-	-	33	102	V
8	2.4	44.25	PK1	31.8	-34.5	41.55	-	-	-	-	68.2	-26.65	35	106	V
8	2.4	40.91	AD1	31.8	-34.5	38.21	-	-	-	-	-	-	35	106	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

LOW CHANNEL 3 HORIZONTAL PLOT

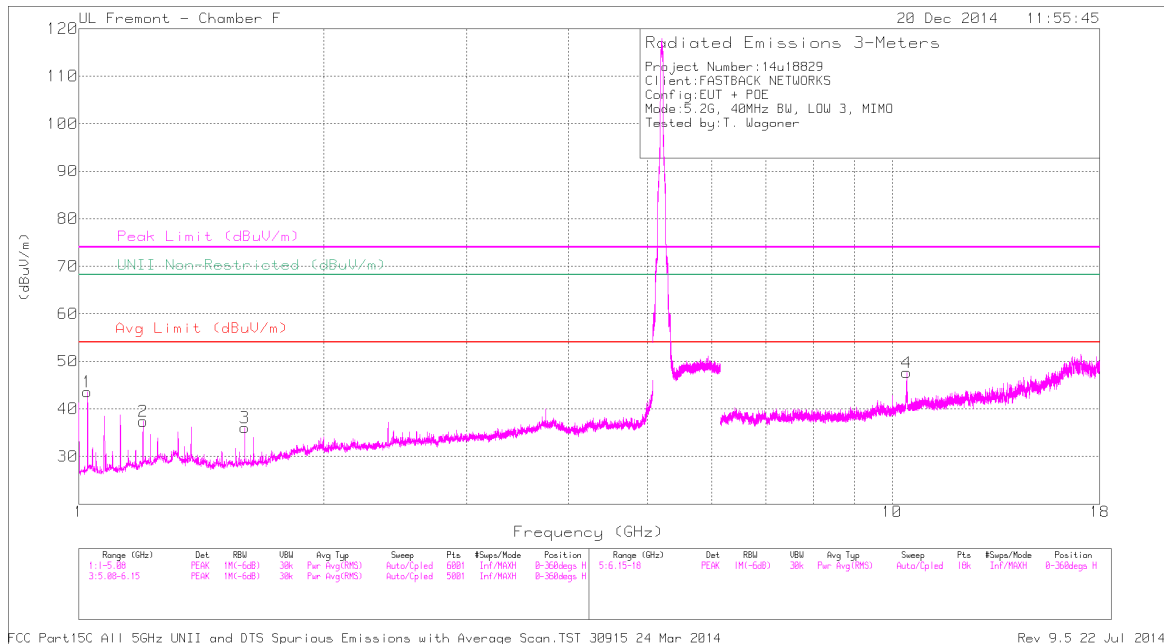

LOW CHANNEL 3 VERTICAL PLOT

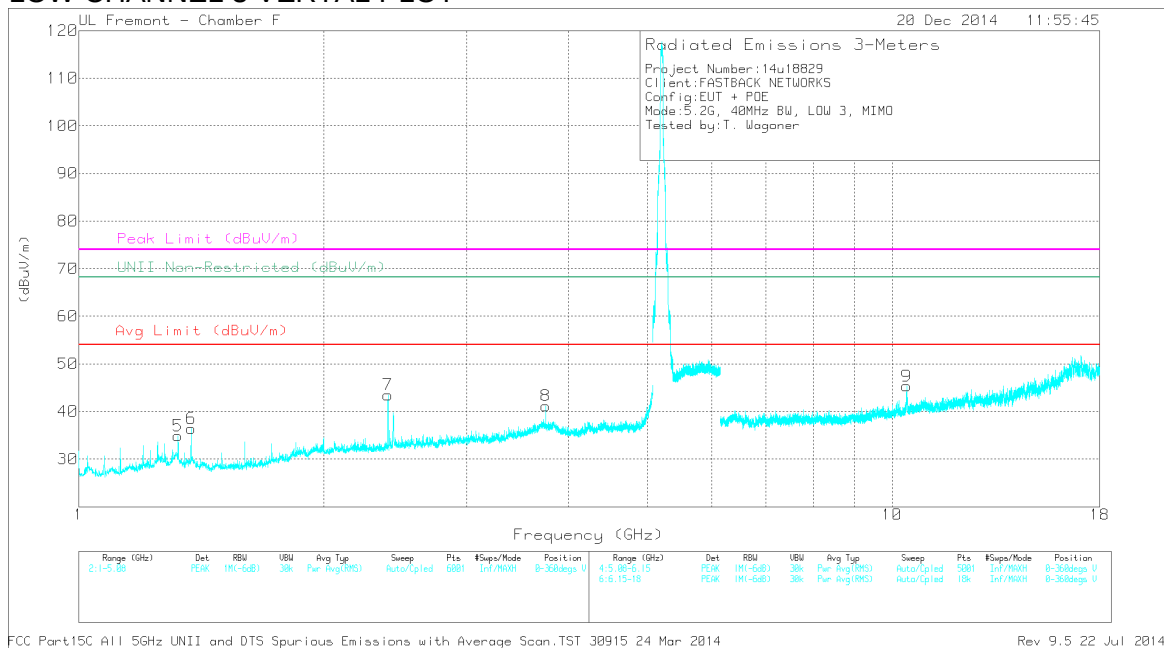

DATA

Radiated Emissions


Marker	Frequenc y (GHz)	Meter Readi ng (dBuV)	Det	AF T862 (dB/m)	Amp/Ch/F lter/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margin (dB)	Azimu t (Degs)	Height (cm)
* 1.025	49.08	PK1	27.6	-32.4	44.28	-	-	74	-29.72	-	-	306	118	H
* 1.025	46.87	AD1	27.6	-32.4	42.07	54	-11.93	-	-	-	-	306	118	H
* 1.2	45.2	PK1	29	-32.5	41.7	-	-	74	-32.3	-	-	11	112	H
* 1.2	34.92	AD1	29	-32.5	31.42	54	-22.58	-	-	-	-	11	112	H
* 1.6	45.1	PK1	28.5	-31.7	41.9	-	-	74	-32.1	-	-	23	238	H
* 1.6	38.92	AD1	28.5	-31.7	35.72	54	-18.28	-	-	-	-	23	238	H
* 1.325	42.97	PK1	29.9	-31.4	41.47	-	-	74	-32.53	-	-	350	204	V
* 1.325	32.95	AD1	29.8	-31.4	31.35	54	-22.65	-	-	-	-	350	204	V
* 1.375	44.13	PK1	29.4	-31.9	41.63	-	-	74	-32.37	-	-	346	257	V
* 1.375	36.32	AD1	29.4	-31.9	33.82	54	-20.18	-	-	-	-	346	257	V
* 3.75	40.69	PK1	34.6	-29.7	45.59	-	-	74	-28.41	-	-	2	201	V
* 3.75	32.35	AD1	34.6	-29.7	37.25	54	-16.75	-	-	-	-	2	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL PLOT

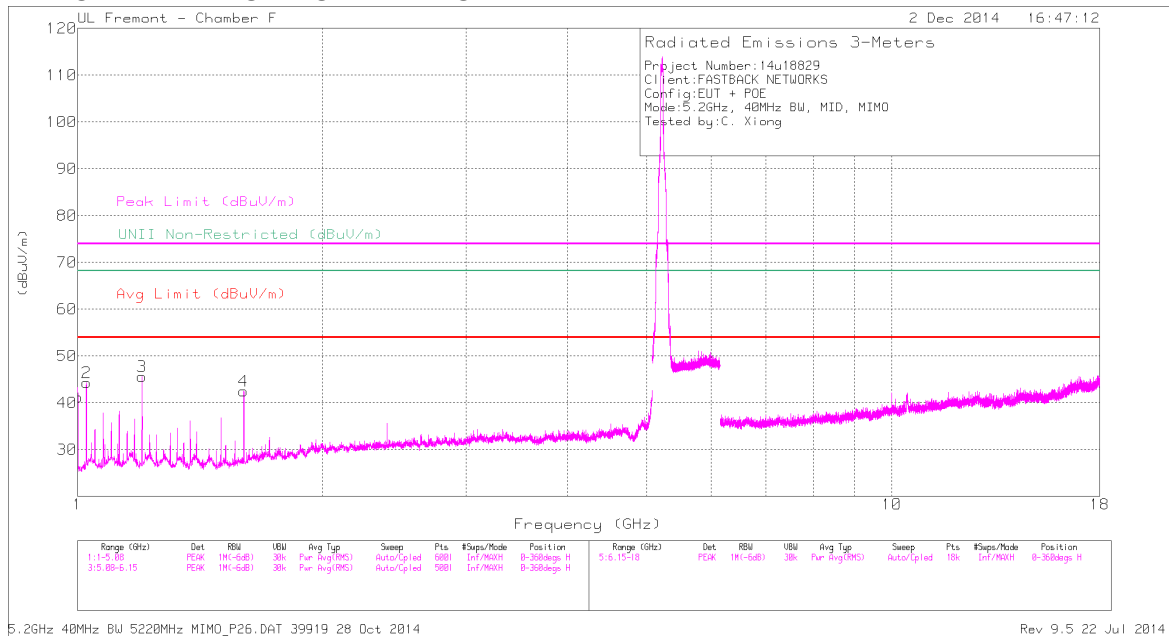

MID CHANNEL VERTICAL PLOT

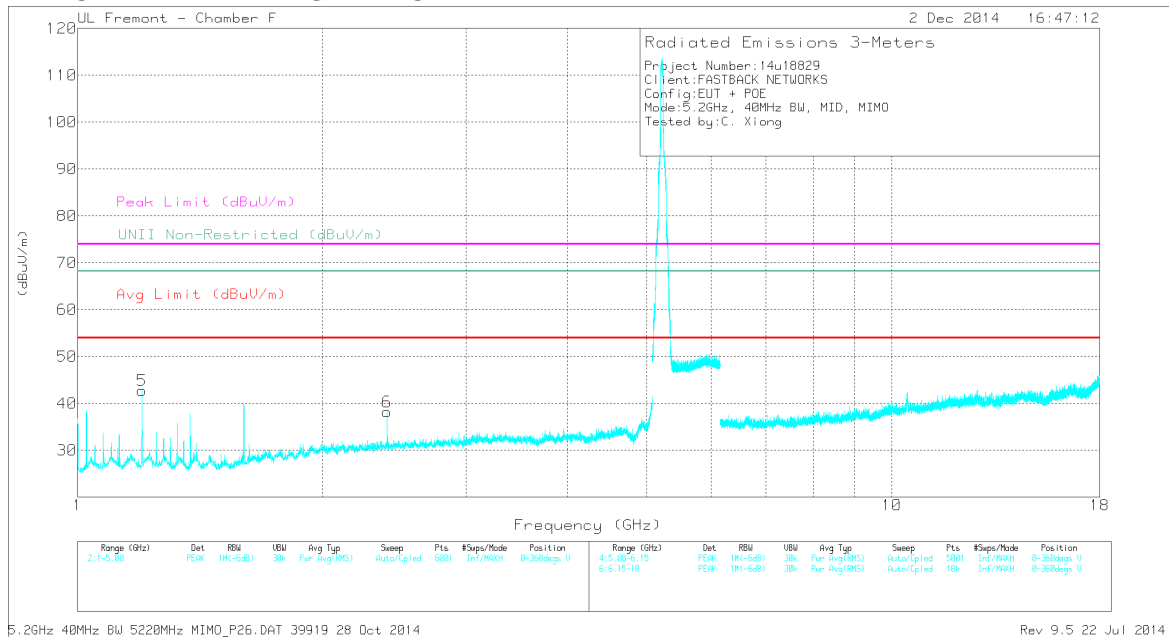

DATA

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1	53.78	PK1	28	-35.9	45.88	-	-	74	-28.12	-	-	346	182	H
1	* 1	49.31	AD1	28	-35.9	41.41	54	-12.59	-	-	-	-	346	182	H
2	* 1.025	55.66	PK1	28.1	-35.9	47.86	-	-	74	-26.14	-	-	43	117	H
2	* 1.025	51.25	AD1	28.1	-35.9	43.45	54	-10.55	-	-	-	-	43	117	H
3	* 1.2	54.52	PK1	29	-35.7	47.82	-	-	74	-26.18	-	-	17	178	H
3	* 1.2	51.49	AD1	29	-35.7	44.79	54	-9.21	-	-	-	-	17	178	H
4	* 1.6	53.28	PK1	28.6	-35.3	46.58	-	-	74	-27.42	-	-	63	124	H
4	* 1.6	49.81	AD1	28.6	-35.3	43.11	54	-10.89	-	-	-	-	63	124	H
5	* 1.2	55.76	PK1	29	-35.7	49.06	-	-	74	-24.94	-	-	47	246	V
5	* 1.2	52.98	AD1	29	-35.7	46.28	54	-7.72	-	-	-	-	47	246	V
6	2.4	46.89	PK1	31.8	-34.5	44.19	-	-	-	-	68.2	-24.01	37	111	V
6	* 1.6	45.48	AD1	28.6	-35.3	38.78	54	-15.22	-	-	-	-	33	102	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL PLOT

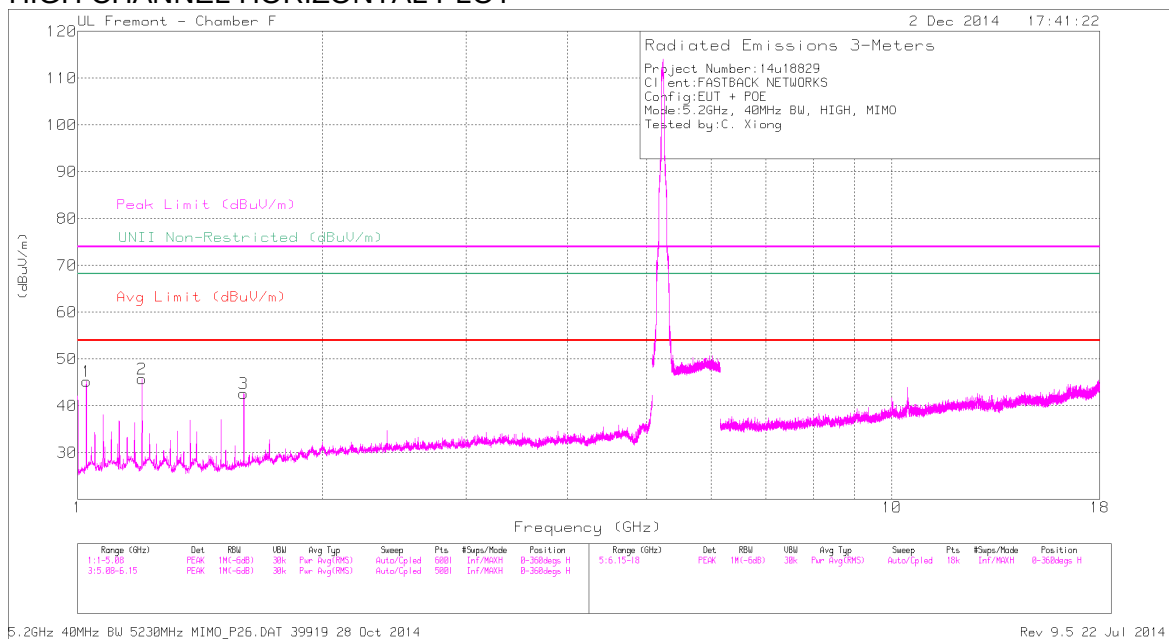

HIGH CHANNEL VERTICAL PLOT

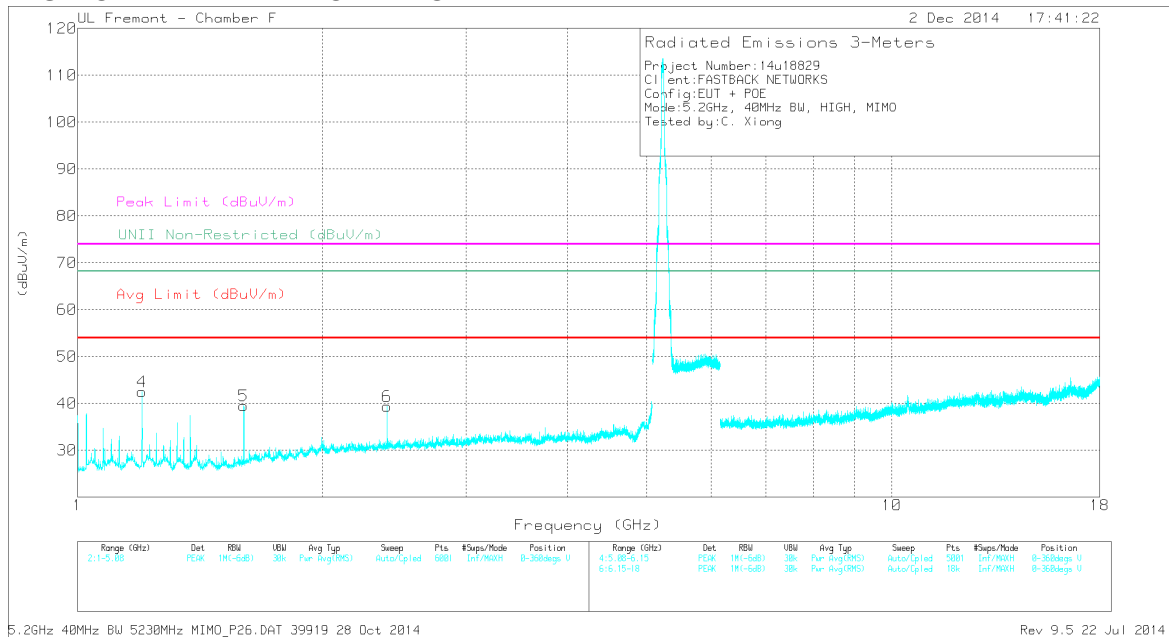

DATA

Radiated Emissions

Marder	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.025	55.14	PK1	28.1	-35.9	47.34	-	-	74	-26.66	-	-	40	192	H
1	* 1.025	50.84	AD1	28.1	-35.9	43.04	54	-10.96	-	-	-	-	40	192	H
2	* 1.2	54.56	PK1	29	-35.7	47.86	-	-	74	-26.14	-	-	35	198	H
2	* 1.2	51.65	AD1	29	-35.7	44.95	54	-9.05	-	-	-	-	35	198	H
3	* 1.6	52.73	PK1	28.6	-35.3	46.03	-	-	74	-27.97	-	-	64	124	H
3	* 1.6	49.97	AD1	28.6	-35.3	43.27	54	-10.73	-	-	-	-	64	124	H
4	* 1.2	55.53	PK1	29	-35.7	48.83	-	-	74	-25.17	-	-	47	244	V
4	* 1.2	52.77	AD1	29	-35.7	46.07	54	-7.93	-	-	-	-	47	244	V
5	* 1.6	50.26	PK1	28.6	-35.3	43.56	-	-	74	-30.44	-	-	27	103	V
5	* 1.6	44.88	AD1	28.6	-35.3	38.18	54	-15.82	-	-	-	-	27	103	V
6	2.4	47.57	PK1	31.8	-34.5	44.87	-	-	-	-	68.2	-23.33	41	116	V



* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

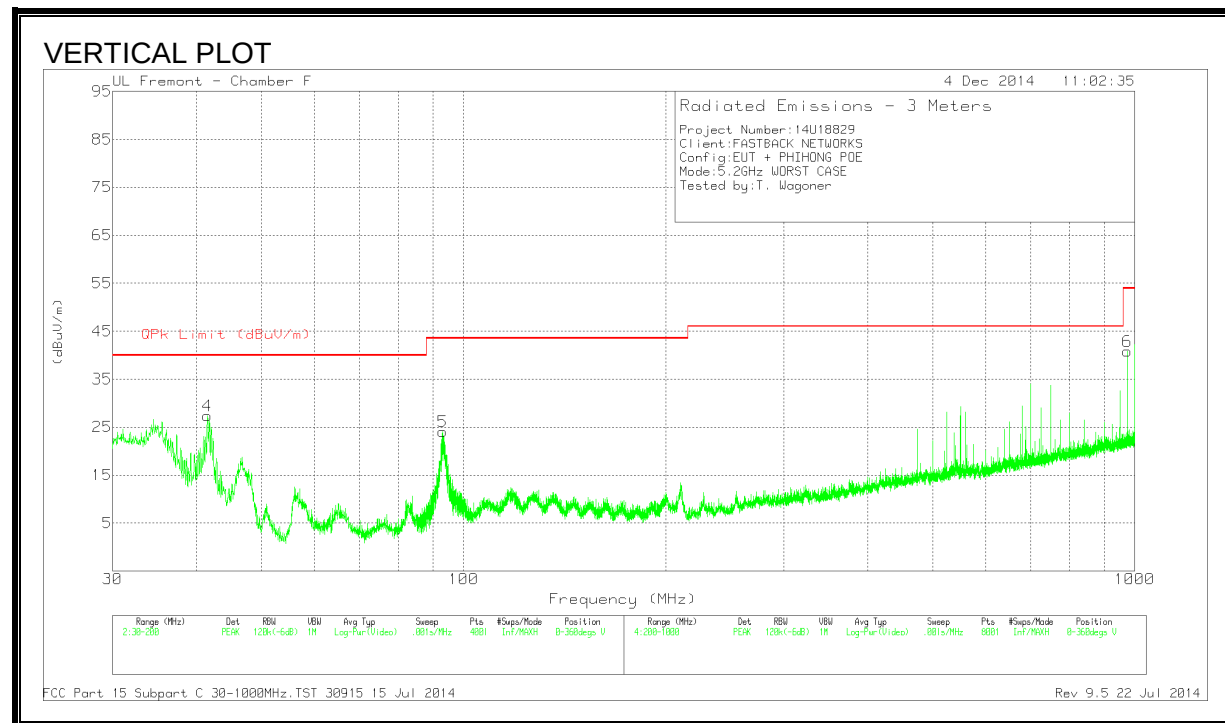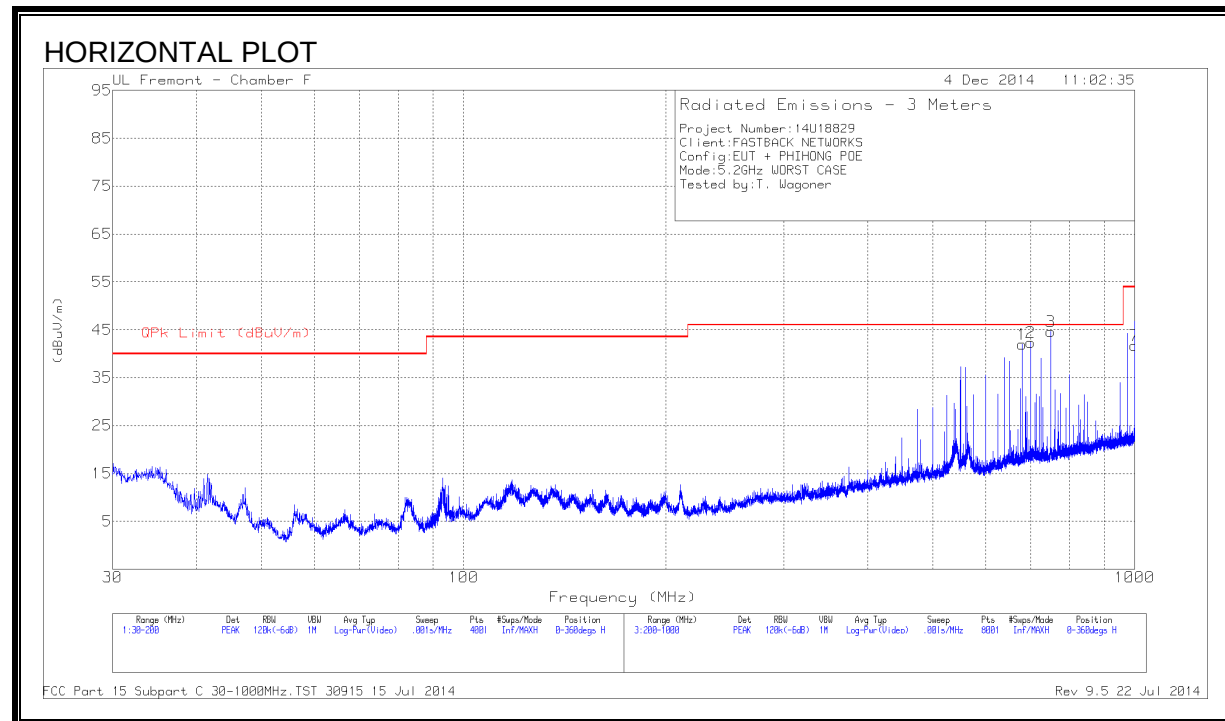

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	41.56	46.71	PK	12.7	-32	27.41	40	-12.59	0-360	100	V
5	93.07	47.27	PK	8.4	-31.6	24.07	43.52	-19.45	0-360	100	V
1	680	51.71	PK	20	-29.7	42.01	46.02	-4.01	0-360	100	H
1	680	51.94	QP	20	-29.7	42.24	46.02	-3.78	328	106	H
2	700	51.8	PK	20.3	-29.7	42.4	46.02	-3.62	0-360	100	H
2	700	54.87	QP	20.3	-29.7	45.47	46.02	-.55	286	104	H
3	750	53.45	PK	20.8	-29.6	44.65	46.02	-1.37	0-360	100	H
3	750	50.33	QP	20.8	-29.6	41.53	46.02	-4.49	268	101	H
7	* 999.9	45.85	PK	23.4	-27.5	41.75	53.97	-12.22	0-360	201	H
6	* 975	45.56	PK	23.1	-27.8	40.86	53.97	-13.11	0-360	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

QP - Quasi-Peak detector

9.4. WORST-CASE 18 to 26 GHz

SPURIOUS EMISSIONS 18000 TO 26000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

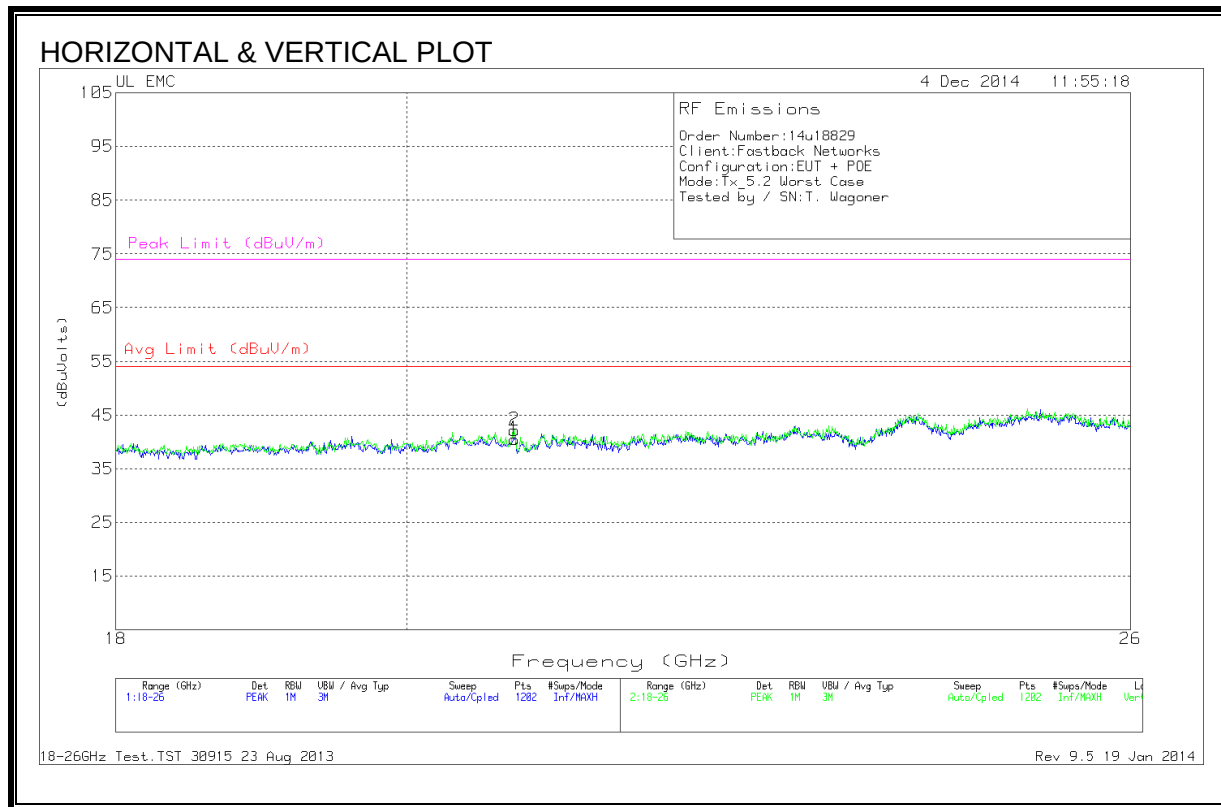


HORIZONTAL & VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T125 (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	20.798	41.3	PK	33.1	-24.4	-9.5	40.5	54	-13.5	74	-33.5
2	20.798	42.97	PK	33.1	-24.4	-9.5	42.167	54	-11.83	74	-31.833

PK - Peak detector

9.5. WORST-CASE 26 to 40 GHz

SPURIOUS EMISSIONS 26 TO 40 GHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

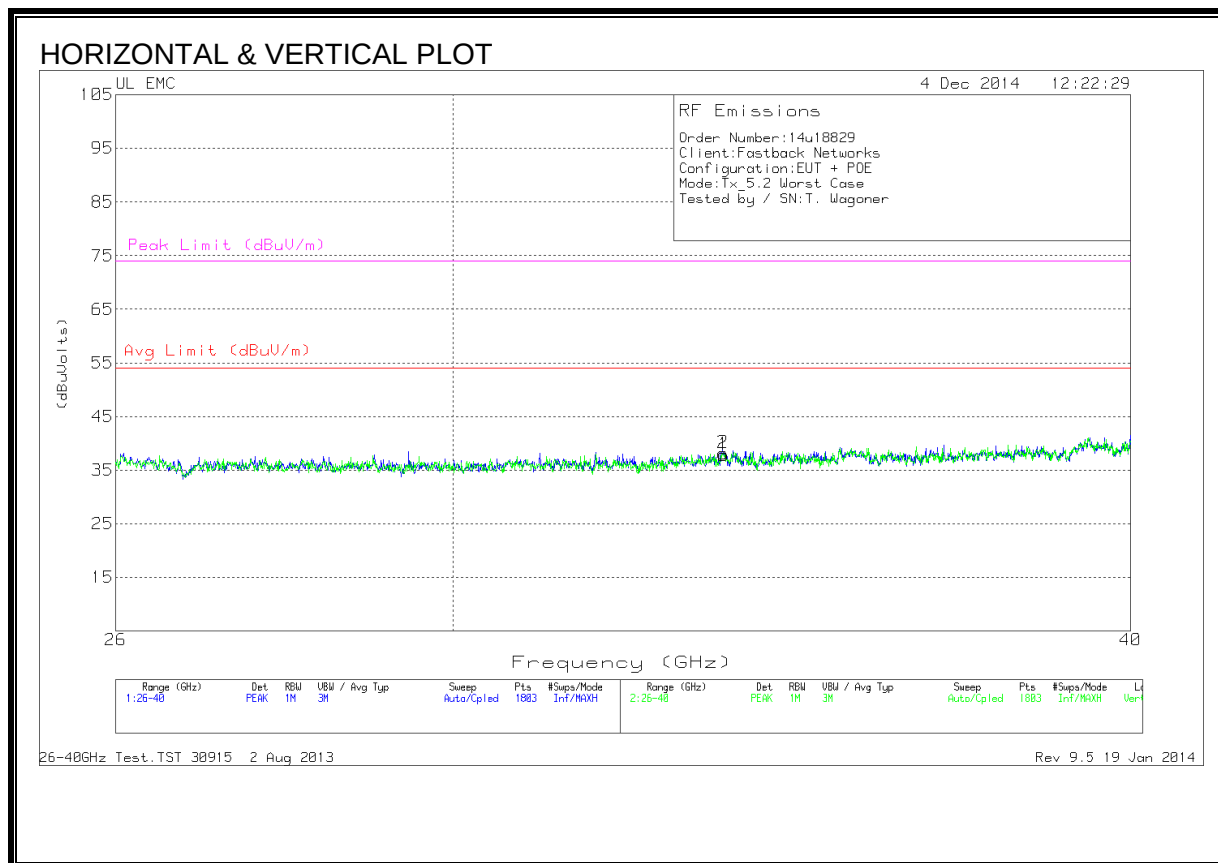

HORIZONTAL & VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T90 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	33.653	47.33	PK	36.9	-36.9	-9.5	37.833	54	-16.167	74	-36.167
2	33.645	47.57	PK	36.9	-36.8	-9.5	38.167	54	-15.833	74	-35.833

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS


FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50


^{*} Decreases with the logarithm of the frequency.

WORST CASE RESULTS

LINE 1 RESULTS

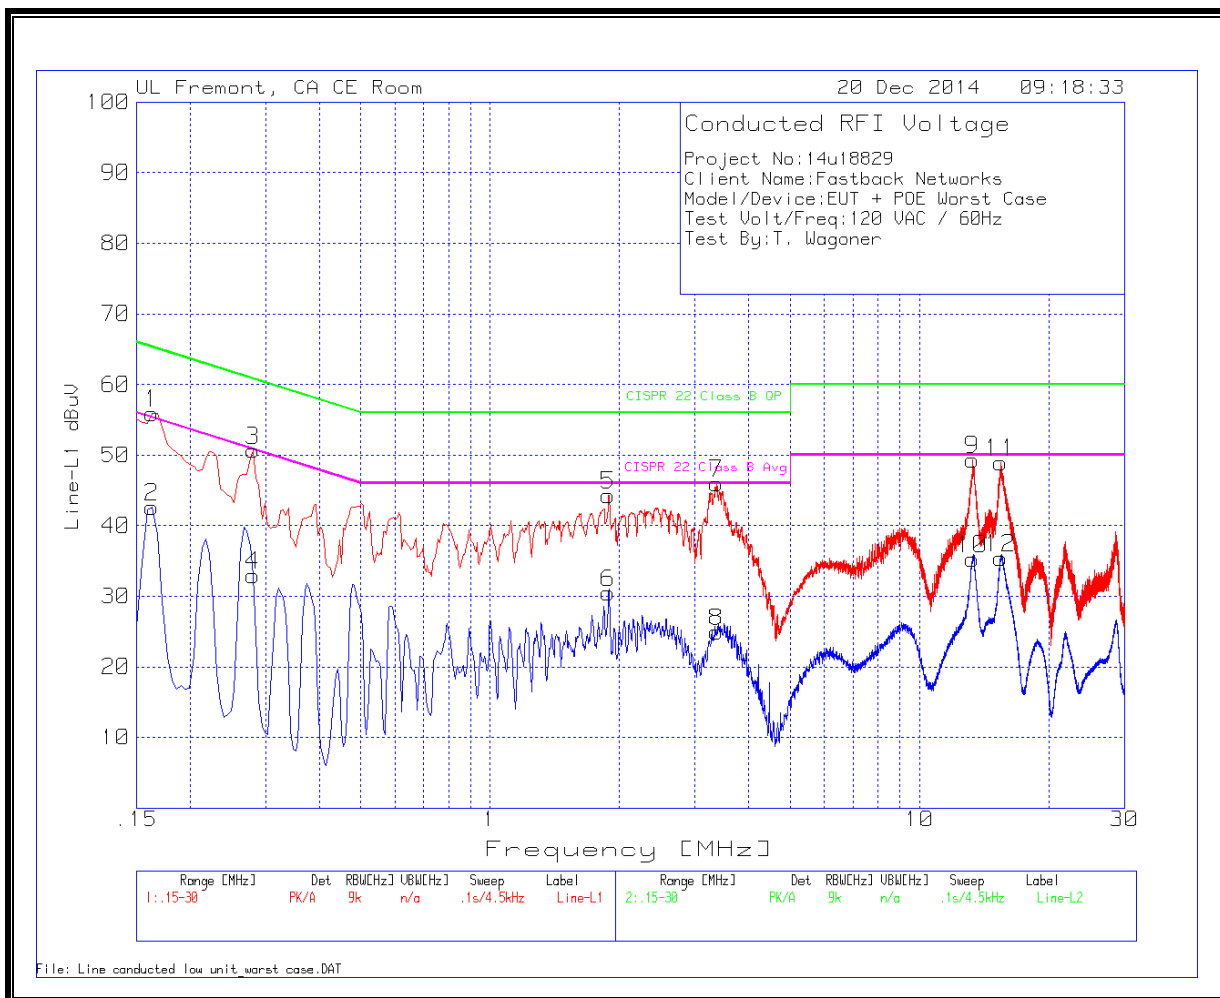

LINE 2 RESULTS

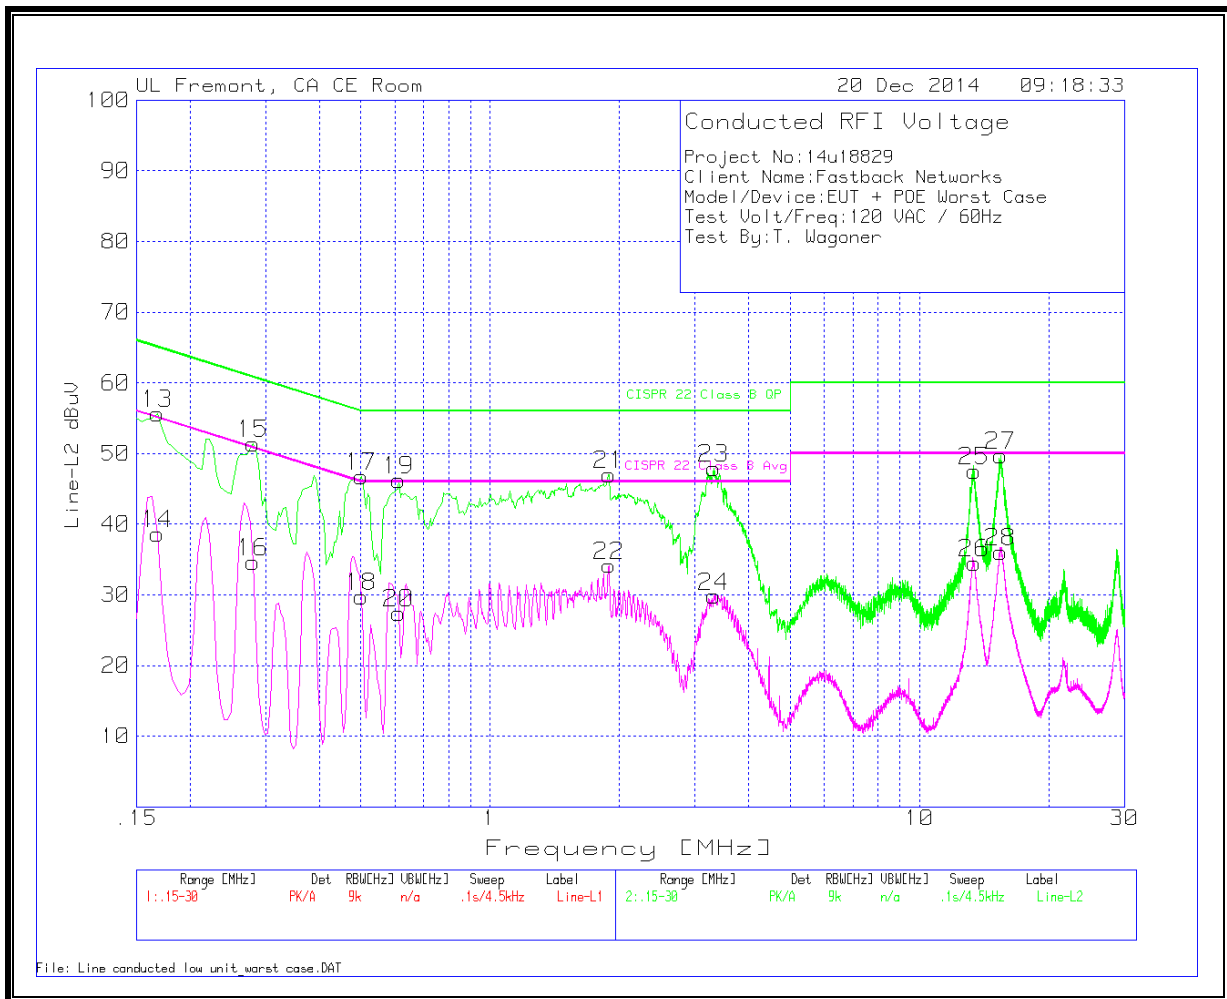

DATA

Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1635	54.72	PK	1.2	0	55.92	65.3	-9.38	-	-
2	.1635	41.45	Av	1.2	0	42.65	-	-	55.3	-12.65
3	.2805	50.08	PK	.6	0	50.68	60.8	-10.12	-	-
4	.2805	32.33	Av	.6	0	32.93	-	-	50.8	-17.87
5	1.887	43.98	PK	.2	.1	44.28	56	-11.72	-	-
6	1.887	30.15	Av	.2	.1	30.45	-	-	46	-15.55
7	3.372	45.72	PK	.2	.1	46.02	56	-9.98	-	-
8	3.372	24.61	Av	.2	.1	24.91	-	-	46	-21.09
9	13.272	48.94	PK	.2	.2	49.34	60	-10.66	-	-
10	13.272	34.83	Av	.2	.2	35.23	-	-	50	-14.77
11	15.45	48.5	PK	.3	.2	49	60	-11	-	-
12	15.45	34.94	Av	.3	.2	35.44	-	-	50	-14.56

Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
13	.168	54.33	PK	1.3	0	55.63	65.1	-9.47	-	-
14	.168	37.38	Av	1.3	0	38.68	-	-	55.1	-16.42
15	.2805	50.79	PK	.6	0	51.39	60.8	-9.41	-	-
16	.2805	34.01	Av	.6	0	34.61	-	-	50.8	-16.19
17	.501	46.39	PK	.4	0	46.79	56	-9.21	-	-
18	.501	29.34	Av	.4	0	29.74	-	-	46	-16.26
19	.6135	45.97	PK	.3	0	46.27	56	-9.73	-	-
20	.6135	27.12	Av	.3	0	27.42	-	-	46	-18.58
21	1.8915	46.74	PK	.2	.1	47.04	56	-8.96	-	-
22	1.8915	33.88	Av	.2	.1	34.18	-	-	46	-11.82
23	3.3225	47.63	PK	.2	.1	47.93	56	-8.07	-	-
24	3.3225	29.5	Av	.2	.1	29.8	-	-	46	-16.2
25	13.3845	47	PK	.3	.2	47.5	60	-12.5	-	-
26	13.3845	34	Av	.3	.2	34.5	-	-	50	-15.5
27	15.432	49.19	PK	.3	.2	49.69	60	-10.31	-	-
28	15.432	35.61	Av	.3	.2	36.11	-	-	50	-13.89