

TEST REPORT

Applicant	CORSAIR MEMORY, Inc.
Address	115 North McCarthy Blvd, Milpitas, CA 95035, USA

Manufacturer or Supplier	CORSAIR MEMORY, Inc.
Address	115 North McCarthy Blvd, Milpitas, CA 95035, USA
Product	Dongle
Brand Name	Scuf
Model	RGC0012
Additional Model & Model Difference	N/A
Date of tests	Jul. 14, 2026 ~ Jul. 16, 2026

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Andrew Sha Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Sep. 03, 2026

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
3.5 CONFIGURATION OF SYSTEM UNDER TEST	12
3.6 DUTY CYCLE OF TESET SIGNAL.....	13
4 TEST TYPES AND RESULTS.....	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2 TEST INSTRUMENTS.....	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITIONS	16
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2 TEST INSTRUMENTS.....	20
4.2.3 TEST PROCEDURES	21
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP	22
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS	24
4.3 6DB BANDWIDTH MEASUREMENT	38
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	38
4.3.2 TEST INSTRUMENTS.....	38
4.3.3 TEST PROCEDURE.....	39
4.3.4 DEVIATION FROM TEST STANDARD	39



4.3.5	TEST SETUP	40
4.3.6	EUT OPERATING CONDITIONS	40
4.3.7	TEST RESULTS	41
4.4	CONDUCTED OUTPUT POWER	45
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	45
4.4.2	TEST SETUP	45
4.4.3	TEST INSTRUMENTS	45
4.4.4	TEST PROCEDURES	45
4.4.5	DEVIATION FROM TEST STANDARD	45
4.4.6	EUT OPERATING CONDITIONS	45
4.4.7	TEST RESULTS	46
4.4.7.1	MAXIMUM PEAK OUTPUT POWER	46
4.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.2	TEST SETUP	48
4.5.3	TEST INSTRUMENTS	48
4.5.4	TEST PROCEDURE	48
4.5.5	DEVIATION FROM TEST STANDARD	48
4.5.6	EUT OPERATING CONDITION	49
4.5.7	TEST RESULTS	49
4.6	OUT OF BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	53
4.6.2	TEST SETUP	53
4.6.3	TEST INSTRUMENTS	53
4.6.4	TEST PROCEDURE	53
4.6.5	DEVIATION FROM TEST STANDARD	54
4.6.6	EUT OPERATING CONDITION	54
4.6.7	TEST RESULTS	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	58
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	59



BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2606WDG0365-2	Original release	Sep. 03, 2026



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of Band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9KHz ~ 30MHz	3.36dB
Radiated emissions	30MHz ~ 1GMHz	4.65dB
	1GHz ~ 18GHz	5.01dB
	18GHz ~ 40GHz	4.10dB
Occupied Channel Bandwidth	1GHz ~ 18GHz	$\pm 1.132 \times 10^{-4} \%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Dongle
MODEL NO.	RGC0012
ADDITIONAL MODELS	N/A
FCC ID	2AAFM-RGC0012
NOMINAL VOLTAGE	DC 5V from USB host unit
MODULATION TECHNOLOGY	GFSK (2Mbps, 4Mbps)
OPERATING FREQUENCY	2404-2478MHz for 2Mbps 2406-2476MHz for 4Mbps
PEAK OUTPUT POWER	4.467mW (Max. Measured)
ANTENNA TYPE	Chip Antenna, 1.8dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2606WDG0365-2) for detailed product photo.



3.2 DESCRIPTION OF TEST MODES

37 channels are provided for GFSK 2Mbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2404	15	2434	29	2462
1	2406	16	2436	30	2464
2	2408	17	2438	31	2466
3	2410	18	2440	32	2468
4	2412	19	2442	33	2470
5	2414	20	2444	34	2472
6	2416	21	2446	35	2474
7	2418	22	2448	36	2476
8	2420	23	2450	37	2478
9	2422	24	2452		
10	2424	25	2454		
12	2428	26	2456		
13	2430	27	2458		
14	2432	28	2460		

33 channels are provided for GFSK 4Mbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2406	18	2440	32	2468
2	2408	19	2442	33	2470
3	2410	20	2444	34	2472
4	2412	21	2446	35	2474
5	2414	22	2448	36	2476
6	2416	23	2450		
7	2418	24	2452		
8	2420	25	2454		
9	2422	26	2456		
13	2430	27	2458		
14	2432	28	2460		
15	2434	29	2462		
16	2436	30	2464		
17	2438	31	2466		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	DC 5V powered by Laptop

Where

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

**RADIATED EMISSION TEST (BELOW 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
2.4GHz wireless	0 to 37	0, 18, 37	GFSK	2
2.4GHz wireless	1 to 36	1, 18, 36	GFSK	4

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
2.4GHz wireless	0 to 37	0, 18, 37	GFSK	2
2.4GHz wireless	1 to 36	1, 18, 36	GFSK	4

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
2.4GHz wireless	2.4GHz wireless Link

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	DATA RATE (Mbps)
2.4GHz wireless	0 to 37	0, 18, 37	GFSK	2
2.4GHz wireless	1 to 36	1, 18, 36	GFSK	4



Test Report No.: RF2606WDG0365-2

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 55%RH	DC 5V from Laptop	Ludius
RE≥1G	25deg. C, 55%RH	DC 5V from Laptop	Ludius
PLC	25deg. C, 55%RH	DC 5V from Laptop	Summer
APCM	20deg. C, 55%RH	DC 5V from Laptop	Leo



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2020

Note: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	Provided by
1	Notebook	DELL	Latitude 5420	127710614	Lab

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.0m; DC Line: Unshielded, Detachable 1.5m.




3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted Emission Test

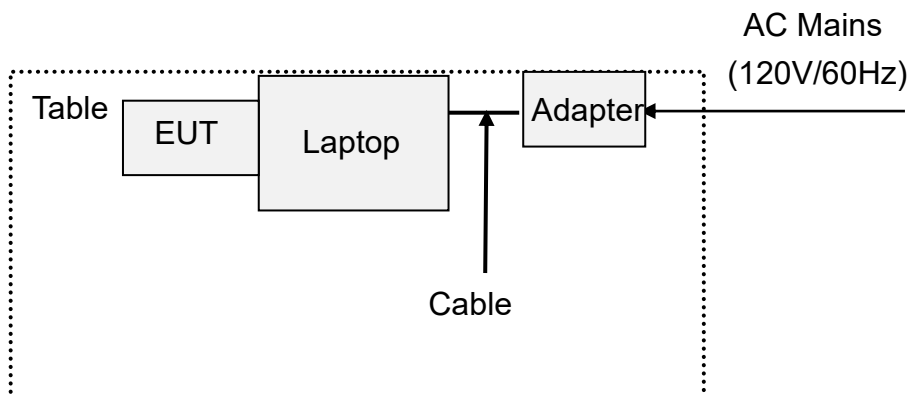

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

For Radiated Emission Test

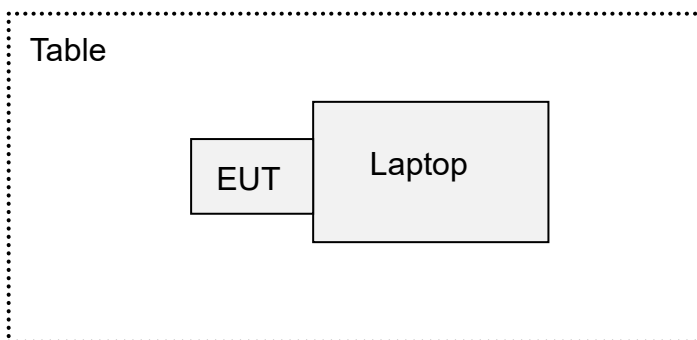


Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6 DUTY CYCLE OF TESET SIGNAL

Test Mode	On Time (ms)	Period (ms)	Duty Cycle (Linear)	Duty Cycle (%)	1/T Min. VBW (kHz)
GFSK 2M	0.193	0.630	0.3063	30.63	10
GFSK 4M	0.100	0.626	0.1597	15.97	10

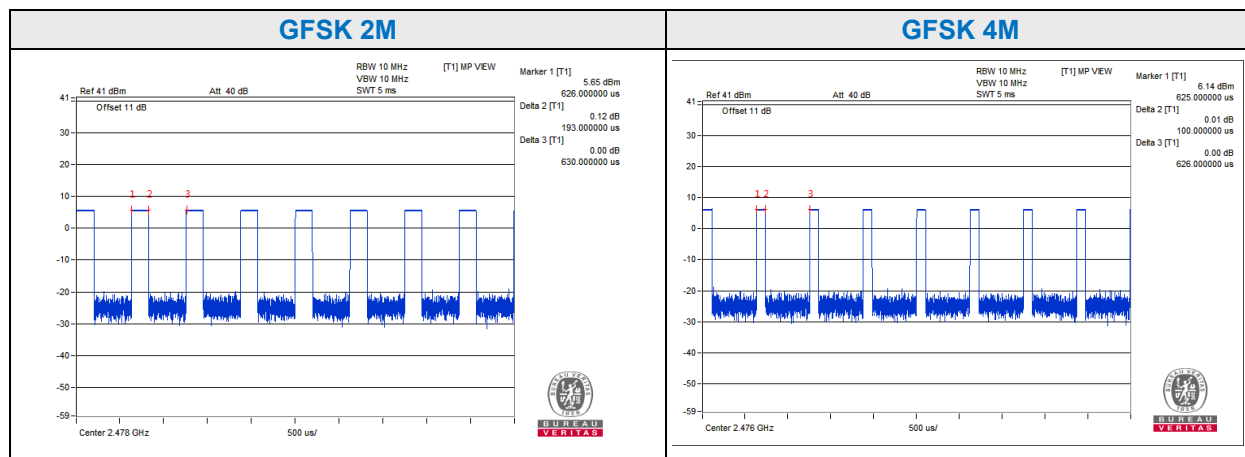



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Oct. 10, 26
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Oct. 10, 26
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Oct. 09, 26
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 07, 27
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

NOTES:

1. The test was performed in shielded room 553.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

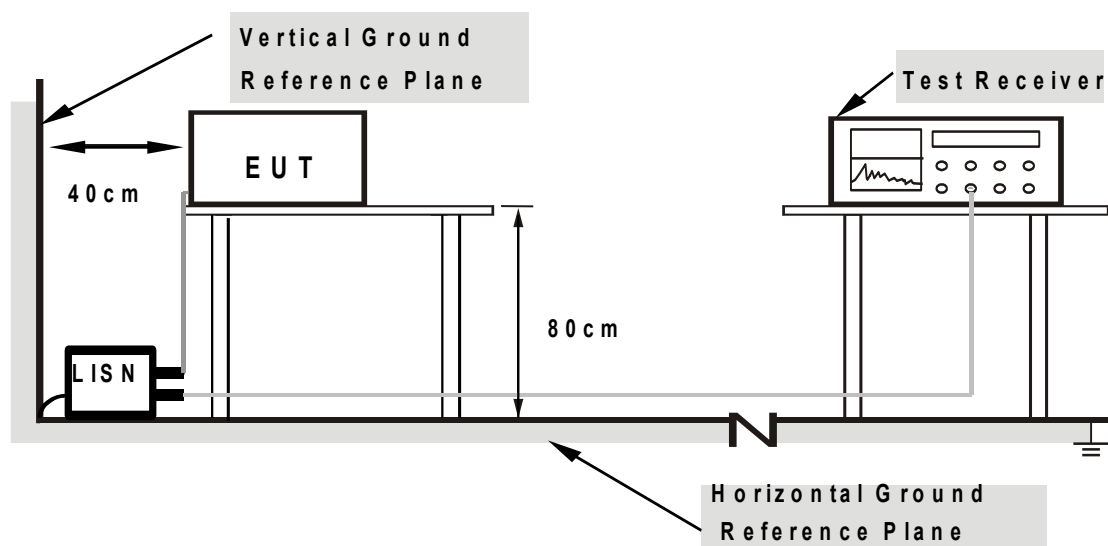

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED TEST DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.57	36.98	11.65	46.55	21.22	66.00	56.00	-19.45	-34.78
2	0.16125	9.58	36.31	10.32	45.89	19.90	65.40	55.40	-19.51	-35.50
3	0.19500	9.58	33.05	7.97	42.63	17.55	63.82	53.82	-21.19	-36.27
4	0.25125	9.59	30.99	5.01	40.58	14.60	61.72	51.72	-21.14	-37.12
5	0.36581	9.60	19.99	11.78	29.59	21.38	58.60	48.60	-29.01	-27.22
6	0.40229	9.59	24.44	22.65	34.03	32.24	57.81	47.81	-23.78	-15.57

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

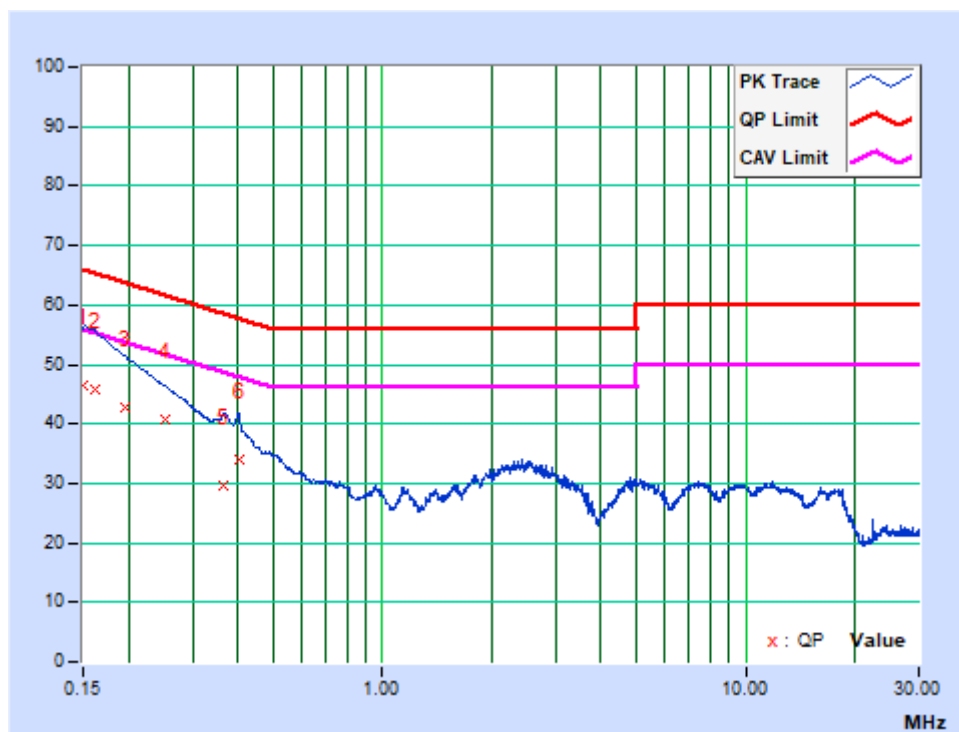




**BUREAU
VERITAS**

Test Report No.: RF2606WDG0365-2

PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.56	37.45	11.70	47.01	21.26	65.88	55.88	-18.87	-34.62
2	0.16800	9.57	33.11	8.85	42.68	18.42	65.06	55.06	-22.38	-36.64
3	0.19500	9.57	31.93	8.35	41.50	17.92	63.82	53.82	-22.32	-35.90
4	0.25800	9.58	28.68	7.68	38.26	17.26	61.50	51.50	-23.24	-34.24
5	0.40229	9.59	20.86	19.19	30.45	28.78	57.81	47.81	-27.36	-19.03
6	0.62687	9.60	15.57	6.28	25.17	15.88	56.00	46.00	-30.83	-30.12

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

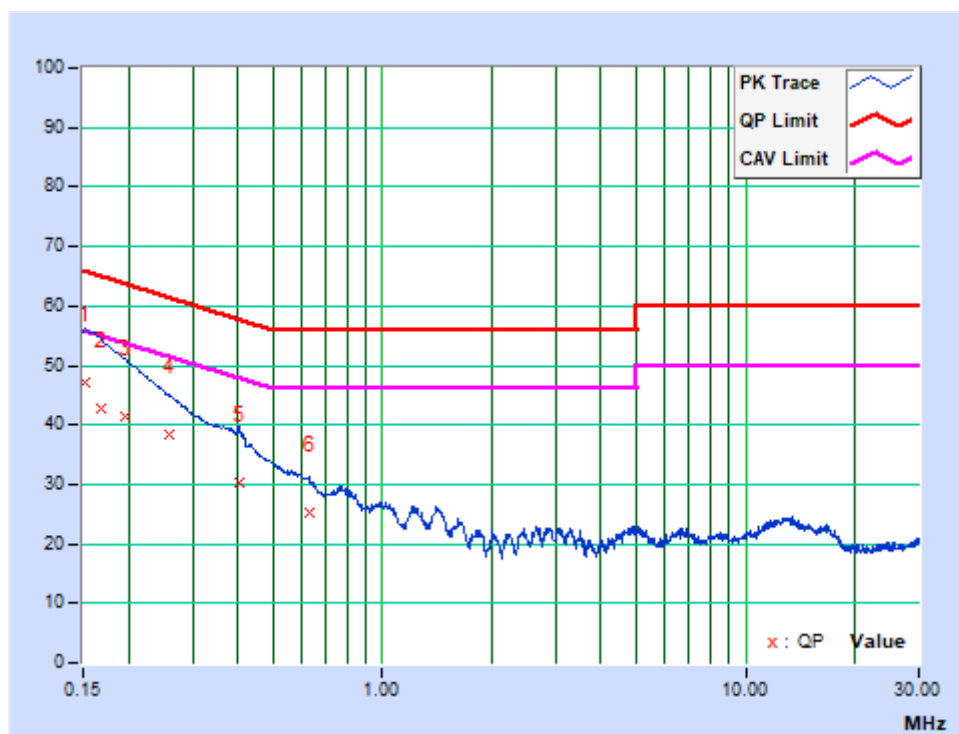

**Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Oct. 09, 26
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Apr. 08, 27
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	Apr. 13, 27
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Feb. 12, 27
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 14, 26
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	0085519	Oct. 11, 26
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 19, 27
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 16, 27
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Feb. 12, 27
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Oct. 10, 26

NOTE:

1. The test was performed in 966 Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. The FCC Site registration No. is 749762, and the designation number is CN1174.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

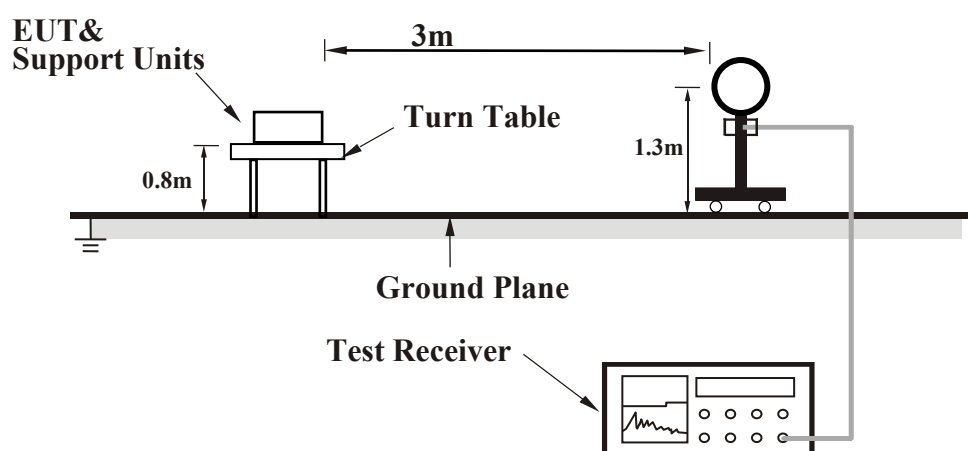


Below 1GHz test setup

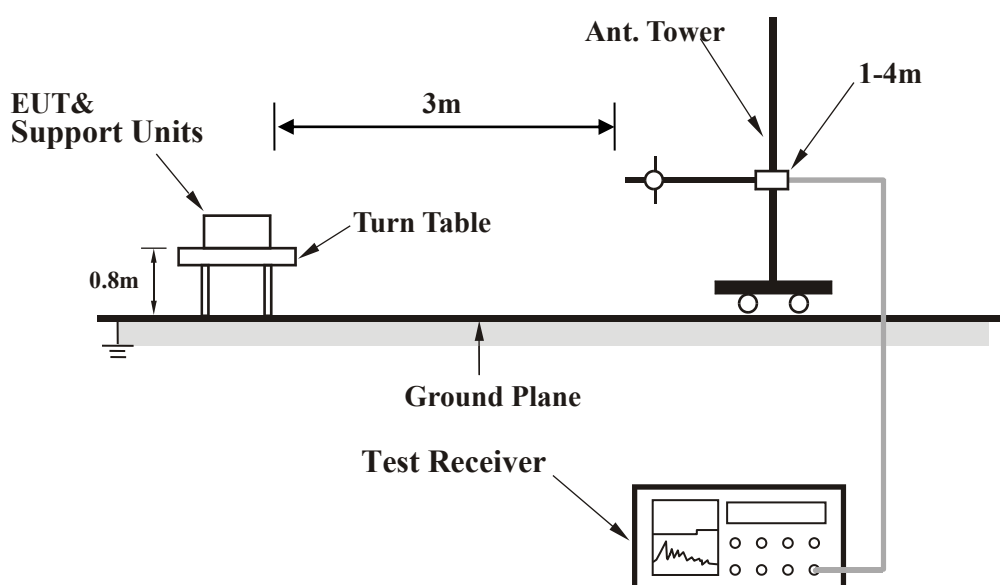



Above 1GHz test setup

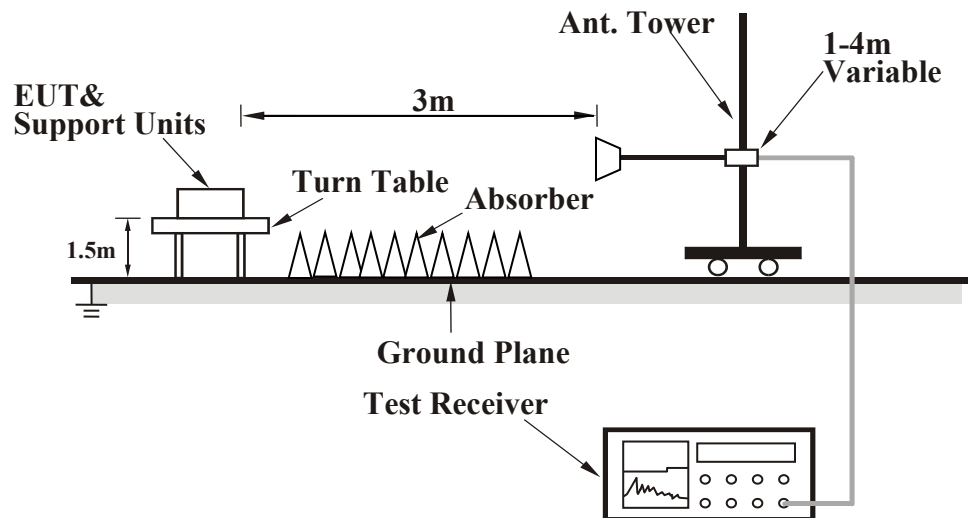

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA:

CHANNEL	TX Channel 37	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.44	13.65	40.00	-26.35	115	185	30.59	-16.94
2	143.48	13.70	43.50	-29.80	138	162	30.39	-16.69
3	309.81	14.13	46.00	-31.87	160	139	29.70	-15.57
4	501.01	19.69	46.00	-26.31	184	116	30.52	-10.83
5	583.40	21.07	46.00	-24.93	201	99	29.85	-8.78
6	689.10	22.69	46.00	-23.31	238	63	29.72	-7.03

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

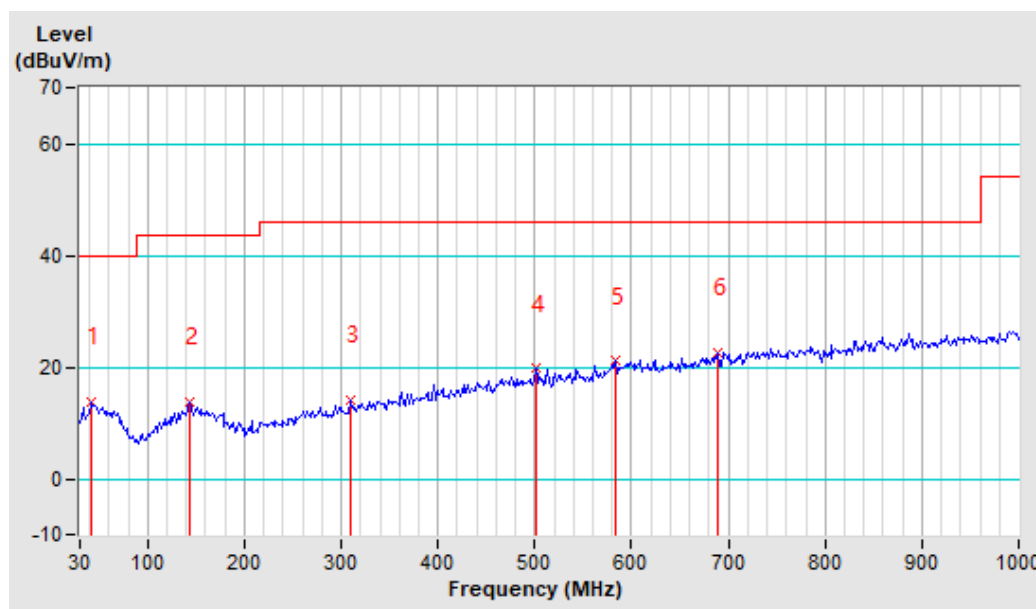



BUREAU
VERITAS


Test Report No.: RF2606WDG0365-2

CHANNEL	TX Channel 37	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.54	13.59	40.00	-26.41	158	222	30.33	-16.74
2	152.80	14.42	43.50	-29.08	184	196	30.89	-16.47
3	410.85	17.13	46.00	-28.87	137	243	29.92	-12.79
4	508.78	19.04	46.00	-26.96	101	283	29.74	-10.70
5	611.38	22.14	46.00	-23.86	117	263	30.21	-8.07
6	731.07	23.22	46.00	-22.78	100	303	29.54	-6.32

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

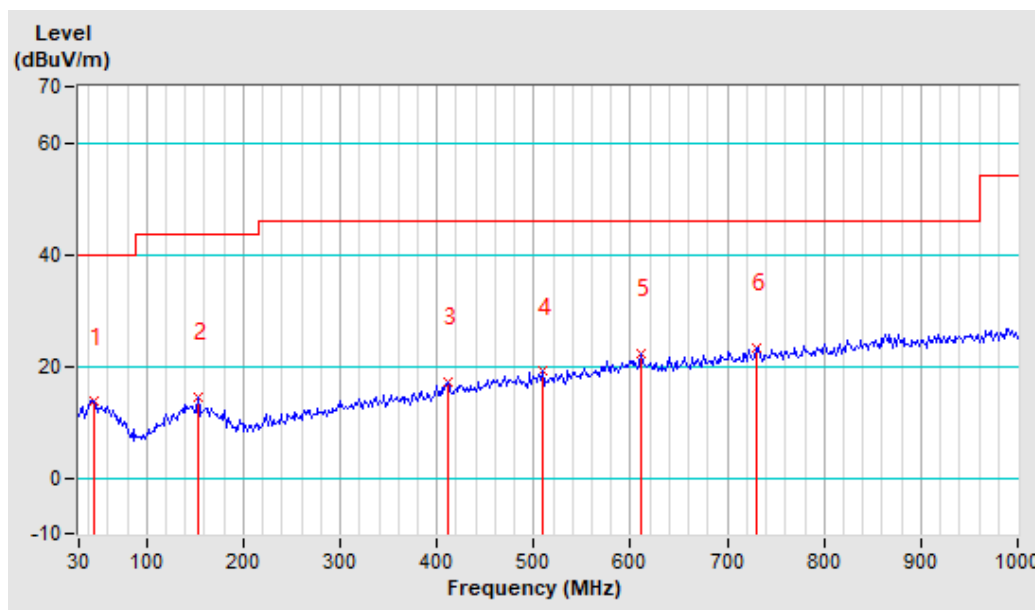

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



ABOVE 1GHz TEST DATA

GFSK (2 Mbps)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.09 PK	74.00	-28.91	120	15	42.84	2.25
2	2390.00	32.52 AV	54.00	-21.48	120	15	30.27	2.25
3	*2404.00	99.08 PK			130	142	96.81	2.27
4	*2404.00	98.25 AV			130	142	95.98	2.27
5	4808.00	47.76 PK	74.00	-26.24	188	96	41.88	5.88
6	4808.00	36.52 AV	54.00	-17.48	188	96	30.64	5.88
7	7212.00	48.12 PK	74.00	-25.88	131	120	40.20	7.92
8	7212.00	36.96 AV	54.00	-17.04	131	120	29.04	7.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.61 PK	74.00	-28.39	193	147	43.36	2.25
2	2390.00	32.77 AV	54.00	-21.23	193	147	30.52	2.25
3	*2404.00	98.97 PK			128	123	96.70	2.27
4	*2404.00	98.04 AV			128	123	95.77	2.27
5	4808.00	47.54 PK	74.00	-26.46	182	219	41.66	5.88
6	4808.00	36.51 AV	54.00	-17.49	182	219	30.63	5.88
7	7212.00	48.22 PK	74.00	-25.78	135	162	40.30	7.92
8	7212.00	38.05 AV	54.00	-15.95	135	162	30.13	7.92

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Horizontal

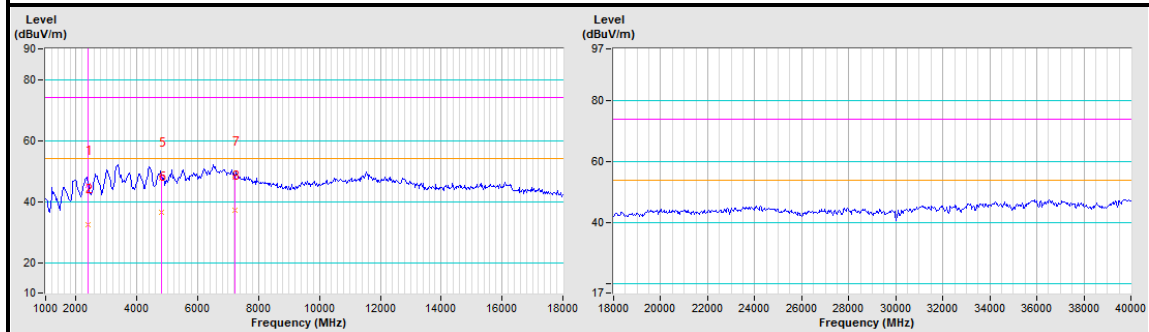

Vertical

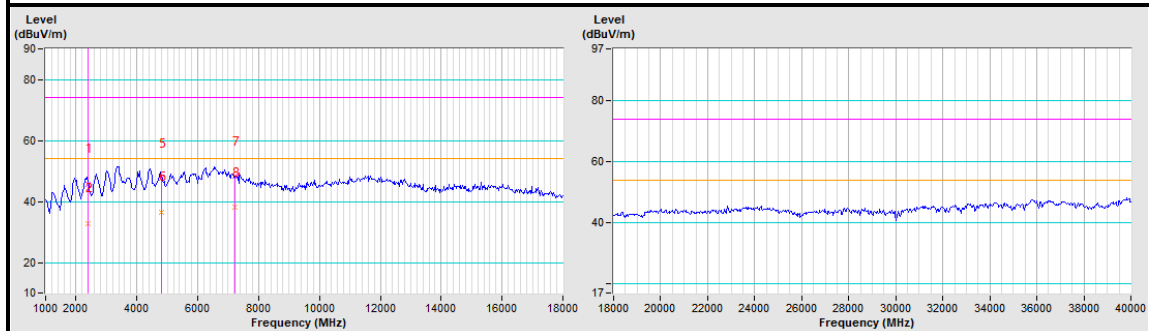

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



CHANNEL	TX Channel 18	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	100.20 PK			128	152	97.89	2.31
2	*2440.00	96.34 AV			128	152	94.03	2.31
3	4880.00	47.62 PK	74.00	-26.38	125	311	41.88	5.74
4	4880.00	37.05 AV	54.00	-16.95	125	311	31.31	5.74
5	7320.00	48.15 PK	74.00	-25.85	146	75	40.58	7.57
6	7320.00	37.93 AV	54.00	-16.07	146	75	30.36	7.57
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	99.95 PK			136	24	97.64	2.31
2	*2440.00	96.11 AV			136	24	93.80	2.31
3	4880.00	48.06 PK	74.00	-25.94	125	110	42.32	5.74
4	4880.00	38.21 AV	54.00	-15.79	125	110	32.47	5.74
5	7320.00	47.99 PK	74.00	-26.01	103	142	40.42	7.57
6	7320.00	37.16 AV	54.00	-16.84	103	142	29.59	7.57

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Horizontal

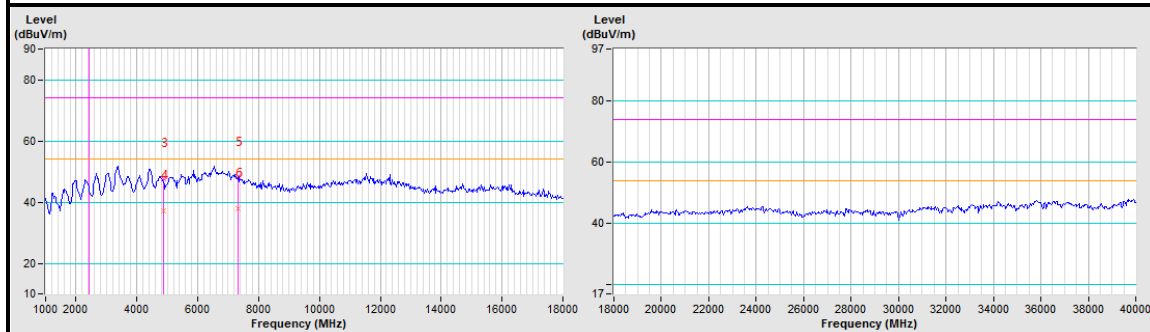

Vertical

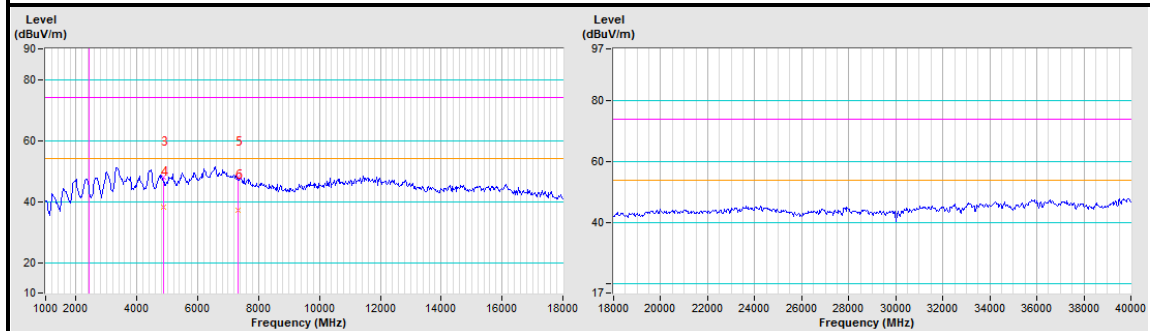

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



CHANNEL	TX Channel 37	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	98.91 PK			122	134	96.55	2.36
2	*2478.00	95.76 AV			122	134	93.40	2.36
3	2483.50	45.10 PK	74.00	-28.90	103	142	42.74	2.36
4	2483.50	33.42 AV	54.00	-20.58	103	142	31.06	2.36
5	4956.00	46.59 PK	74.00	-27.41	132	177	41.01	5.58
6	4956.00	37.03 AV	54.00	-16.97	132	177	31.45	5.58
7	7434.00	48.08 PK	74.00	-25.92	136	24	40.89	7.19
8	7434.00	38.61 AV	54.00	-15.39	136	24	31.42	7.19
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	98.68 PK			163	20	96.32	2.36
2	*2478.00	95.34 AV			163	20	92.98	2.36
3	2483.50	45.63 PK	74.00	-28.37	136	251	43.27	2.36
4	2483.50	33.79 AV	54.00	-20.21	136	251	31.43	2.36
5	4956.00	46.21 PK	74.00	-27.79	130	114	40.63	5.58
6	4956.00	35.92 AV	54.00	-18.08	130	114	30.34	5.58
7	7434.00	47.93 PK	74.00	-26.07	135	241	40.74	7.19
8	7434.00	37.17 AV	54.00	-16.83	135	241	29.98	7.19

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Horizontal

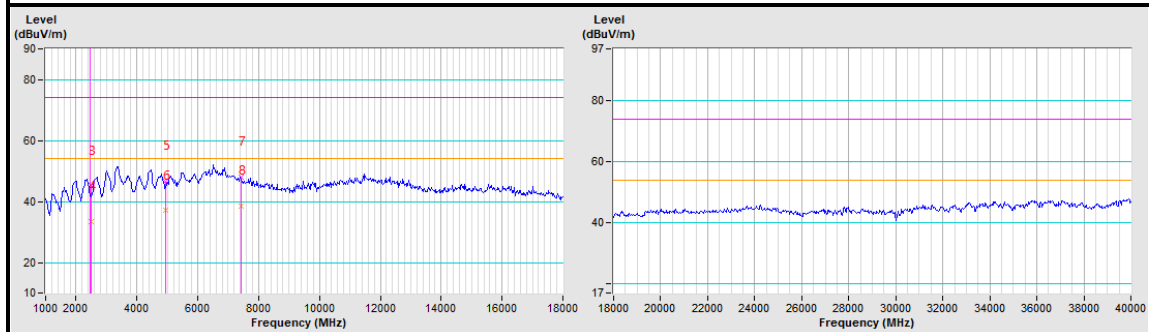

Vertical

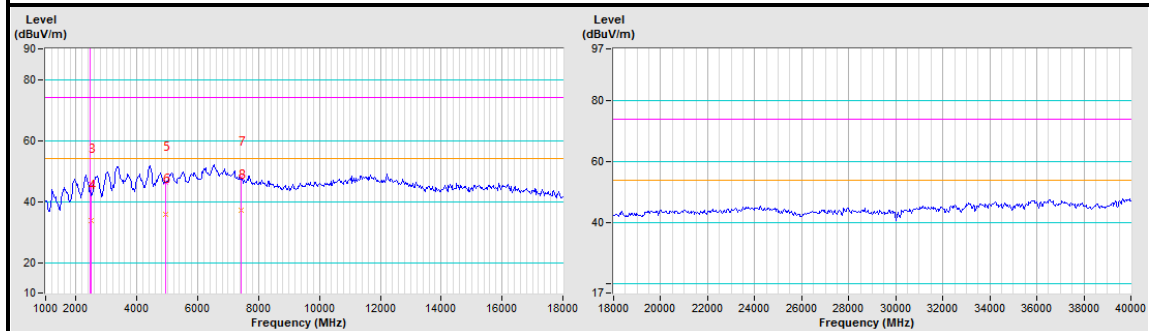



GFSK (4 Mbps)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.72 PK	74.00	-29.28	155	92	42.47	2.25
2	2390.00	32.95 AV	54.00	-21.05	155	92	30.70	2.25
3	*2406.00	101.00 PK			163	21	98.72	2.28
4	*2406.00	96.69 AV			163	21	94.41	2.28
5	4812.00	48.36 PK	74.00	-25.64	158	20	42.49	5.87
6	4812.00	37.16 AV	54.00	-16.84	158	20	31.29	5.87
7	7218.00	47.85 PK	74.00	-26.15	196	42	39.95	7.90
8	7218.00	38.12 AV	54.00	-15.88	196	42	30.22	7.90
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.05 PK	74.00	-28.95	123	12	42.80	2.25
2	2390.00	33.87 VA	54.00	-20.13	123	12	31.62	2.25
3	*2406.00	100.48 PK			132	112	98.20	2.28
4	*2406.00	95.61 AV			132	112	93.33	2.28
5	4812.00	47.48 PK	74.00	-26.52	152	142	41.61	5.87
6	4812.00	37.02 AV	54.00	-16.98	152	142	31.15	5.87
7	7218.00	48.01 PK	74.00	-25.99	177	154	40.11	7.90
8	7218.00	36.51 AV	54.00	-17.49	177	154	28.61	7.90

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Horizontal

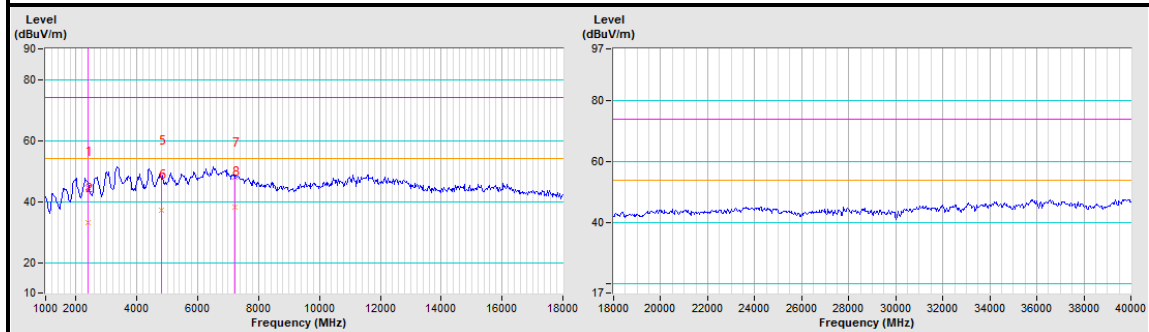

Vertical

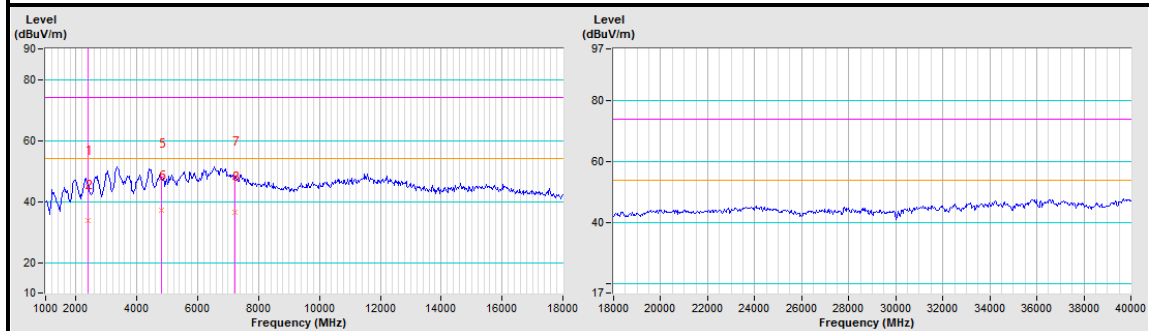



CHANNEL	TX Channel 18	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	100.26 PK			177	2	97.95	2.31
2	*2440.00	95.42 AV			177	2	93.11	2.31
3	4880.00	47.62 PK	74.00	-26.38	125	336	41.88	5.74
4	4880.00	37.45 AV	54.00	-16.55	125	336	31.71	5.74
5	7320.00	48.08 PK	74.00	-25.92	124	148	40.51	7.57
6	7320.00	38.65 AV	54.00	-15.35	124	148	31.08	7.57
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	99.97 PK			182	63	97.66	2.31
2	*2440.00	94.26 AV			182	63	91.95	2.31
3	4880.00	47.62 PK	74.00	-26.38	132	112	41.88	5.74
4	4880.00	36.25 AV	54.00	-17.75	132	112	30.51	5.74
5	7320.00	47.69 PK	74.00	-26.31	123	54	40.12	7.57
6	7320.00	37.05 AV	54.00	-16.95	123	54	29.48	7.57

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Horizontal

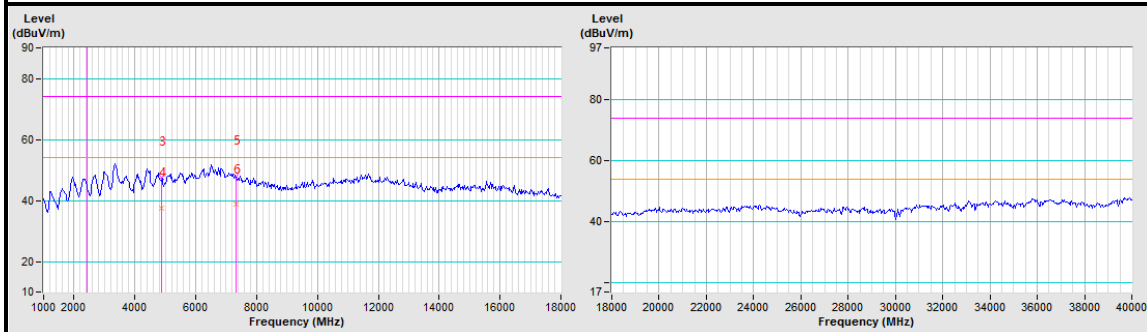

Vertical

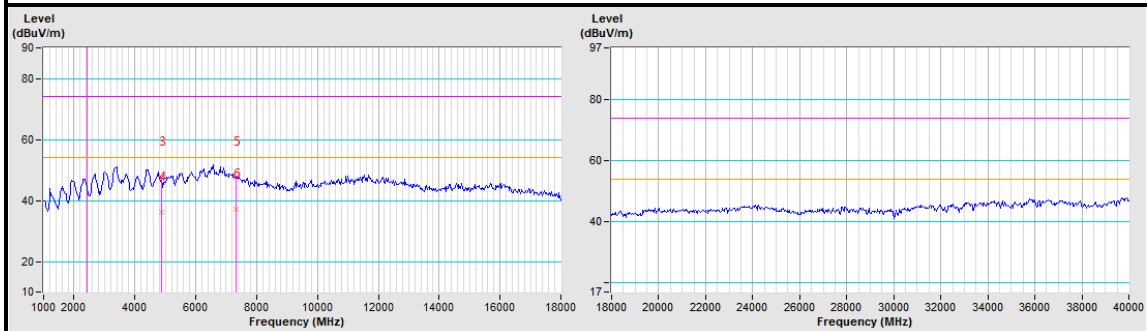

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2476.00	98.96 PK			132	114	96.61	2.35
2	*2476.00	95.22 AV			132	114	92.87	2.35
3	2483.50	45.39 PK	74.00	-28.61	122	102	43.03	2.36
4	2483.50	33.88 AV	54.00	-20.12	122	102	31.52	2.36
5	4952.00	47.61 PK	74.00	-26.39	120	119	42.02	5.59
6	4952.00	36.52 AV	54.00	-17.48	120	119	30.93	5.59
7	7428.00	48.03 PK	74.00	-25.97	133	69	40.82	7.21
8	7428.00	36.38 AV	54.00	-17.62	133	69	29.17	7.21
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2476.00	97.36 PK			132	54	95.01	2.35
2	*2476.00	94.82 AV			132	54	92.47	2.35
3	2483.50	45.63 PK	74.00	-28.37	132	110	43.27	2.36
4	2483.50	33.91 AV	54.00	-20.09	132	110	31.55	2.36
5	4952.00	47.64 PK	74.00	-26.36	120	33	42.05	5.59
6	4952.00	36.31 AV	54.00	-17.69	120	33	30.72	5.59
7	7428.00	48.21 PK	74.00	-25.79	139	54	41.00	7.21
8	7428.00	37.18 AV	54.00	-16.82	139	54	29.97	7.21

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Horizontal

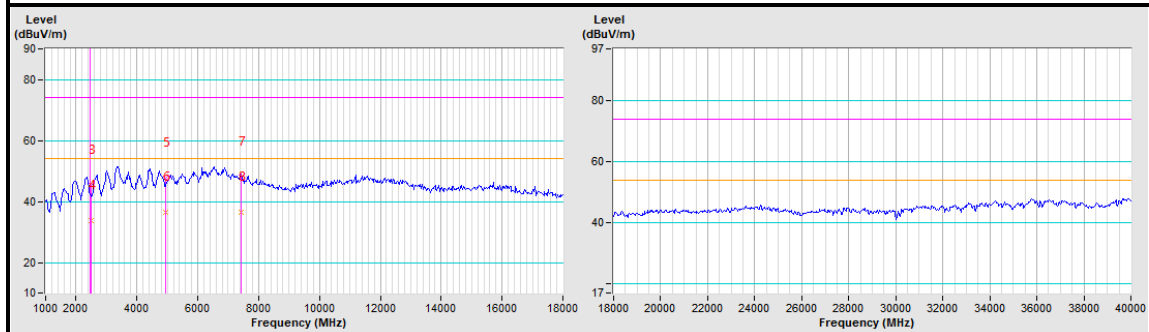

Vertical

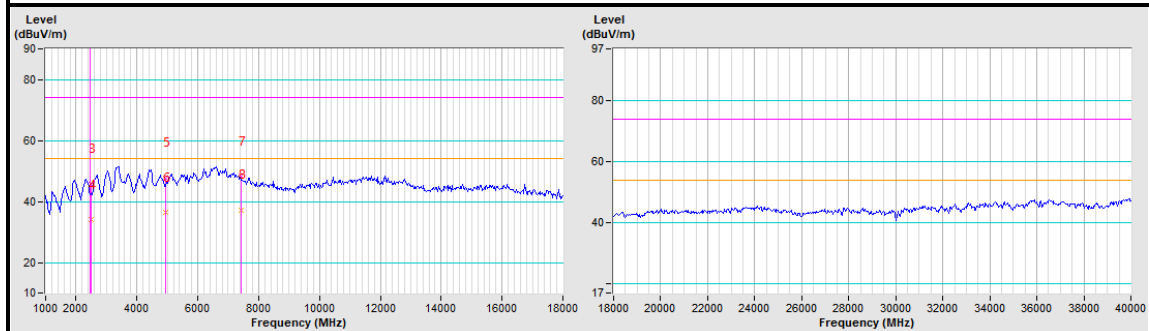



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 08, 27
Digital Multimeter	FLUKE	15B	12151063	Apr. 07, 27
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 10, 26
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Oct. 09, 26
Signal Generator	Agilent	N5183A	MY50140980	Jul. 02, 27
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 02, 27
Attenuator	MINI	BW-S10W2+	S130129FGE2	Jul. 02, 27
DC Source	Rohde&Schwarz	HMP2020	101295	Apr. 07, 27
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 08, 27
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.



4.3.3 TEST PROCEDURE


1. Set RBW = 100K (shall be in the range of 1% to 5% of OBW, but not less than 100kHz).
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = No faster than coupled(auto) time.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP

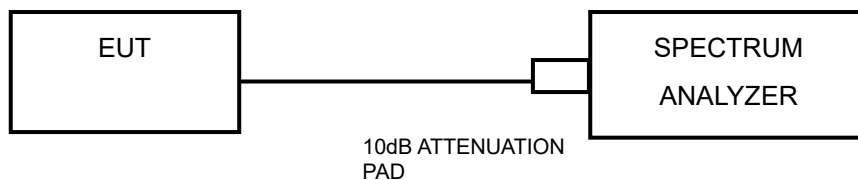

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

GFSK (2 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2404	1.27	0.5	PASS
18	2440	1.27	0.5	PASS
37	2478	1.27	0.5	PASS

CH 0

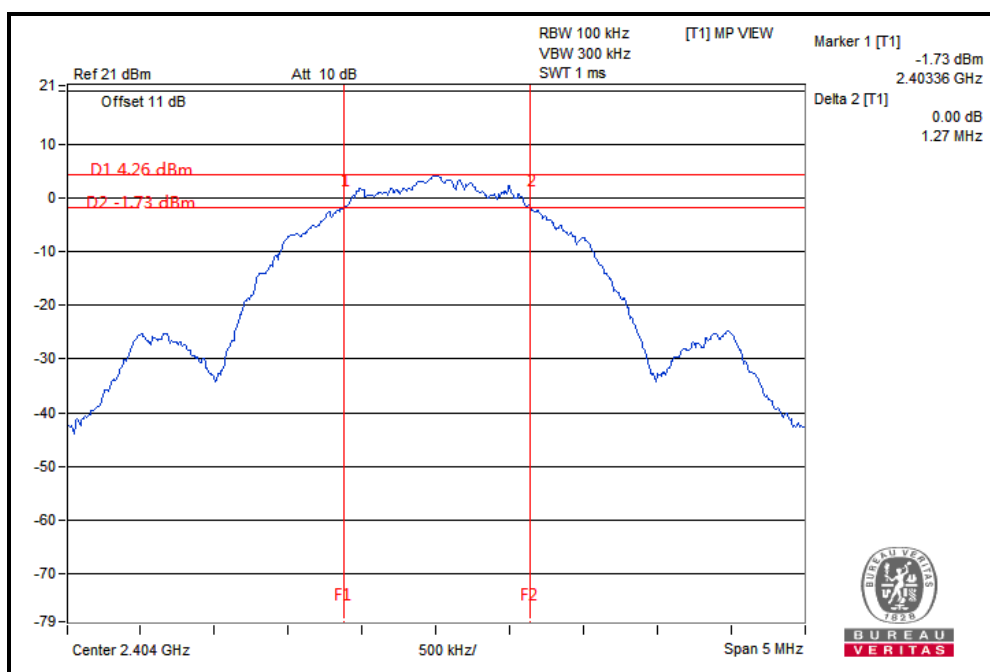





BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

CH 18

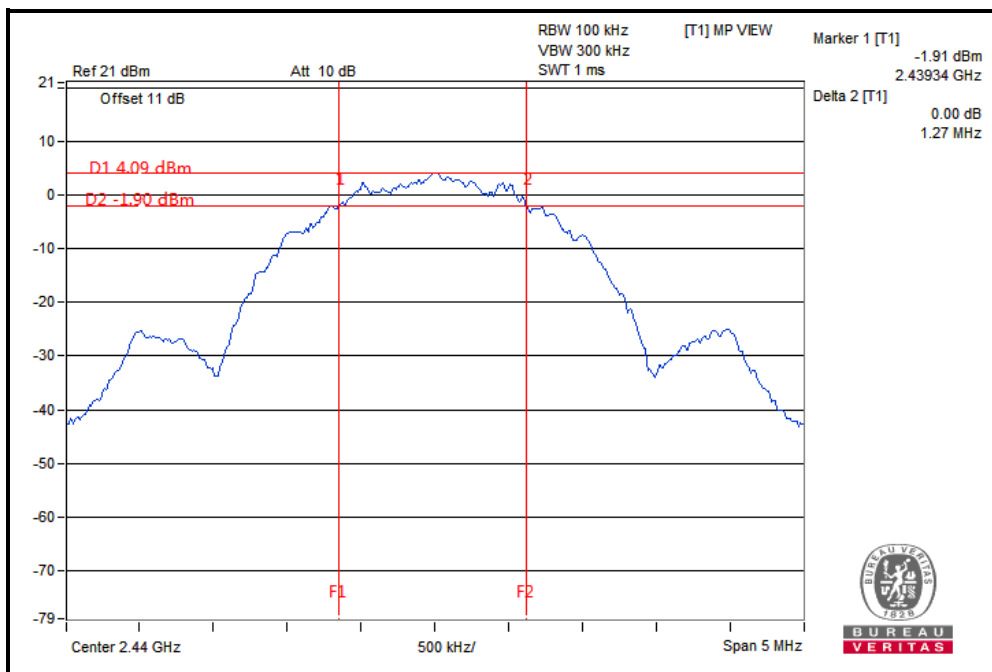

CH 37

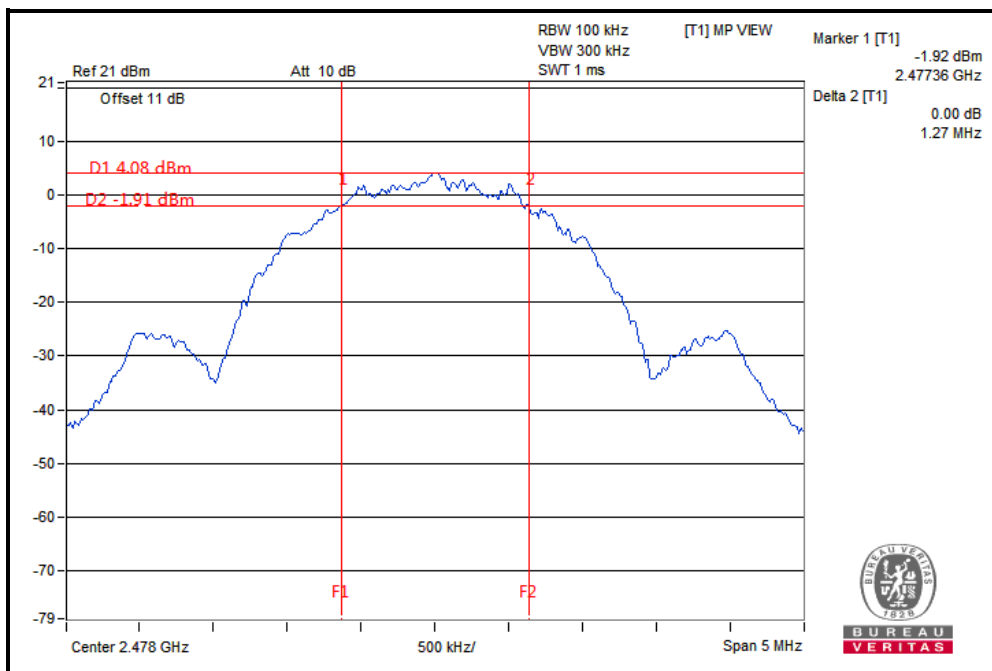

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



GFSK (4 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2406	2.07	0.5	PASS
18	2440	1.85	0.5	PASS
36	2476	1.99	0.5	PASS

CH 1

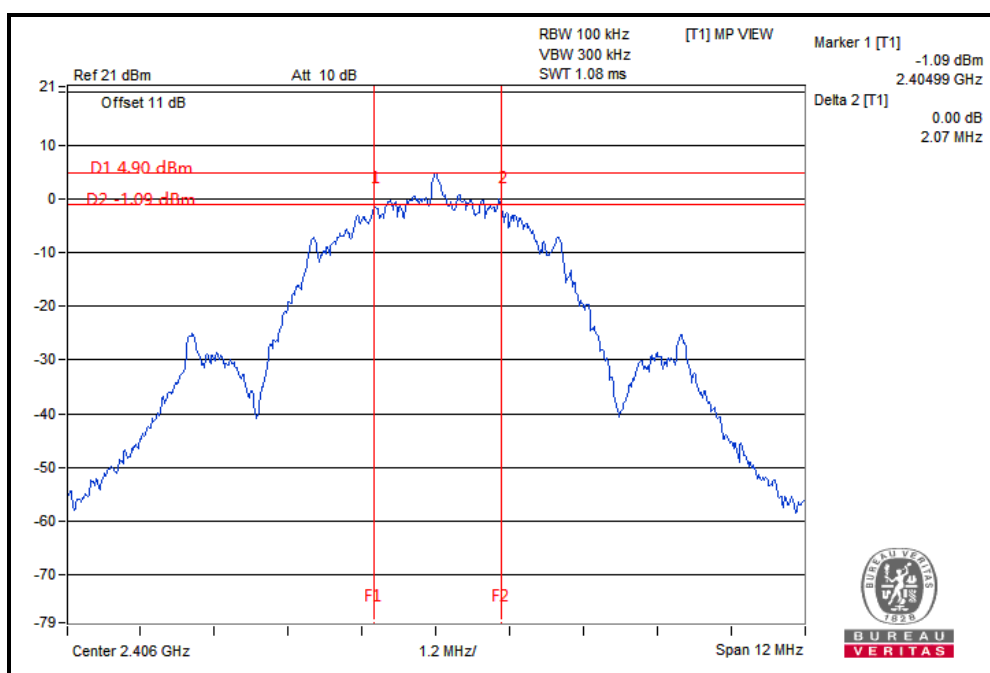





BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

CH 18

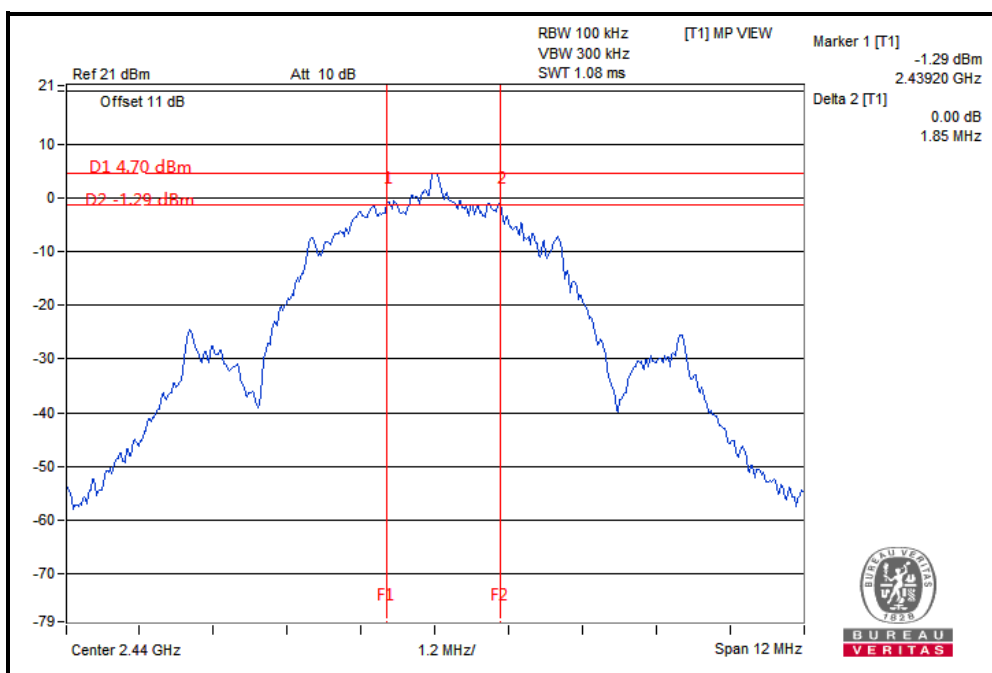

CH 36

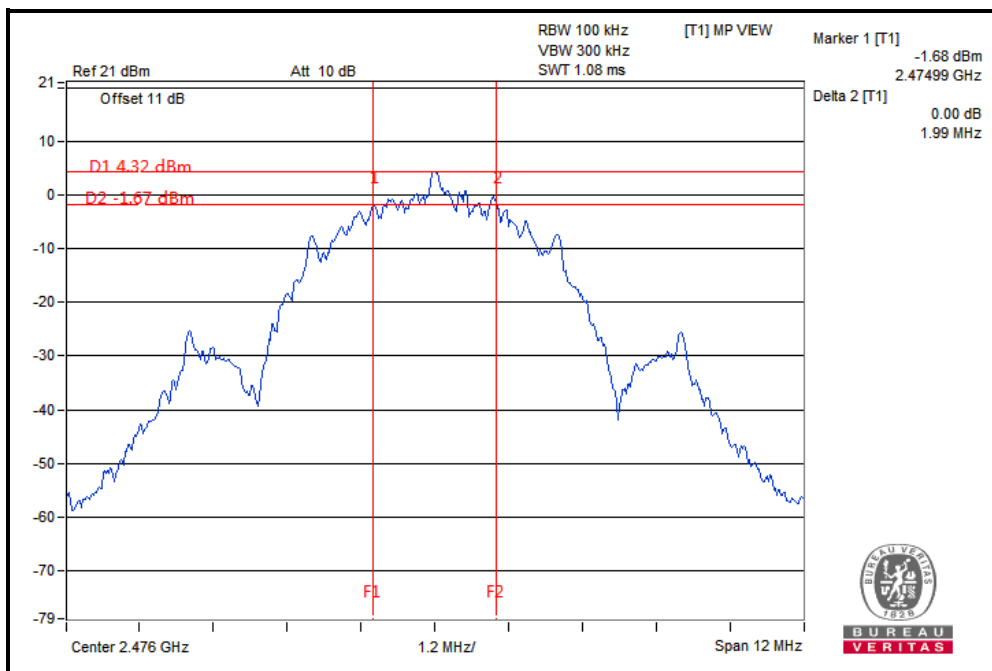

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942, People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

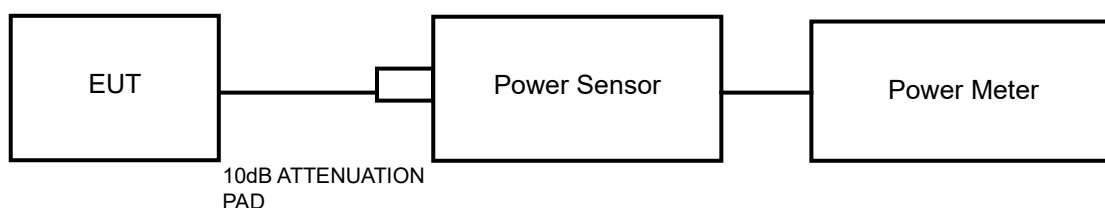

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

**4.4.7 TEST RESULTS****4.4.7.1 MAXIMUM PEAK OUTPUT POWER****GFSK (2 Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2404	5.91	3.899	1	PASS
18	2440	5.82	3.819	1	PASS
37	2478	5.73	3.741	1	PASS

GFSK (4 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2406	6.50	4.467	1	PASS
18	2440	6.42	4.385	1	PASS
36	2476	6.33	4.295	1	PASS



4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

GFSK (2 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2404	5.58
18	2440	5.65
37	2478	5.50

GFSK (4 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2406	6.04
18	2440	6.16
36	2476	5.98




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span > 1.5 times the DTS bandwidth.
- c) Set RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100\text{KHz}$
- d) Set VBW $\geq 3 \times \text{RBW}$
- e) Detector = peak
- f) Sweep time = No faster than coupled(auto) time,
- g) Trace mode = max hold
- h) allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW(but no less than 3KHz) and repeat.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.



4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

GFSK (2 Mbps)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2404	-9.72	8	PASS
18	2440	-10.46	8	PASS
37	2478	-11.18	8	PASS

CH 0

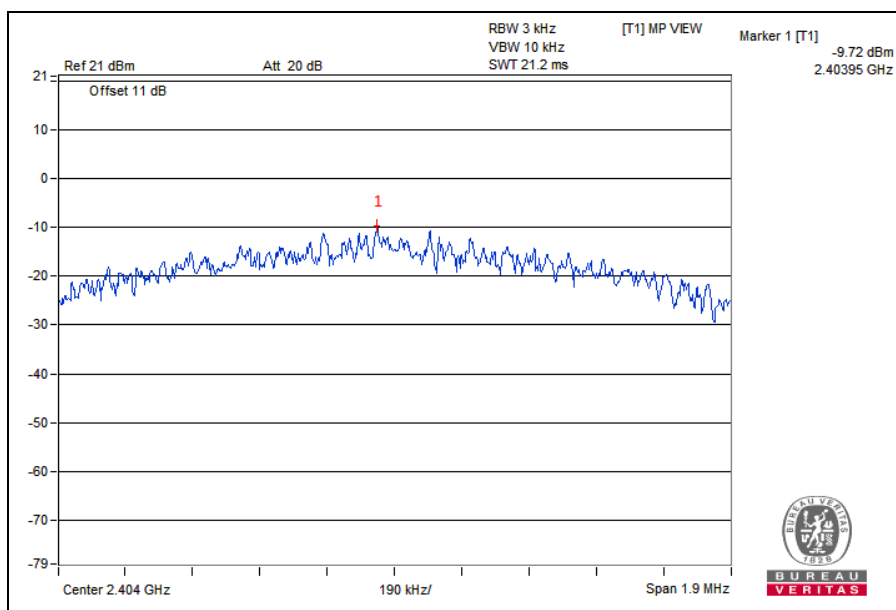





BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

CH 18

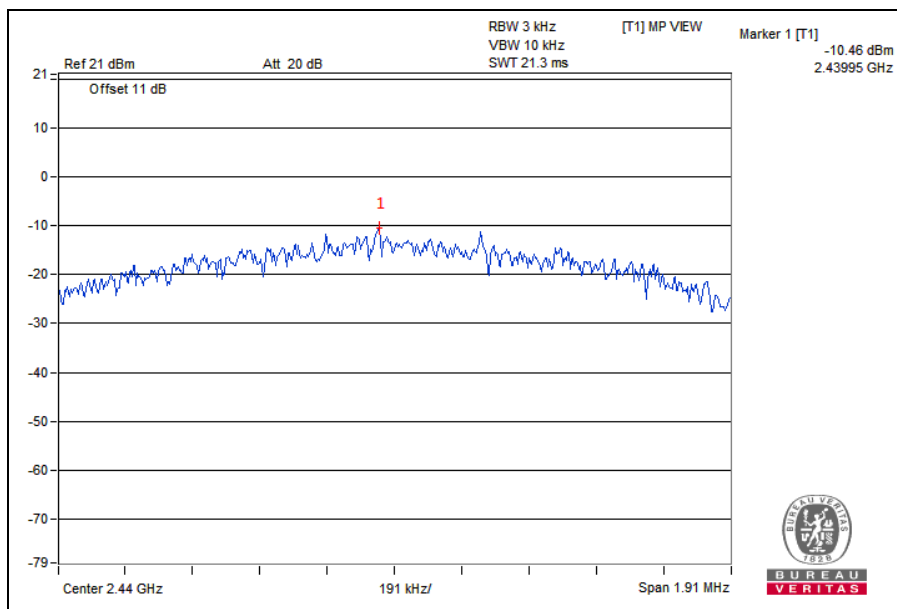

CH 37

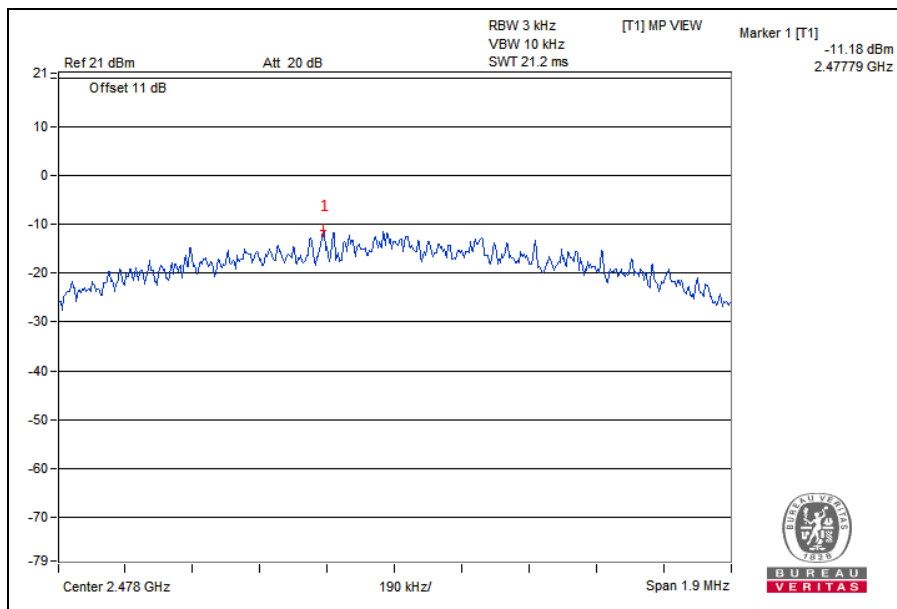

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

GFSK (4 Mbps)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2406	-15.52	8	PASS
18	2440	-14.45	8	PASS
36	2476	-15.40	8	PASS

CH 1

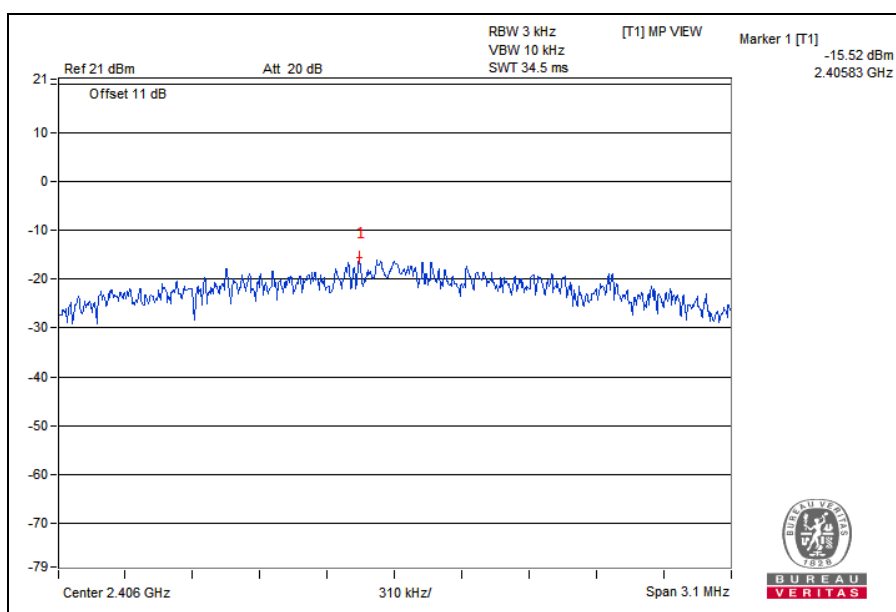

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

CH 18

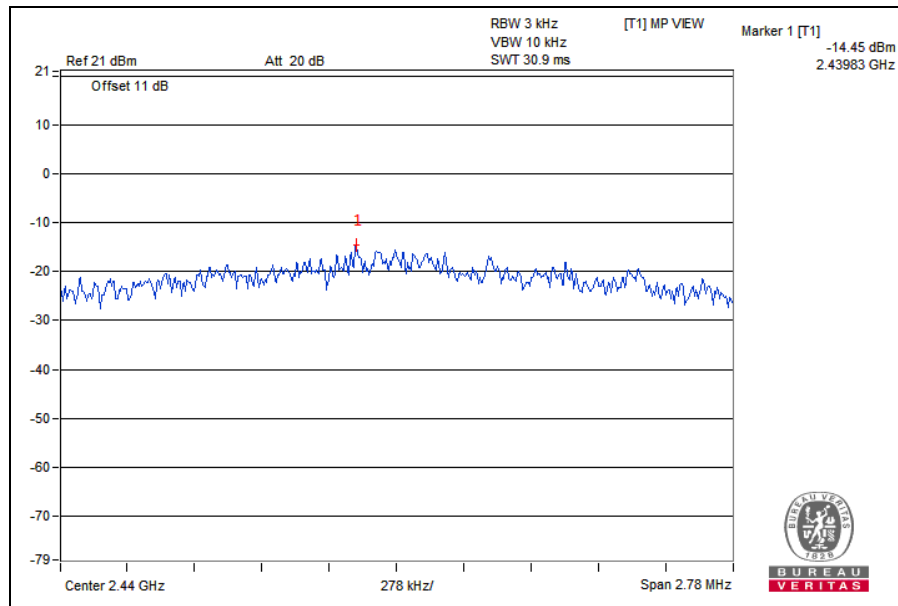

CH 36

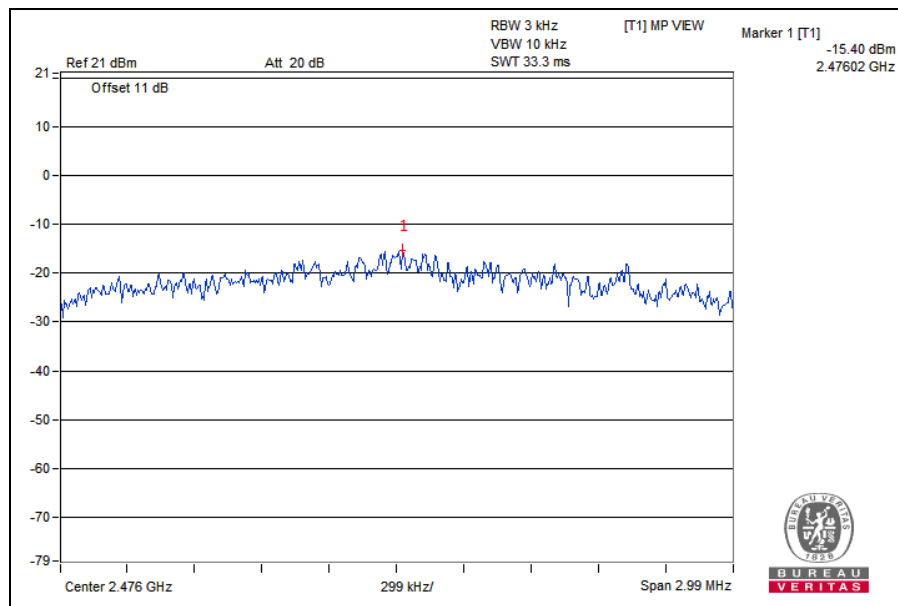

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

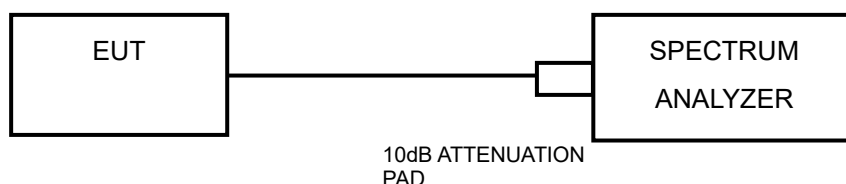

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

Measurement Procedure – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 100\text{KHz}$ (3x RBW).
5. Detector = peak.
6. Sweep time = No faster than coupled(auto) time.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level.



Measurement Procedure –Unwanted Emission Level

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set RBW = 100 kHz.
3. Set VBW $\geq$ 300 kHz.
4. Detector = peak.
5. Sweep = No faster than coupled(auto) time.
6. Trace Mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

4.6.7 TEST RESULTS

GFSK (2 Mbps)

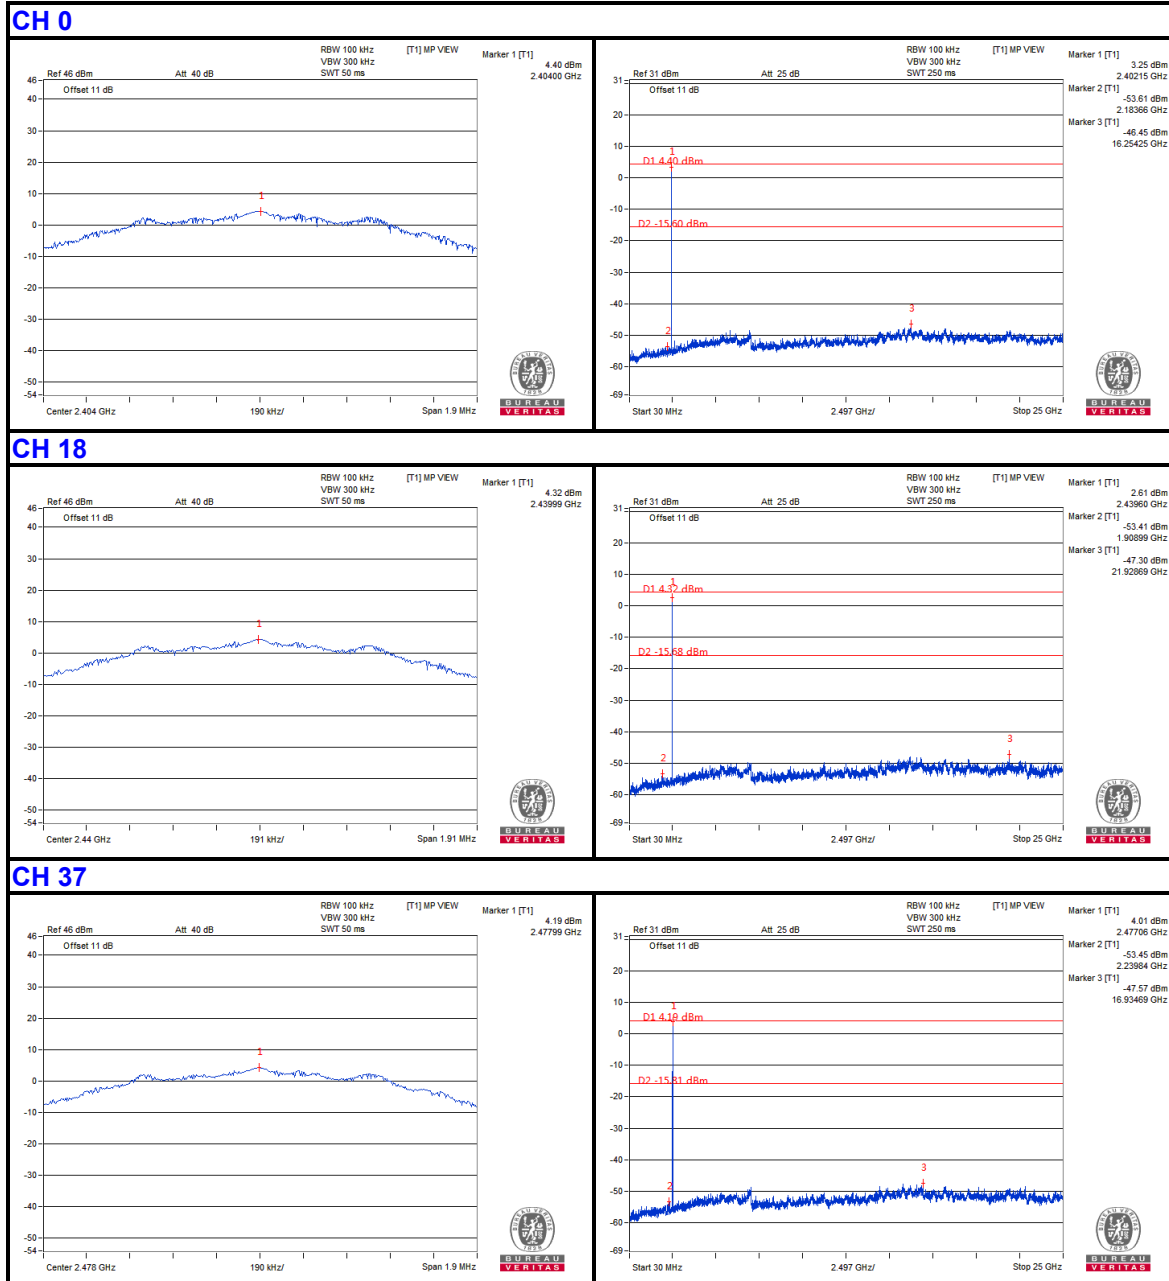

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

GFSK (4 Mbps)

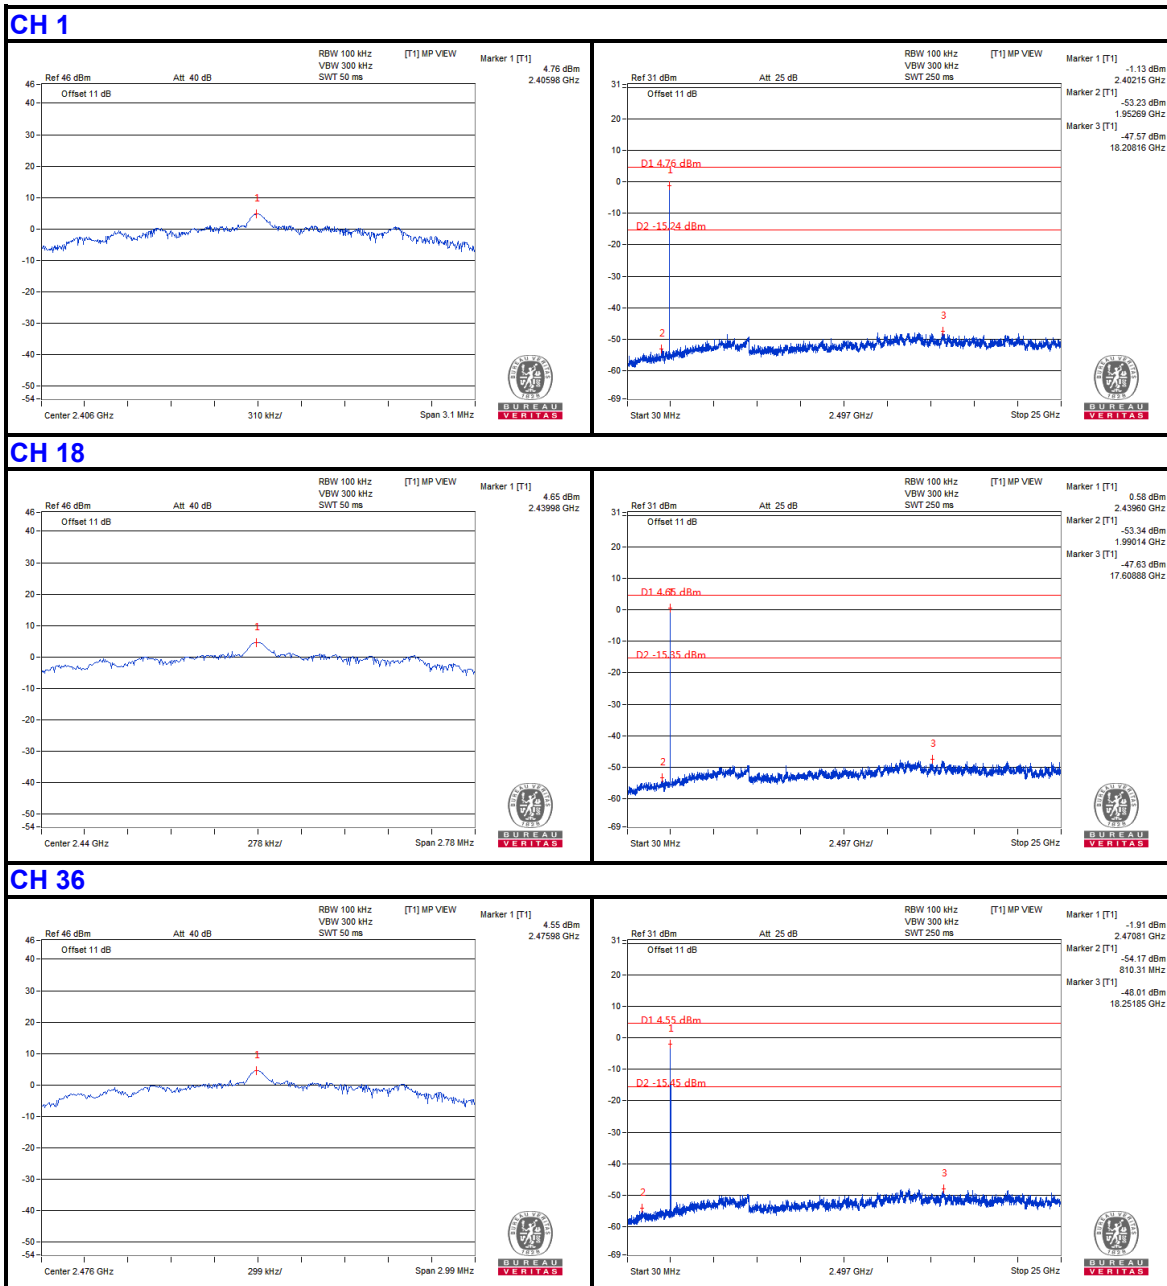

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




BUREAU
VERITAS

Test Report No.: RF2606WDG0365-2

Band Edge: GFSK (2 Mbps)

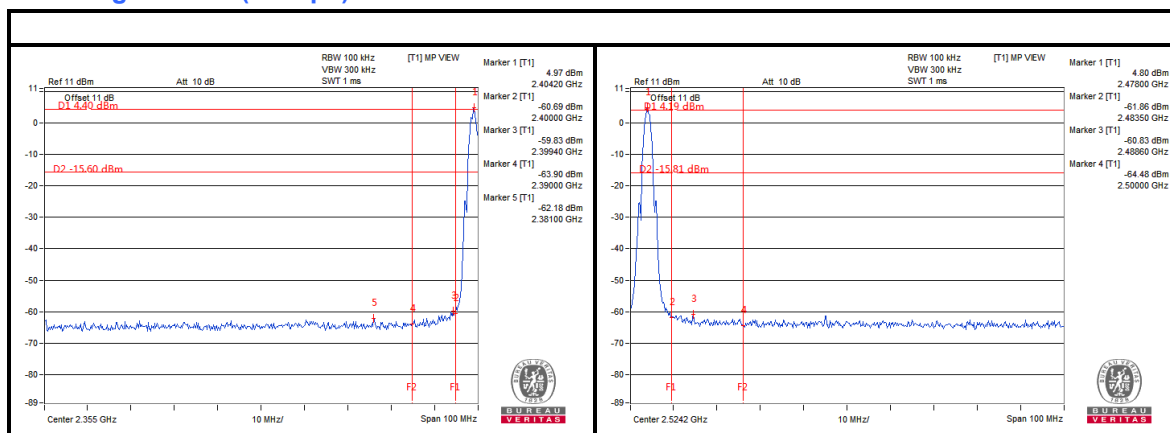

Band Edge: GFSK (4 Mbps)

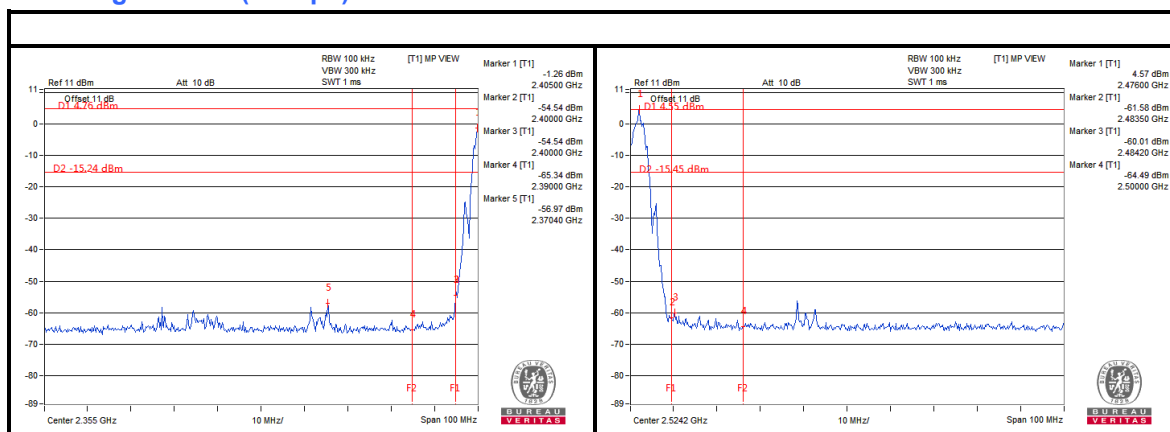

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2606WDG0365-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2606WDG0365-2

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications are made to the EUT by the lab during the test.

---END---