

TEST REPORT

Applicant:	CORSAIR MEMORY, Inc.
Address:	115 North McCarthy Blvd, Milpitas, CA 95035, USA

Manufacturer or Supplier	CORSAIR MEMORY, Inc.
Address	115 North McCarthy Blvd, Milpitas, CA 95035, USA
Product:	Dongle
Brand Name:	 or CORSAIR or 
Model:	RGP0195
Additional Model & Model Difference	N/A
Date of tests:	Aug. 12, 2026 ~ Aug. 18, 2026

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.249**

CONCLUSION: The submitted sample was found to **COMPLY** with the test requirement

Prepared by Andrew Sha Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Sep. 10, 2026

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
3.5 CONFIGURATION OF SYSTEM UNDER TEST	10
3.6 DUTY CYCLE OF TESET SIGNAL.....	11
4. TEST TYPES AND RESULTS.....	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2 TEST INSTRUMENTS.....	13
4.1.3 TEST PROCEDURES	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2 TEST INSTRUMENTS.....	19
4.2.3 TEST PROCEDURES	20
4.2.4 DEVIATION FROM TEST STANDARD	20
4.2.5 TEST SETUP	21
4.2.6 EUT OPERATING CONDITIONS	22
4.2.7 TEST RESULTS	23
4.3 20DB BANDWIDTH MEASUREMENT	43
4.3.1 LIMITS OF 20DB BANDWIDTH MEASUREMENT	43
4.3.2 4.2.2 TEST INSTRUMENTS.....	43
4.3.3 TEST PROCEDURE	44
4.3.4 DEVIATION FROM TEST STANDARD	44
4.3.5 TEST SETUP	44
4.3.6 EUT OPERATING CONDITIONS	44
4.3.7 TEST RESULTS	45



Test Report No.: RF2606WDG0438-2

5. PHOTOGRAPHS OF THE TEST CONFIGURATION	49
6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	50



Test Report No.: RF2606WDG0438-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2606WDG0438-2	Original release	Sep. 10, 2026

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used
§15.207 (a)	Conducted Emission	PASS	Compliant
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9KHz ~ 30MHz	3.36dB
Radiated emissions	30MHz ~ 1GMHz	4.65dB
	1GHz ~ 18GHz	5.01dB
	18GHz ~ 40GHz	4.10dB
20dB Bandwidth	1GHz ~ 18GHz	1.132x10 ⁻⁴ %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Dongle
MODEL NO.	RGP0195
ADDITIONAL MODEL	N/A
FCC ID	2AAFM-RGP0195
NOMINAL VOLTAGE	DC 5V from USB host unit
MODULATION TECHNOLOGY	GFSK (2Mbps, 4Mbps)
OPERATING FREQUENCY	2403-2480MHz for GFSK 2Mbps 2405-2477MHz for GFSK 4Mbps
ANTENNA TYPE	PCB Antenna, 1.14dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: Shielded, Detachable, 1.8m

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2606WDG0438-2) for detailed product photo.

3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on X axis for radiated emission. The EUT was tested under the following mode.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
A	√	√	√	√	DC 5V from PC

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
BW: 20db bandwidth

Following channel(s) was (were) selected for the test as listed below.

For GFSK 2Mbps

TESTED CHANNEL	TESTED FREQUENCY
Low	2403 MHz
Middle	2441 MHz
High	2480 MHz

For GFSK 4Mbps

TESTED CHANNEL	TESTED FREQUENCY
Low	2405 MHz
Middle	2441 MHz
High	2477 MHz

Channel List For GFSK 2Mbps

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	27	2429	53	2455
2	2404	28	2430	54	2456
3	2405	29	2431	55	2457
4	2406	30	2432	56	2458
5	2407	31	2433	57	2459
6	2408	32	2434	58	2460
7	2409	33	2435	59	2461
8	2410	34	2436	60	2462
9	2411	35	2437	61	2463
10	2412	36	2438	62	2464
11	2413	37	2439	63	2465
12	2414	38	2440	64	2466
13	2415	39	2441	65	2467
14	2416	40	2442	66	2468
15	2417	41	2443	67	2469
16	2418	42	2444	68	2470
17	2419	43	2445	69	2471
18	2420	44	2446	70	2472
19	2421	45	2447	71	2473
20	2422	46	2448	72	2474
21	2423	47	2449	73	2475
22	2424	48	2450	74	2476
23	2425	49	2451	75	2477
24	2426	50	2452	76	2478
25	2427	51	2453	77	2479
26	2428	52	2454	78	2480

Note: The more detailed channel, please refer to the product specifications

Channel List For GFSK 4Mbps

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	27	2431	53	2457
2	2406	28	2432	54	2458
3	2407	29	2433	55	2459
4	2408	30	2434	56	2460
5	2409	31	2435	57	2461
6	2410	32	2436	58	2462
7	2411	33	2437	59	2463
8	2412	34	2438	60	2464
9	2413	35	2439	61	2465
10	2414	36	2440	62	2466
11	2415	37	2441	63	2467
12	2416	38	2442	64	2468
13	2417	39	2443	65	2469
14	2418	40	2444	66	2470
15	2419	41	2445	67	2471
16	2420	42	2446	68	2472
17	2421	43	2447	69	2473
18	2422	44	2448	70	2474
19	2423	45	2449	71	2475
20	2424	46	2450	72	2476
21	2425	47	2451	73	2477
22	2426	48	2452		
23	2427	49	2453		
24	2428	50	2454		
25	2429	51	2455		
26	2430	52	2456		

Note: The more detailed channel, please refer to the product specifications

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 55%RH	DC 5V from PC	Ludius
BW	25deg. C, 56%RH	DC 5V from PC	Vincent
PLC	25deg. C, 55%RH	DC 5V from PC	Summer

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.249

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	Provided
1	Notebook	DELL	Latitude 5420	127710614	Lab.

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

3.5 CONFIGURATION OF SYSTEM UNDER TEST

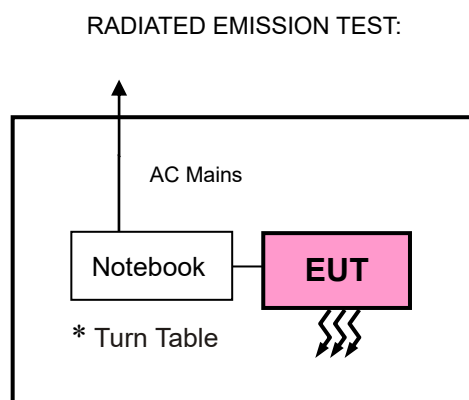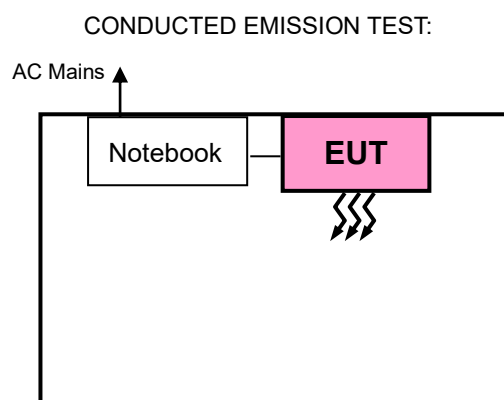

3.6 DUTY CYCLE OF TESET SIGNAL


For GFSK 2Mbps:

$T_p = 10.5072\text{ms}$;

$T_{on} = 1.0507\text{ms}$

Duty Cycle = $T_{on} / T_p * 100\% = 1.0507 / 10.5072 \approx 10.00\%$

AV factor = $20 \log (\text{Duty cycle}) = 20\text{Log}(10.00\%) \approx -20.00\text{dB}$

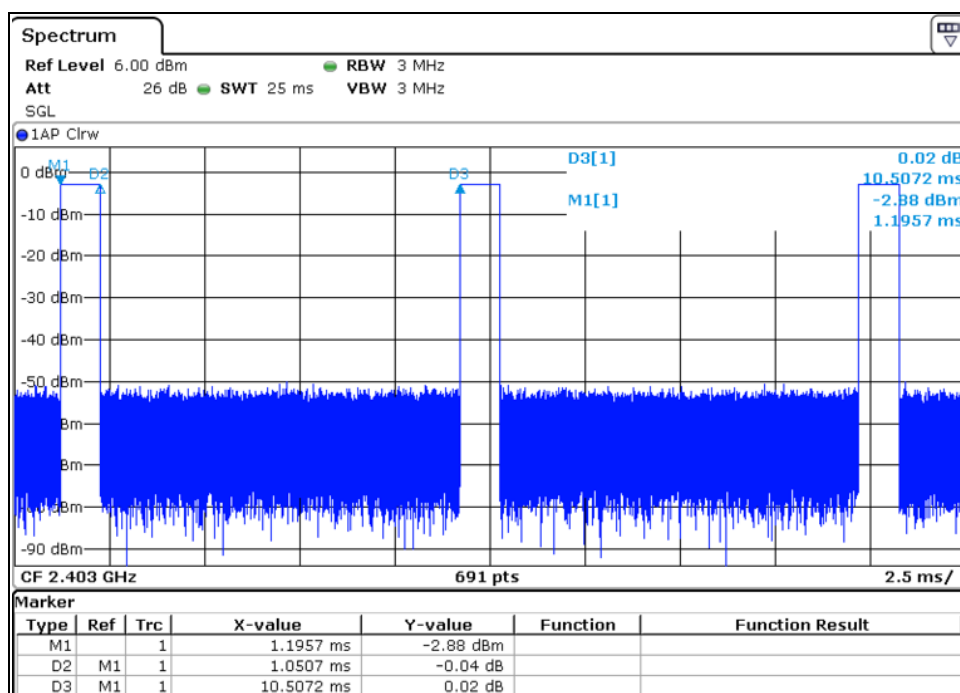


For GFSK 4Mbps:

$T_p = 5.2609\text{ms}$;

$T_{on} = 0.5362\text{ms}$

Duty Cycle = $T_{on} / T_p * 100\% = 0.5362 / 5.2609 \approx 10.19\%$

AV factor = $20 \log (\text{Duty cycle}) = 20\text{Log}(10.19\%) \approx -19.83\text{dB}$

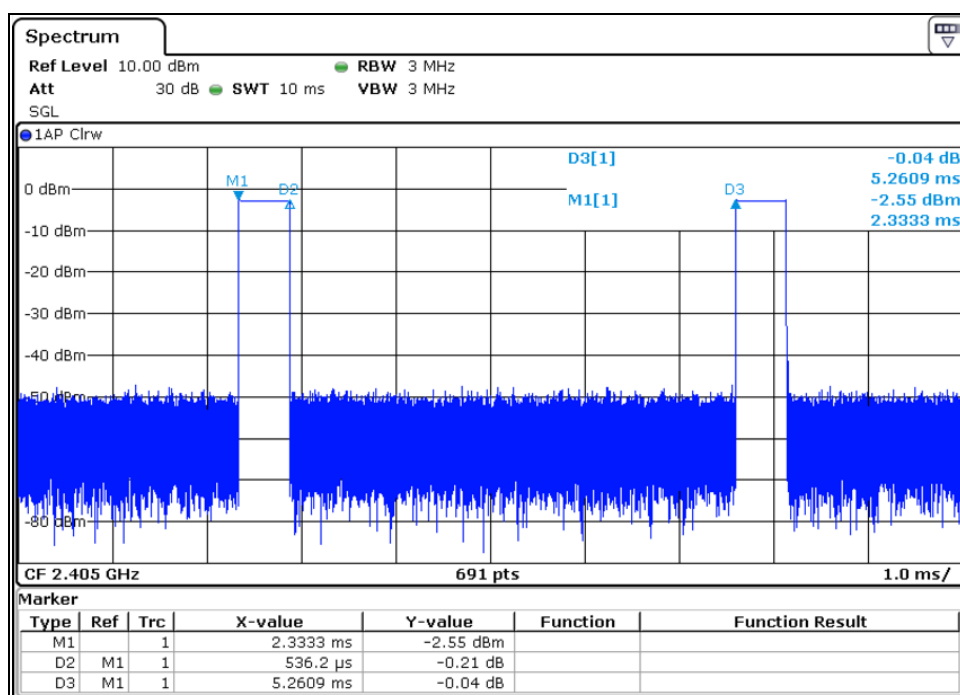

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Oct. 10, 26
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Oct. 10, 26
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Oct. 09, 26
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 02, 27
Test software	ADT	ADT_Conc_V7.3.7	N/A	N/A

NOTES:

1. The test was performed in shielded room 553.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. Test Site: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.
4. The calibration interval of all equipment is one year.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

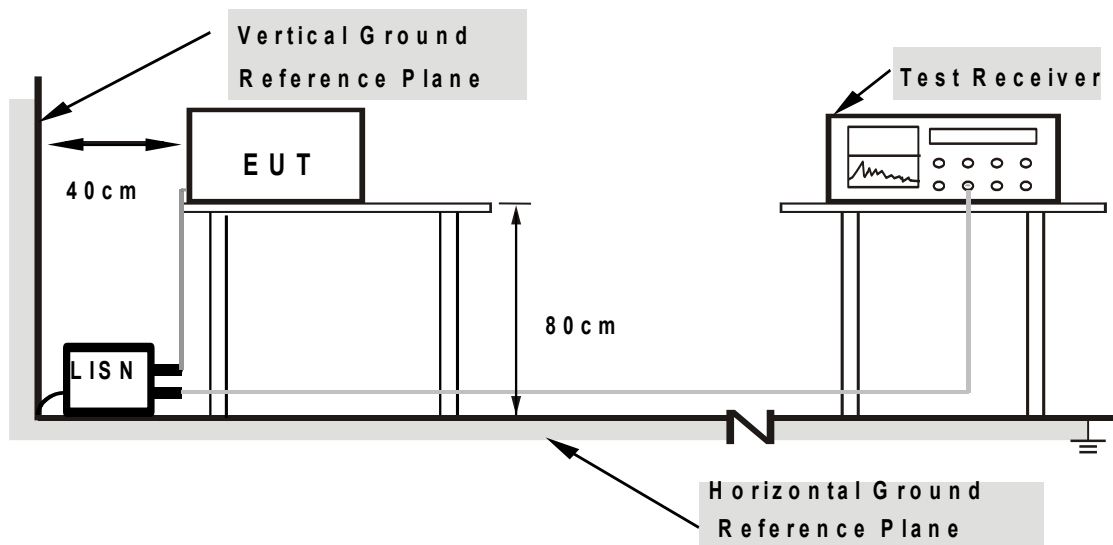

- Note: 1.Support units were connected to second LISN .
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.63	38.40	14.03	48.03	23.66	66.00	56.00	-17.97	-32.34
2	0.20625	9.63	31.87	9.35	41.50	18.98	63.35	53.35	-21.85	-34.37
3	0.25748	9.64	23.69	9.17	33.33	18.81	61.51	51.51	-28.18	-32.70
4	0.35440	9.63	22.78	16.74	32.41	26.37	58.86	48.86	-26.45	-22.49
5	0.39701	9.63	24.70	21.83	34.33	31.46	57.92	47.92	-23.59	-16.46
6	0.44007	9.64	18.73	20.08	28.37	29.72	57.06	47.06	-28.69	-17.34


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

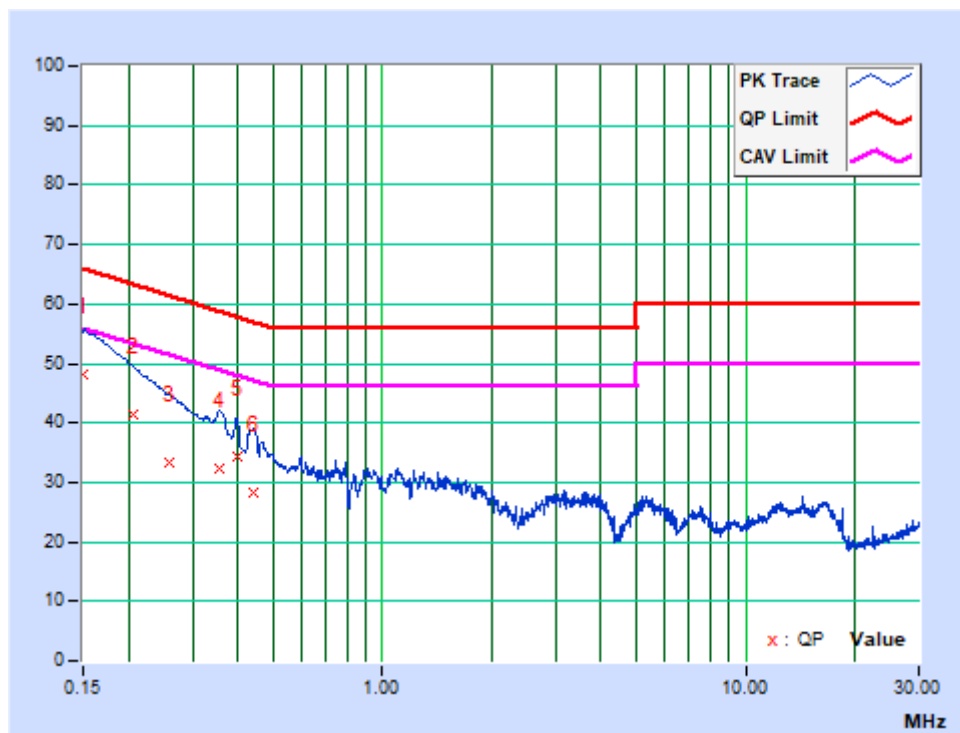

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15450	9.62	38.39	12.10	48.01	21.72	65.75	55.75	-17.75	-34.04
2	0.16800	9.64	36.78	13.07	46.42	22.71	65.06	55.06	-18.64	-32.35
3	0.21300	9.69	27.35	10.16	37.04	19.85	63.09	53.09	-26.05	-33.24
4	0.34608	9.77	22.00	9.78	31.77	19.55	59.06	49.06	-27.29	-29.51
5	0.39701	9.77	27.58	24.62	37.35	34.39	57.92	47.92	-20.57	-13.53
6	2.84325	9.96	18.75	9.44	28.71	19.40	56.00	46.00	-27.29	-26.60

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

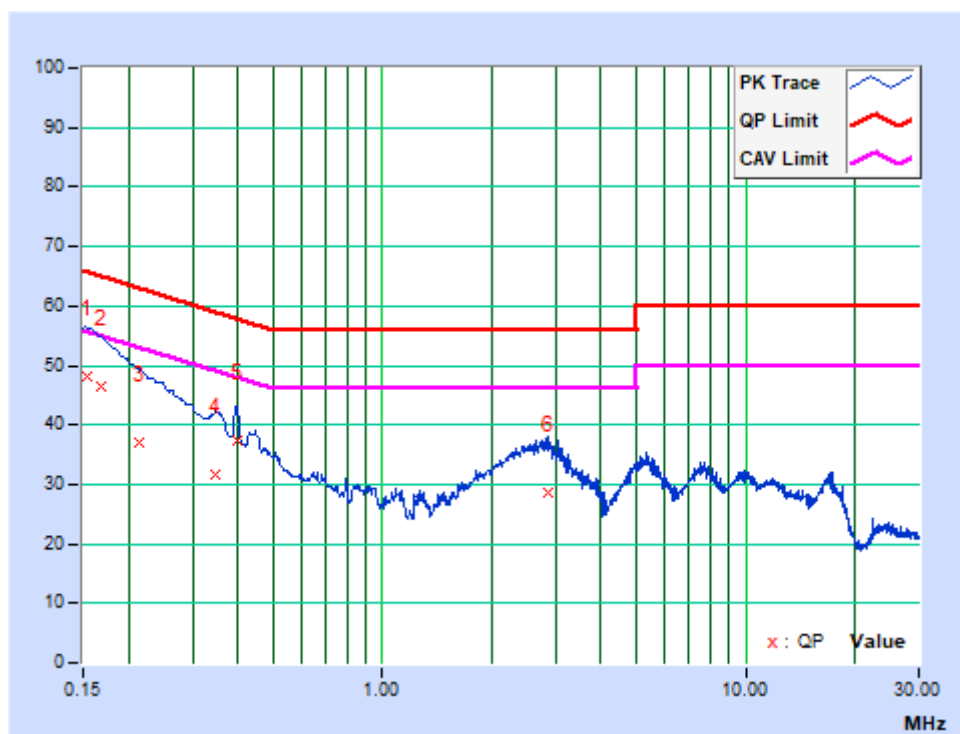

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Oct. 09, 26
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Apr. 08, 27
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	Apr. 13, 27
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Feb. 12, 27
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 14, 26
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	0085519	Oct. 11, 26
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 19, 27
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 16, 27
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Feb. 12, 27
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Oct. 10, 26

NOTE:

1. The test was performed in 966 Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. Test Site: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.
4. The FCC Site Registration No. is 749762. Designation Number: CN1174.
5. The calibration interval of all equipment is one year.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Other wise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. Average value =PK Emission +AV Factor.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

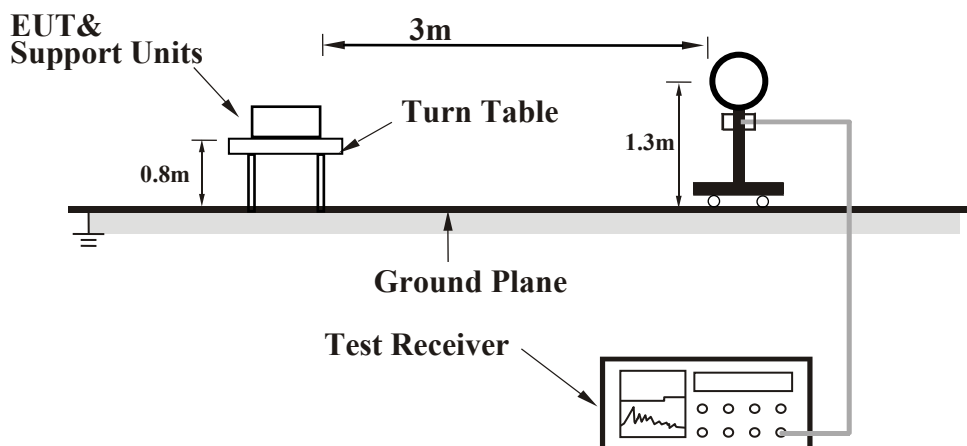


Below 1GHz test setup

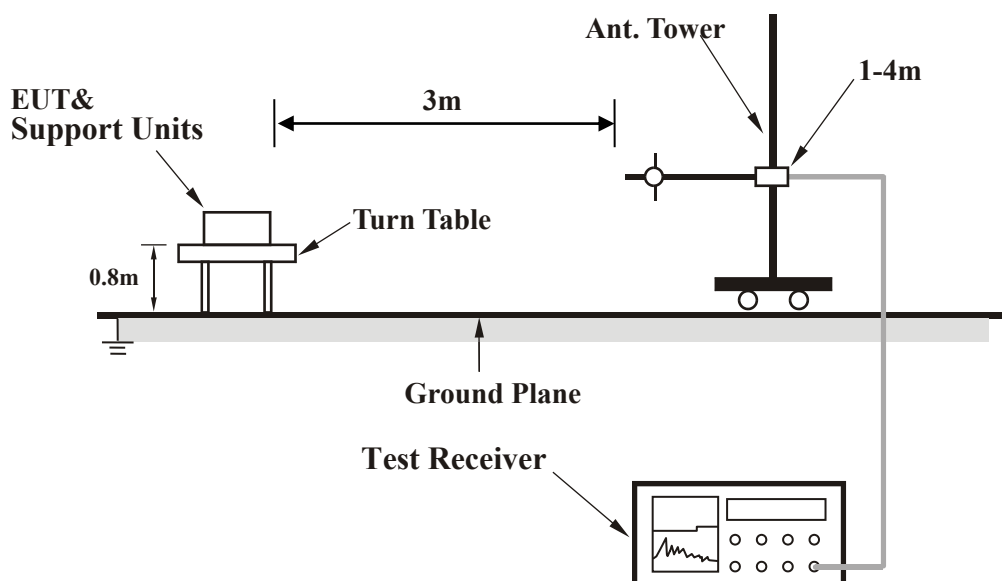

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

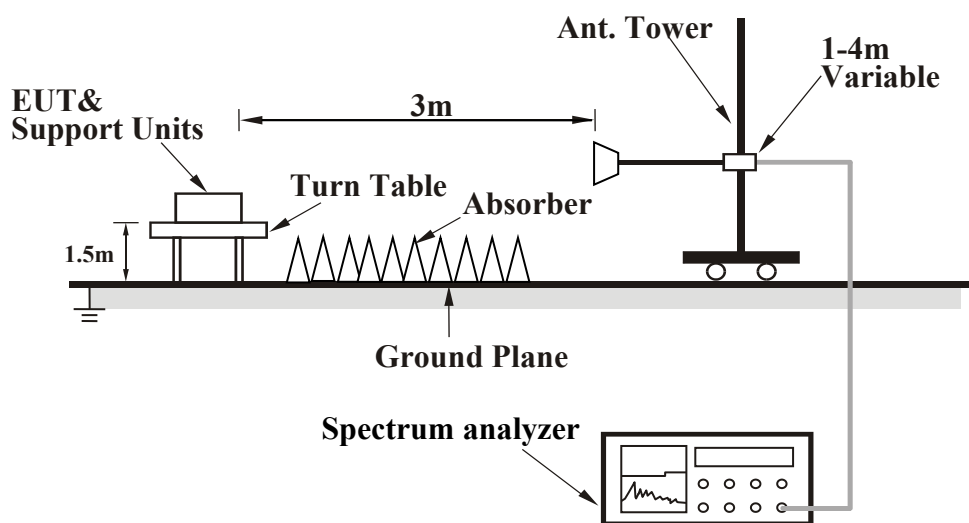

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- c) Turned on the power of all equipment.
- d) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.2.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA:

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.10	28.40	40.00	-11.60	100	0	45.08	-16.68
2	214.98	31.19	43.50	-12.31	100	0	50.39	-19.20
3	222.76	31.12	46.00	-14.88	100	0	49.97	-18.85
4	288.04	29.03	46.00	-16.97	100	0	45.29	-16.26
5	298.93	31.49	46.00	-14.51	100	0	47.36	-15.87
6	337.79	26.56	46.00	-19.44	100	0	41.44	-14.88

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

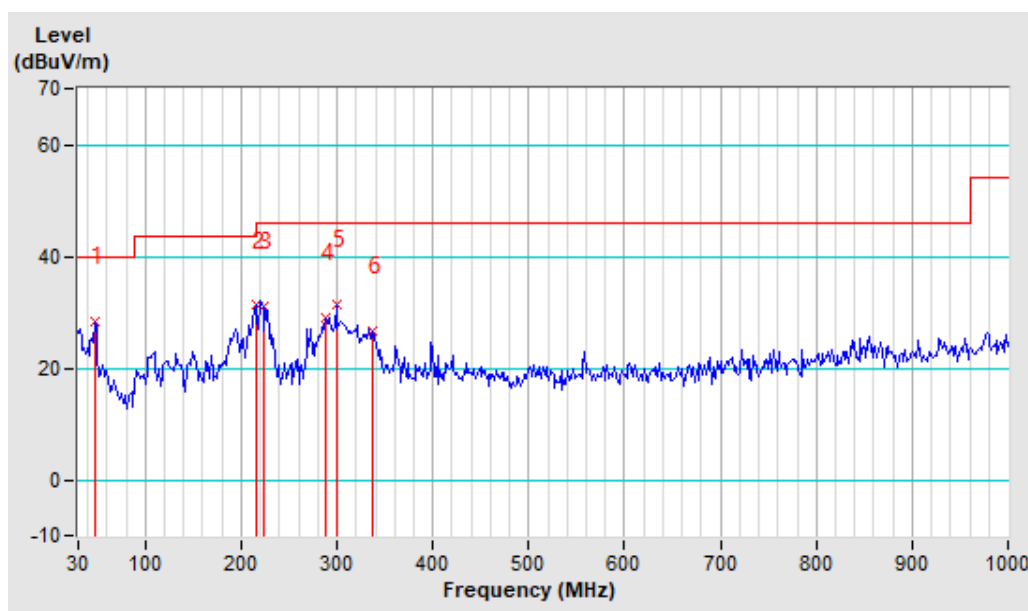


CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.25	40.00	-9.75	100	114	48.34	-18.09
2	47.10	29.10	40.00	-10.90	100	102	45.78	-16.68
3	193.22	27.86	43.50	-15.64	100	146	47.37	-19.51
4	214.98	32.21	43.50	-11.29	100	87	51.41	-19.20
5	298.93	30.22	46.00	-15.78	100	59	46.09	-15.87
6	398.41	25.54	46.00	-20.46	100	44	38.67	-13.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

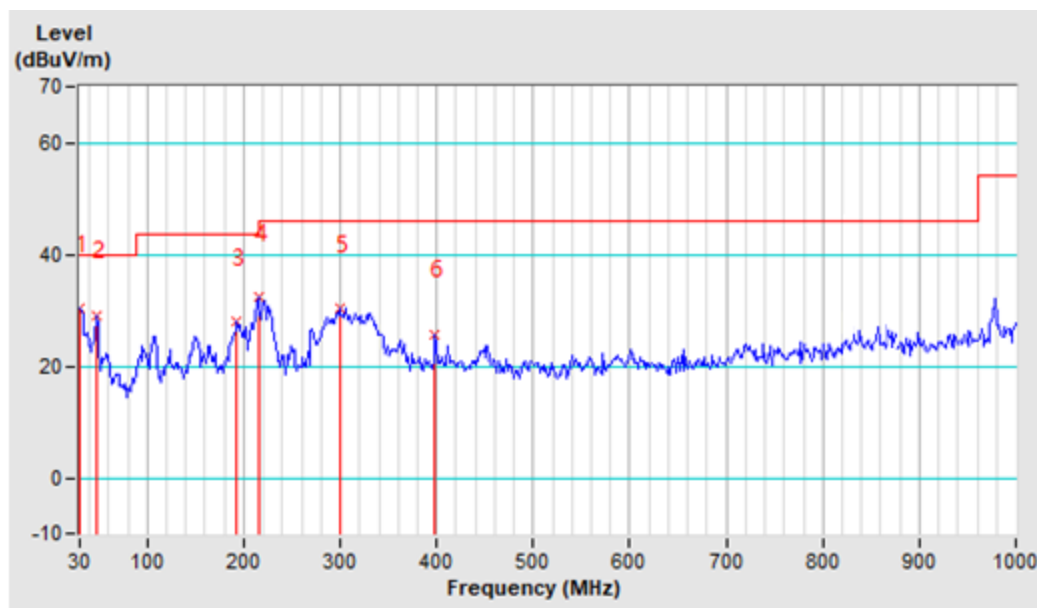

ABOVE 1GHz DATA FOR GFSK 2Mbps:


CHANNEL	TX Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	59.37 PK	74.00	-14.63	156	54	57.10	2.27
2	2400.00	39.37 AV	54.00	-14.63	156	54	37.10	2.27
3	*2403.00	90.63 PK	114.00	-23.37	136	56	88.36	2.27
4	*2403.00	70.63 AV	94.00	-23.37	136	56	68.36	2.27
5	4806.00	48.72 PK	74.00	-25.28	112	56	42.83	5.89
6	4806.00	28.72 AV	54.00	-25.28	112	56	22.83	5.89
7	7209.00	49.16 PK	74.00	-24.84	123	54	41.23	7.93
8	7209.00	29.16 AV	54.00	-24.84	123	54	21.23	7.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	61.91 PK	74.00	-12.09	165	54	59.64	2.27
2	2400.00	41.91 AV	54.00	-12.09	165	54	39.64	2.27
3	*2403.00	89.09 PK	114.00	-24.91	166	56	86.82	2.27
4	*2403.00	69.09 AV	94.00	-24.91	166	56	66.82	2.27
5	4806.00	46.32 PK	74.00	-27.68	185	5	40.43	5.89
6	4806.00	26.32 AV	54.00	-27.68	185	5	20.43	5.89
7	7209.00	47.16 PK	74.00	-26.84	100	56	39.23	7.93
8	7209.00	27.16 AV	54.00	-26.84	100	56	19.23	7.93


REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log (duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (10.00\%) \approx -20.00 \text{dB}$, Please see page 11 for plotted duty.
7. The frequency. NO. 5,6,7, 8 in the table are marked with 1, 2, 3, 4 in the spectrum plot.


2403MHz Horizontal

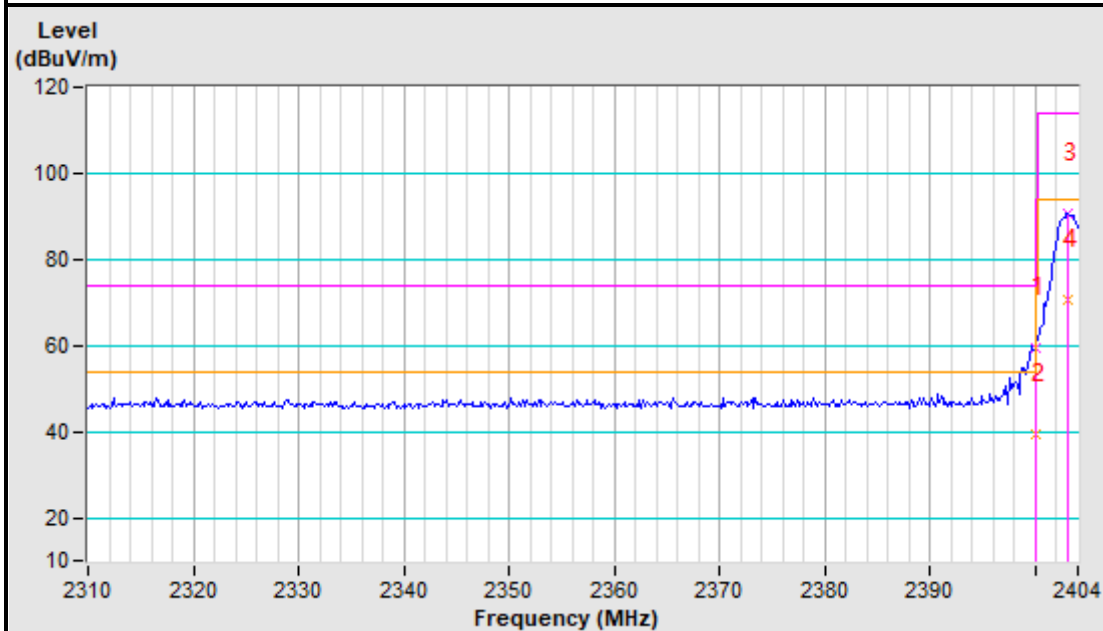


2403MHz Vertical

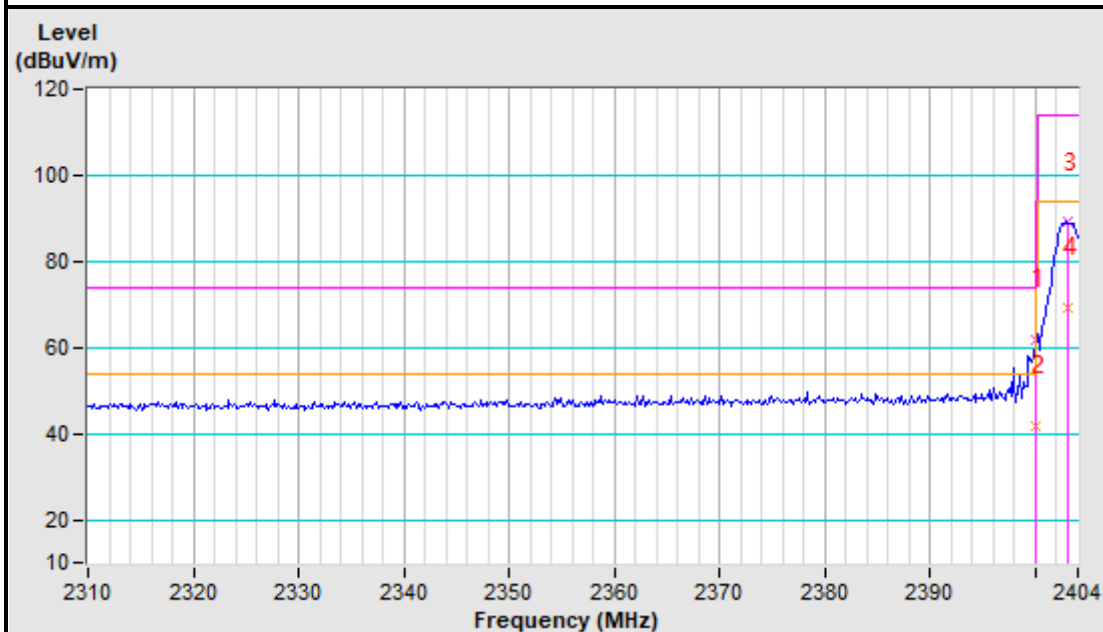

2403MHz Horizontal

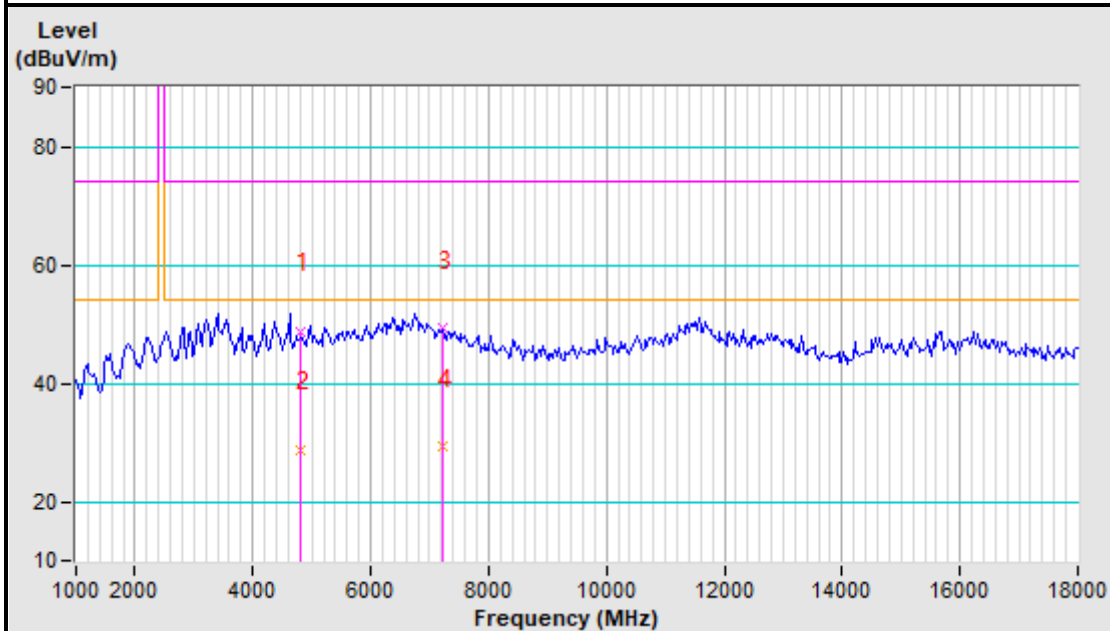

2403MHz Vertical

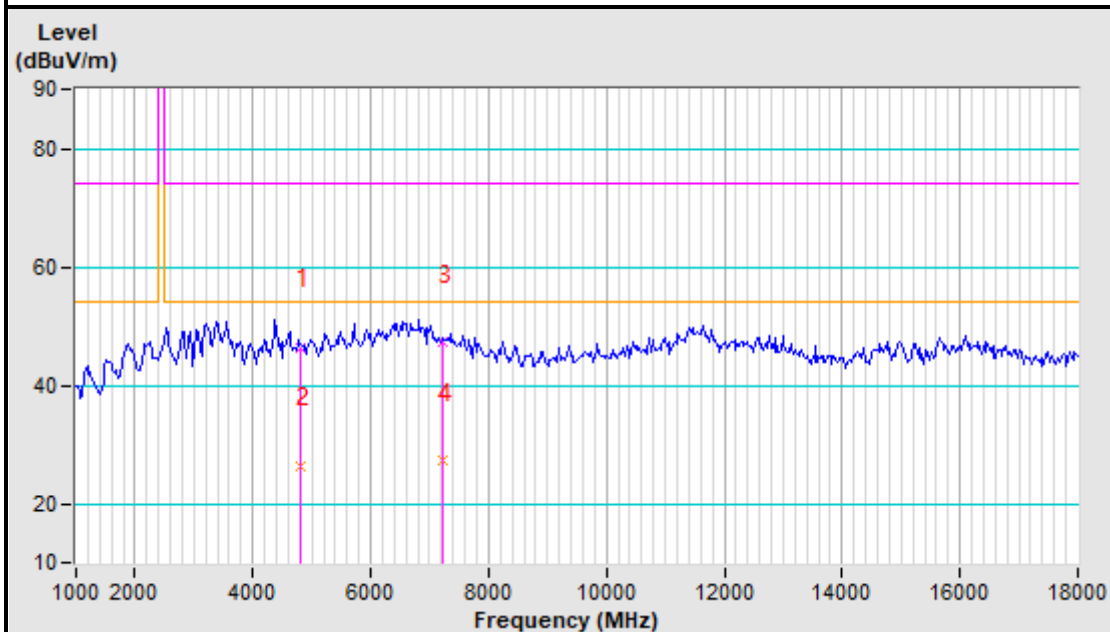

Note: For 18GHz to 25GHz, the amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.


CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.01 PK	114.00	-23.99	156	56	87.70	2.31
2	*2441.00	70.01 AV	94.00	-23.99	156	56	67.70	2.31
3	4882.00	48.64 PK	74.00	-25.36	115	5	42.91	5.73
4	4882.00	28.64 AV	54.00	-25.36	115	5	22.91	5.73
5	7323.00	49.65 PK	74.00	-24.35	123	57	42.09	7.56
6	7323.00	29.65 AV	54.00	-24.35	123	57	22.09	7.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.14 PK	114.00	-21.86	156	56	89.83	2.31
2	*2441.00	72.14 AV	94.00	-21.86	156	56	69.83	2.31
3	4882.00	47.46 PK	74.00	-26.54	100	156	41.73	5.73
4	4882.00	27.46 AV	54.00	-26.54	100	156	21.73	5.73
5	7323.00	48.39 PK	74.00	-25.61	126	58	40.83	7.56
6	7323.00	28.39 AV	54.00	-25.61	126	58	20.83	7.56


REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log (duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (10.00\%) \approx -20.00 \text{ dB}$, Please see page 11 for plotted duty.
7. The frequency. NO. 3, 4, 5, 6 in the table are marked with 1, 2, 3, 4 in the spectrum plot.


2441MHz Horizontal

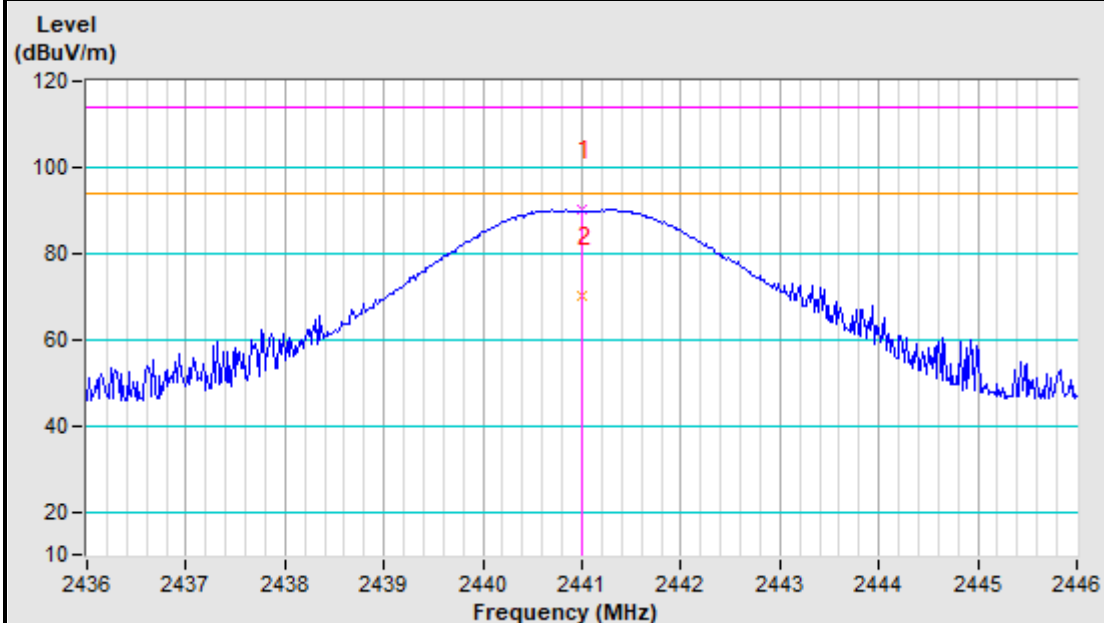


2441MHz Vertical

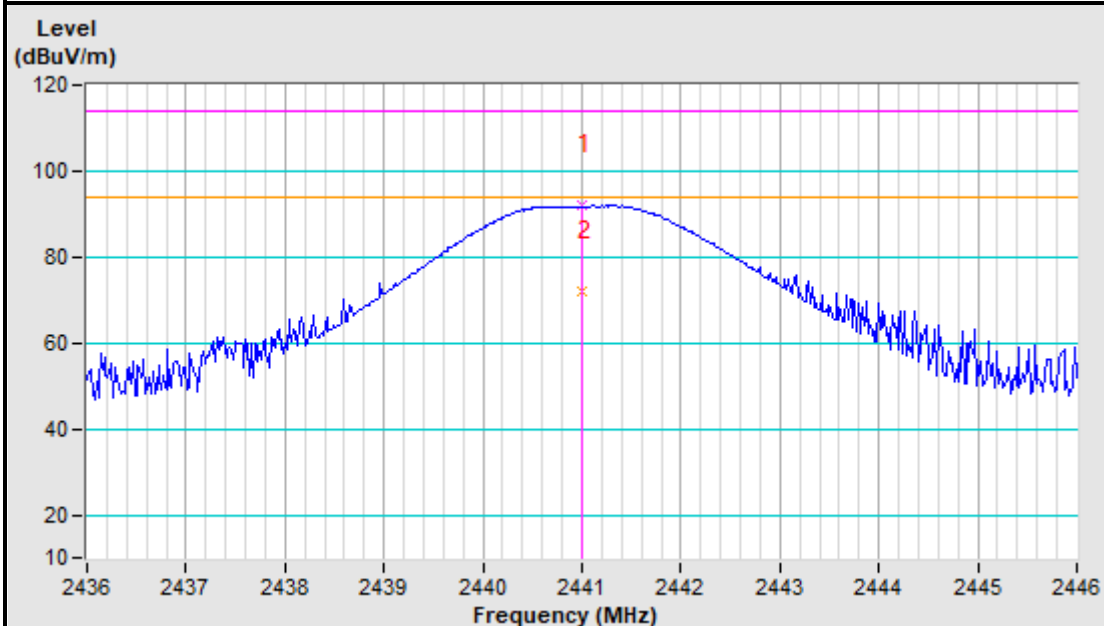

2441MHz Horizontal

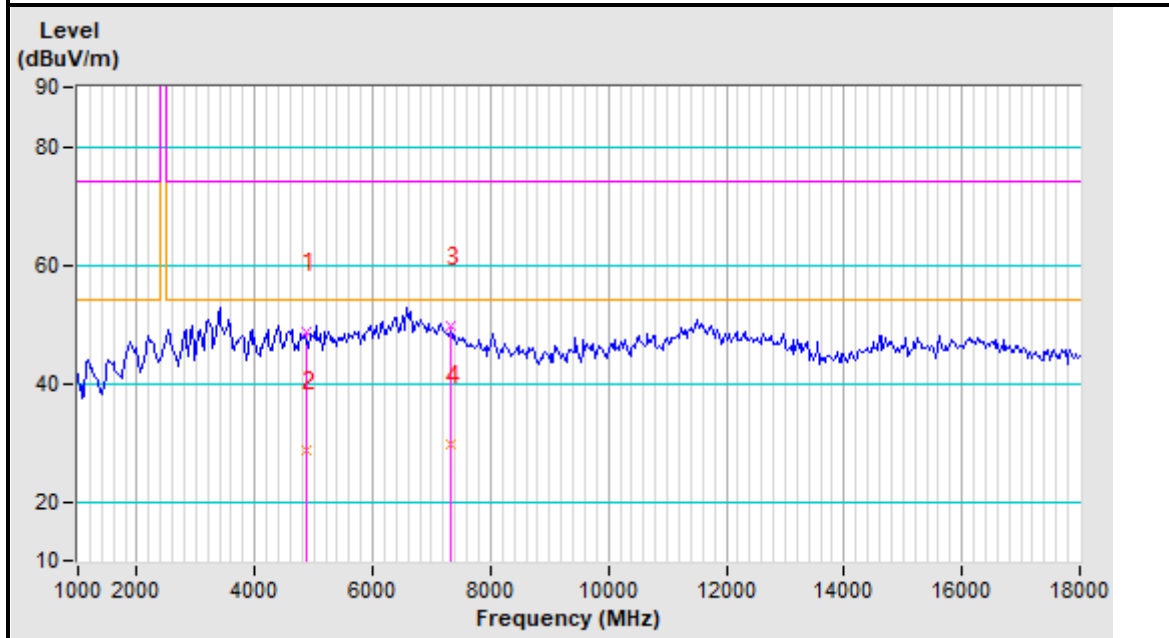

2441MHz Vertical

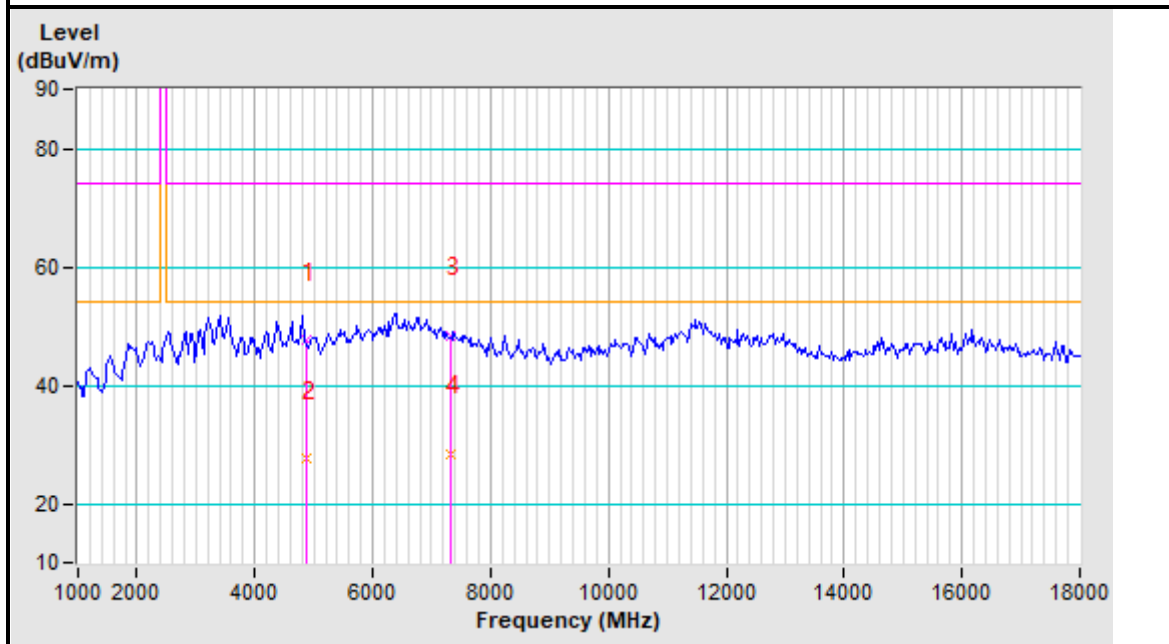

Note: For 18GHz to 25GHz, the amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.


CHANNEL	TX High Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.89 PK	114.00	-23.11	156	56	88.53	2.36
2	*2480.00	70.89 AV	94.00	-23.11	156	56	68.53	2.36
3	2483.50	60.55 PK	74.00	-13.45	133	45	58.19	2.36
4	2483.50	40.55 AV	54.00	-13.45	133	45	38.19	2.36
5	2483.60	61.81 PK	74.00	-12.19	155	45	59.44	2.37
6	2483.60	41.81 AV	54.00	-12.19	155	45	39.44	2.37
7	4960.00	47.65 PK	74.00	-26.35	166	5	42.07	5.58
8	4960.00	27.65 AV	54.00	-26.35	166	5	22.07	5.58
9	7440.00	49.58 PK	74.00	-24.42	141	47	42.41	7.17
10	7440.00	29.58 AV	54.00	-24.42	141	47	22.41	7.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.14 PK	114.00	-23.86	146	6	87.78	2.36
2	*2480.00	70.14 AV	94.00	-23.86	146	6	67.78	2.36
3	2483.50	59.14 PK	74.00	-14.86	155	56	56.78	2.36
4	2483.50	39.14 AV	54.00	-14.86	155	56	36.78	2.36
5	2483.78	61.91 PK	74.00	-12.09	155	45	59.54	2.37
6	2483.78	41.91 AV	54.00	-12.09	155	45	39.54	2.37
7	4960.00	48.65 PK	74.00	-25.35	166	5	43.07	5.58
8	4960.00	28.65 AV	54.00	-25.35	166	5	23.07	5.58
9	7440.00	49.33 PK	74.00	-24.67	156	360	42.16	7.17
10	7440.00	29.33 AV	54.00	-24.67	156	360	22.16	7.17


REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log (duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (10.00\%) \approx -20.00 \text{ dB}$, Please see page 11 for plotted duty.
7. The frequency. NO. 7, 8, 9, 10 in the table are marked with 1, 2, 3, 4 in the spectrum plot.


2480MHz Horizontal

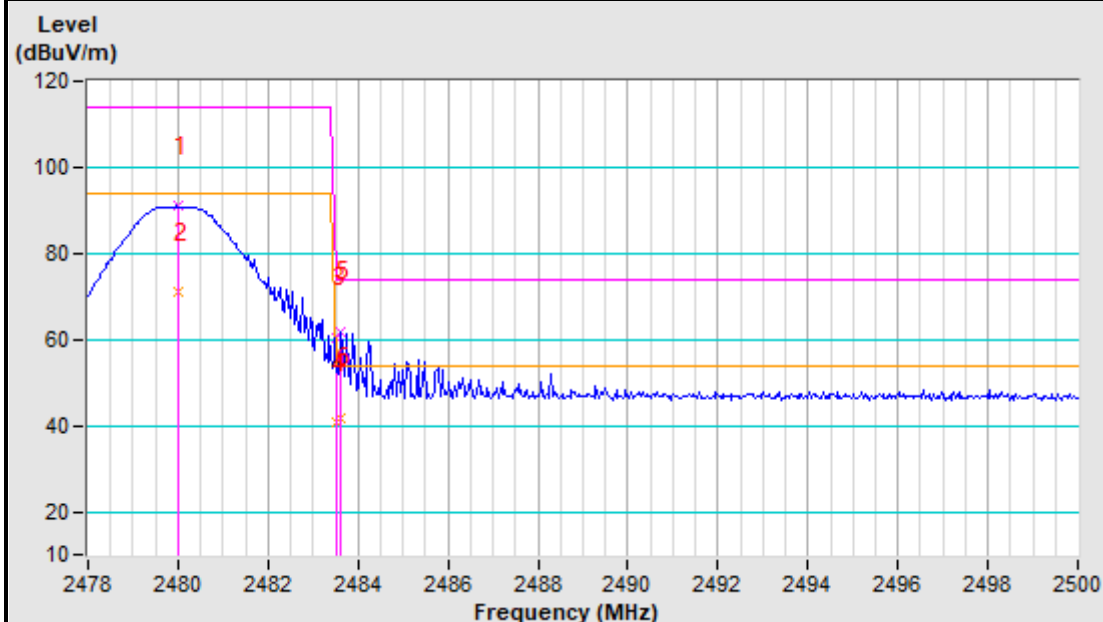


2480MHz Vertical

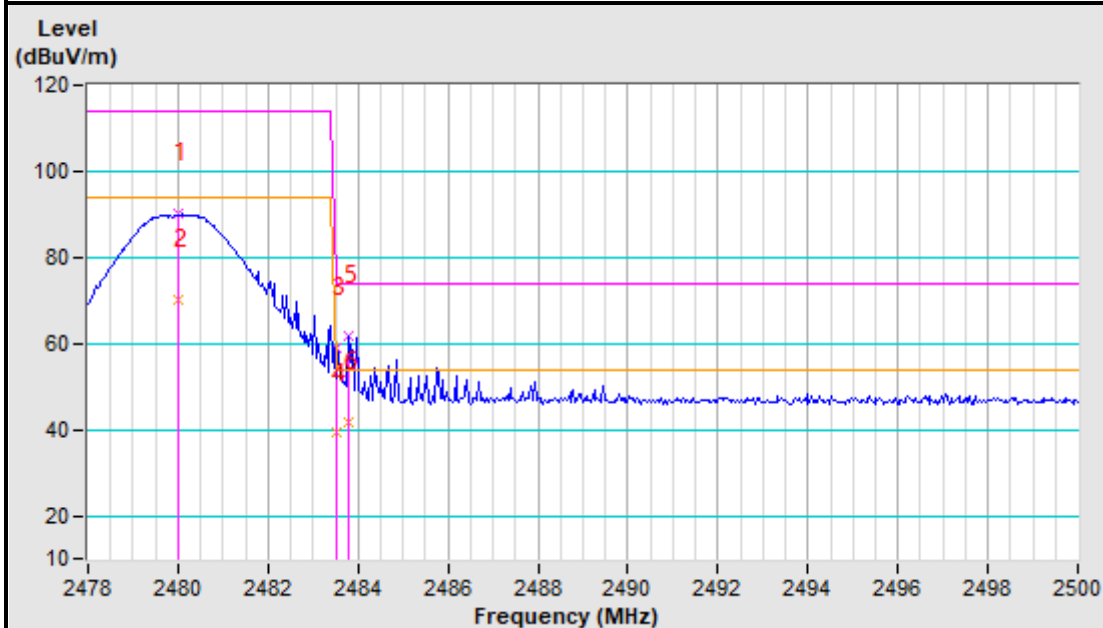

2480MHz Horizontal

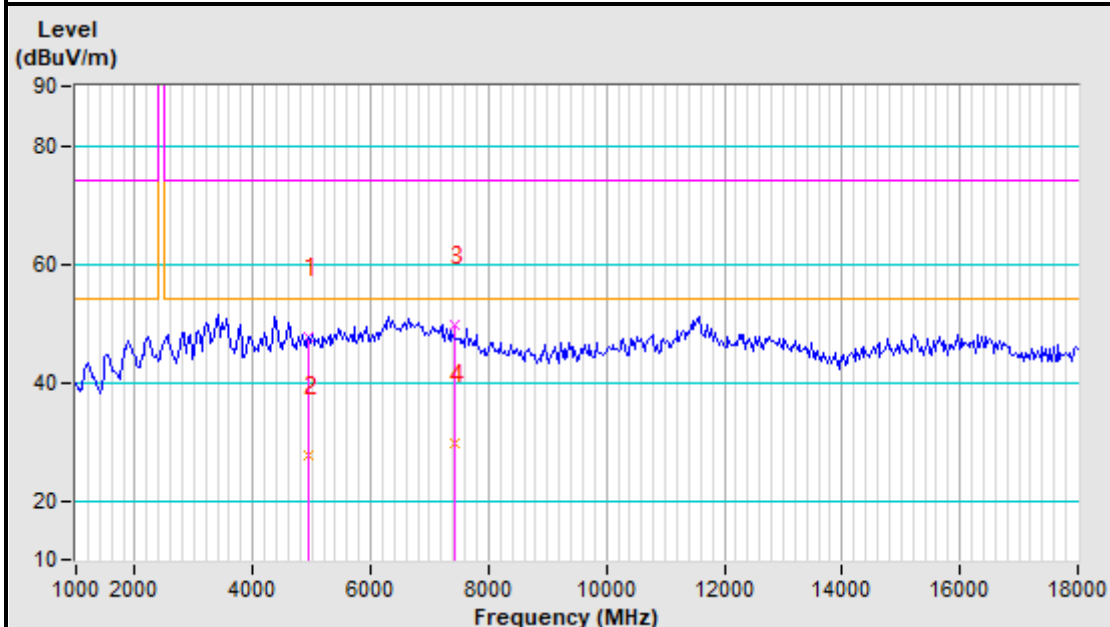

2480MHz Vertical

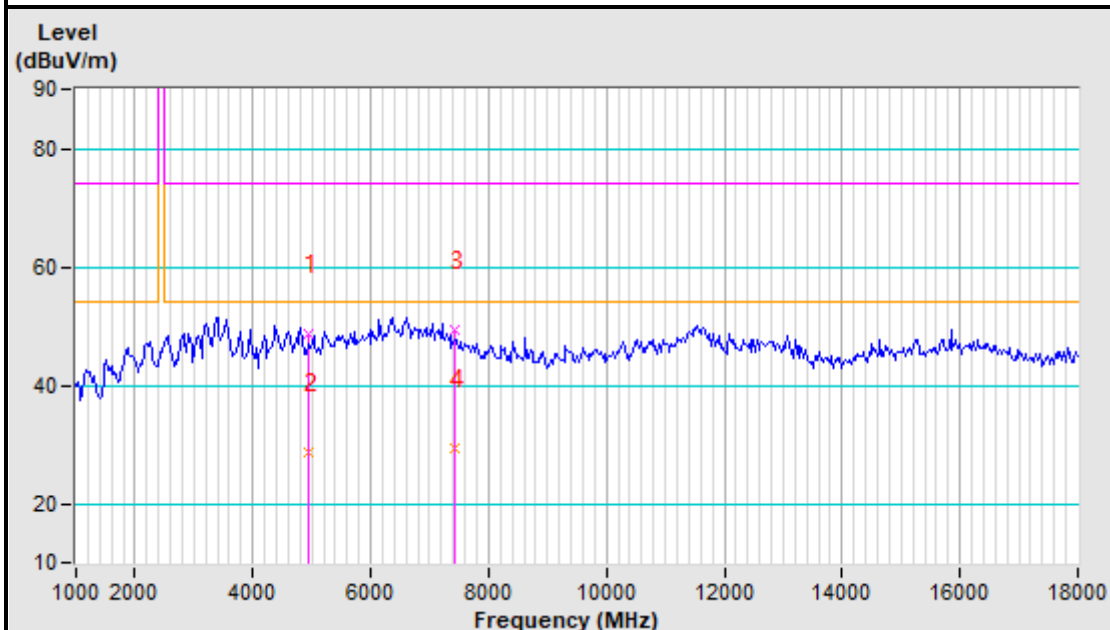

Note: For 18GHz to 25GHz, the amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.

ABOVE 1GHz DATA FOR GFKS 4Mbps:


CHANNEL	TX Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	53.10 PK	74.00	-20.90	400	156	50.83	2.27
2	2400.00	33.27 AV	54.00	-20.73	400	156	31.00	2.27
3	*2405.00	91.55 PK	114.00	-22.45	156	56	89.27	2.28
4	*2405.00	71.72 AV	94.00	-22.28	156	56	69.44	2.28
5	4810.00	48.68 PK	74.00	-25.32	100	65	42.80	5.88
6	4810.00	28.85 AV	54.00	-25.15	100	65	22.97	5.88
7	7215.00	50.74 PK	74.00	-23.26	156	45	42.83	7.91
8	7215.00	30.91 AV	54.00	-23.09	156	45	23.00	7.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	54.89 PK	74.00	-19.11	223	5	52.62	2.27
2	2400.00	35.06 AV	54.00	-18.94	223	5	32.79	2.27
3	*2405.00	90.95 PK	114.00	-23.05	266	6	88.67	2.28
4	*2405.00	71.12 AV	94.00	-22.88	266	6	68.84	2.28
5	4810.00	48.69 PK	74.00	-25.31	258	360	42.81	5.88
6	4810.00	28.86 AV	54.00	-25.14	258	360	22.98	5.88
7	7215.00	50.25 PK	74.00	-23.75	156	54	42.34	7.91
8	7215.00	30.42 AV	54.00	-23.58	156	54	22.51	7.91


REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log (duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (10.19\%) \approx -19.83 \text{ dB}$, Please see page 12 for plotted duty.
7. The frequency. NO. 5,6,7, 8 in the table are marked with 1, 2, 3, 4 in the spectrum plot.


2405MHz Horizontal

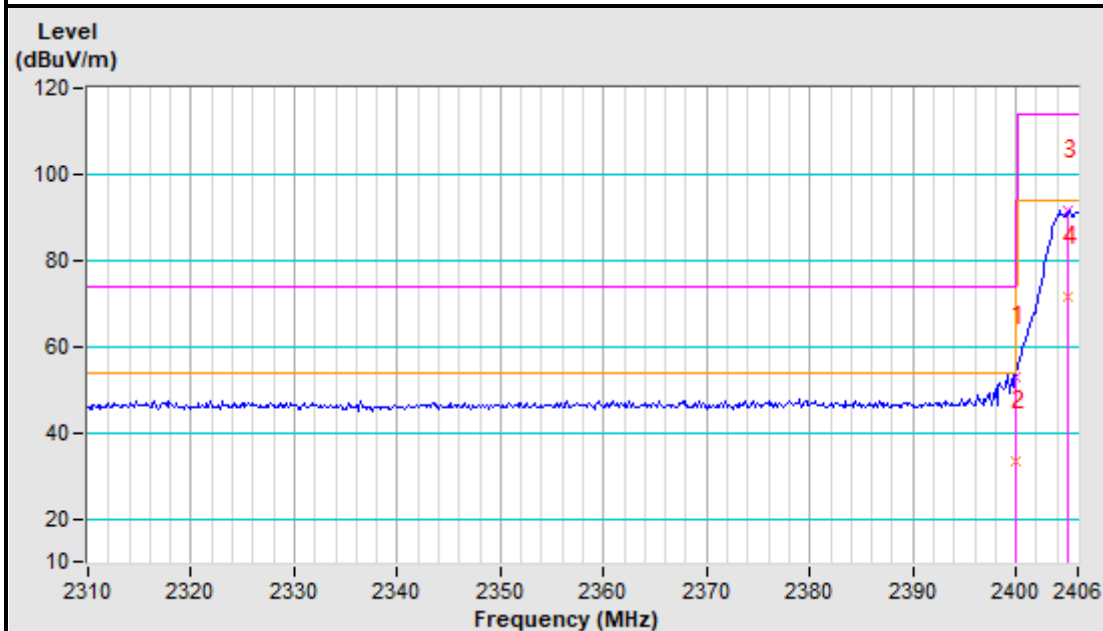


2405MHz Vertical

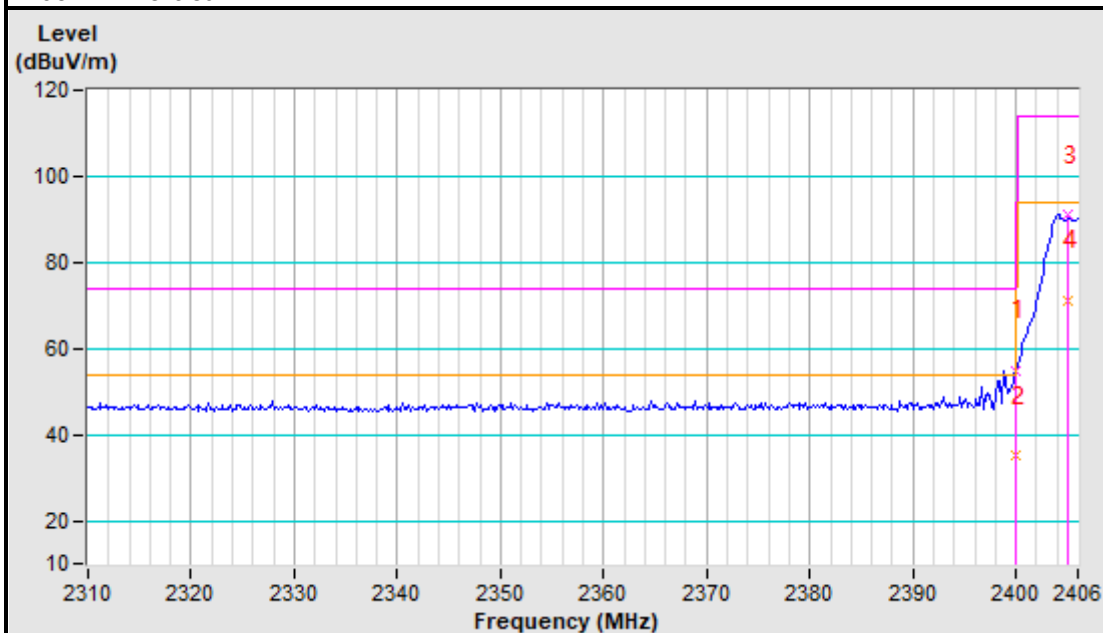

2405MHz Horizontal

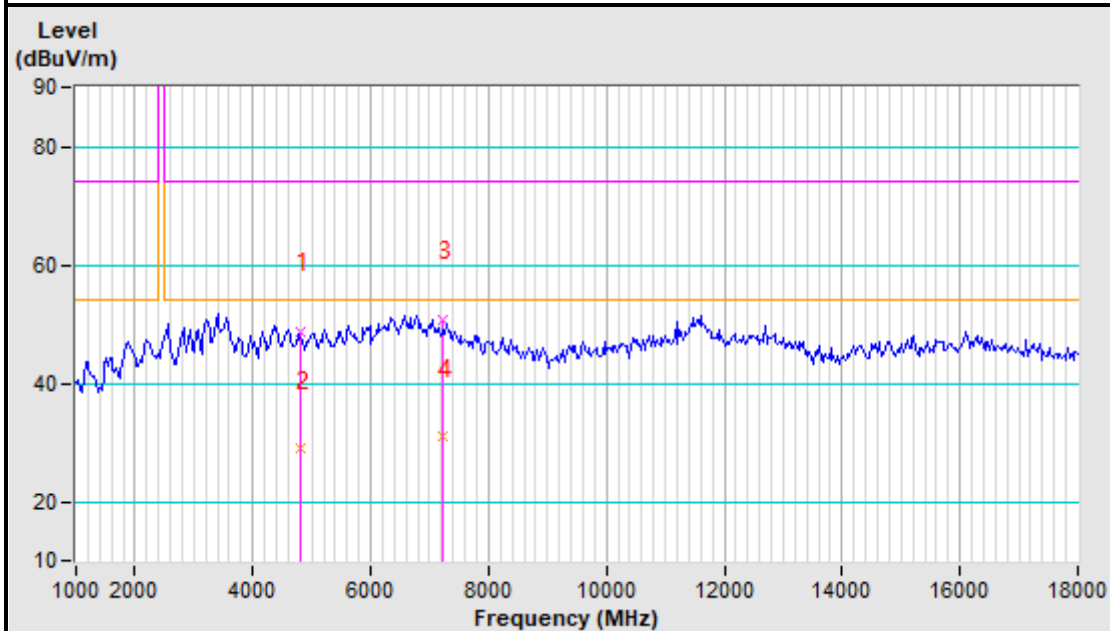

2405MHz Vertical

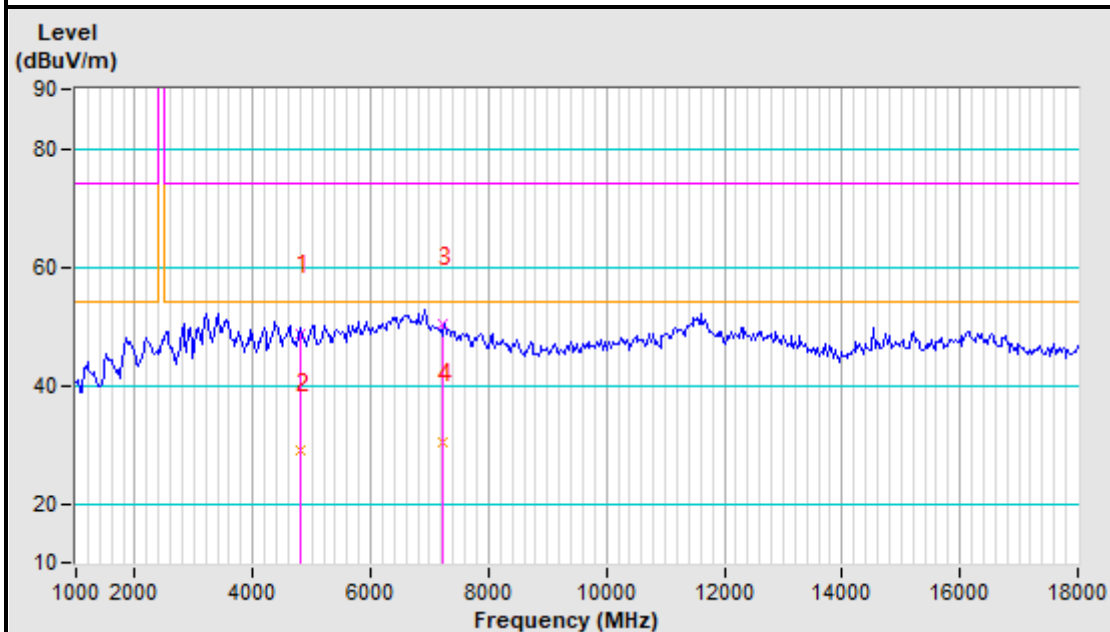

Note: For 18GHz to 25GHz, the amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.


CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.44 PK	114.00	-23.56	146	15	88.13	2.31
2	*2441.00	70.61 AV	94.00	-23.39	146	15	68.30	2.31
3	4882.00	48.37 PK	74.00	-25.63	155	56	42.64	5.73
4	4882.00	28.54 AV	54.00	-25.46	155	56	22.81	5.73
5	7323.00	51.46 PK	74.00	-22.54	185	85	43.90	7.56
6	7323.00	31.63 AV	54.00	-22.37	185	85	24.07	7.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	91.90 PK	114.00	-22.10	166	56	89.59	2.31
2	*2441.00	72.07 AV	94.00	-21.93	166	56	69.76	2.31
3	4882.00	47.16 PK	74.00	-26.84	169	5	41.43	5.73
4	4882.00	27.33 AV	54.00	-26.67	169	5	21.60	5.73
5	7323.00	50.49 PK	74.00	-23.51	146	58	42.93	7.56
6	7323.00	30.66 AV	54.00	-23.34	146	58	23.10	7.56


REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log (duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (10.19\%) \approx -19.83 \text{ dB}$, Please see page 12 for plotted duty.
7. The frequency. NO. 3, 4, 5, 6 in the table are marked with 1, 2, 3, 4 in the spectrum plot.


2441MHz Horizontal

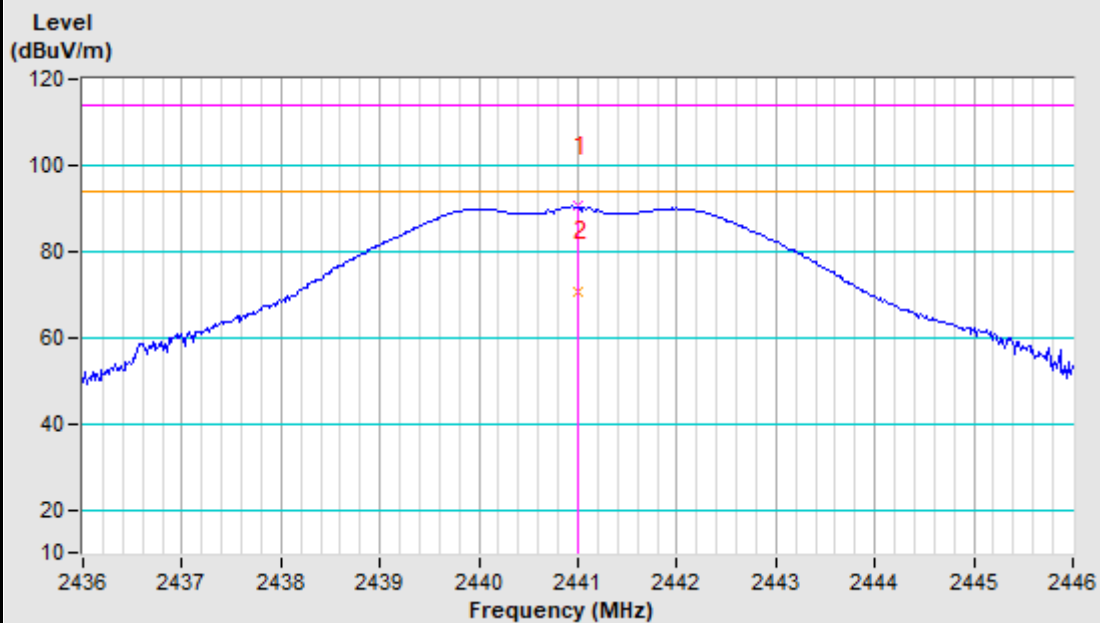


2441MHz Vertical

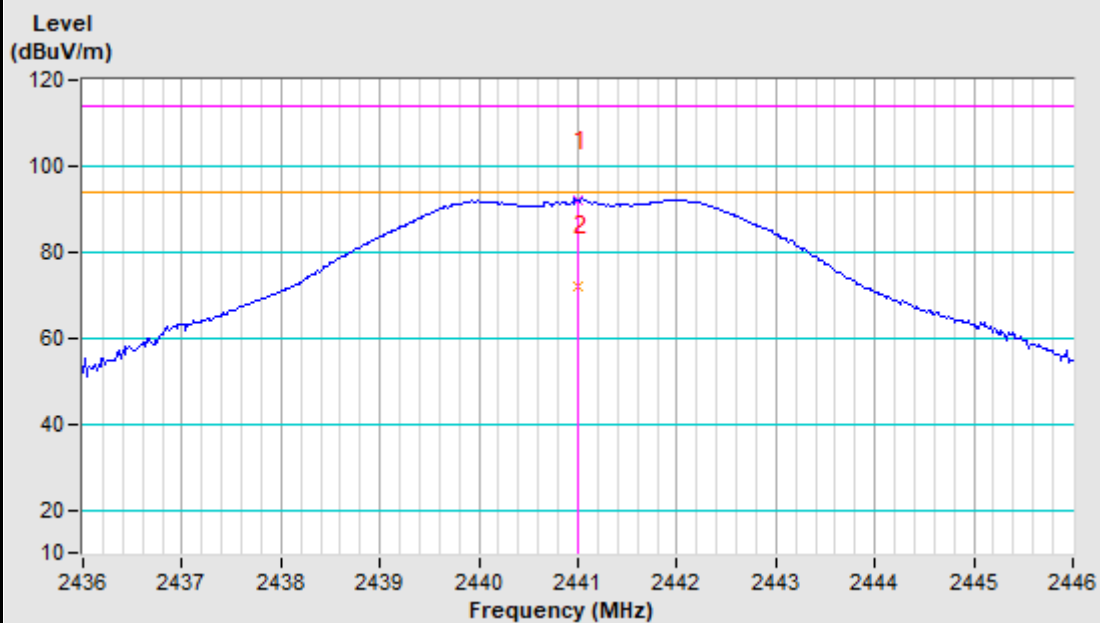

2441MHz Horizontal

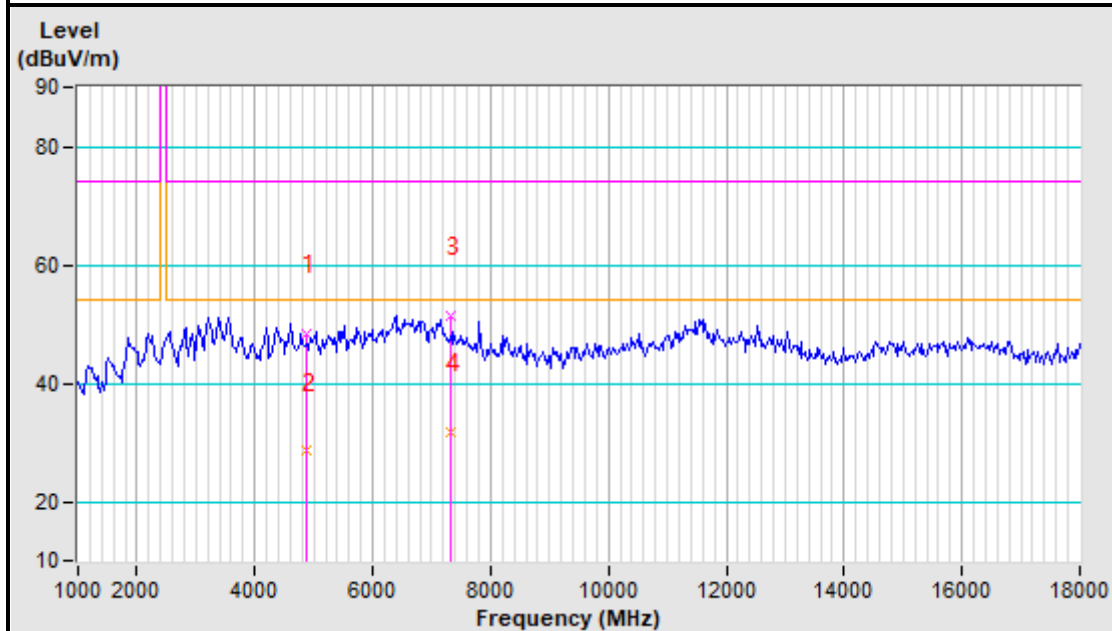

2441MHz Vertical

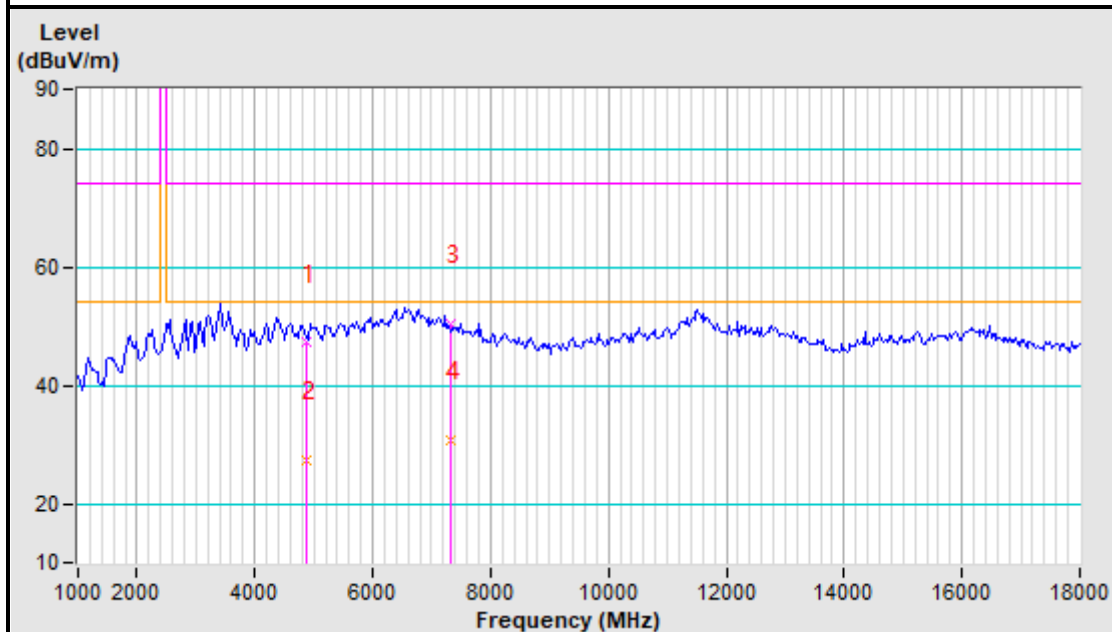

Note: For 18GHz to 25GHz, the amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.


CHANNEL	TX High Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2477.00	91.06 PK	114.00	-22.94	156	56	88.70	2.36
2	*2477.00	71.23 AV	94.00	-22.77	156	56	68.87	2.36
3	2483.50	50.42 PK	74.00	-23.58	156	5	48.06	2.36
4	2483.50	30.59 AV	54.00	-23.41	156	5	28.23	2.36
5	2484.46	50.59 PK	74.00	-23.41	156	54	48.22	2.37
6	2484.46	30.76 AV	54.00	-23.24	156	54	28.39	2.37
7	4954.00	47.65 PK	74.00	-26.35	156	5	42.07	5.58
8	4954.00	27.82 AV	54.00	-26.18	156	5	22.24	5.58
9	7431.00	49.28 PK	74.00	-24.72	156	4	42.08	7.20
10	7431.00	29.45 AV	54.00	-24.55	156	4	22.25	7.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2477.00	89.96 PK	114.00	-24.04	100	360	87.60	2.36
2	*2477.00	70.13 AV	94.00	-23.87	100	360	67.77	2.36
3	2483.50	46.58 PK	74.00	-27.42	156	54	44.22	2.36
4	2483.50	26.75 AV	54.00	-27.25	156	54	24.39	2.36
5	4954.00	48.46 PK	74.00	-25.54	156	56	42.88	5.58
6	4954.00	28.63 AV	54.00	-25.37	156	56	23.05	5.58
7	7431.00	49.47 PK	74.00	-24.53	156	58	42.27	7.20
8	7431.00	29.64 AV	54.00	-24.36	156	58	22.44	7.20


REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log (duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (10.19\%) \approx -19.83 \text{ dB}$, Please see page 12 for plotted duty.
7. The frequency. NO. 7, 8, 9, 10 or NO. 5,6,7, 8 in the table are marked with 1, 2, 3, 4 in the spectrum plot.


2477MHz Horizontal

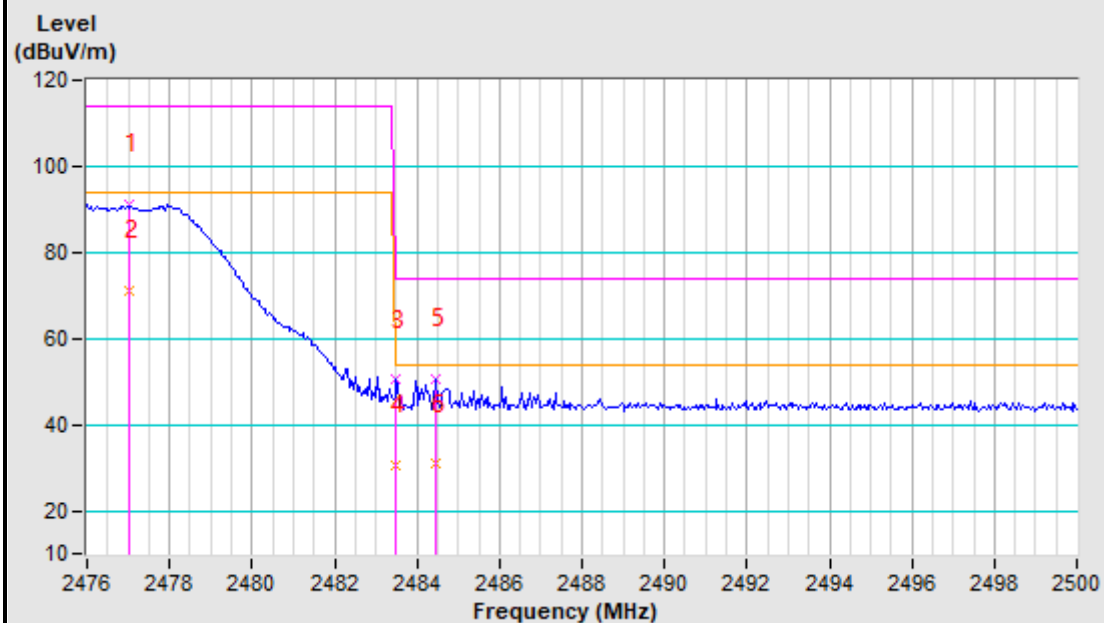


2477MHz Vertical

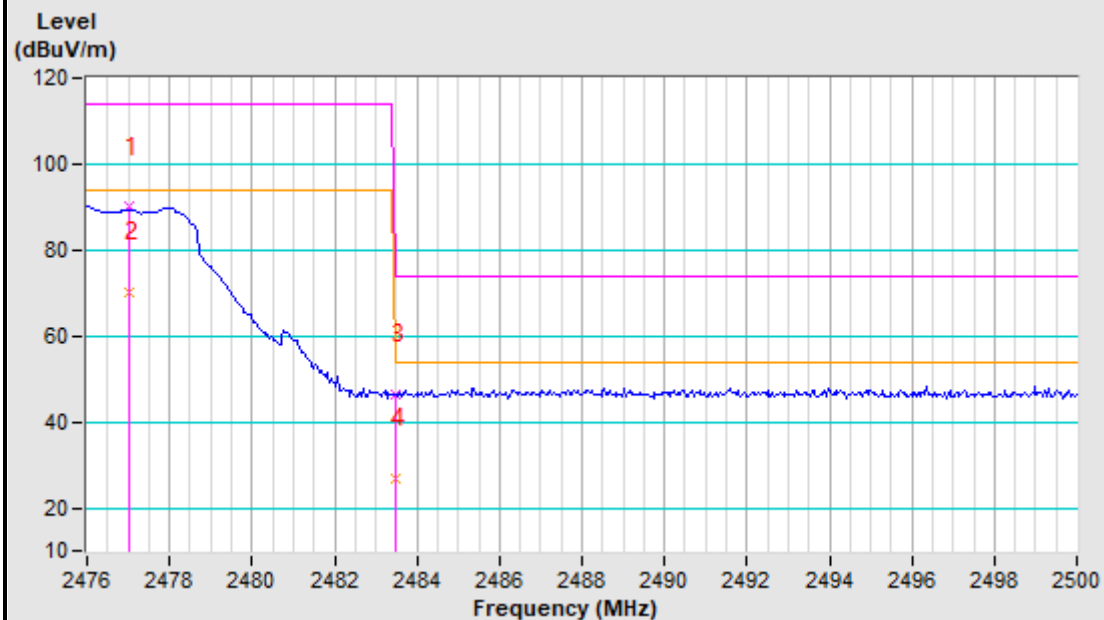

2477MHz Horizontal

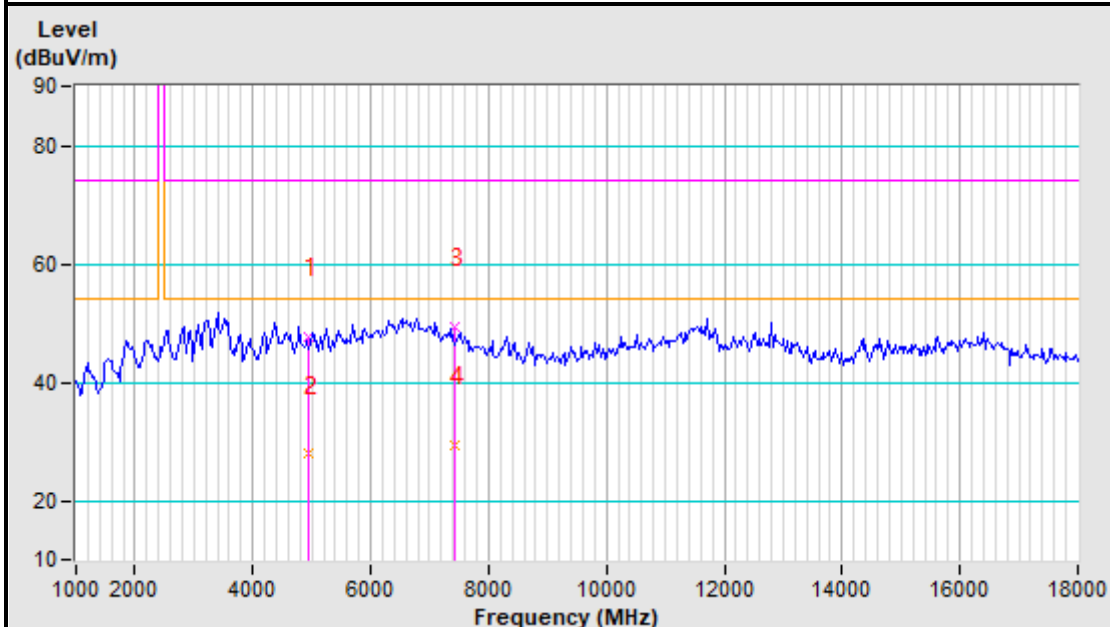

2477MHz Vertical

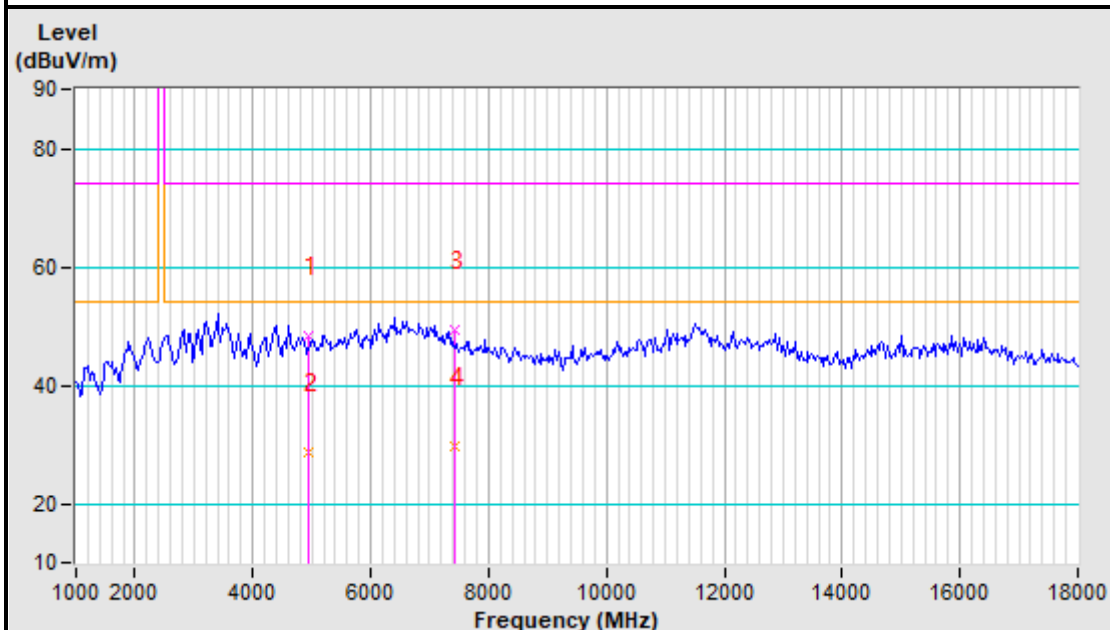

Note: For 18GHz to 25GHz, the amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.

4.3 20dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 08, 27
Digital Multimeter	FLUKE	15B	12151063	Apr. 07, 27
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 10, 26
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Oct. 09, 26
Signal Generator	Agilent	N5183A	MY50140980	Jul. 02, 27
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 02, 27
Attenuator	MINI	BW-S10W2+	S130129FGE2	Jul. 02, 27
DC Source	Rohde&Schwarz	HMP2020	101295	Apr. 07, 27
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. Test Site: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.
4. The calibration interval of all equipment is one year.


4.3.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.3.7 TEST RESULTS


For GFSK 2Mbps:

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2403	1.860
Middle	2441	1.874
High	2480	1.802


Test Data: Low channel

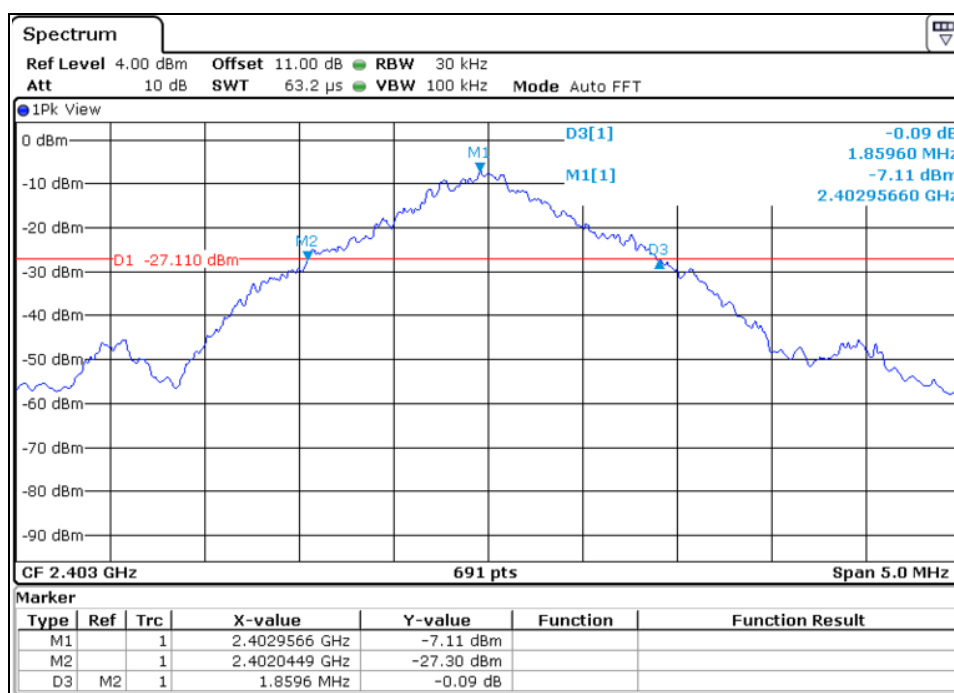

Test Data: Middle channel

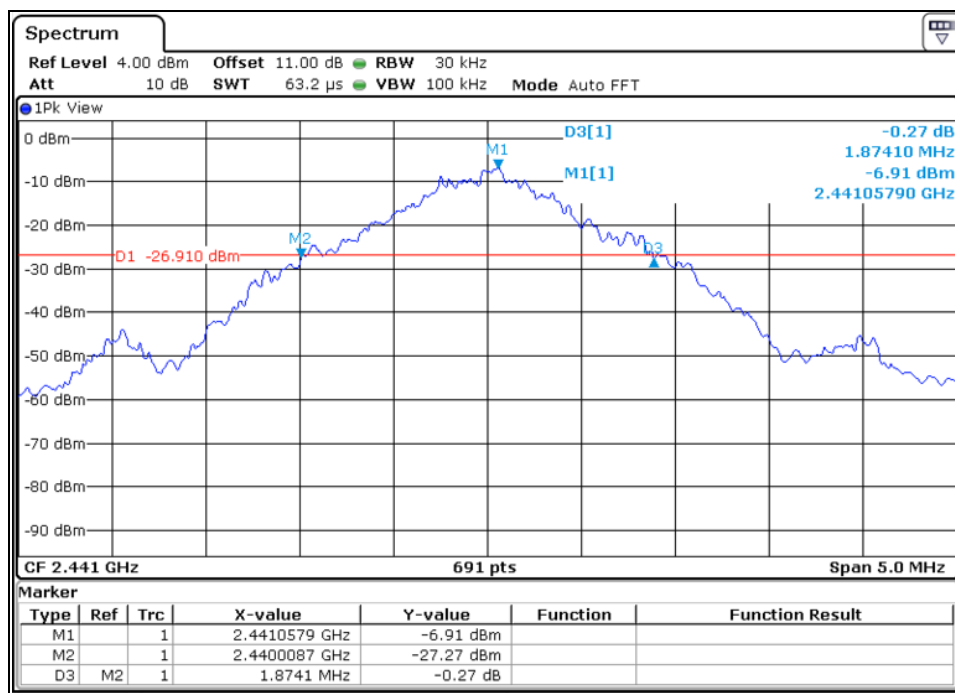


Test Data: High channel

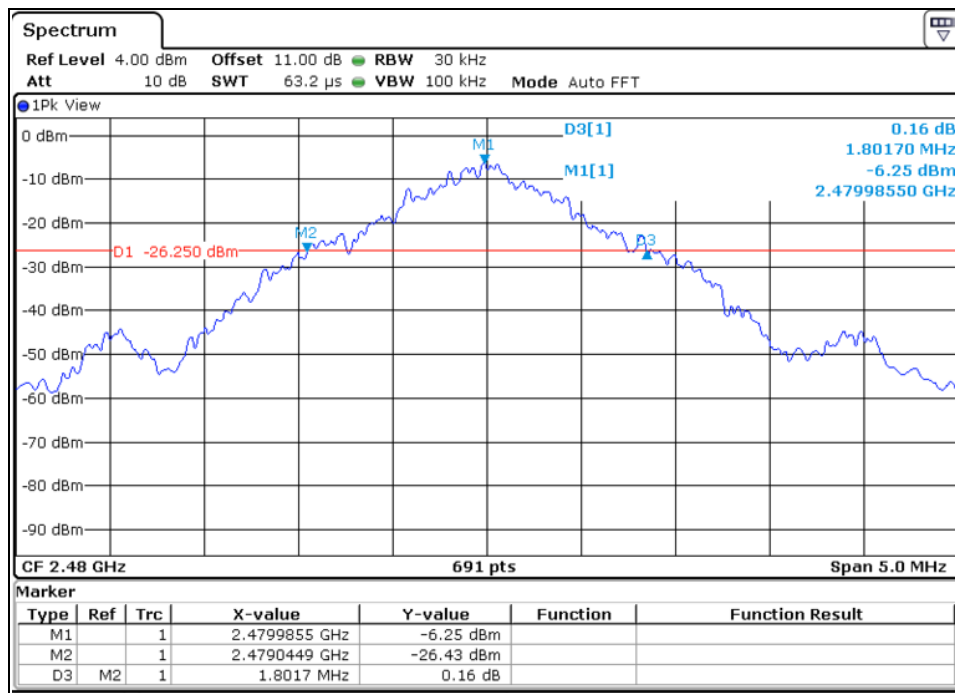


For GFSK 4Mbps:

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2405	4.515
Middle	2441	4.237
High	2477	4.255


Test Data: Low channel

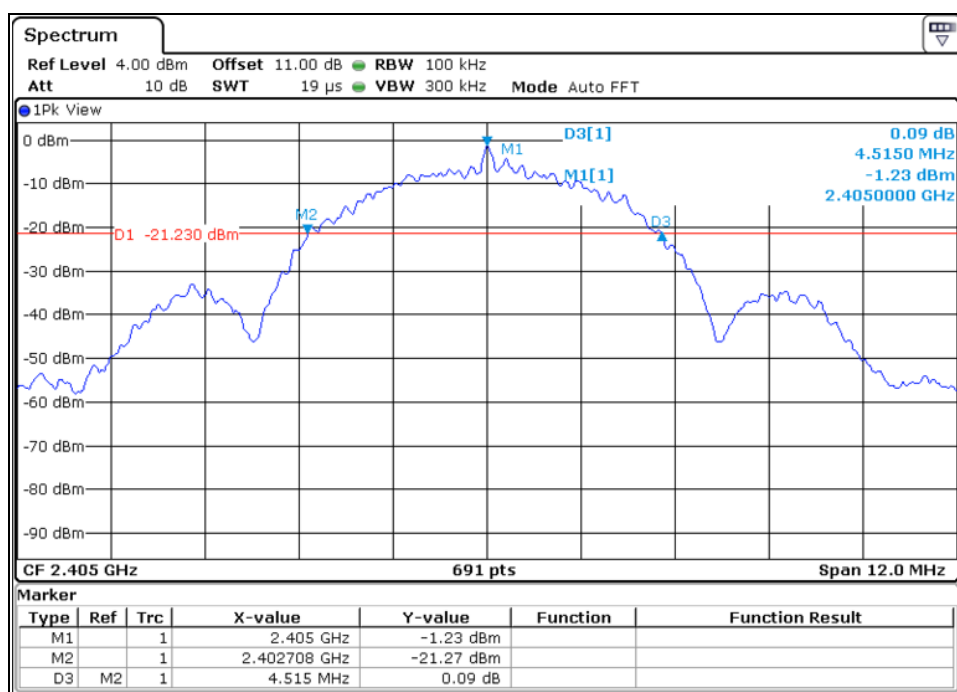

Test Data: Middle channel

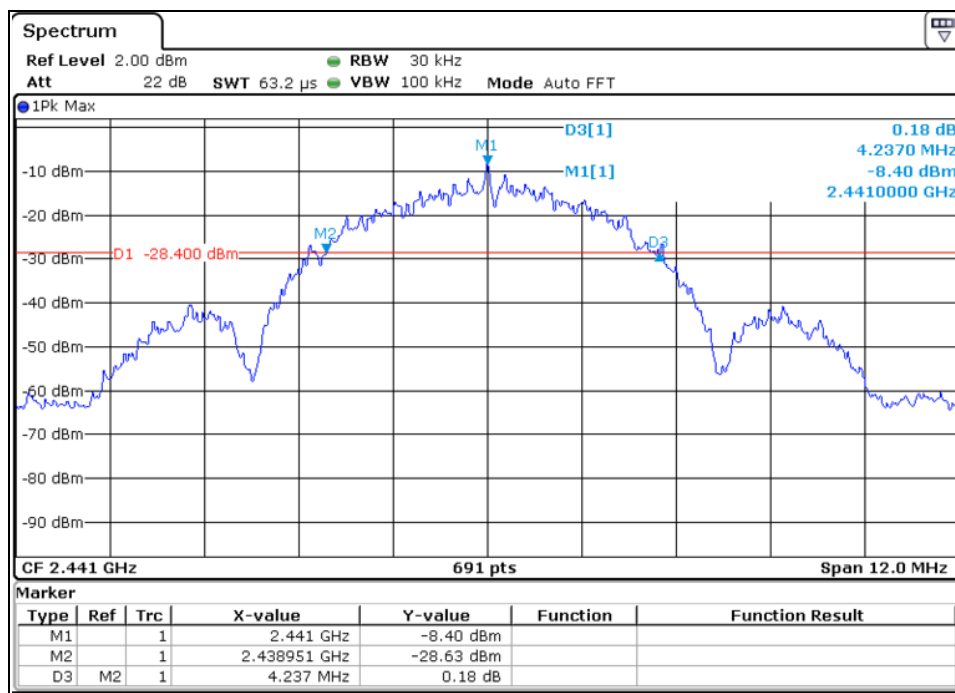

Test Data: High channel

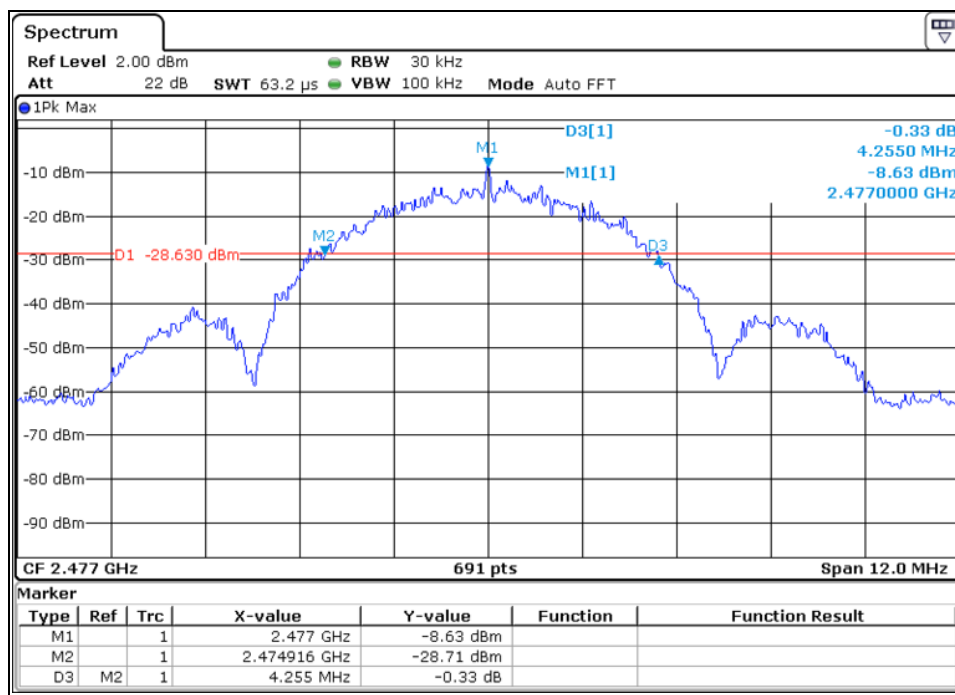

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---