




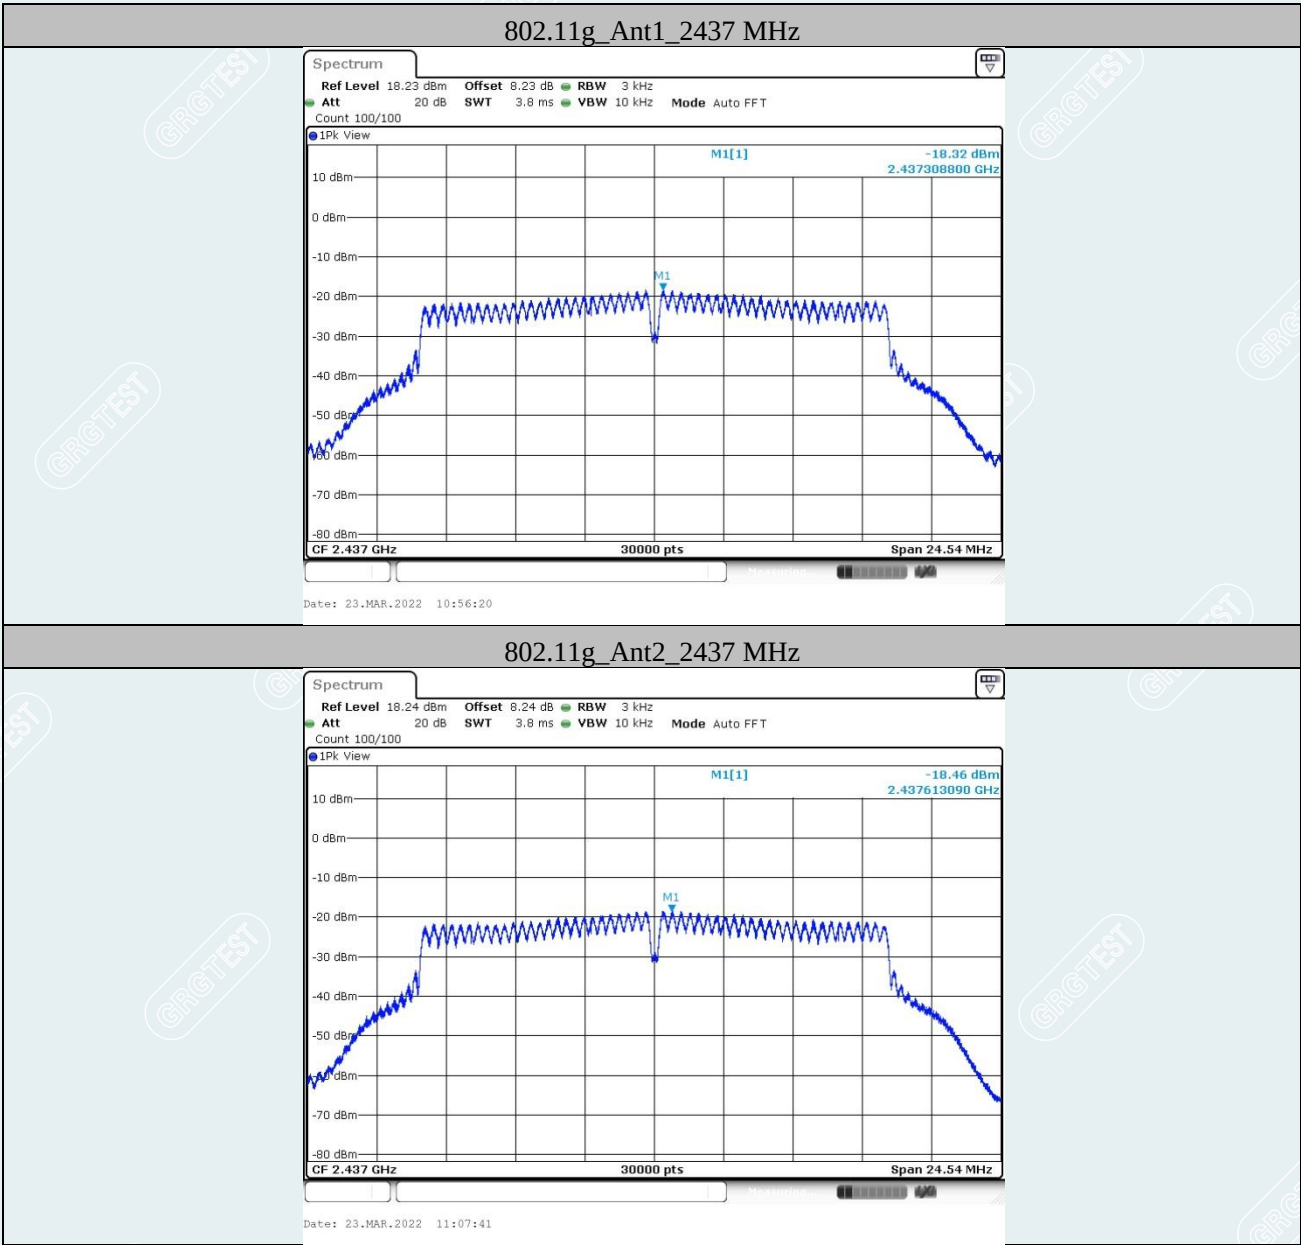


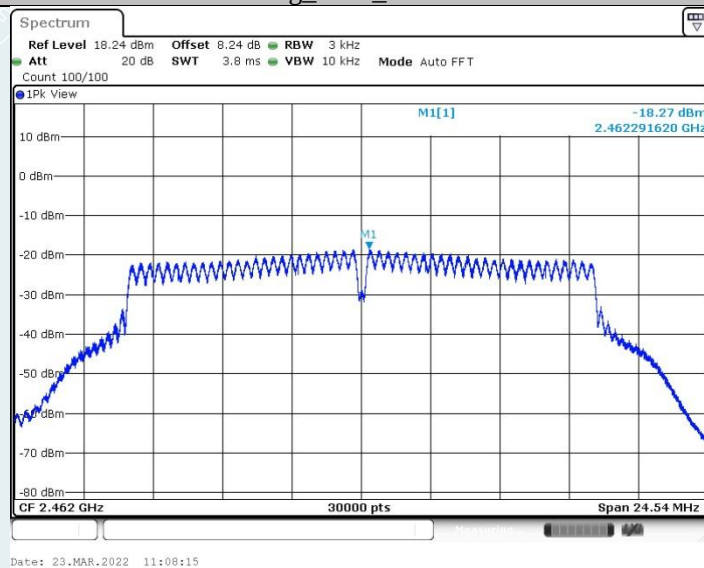

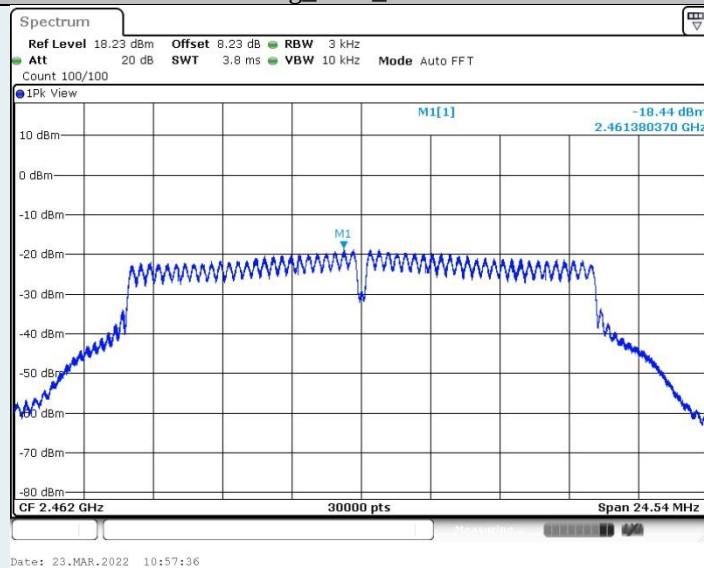

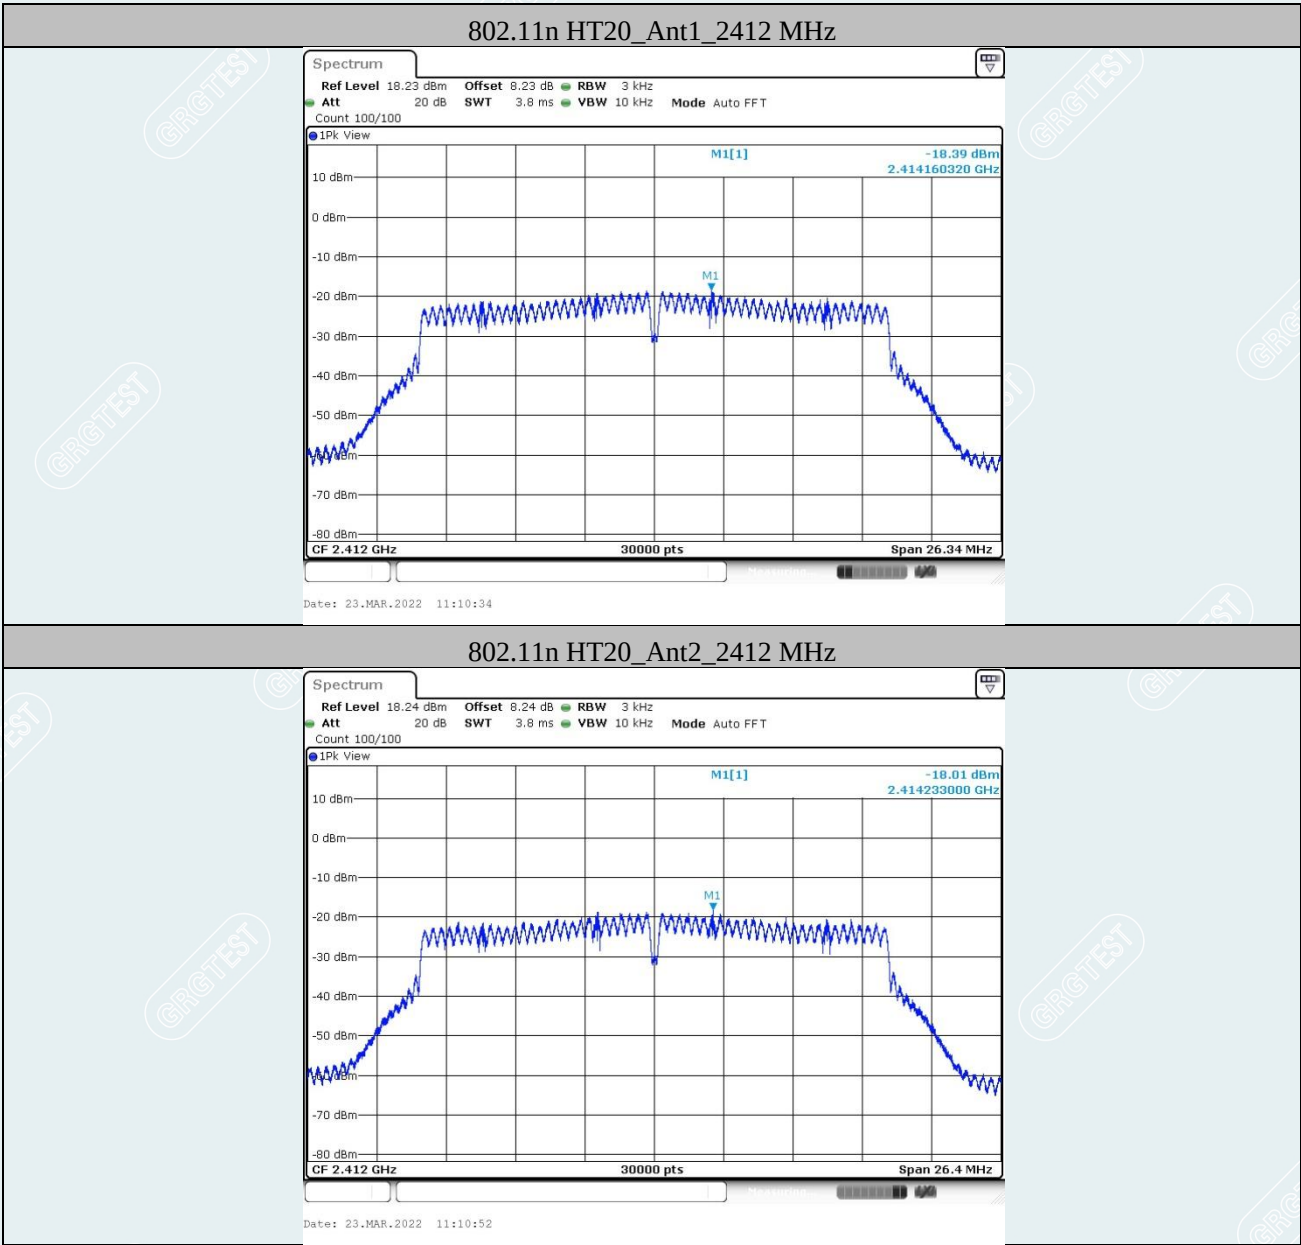

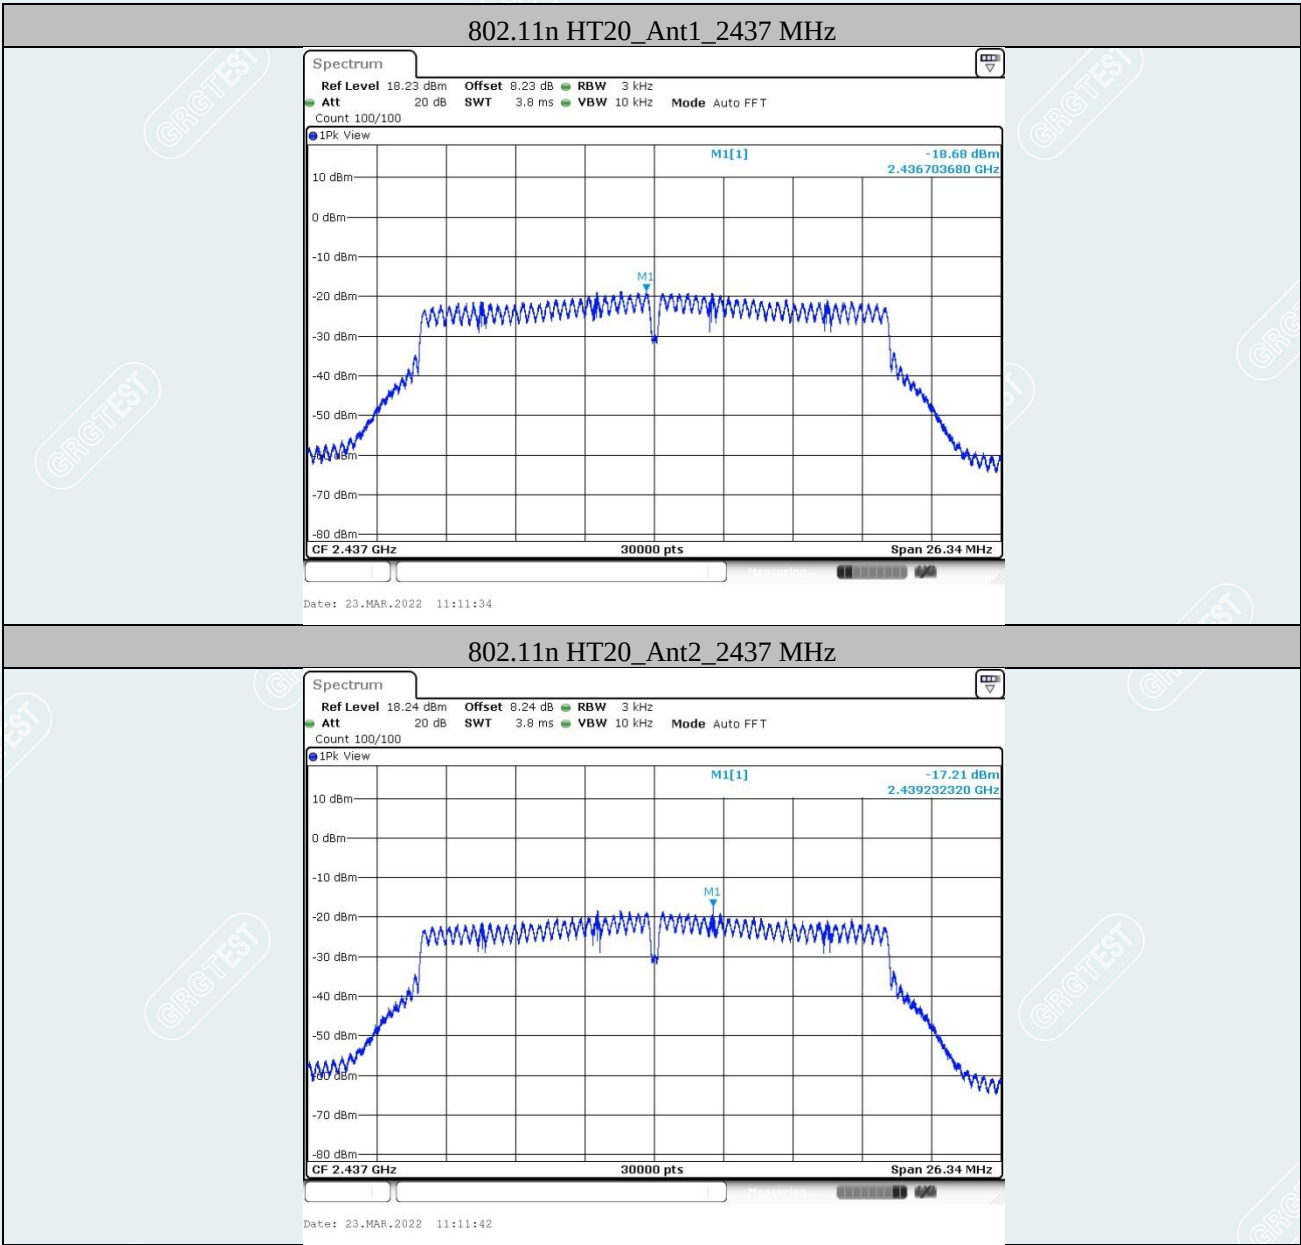

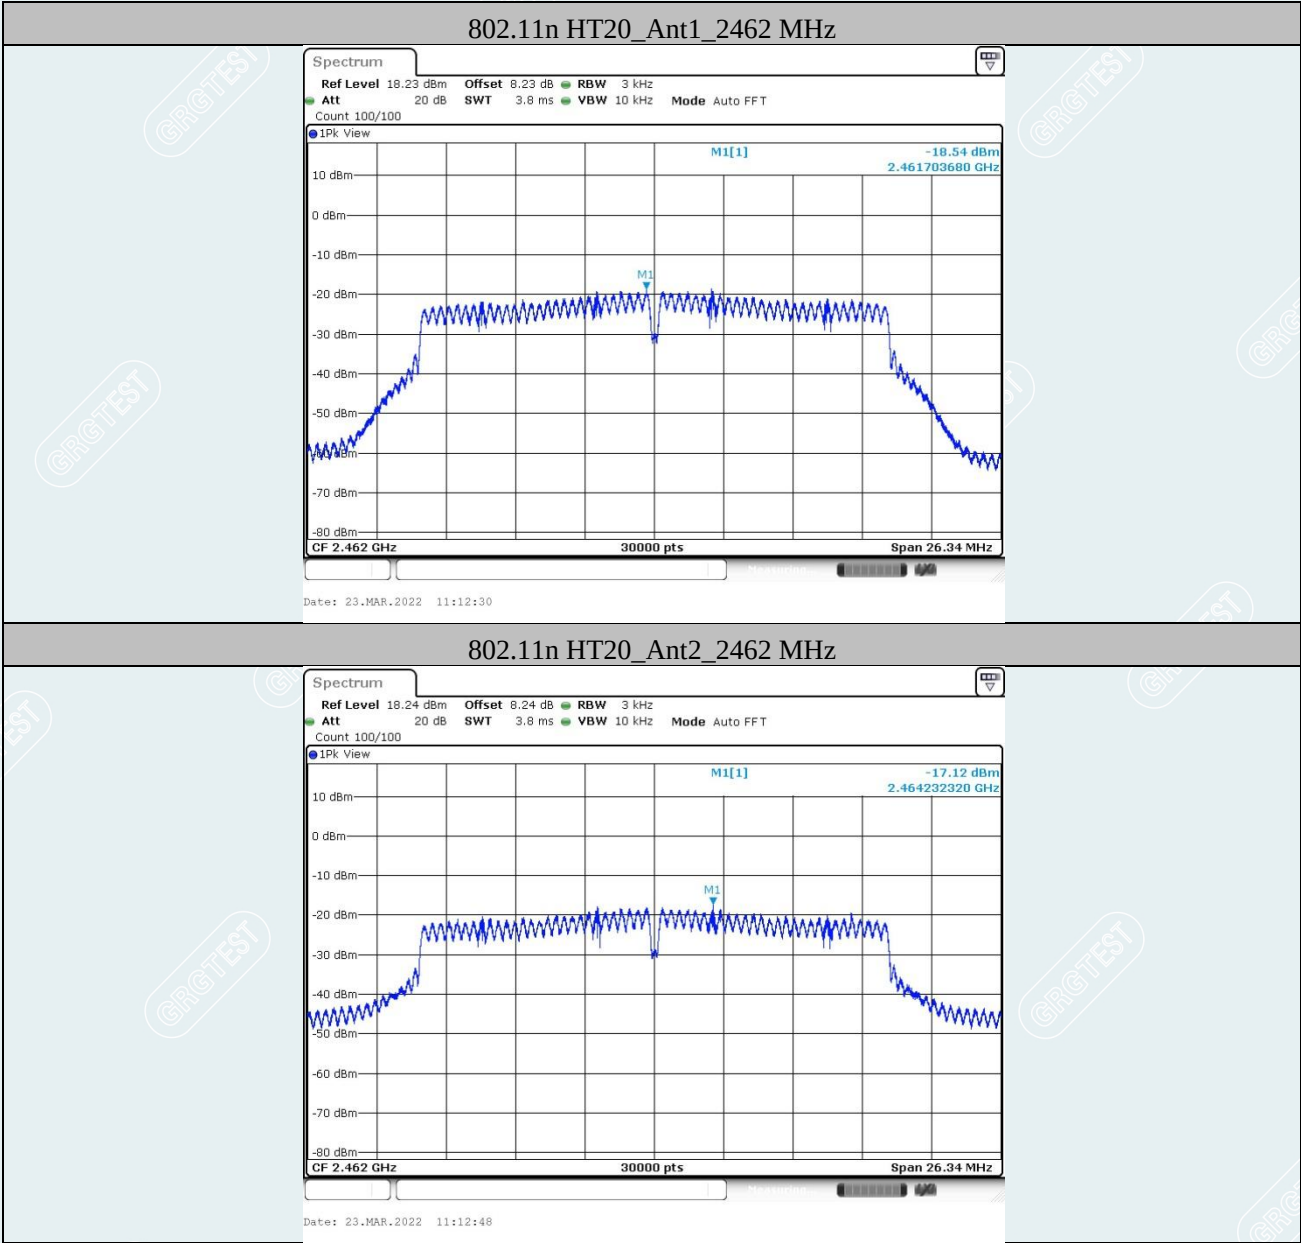

10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

10.1 LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


10.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 Measurement Guidance.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.

- 1) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW = 100kHz; VBW = 300kHz, Frequency range = 30MHz to 26.5GHz; Sweep = auto; Detector Function = Peak; Trace = Max hold.
- 3) Measure and record the results in the test report.
- 4) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

10.3 TEST SETUP

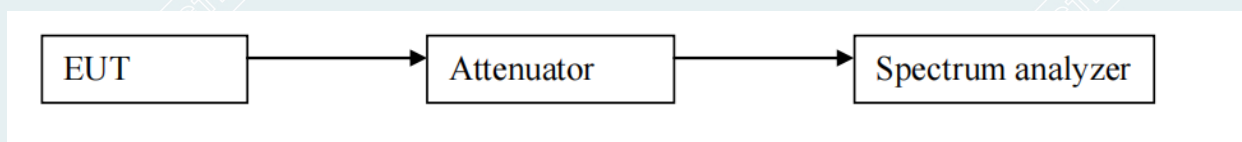

----- The following blanks -----

10.4 TEST RESULTS

Environment: 23.5℃/48%RH
Tested By:Lu Wei


Voltage:DC 3.8V
Date: 2022-03-23

Band edge


Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
802.11b	Ant1	Low	2412	8.71	-39.18	≤-11.29	PASS
	Ant2	Low	2412	8.81	-42.26	≤-11.19	PASS
	Ant1	High	2462	8.81	-46.64	≤-11.19	PASS
	Ant2	High	2462	8.48	-46.82	≤-11.52	PASS
802.11g	Ant1	Low	2412	2.27	-33.25	≤-17.73	PASS
	Ant2	Low	2412	1.69	-35.64	≤-18.31	PASS
	Ant1	High	2462	1.59	-44.13	≤-18.41	PASS
	Ant2	High	2462	1.77	-47.26	≤-18.23	PASS
802.11n HT20	Ant1	Low	2412	2.21	-33.07	≤-17.79	PASS
	Ant2	Low	2412	2.70	-31.12	≤-17.3	PASS
	Ant1	High	2462	1.74	-44.24	≤-18.26	PASS
	Ant2	High	2462	3.34	-28.2	≤-16.66	PASS

----- The following blanks -----



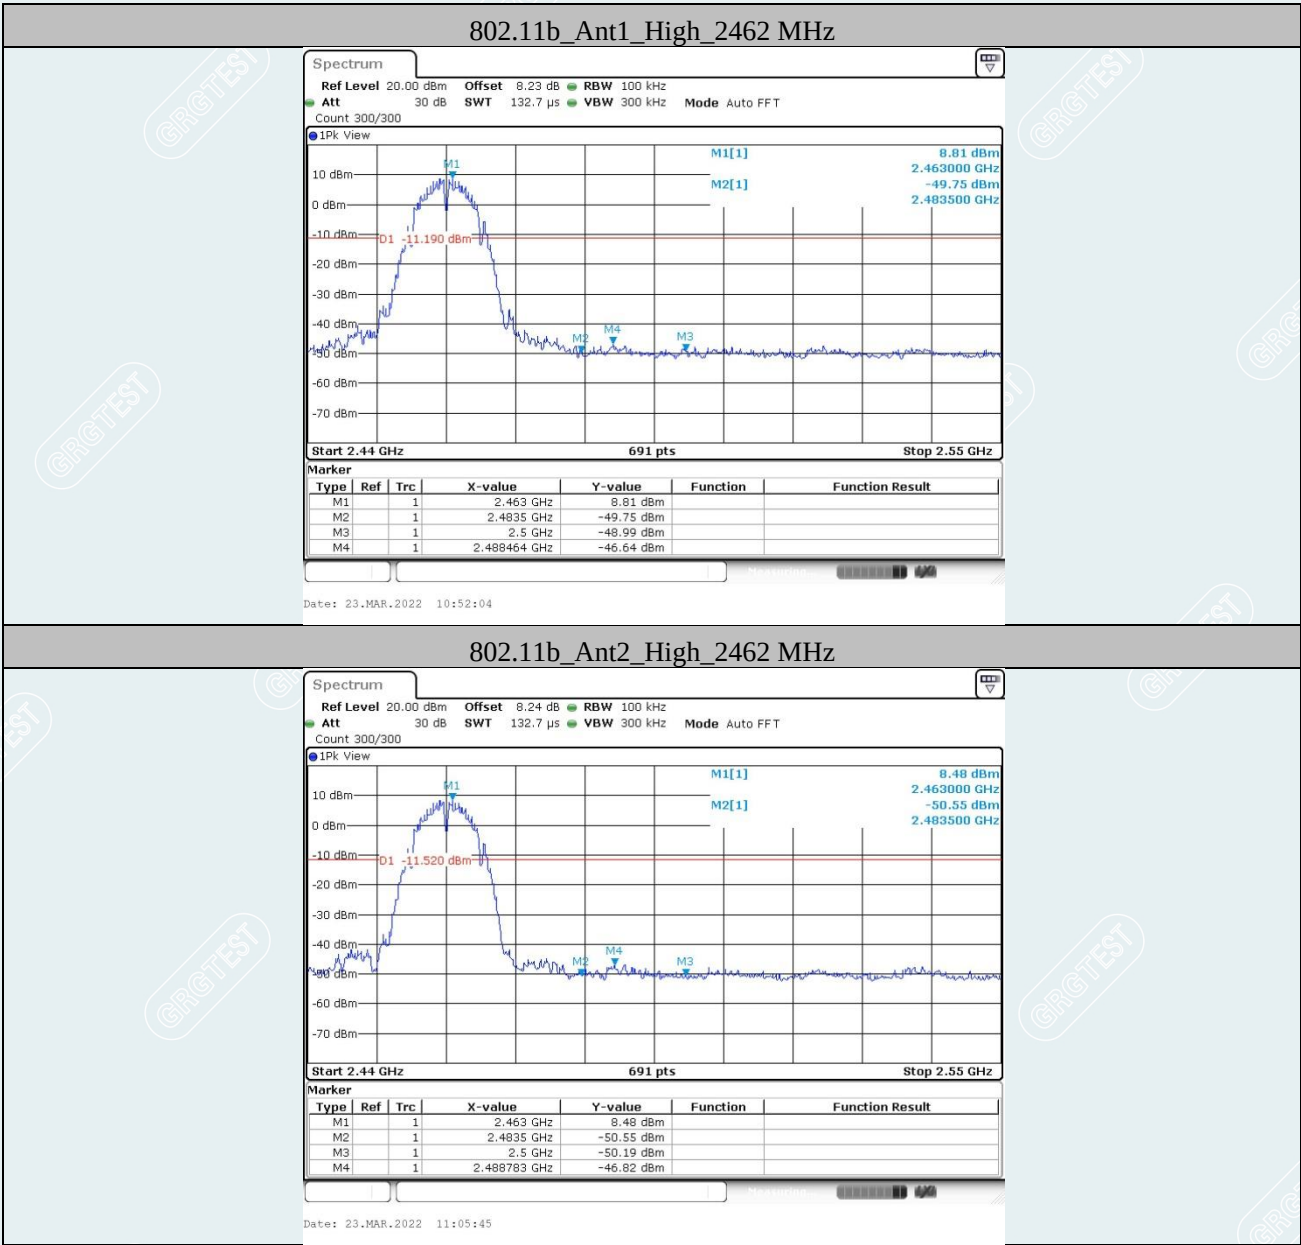



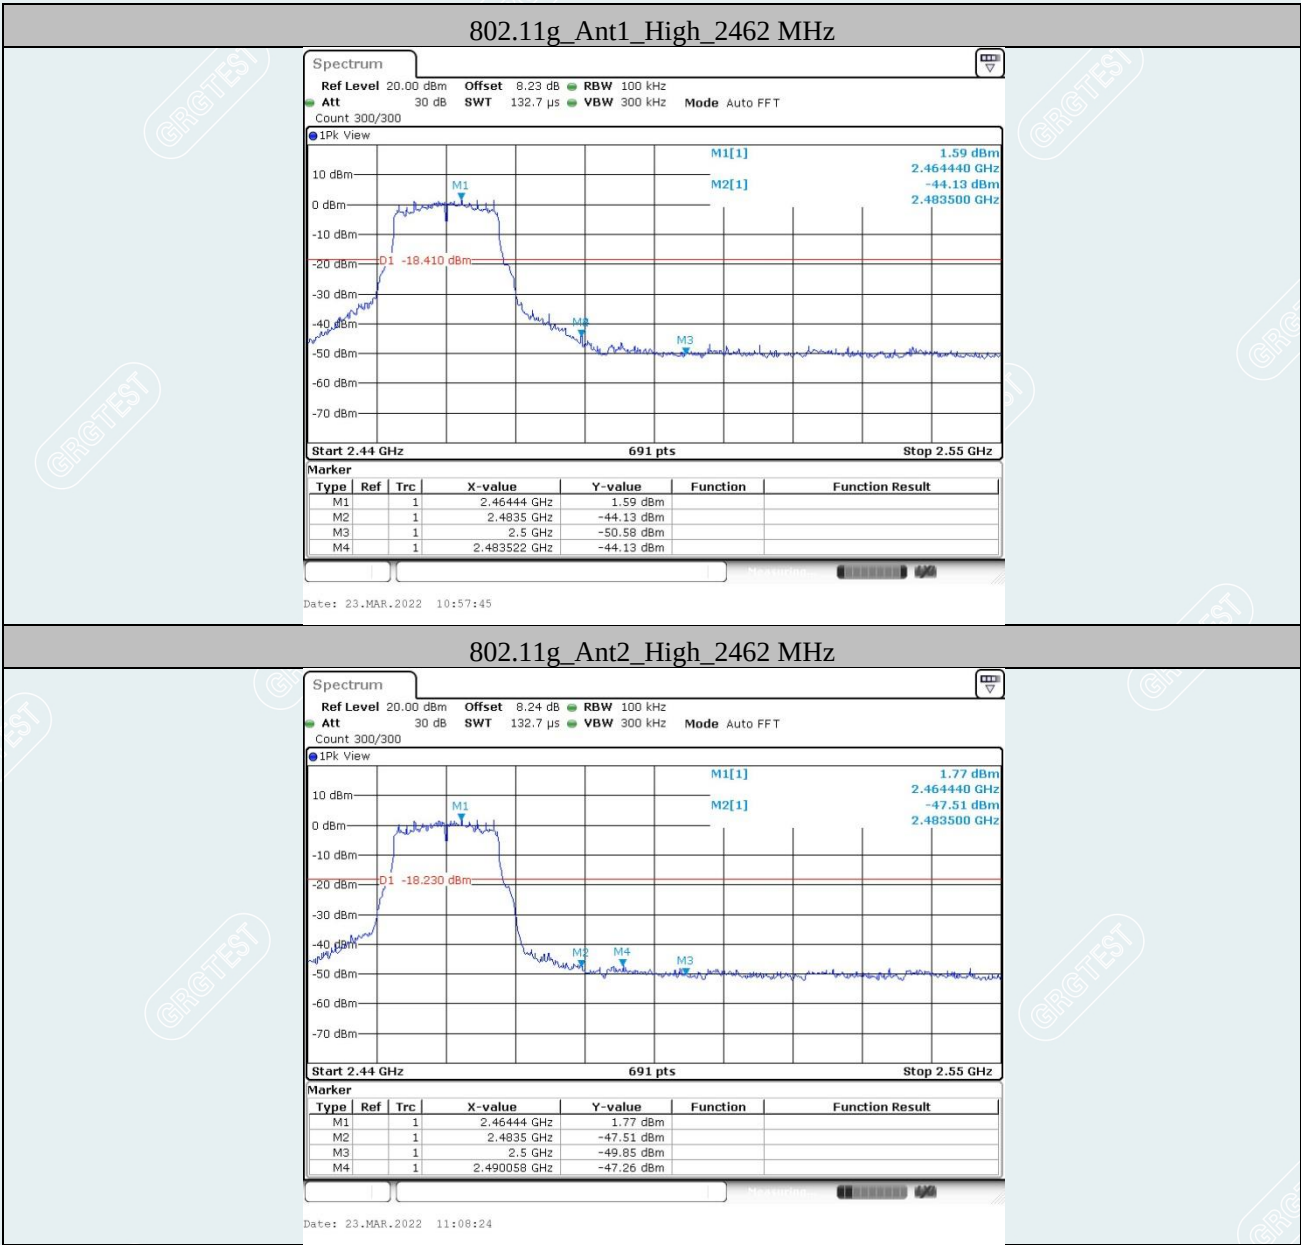





Conducted Spurious Emission:
Test Result
Environment: 23.5°C/48%RH
Tested By:Lu Wei

Voltage:DC 3.8V
Date: 2022-03-22

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
802.11b	Ant1	2412	Reference	9.14	9.14	---	PASS
			30~1000	9.14	-59.14	≤-10.86	PASS
			1000~26500	9.14	-52.32	≤-10.86	PASS
	Ant2	2412	Reference	8.85	8.85	---	PASS
			30~1000	8.85	-60	≤-11.15	PASS
			1000~26500	8.85	-49.89	≤-11.15	PASS
	Ant1	2437	Reference	8.92	8.92	---	PASS
			30~1000	8.92	-59.3	≤-11.08	PASS
			1000~26500	8.92	-53.42	≤-11.08	PASS
	Ant2	2437	Reference	8.50	8.50	---	PASS
			30~1000	8.50	-59.21	≤-11.5	PASS
			1000~26500	8.50	-51.66	≤-11.5	PASS
	Ant1	2462	Reference	8.85	8.85	---	PASS
			30~1000	8.85	-59.63	≤-11.15	PASS
			1000~26500	8.85	-54.86	≤-11.15	PASS
	Ant2	2462	Reference	8.70	8.70	---	PASS
			30~1000	8.70	-58.84	≤-11.3	PASS
			1000~26500	8.70	-53.26	≤-11.3	PASS
802.11g	Ant1	2412	Reference	2.22	2.22	---	PASS
			30~1000	2.22	-58.99	≤-17.78	PASS
			1000~26500	2.22	-54.72	≤-17.78	PASS
	Ant2	2412	Reference	1.98	1.98	---	PASS
			30~1000	1.98	-59.11	≤-18.02	PASS
			1000~26500	1.98	-54.73	≤-18.02	PASS
	Ant1	2437	Reference	1.95	1.95	---	PASS
			30~1000	1.95	-59.84	≤-18.05	PASS
			1000~26500	1.95	-55.57	≤-18.05	PASS
	Ant2	2437	Reference	1.49	1.49	---	PASS
			30~1000	1.49	-59.17	≤-18.51	PASS
			1000~26500	1.49	-54.98	≤-18.51	PASS
	Ant1	2462	Reference	1.83	1.83	---	PASS
			30~1000	1.83	-59.73	≤-18.17	PASS
			1000~26500	1.83	-55.18	≤-18.17	PASS
	Ant2	2462	Reference	1.65	1.65	---	PASS
			30~1000	1.65	-59.08	≤-18.35	PASS
			1000~26500	1.65	-55.29	≤-18.35	PASS

802.11n HT20	Ant1	2412	Reference	2.26	2.26	---	PASS
			30~1000	2.26	-59.11	≤ -17.74	PASS
			1000~26500	2.26	-55.36	≤ -17.74	PASS
	Ant2	2412	Reference	2.44	2.44	---	PASS
			30~1000	2.44	-58.93	≤ -17.56	PASS
			1000~26500	2.44	-54.81	≤ -17.56	PASS
	Ant1	2437	Reference	2.16	2.16	---	PASS
			30~1000	2.16	-59.24	≤ -17.84	PASS
			1000~26500	2.16	-55.16	≤ -17.84	PASS
	Ant2	2437	Reference	2.48	2.48	---	PASS
			30~1000	2.48	-58.66	≤ -17.52	PASS
			1000~26500	2.48	-55.25	≤ -17.52	PASS
	Ant1	2462	Reference	1.81	1.81	---	PASS
			30~1000	1.81	-59.23	≤ -18.19	PASS
			1000~26500	1.81	-54.31	≤ -18.19	PASS
	Ant2	2462	Reference	2.44	2.44	---	PASS
			30~1000	2.44	-59.28	≤ -17.56	PASS
			1000~26500	2.44	-55.02	≤ -17.56	PASS

