Zound Industries International AB

Application
For
Certification

FCC ID: 2AAGF-MAJORIIBT

Headphone

Model: MAJOR II BLUETOOTH

2.4GHz Transceiver

Report No.: 151125008SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-14]

Prepared and Checked by:	Approved by:
Sign on file	Digitally signed by Andy Yan Location: Intertek Testing Services
Robert Li Project Engineer	Andy Yan Senior Project Engineer Date: February 2, 2016

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C_TX_b

Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch
6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: www.china.intertek-etlsemko.com

LIST OF EXHIBITS

INTRODUCTION

EXHIBIT 1: General Description

EXHIBIT 2: System Test Configuration

EXHIBIT 3: Emission Results

EXHIBIT 4: Equipment Photographs

EXHIBIT 5: Product Labelling

EXHIBIT 6: Technical Specifications

EXHIBIT 7: Instruction Manual

EXHIBIT 8: Miscellaneous Information

EXHIBIT 9: Confidentiality Request

EXHIBIT 10: Test Equipment List

MEASUREMENT/TECHNICAL REPORT

Zound Industries International AB

Model: MAJOR II BLUETOOTH

FCC ID: 2AAGF-MAJORIIBT

This report concerns (check one :) Original Grant X Class II Change _____

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X

If yes, defer until: _____ date

Company Name agrees to notify the Commission by: _____ date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-14 Edition] provision.

Report prepared by:

Robert Li
Intertek Testing Services Shenzhen Ltd.
Kejiyuan Branch
6F, Block D, Huahan Building, Langshan Road,
Nanshan District, Shenzhen, P. R. China
Phone: (86 755) 8601 0657
Fax: (86 755) 8601 6751

Table of Contents

1.0 **General Description** 2
1.1 Product Description 2
1.2 Related Submittal(s) Grants 2
1.3 Test Methodology 2
1.4 Test Facility 2

2.0 **System Test Configuration** 4
2.1 Justification 4
2.2 EUT Exercising Software 4
2.3 Special Accessories 4
2.4 Equipment Modification 4
2.5 Measurement Uncertainty 5
2.6 Support Equipment List and Description 5

3.0 **Emission Results** 7
3.1Radiated Test Results 8
3.1.1 Field Strength Calculation 8
3.1.2 Radiated Emission Configuration Photograph 9
3.1.3 Radiated Emissions 9
3.1.4 Transmitter Spurious Emissions (Radiated) 12
3.2 Conducted Emission at Mains Terminal 16
3.2.1 Conducted Emissions Configuration Photograph 16
3.2.2 Conducted Emissions 16

4.0 **Equipment Photographs** 20

5.0 **Product Labelling** 22

6.0 **Technical Specifications** 24

7.0 **Instruction Manual** 26

8.0 **Miscellaneous Information** 27
8.1 Bandedge Plot 28
8.2 20dB BW Plot 31
8.3 Discussion of Pulse Desensitizatio 32
8.4 Emissions Test Procedures 33

9.0 **Confidentiality Request** 36

10.0 **Test Equipment List** 38

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a Headphone, it can transmit data through Bluetooth (4.0) function operating at 2402-2480MHz. The EUT can be powered by Built-in rechargeable 3.7V, 680mAh DC Lithium ion Battery or USB Charing. For more detail information pls. refer to the user manual.

Bluetooth Version: 4.0 BLE mode
Antenna Type: Integral antenna
Modulation Type: GFSK
For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of BT 4.0 BLE portion for the Headphone, and other radio function as below

Bluetooth 2.1+EDR, 3.0: refer to the report 151125008SZN-001

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC(Registration Number: 242492).

EXHIBIT 2

SYSTEM TEST CONFIGURATION

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by a 3.7 VDC fully charged Li-ion rechargeable battery which is charged by an USB Power Adapter with AC 120V, 60Hz input during the test.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The rear of unit was flushed with the rear of the table up to 1GHz and in the center of the turn table above 1GHz.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT engineering mode (provided by client) used during testing as similar to a typical use.

2.3 Special Accessories

No special accessories used.

2.4 Equipment Modification

Any modifications installed previous to testing by Zound Industries International AB will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Kejiyuan Branch.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Adapter	TP Link	Model: S250-120-AE200 Input: 100-240Vac 50/60Hz Output: 5Vdc 300mA
USB Cable	N/A	Unshielded, 1.2m

EXHIBIT 3

EMISSION RESULTS

3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

FS = RA + AF + CF - AG + PD

Where FS = Field Strength in dBµV/m
RA = Receiver Amplitude (including preamplifier) in dBµV
CF = Cable Attenuation Factor in dB
AF = Antenna Factor in dB
AG = Amplifier Gain in dB
PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

FS = RA + AF + CF - AG + PD

Assume a receiver reading of 62.0 dBµV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dBµV/m. This value in dBµV/m was converted to its corresponding level in µV/m.

RA = 62.0 dBµV
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 dBµV/m

Level in µV/m = Common Antilogarithm [(42 dBµV/m)/20] = 125.9 µV/m

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
935.421 MHz

Judgement: Passed by 13.2 dB

TEST PERSONNEL:

Sign on file

Robert Li, Project Engineer
Typed/Printed Name

12 December 2015
Date

Applicant: Zound Industries International AB
Model: MAJOR II BLUETOOTH
Sample: 1/1

Worst Case Operating Mode: Transmit with charging

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	43.000	35.9	20.0	7.6	23.5	40.0	-16.5
Horizontal	150.673	32.1	20.0	11.4	23.5	43.5	-20.0
Horizontal	935.421	33.7	20.0	19.1	32.8	46.0	-13.2
Vertical	33.600	35.2	20.0	8.4	23.6	40.0	-16.4
Vertical	255.400	26.6	20.0	18.0	24.6	46.0	-21.4
Vertical	944.633	33.5	20.0	19.1	32.6	46.0	-13.4

NOTES:
1. Quasi-Peak detector is used except for others stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
7326MHz MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 1.7 dB

TEST PERSONNEL:

Sign on file

Robert Li Project Engineer
Typed/Printed Name

12 December 2015
Date

Applicant: Zound Industries International AB
Model: MAJOR II BLUETOOTH
Sample: 1/1
Worst Case Operating Mode: Transmitting

Table 2

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2402.000	88.0	36.7	28.5	79.8	114.0	-34.2
Horizontal	4804.000	55.7	36.7	35.0	54.0	74.0	-20.0
Horizontal	7206.000	61.0	36.1	37.0	61.9	74.0	-12.1

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2402.000	74.8	36.7	28.5	66.6	94.0	-27.4
Horizontal	4804.000	44.0	36.7	35.0	42.3	54.0	-11.7
Horizontal	7206.000	47.4	36.1	37.0	48.3	54.0	-5.7

Notes: 1. Peak detector is used, RBW=1MHz/VBW=3MHz used for peak value and RBW=1MHz / VBW=10Hz for average value, RBW 3MHz used for fundamental emission.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Applicant: Zound Industries International AB
Model: MAJOR II BLUETOOTH
Sample: 1/1
Worst Case Operating Mode: Transmitting

Table 3

Radiated Emissions

(2442MHz)

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2442.000	88.8	36.7	28.5	80.6	114.0	-33.4
Horizontal	4884.000	54.7	36.7	35.0	53.0	74.0	-21.0
Horizontal	7326.000	64.7	36.1	37.0	65.6	74.0	-8.4

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2442.000	75.1	36.7	28.5	66.9	94.0	-27.1
Horizontal	4884.000	43.6	36.7	35.0	41.9	54.0	-12.1
Horizontal	7326.000	51.4	36.1	37.0	52.3	54.0	-1.7

Notes:
1. Peak detector is used, RBW=1MHz/VBW=3MHz used for peak value and RBW=1MHz / VBW=10Hz for average value, RBW 3MHz used for fundamental emission.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Applicant: Zound Industries International AB
Model: MAJOR II BLUETOOTH
Sample: 1/1
Worst Case Operating Mode: Transmitting

Table 4

Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2480.000	87.6	36.7	28.3	79.2	114.0	-34.8
Horizontal	4960.000	54.8	36.7	35.3	53.4	74.0	-20.6
Horizontal	7440.000	63.0	36.1	37.0	63.9	74.0	-10.1

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2480.000	74.9	36.7	28.3	66.5	94.0	-27.5
Horizontal	4960.000	43.5	36.7	35.3	42.1	54.0	-11.9
Horizontal	7440.000	49.7	36.1	37.0	50.6	54.0	-3.4

Notes:
1. Peak detector is used, RBW=1MHz/VBW=3MHz used for peak value and RBW=1MHz / VBW=10Hz for average value, RBW 3MHz used for fundamental emission.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

3.2 Conducted Emission at Mains Terminal

3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.2.2 Conducted Emissions

Worst Case Conducted Configuration
At

3.186 MHz

Judgement: Passed by 16.2 dB margin

TEST PERSONNEL:

Sign on file

Robert Li Project Engineer
Typed/Printed Name

12 December 2015
Date

Applicant: Zound Industries International AB
Model: MAJOR II BLUETOOTH
Sample: 1/1
Worst Case Operating Mode: BT Link

Conducted Emission Test - FCC

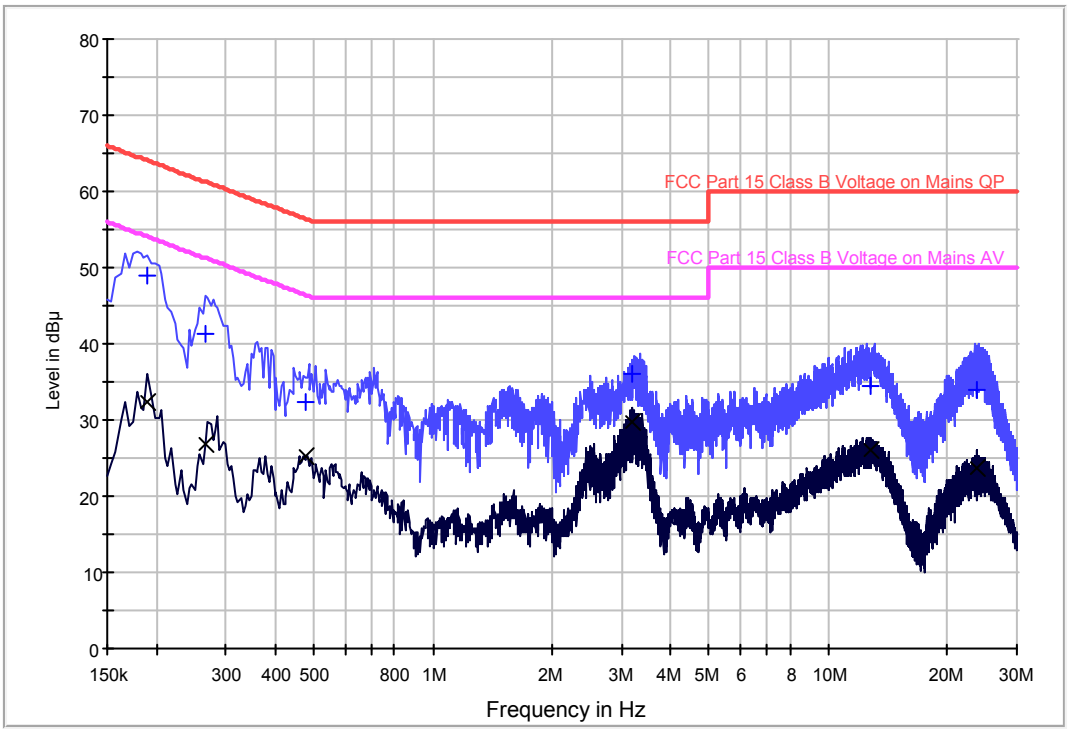

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.190000	48.9	9.000	L1	9.8	15.1	64.0
0.266000	41.3	9.000	L1	9.9	19.9	61.2
0.478000	32.5	9.000	L1	9.9	23.9	56.4
3.186000	36.0	9.000	L1	10.0	20.0	56.0
12.730000	34.6	9.000	L1	10.1	25.4	60.0
23.758000	33.9	9.000	L1	10.3	26.1	60.0

Limit and Margin AV

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.190000	32.5	9.000	L1	9.8	21.5	54.0
0.266000	26.9	9.000	L1	9.9	24.3	51.2
0.478000	25.2	9.000	L1	9.9	21.2	46.4
3.186000	29.7	9.000	L1	10.0	16.3	46.0
12.730000	26.2	9.000	L1	10.1	23.8	50.0
23.758000	23.6	9.000	L1	10.3	26.4	50.0

Applicant: Zound Industries International AB
Model: MAJOR II BLUETOOTH
Sample: 1/1
Worst Case Operating Mode: BT Link

Conducted Emission Test – FCC

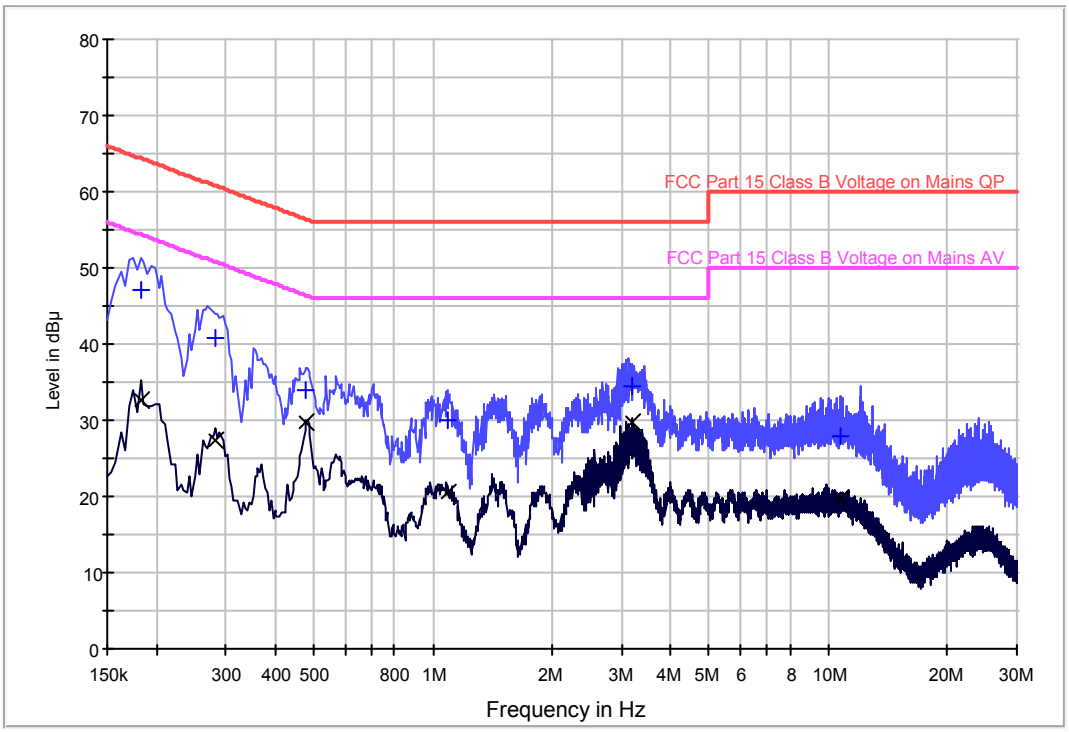

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.182000	47.2	9.000	N	10.1	17.2	64.4
0.282000	40.7	9.000	N	10.2	20.1	60.8
0.478000	33.9	9.000	N	10.2	22.5	56.4
1.086000	30.0	9.000	N	10.3	26.0	56.0
3.186000	34.5	9.000	N	10.3	21.5	56.0
10.754000	28.0	9.000	N	10.4	32.0	60.0

Limit and Margin AV

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.182000	32.7	9.000	N	10.1	21.7	54.4
0.282000	27.4	9.000	N	10.2	23.4	50.8
0.478000	29.8	9.000	N	10.2	16.6	46.4
1.086000	20.6	9.000	N	10.3	25.4	46.0
3.186000	29.8	9.000	N	10.3	16.2	46.0
10.754000	19.7	9.000	N	10.4	30.3	50.0

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5

PRODUCT LABELLING

5.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

EXHIBIT 6

TECHNICAL SPECIFICATIONS

6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 7

INSTRUCTION MANUAL

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lower channel 2402MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

= 79.8 dBµv/m-50.4 dB
= 29.4 dBµv/m

(ii) Upper channel 2480MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

= 79.2 dBµv/m-64.1 dB
= 15.1 dBµv/m

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dBµv/m (Peak Limit) and 54dBµv/m (Average Limit).

8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

8.2 20dB BW Plot

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.2 Bandwidth

8.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device.

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used, RBW 3MHz used for fundamental emission.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

.

EXHIBIT 10

TEST EQUIPMENT LIST

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	14-Jun-15	14-Jun-16
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	3-Sep-15	3-Sep-16
SZ061-08	Horn Antenna	ETS	3115	00092346	17-Oct-15	17-Oct-16
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	29-Apr-15	29-Apr-16
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	8-Jun-15	8-Jun-16
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	7-Feb-15	7-Feb-16
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-14	19-Apr-16
SZ062-02	RF Cable	RADIALL	RG 213U	--	30-Jun-15	30-Dec-15
SZ062-06	RF Cable	RADIALL	0.04-26.5GHz	--	30-Jun-15	30-Dec-15
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	8-Oct-15	8-Apr-16
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	20-May-15	20-May-16
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	12-Oct-15	12-Apr-16
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	3-Nov-15	3-Nov-16
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	24-Jun-15	24-Jun-16
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-14	23-Aug-16