

SPECIFICATION

Daxian Communication Technology Limited

**Shenzhen Daxian Technology Co., Ltd.**

Eastech TW2110 Left ear
Bluetooth headset antenna

Material Recognition Letter

Guest households	Eastech	frequency band	2400MHz~2500MHz
Project name	TW2110	version	V2
Material No.	1T-W2110-101	color	Yellow
R F design	Qiang.Wang	structure design	Yezhi.Bi
Quality Manager	Ziyin.Hu	R & D director	Lei.Zhang
Date	2022-12-02		

client confirmation:

Whether the assembly meets your requirements: ☐OK ☐NG**Shenzhen Topant Technology Co., Ltd.**

Shangshuijing Village, No. 513, ihua Road, BujiTown, Longgang District, Shenzhen (opposite to theNational Defense Training Base)reached the 7thfloor of the Industrial Park Complex

TEL:0755-28576002

FAX:0755-84276383

Shanghai Branch: Room 201, Building 8 No, 3000Longdong Avenue, Integrated Circuit IndustrialZone, Zhangjiang Hi-tech Park, Shanghai

TEL:021-61630552

FAX:755-84276383

[illegible]

Confidential requirement

Page 2

Index

一、 Project description.....	4
二、 BT antenna.....	4
1、 specifications.....	4
1.1 Electrical specification standard.....	4
1.2 Antenna composition.....	4
2、 The Equipment of Active Test.....	5
3、 test.....	6
3.1 The Test of standing Wave (VSWR).....	6
3.1.1 test connection.....	6
3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS).....	6
3.2.1 Test site.....	6
3.2.2 Test instrument.....	6
3.2.3 test data	6
4、 conclusion	6
5、 Attachment chart.....	7
5.1、 VSWR parameter diagram.....	7
5.2、 Matching circuit.....	7
6、 Environmental treatment.....	8
三、 schedule drawing.....	8

www.Topant.com.cn

Confidential requirement


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

— Project description

Customer name:	Eastech
Whole machine type:	Bluetooth headset
Antenna band:	2400 ~ 2500MHz
Antenna form:	FPC
Feed form:	welding
Number of feed feet:	2 left and right ears
Hardware version:	motherboard:

一、BT antenna

This report provides a variety of measurements of the electrical performance of the TW2110 antenna. Figure 1 shows the antenna designed by the display.

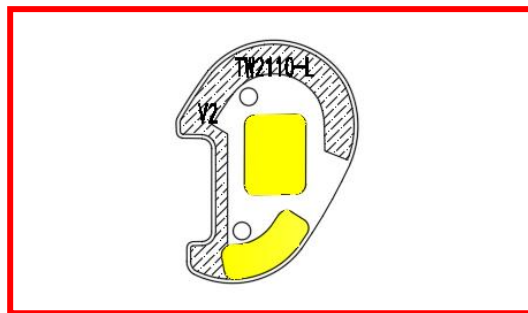

antenna appearing diagram

Figure 1

1.1 Electrical specification standard

The frequency range of the antenna is 2400 ~ 2500 MHz. The following table indicates the electrical performance specifications of the antenna. The antenna is designed and manufactured by a large display.

Frequency Range	Frequency (MHz)	VSWR
Left ear BT	2400 ~ 2500	≤ 3

1.2 Antenna composition

The antenna is mainly composed of FPC.

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

2、 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



Figure 2

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

3 test

3.1 The Test of standing Wave (VSWR)

3.1.1 The Test of standing Wave (VSWR): In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

Actual measurement (with diagram)

3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than -50 dB..

3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:

Passive testing:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	19.44	-7.11	-2.63
2410	19.93	-7.01	-2.27
2420	21.54	-6.67	-1.96
2430	22.98	-6.39	-1.44
2440	23.25	-6.34	-1.41
2450	24.03	-6.19	-1.27
2460	24.03	-6.19	-1.26
2470	23.69	-6.26	-1.32
2480	23.83	-6.23	-1.35
2490	22.54	-6.47	-1.51
2500	21.07	-6.76	-1.88

Active test:

Left ear			
BAND	CH	TRP (dBm)	TIS (dBm)
BT	0	1.35	-89.45
	39	2.08	-89.88
	78	2.85	-90.12

4、 conclusion:

This antenna is designed on the basis of the prototype provided by the customer, electrical parameters and structural performance have reached the technical requirements, please confirm!

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

5、 Attachment chart

5.1 VSWR parameter diagram


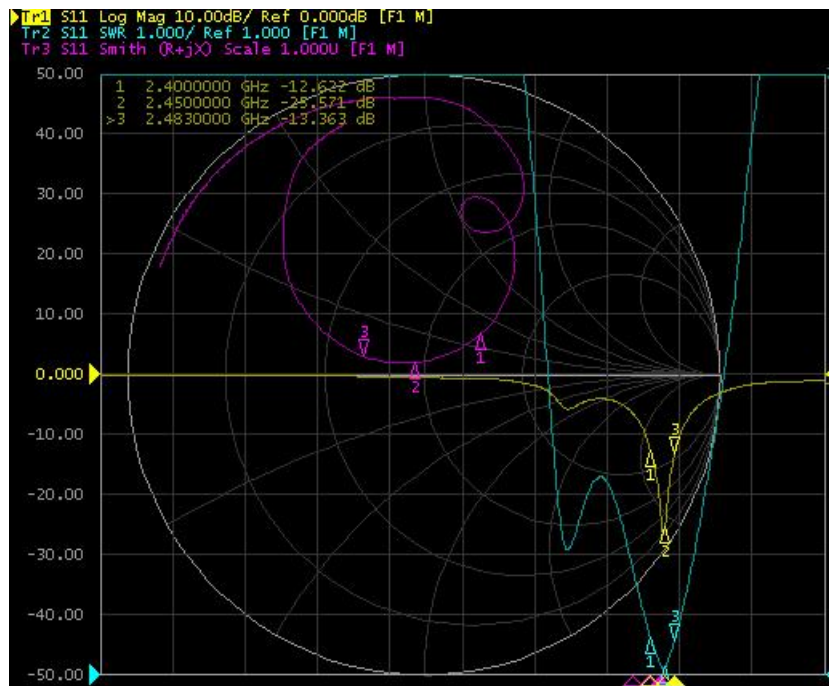


Figure 3

5.2 Matching circuit

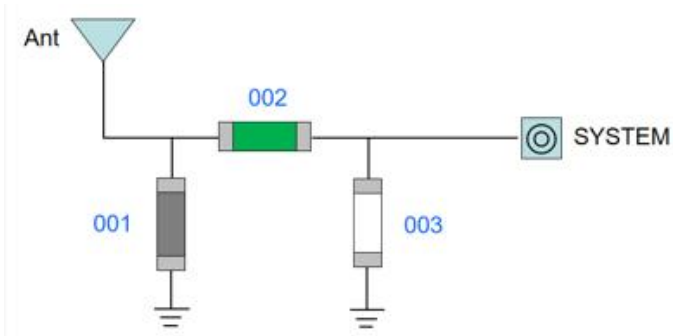

Element	Left	Right
001	N/C	N/C
002	0欧姆	1.8PF
003	N/C	N/C

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

1		2		3		4		5		6	
The third perspective											
Unit	mm	Proportion		1:1		0~10		10~30		30~50	
						0.05		0.10		0.15	
								Angle		50~	
								1°		0.20	
								0.02		0.02	
								0.02		0.03	
								0.02		0.05	