TEST RESULTS (Cont):	

Highest Channel 99% Occupied Bandwidth

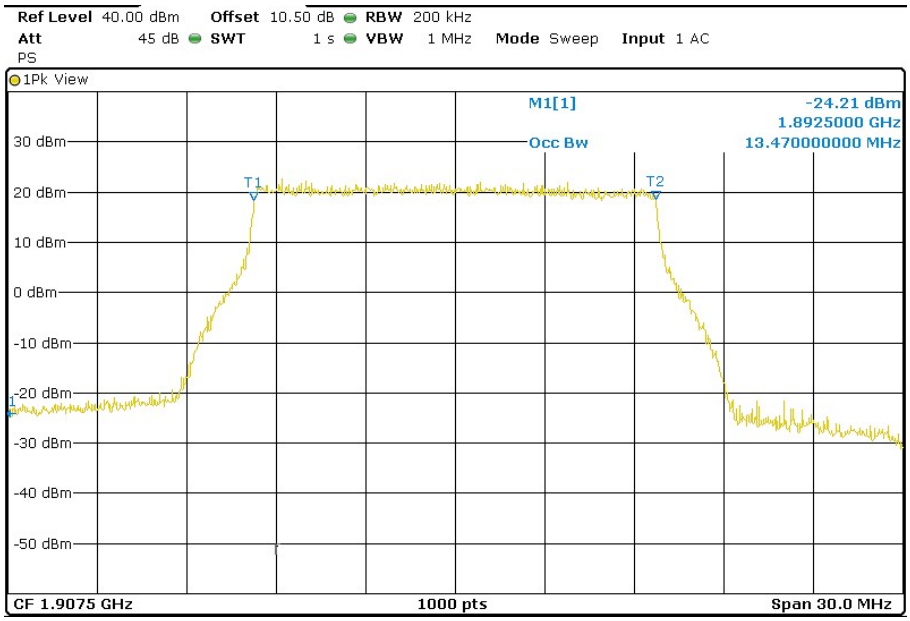

Highest Channel -26dBc Bandwidth kHz

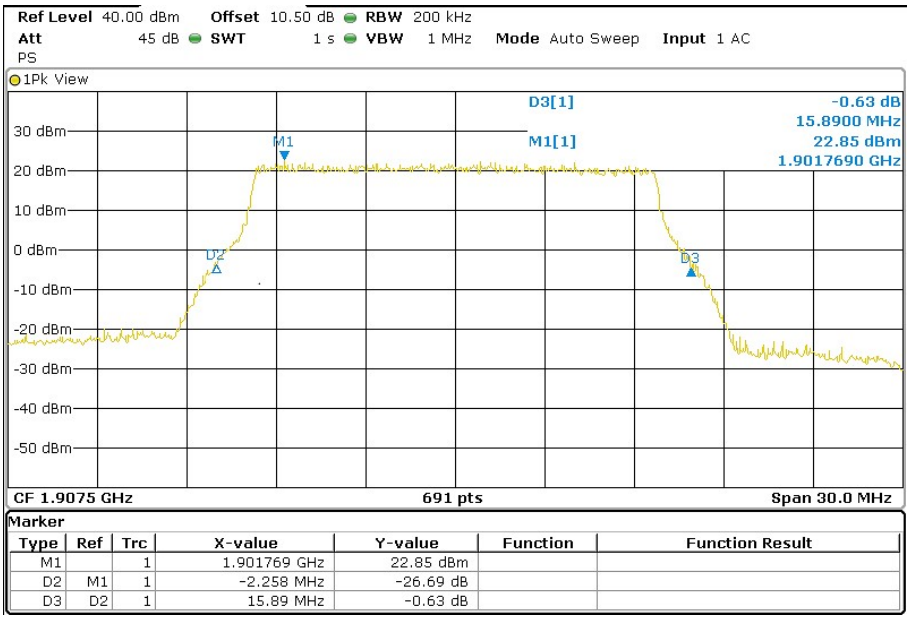

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.901769 GHz	22.85 dBm		
D2	M1	1	-2.258 MHz	-26.69 dB		
D3	D2	1	15.89 MHz	-0.63 dB		

TEST RESULTS (Cont):	

LTE 16QAM MODULATION. BW = 15 MHz

Lowest Channel 99% Occupied Bandwidth

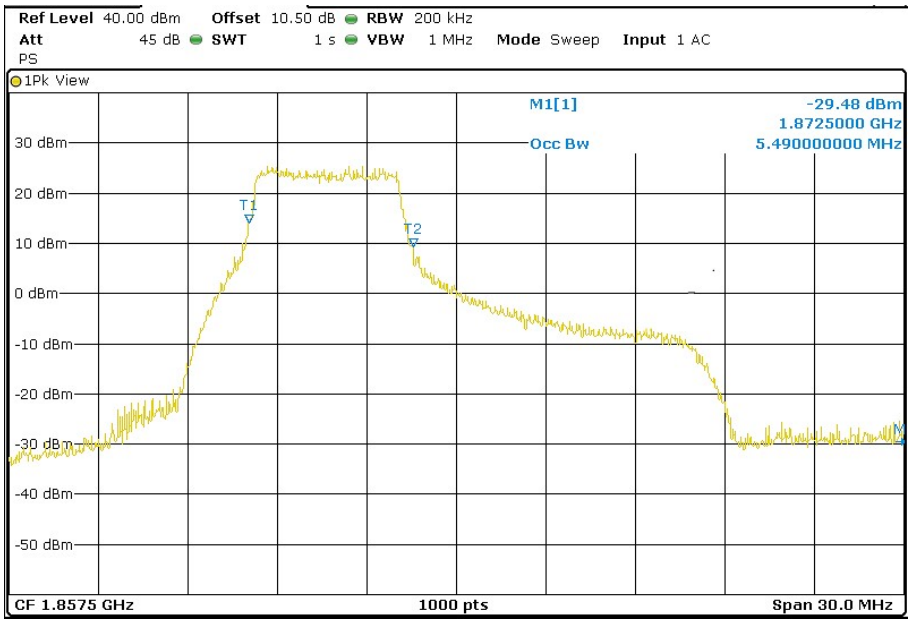

Lowest Channel -26dBc Bandwidth kHz

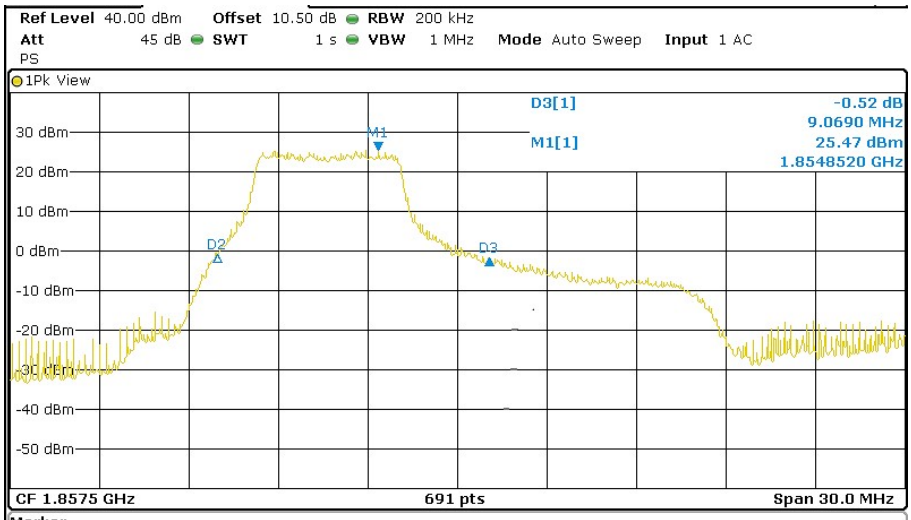

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.854852 GHz	25.47 dBm		
D2	M1	1	-5.378 MHz	-26.55 dB		
D3	D2	1	9.069 MHz	-0.52 dB		

TEST RESULTS (Cont):	

Middle Channel 99% Occupied Bandwidth

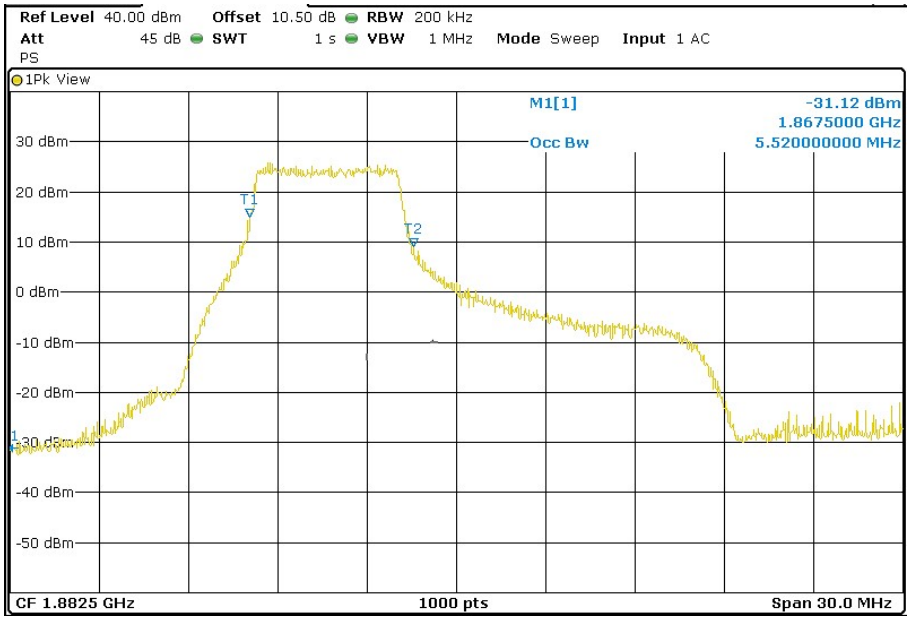

Middle Channel -26dBc Bandwidth kHz

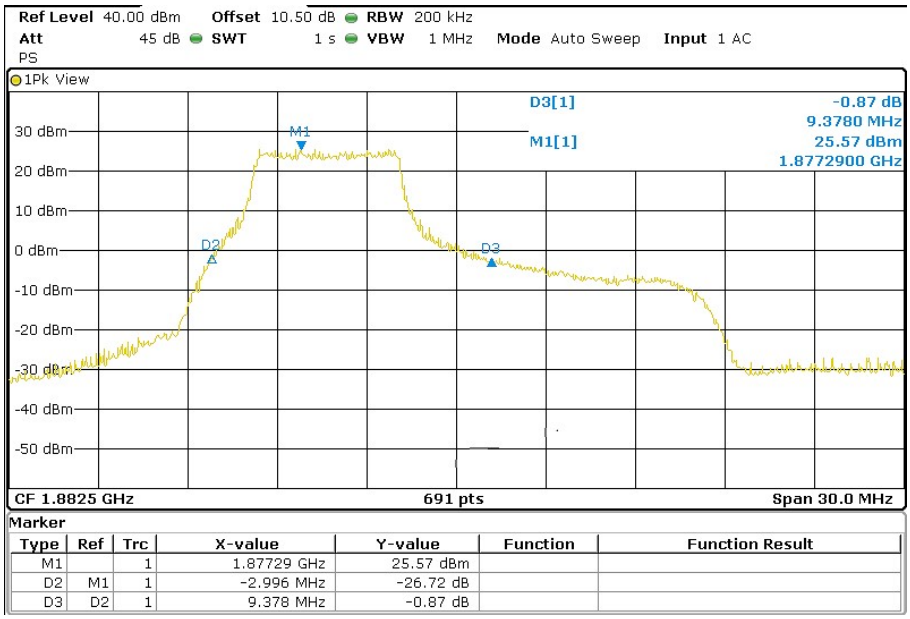

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.87729 GHz	25.57 dBm		
D2	M1	1	-2.996 MHz	-26.72 dB		
D3	D2	1	9.378 MHz	-0.87 dB		

TEST RESULTS (Cont):	

Highest Channel 99% Occupied Bandwidth

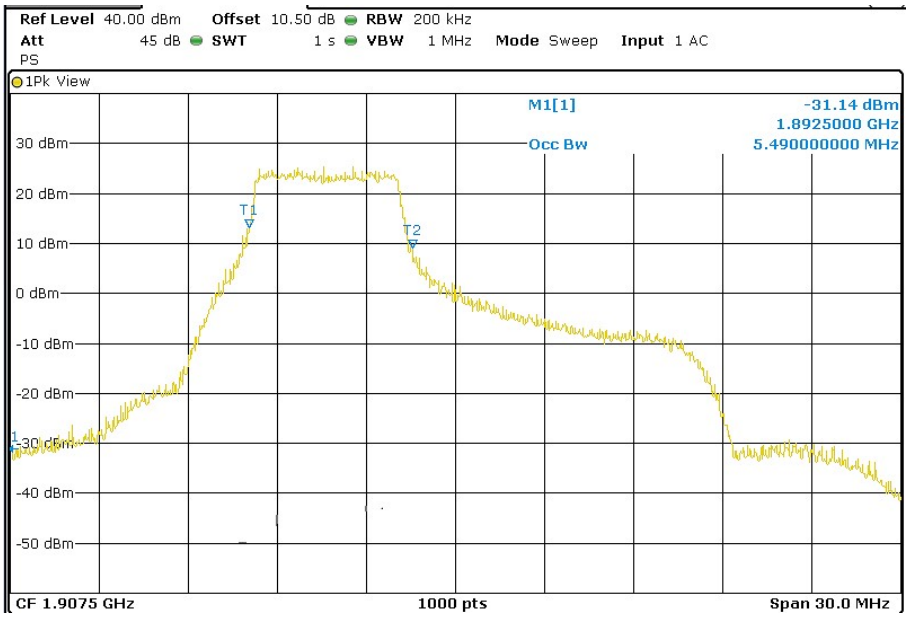

Highest Channel -26dBc Bandwidth kHz

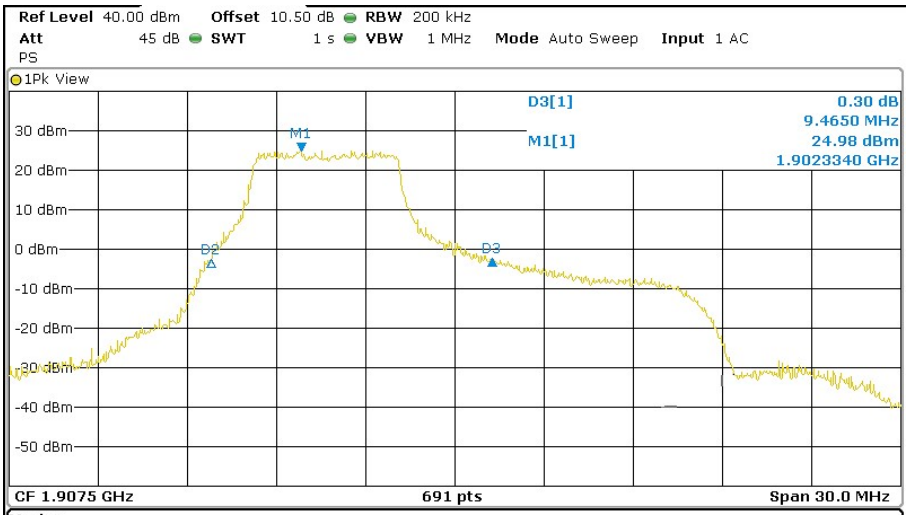

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.902334 GHz	24.98 dBm		
D2	M1	1	-3.039 MHz	-27.54 dB		
D3	D2	1	9.465 MHz	0.30 dB		

TEST RESULTS (Cont):	

LTE QPSK MODULATION. BW = 20 MHz

Lowest Channel 99% Occupied Bandwidth

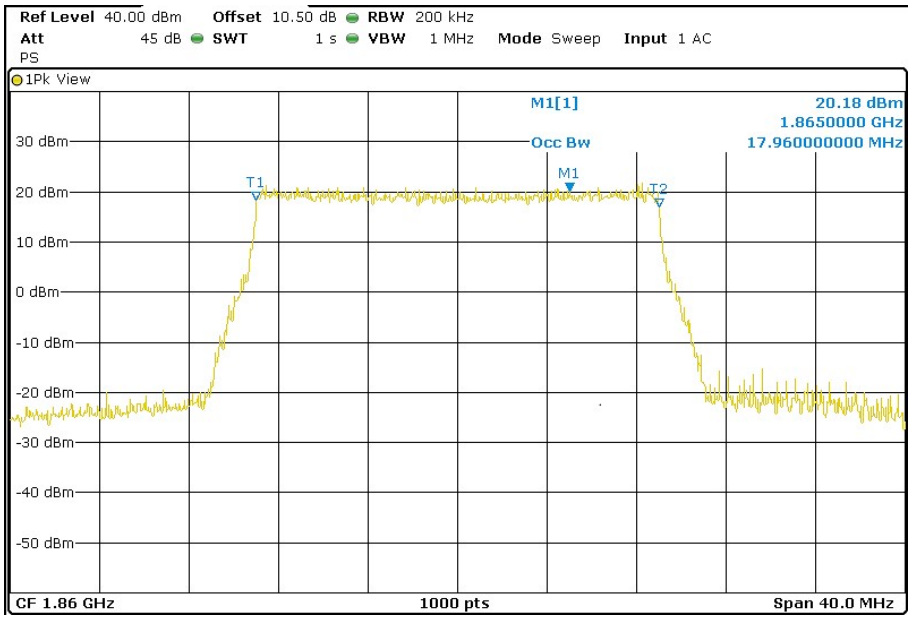

Lowest Channel -26dBc Bandwidth kHz

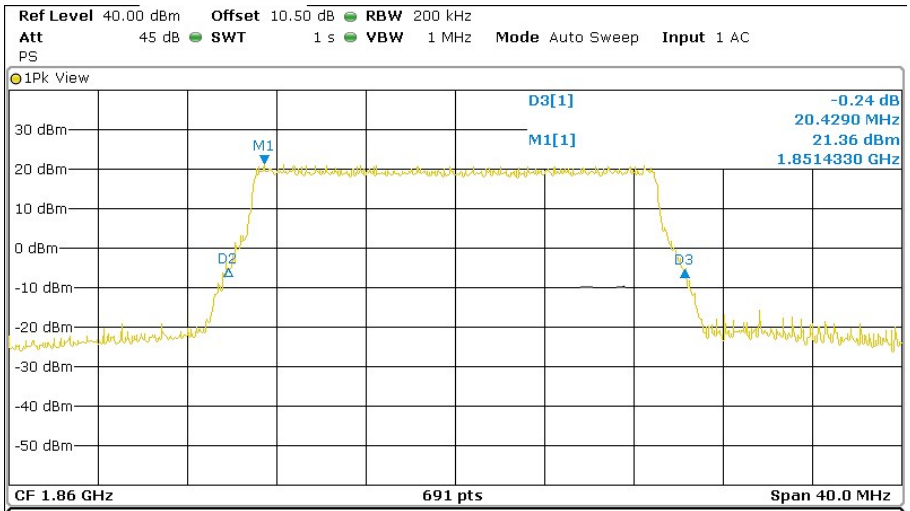

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.851433 GHz	21.36 dBm		
D2	M1	1	-1.611 MHz	-26.54 dB		
D3	D2	1	20.429 MHz	-0.24 dB		

TEST RESULTS (Cont):	

Middle Channel 99% Occupied Bandwidth

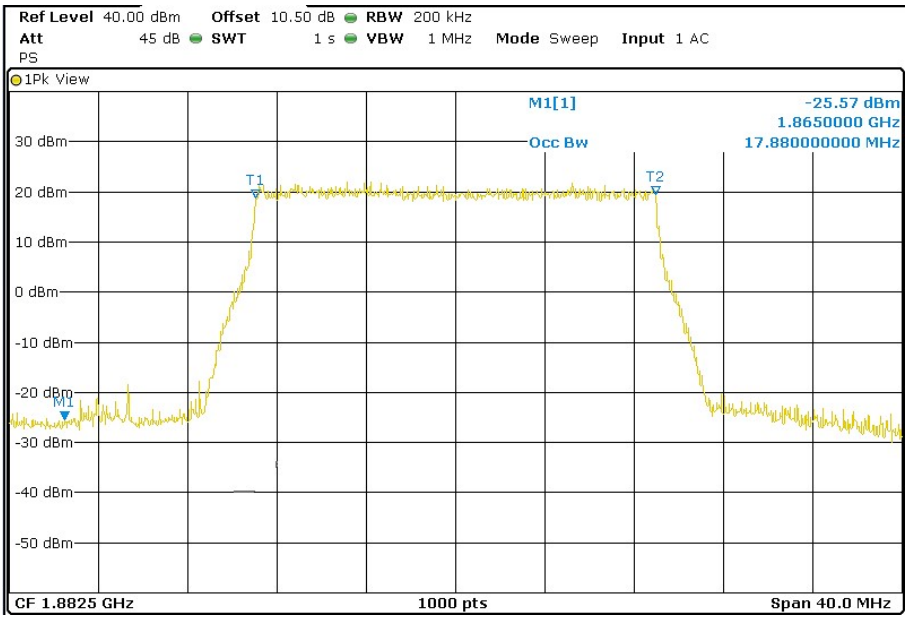

Middle Channel -26dBc Bandwidth kHz

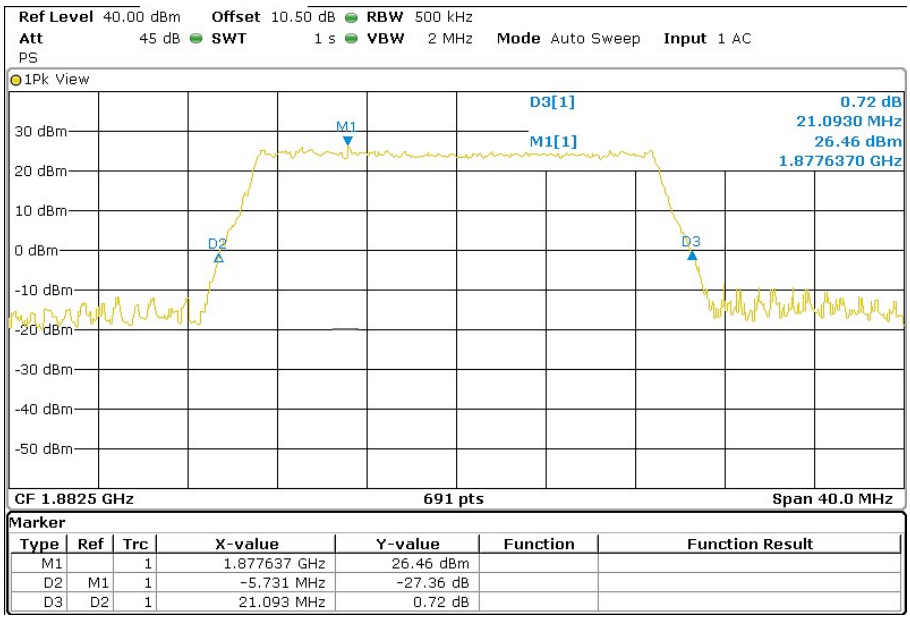

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.877637 GHz	26.46 dBm		
D2	M1	1	-5.731 MHz	-27.36 dB		
D3	D2	1	21.093 MHz	0.72 dB		

TEST RESULTS (Cont):	

Highest Channel 99% Occupied Bandwidth

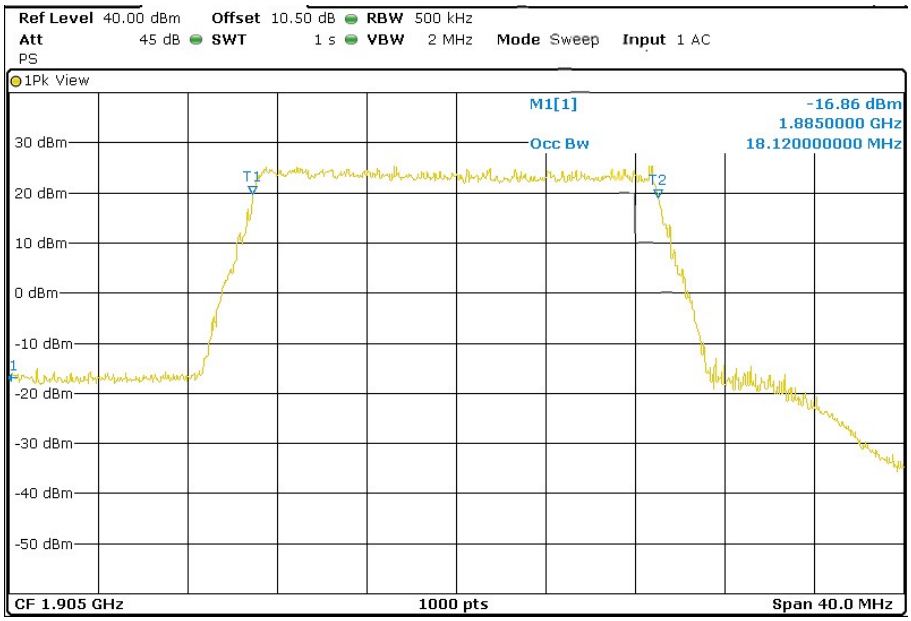

Highest Channel -26dBc Bandwidth kHz

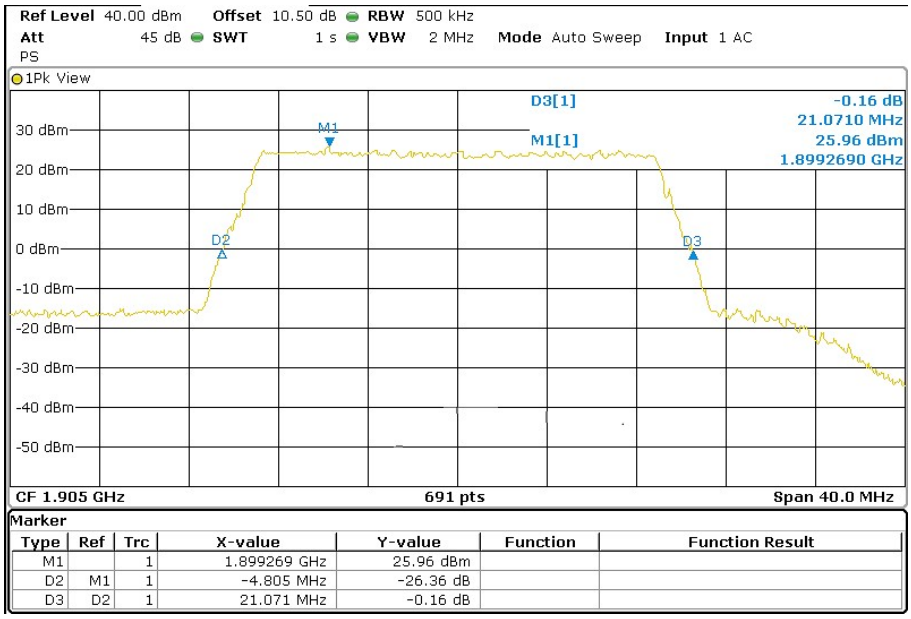

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.899269 GHz	25.96 dBm		
D2	M1	1	-4.805 MHz	-26.36 dB		
D3	D2	1	21.071 MHz	-0.16 dB		

TEST RESULTS (Cont):	

LTE 16QAM MODULATION. BW = 20 MHz

Lowest Channel 99% Occupied Bandwidth

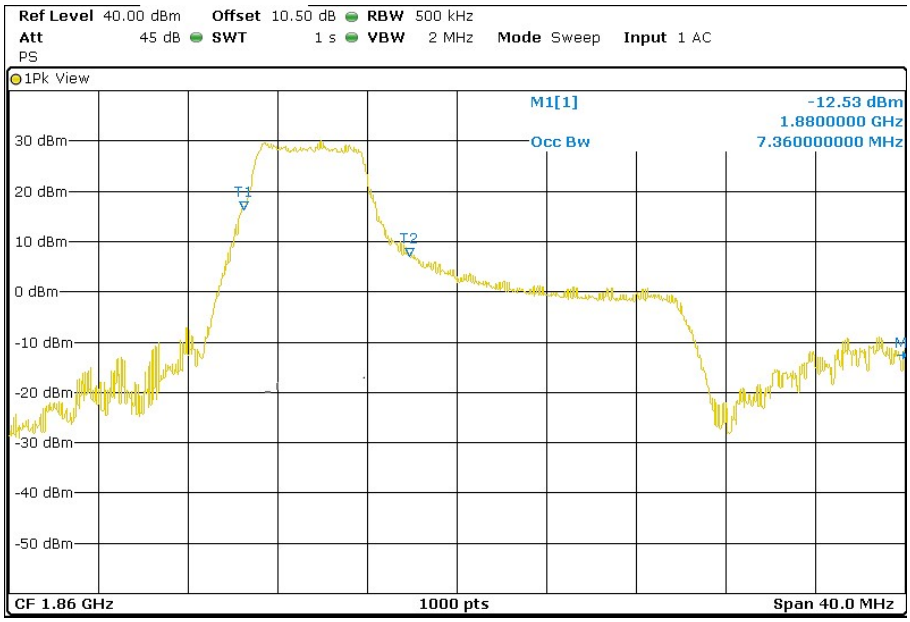

Lowest Channel -26dBc Bandwidth kHz

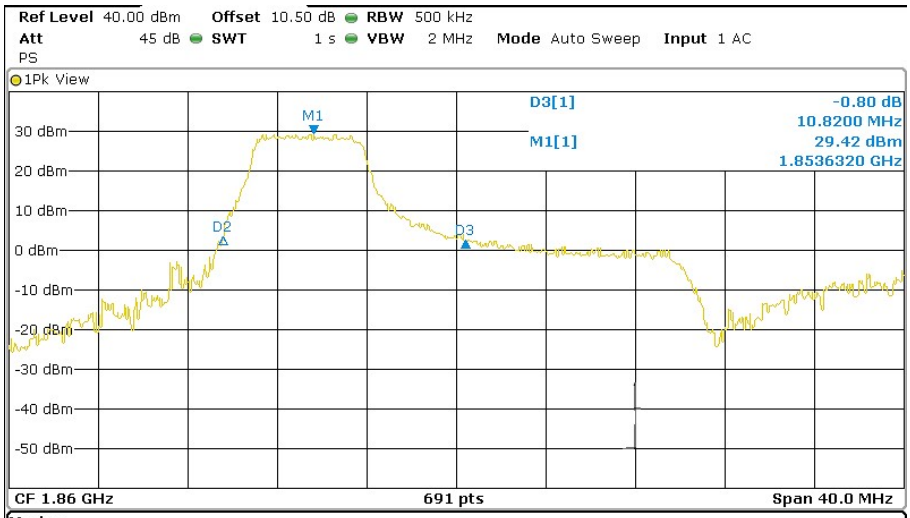

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.853632 GHz	29.42 dBm		
D2	M1	1	-4.043 MHz	-26.05 dB		
D3	D2	1	10.82 MHz	-0.80 dB		

TEST RESULTS (Cont):	

Middle Channel 99% Occupied Bandwidth

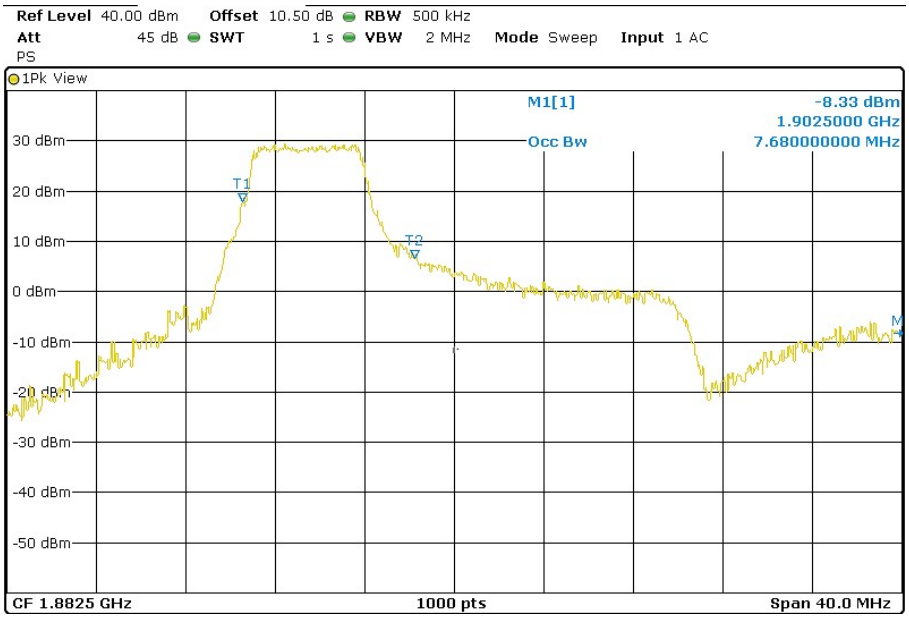

Middle Channel -26dBc Bandwidth kHz

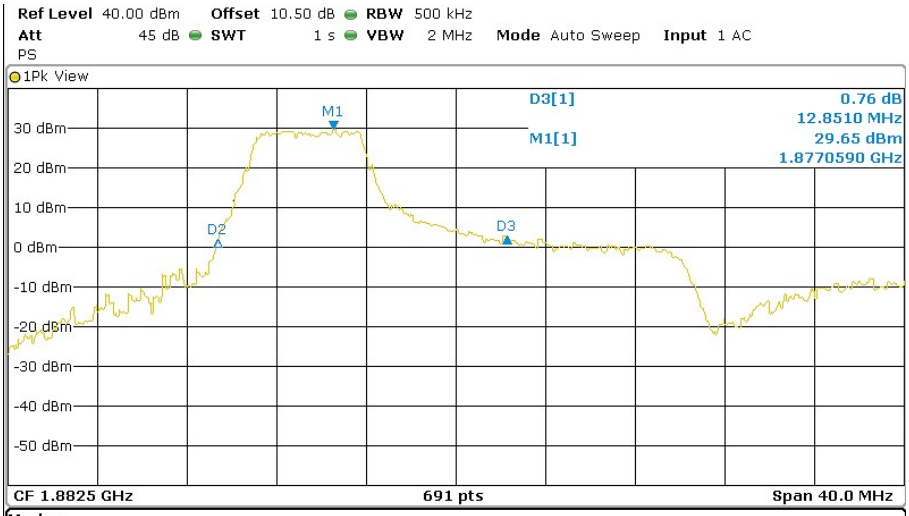

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.877059 GHz	29.65 dBm		
D2	M1	1	-5.152 MHz	-27.67 dB		
D3	D2	1	12.851 MHz	0.76 dB		

TEST RESULTS (Cont):	

Highest Channel 99% Occupied Bandwidth

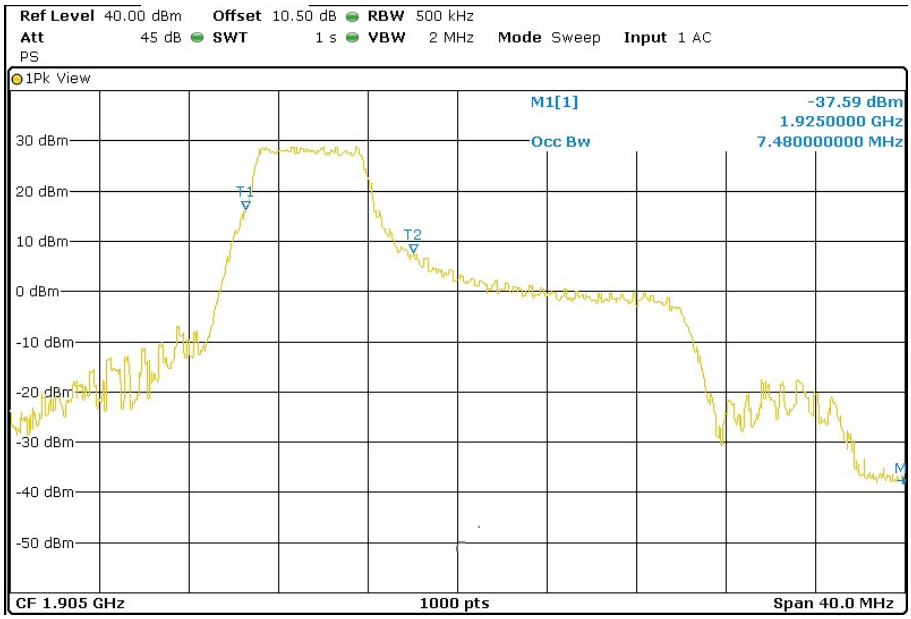

Highest Channel -26dBc Bandwidth kHz

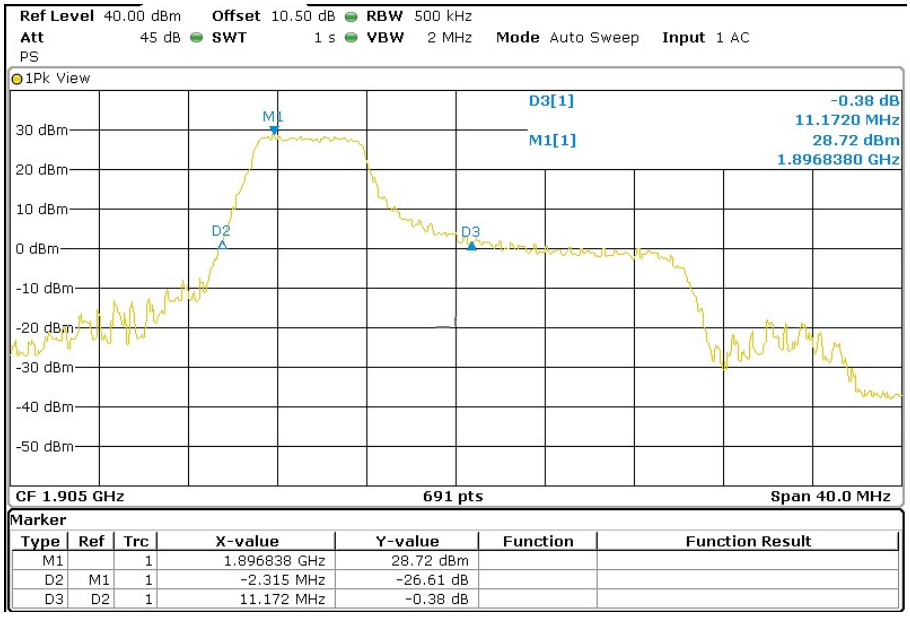

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.896838 GHz	28.72 dBm		
D2	M1	1	-2.315 MHz	-26.61 dB		
D3	D2	1	11.172 MHz	-0.38 dB		

TEST A.5: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

LIMITS:	Product standard:	FCC Part 24 / IC RSS-133
	Test standard:	FCC §2.1051 and § 24.238/ RSS-133 Clause 6.5

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) – [43 + 10 log (Po in watts)] = -13 dBm

TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter.

The spectrum was investigated from 9 kHz to 26 GHz for LTE Band 25.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of Resource Blocks and modulation which is the worst case for conducted power was used.

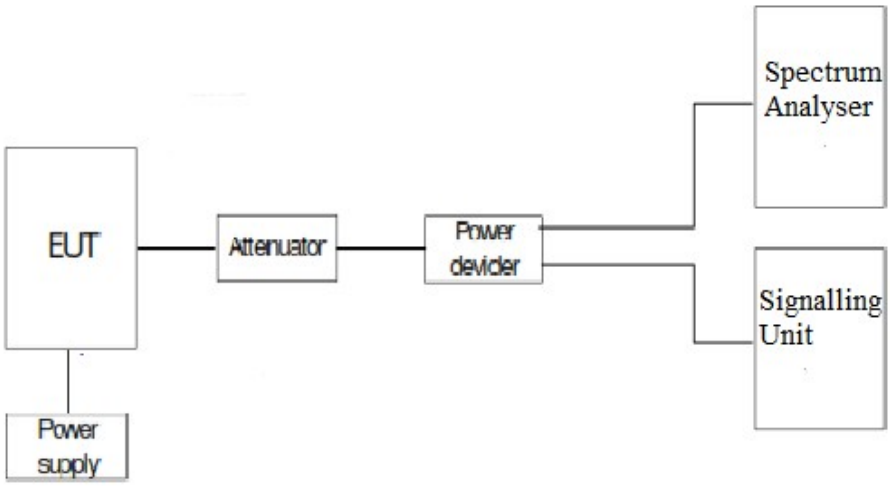

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

Frequency range 9 kHz – 26 GHz

LTE QPSK MODULATION. BW = 1.4 MHz

Lowest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1930.859	-26.48	< ± 1.20

Middle Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1962.539	-27.14	< ± 1.20

Highest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1994.229	-27.05	< ± 1.20

LTE QPSK MODULATION. BW = 3 MHz

Lowest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1931.669	-26.05	< ± 1.20

Middle Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1962.539	-25.85	< ± 1.20

Highest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1993.419	-25.56	< ± 1.20

LTE QPSK MODULATION. BW = 5 MHz

Lowest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1931.669	-28.27	< ± 1.20

Middle Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1966.599	-25.5	< ± 1.20

Highest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1993.419	-28.11	< ± 1.20

TEST RESULTS (Cont):	

LTE QPSK MODULATION. BW = 10 MHz

Lowest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1938.979	-28.86	< ± 1.20

Middle Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1961.729	-28.58	< ± 1.20

Highest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1990.979	-28.22	< ± 1.20

LTE QPSK MODULATION. BW = 15 MHz

Lowest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1936.539	-28.4	< ± 1.20

Middle Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1966.599	-27.98	< ± 1.20

Highest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1988.539	-28.58	< ± 1.20

LTE QPSK MODULATION. BW = 20 MHz

Lowest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1939.789	-28.27	< ± 1.20

Middle Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1964.979	-28.5	< ± 1.20

Highest Channel

Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)
1979.599	-28.32	< ± 1.20

TEST RESULTS (Cont):	

LTE QPSK MODULATION. BW = 1.4MHz

Lowest Channel

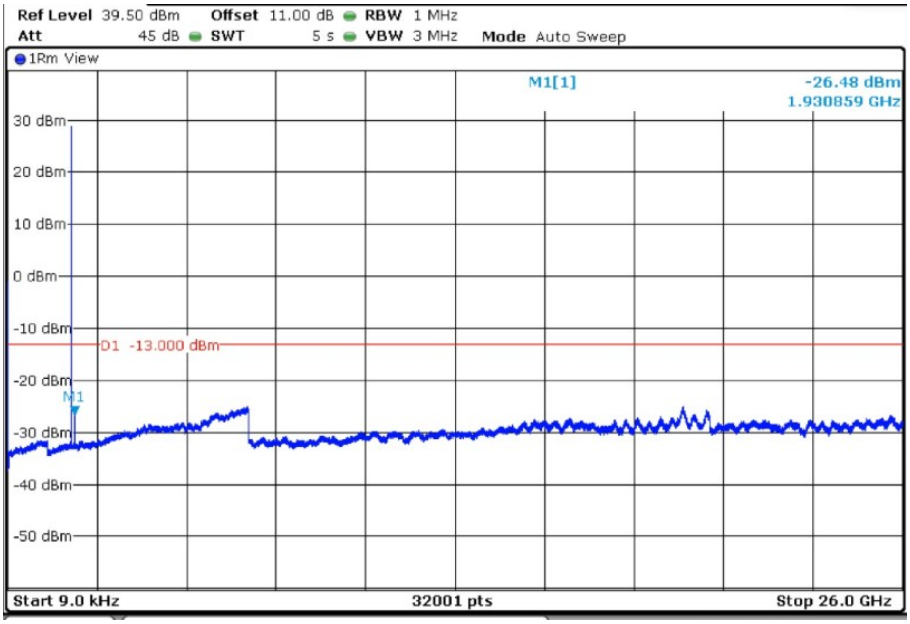

Middle Channel

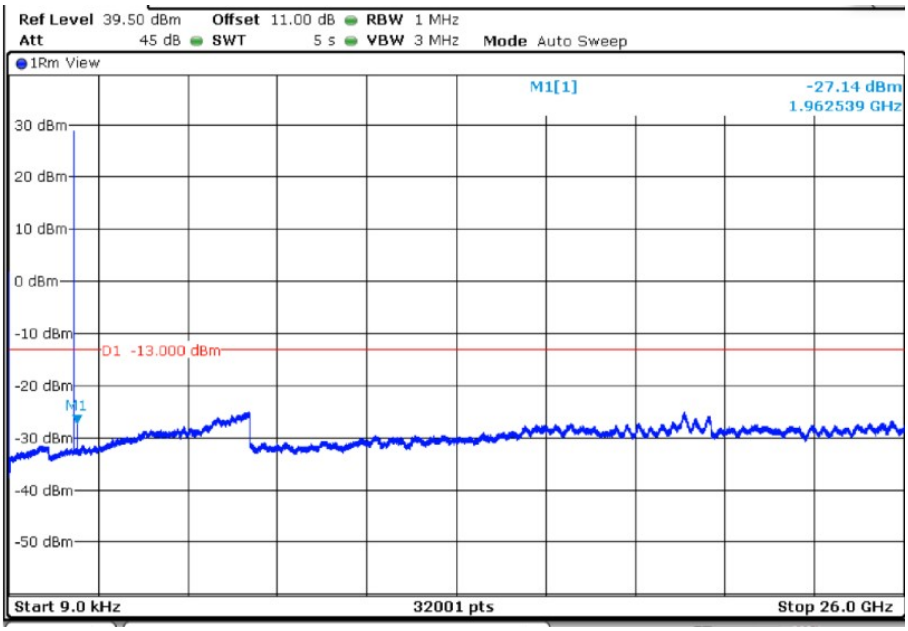

TEST RESULTS (Cont):	

Highest Channel

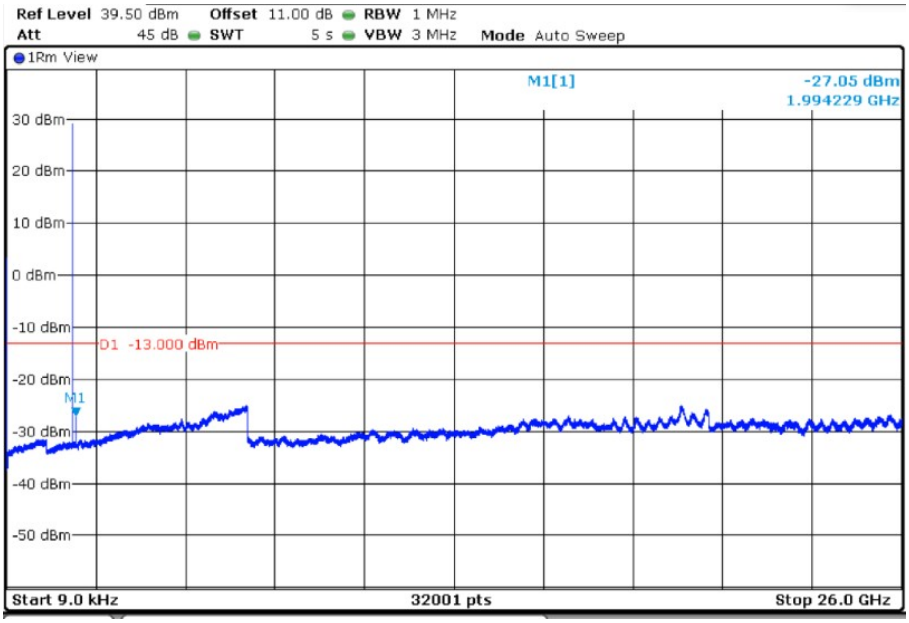

LTE QPSK MODULATION. BW = 3 MHz

Lowest Channel

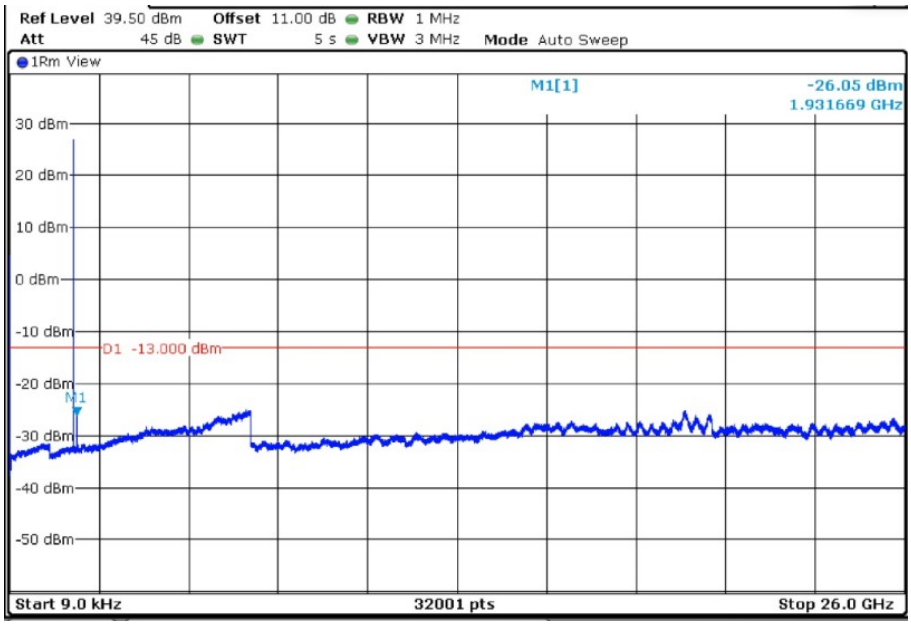

TEST RESULTS (Cont):	

Middle Channel

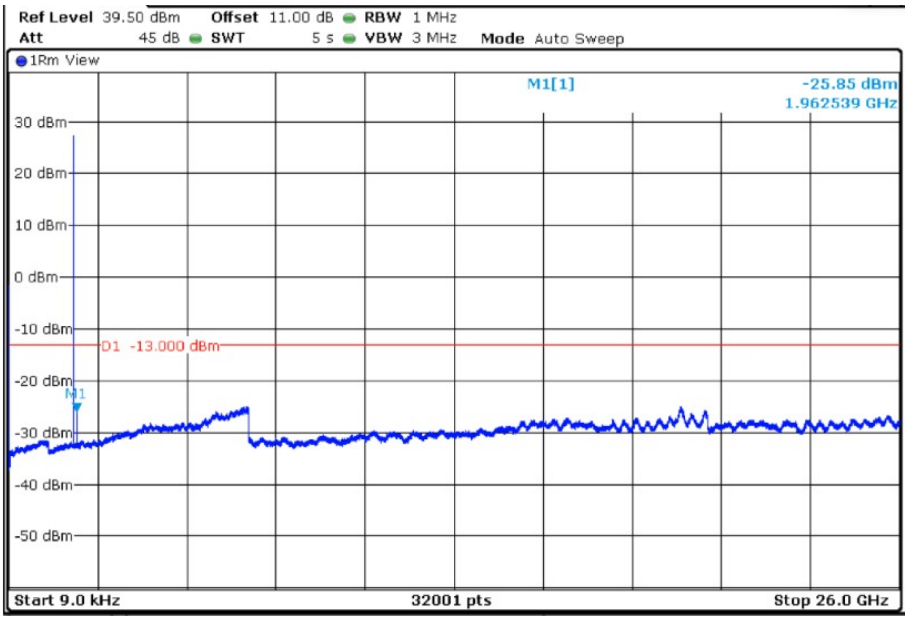

Highest Channel

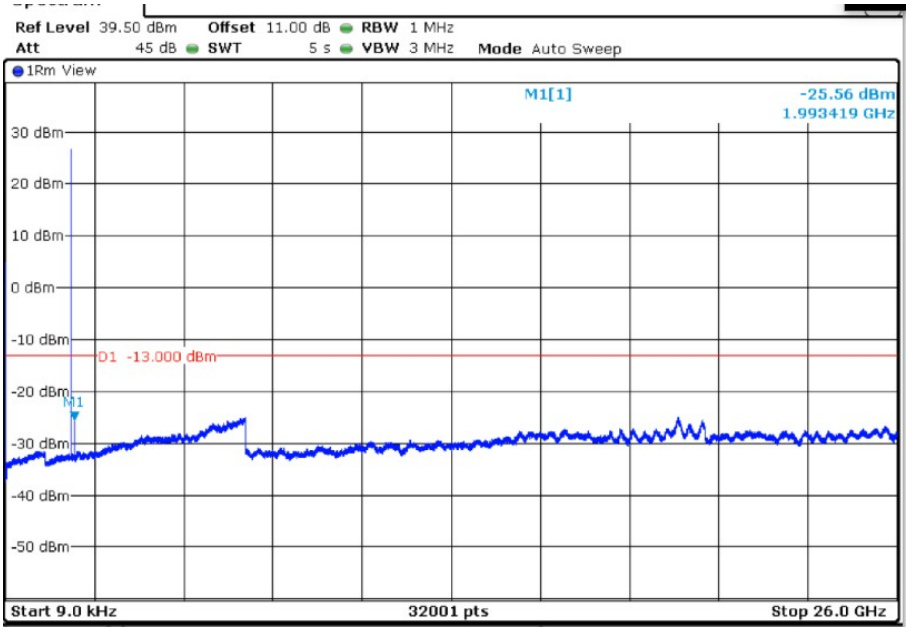

TEST RESULTS (Cont):	

LTE QPSK MODULATION. BW = 5 MHz

Lowest Channel

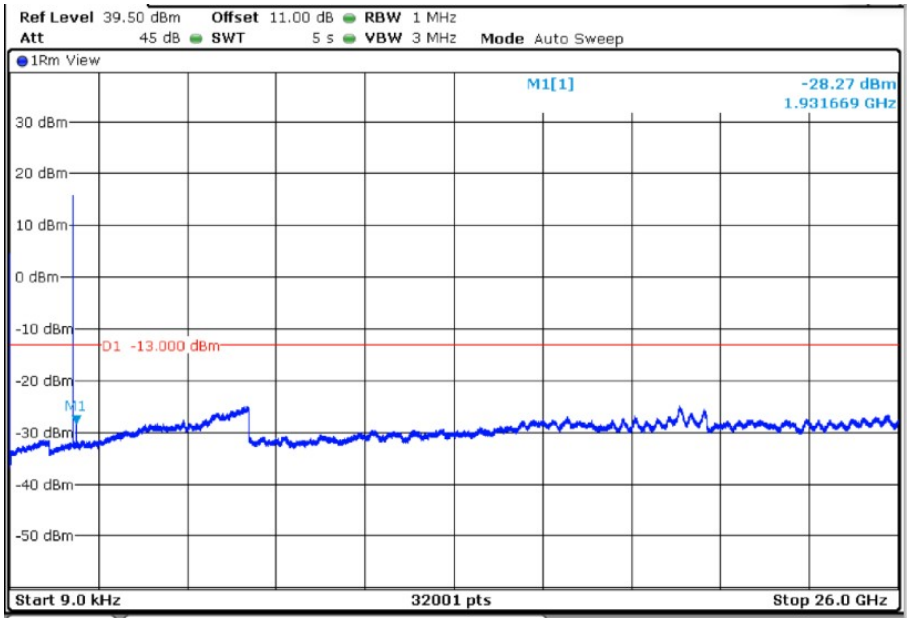

Middle Channel

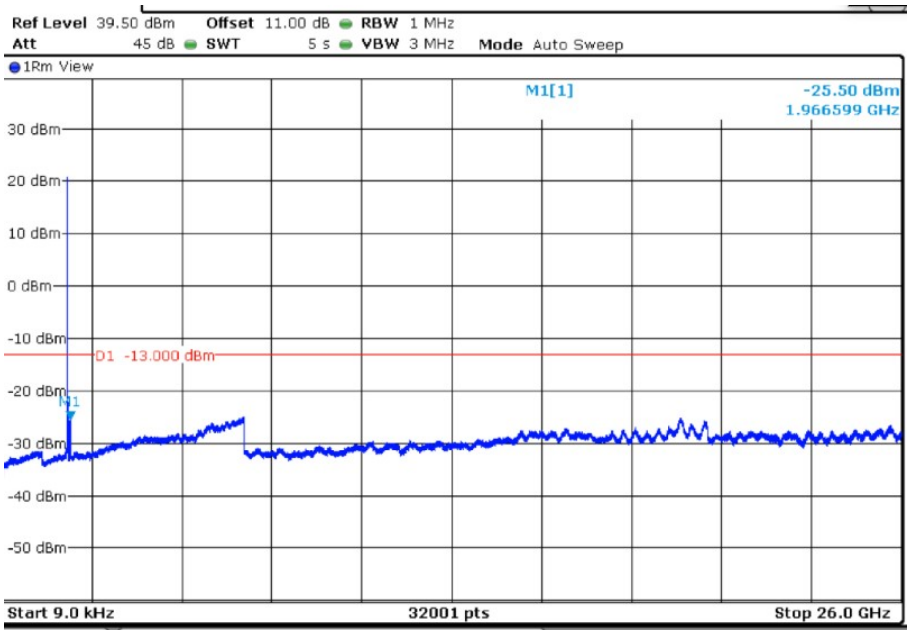

TEST RESULTS (Cont):	

Highest Channel

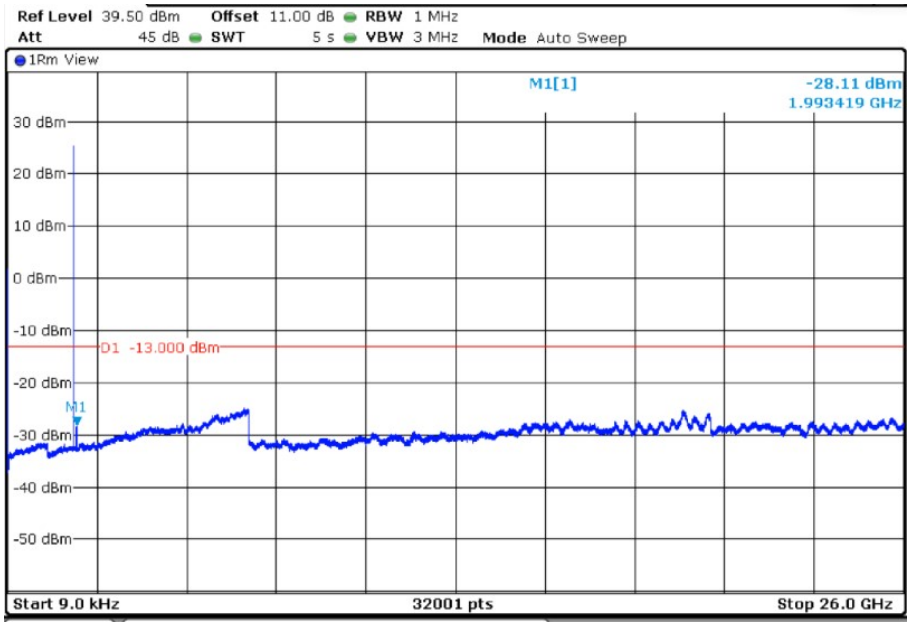

LTE QPSK MODULATION. BW = 10 MHz

Lowest Channel

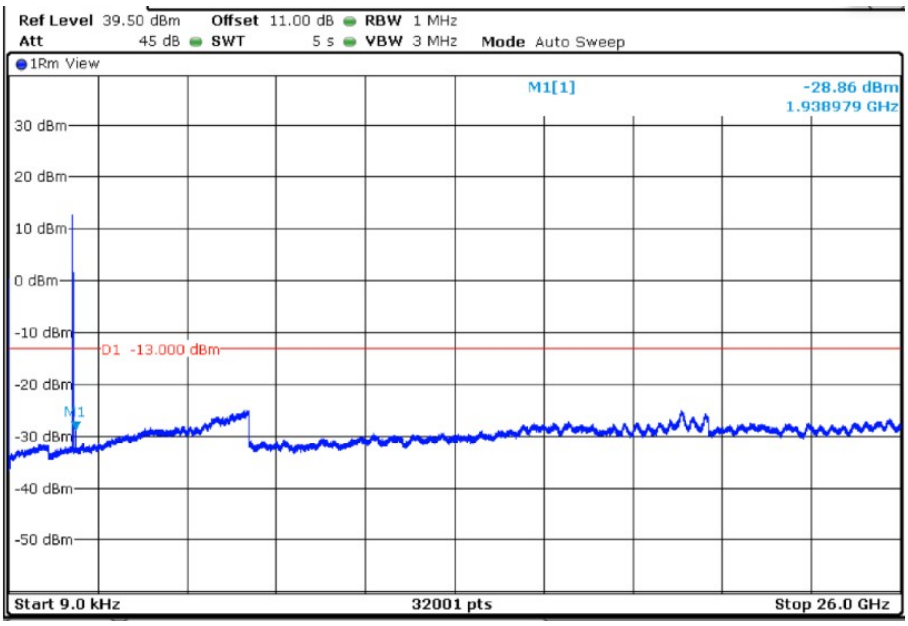

TEST RESULTS (Cont):	

Middle Channel

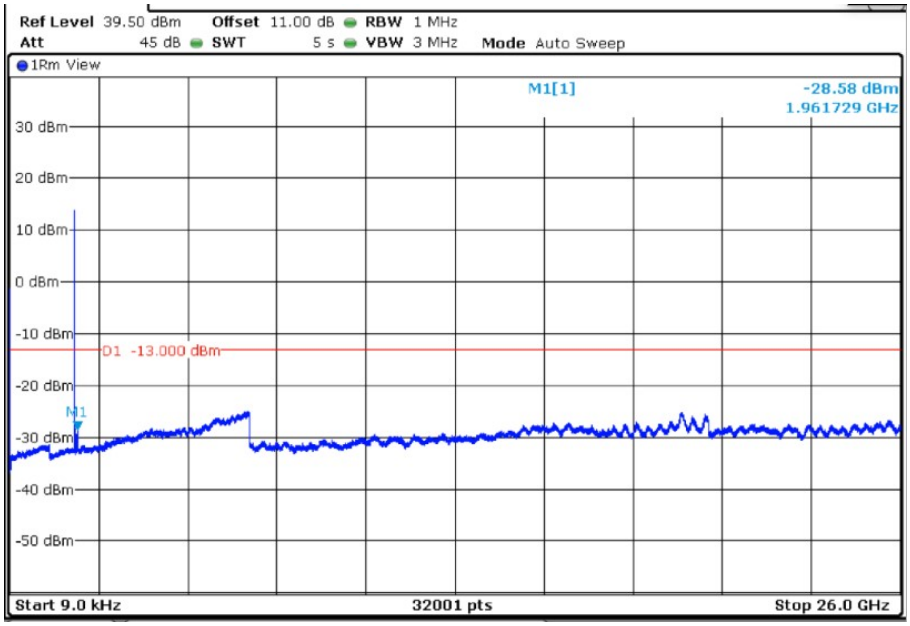

Highest Channel

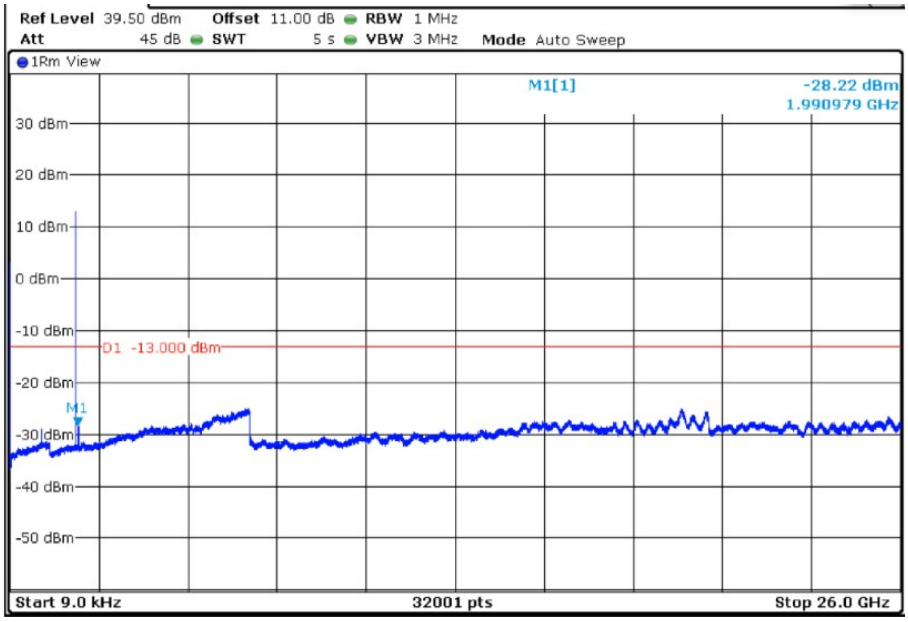

TEST RESULTS (Cont):	

LTE QPSK MODULATION. BW = 15 MHz

Lowest Channel

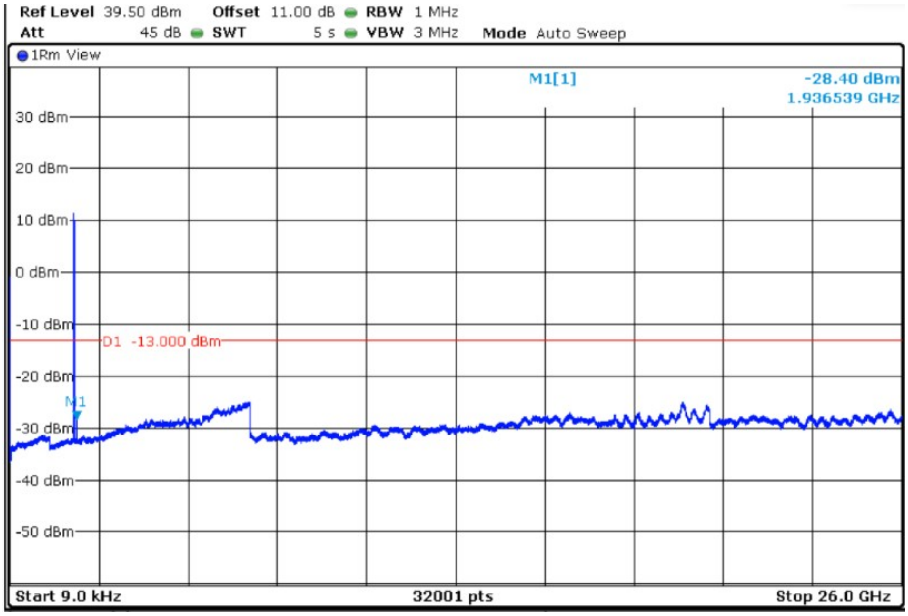

Middle Channel

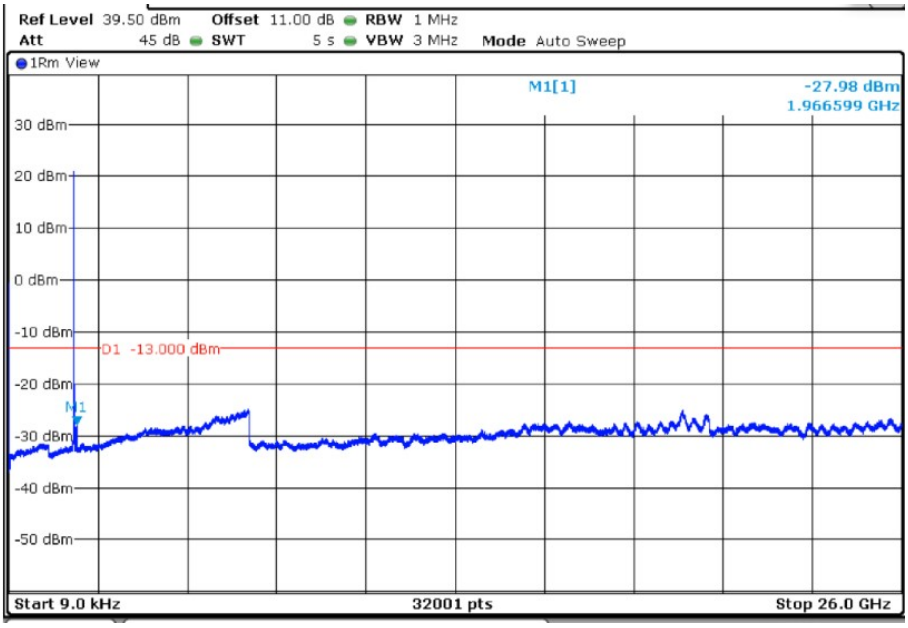

TEST RESULTS (Cont):	

Highest Channel

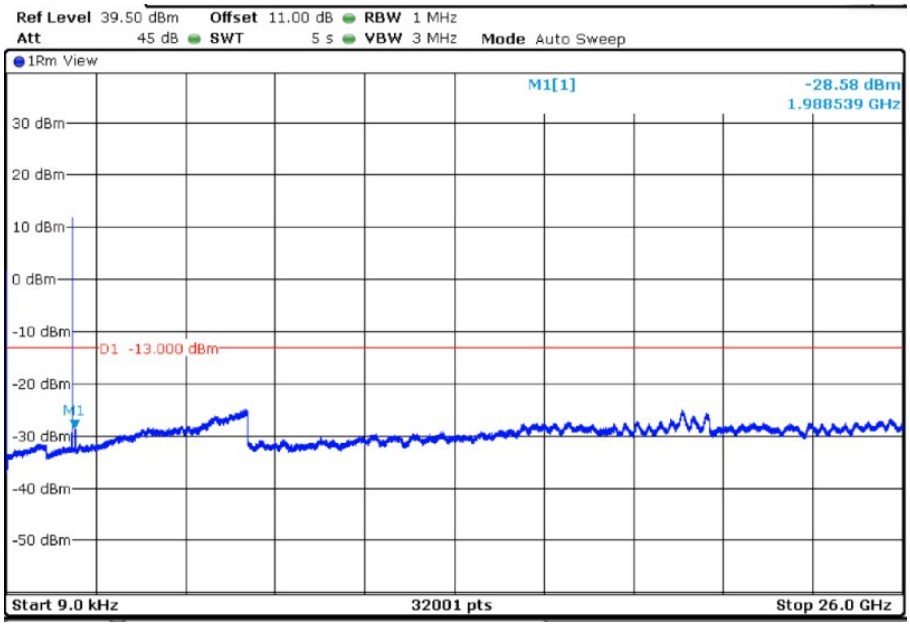

LTE QPSK MODULATION. BW = 20 MHz

Lowest Channel

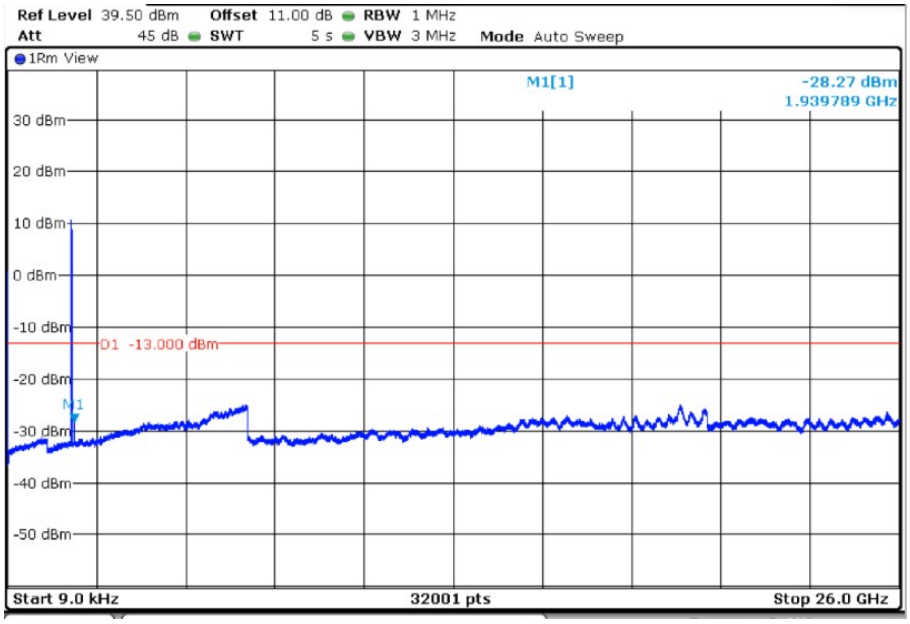

TEST RESULTS (Cont):	

Middle Channel

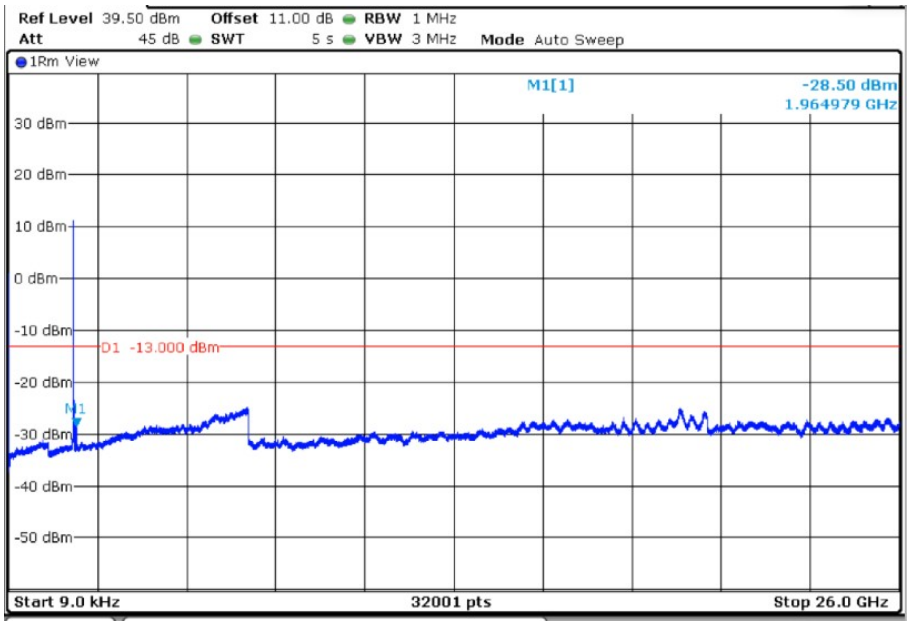

Highest Channel

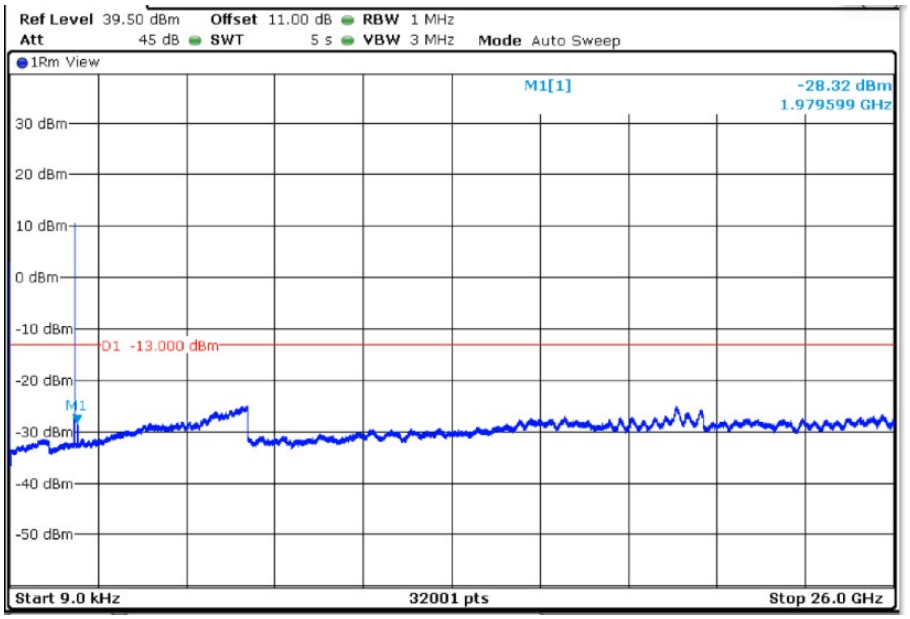

TEST A.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES

LIMITS:	Product standard:	FCC Part 24 / IC RSS-133
	Test standard:	FCC § 24.238 and FCC §2.1051 / RSS 133- Clause 6.6

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) – [43 + 10 log (Po in watts)] = -13 dBm

TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50 ohm attenuator and a power splitter.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of modulation which is the worst case for conducted power was used.

As indicated in FCC part 24, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block or band, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

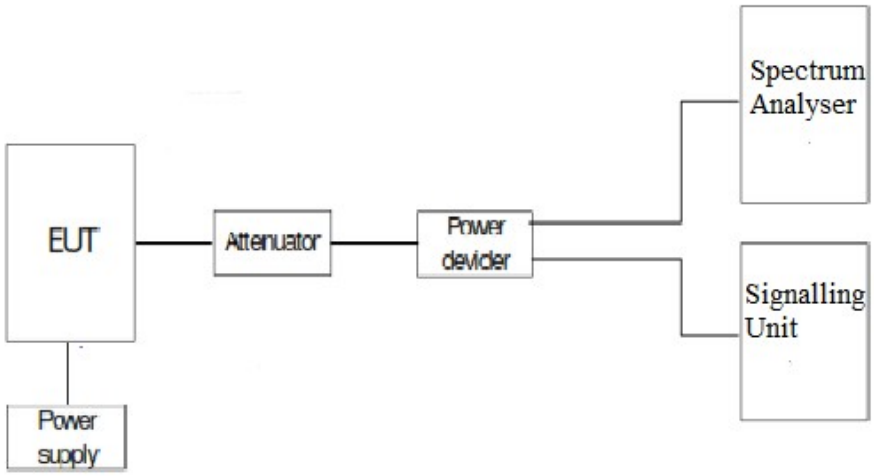

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

LTE QPSK MODULATION	RB=1. Offset=0. BW=1.4 MHz	RB=1. Offset =0. BW = 3 MHz	RB=1. Offset =0. BW = 5 MHz	RB=1. Offset =0. BW = 10 MHz	RB=1. Offset =0. BW = 15 MHz	RB=1. Offset =0. BW = 20 MHz
Maximum measured level at lowest Block Edge at antenna port (dBm)	-16.88	-17.34	-18.04	-15.86	-15.93	-19.7

LTE QPSK MODULATION:):	RB= All. Offset=0. BW=1.4 MHz	RB= All. Offset =0. BW = 3 MHz	RB= All. Offset =0. BW = 5 MHz	RB= All. Offset =0. BW = 10 MHz	RB= All. Offset =0. BW = 15 MHz	RB= All. Offset =0. BW = 20 MHz
Maximum measured level at lowest Block Edge at antenna port (dBm)	-22.15	-20.24	-15.48	-16.26	-20.39	-21.09

LTE QPSK MODULATION:	RB= 1. Offset=Max. BW=1.4 MHz	RB= 1. Offset=Max. BW = 3 MHz	RB= 1. Offset=Max. BW = 5 MHz	RB= 1. Offset=Max. BW = 10 MHz	RB= 1. Offset=Max. BW = 15 MHz	RB= 1. Offset=Max. BW = 20 MHz
Maximum measured level at highest Block Edge at antenna port (dBm)	-18.43	-17.77	-15.31	-15.41	-17.39	-20.45

LTE QPSK MODULATION:	RB= All. Offset=0. BW=1.4 MHz	RB= All. Offset =0. BW = 3 MHz	RB= All. Offset =0. BW = 5 MHz	RB= All. Offset =0. BW = 10 MHz	RB= All. Offset =0. BW = 15 MHz	RB= All. Offset =0. BW = 20 MHz
Maximum measured level at highest Block Edge at antenna port (dBm)	-16.01	-24.39	-14.82	-18.23	-21.76	-26.61

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

Lowest Channel

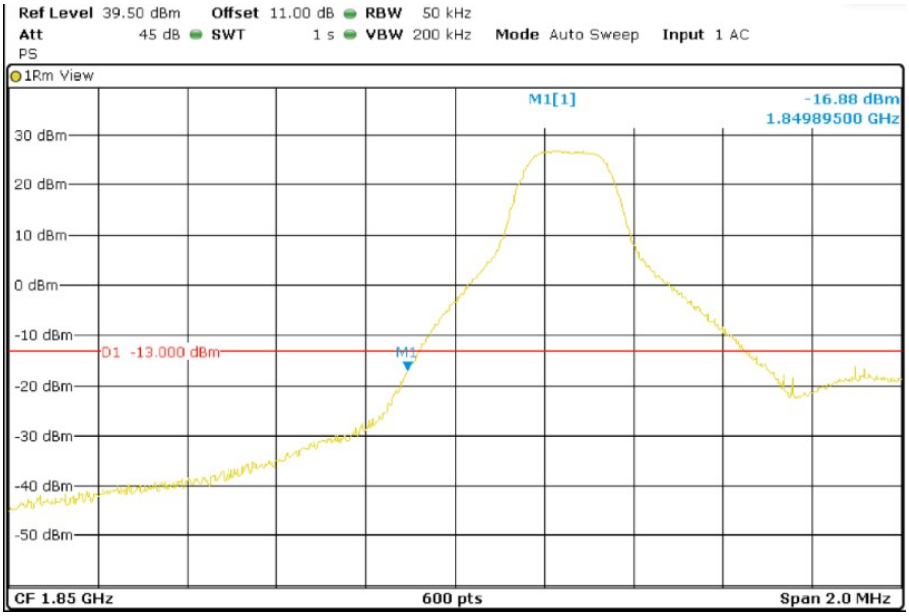

Highest Channel

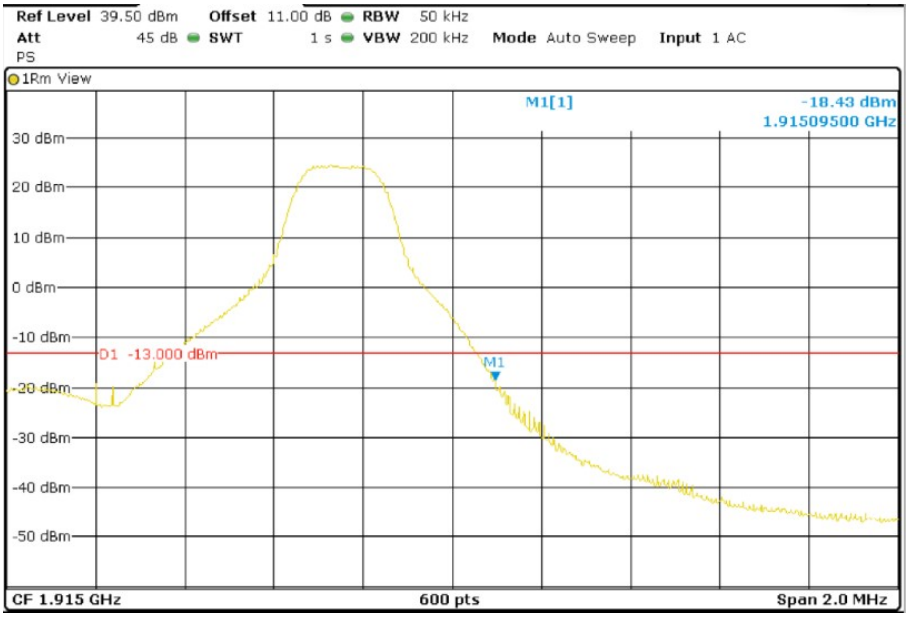

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 6. Offset = 0. BW = 1.4 MHz

Lowest Channel

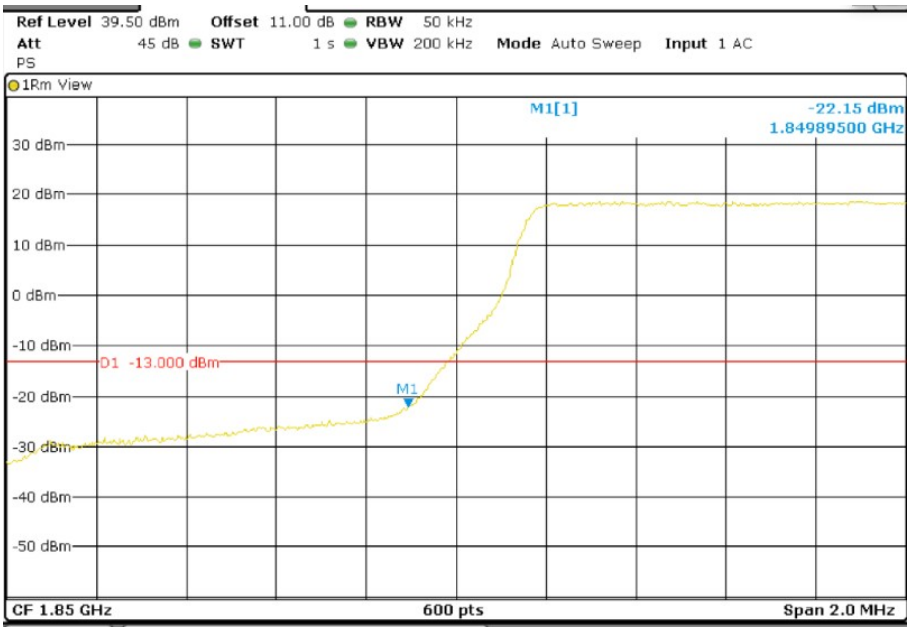

Highest Channel

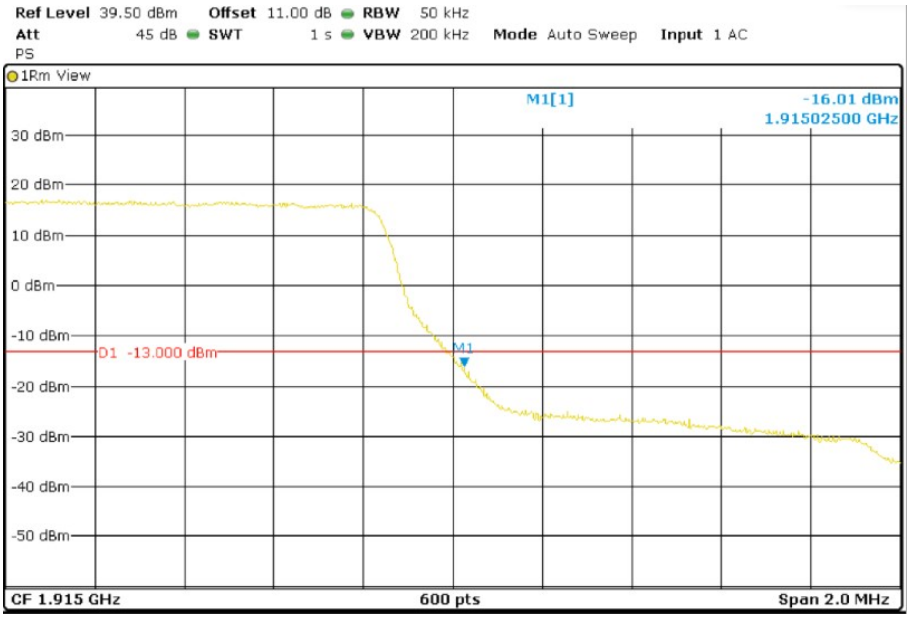

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 3 MHz

Lowest Channel

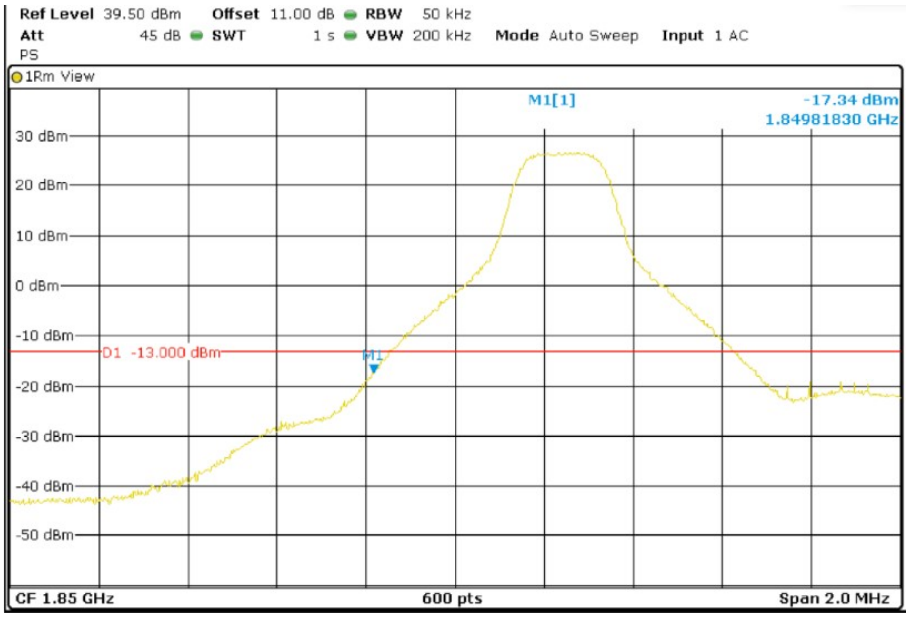

Highest Channel

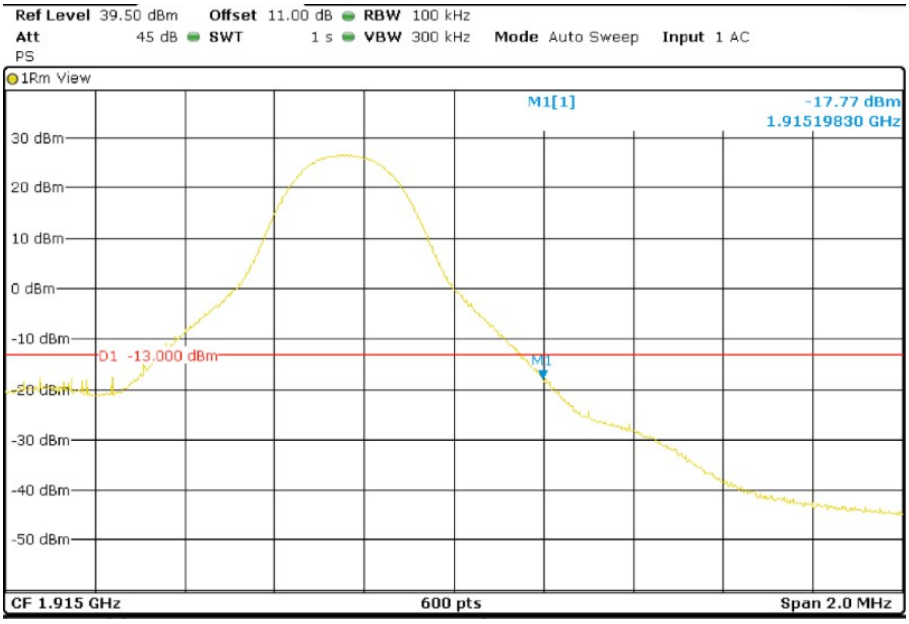

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 15. Offset = 0. BW = 3 MHz

Lowest Channel

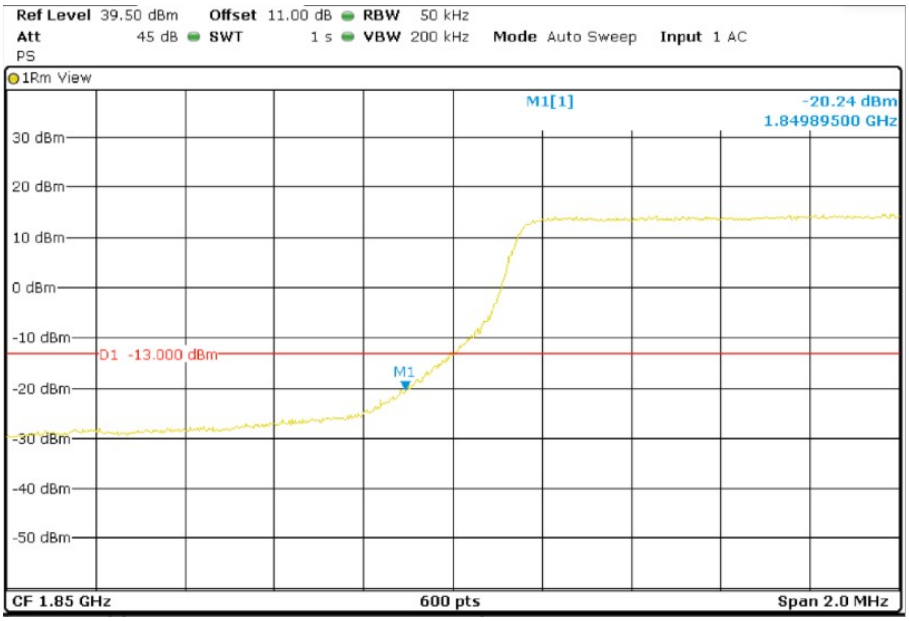

Highest Channel

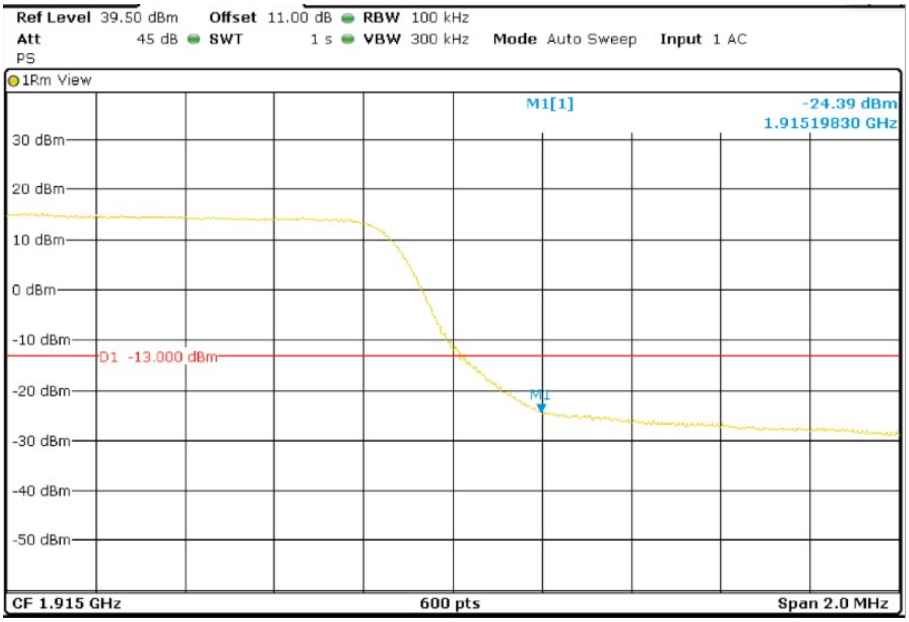

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 5 MHz

Lowest Channel

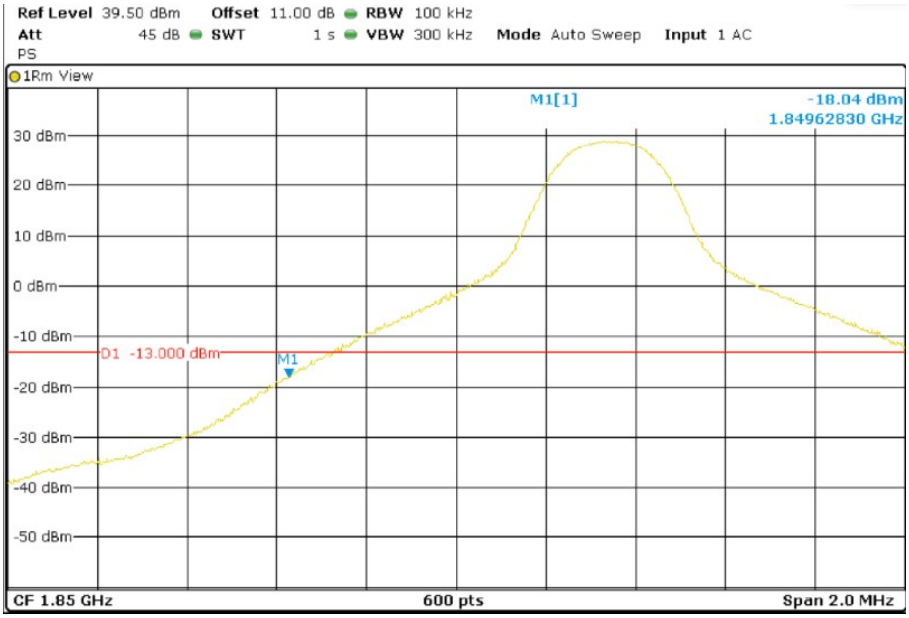

Highest Channel

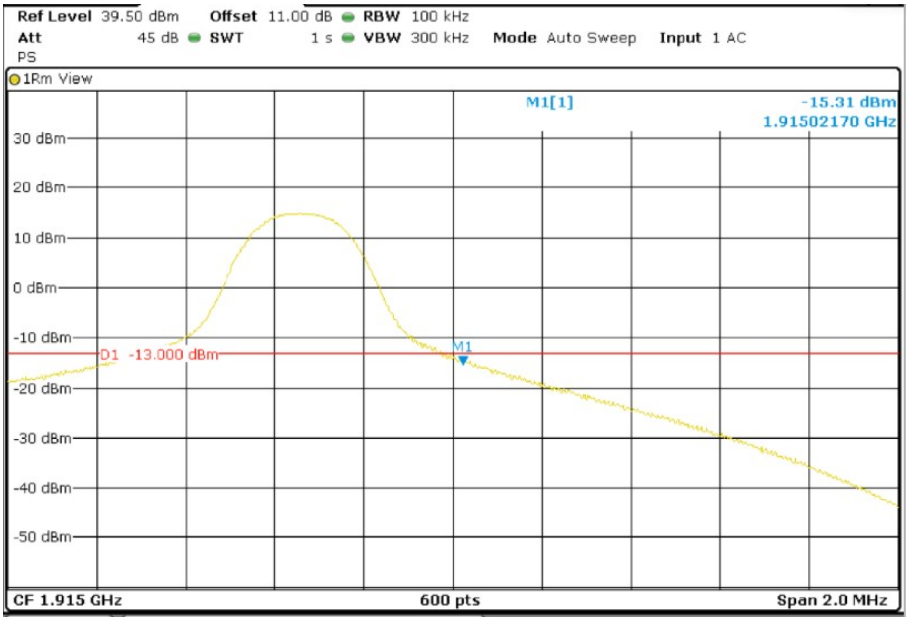

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 25. Offset = 0. BW = 5 MHz

Lowest Channel

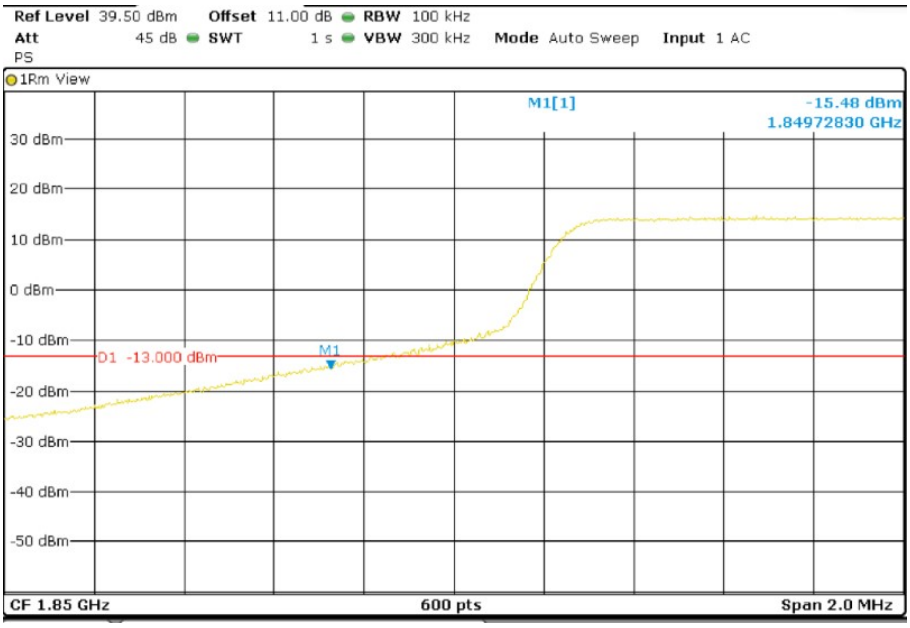

Highest Channel

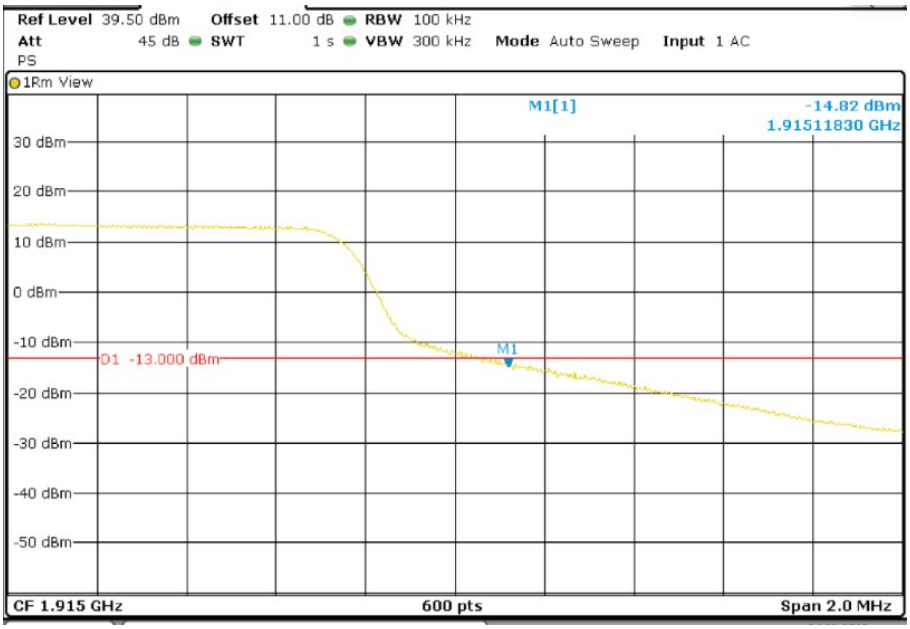

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 10 MHz

Lowest Channel

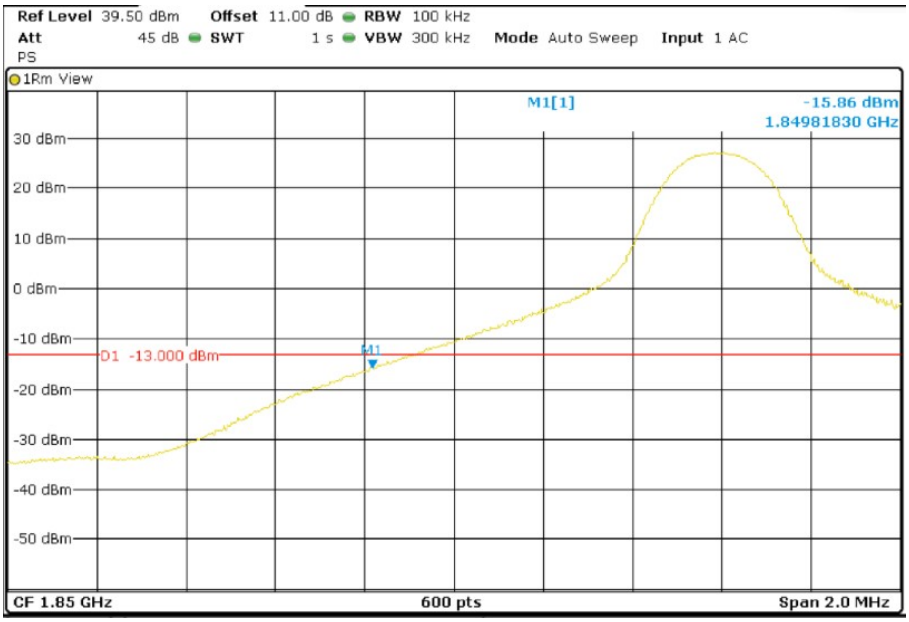

Highest Channel

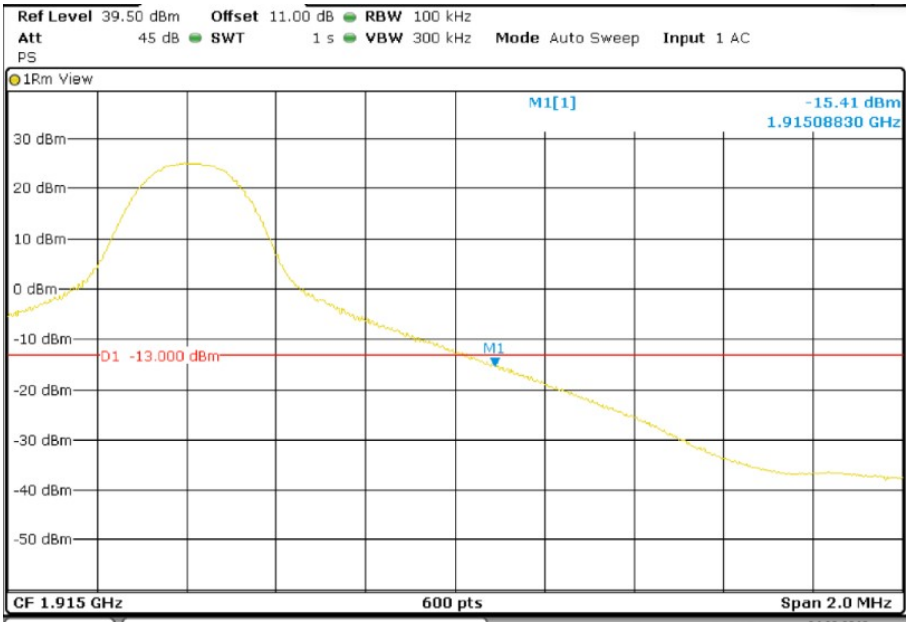

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 50. Offset = 0. BW = 10 MHz

Lowest Channel

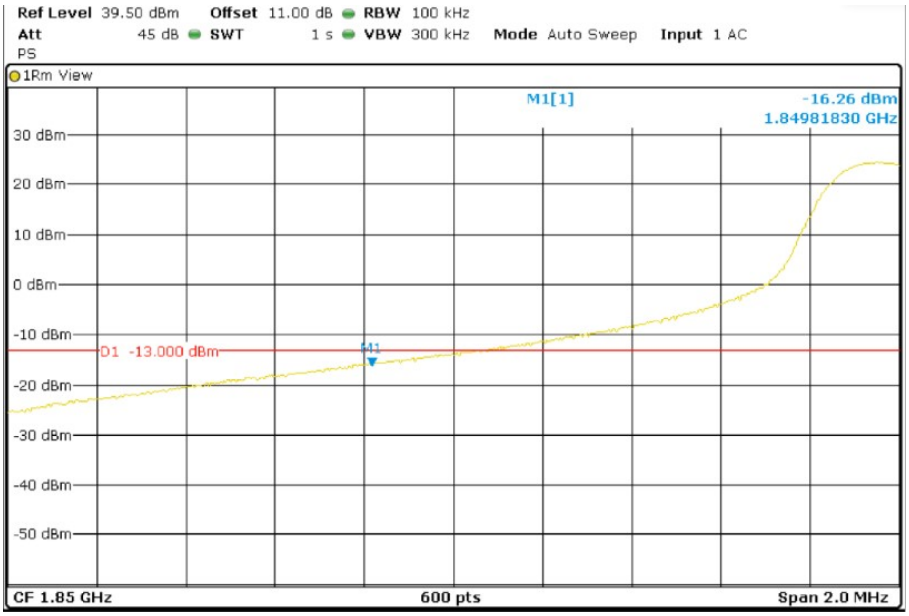

Highest Channel

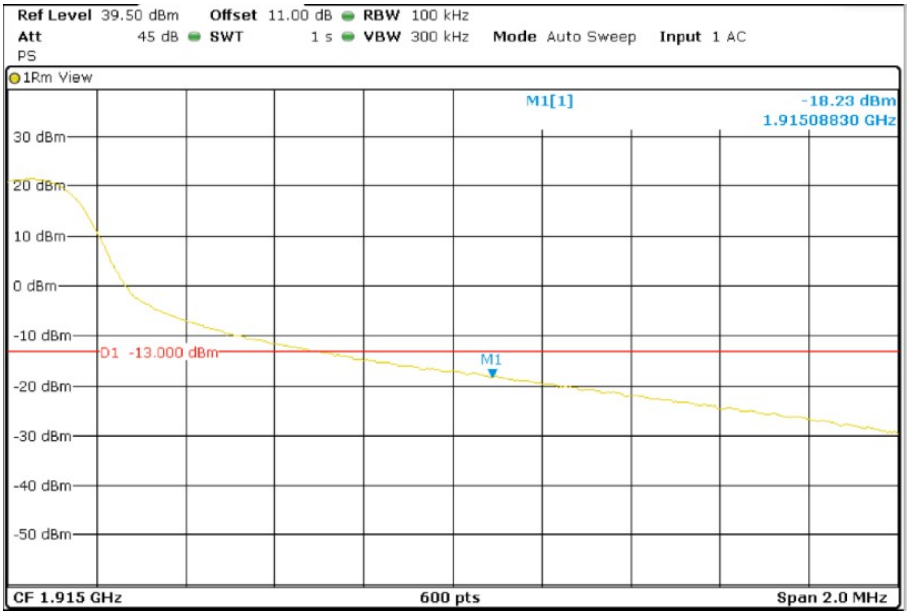

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 15 MHz

Lowest Channel

Highest Channel

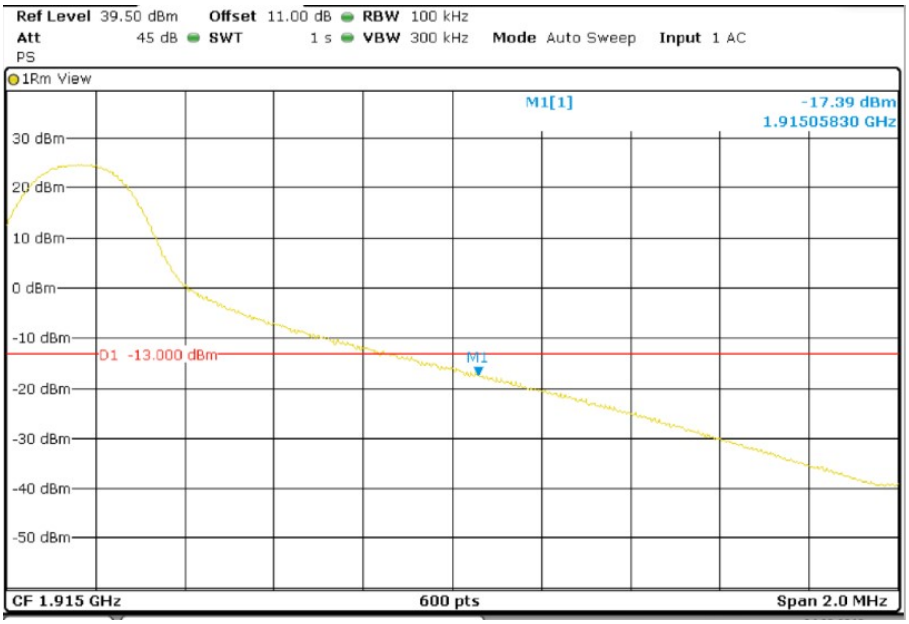

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 75. Offset = 0. BW = 15 MHz

Lowest Channel

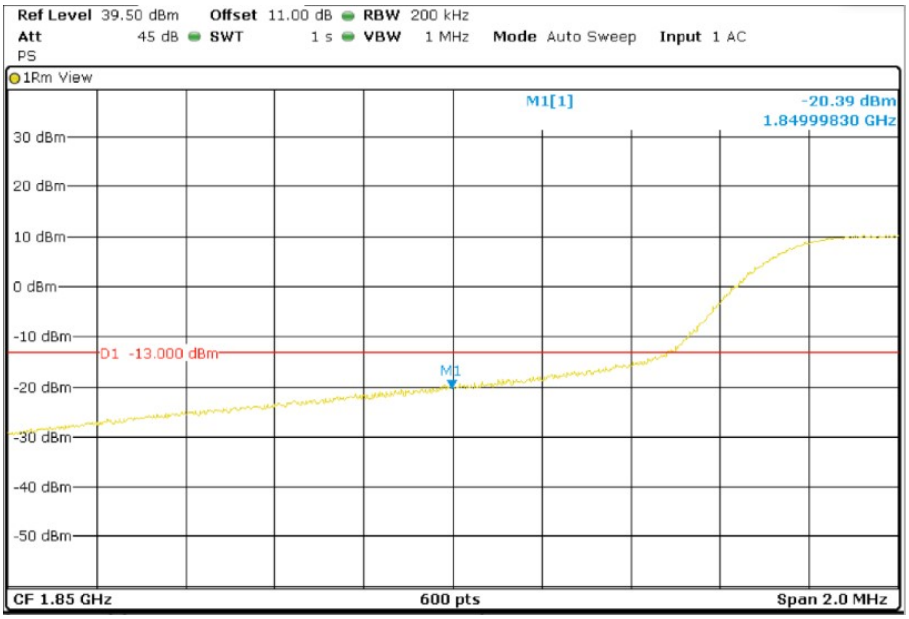

Highest Channel

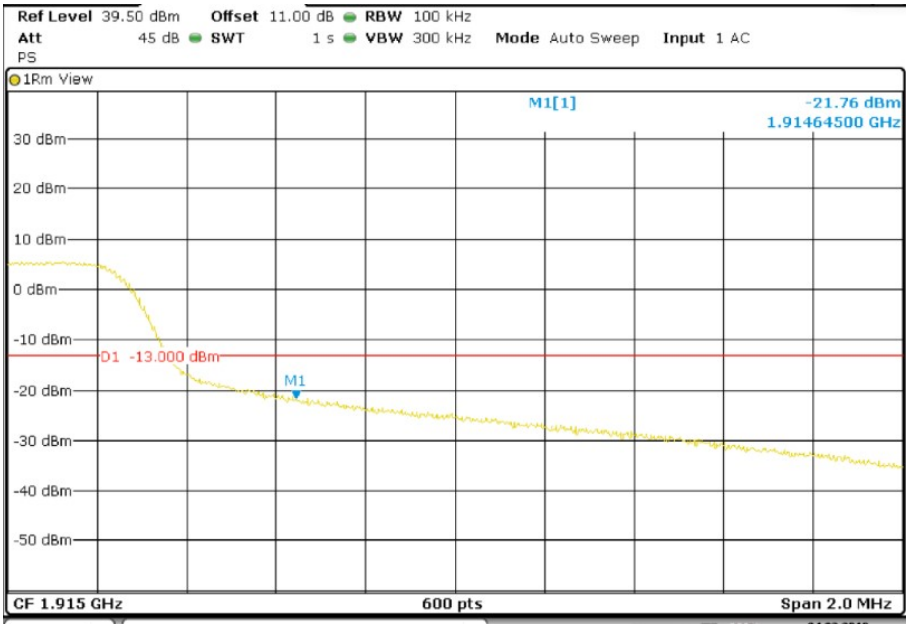

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 20 MHz

Lowest Channel

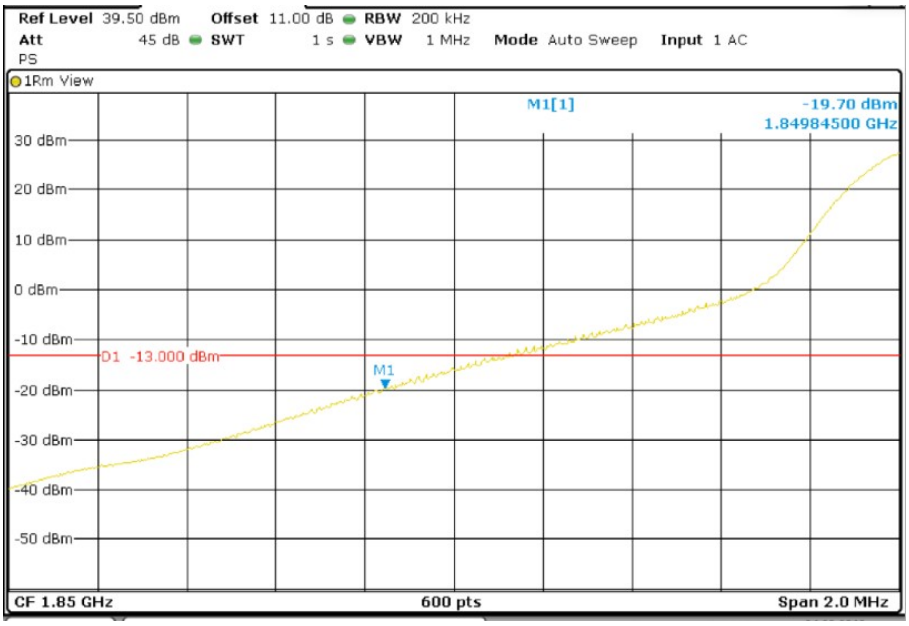

Highest Channel

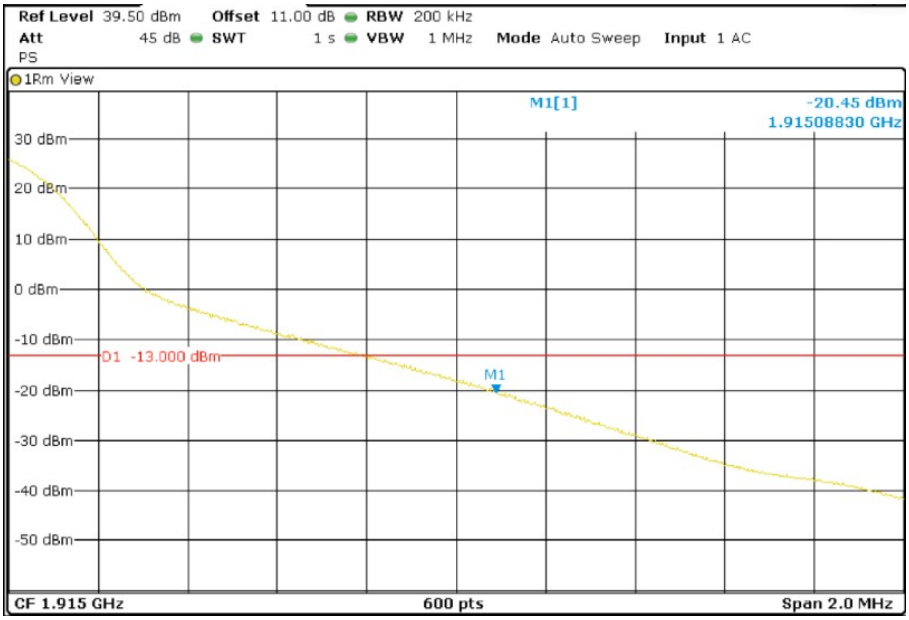

TEST RESULTS (Cont):	

LTE QPSK MODULATION. RB = 100. Offset = 0. BW = 20 MHz

Lowest Channel

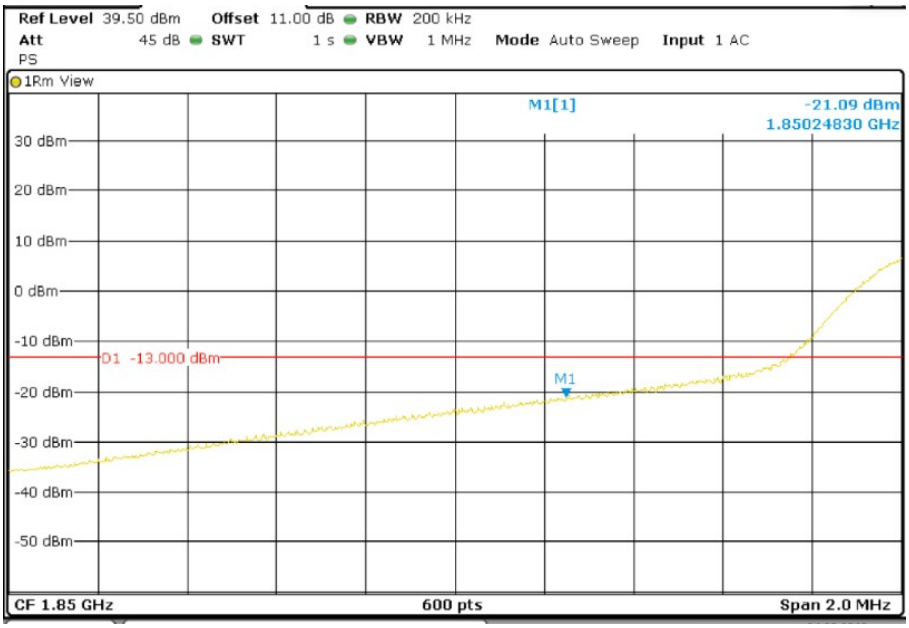

Highest Channel

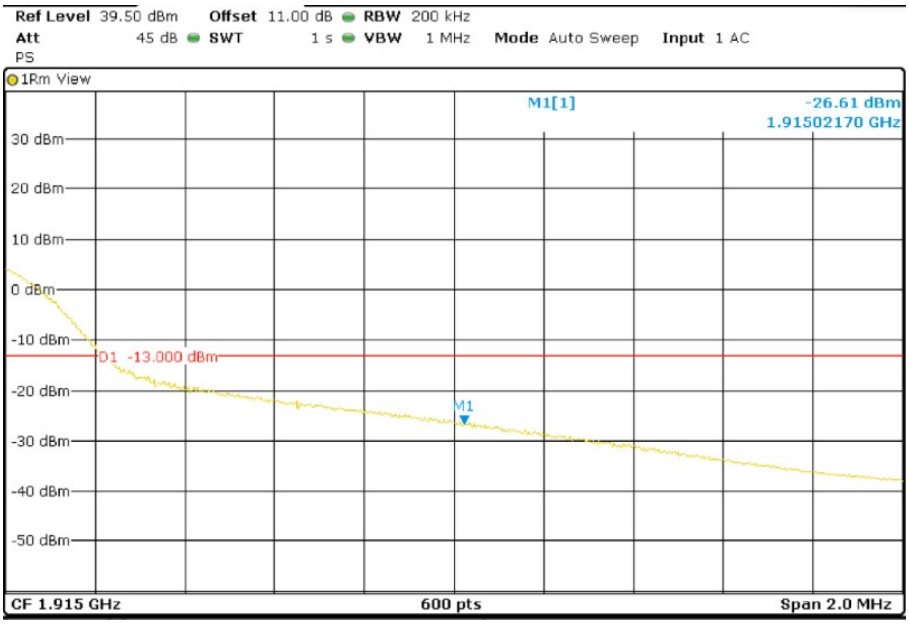

TEST A.7: RADIATED EMISSIONS

LIMITS:	Product standard:	FCC Part 24 / IC RSS-133
	Test standard:	FCC §2.1053 and §24.238 /RSS-133 Clause 6.6

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) – [43 + 10 log (Po in watts)] = -13 dBm

TEST SETUP

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a non-conductive stand at a 3-meter distance from the measuring antenna for measurements below 1 GHz and at 1-meter distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum reading was recorded.

Radiated measurements < 1GHz

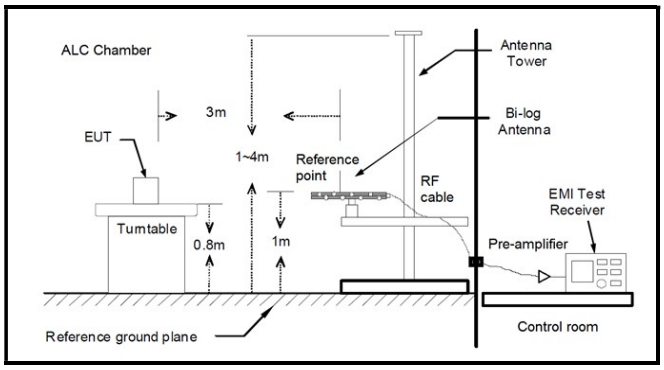

Radiated measurements > 1GHz

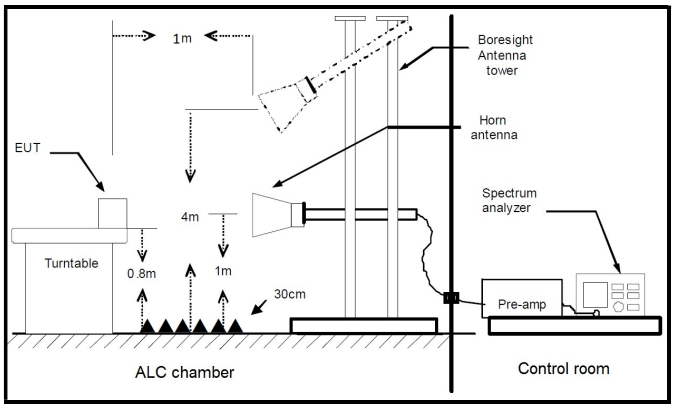

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 1.4 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.

No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

TEST RESULTS (Cont):	Low Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
60.425667	-67.52	-57.68	
806.291000	-46.48	-40.70	

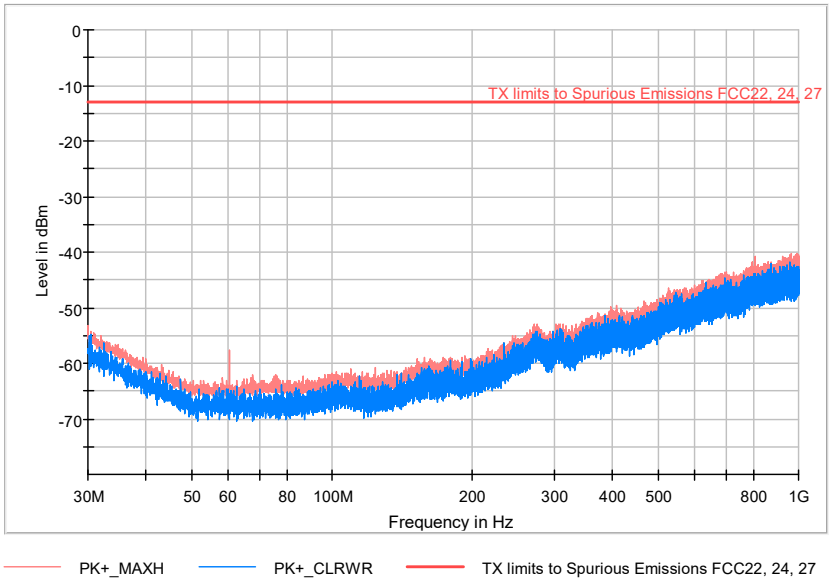

TEST RESULTS (Cont):	Low Channel

FREQUENCY RANGE: 1-18 GHz
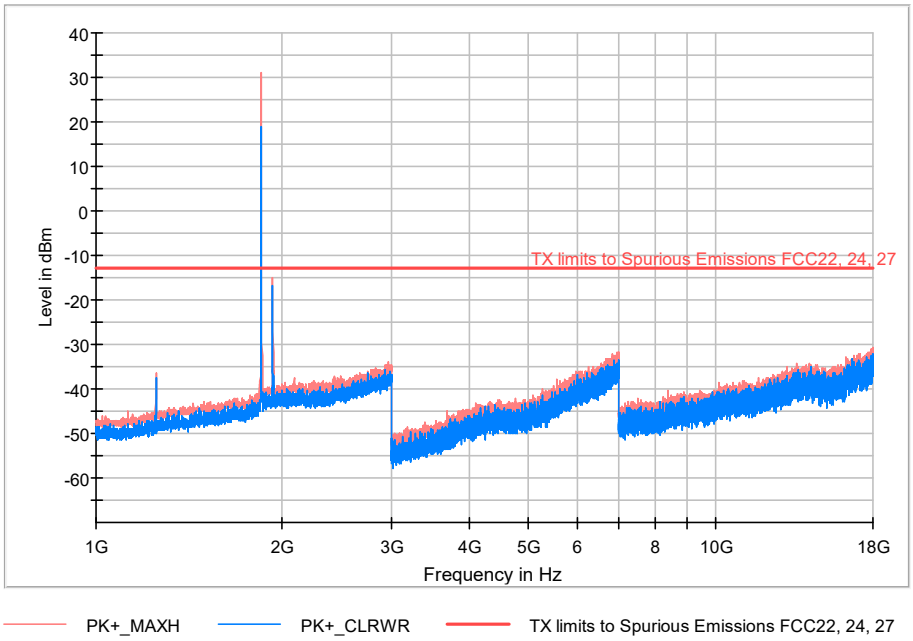
Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
1250.000000	-37.33	-36.56	
1851.000000	17.83	31.13	Fundamental
1930.500000	-16.84	-14.96