TEST RESULTS (Cont):	

Middle channel

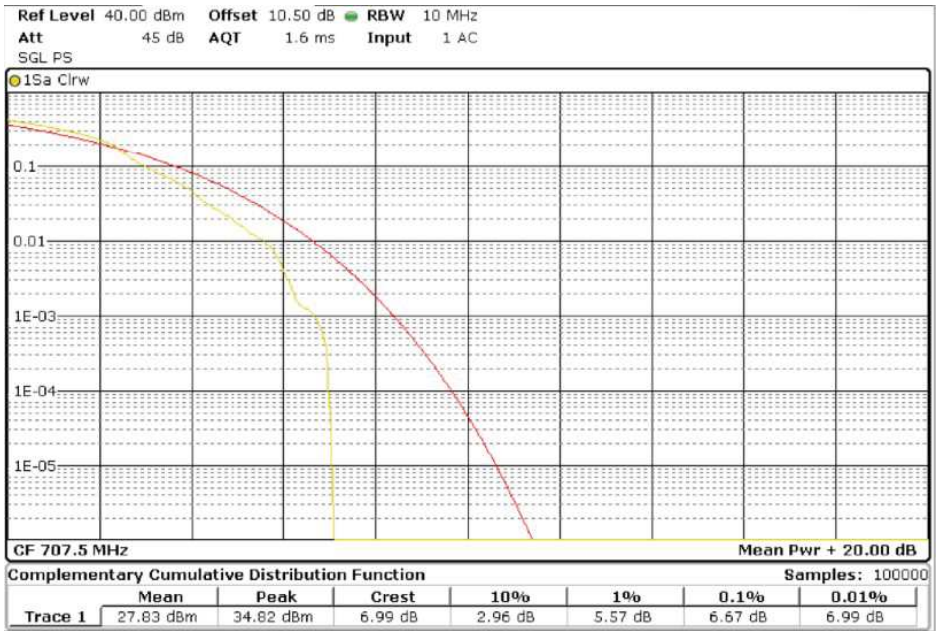

Highest channel

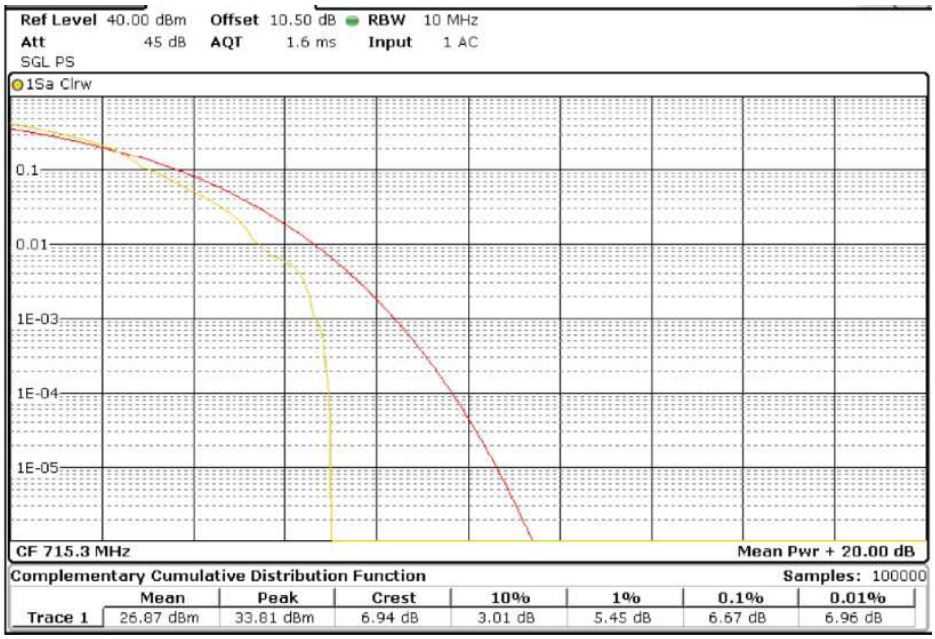

TEST RESULTS (Cont):	

PAPR
Bandwidth = 3 MHz. Modulation QPSK. RB Size: 1. RB Offset: 0.
Lowest channel

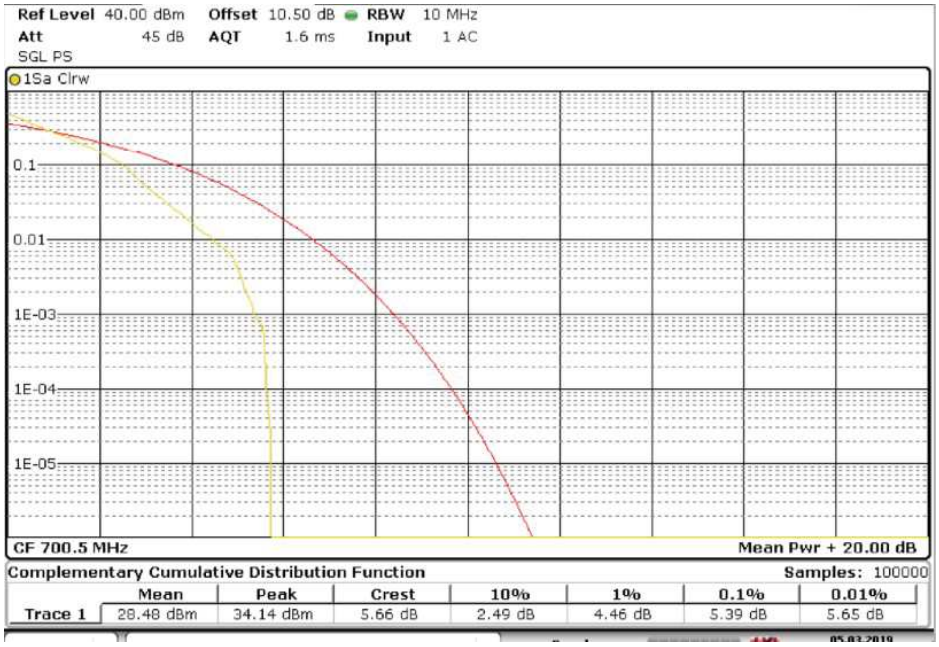

Middle channel

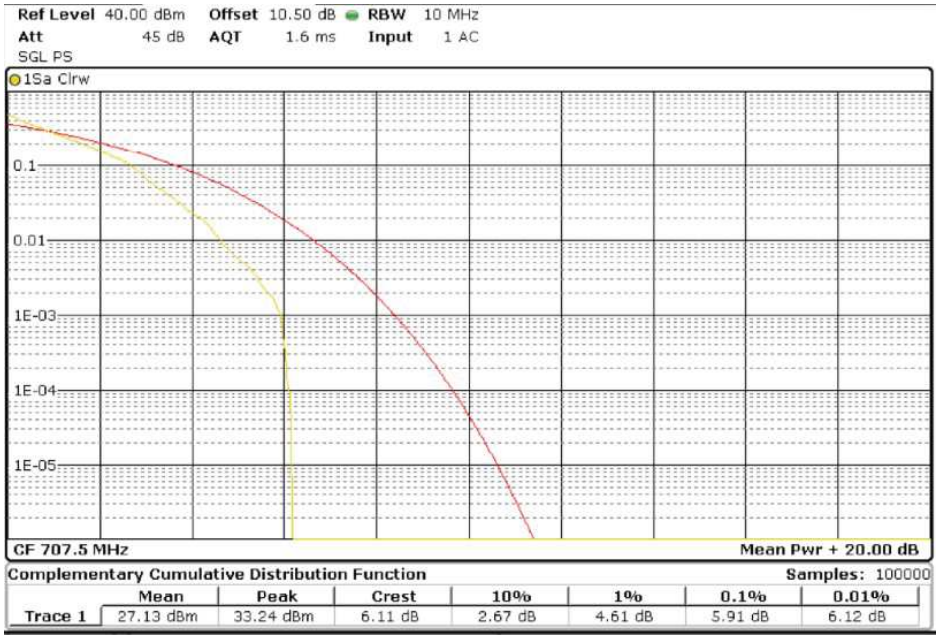

TEST RESULTS (Cont):	

Highest channel

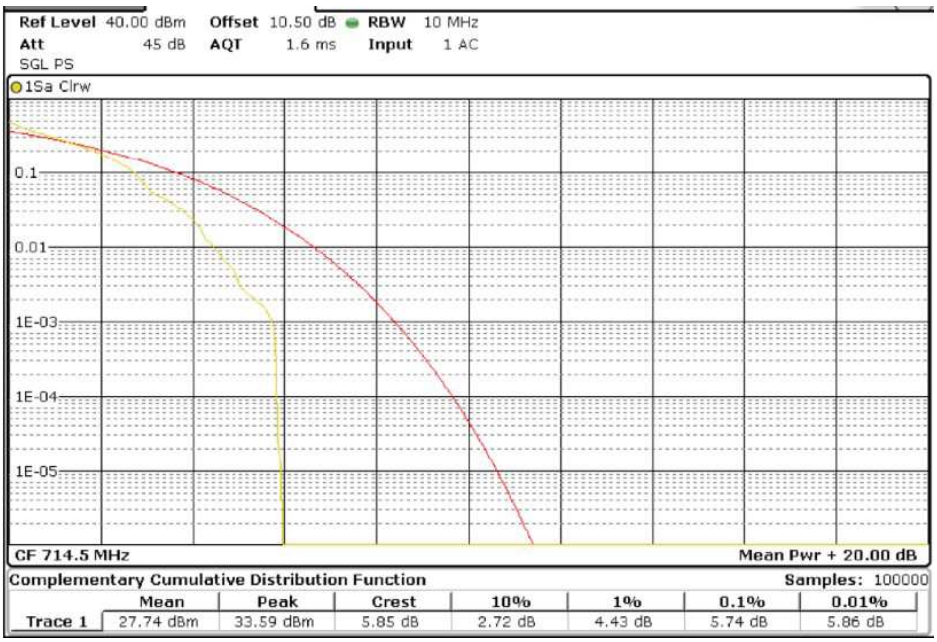

PAPR
Bandwidth = 3 MHz. Modulation 16QAM. RB Size: 1. RB Offset: 0.
Lowest channel

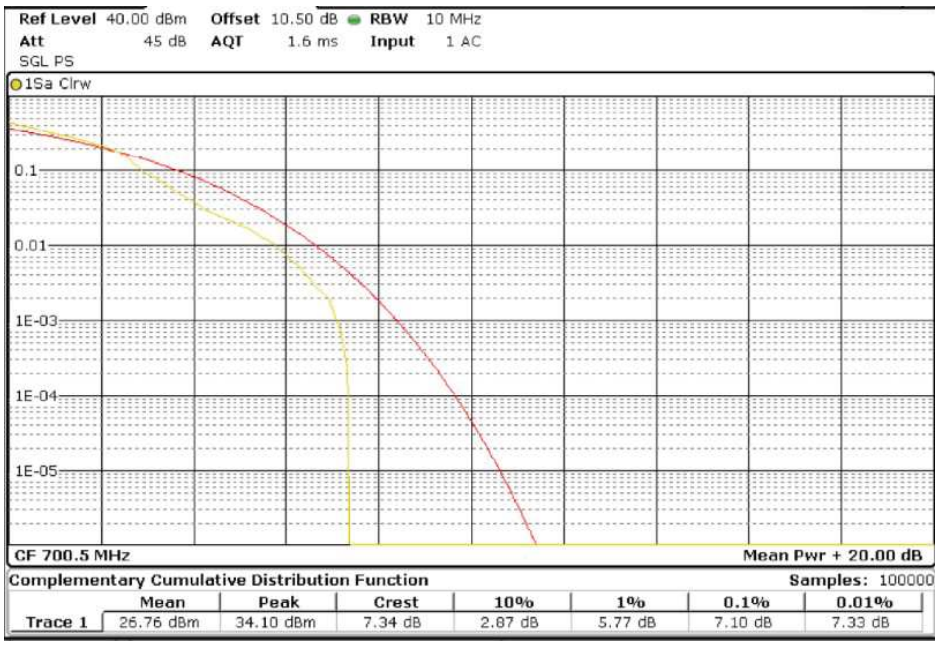

TEST RESULTS (Cont):	

Middle channel

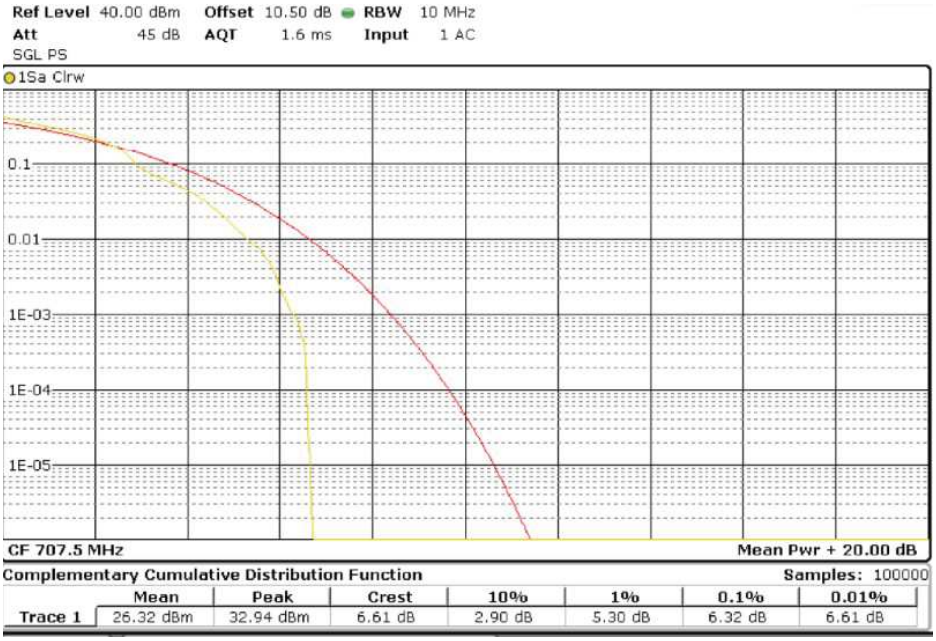

Highest channel

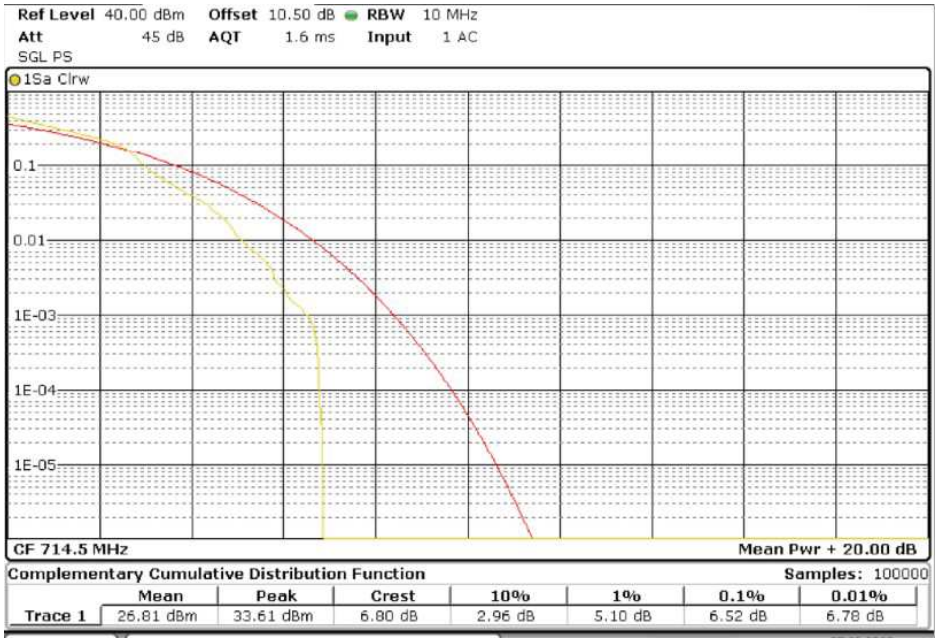

TEST RESULTS (Cont):	

PAPR
Bandwidth = 5 MHz. Modulation QPSK. RB Size: 1. RB Offset: 0.
Lowest channel

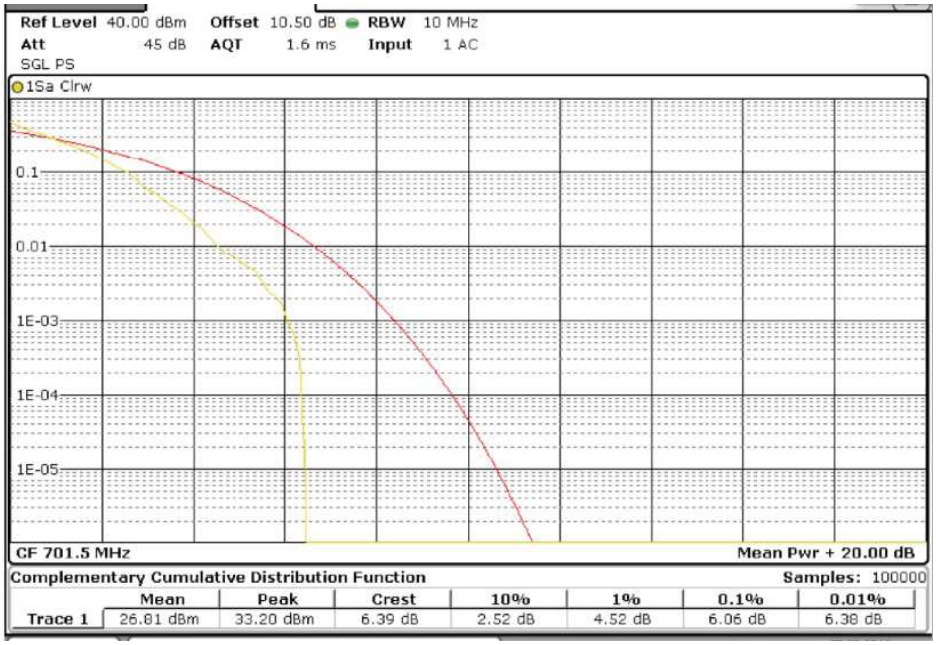

Middle channel

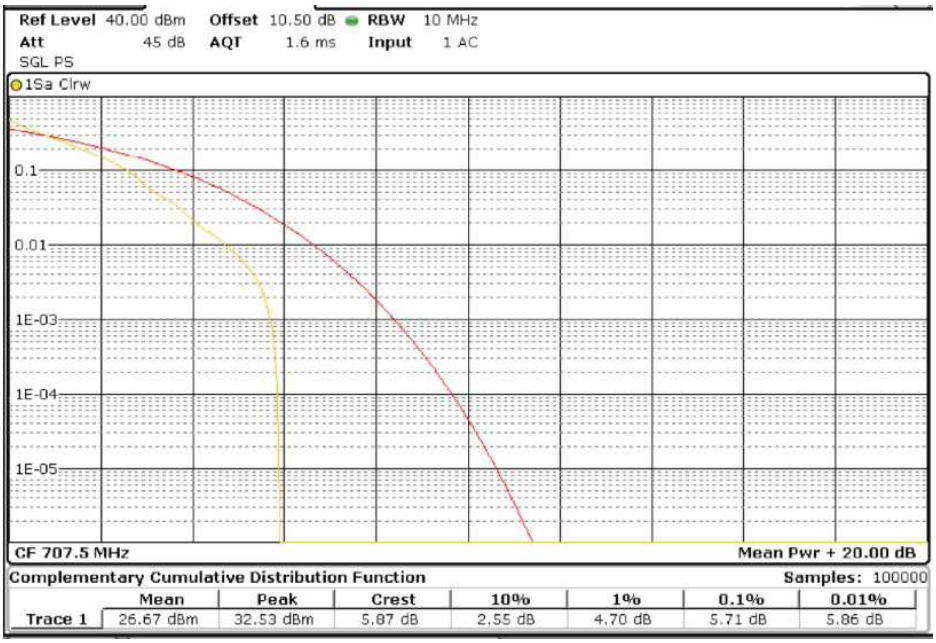

TEST RESULTS (Cont):	

Highest channel

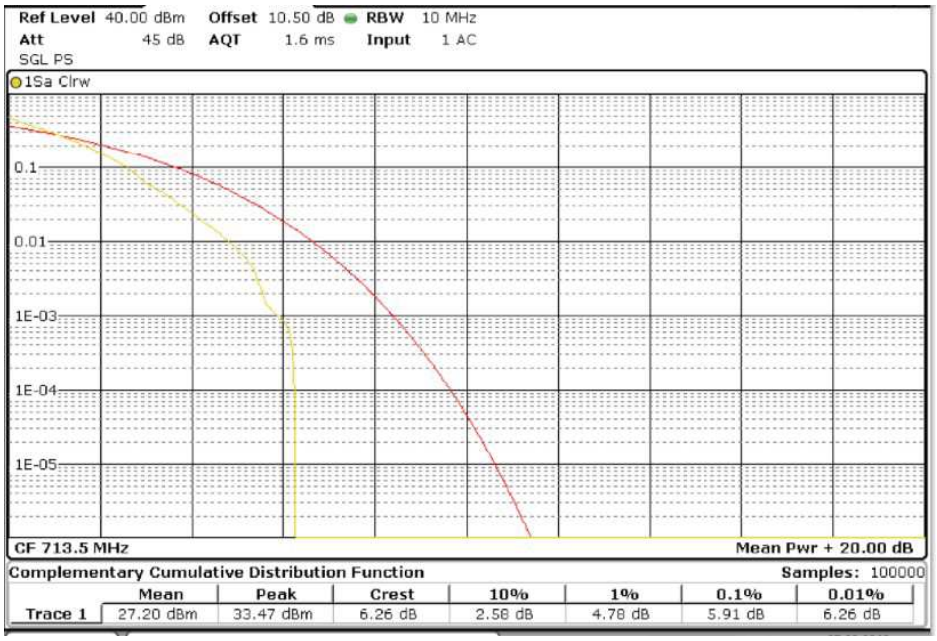

Bandwidth = 5 MHz. Modulation 16QAM. RB Size: 1. RB Offset: 0.
Lowest channel

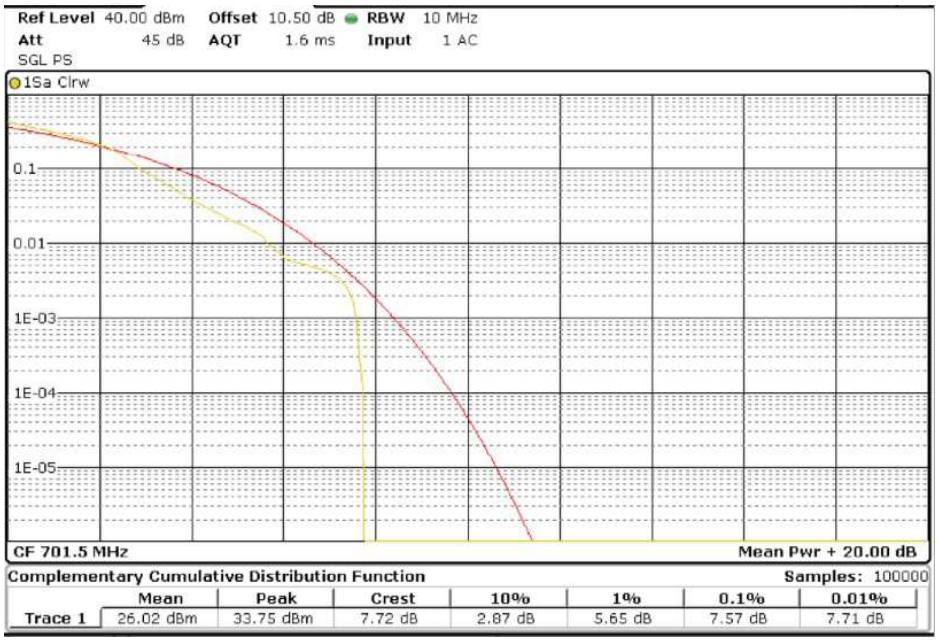

TEST RESULTS (Cont):	

Middle channel

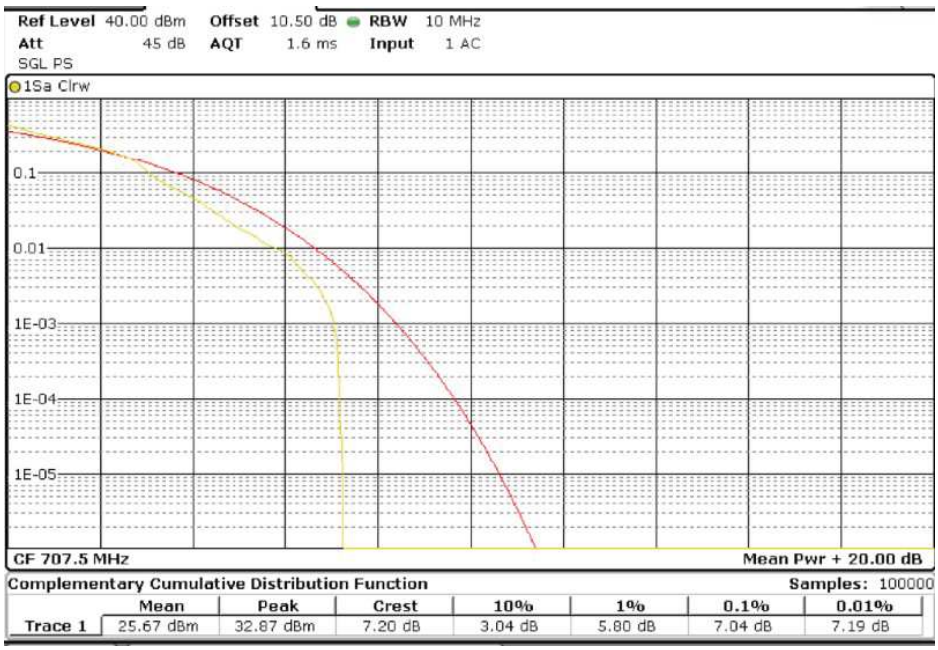

Highest channel

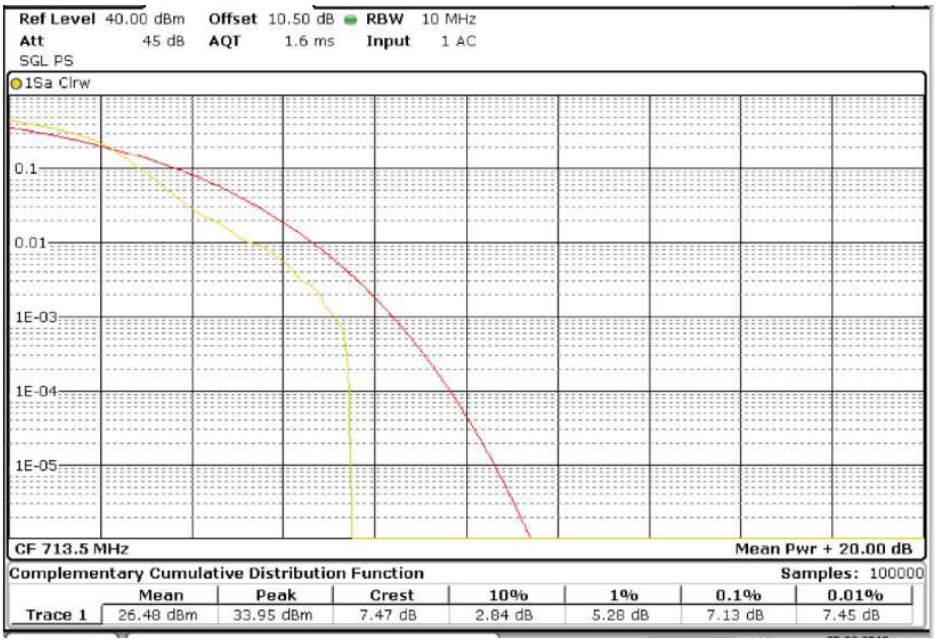

TEST RESULTS (Cont):	

Bandwidth = 10 MHz. Modulation QPSK. RB Size: 1. RB Offset: 0.
Lowest channel

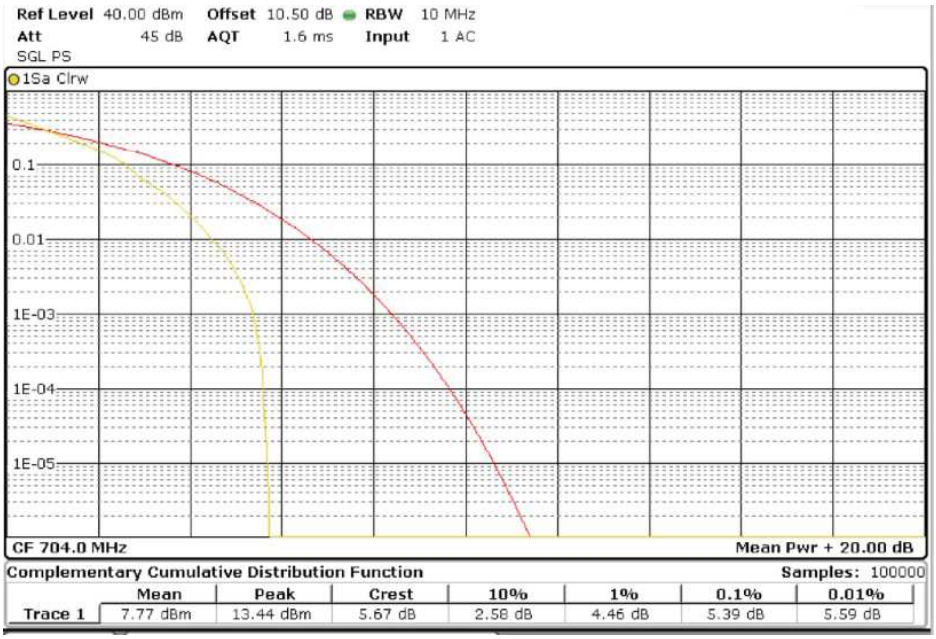

Middle channel

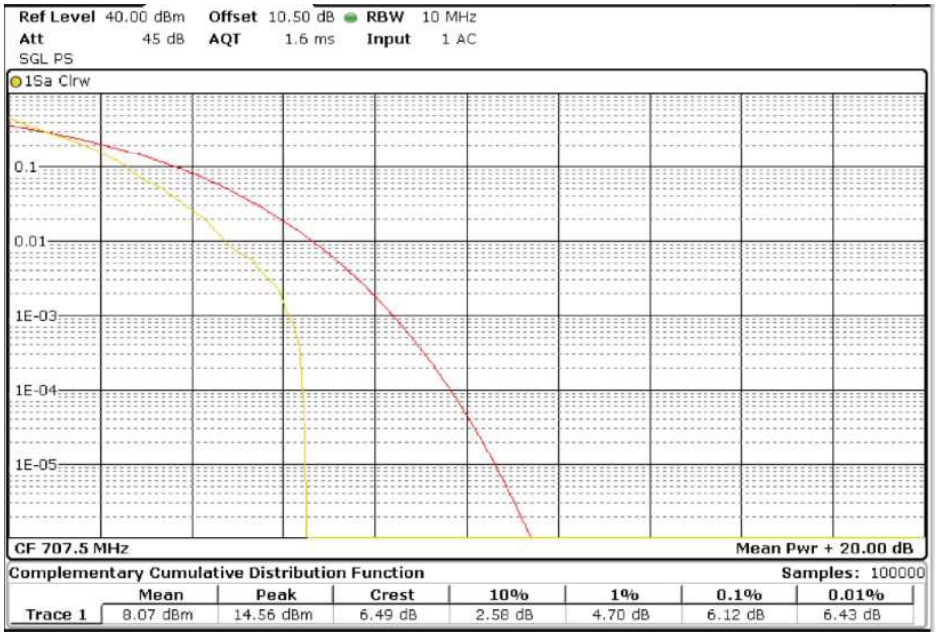

TEST RESULTS (Cont):	

Highest channel

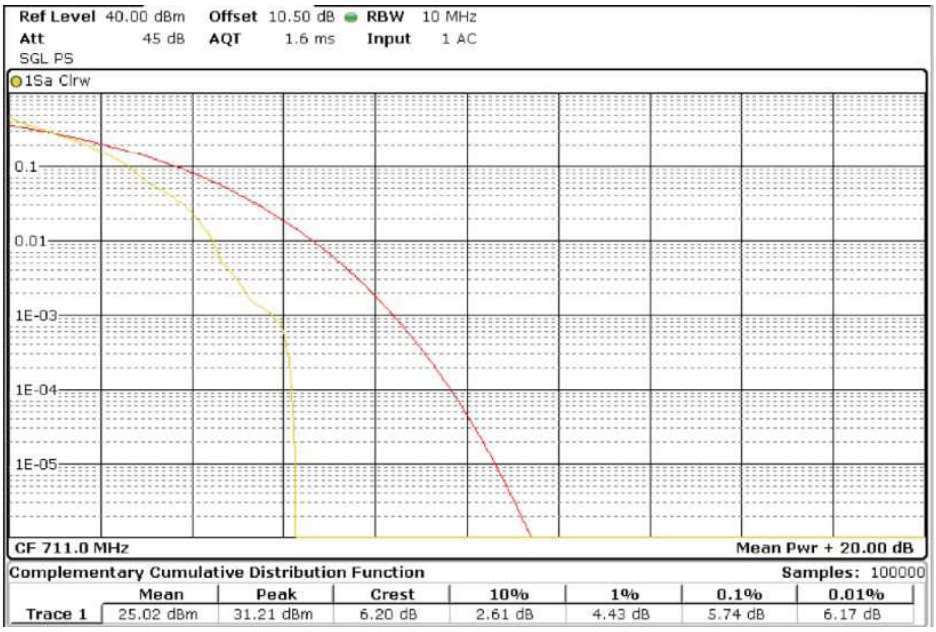

Bandwidth = 10 MHz. Modulation 16QAM. RB Size: 1. RB Offset: 0.
Lowest channel

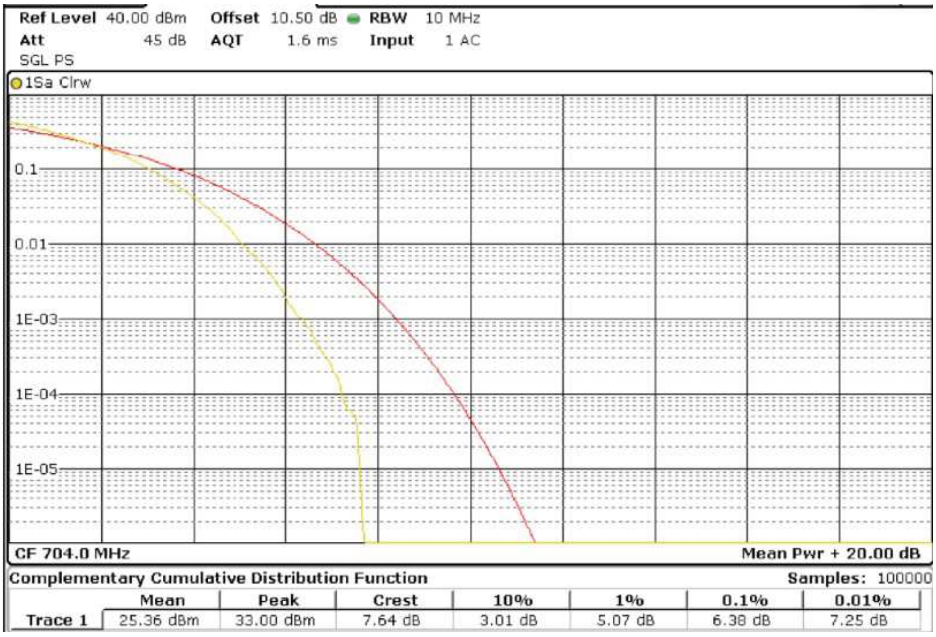

TEST RESULTS (Cont):	

Middle channel

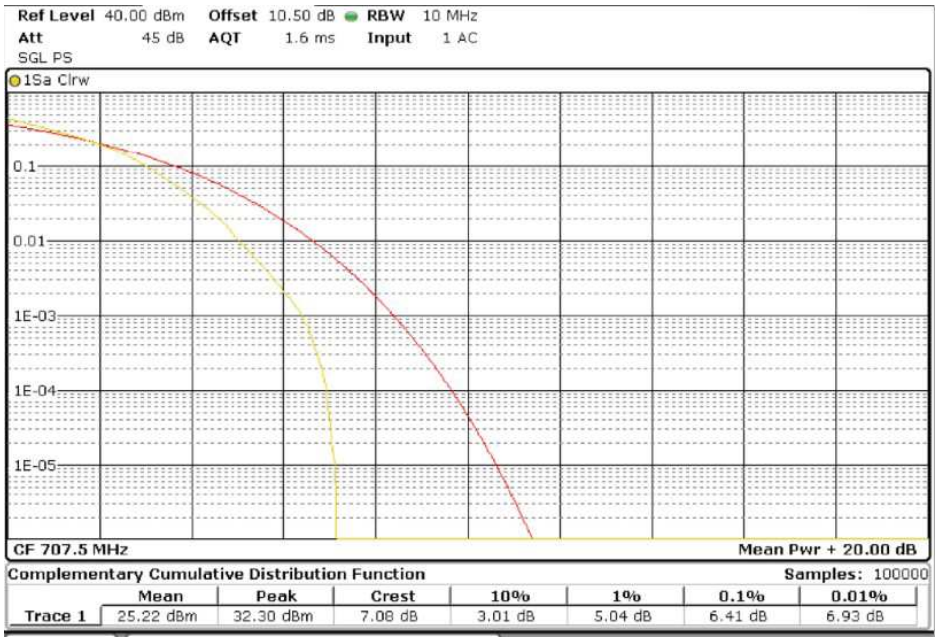

Highest channel

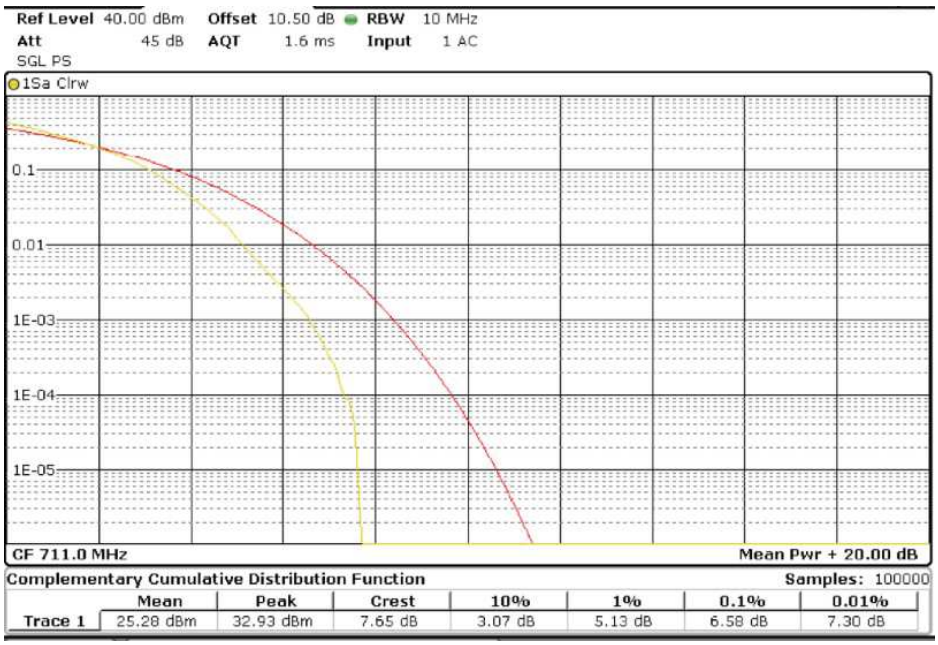

TEST A.2: MODULATION CHARACTERISTICS

LIMITS:	Product standard:	FCC Part 27 / IC RSS-130
	Test standard:	FCC §2.1047 and §27.50. RSS-130 Clause 4.2

LIMITS

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

TEST SETUP	

For LTE the EUT operates with QPSK and 16QAM modulation modes in which the information is digitized and coded into a bit stream. The RF transmission is multiplexed using Orthogonal Frequency Division Multiplexing (OFDM) using different possible arrangement of subcarriers (Resource Blocks RB).

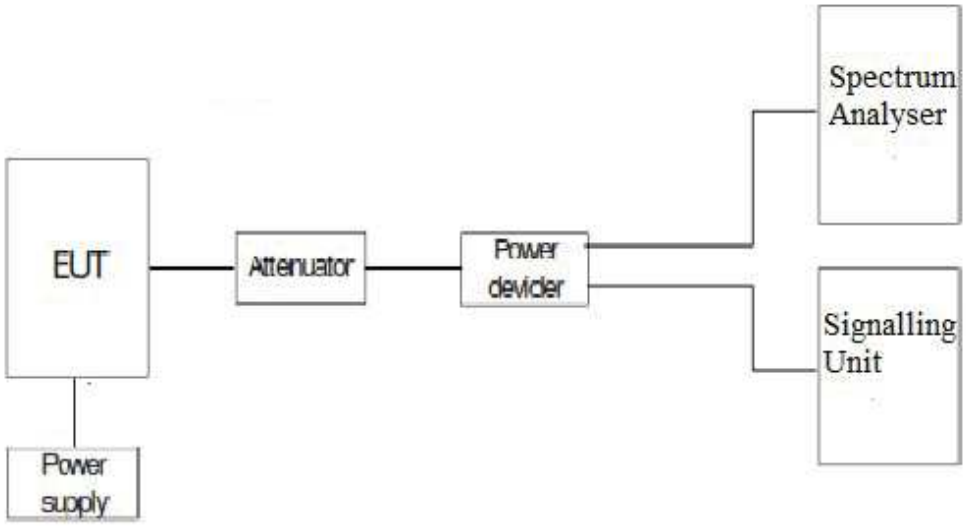

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

QPSK Modulation

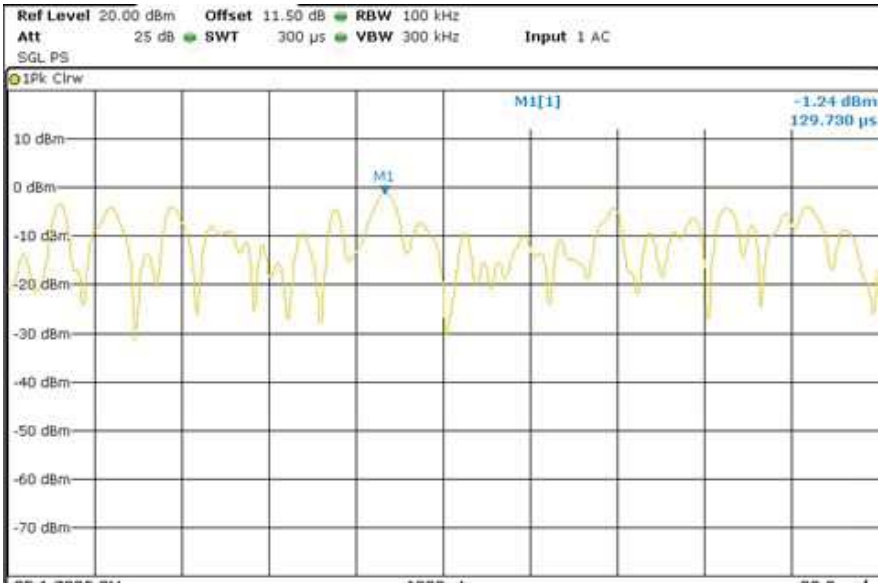

16QAM Modulation

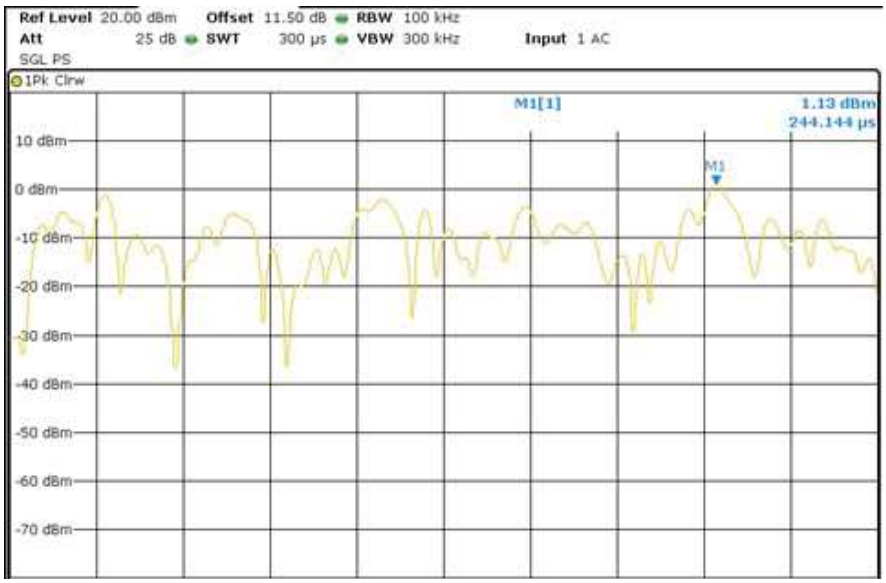

TEST A.3: FREQUENCY STABILITY

LIMITS:	Product standard:	FCC Part 27 / IC RSS-130
	Test standard:	FCC §2.1055 and § 27.54 /RSS-130 Clause 4.5

LIMITS

The frequency stability shall be enough to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST SETUP

The frequency tolerance measurements over temperature variations were made over the temperature range of

–30ºC to +50ºC. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10ºC steps from –30ºC up to +50ºC.

The supply voltage was varied between 85% and 115% of nominal voltage.

The EUT was set in “call mode” in the middle channel using the Universal Radio Communication tester R&S CMW500 and the maximum frequency error was measured using the built-in calibrated frequency meter.

For LTE mode the QPSK modulation was used for the test as it is the worst case for conducted power.

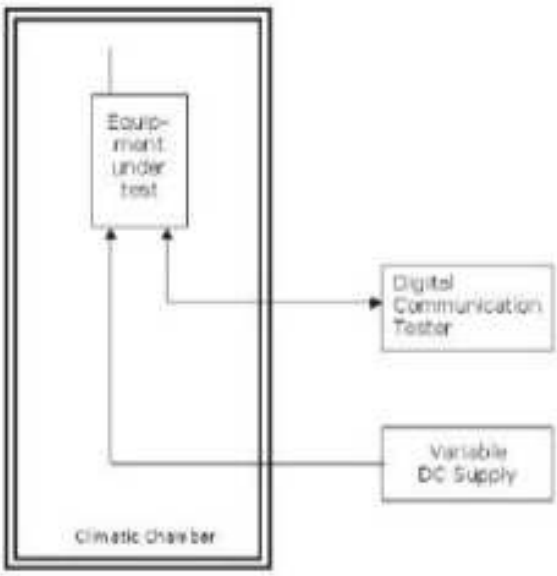

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

LTE QPSK MODULATION. BW = 5 MHz

Frequency stability over temperature variations

Temperature (ºC)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
50	-0.94	-0.0013	-0.00000013
40	-0.03	0.0000	0.00000000
30	1.27	0.0018	0.00000018
20	-1.97	-0.0028	-0.00000028
10	-0.92	-0.0013	-0.00000013
0	-1.86	-0.0026	-0.00000026
-10	-1.49	-0.0021	-0.00000021
-20	-2.17	-0.0031	-0.00000031
-30	-1.27	-0.0018	-0.00000018

Frequency stability over voltage variations

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	1.02	-0.0082	-0.00000082
Vmin	3.3	-3.09	-0.0110	-0.00000110

TEST A.4: OCCUPIED BANDWIDTH

LIMITS:	Product standard:	FCC Part 27 / IC RSS-130
	Test standard:	FCC § 2.1049 / RSS-130 Clause 4.5

LIMITS

Reference only.

TEST SETUP	

The occupied bandwidth measurement was performed at the output terminals of the EUT using an attenuator, power splitter and spectrum analyzer. The EUT was controlled via the Universal Radio Communication Tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyzer.

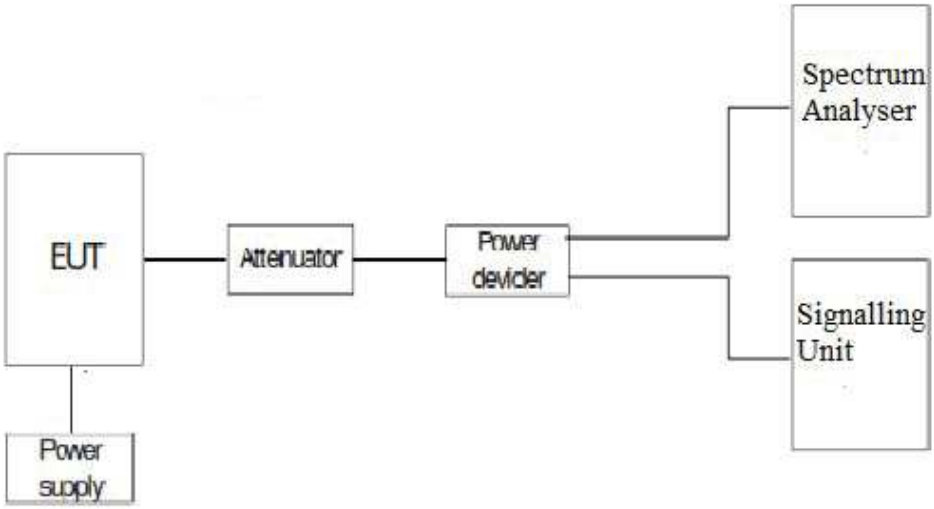

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

LTE QPSK MODULATION. BW = 1.4 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	1.14	1.13	1.13
-26 dBc bandwidth (MHz)	1.43	1.43	1.44

LTE 16QAM MODULATION. BW = 1.4 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	1.15	1.13	1.13
-26 dBc bandwidth (MHz)	1.45	1.41	1.45

LTE QPSK MODULATION. BW = 3 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	2.74	2.74	2.74
-26 dBc bandwidth (MHz)	3.18	3.21	3.16

LTE 16QAM MODULATION. BW = 3 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	2.74	2.74	2.74
-26 dBc bandwidth (MHz)	3.17	3.17	3.13

LTE QPSK MODULATION. BW = 5 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	4.76	4.79	4.56
-26 dBc bandwidth (MHz)	6.23	6.24	6.09

TEST RESULTS (Cont):	

LTE 16QAM MODULATION. BW = 5 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	4.75	4.78	4.56
-26 dBc bandwidth (MHz)	6.17	6.21	6.01

LTE QPSK MODULATION. BW = 10 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	9.46	9.60	9.10
-26 dBc bandwidth (MHz)	10.39	12.16	11.35

LTE 16QAM MODULATION. BW = 10 MHz

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (MHz)	6.74	7.52	6.06
-26 dBc bandwidth (MHz)	11.11	11.49	9.12

LTE QPSK MODULATION. BW = 1.4 MHz

Lowest Channel 99% Occupied Bandwidth

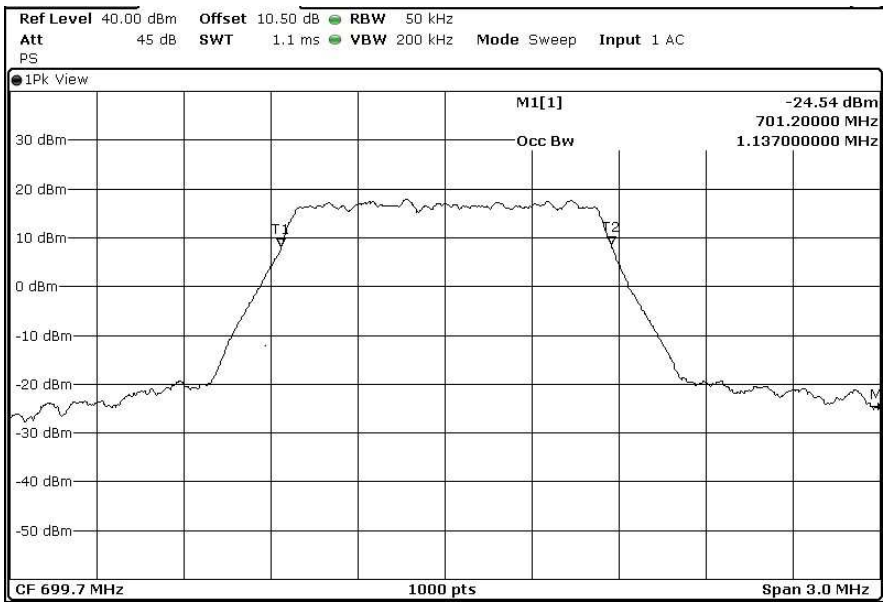

TEST RESULTS (Cont):	

Lowest Channel -26dBc Bandwidth kHz

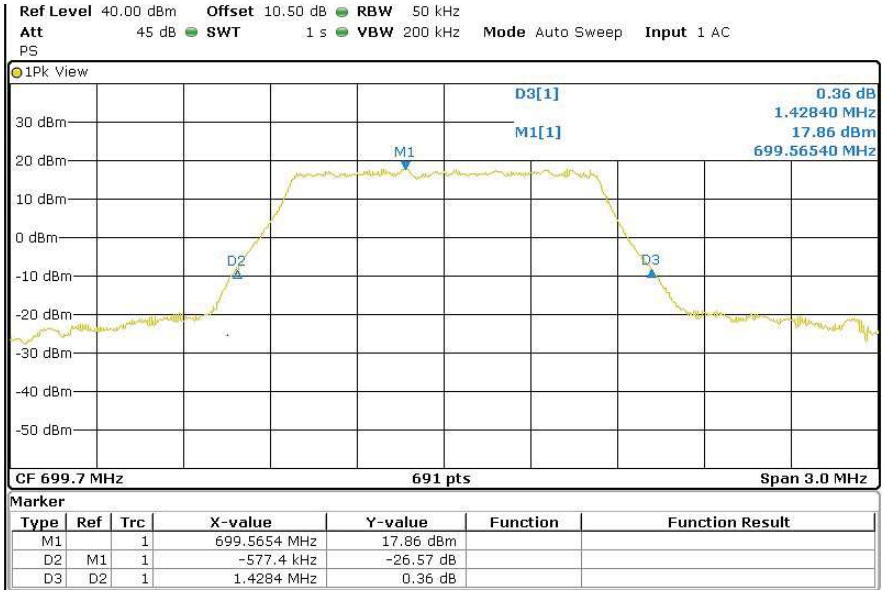

Middle Channel 99% Occupied Bandwidth

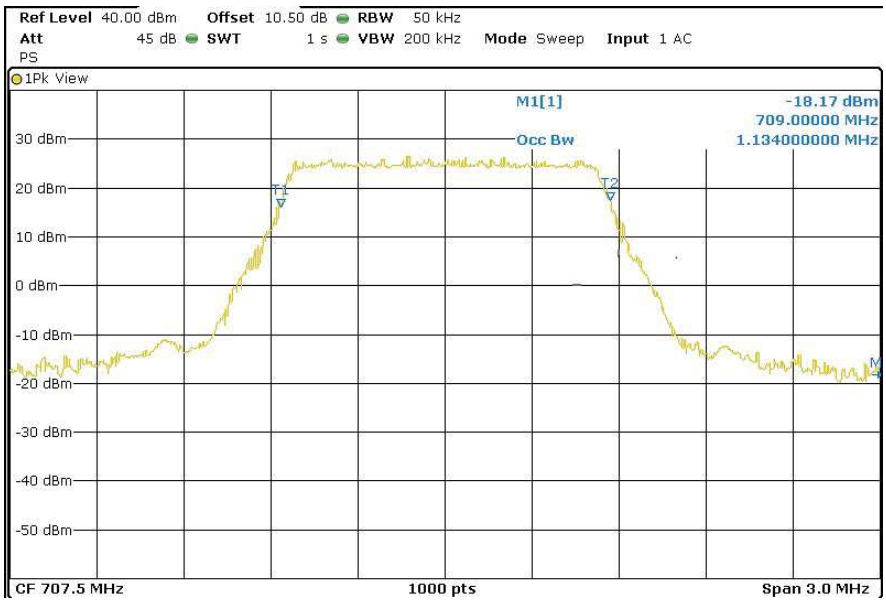

TEST RESULTS (Cont):	

Middle Channel -26dBc Bandwidth kHz

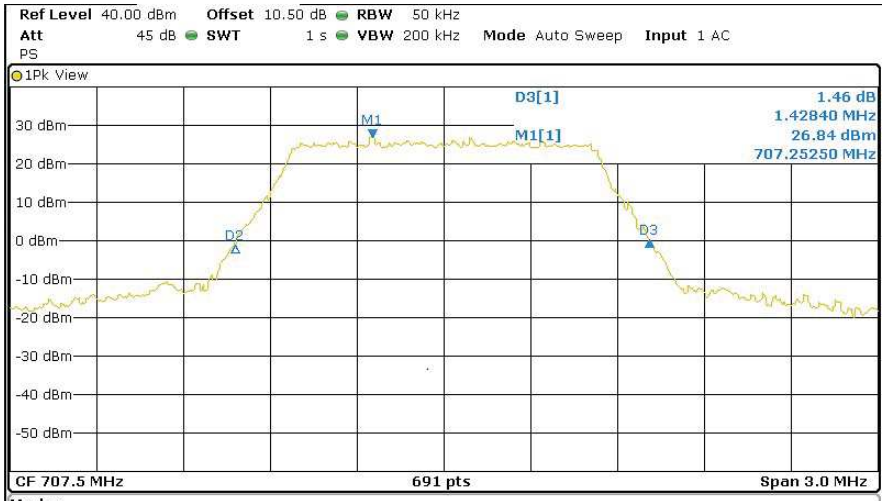

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	707.2525 MHz	26.84 dBm		
D2	M1	1	-473.2 kHz	-28.01 dB		
D3	D2	1	1.4284 MHz	1.46 dB		

Highest Channel 99% Occupied Bandwidth

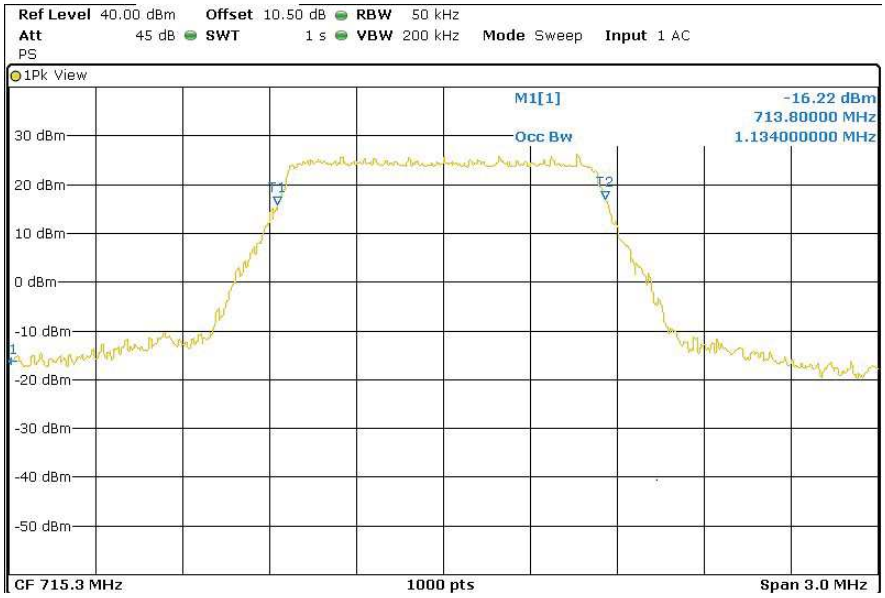

TEST RESULTS (Cont):	

Highest Channel -26dBc Bandwidth kHz

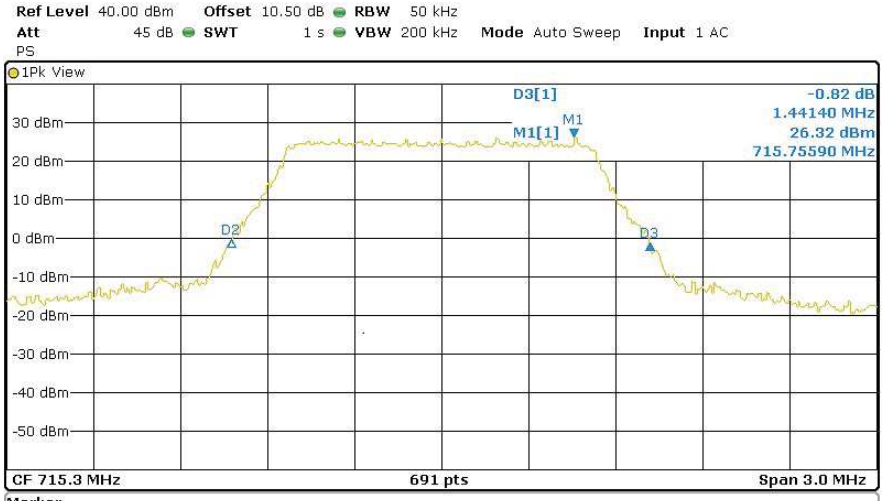

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	715.7559 MHz	26.32 dBm		
D2	M1	1	-1.1809 MHz	-26.70 dB		
D3	D2	1	1.4414 MHz	-0.82 dB		

LTE 16QAM MODULATION. BW = 1.4 MHz

Lowest Channel 99% Occupied Bandwidth

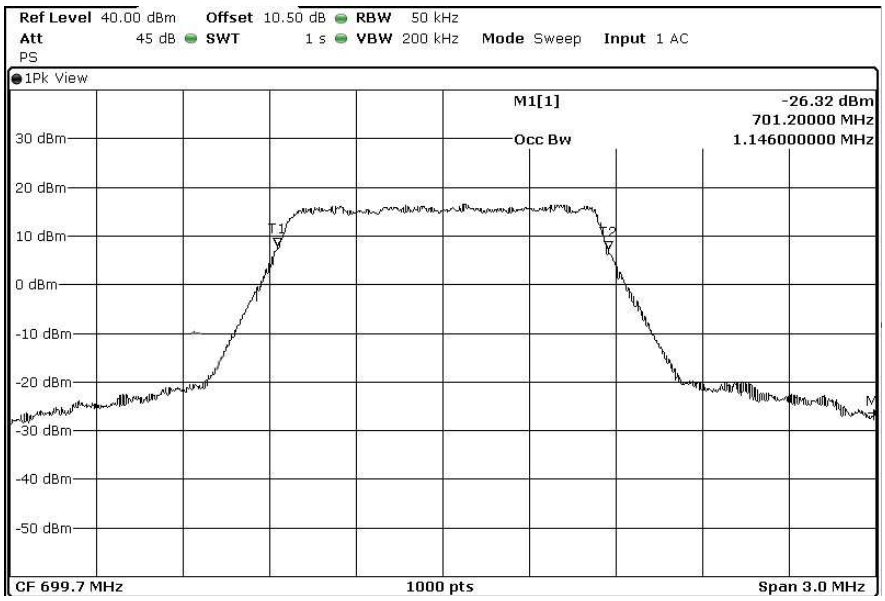

TEST RESULTS (Cont):	

Lowest Channel -26dBc Bandwidth kHz

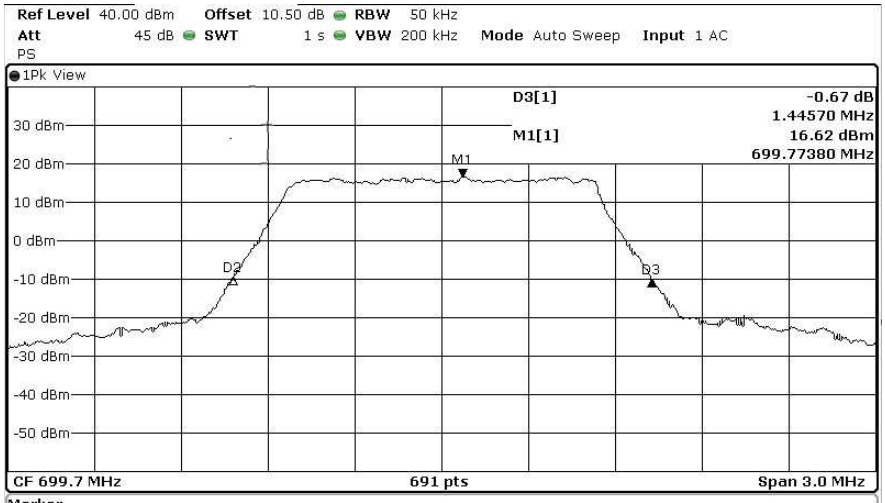

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	699.7738 MHz	16.62 dBm		
D2	M1	1	-794.5 kHz	-26.00 dB		
D3	D2	1	1.4457 MHz	-0.67 dB		

Middle Channel 99% Occupied Bandwidth

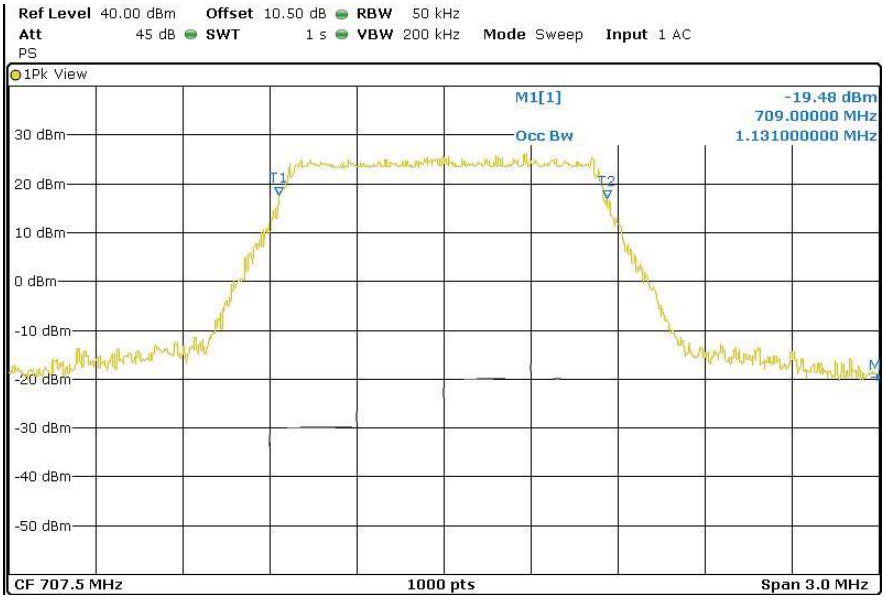

TEST RESULTS (Cont):	

Middle Channel -26dBc Bandwidth kHz

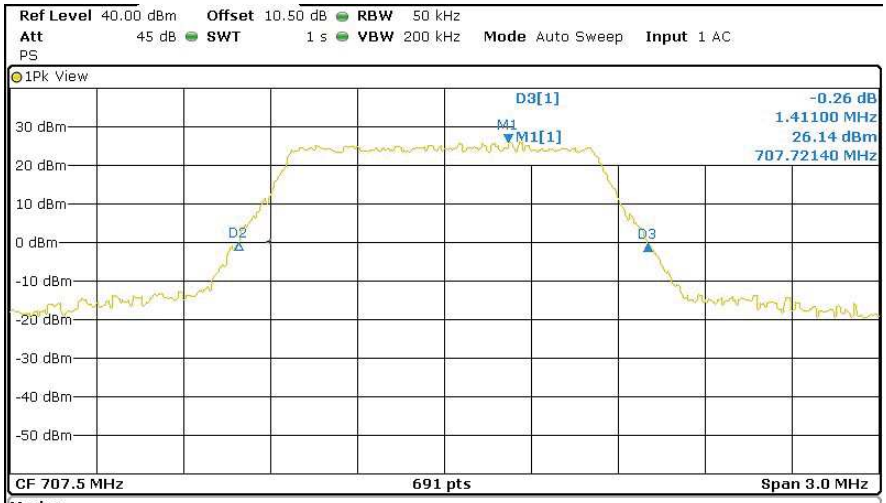

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	707.7214 MHz	26.14 dBm		
D2	M1	1	-929.1 kHz	-26.20 dB		
D3	D2	1	1.411 MHz	-0.26 dB		

Highest Channel 99% Occupied Bandwidth

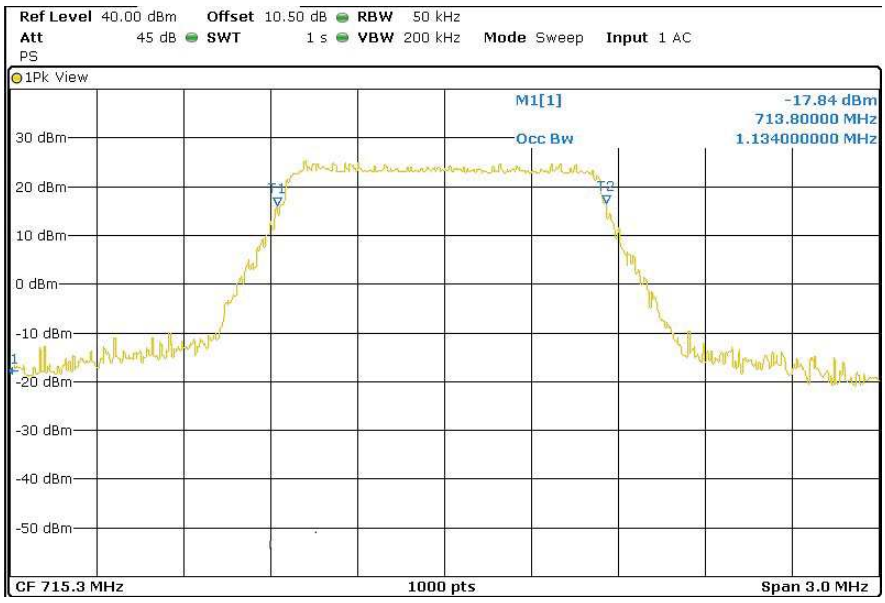

TEST RESULTS (Cont):	

Highest Channel -26dBc Bandwidth kHz

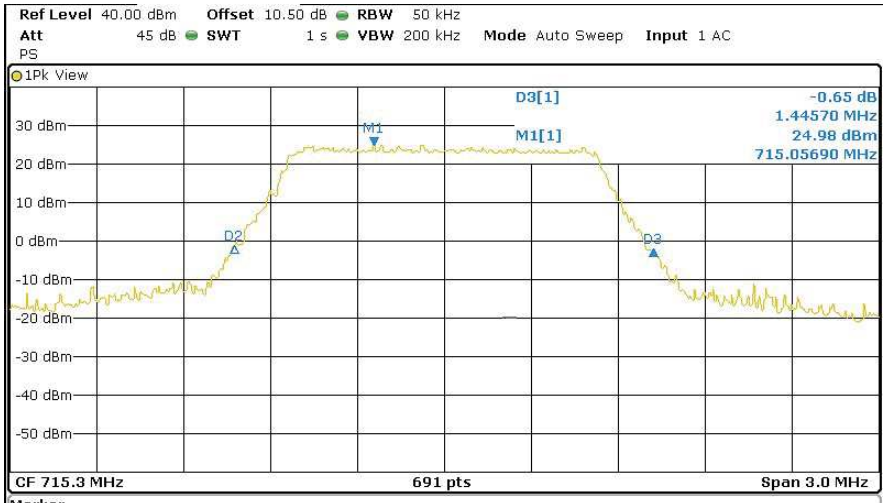

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	715.0569 MHz	24.98 dBm		
D2	M1	1	-481.9 kHz	-26.23 dB		
D3	D2	1	1.4457 MHz	-0.65 dB		

LTE QPSK MODULATION. BW = 3 MHz
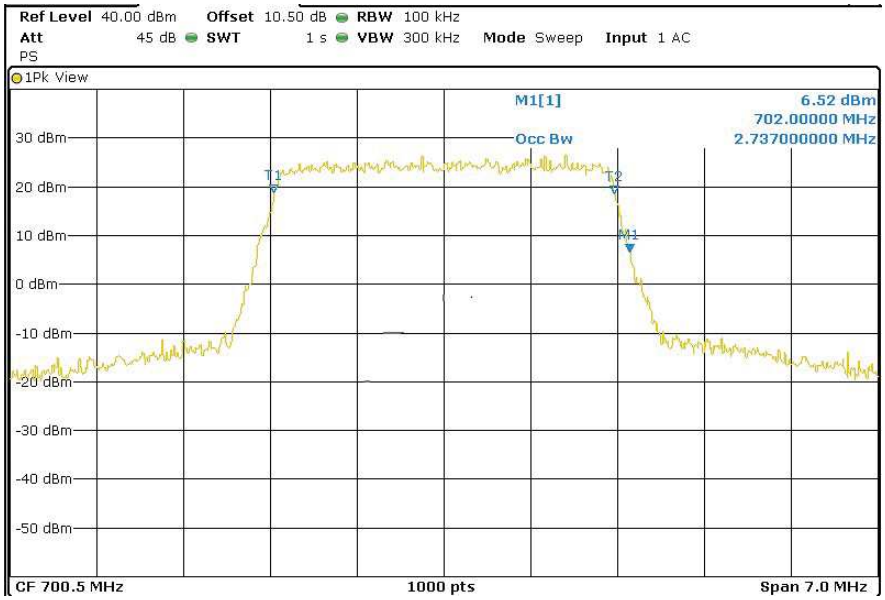
Lowest Channel 99% Occupied Bandwidth