

3Dconnexion

SpaceMouse Pro Wireless

Main Model: 3DX-700049

Serial Model: N/A

June 18, 2014

Report No.: 14070248-FCC-H2

(This report supersedes NONE)



Modifications made to the product : None


This Test Report is Issued Under the Authority of:

		
Herith Shi Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

MPE Calculation Report
To:FCC 2.1093

SIEMIC, INC.
Accessing global markets

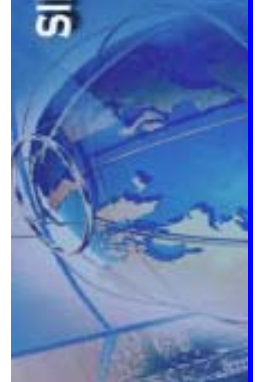

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).


SIEMIC (Shenzhen-China) Laboratories Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety

This page has been left blank intentionally.

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
2	TECHNICAL DETAILS.....	6
3	FCC §2.1093 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)	7

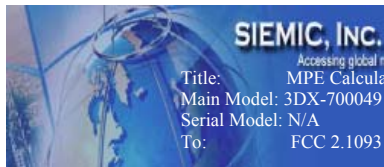

Title: MPE Calculation Report for SpaceMouse Pro Wireless
Main Model: 3DX-700049
Serial Model: N/A
To: FCC 2.1093

Report No.: 14070248-FCC-H2
Issue Date: June 18, 2014
Page: 5 of 8
www.siemie.com

1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programmers was to demonstrate compliance of the 3Dconnexion, SpaceMouse Pro Wireless and Model: 3DX-700049 against the current Stipulated Standards. The SpaceMouse Pro Wireless has demonstrated compliance with the FCC 2.1093.

EUT Information

EUT Description : SpaceMouse Pro Wireless

Main Model : 3DX-700049

Serial Model : N/A

Antenna Gain : -2.36 dBi

Classification Per Stipulated Test Standard : Class B Emission Product Per FCC 2.1093

2 TECHNICAL DETAILS

Purpose	Compliance testing of SpaceMouse Pro Wireless with stipulated standards
Applicant / Client	3Dconnexion 5 Ave. des Citronniers, Monaco
Manufacturer	Xiamen Intretech Inc No. 588, Jiahe road, Xiamen, Fujian, China
Laboratory performing the tests	SIEMIC (Shenzhen-China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-0755-2601 4629 / 2601 4953 Fax: +86-0755-2601 4953-810 Email: China@siemic.com.cn
Test report reference number	14070248-FCC-H2
Date EUT received	June 03, 2014
Standard applied	FCC 2.1093
Dates of test (from – to)	June 18, 2014
No of Units	#1
Equipment Category	DXX
Trade Name	3Dconnexion
RF Operating Frequency (ies)	2404-2477 MHz
Number of Channels	5
Modulation	GFSK
FCC ID	2AAHQ-SMPW

3 FCC §2.1093 - Maximum Permissible exposure (MPE)

3.1 Applicable Standard

According to §15.249 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

According to KDB 447498 D01v05r01

1. Extremity exposure conditions

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Test Exclusion Thresholds should be applied to determine SAR test requirements.

2. Standalone SAR test exclusion considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≥ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \sqrt{f_{(\text{GHz})}} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR,}$$

where

f (GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz

At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB 447498 D01 v05r01

[Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz

[Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

3.2 Test Data

Predication of MPE limit at a given distance

One antenna is available for the EUT (FHSS product).The minimum separation distances is 5 mm.
The maximum average output power(turn-up power) in low channel of product is -4.746 dBm=0.335 mW

The calculation results= $0.335/5 * \sqrt{2.404}=0.104<7.5$

The maximum average output power(turn-up power) in middle channel of product is -3.991dBm=0.399 mW

The calculation results= $0.399/5 * \sqrt{2.442}=0.125<7.5$

The maximum average output power(turn-up power) in high channel of product is -3.607dBm=0.436 mW

The calculation results= $0.436/5 * \sqrt{2.477}=0.137<7.5$

According to KDB 447498, no stand-alone required for FHSS product,

Result: Pass