



Antenna Specifications

CUSTOMER		Gold product	
CS P/N		<u>R36-13Z466-00</u>	
MATERIAL CODE		<u>PEX/2.4G/5.8G/L=1000mm-WiFi</u>	
JS P/N		<u>166-012-1A</u>	
Checked by(RF)	Checked by(ME)	Checked by(QA)	Approval led by
Customer Approval			

Shenzhen Jingsong Technology Co., Ltd.

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118
Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434

1. General Description

This document provides the antenna specifications on electric, mechanic and reliability. The testing conditions and related pictures are also included.

1.1 Print Acceptance

Samples and Antenna Specifications are to be sent to customer. When they are approved, the approval form should be completed, signed, and sent back to JINGSONG before further mass production batches can be delivered.

1.2 Coordinate System

The coordinate system for the phone is defined as follows:

- Origin in center of gravity.
- Positive X axis is perpendicular to, and directed from, front plane.
- Positive Y axis is perpendicular to, and directed from, right side plane (as seen from front).
- Positive Z axis is perpendicular to, and directed from, top plane.

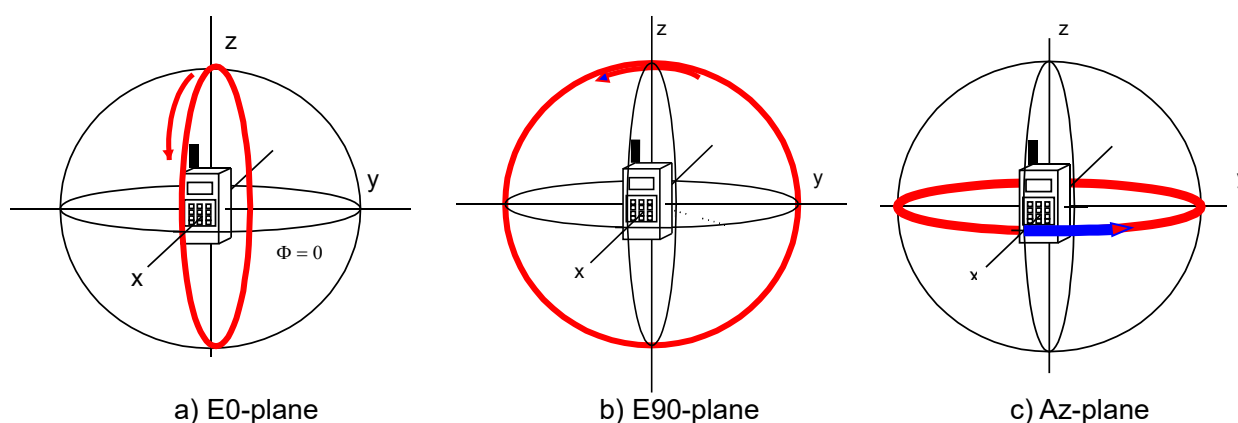


Figure 1-1 The coordinate system for the phone

Shenzhen Jingsong Technology Co., Ltd.

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118
Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434



Antenna Specifications

Shenzhen JINGSONG Technology Co., LTD

2. Specifications

This report mainly provides the testing conditions of various electric and structural performance parameters for cell antenna ---- 2.4G/5.8G-WiFi. Figure 2-1 shows the antenna designed by JS & The fixturing of 2.4G-5.8G-WiFi

2-1: Specification

Sample Photo	
A.Electrical Characteristics	
Frequency	2400~ 2480/5100~ 58200MHz
V.S.W.R.	≤ 1.5 @2400~ 2480MHz/5100~ 5800MHz
Peak Gain	2400 ~ 2480MHz; 2.5dBi $\pm$ 0.5dBi 5100 ~ 5800MHz; 3.5dBi $\pm$ 0.5dBi
Polarization	Linear
Impedance	50 Ohm
B.Material & Mechanical Characteristics	
Material of Radiator	Carbon Steel
Material of Plastic	ABS
Cable Type	RF1.13
Connector Type	IPEX Male
Connector Pull Test	> - 3 Kgf
C.Environmental	
Operation Temperature	- 30 °C ~ + 85 °C
Storage Temperature	- 30 °C ~ + 85 °C

Shenzhen Jingsong Technology Co., Ltd.



• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118
Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434

3. WiFi antenna test data

Wifi:2.4G efficiency / gain

Fre. (Mhz)	Efficiency(%)	Gain(dBi)
2400	55.4	2.28
2410	54.3	2.62
2420	53.8	2.51
2430	54.8	2.35
2440	53.4	2.85
2450	55.1	2.24
2460	54.5	2.54
2470	55.4	2.65
2480	54.6	2.25

3.1 2.4G Apple chart

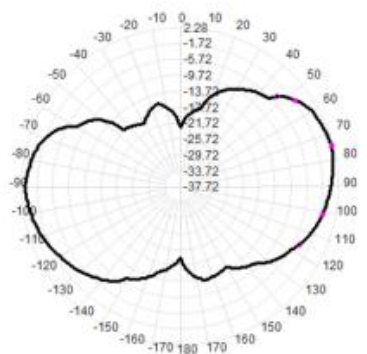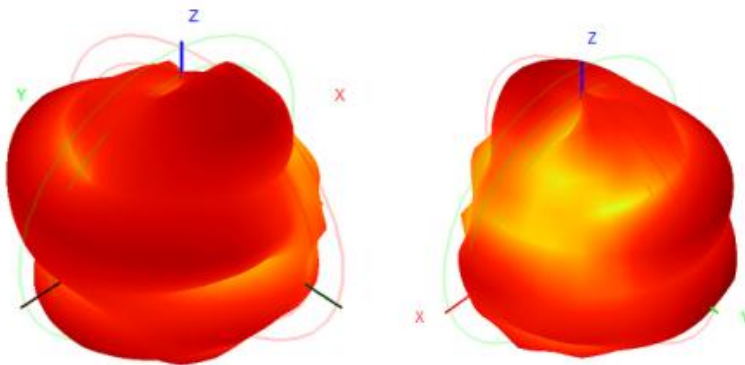


Shenzhen Jingsong Technology Co., Ltd.

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118 Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434

3.3Wifi:5.48 efficiency / gain

WIFI Test Data:		
WIFI: 5G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
5150	57.4	2.11
5200	56.5	2.65
5250	58.6	2.35
5300	57.2	2.25
5350	58.6	2.15
5400	57.2	2.36
5450	60.5	2.25
5500	57.8	2.65
5550	58.7	2.87
5600	58.6	2.45
5650	58.5	2.18
5700	56.5	3.51
5750	54.4	2.25
5800	58.5	2.36
5850	57.6	3.25


3.4 5.8G Apple chart

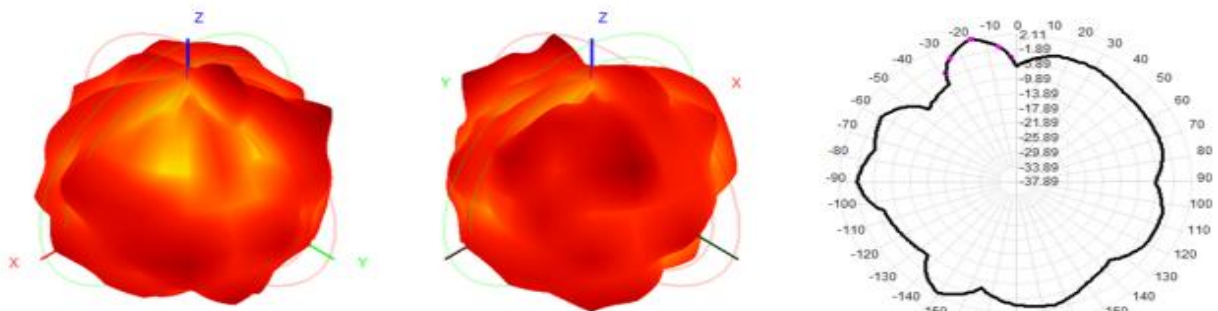

Shenzhen Jingsong Technology Co., Ltd.

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118 Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434

4.1 SWR

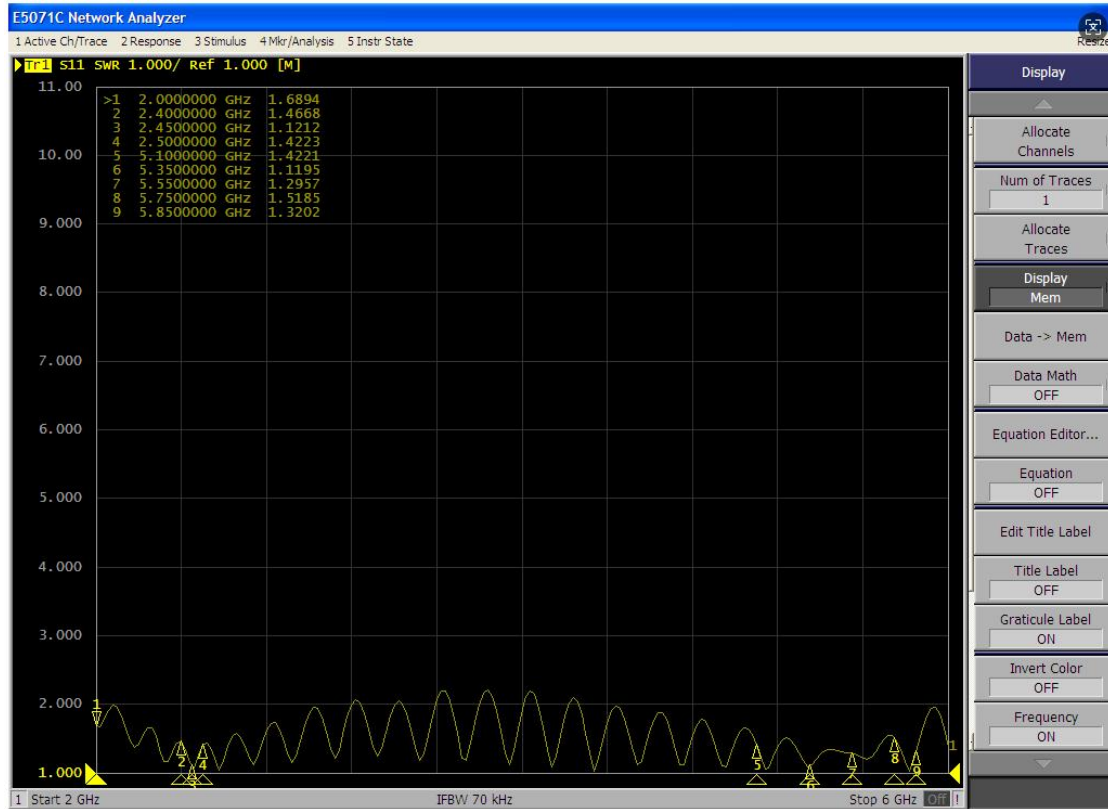

5.1 Antenna Assembly Drawing



Shenzhen Jingsong Technology Co., Ltd.

- Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118 Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)

Tel: 23744434 Fax: 23744434



Material description		LOSON		Shenzhen Jingsong Technology Co., LTD	
①	Coxial line $\phi 1.13$ (black)	Machine type	1000 dual copper tube antenna	Date	2025/09/26
②	Brass pipe	Product	2.4G copper tube antenna	Design	MD
③		Material	106-012-1A	Material	BR
④		Material	Weld surface	Unit	mm
		Material	Heat shrink tubing	Property	FTT
		Material	Heat shrink tubing	Version	V1.0

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118 Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434



Antenna Specifications

Shenzhen JINGSONG Technology Co., LTD

7. Environmental Characteristic

Test Item	Test description
1. Low Temperature	Temp.: -20 °C Time: 24 hours
2. High Temperature	Temp.: 80°C Time: 24 hours
3. Salt Fog	5±0.1% Nad salt fog PH Value: 6.5-7.2 Temp: 35±1°C Time:24 hours

Shenzhen Jingsong Technology Co., Ltd.

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118
Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434



Antenna Specifications

Shenzhen JINGSONG Technology Co., LTD

8.Characteristics and Reliability Test

Test Items 測試項目	Test Condition and Procedure 測試方法	Requirements 要求	Result 結果
C1 V.S.W.R. 電壓駐波比	Set DUT on Network Analyzer; make individual calibration to test 設置網路分析儀參數進行測試	Directive specification DUT 符合待測物規範	PASS
C3 Antenna Gain 天線增益	Set DUT on Antenna Chamber; make individual calibration to test 設置天線暗室參數進行測試	Directive specification DUT 符合待測物規範	PASS
M1 Vibration 震動	GB / T2423.48-2008 Amplitude: 0.03 inch (1.5mm); Freq: 20 to 80 to 20 Hz 3 directions; 2 hours for each direction 振幅 1.5mm; 頻率 20~80~20Hz; 3 個方向各 2H	1. No Visual Damage 2. Frequency Tol. ≤5% 無明顯外觀不良 ; 頻率偏移 ≤5%	PASS
M4 Pull Test 拉力	Holding with individual specification; force applied to axis of Connector .單獨定義產品端子拉力	1. Directive specification DUT 2. Frequency Tol. ≤5% 符合待測物規範 ; 頻率偏移 ≤5%	PASS
M5 Magnetic force 磁力	The separate definition of retention product magnetic surface magnets and adsorption on the iron 單獨定義產品磁鐵表面磁力及吸附鐵板上 保持力	1. Directive specification DUT 2. Frequency Tol. ≤5% 符合待測物規範 ; 頻率偏移 ≤5%	PASS
M6 Sway test 搖擺測試	Holding with individual specification; the swing joint and wire, wire and plastic body test. 單獨定義接頭與線材、線材與塑膠本體的搖擺測試 .	1. Directive specification DUT 2. Frequency Tol. ≤5% 符合待測物規範 ; 頻率偏移 ≤5%	PASS
M7 Dimension 尺寸	Inspection of dimension, color, material, package, surface process. 檢查尺寸 , 顏色, 材料, 包裝, 表面處理	Directive specification DUT 符合待測物規範	PASS
E2 Salt Spray 鹽霧	GB / T 2423.17-2008 Temp: 35°C; RH: ≥ 95%; NaCl solution: ≥ 5%; Time: 24H 溫度 35°C; 濕度 ≥95%; 鹽水濃度 ≥5% ; 測試 24H	1. No Visual Damage 2. Frequency Tol. ≤5% 無明顯外觀不良 ; 頻率偏移 ≤5%	PASS
E3 Temperature and Humidity Chamber 恒溫恒濕	GB / T 2423.3-2006 Temp: 80°C / 12 H; -40°C / 12H RH: ≥ 90%; Time: 24H 溫度 80°C 測試 12H 轉 -40°C 測試 12H; 濕度 ≥ 90% ; 時間 24H	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol. ≤5% 恢復 2H 后, 無明顯外觀不良 ; 頻率偏移 ≤5%	PASS
E4 Thermal Shock 冷熱衝擊	GB / T 2423.22 - 2008 - 40°C (30 minutes) to + 80°C (30 minutes); Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol. ≤5%	PASS

Shenzhen Jingsong Technology Co., Ltd.

• Address: Area B, 3rd Floor, Building 1, Weijie Science and Technology Park, No. 118 Huaning Road, Dalang Street, Longhua District, Shenzhen City (near the elevator)
Tel: 23744434 Fax: 23744434