



### Features

- Single band IEEE 802.11 b/g/n standard
- On-board mount or case mounting
- High efficiency
- Quick integration


### Specification(Preliminary)

| Frequency (GHz)     | 2.4 -2.5(Ant1)    | 2.4 -2.5(Ant2) |
|---------------------|-------------------|----------------|
| Peak Gain (dBi)     | 3.0               | 3.0            |
| VSWR                | 2.0 : 1           |                |
| Isolation (dB)      | -15               |                |
| Impedance (Ohms)    | 50                |                |
| Max. Power (Watts)  | 1                 |                |
| Weight (g)          | 2.4               |                |
| Connector           | IPEX              |                |
| Cable length (mm)   | L                 |                |
| Dimension (mm)      | 54.4 x 39.3 x 0.6 |                |
| Operating Temp (°C) | -20°C ~ +65°C     |                |


### Mechanical Dimensions

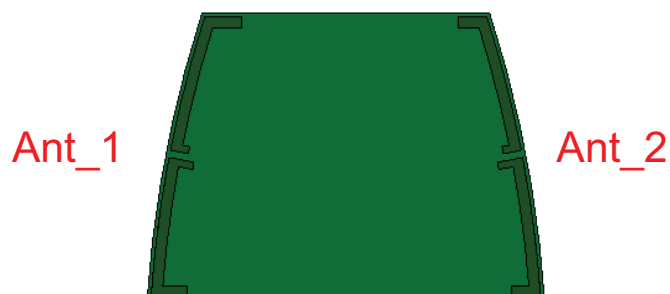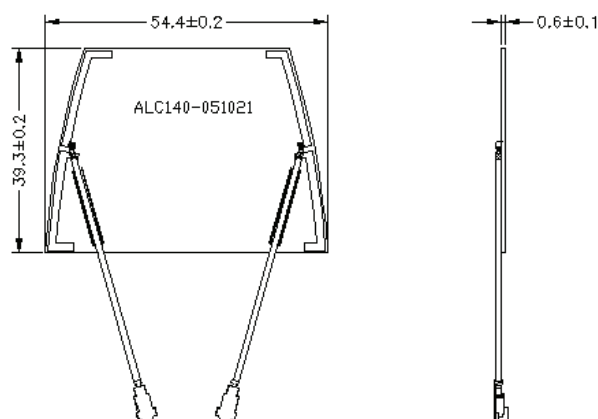

Gain pattern

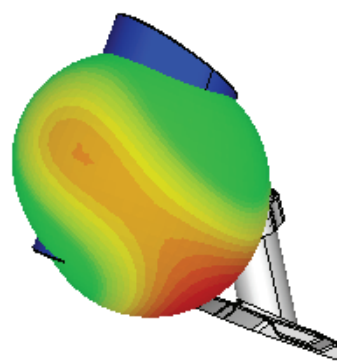

Ant1

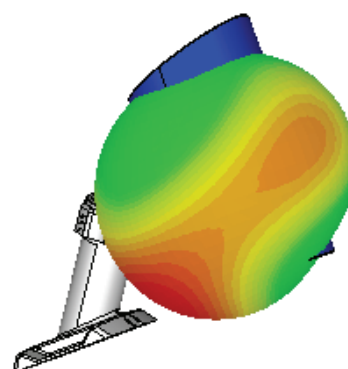

Ant2