



Compliance Certification Services Inc.

Report No: C150113S01-SF

FCC ID: 2AALKM611T

Date of Issue :January 19, 2015

GSM 850-Right Head Cheek Middle CH190	2
GSM 850-Right Head Tilted Middle CH190	3
GSM 850-Left Head Cheek Middle CH190	4
GSM 850-Left Head Tilted Middle CH190	5
PCS 1900-Right Head Cheek High CH810	6
PCS 1900-Right Head Tilted High CH810	7
PCS 1900-Left Head Cheek High CH810	8
PCS 1900-Left Head Tilted High CH810	9
WCDMA Band II-Right Head Cheek Middle CH9400	10
WCDMA Band II-Right Head Tilted Middle CH9400	11
WCDMA Band II-Left Head Cheek Middle CH9400	12
WCDMA Band II-Left Head Tilted Middle CH9400	13
WCDMA Band V-Right Head Cheek High CH4233	14
WCDMA Band V-Right Head Tilted High CH4233	15
WCDMA Band V-Left Head Cheek High CH4233	16
WCDMA Band V-Left Head Tilted High CH4233	17
GPRS 850-Body Front Middle CH190	18
GPRS 850-Body Rear Middle CH190	19
GPRS 850-Body Right Middle CH190	20
GPRS 850-Body Left Middle CH190	21
GPRS 850-Body Bottom Middle CH190	22
GPRS 1900-Body Front High CH810	23
GPRS 1900-Body Rear High CH810	24
GPRS 1900-Body Right High CH810	25
GPRS 1900-Body Left High CH810	26
GPRS 1900-Body Bottom High CH810	27
WCDMA Band II-Body Front Middle CH9400	28
WCDMA Band II-Body Rear Middle CH9400	29
WCDMA Band II-Body Right Middle CH9400	30
WCDMA Band II-Body Left Middle CH9400	31
WCDMA Band II-Body Bottom Middle CH9400	32
WCDMA Band V-Body Front High CH4233	33
WCDMA Band V-Body Rear High CH4233	34
WCDMA Band V-Body Right High CH4233	35
WCDMA Band V-Body Left High CH4233	36
WCDMA Band V-Body Bottom High CH4233	37



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

GSM 850-Right Head Cheek Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.816$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Right Head Cheek Middle CH190/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.216 W/kg


GSM 850/Right Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.856 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.145 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.217 W/kg

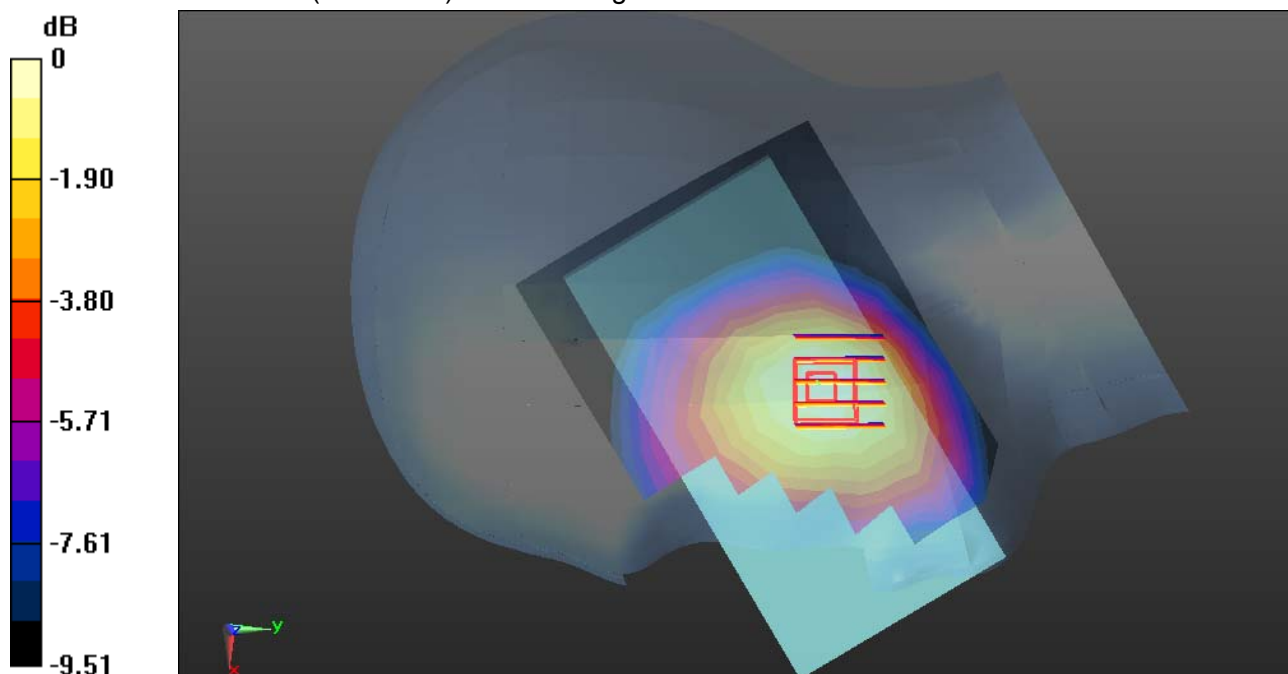

0 dB = 0.217 W/kg = -6.64 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

GSM 850-Right Head Tilted Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.816$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Right Head Tilted Middle CH190/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.103 W/kg


GSM 850/Right Head Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.330 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.073 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.104 W/kg

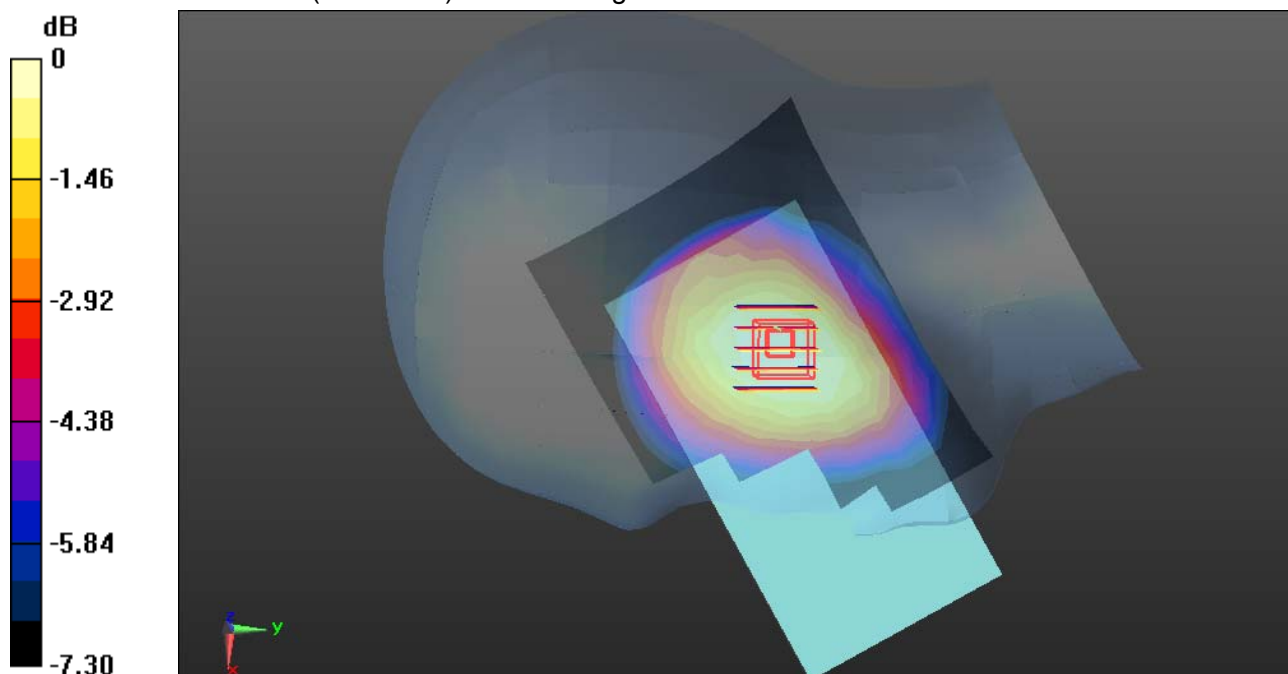

0 dB = 0.104 W/kg = -9.83 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

GSM 850-Left Head Cheek Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.816$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Left Head Cheek Middle CH190/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.169 W/kg


GSM 850/Left Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.665 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.119 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.174 W/kg

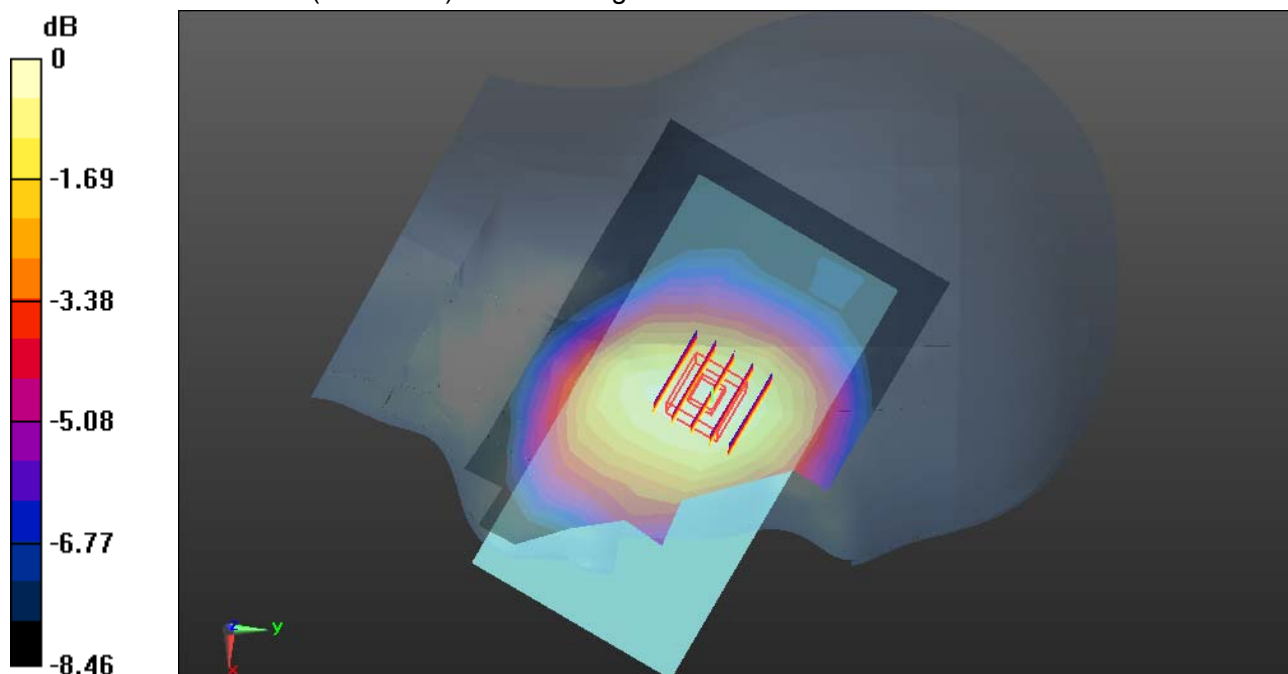

0 dB = 0.174 W/kg = -7.59 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

GSM 850-Left Head Tilted Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.816$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Left Head Tilted Middle CH190/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.106 W/kg


GSM 850/Left Head Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.773 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.078 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.113 W/kg

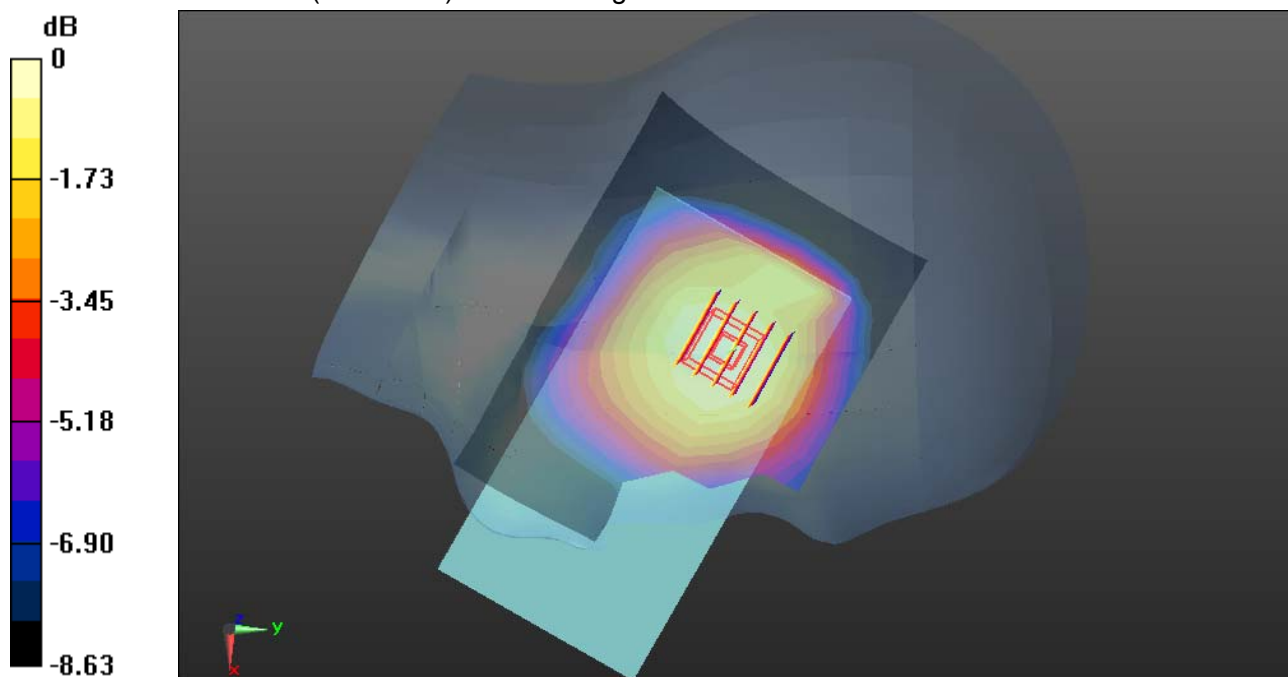

0 dB = 0.113 W/kg = -9.47 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

PCS 1900-Right Head Cheek High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 38.892$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Right Head Cheek High CH810/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0591 W/kg


PCS 1900/Right Head Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.714 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0611 W/kg

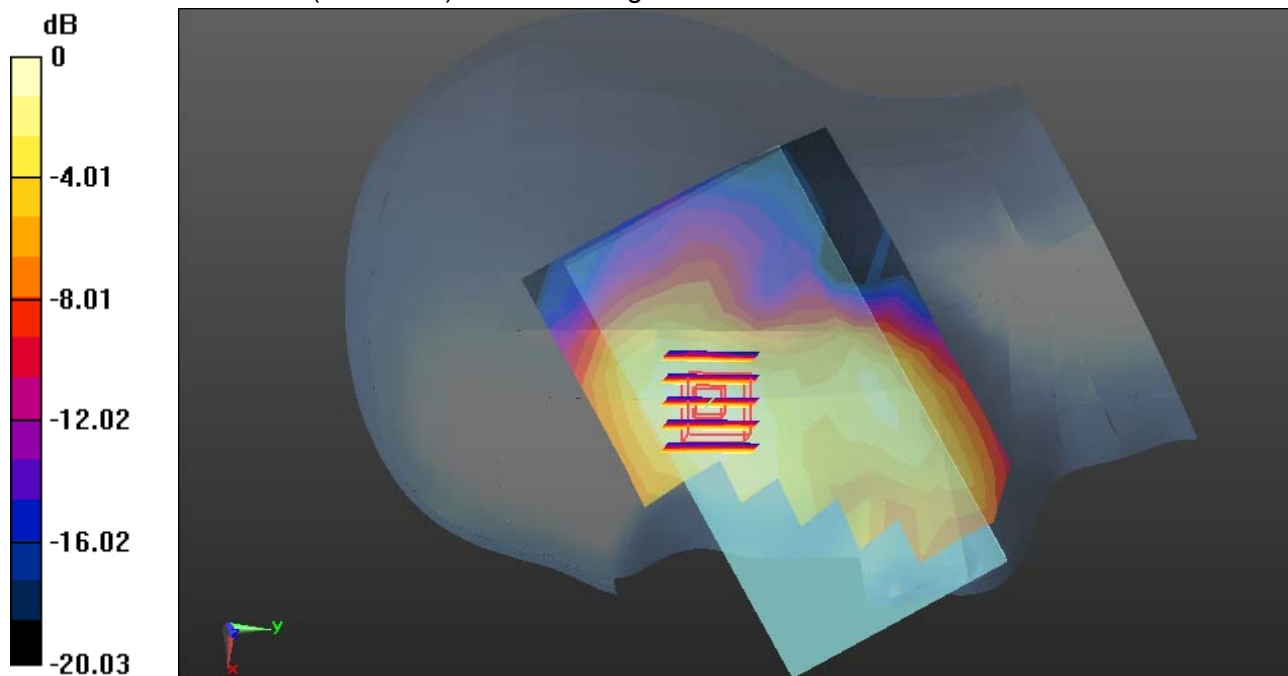

0 dB = 0.0611 W/kg = -12.14 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

PCS 1900-Right Head Tilted High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 38.892$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Right Head Tilted High CH810/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0336 W/kg


PCS 1900/Right Head Tilted High CH810/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.479 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0389 W/kg

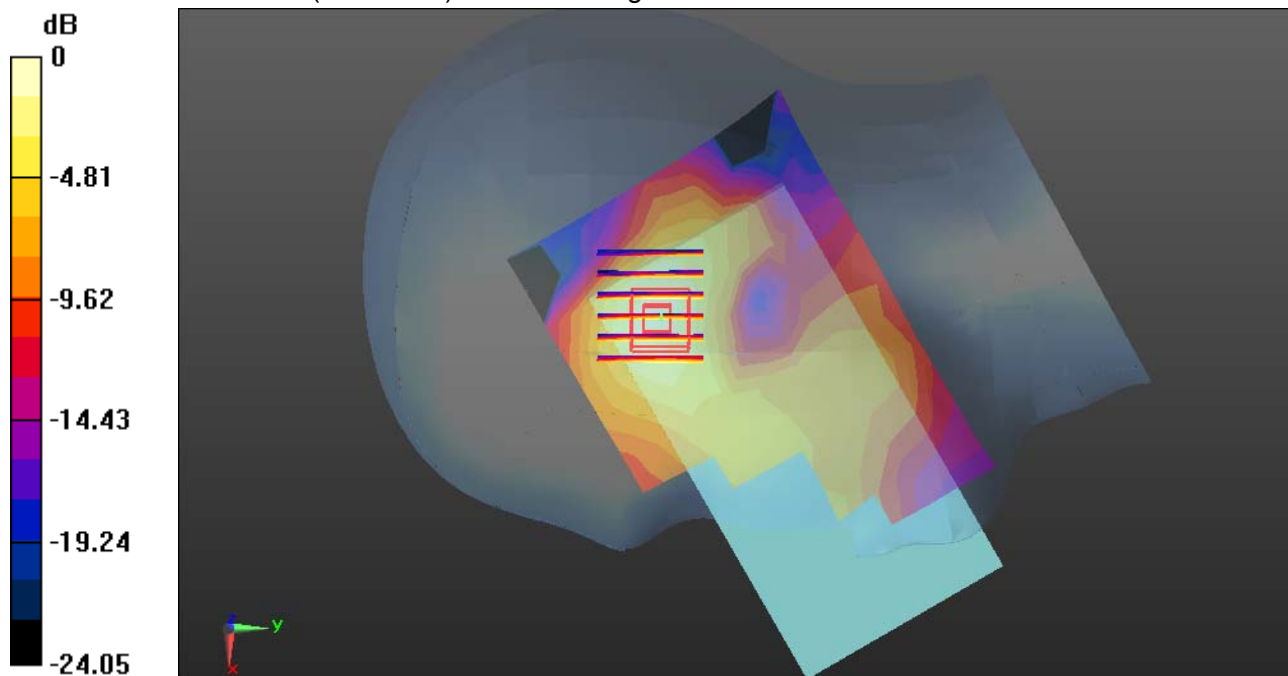

0 dB = 0.0389 W/kg = -14.10 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

PCS 1900-Left Head Cheek High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 38.892$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Left Head Cheek High CH810/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


PCS 1900/Left Head Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.264 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

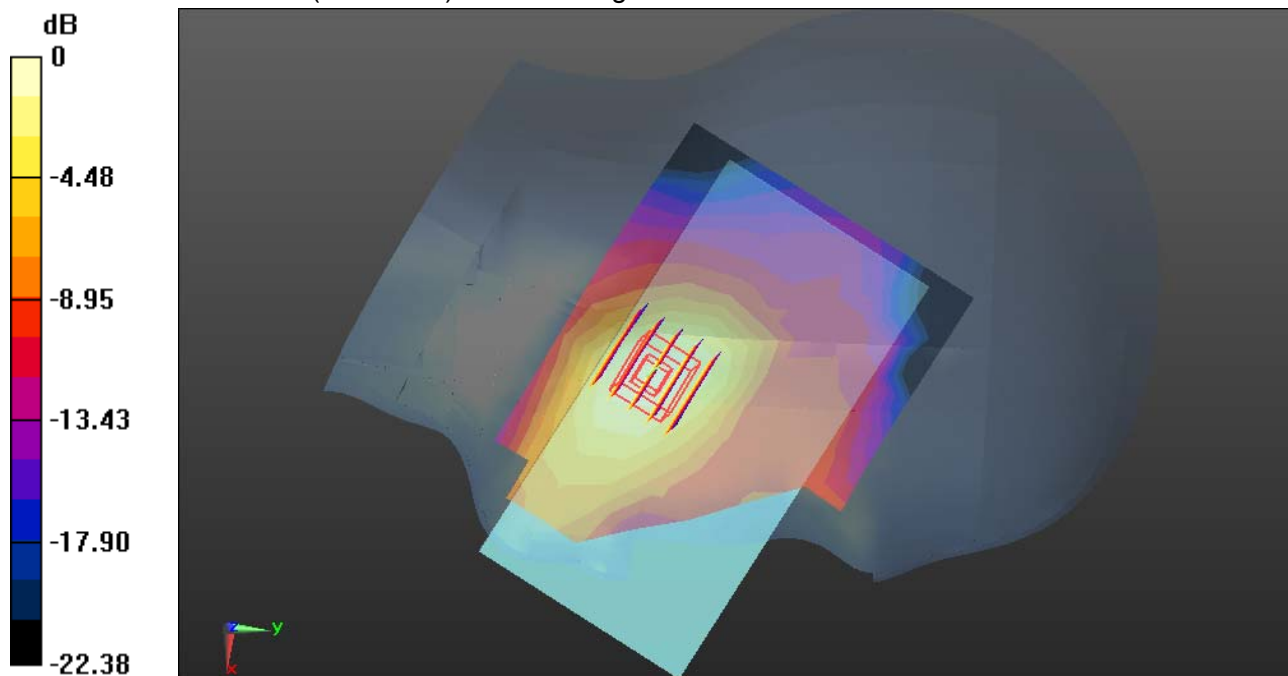

0 dB = 0.123 W/kg = -9.10 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

PCS 1900-Left Head Tilted High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 38.892$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


PCS 1900/Left Head Tilted High CH810/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0324 W/kg**PCS 1900/Left Head Tilted High CH810/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.479 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0319 W/kg

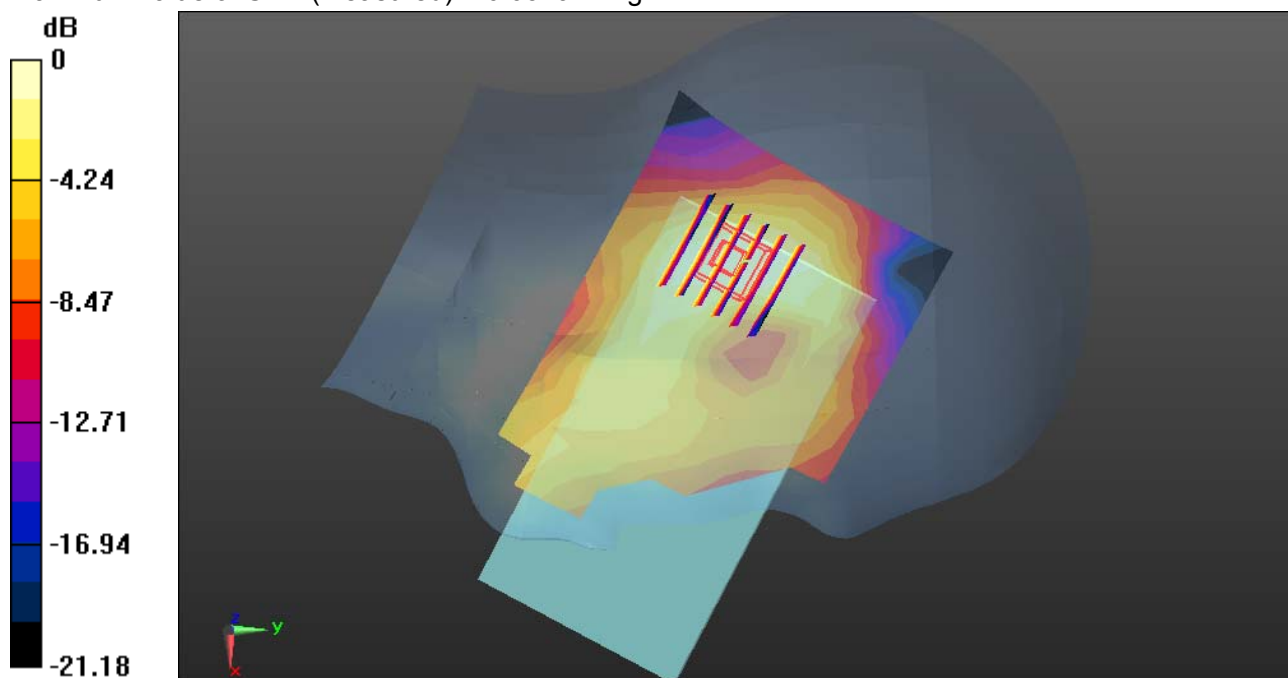

0 dB = 0.0319 W/kg = -14.96 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band II-Right Head Cheek Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Right Head Cheek Middle CH9400/Area Scan (9x11x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0876 W/kg

WCDMA Band II/Right Head Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.367 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0902 W/kg

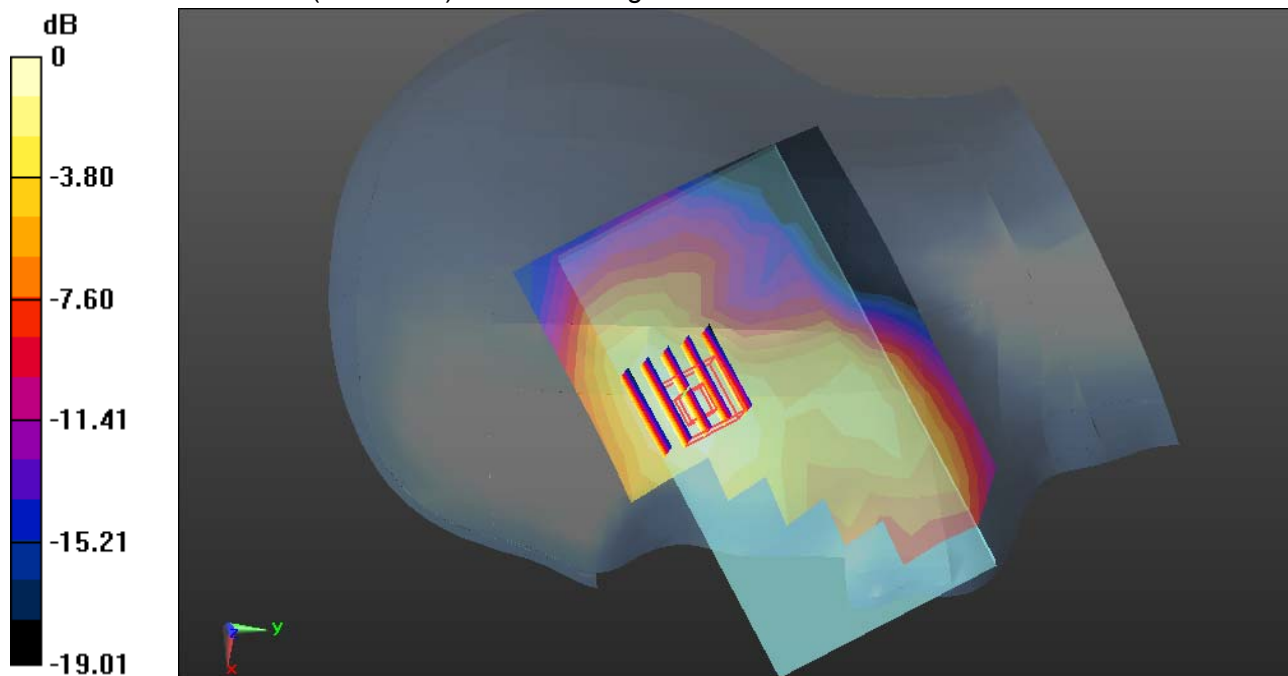

0 dB = 0.0902 W/kg = -10.45 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band II-Right Head Tilted Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Right Head Tilted Middle CH9400/Area Scan (9x12x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0659 W/kg

WCDMA Band II/Right Head Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.449 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0726 W/kg

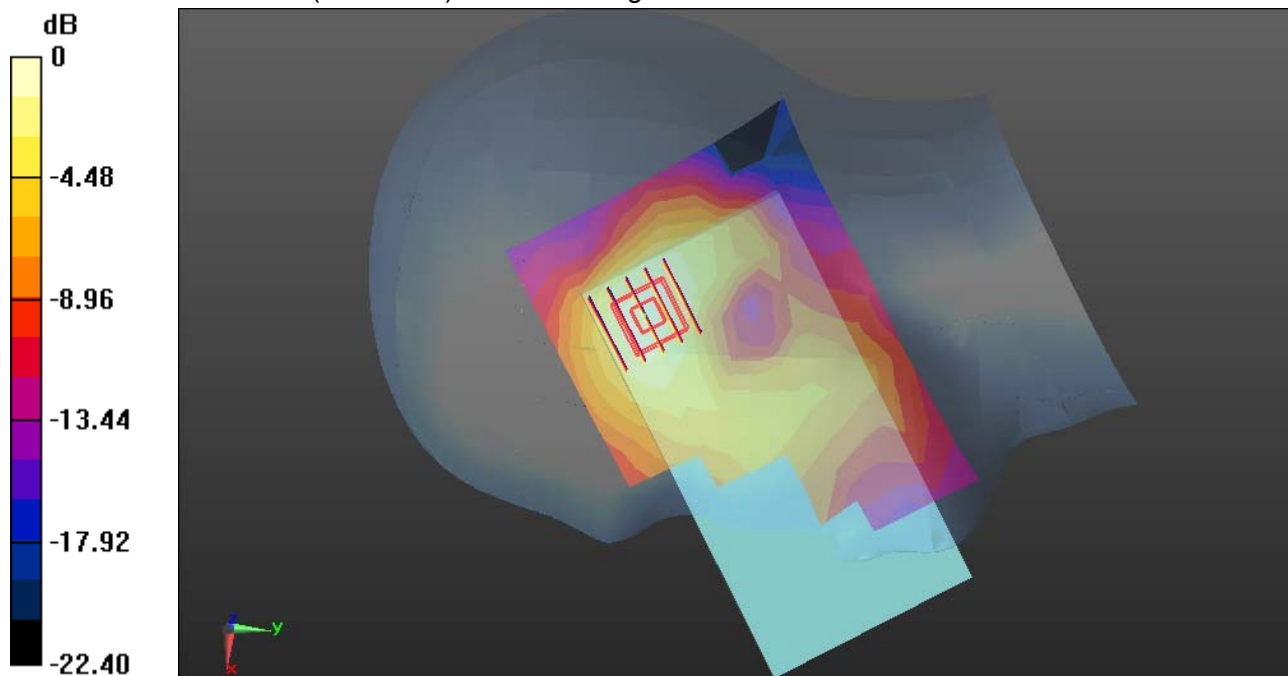

0 dB = 0.0726 W/kg = -11.39 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band II-Left Head Cheek Middle CH9400

DUT: Mobile phone; Type: M611T; Serial: 861405237863088

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Left Head Cheek Middle CH9400/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.160 W/kg


WCDMA Band II/Left Head Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.529 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

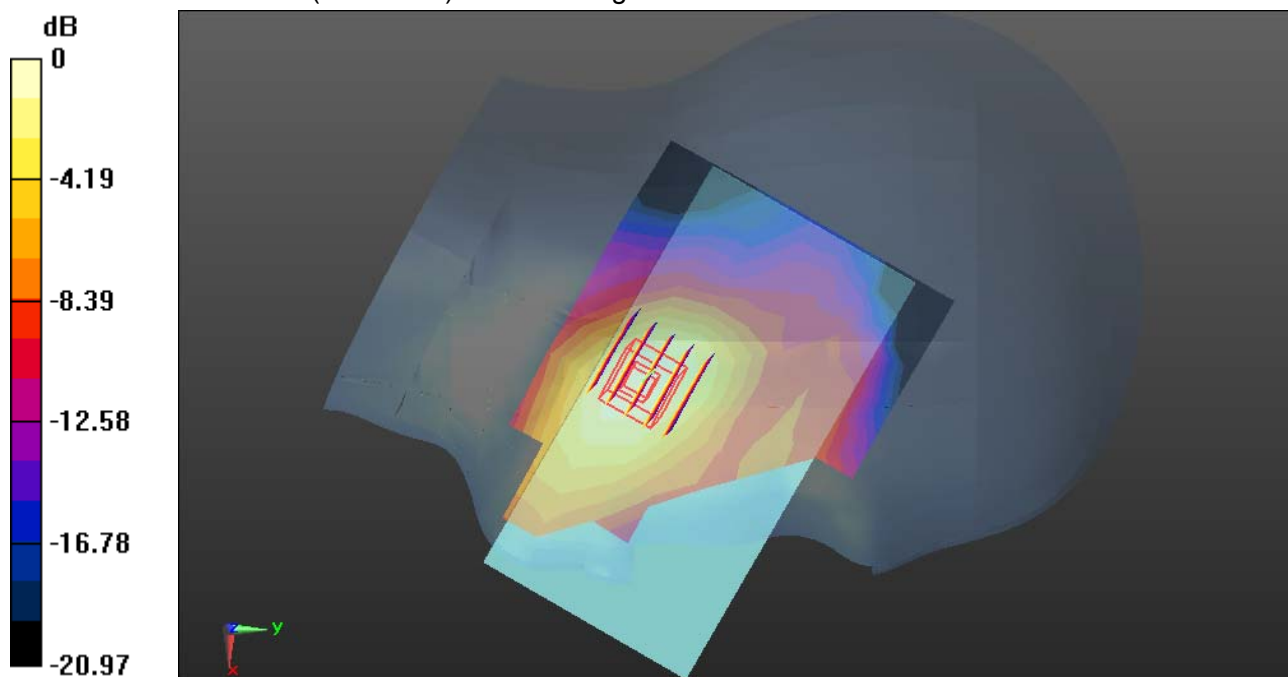

0 dB = 0.161 W/kg = -7.93 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band II-Left Head Tilted Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Left Head Tilted Middle CH9400/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0425 W/kg


WCDMA Band II/Left Head Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.044 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0404 W/kg

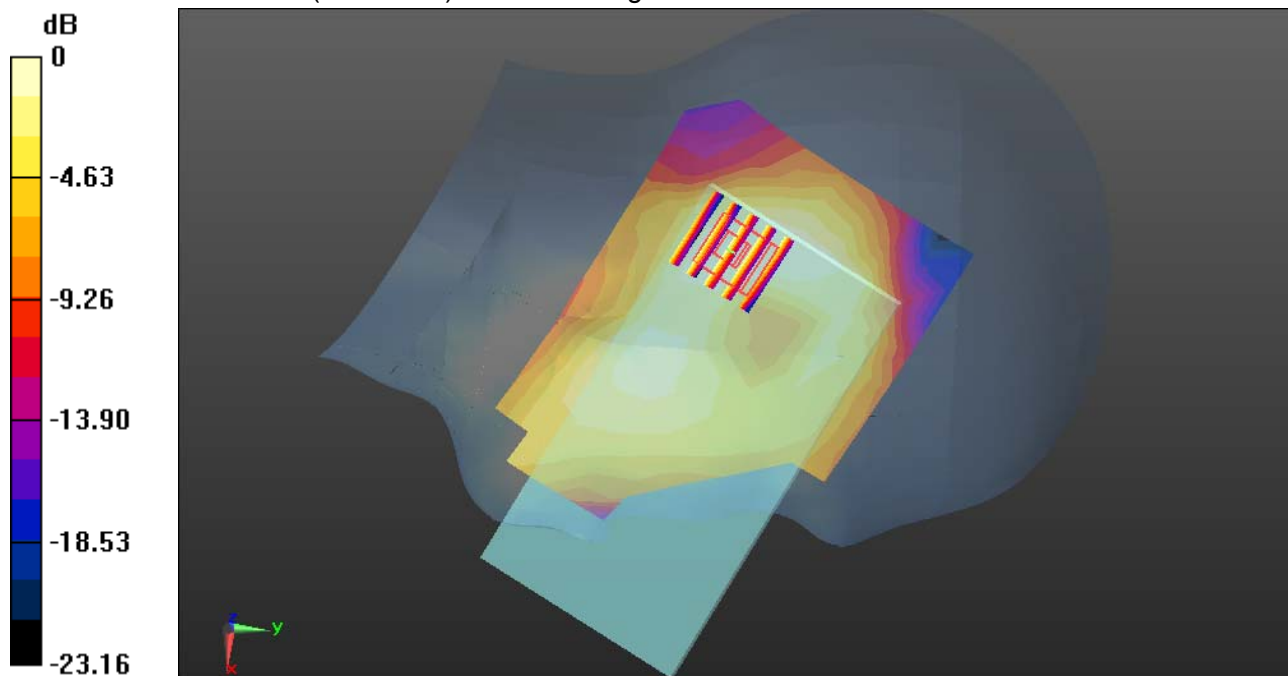

0 dB = 0.0404 W/kg = -13.94 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band V-Right Head Cheek High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.637$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Right Head Cheek High CH4233/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.530 W/kg


WCDMA Band V/Right Head Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.995 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.370 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.546 W/kg

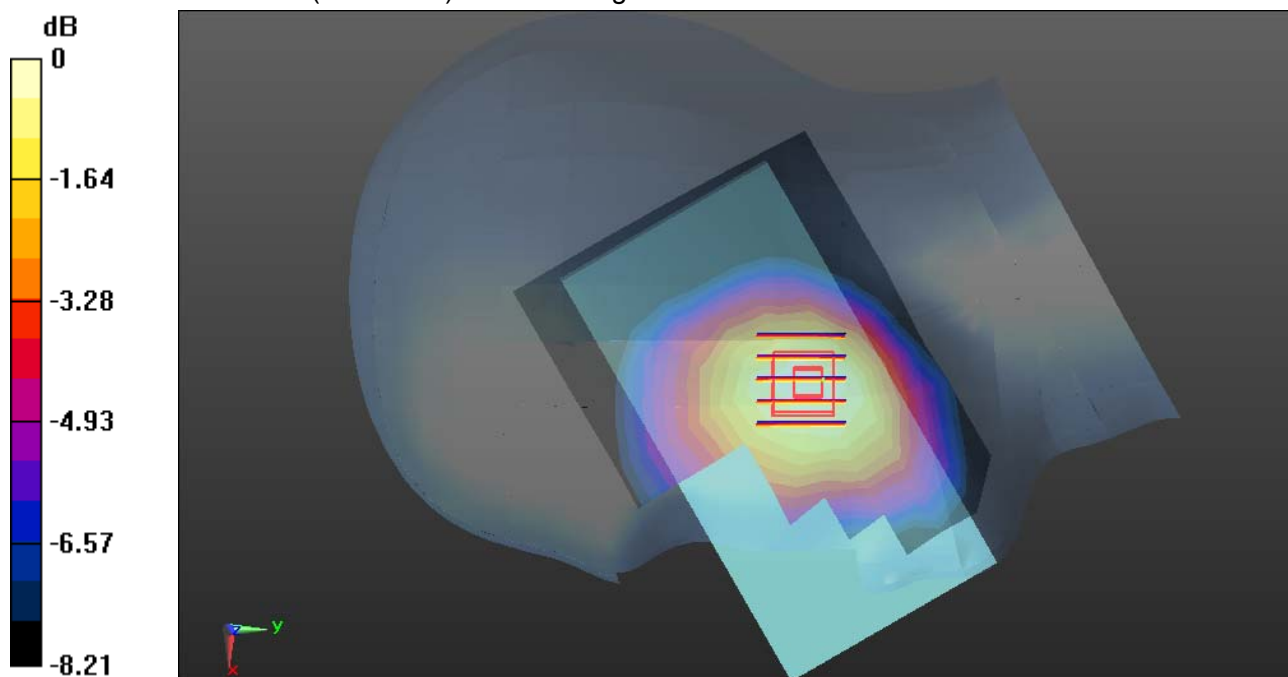

0 dB = 0.546 W/kg = -2.63 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band V-Right Head Tilted High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.637$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Right Head Tilted High CH4233/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.272 W/kg

WCDMA Band V/Right Head Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.15 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.194 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.277 W/kg

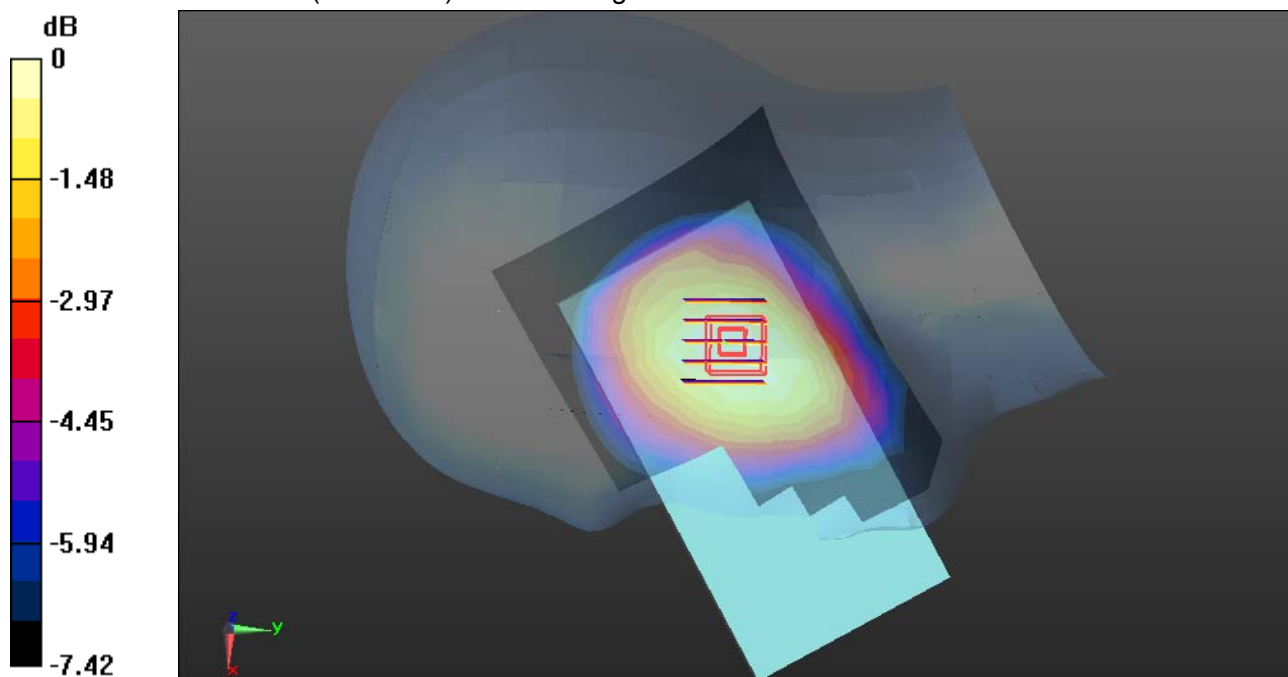

0 dB = 0.277 W/kg = -5.58 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band V-Left Head Cheek High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.637$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Left Head Cheek High CH4233/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.471 W/kg

WCDMA Band V/Left Head Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.774 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.321 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.471 W/kg

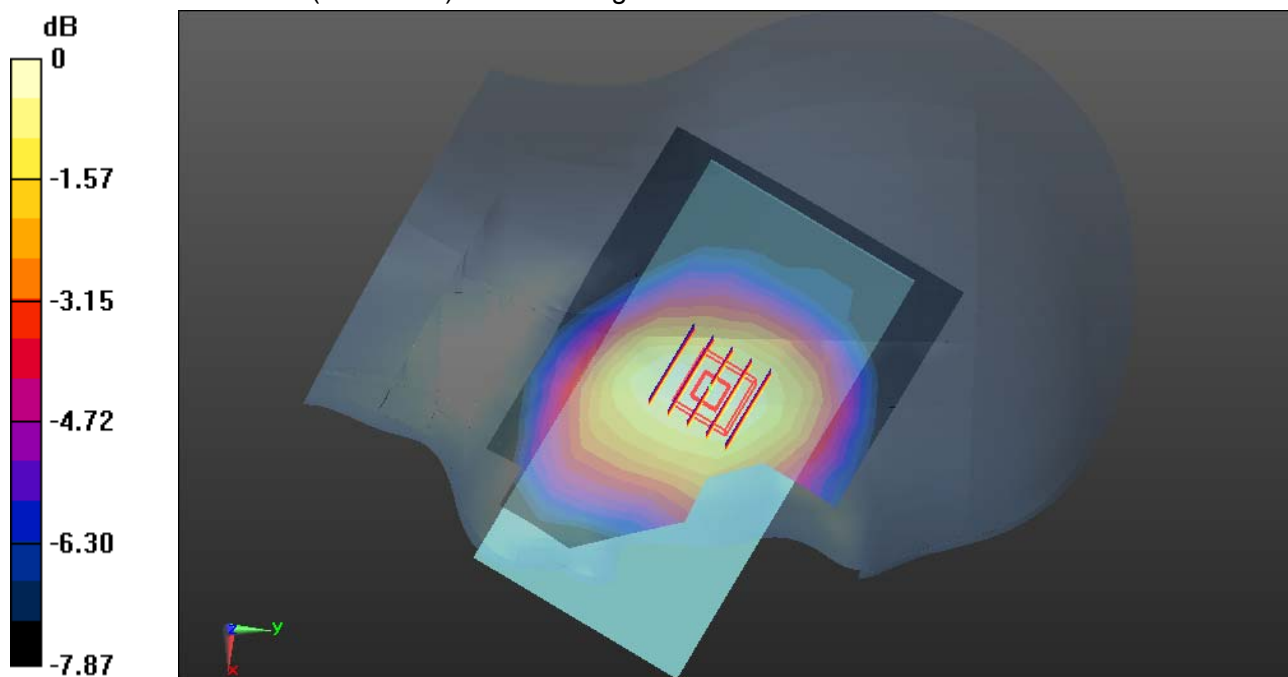

0 dB = 0.471 W/kg = -3.27 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/16/2015

WCDMA Band V-Left Head Tilted High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.637$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Left Head Tilted High CH4233/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.292 W/kg

WCDMA Band V/Left Head Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.41 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.195 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.284 W/kg

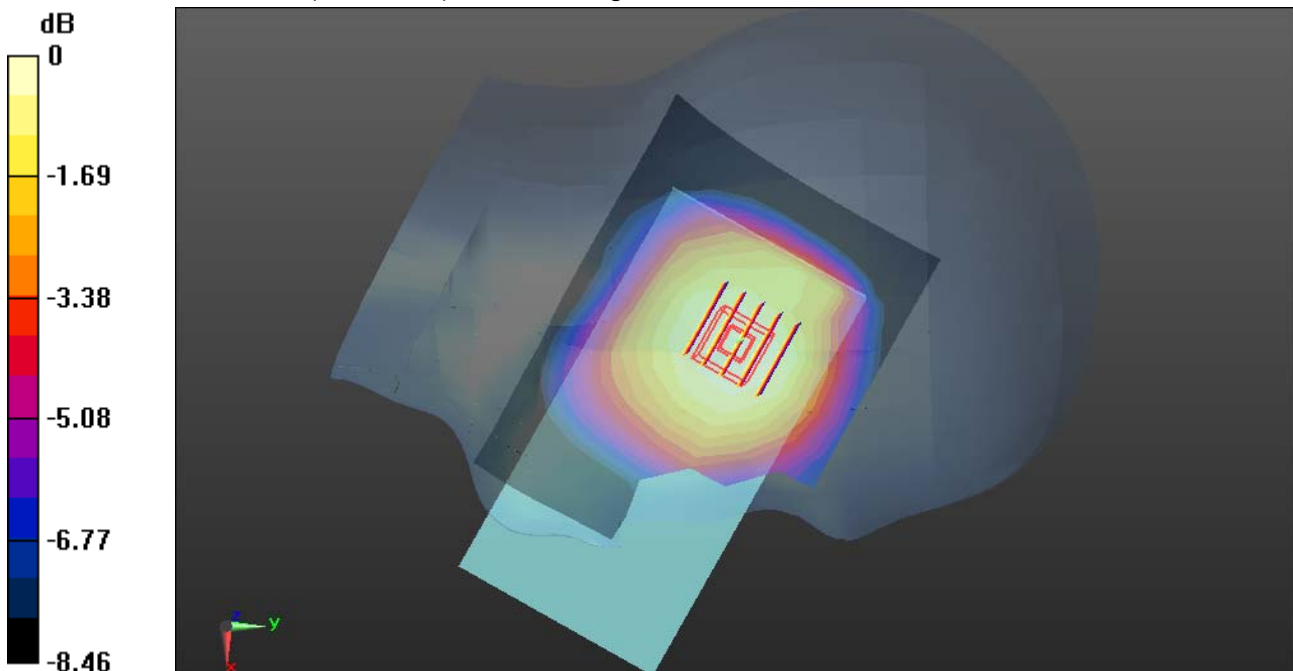

0 dB = 0.284 W/kg = -5.47 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 850-Body Front Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 53.528$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Front Middle CH190/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.416 W/kg


GPRS 850/Body Front Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.21 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.232 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.431 W/kg

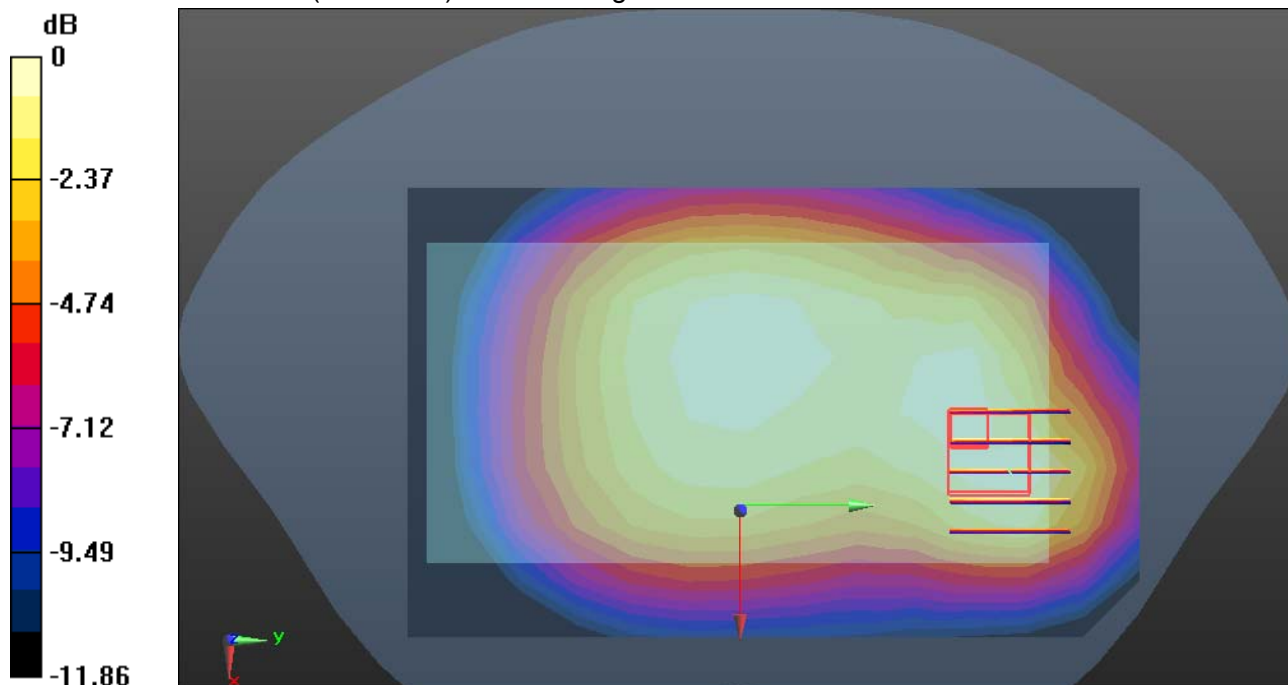

0 dB = 0.431 W/kg = -3.66 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 850-Body Rear Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 53.528$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Rear Middle CH190/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.757 W/kg


GPRS 850/Body Rear Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.65 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.505 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.756 W/kg

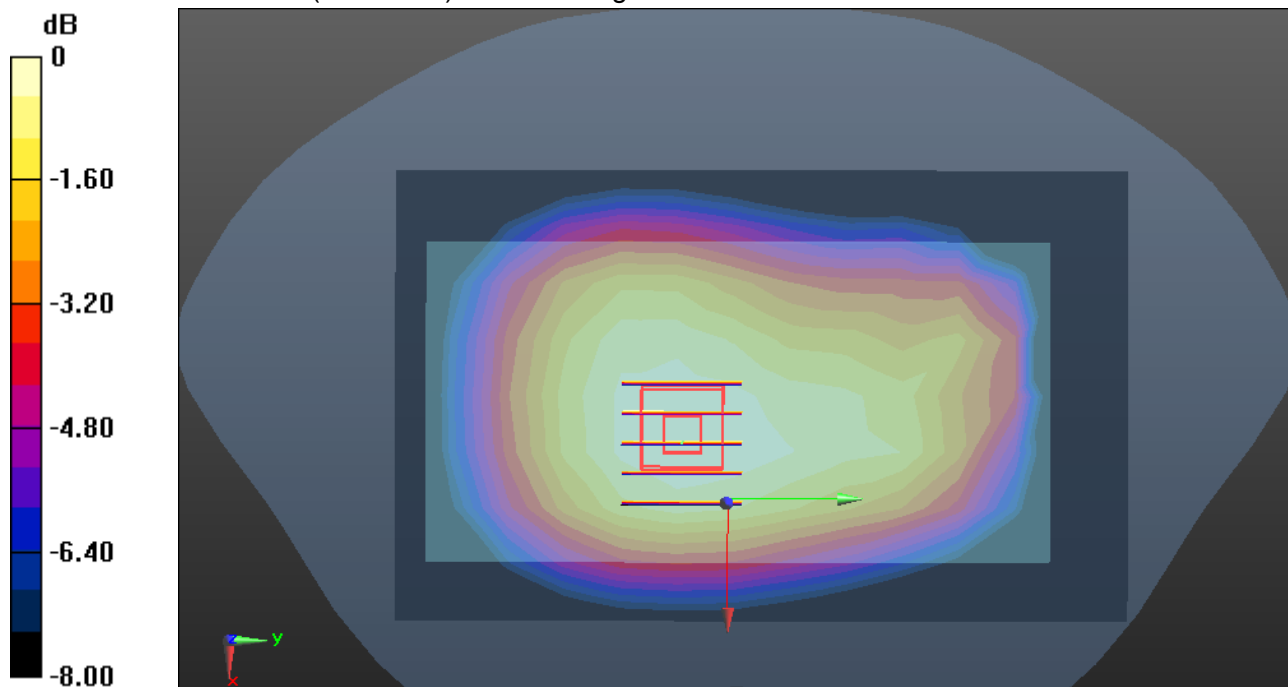

0 dB = 0.756 W/kg = -1.21 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 850-Body Right Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 53.528$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Right Middle CH190/Area Scan (13x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.458 W/kg


GPRS 850/Body Right Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.281 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.487 W/kg

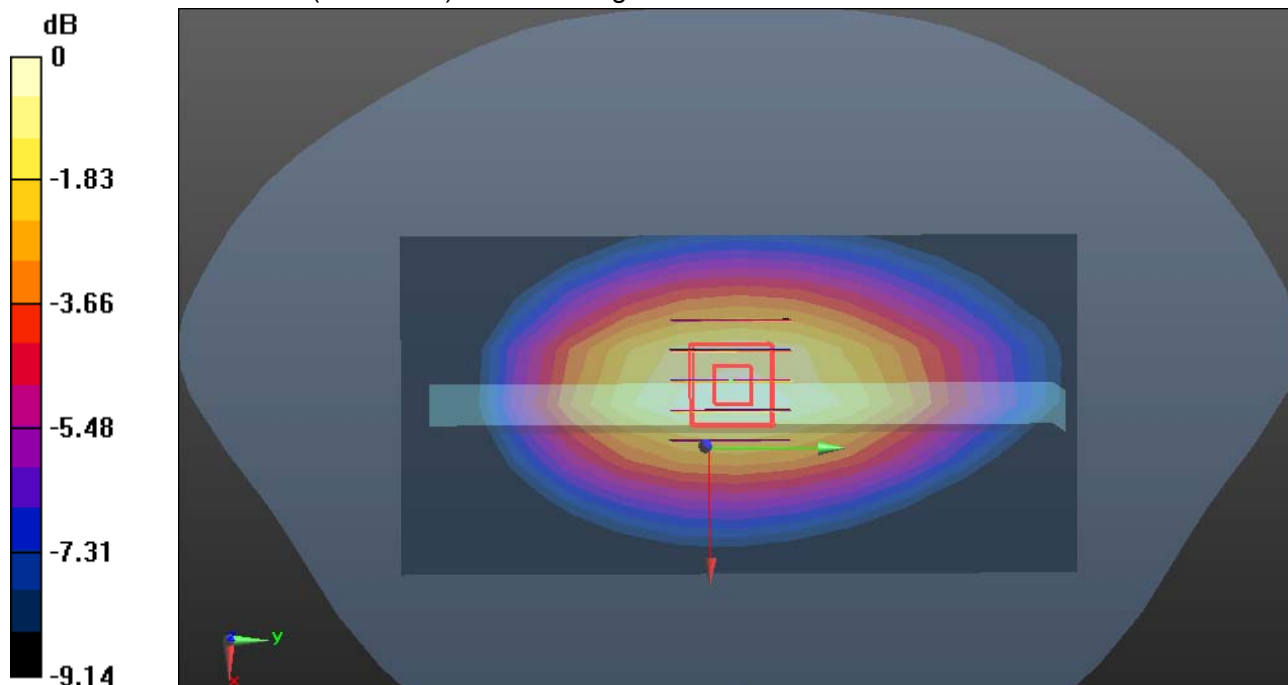

0 dB = 0.487 W/kg = -3.12 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 850-Body Left Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 53.528$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Left Middle CH190/Area Scan (13x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.346 W/kg


GPRS 850/Body Left Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.43 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.200 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.344 W/kg

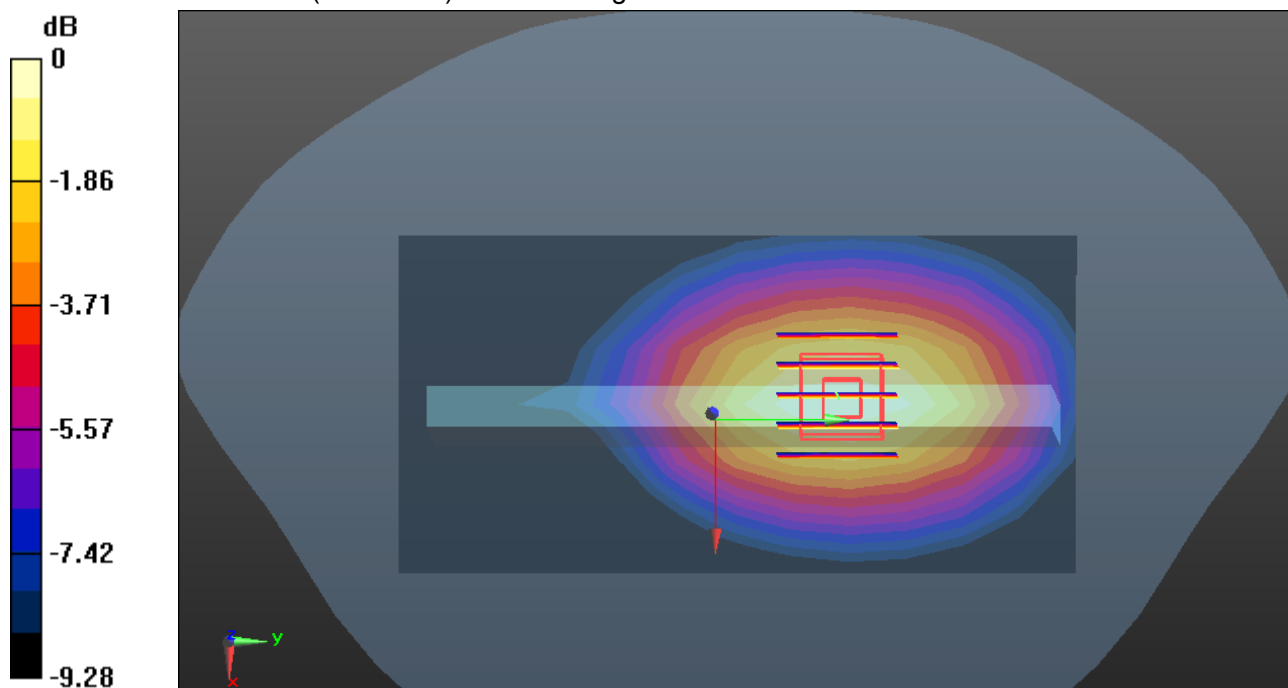

0 dB = 0.344 W/kg = -4.63 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 850-Body Bottom Middle CH190**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 53.528$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 850/Body Bottom Middle CH190/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.257 W/kg


GPRS 850/Body Bottom Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.45 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.147 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.267 W/kg

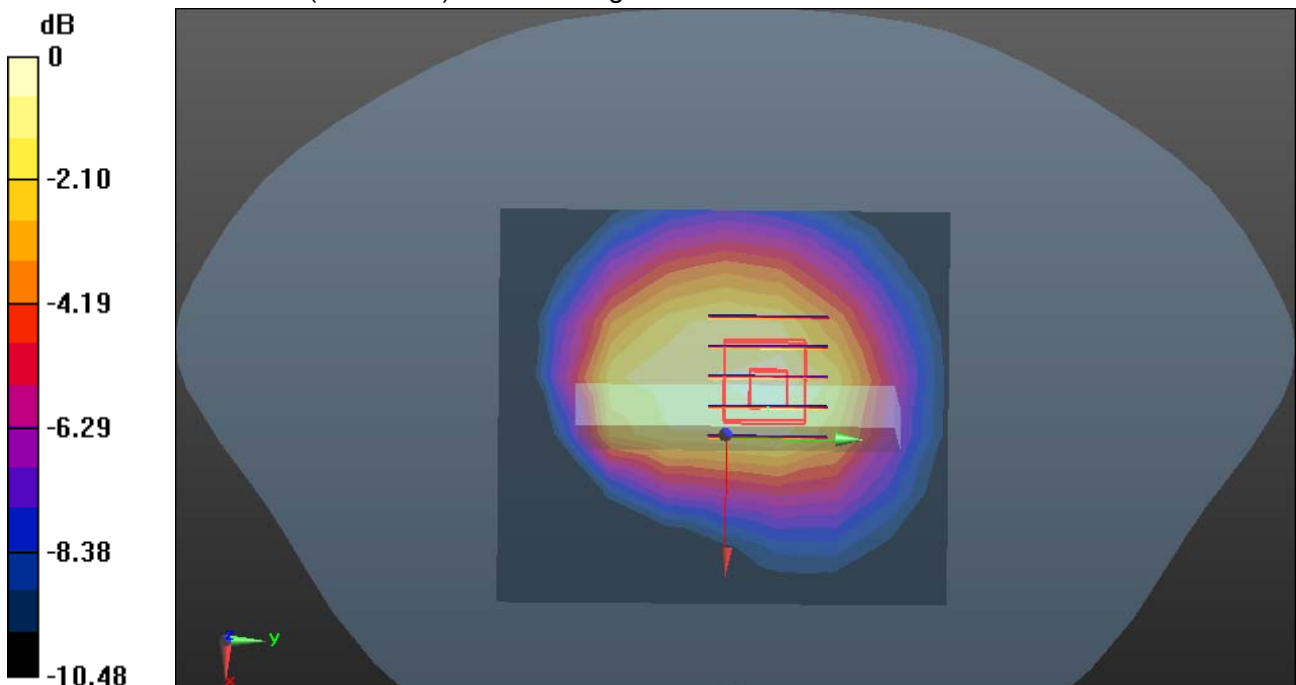

0 dB = 0.267 W/kg = -5.73 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 1900-Body Front High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 54.703$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


GPRS 1900/Body Front High CH810/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.300 W/kg**GPRS 1900/Body Front High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.088 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

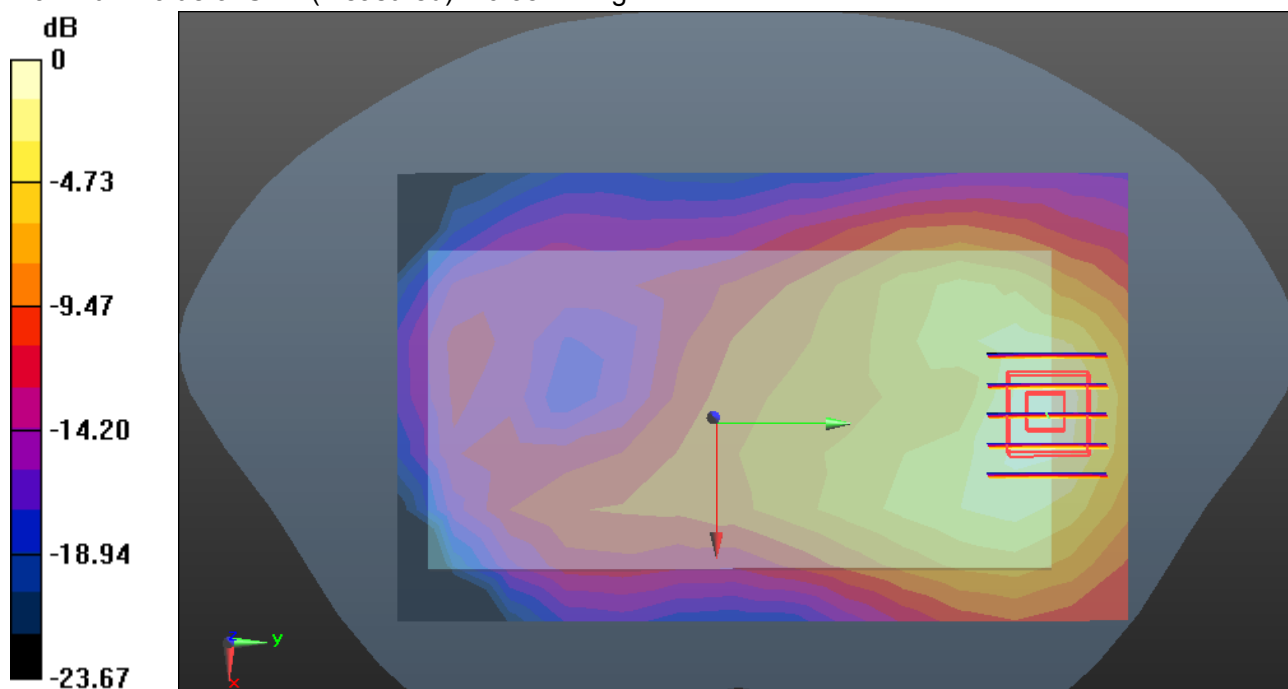

0 dB = 0.384 W/kg = -4.16 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 1900-Body Rear High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 54.703$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GPRS 1900/Body Rear High CH810/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.926 W/kg


GPRS 1900/Body Rear High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.447 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.961 W/kg

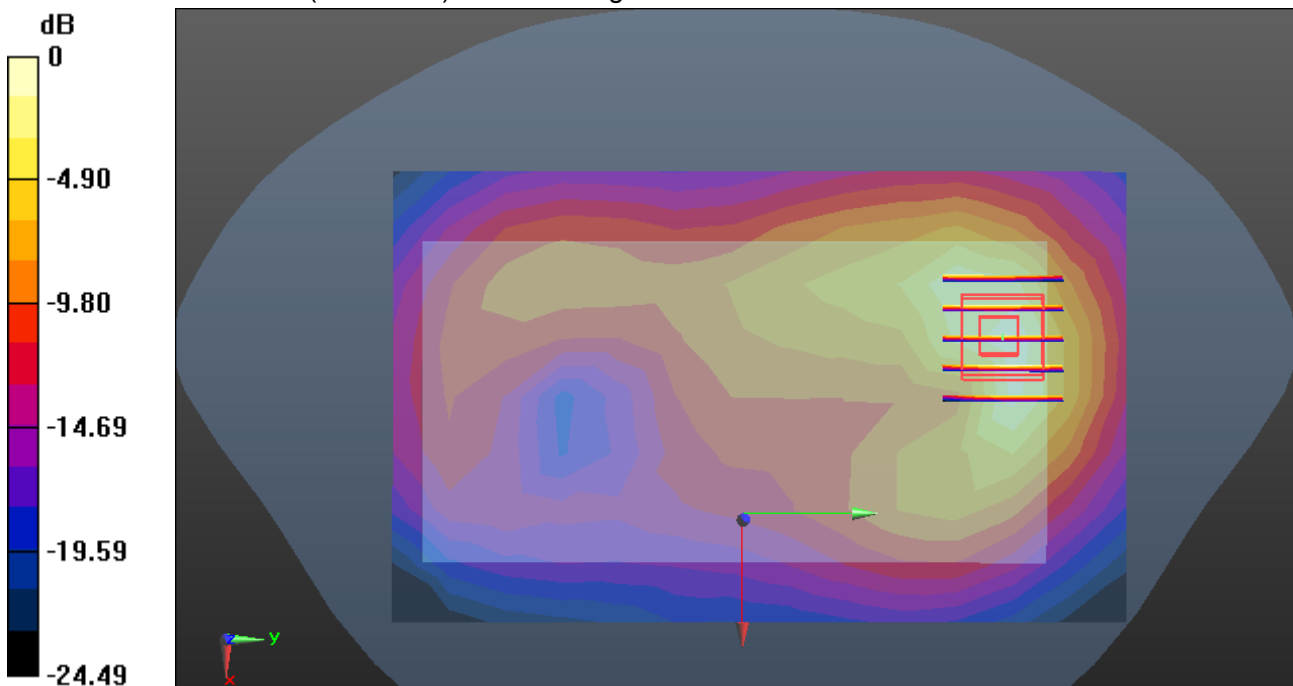

0 dB = 0.961 W/kg = -0.17 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 1900-Body Right High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 54.703$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


GPRS 1900/Body Right High CH810/Area Scan (14x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0375 W/kg**GPRS 1900/Body Right High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.788 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0406 W/kg

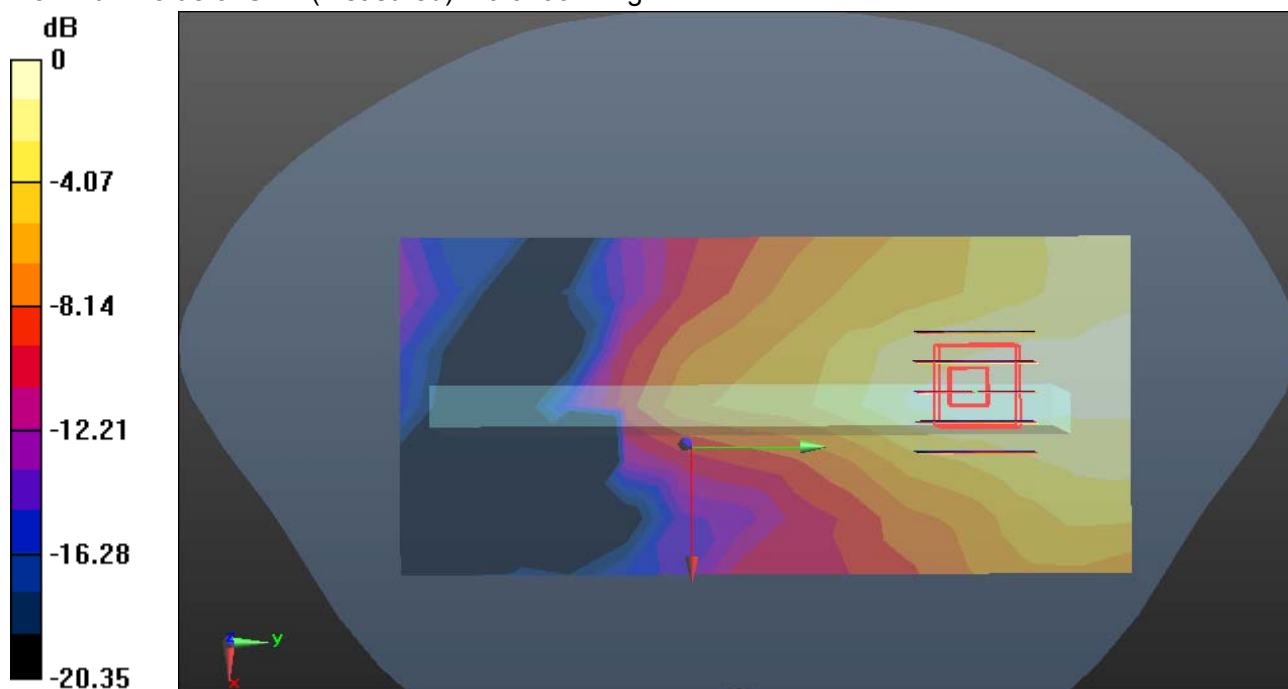

0 dB = 0.0406 W/kg = -13.91 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 1900-Body Left High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 54.703$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


GPRS 1900/Body Left High CH810/Area Scan (14x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.103 W/kg**GPRS 1900/Body Left High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.129 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

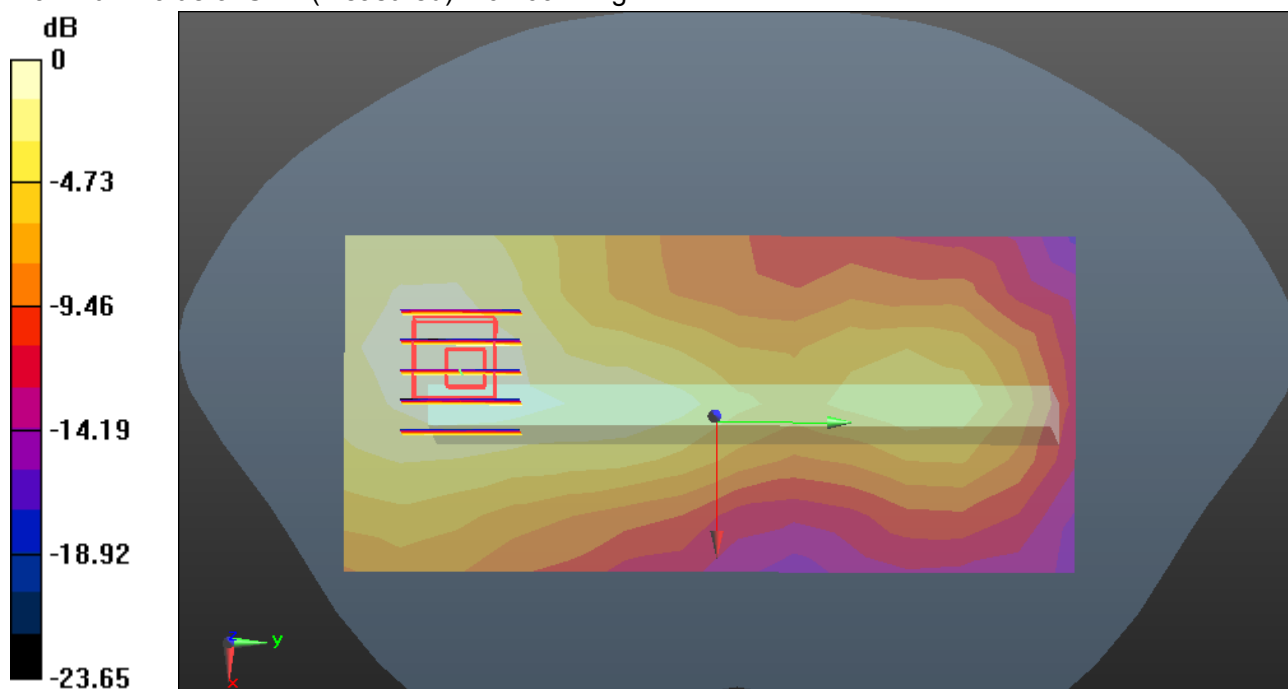

0 dB = 0.109 W/kg = -9.63 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

GPRS 1900-Body Bottom High CH810**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 54.703$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)


GPRS 1900/Body Bottom High CH810/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.03 W/kg**GPRS 1900/Body Bottom High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.29 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

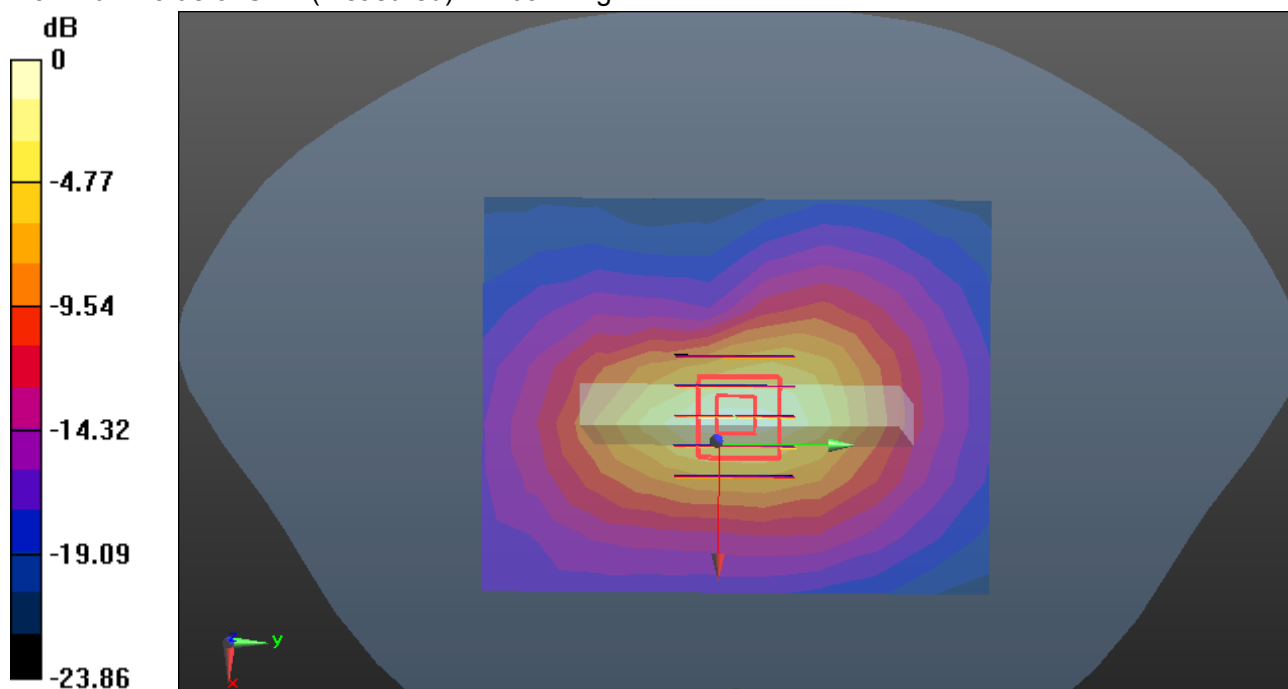

0 dB = 1.09 W/kg = 1.11 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band II-Body Front Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.82$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Front Middle CH9400/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.371 W/kg


WCDMA Band II/Body Front Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.645 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.409 W/kg

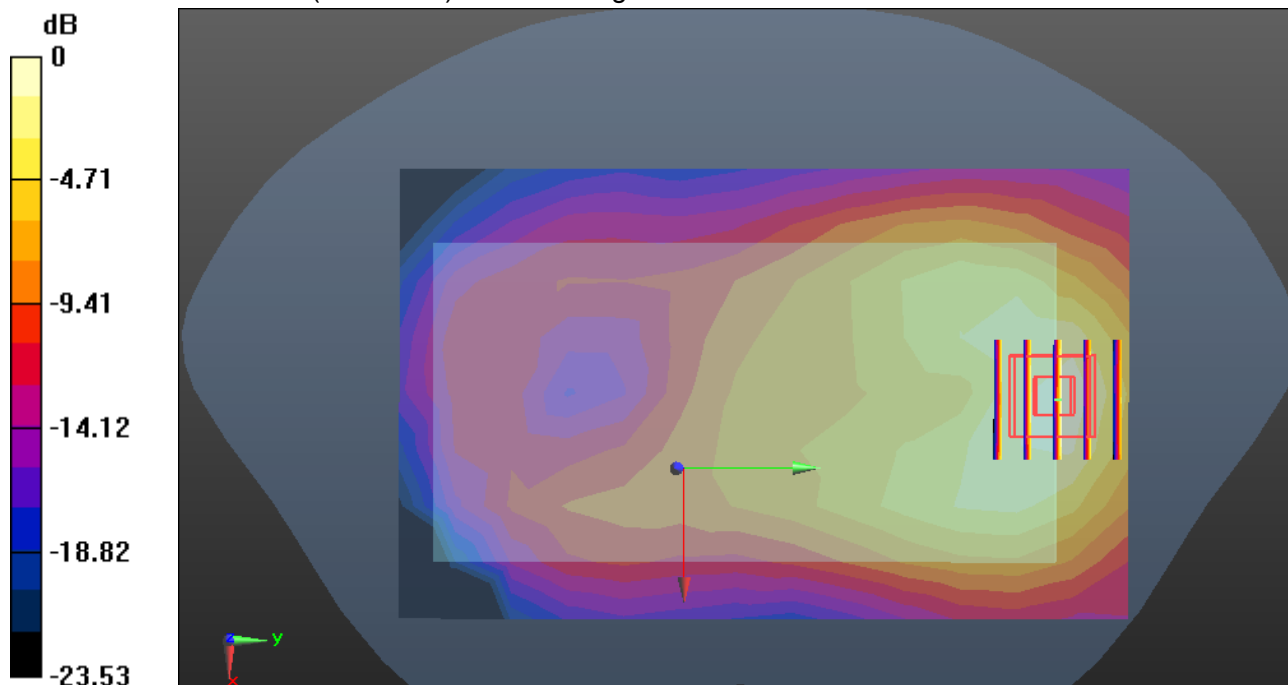

0 dB = 0.409 W/kg = -3.88 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band II-Body Rear Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.82$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Rear Middle CH9400/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.685 W/kg


WCDMA Band II/Body Rear Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.146 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

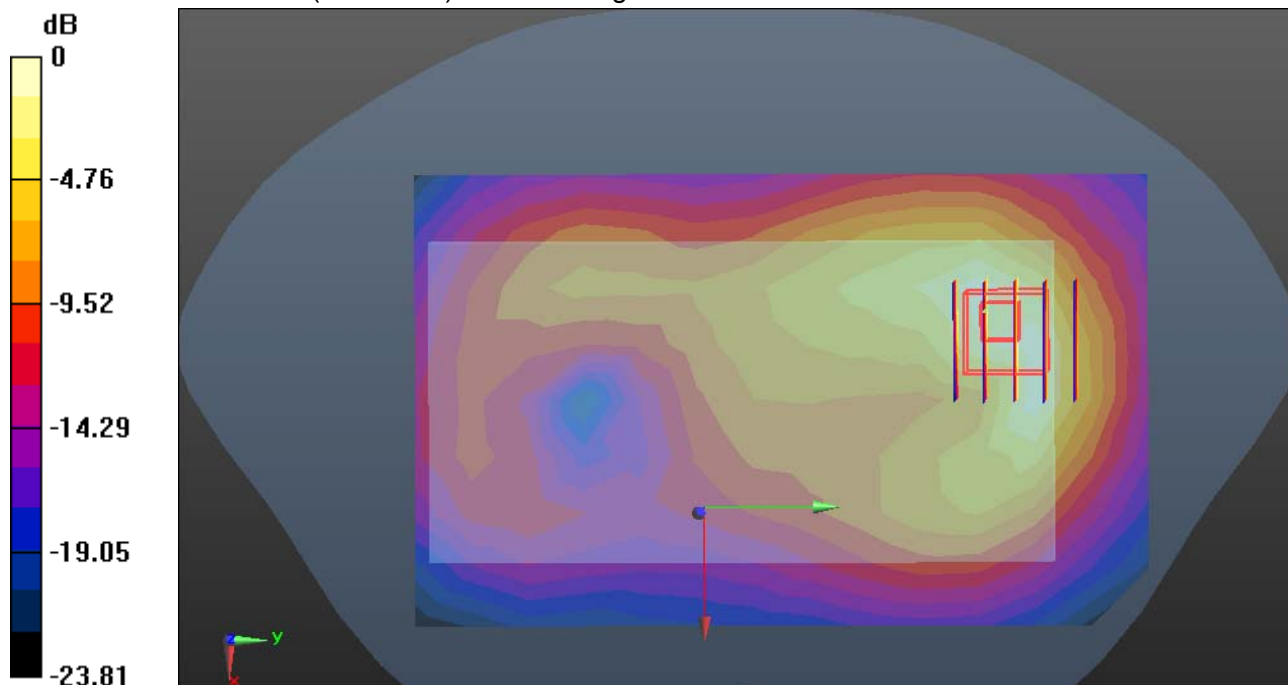

0 dB = 0.763 W/kg = -1.17 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band II-Body Right Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.82$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Right Middle CH9400/Area Scan (14x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0571 W/kg


WCDMA Band II/Body Right Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.319 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0589 W/kg

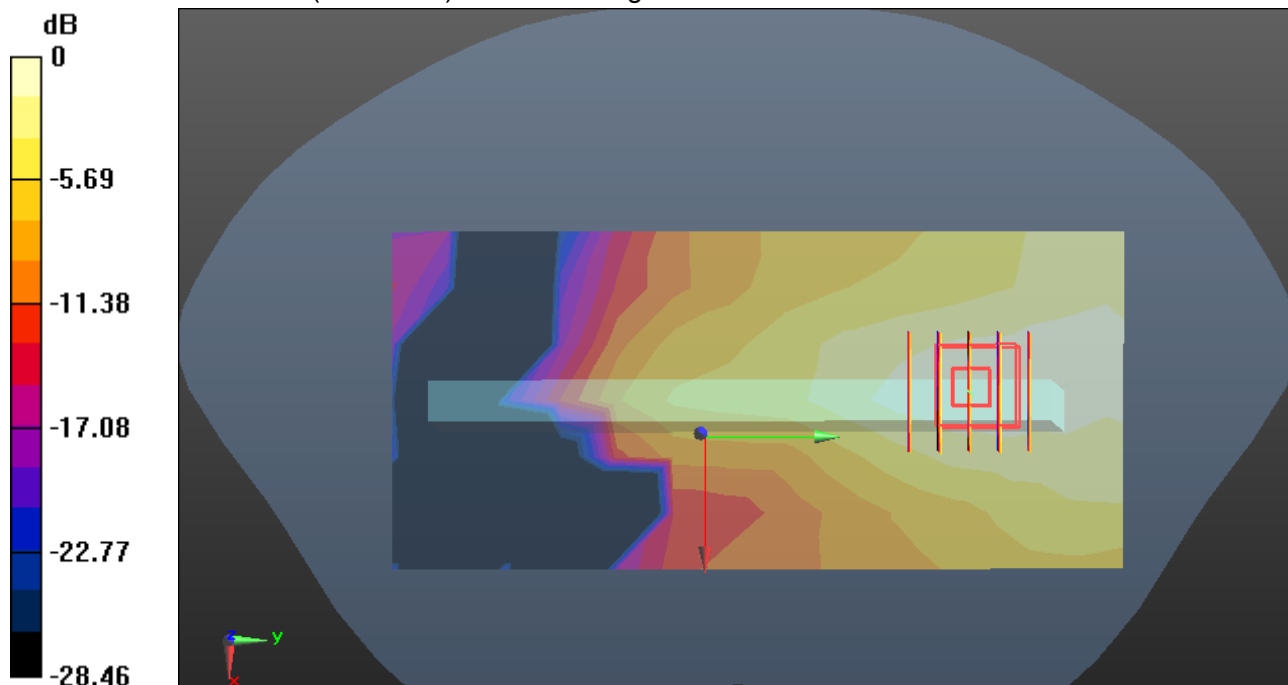

0 dB = 0.0589 W/kg = -12.30 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band II-Body Left Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.82$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Left Middle CH9400/Area Scan (14x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 W/kg


WCDMA Band II/Body Left Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.251 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

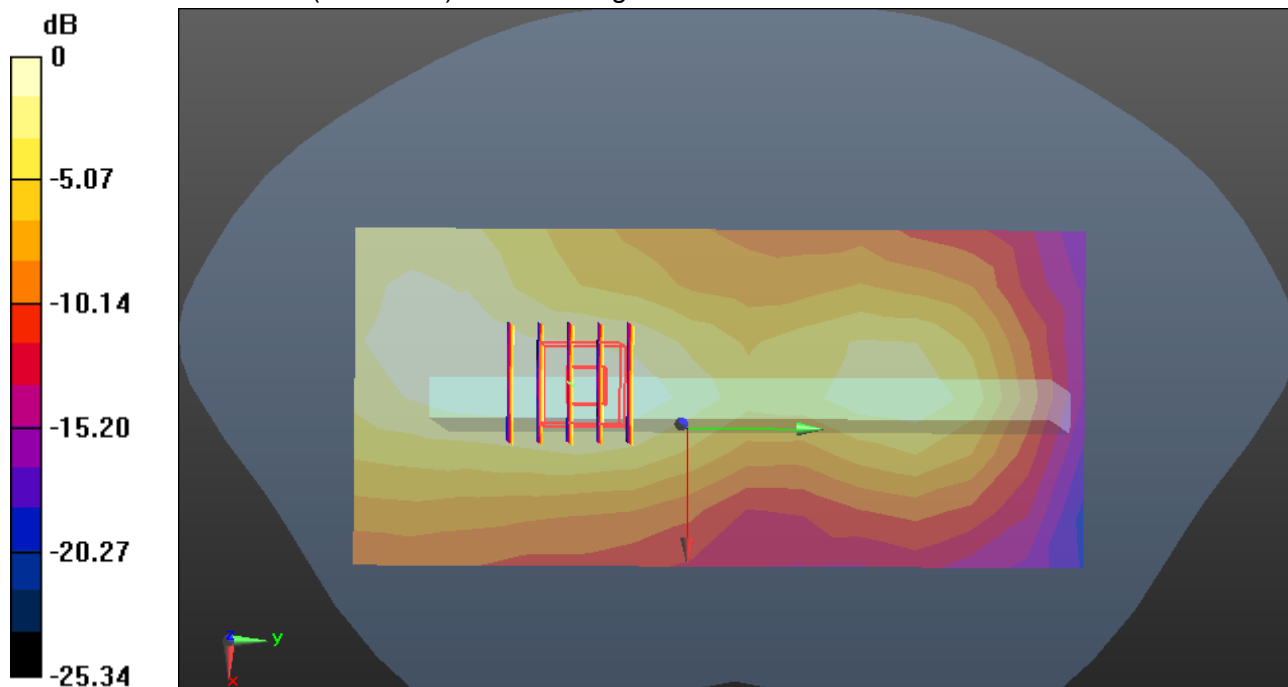

0 dB = 0.112 W/kg = -9.51 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band II-Body Bottom Middle CH9400**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.82$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band II/Body Bottom Middle CH9400/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.773 W/kg

WCDMA Band II/Body Bottom Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.67 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.807 W/kg

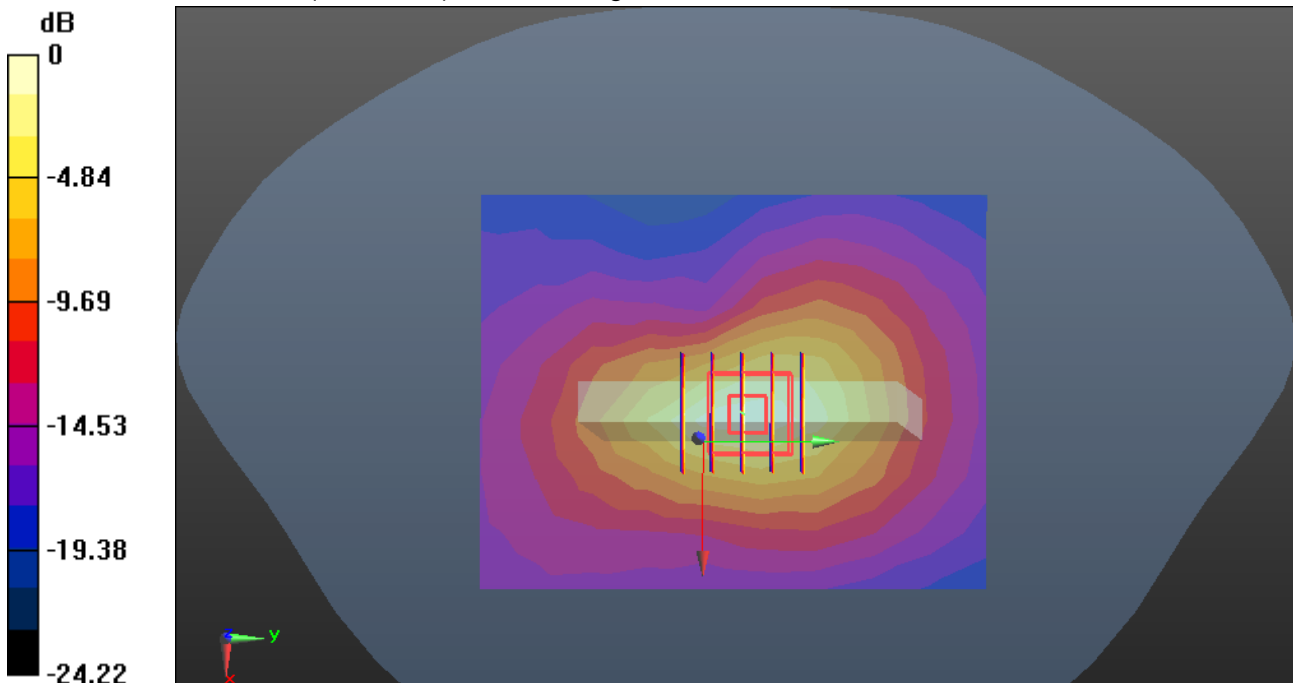

0 dB = 0.807 W/kg = -0.93 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band V-Body Front High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 53.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Front High CH4233/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.468 W/kg


WCDMA Band V/Body Front High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.68 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.262 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.483 W/kg

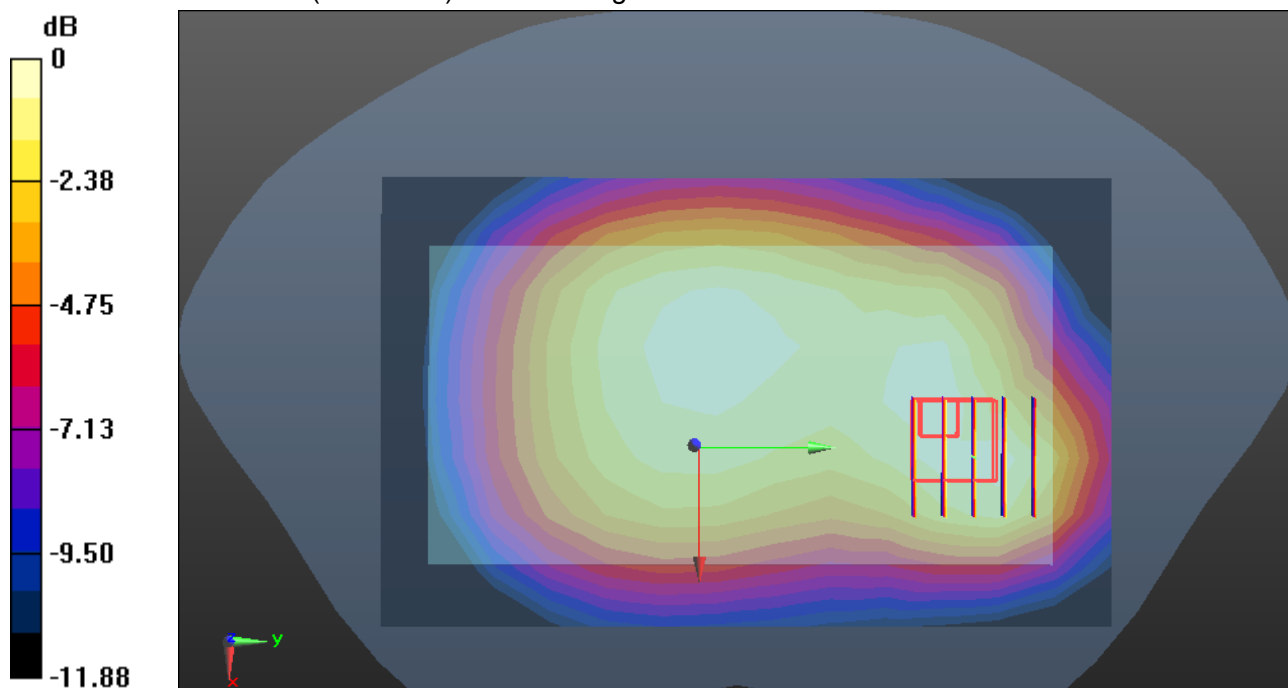

0 dB = 0.483 W/kg = -3.16 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band V-Body Rear High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 53.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Rear High CH4233/Area Scan (14x9x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.897 W/kg


WCDMA Band V/Body Rear High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.95 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.402 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.911 W/kg

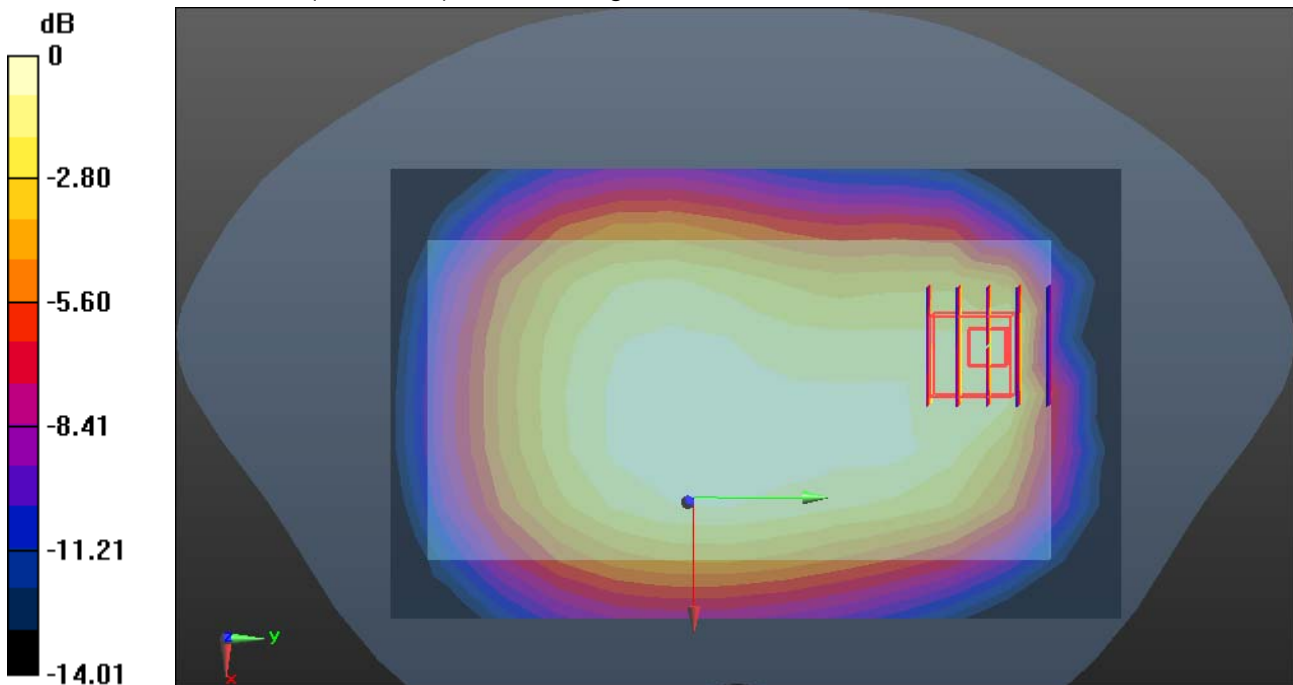

0 dB = 0.911 W/kg = -0.40 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band V-Body Right High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 53.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Right High CH4233/Area Scan (13x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.507 W/kg


WCDMA Band V/Body Right High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.37 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.303 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.526 W/kg

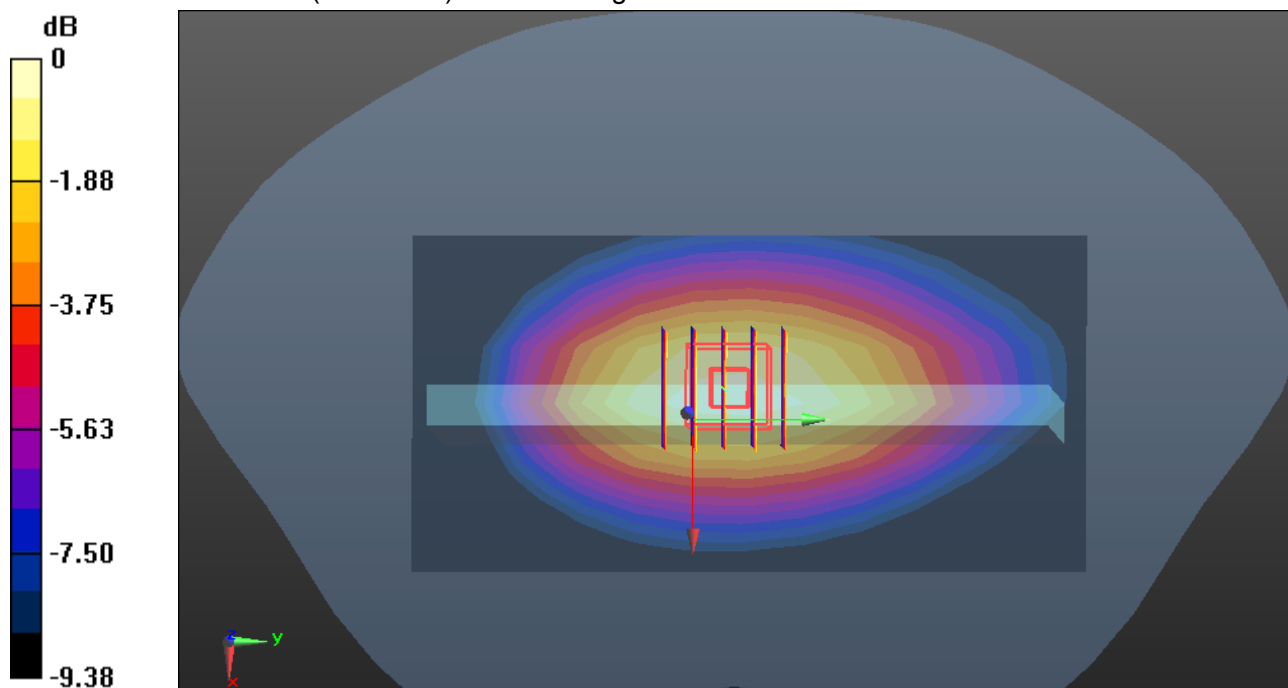

0 dB = 0.526 W/kg = -2.79 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band V-Body Left High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 53.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Left High CH4233/Area Scan (13x7x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.371 W/kg


WCDMA Band V/Body Left High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.99 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.222 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.386 W/kg

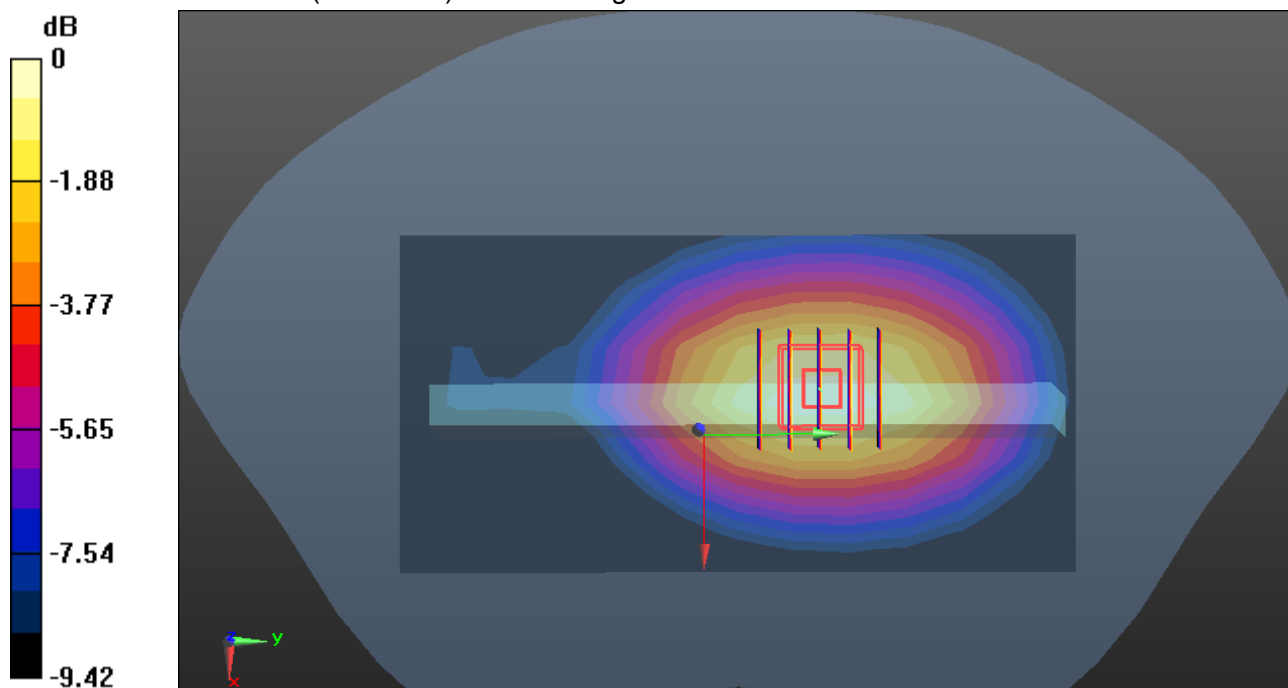

0 dB = 0.386 W/kg = -4.13 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 1/17/2015

WCDMA Band V-Body Bottom High CH4233**DUT: Mobile phone; Type: M611T; Serial: 861405237863088**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 53.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WCDMA Band V/Body Bottom High CH4233/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.297 W/kg

WCDMA Band V/Body Bottom High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.15 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.171 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.306 W/kg

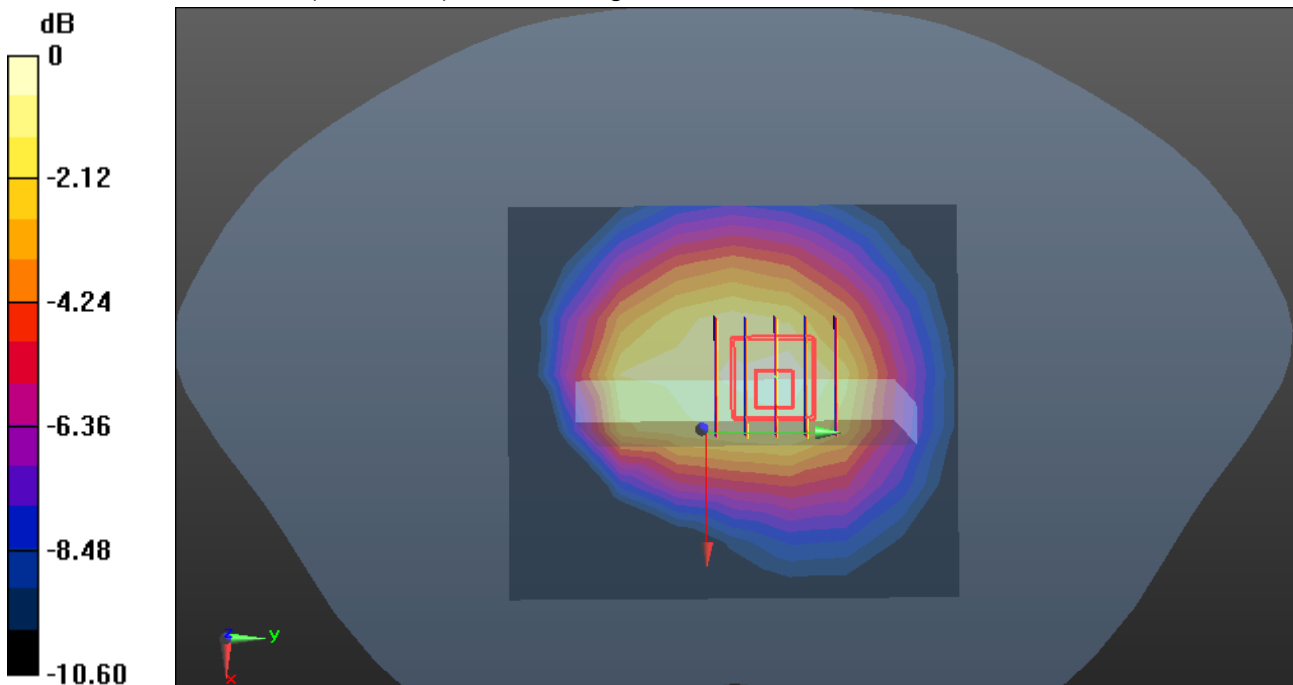

0 dB = 0.306 W/kg = -5.14 dBW/kg