




Test Report

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	EP3128-1
Client	Ideal Industries, Inc. Tim Tunnell
Address	Becker Place Sycamore, IL 60178
Phone	815-895-1295
Items tested	SCLINE1000
FCC ID	2AAMXSCLINE1000
IC ID	11250A-SCLINE1000
FRN	0002862225
Equipment Type	Part 15.247 Digitally Modulated, Mobile
Equipment Code	DTS
Emission Designator	763KG1D
FCC/IC Rule Parts	47 CFR 15.247, RSS-247 Issue 1
Test Dates	October 26, 29 and November 2, 6 and 12, 2015
Results	As detailed within this report
Prepared by	 Jason Haley – Test Engineer
Authorized by	 Yunus Faziloglu – Sr. EMC Engineer
Issue Date	<u>2/9/2016</u>
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 30 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents	2
Summary	3
Test Methodology	4
Product Tested - Configuration Documentation	5
<i>Statement of Conformity</i>	6
Modifications Required for Compliance	6
Test Results	7
<i>Bandwidth</i>	7
<i>Fundamental Emission Output Power</i>	10
<i>Radiated Spurious Emissions</i>	13
<i>Conducted Spurious Emissions</i>	17
<i>Power Spectral Density</i>	21
<i>AC Line Conducted Emissions</i>	24
<i>Occupied Bandwidth</i>	26
Measurement Uncertainty	29
Conditions Of Testing	30

Form Final Report REV 12-07-15



Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.247 and RSS-247. The product is the SCLINE1000. It is a transmitter that operates in the range 902-928MHz.

We found that the product met the above requirements without modifications. Nobody from Ideal Industries, Inc. was present during the testing. The test samples were received in good condition.

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	February 9, 2016



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 3 of 31

Test Methodology

All testing was performed according to the following rules/procedures/documents;

CFR 47 Part 15.247, RSS-247 Issue 1, RSS-Gen Issue 4, FCC KDB 558074 D01 DTS Measurement Guidance v03r04 and ANSI C63.10-2013.

Radiated emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. AC line conducted emissions testing was performed with a 50 Ω /50 μ H LISN. The EUT operating voltage was 120/277VAC at 60Hz.

RF measurements were performed at the antenna port.

The environmental conditions were as shown below.

Date	Temperature	Humidity
10/26/15	21.9°C	35% RH
10/29/15	23°C	55% RH
11/02/15	21°C	38% RH
11/04/15	22.2°C	54% RH
11/12/15	22.2°C	31% RH
11/13/15	21.9°C	40% RH

Following bandwidths were used during radiated spurious and line conducted emissions tests.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

Product Tested - Configuration Documentation

EUT Configuration											
Work Order:	P3128										
Company:	Ideal Industries, Inc.										
Company Address:	Becker Place										
	Sycamore, IL 60178										
Contact:	Tim Tunnell										
	MN			PN			SN				
EUT:	SCLINE1000			SCLINE1000			Sample 1 (integrated antenna)				
	SCLINE1000			SCLINE1000			Sample 2 (modified with antenna port connector)				
EUT Description:	Smart Connector Lighting / Dimming Controller										
EUT Tx Frequency:	902.7 – 927.3 MHz										
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrite s	length (m)	max length (m)	in/out	under test	comment
Power	Power AC	1	1	Power AC	No	No	0.3		in	yes	
Software Operating Mode Description:											
EUT shall continuously transmit on a single channel from 902 to 928 MHz range when AC power applied.											

Statement of Conformity

The SCLINE1000 has been found to conform to the following parts of 47 CFR and RSS 247 as detailed below:

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	The antenna for this device is integrated wired to the PCB with a gain of 4.55 dBi
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	EUT meets the AC Line conducted emissions requirements of this section.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.6				Occupied Bandwidth measurements were made.

Modifications Required for Compliance

None

Test Results**Bandwidth****LIMIT**

The minimum 6 dB bandwidth shall be at least 500 kHz. [15.247(a) (2)]

MEASUREMENTS / RESULTS

6dB BANDWIDTH				
Date: 02-Nov-15		Company: Ideal Industries, Inc.		Work Order: P3128
Engineer: Tuyen Truong		EUT Desc: SCLINE1000		EUT Operating Voltage/Frequency: 120Vac/60Hz
Temp: 21°C		Humidity: 38%		Pressure: 1008mbar
Frequency Range: 902.7 - 927.3 MHz				
Notes:				
Frequency (MHz)	Reading (KHz)	6dB BW		
		Limit (KHz)	Margin (KHz)	Result (Pass/Fail)
902.7	655.406	≥500	+155.406	Pass
915.0	655.425	≥500	+155.425	Pass
927.3	656.149	≥500	+156.149	Pass
Test Site: CEMI1		Attenuation: 791		
Analyzer: 1510				


Rev. 10/19/2015

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown		9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	6/30/2016	6/30/2015
Preamps / Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator		0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/31/2016	7/31/2015
Conducted Test Sites (Mains / Telco)		FCC Code	VCCI Code				Cat	Calibration Due	Calibrated on
CEMI 1		719150	A-0015				III	NA	N/A
Meteorological Meters			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#2078			HTC-1	HDE		2078	II	4/2/2016	4/2/2015


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.




PLOTS

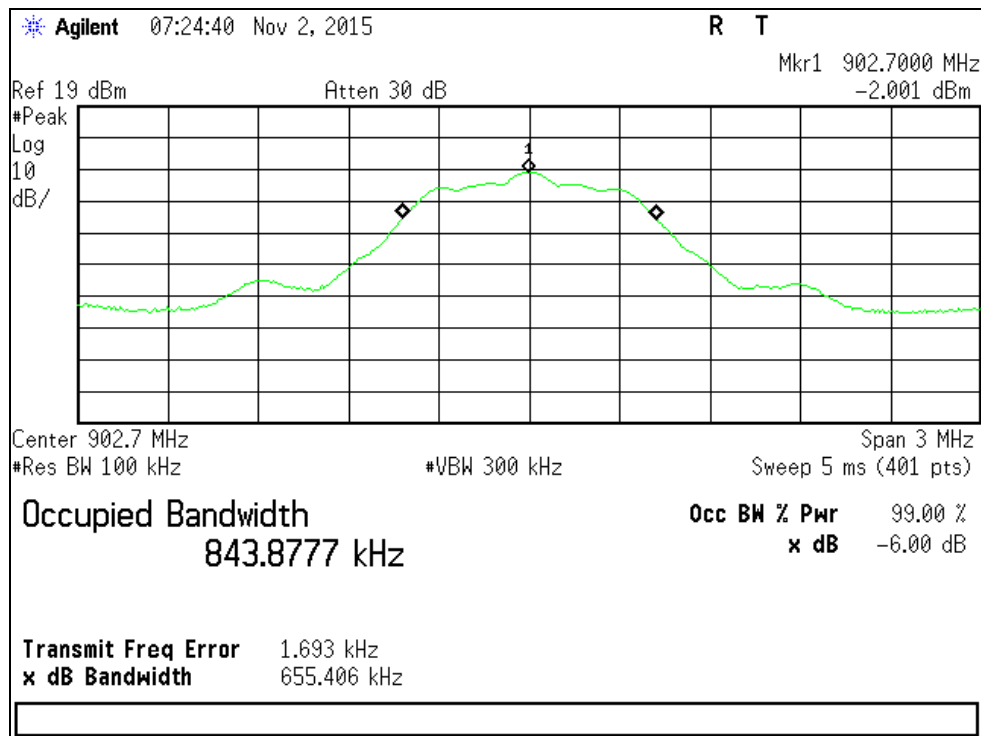

6dB Bandwidth Plot, Low Channel

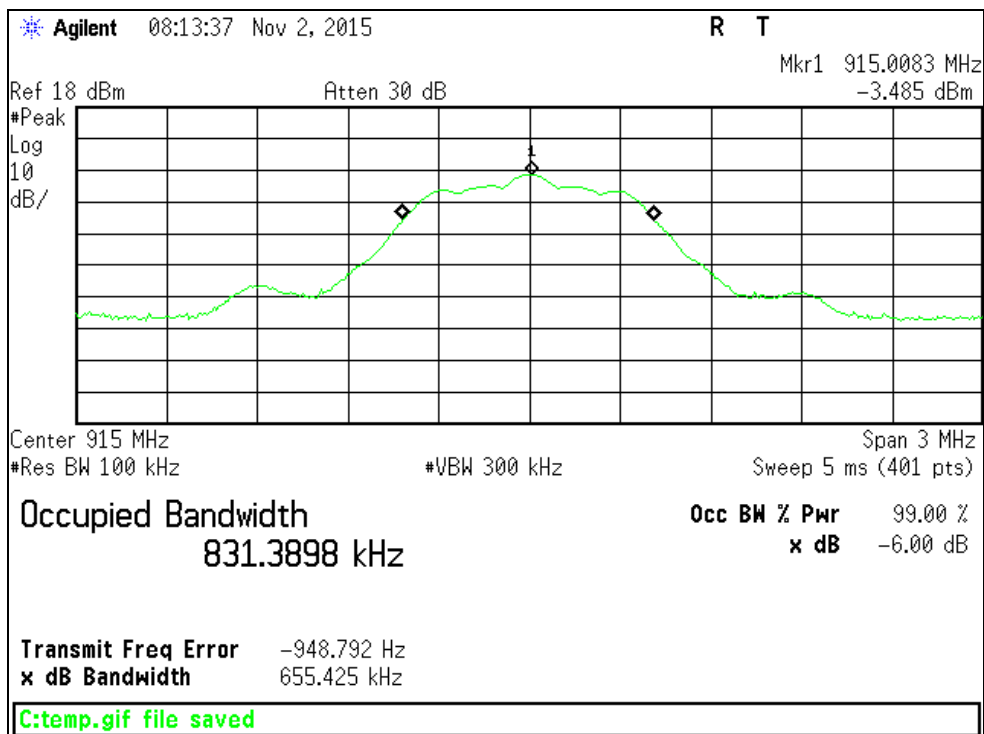

6dB Bandwidth Plot, Middle Channel

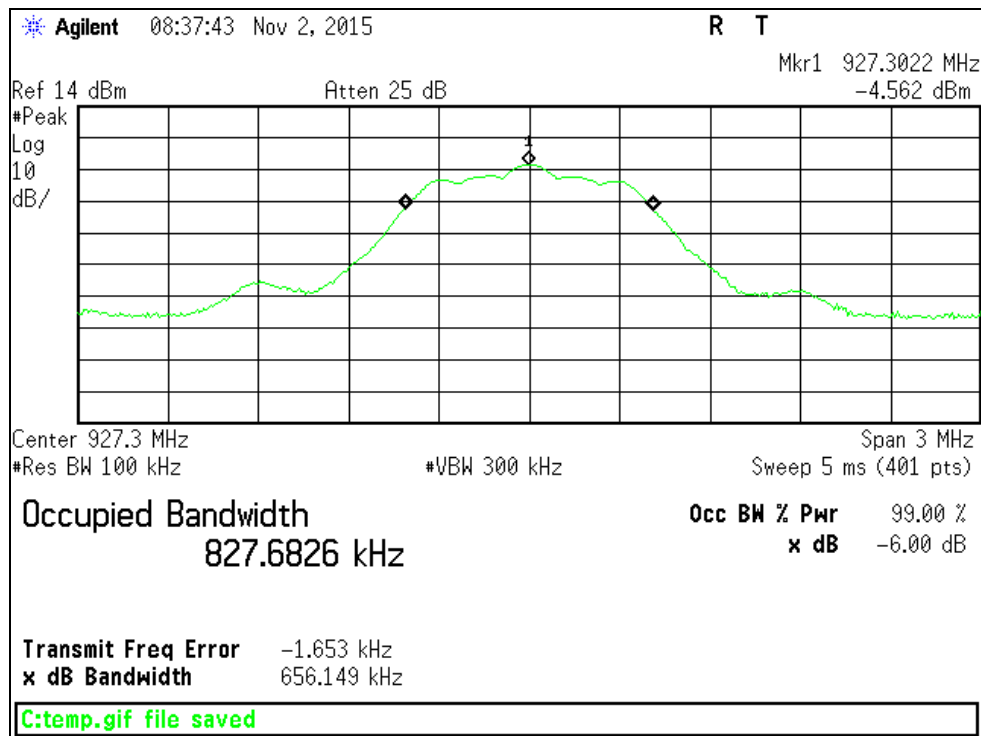

6dB Bandwidth Plot, High Channel

Fundamental Emission Output Power LIMIT

Conducted Output Power
1W = 30dBm
[15.247(b) (3)]

MEASUREMENTS / RESULTS

Fundamental Emission Output Power										
Date: 02-Nov-15		Company: Ideal Industries, Inc.			Work Order: P3128					
Engineer: Tuyen Truong		EUT Desc: SCLINE1000			EUT Operating Voltage/Frequency: 120Vac/60Hz					
Temp: 21°C		Humidity: 38%		Pressure: 1008mbar						
Frequency Range: 902.7 - 927.3 MHz										
Notes:										
Frequency (MHz)	Reading (dBm)	Attenuation (dB)	Adjusted Reading (dBm)	FCC 15.247						
				Limit (dBm)	Margin (dB)	Result (Pass/Fail)				
				902.7	-2.17	19.55	17.38	30.0	-12.62	Pass
				915.0	-3.58	19.55	15.97	30.0	-14.03	Pass
				927.3	-4.63	19.55	14.92	30.0	-15.08	Pass
Table Result: Pass by -12.62 dB				Worst Freq: 902.7 MHz						
Test Site: CEMI1		Attenuation: 791								
Analyzer: 1510										


Rev. 10/19/2015

Spectrum Analyzers / Receivers / Preselectors Brown	Range 9kHz-26.5GHz	MN E4407B	Mfr Agilent	SN SG44210511	Asset 1510	Cat I	Calibration Due 6/30/2016	Calibrated on 6/30/2015
Preamps / Couplers Attenuators / Filters HF 20dB 50W Attenuator	Range 0.009-18 GHz	MN PE 7019-20	Mfr Pasternack	SN 1	Asset 791	Cat II	Calibration Due 7/31/2016	Calibrated on 7/31/2015
Conducted Test Sites (Mains / Telco) CEMI 1	FCC Code 719150	VCCI Code A-0015				Cat III	Calibration Due NA	Calibrated on N/A
Meteorological Meters Weather Clock (Pressure Only) TH A#2078		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1	Asset 831 2078	Cat I II	Calibration Due 3/19/2016 4/2/2016	Calibrated on 3/19/2014 4/2/2015


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.




PLOTS

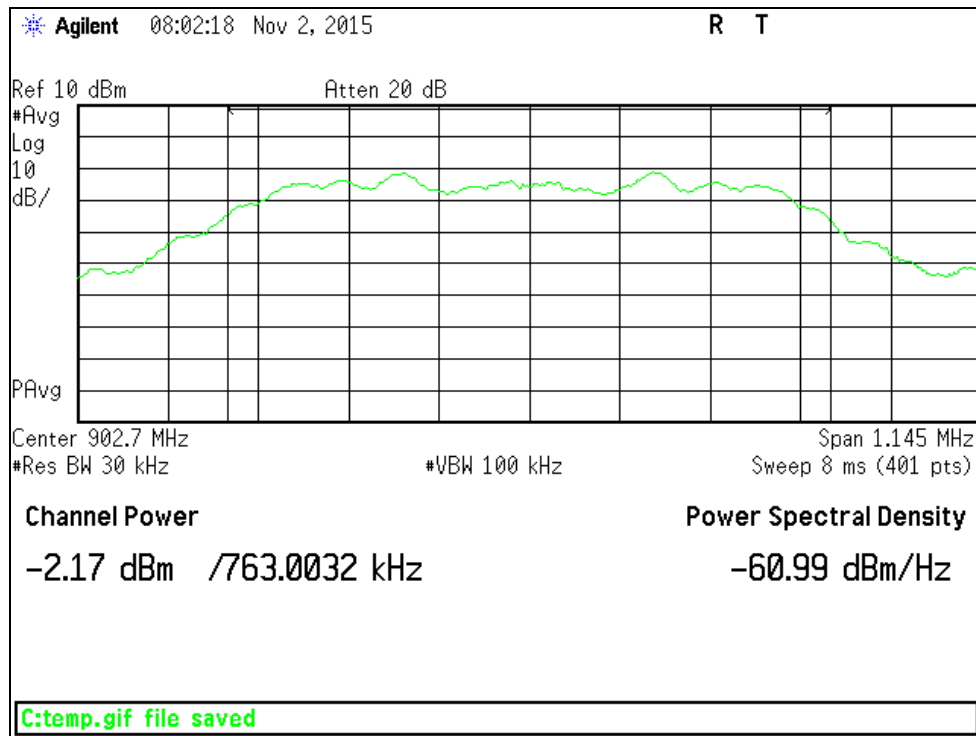

Peak Output Power, Low Channel

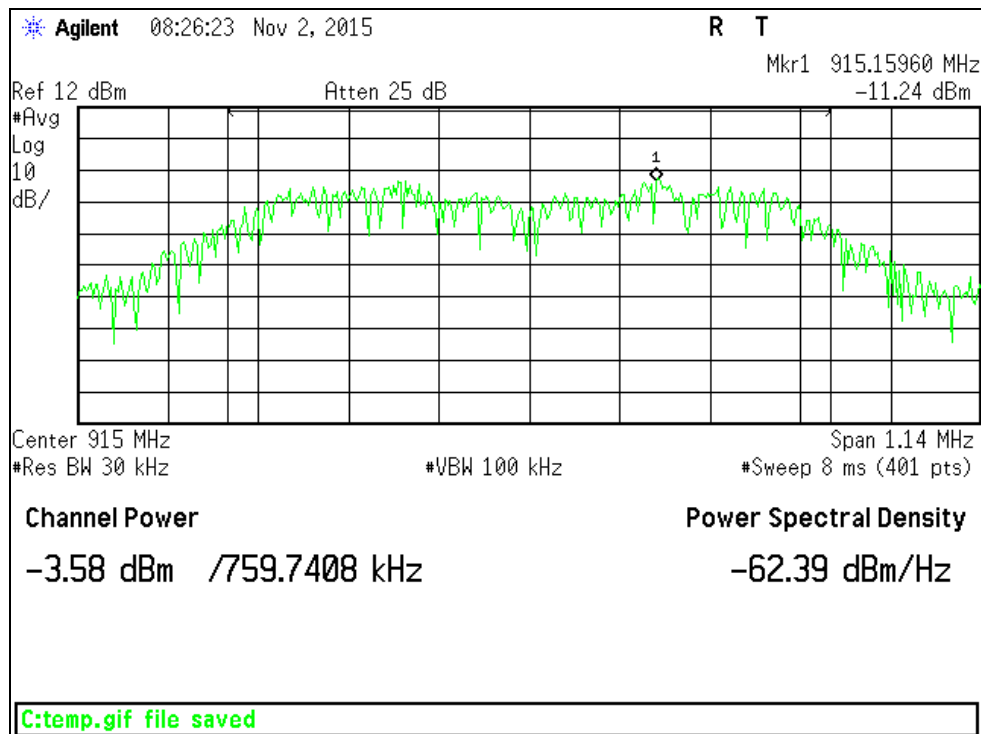

Peak Output Power, Middle Channel

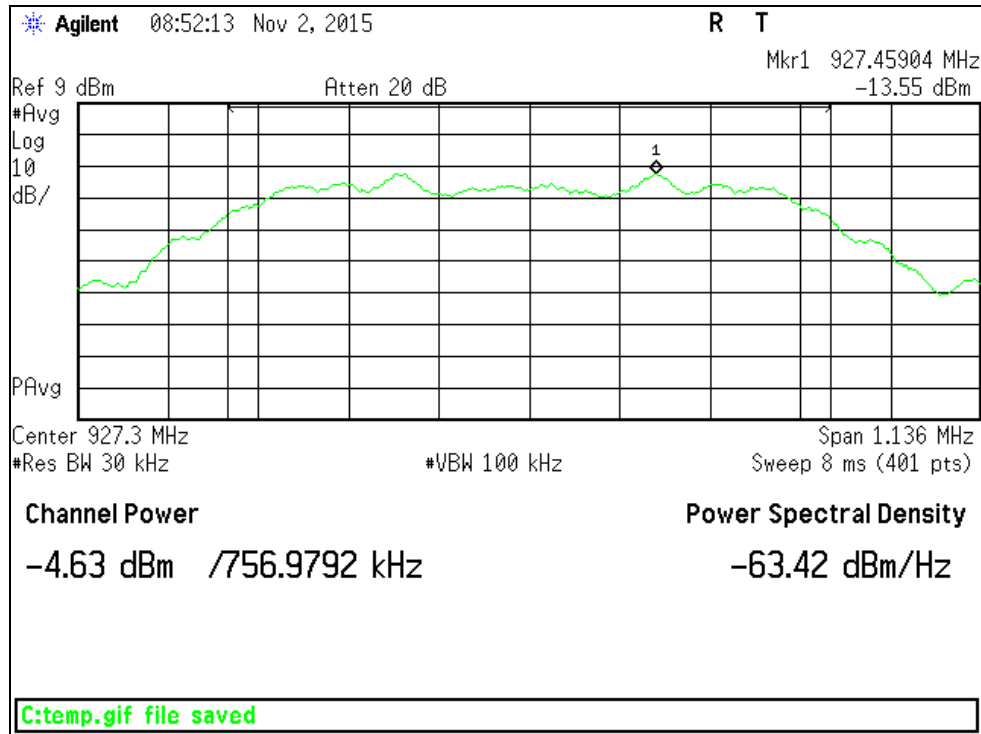

Peak Output Power, High Channel

Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
[15.247(d)]

MEASUREMENTS / RESULTS

Radiated Emissions Table												
Date: 06-Nov-15			Company: Ideal Industries, Inc.				Work Order: P3128					
Engineer: Jason Haley			EUT Desc: SCLINE1000				EUT Operating Voltage/Frequency: 120V/60Hz					
Temp: 22.2°C			Humidity: 54%				Pressure: 1006mBar					
Frequency Range: 30-1000MHz							Measurement Distance: 3 m					
Notes: Low Channel 902.7MHz, EUT in the Z-axis (Worst case)							EUT Max Freq: 928 MHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)				FCC 15.209		
										Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
Vertical	42.02	35.1	25.3	12.4	0.4	22.6				40.0	-17.4	Pass
Vertical	66.65	37.7	25.4	8.0	0.5	20.8				40.0	-19.2	Pass
Horizontal	117.34	41.5	25.3	13.7	0.6	30.5				43.5	-13.0	Pass
Horizontal	189.63	39.7	24.4	11.3	0.8	27.4				43.5	-16.1	Pass
Horizontal	243.81	41.0	25.3	11.7	0.9	28.3				46.0	-17.7	Pass
Horizontal	564.62	29.8	25.0	18.6	1.4	24.8				46.0	-21.2	Pass
Vertical	589.13	26.3	24.9	18.6	1.3	21.3				46.0	-24.7	Pass
Vertical	845.81	27.1	25.6	21.8	1.8	25.1				46.0	-20.9	Pass
Table Result: Pass							by		-13.0 dB		Worst Freq: 117.34 MHz	
Test Site: EMI Chamber 1			Cable 1: Asset #2051				Cable 2: Asset #2053			Cable 3: ---		
Analyzer: Gold			Preamp: Blue-Blk				Antenna: Red-Brown			Preselector: ---		
CSsoft Radiated Emissions Calculator v 1.017.148												
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												
Copyright Curtis-Straus LLC 2000												

Radiated Emissions Table												
Date: 06-Nov-15			Company: Ideal Industries, Inc.				Work Order: P3128					
Engineer: Jason Haley			EUT Desc: SCLINE1000				EUT Operating Voltage/Frequency: 120V/60Hz					
Temp: 22.2°C			Humidity: 54%				Pressure: 1006mBar					
Frequency Range: 30-1000MHz							Measurement Distance: 3 m					
Notes: Middle Channel 915MHz, EUT in the X-axis (worst case orientation)							EUT Max Freq: 928 MHz					
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)				FCC 15.209		
										Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
Vertical	41.66	37.0	25.3	12.7	0.4	24.8				40.0	-15.2	Pass
Vertical	65.41	36.7	25.4	7.9	0.5	19.7				40.0	-20.3	Pass
Horizontal	114.61	40.6	25.3	13.4	0.6	29.3				43.5	-14.2	Pass
Horizontal	185.55	37.6	24.3	11.0	0.8	25.1				43.5	-18.4	Pass
Horizontal	188.09	37.5	24.4	11.2	0.8	25.1				43.5	-18.4	Pass
Horizontal	248.73	37.5	25.2	11.7	0.9	24.9				46.0	-21.1	Pass
Horizontal	344.71	37.5	25.2	14.1	1.1	27.5				46.0	-18.5	Pass
Vertical	420.32	32.2	25.3	16.3	1.1	24.3				46.0	-21.7	Pass
Horizontal	564.56	29.5	25.0	18.6	1.4	24.5				46.0	-21.5	Pass
Vertical	589.07	26.3	24.9	18.6	1.3	21.3				46.0	-24.7	Pass
Table Result: Pass by -14.2 dB Worst Freq: 114.61 MHz												
Test Site: EMI Chamber 1			Cable 1: Asset #2051				Cable 2: Asset #2053			Cable 3: ---		
Analyzer: Gold			Preamp: Blue-Blk				Antenna: Red-Brown			Preselector: ---		
CSsoft Radiated Emissions Calculator v 1.017.148												
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												
Copyright Curtis-Straus LLC 2000												



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Emissions Table

Date: 06-Nov-15		Company: Ideal Industries, Inc.				Work Order: P3128			
Engineer: Jason Haley		EUT Desc: SCLINE1000				EUT Operating Voltage/Frequency: 120V/60Hz			
Temp: 22.2°C		Humidity: 54%		Pressure: 1006mBar					
Frequency Range: 30-1000MHz						Measurement Distance: 3 m			
Notes: High Channel 927.3MHz, EUT in the X-axis (worst case orientation)						EUT Max Freq: 928 MHz			
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	FCC 15.209		
							Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
vertical	34.97	30.5	25.3	17.7	0.3	23.2			
vertical	42.85	35.3	25.3	11.9	0.4	22.3			
vertical	54.22	37.0	25.4	7.3	0.5	19.4			
horizontal	115.21	40.0	25.3	13.5	0.6	28.8			
horizontal	187.86	34.7	24.4	11.2	0.8	22.3			
horizontal	249.44	35.9	25.2	11.7	0.9	23.3			
horizontal	347.91	35.3	25.1	14.2	1.1	25.5			
vertical	352.94	31.7	25.0	14.4	1.0	22.1			
horizontal	564.56	29.2	25.0	18.6	1.4	24.2			
vertical	839.24	35.1	25.6	21.7	1.8	33.0			
Table Result: Pass by -13.0 dB						Worst Freq: 839.24 MHz			
Test Site: EMI Chamber 1		Cable 1: Asset #2051				Cable 2: Asset #2053		Cable 3: ---	
Analyzer: Gold		Preamp: Blue-Blk				Antenna: Red-Brown		Preselector: ---	
CSsoft Radiated Emissions Calculator v 1.017.148						Copyright Curtis-Straus LLC 2000			
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor									

Rev.11/5/2015

Spectrum Analyzers / Receivers / Preselectors Gold	Range 100Hz-26.5 GHz	MN E4407B	Mfr Agilent	SN MY45113816	Asset 1284	Cat I	Calibration Due 4/22/2016	Calibrated on 4/22/2015
Radiated Emissions Sites EMI Chamber 1	FCC Code 719150	IC Code 2762A-6	VCCI Code A-0015	Range 30-1000MHz		Cat II	Calibration Due 3/21/2017	Calibrated on 3/21/2015
Preamps / Couplers Attenuators / Filters Blue-Black	Range 0.009-2000MHz	MN ZFL-1000-LN	Mfr CS	SN N/A	Asset 800	Cat II	Calibration Due 12/26/2015	Calibrated on 12/26/2014
Antennas Red-Brown Bilog	Range 30-2000MHz	MN JB1	Mfr Sunol	SN A0032406	Asset 1218	Cat I	Calibration Due 12/4/2016	Calibrated on 12/4/2014
Cables Asset #2051	Range 9kHz - 18GHz		Mfr Florida RF			Cat II	Calibration Due 3/8/2016	Calibrated on 3/8/2015
Asset #2053	9kHz - 18GHz		Florida RF			II	3/8/2016	3/8/2015
Meteorological Meters Weather Clock (Pressure Only) TH A#2080		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1	Asset 831 2080	Cat I II	Calibration Due 3/19/2016 4/2/2016	Calibrated on 3/19/2014 4/2/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Radiated Emissions Table

Date: 12-Nov-15		Company: Ideal Industries, Inc.						Work Order: P3128							
Engineer: Chris LoPiccolo		EUT Desc: SCLINE1000						EUT Operating Voltage/Frequency: 120V/60Hz							
Temp: 22.2°C		Humidity: 31%						Pressure: 1006mBar							
Frequency Range: 1-6 GHz								Measurement Distance: 3 m							
Notes: EUT oriented x-axis (worst case) Lo channel (902.7 MHz)								EUT Max Freq: 928 MHz							
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC 15.209 High Frequency - Peak			FCC 15.209 High Frequency - Average			
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
V	1015.0	35.46	22.1	20.8	24.8	2.3	41.8	28.4	74.0	-32.2	Pass	54.0	-25.6	Pass	
V	1805.4	39.27	27.8	18.8	27.1	3.0	50.6	39.1	74.0	-23.4	Pass	54.0	-14.9	Pass	
H	1805.4	35.74	26.3	18.8	27.1	3.0	47.0	37.6	74.0	-27.0	Pass	54.0	-16.4	Pass	
V	2708.0	35.89	21.6	20.3	29.2	4.0	48.8	34.5	74.0	-25.2	Pass	54.0	-19.5	Pass	
H	2708.0	36.83	22.5	20.3	29.2	4.0	49.7	35.4	74.0	-24.3	Pass	54.0	-18.6	Pass	
H	3001.0	35.95	20.5	19.9	30.5	4.0	50.6	35.1	74.0	-23.4	Pass	54.0	-18.9	Pass	
Table Result: Pass by -14.9 dB								Worst Freq: 1805.4 MHz							
Test Site: EMI Chamber 2				Cable 1: Asset #2052				Cable 2: Asset #1784				Cable 3: ---			
Analyzer: Gold				Preamp: Asset #1517				Antenna: Black Horn				Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.148															
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															
Copyright Curtis-Straus LLC 2000															

Radiated Emissions Table

Date: 12-Nov-15		Company: Ideal Industries, Inc.				Work Order: P3128									
Engineer: Chris LoPiccolo		EUT Desc: SCLINE1000				EUT Operating Voltage/Frequency: 120V/60Hz									
Temp: 22.2°C		Humidity: 31%				Pressure: 1006mBar									
Frequency Range: 1-6 GHz						Measurement Distance: 3 m									
Notes: EUT oriented x-axis (worst case) Mid Channel (915 MHz)						EUT Max Freq: 928 MHz									
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC 15.209 High Frequency - Peak			FCC 15.209 High Frequency - Average			
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
H	1000.0	34.51	21.5	20.9	24.6	2.2	40.4	27.4	74.0	-33.6	Pass	54.0	-26.6	Pass	
V	1830.0	36.06	26.4	18.8	27.2	3.0	47.5	37.8	74.0	-26.5	Pass	54.0	-16.2	Pass	
H	1830.0	35.21	22.9	18.8	27.2	3.0	46.6	34.3	74.0	-27.4	Pass	54.0	-19.7	Pass	
V	2745.0	36.04	22.1	20.2	29.1	4.1	49.0	35.1	74.0	-25.0	Pass	54.0	-18.9	Pass	
H	2745.0	35.76	21.7	20.2	29.1	4.1	48.8	34.7	74.0	-25.2	Pass	54.0	-19.3	Pass	
V	3001.0	35.07	19.9	19.9	30.5	4.0	49.7	34.5	74.0	-24.3	Pass	54.0	-19.5	Pass	
Table Result:				Pass		by		-16.2 dB		Worst Freq:				1830.0 MHz	
Test Site: EMI Chamber 2				Cable 1: Asset #2052				Cable 2: Asset #1784				Cable 3: ---			
Analyzer: Gold				Preamp: Asset #1517				Antenna: Black Horn				Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.148														Copyright Curtis-Straus LLC 2006	
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															

Radiated Emissions Table

Date: 12-Nov-15		Company: Ideal Industries, Inc.				Work Order: P3128									
Engineer: Chris LoPiccolo		EUT Desc: SCLINE1000				EUT Operating Voltage/Frequency: 120V/60Hz									
Temp: 22.2°C		Humidity: 31%				Pressure: 1006mBar									
Frequency Range: 1-6 GHz						Measurement Distance: 3 m									
Notes: EUT oriented x-axis (worst case) Hi Channel (927.3 MHz)						EUT Max Freq: 928 MHz									
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC 15.209 High Frequency - Peak			FCC 15.209 High Frequency - Average			
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
V	1855.0	35.15	23.9	18.8	27.3	3.1	46.8	35.5	74.0	-27.2	Pass	54.0	-18.5	Pass	
H	1855.0	34.6	22.5	18.8	27.3	3.1	46.2	34.1	74.0	-27.8	Pass	54.0	-19.9	Pass	
H	2454.0	36.04	21.7	20.1	28.7	3.8	48.4	34.1	74.0	-25.6	Pass	54.0	-19.9	Pass	
V	2975.0	36.55	20.2	20.0	30.2	4.1	50.9	34.5	74.0	-23.1	Pass	54.0	-19.5	Pass	
H	3235.0	35.93	19.4	19.7	31.2	4.3	51.7	35.2	74.0	-22.3	Pass	54.0	-18.8	Pass	
V	3697.0	34.33	19.9	19.1	32.1	4.2	51.5	37.1	74.0	-22.5	Pass	54.0	-16.9	Pass	
Table Result:						Pass		by		-16.9 dB		Worst Freq:		3697.0 MHz	
Test Site: EMI Chamber 2				Cable 1: Asset #2052				Cable 2: Asset #1784				Cable 3: ---			
Analyzer: Gold				Preamp: Asset #1517				Antenna: Black Horn				Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.148															
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															
Copyright Chris-Strus LLC 2000															

BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Rev. 11/5/2015

Spectrum Analyzers / Receivers / Preselectors
Gold

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	4/22/2016	4/22/2015

Radiated Emissions Sites
EMI Chamber 2

FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	Calibrated on
719150	2762A-7	A-0015	1-18GHz	I	4/29/2017	4/29/2015

Preamps / Couplers Attenuators / Filters
1517 HF Preamp

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1-20GHz	CS	CS	N/A	1517	II	8/6/2016	8/6/2015

Antennas
Black Horn

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1-18GHz	3115	EMCO	9703-5148	56	I	8/21/2016	8/21/2014

Meteorological Meters
Weather Clock (Pressure Only)
TH A#2081

MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
HTC-1	HDE		2081	II	4/2/2016	4/2/2015

CablesAsset #1784
Asset #2052

Range	Mfr	Cat	Calibration Due	Calibrated on
9kHz - 18GHz	Florida RF	II	3/20/2016	3/20/2015
9kHz - 18GHz	Florida RF	II	3/8/2016	3/8/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Radiated Emissions Table

Date: 06-Nov-15		Company: Ideal Industries, Inc.				Work Order: P3128								
Engineer: Jason Haley		EUT Desc: SCLINE1000				EUT Operating Voltage/Frequency: 120V/60Hz								
Temp: 22.2°C		Humidity: 54%				Pressure: 1006mBar								
Frequency Range: 6-10GHz						Measurement Distance: 1 m								
Notes: EUT in the X-axis (worst case orientation). All Noise Floor readings.						EUT Max Freq:								
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC 15.209 High Frequency - Peak			FCC 15.209 High Frequency - Average		
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
V Low Channel	6314.0	29.23	16.7	16.2	35.6	5.8	54.4	41.9	83.5	-29.1	Pass	63.5	-21.6	Pass
H Mid Channel	6405.0	27.3	16.6	16.0	35.5	5.9	52.7	42.0	83.5	-30.8	Pass	63.5	-21.5	Pass
Horz hi channel	6496.0	27.85	16.3	16.1	35.5	5.9	53.2	41.6	83.5	-30.3	Pass	63.5	-21.9	Pass
H Low Channel	7216.0	28.9	17.5	15.9	37.6	5.8	56.4	45.0	83.5	-27.1	Pass	63.5	-18.5	Pass
H Mid Channel	7320.0	27.6	17.2	15.9	37.9	5.8	55.4	45.0	83.5	-28.1	Pass	63.5	-18.5	Pass
Vert Hi channel	7424.0	28.7	16.7	15.9	37.9	5.7	56.4	44.4	83.5	-27.1	Pass	63.5	-19.1	Pass
H Low Channel	8118.0	28.65	16.3	15.9	37.7	5.8	56.3	43.9	83.5	-27.2	Pass	63.5	-19.6	Pass
V Mid Channel	8235.0	27.16	16.5	16.0	37.8	5.8	54.8	44.1	83.5	-28.7	Pass	63.5	-19.4	Pass
Horz hi channel	8352.0	28.56	16.2	16.0	37.9	5.9	56.4	44.0	83.5	-27.1	Pass	63.5	-19.5	Pass
V Low Channel	9020.0	30.08	16.6	15.8	38.5	6.0	58.8	45.3	83.5	-24.7	Pass	63.5	-18.2	Pass
H Mid Channel	9150.0	27.0	16.5	15.7	38.3	6.1	55.7	45.2	83.5	-27.8	Pass	63.5	-18.3	Pass
Vert Hi channel	9280.0	28.79	15.9	15.6	38.3	6.1	57.6	44.7	83.5	-25.9	Pass	63.5	-18.8	Pass
H Low Channel	9922.0	29.27	15.9	14.9	39.2	6.7	60.3	46.9	83.5	-23.2	Pass	63.5	-16.6	Pass
Table Result:		Pass by -16.6 dB				Worst Freq:				9922.0 MHz				
Test Site: EMI Chamber 1		Cable 1: Asset #2051				Cable 2: Asset #2053				Cable 3: ---				
Analyzer: Gold		Preamp: Brown				Antenna: Black Horn				Preselector: ---				
CSsoft Radiated Emissions Calculator v 1.017.148														
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														
Copyright Curtis-Straus LLC 2006														

Rev. 11/5/2015

Spectrum Analyzers / Receivers / Preselectors
Gold

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	4/22/2016	4/22/2015

Radiated Emissions Sites
EMI Chamber 1

FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	Calibrated on
719150	2762A-6	A-0015	30-1000MHz	II	3/21/2017	3/21/2015

Preamps / Couplers Attenuators / Filters
Brown

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1-10GHz	CS	CS	N/A	1523	II	4/9/2016	10/8/2015

Antennas
Black Horn

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1-18GHz	3115	EMCO	9703-5148	56	I	8/21/2016	8/21/2014

CablesAsset #2051
Asset #2053

Range	Mfr	Cat	Calibration Due	Calibrated on
9kHz - 18GHz	Florida RF	II	3/8/2016	3/8/2015
9kHz - 18GHz	Florida RF	II	3/8/2016	3/8/2015

Meteorological Meters
Weather Clock (Pressure Only)
TH A#2080

MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
HTC-1	HDE		2080	II	4/2/2016	4/2/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Conducted Spurious Emissions

LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth that contains the highest level of desired power based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be **30 dB** instead of 20 dB ...


[15.247(d)]

MEASUREMENTS / RESULTS

Band Edge Measurements


Conducted Band Edge			
Date: 02-Nov-15		Company: Ideal Industries, Inc.	
Engineer: Tuyen Truong		Work Order: P3128	
Temp: 21°C		EUT Desc: SCLINE1000	
Humidity: 38%		EUT Operating Voltage/Frequency: 120Vac/60Hz	
Pressure: 1008mbar			
Frequency Range: 902-928 MHz			
Test Site: CEM11		Attenuation: 791	
Analyzer: 1510			

PLOTS

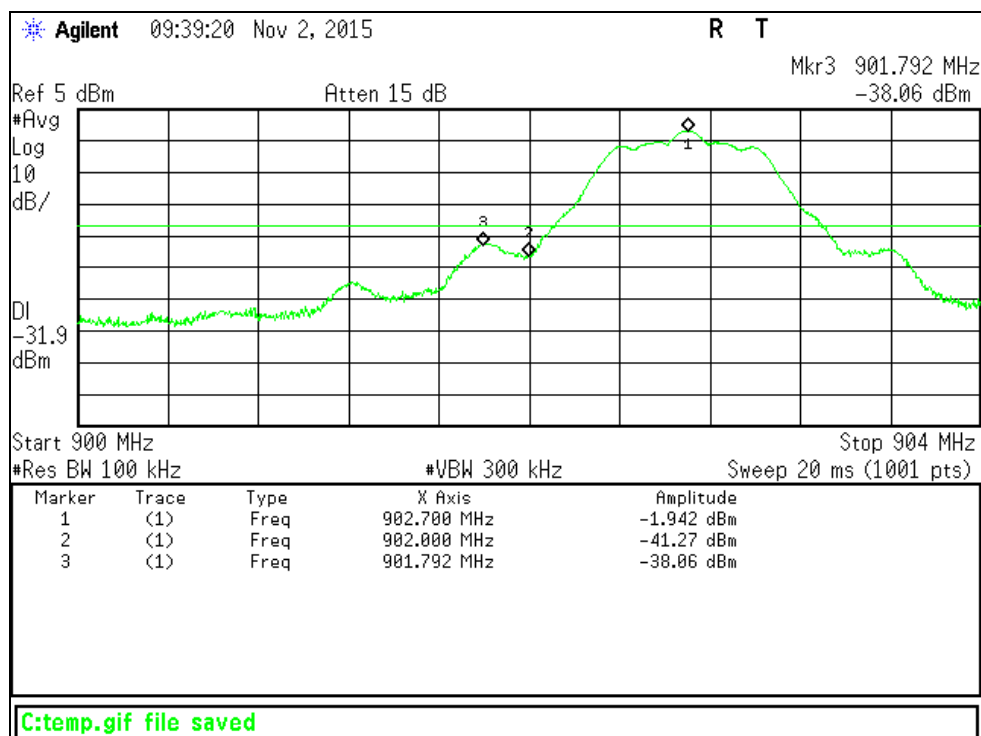


Band Edge, Lower Channel Overview




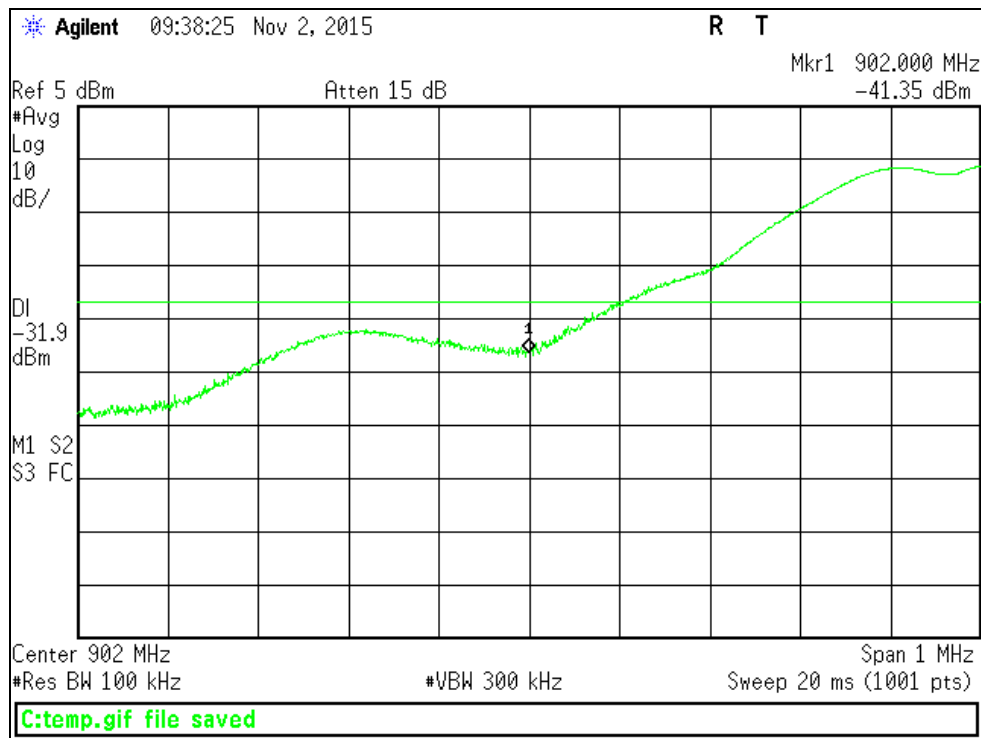

Band Edge, Lower Channel Zoomed in

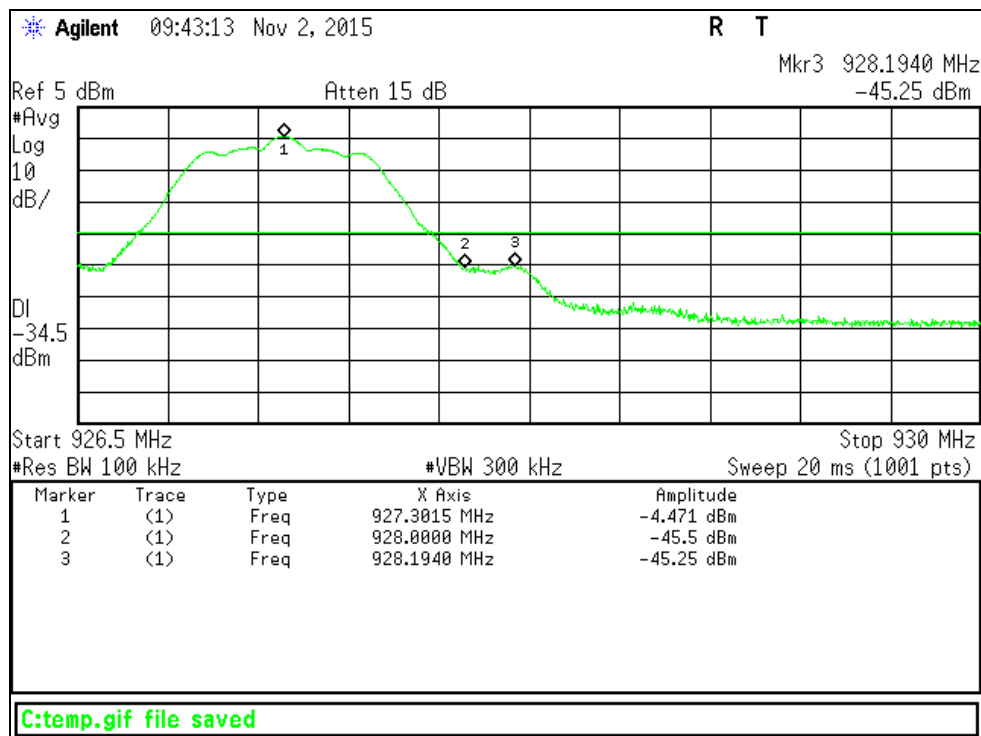

Band Edge, Upper Channel Overview

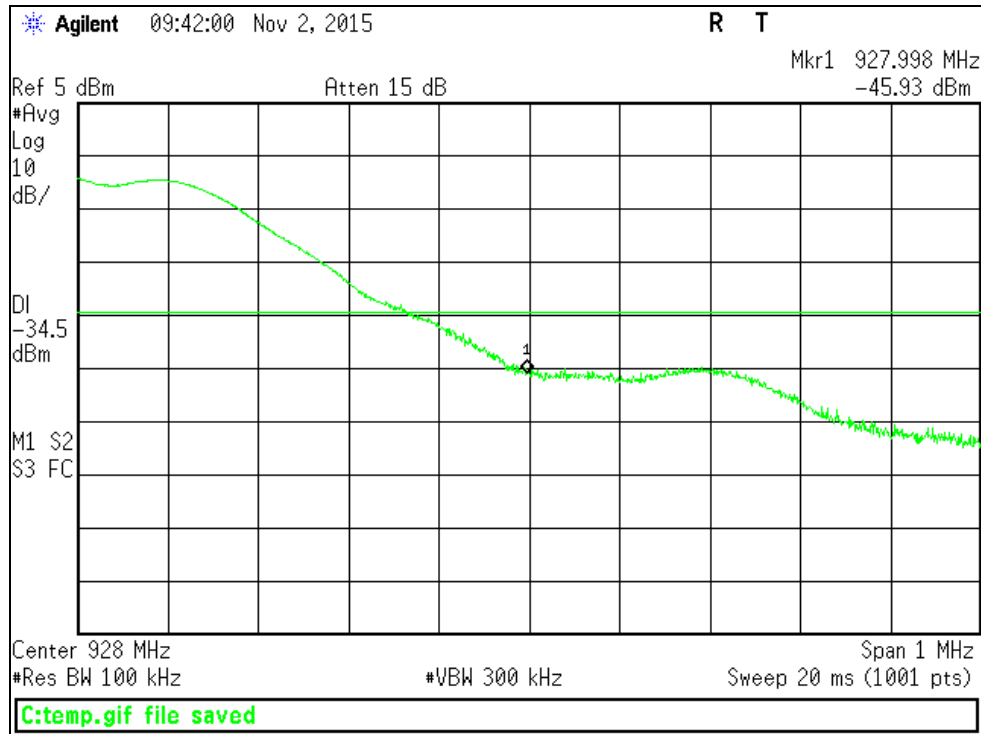

Band Edge, Upper Channel Zoomed in

Rev. 10/19/2015

Spectrum Analyzers / Receivers / Preselectors
Brown

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	6/30/2016	6/30/2015

Preamps / Couplers Attenuators / Filters
HF 20dB 50W Attenuator

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/31/2016	7/31/2015

Conducted Test Sites (Mains / Telco)
CEMI 1

FCC Code	VCCI Code	Cat	Calibration Due	Calibrated on
719150	A-0015	III	NA	N/A

Meteorological Meters
Weather Clock (Pressure Only)
TH A#2078

MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
HTC-1	HDE		2078	II	4/2/2016	4/2/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Conducted Spurious Emission**Conducted Spurious Emission at The Antenna Port**

Date: 29-Oct-15	Company: Ideal Industries, Inc.	Work Order: P3128
Engineer: Jason Haley	EUT Desc: SCLINE1000	EUT Operating Voltage/Frequency: 120Vac/60Hz
Temp: 22°C	Humidity: 56%	Pressure: 991mBar
Frequency Range: 9 KHz to 10000 MHz		
Test Site: CEMI1	Cable: 1522	
Analyzer: Brown		

9kHz-10GHz frequency range was investigated for all 3 channels (low, middle and high) at the EUT antenna port. Except for the fundamental, all emissions were at instrument noise floor. Highest noise floor level was less than -35dBm for the entire frequency range, which is more than 30dB below the fundamental.

Rev. 10/19/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	6/30/2016	6/30/2015
Conducted Test Sites (Mains / Telco)	FCC Code	VCCI Code				Cat	Calibration Due	Calibrated on
CEMI 1	719150	A-0015				III	NA	N/A
Cables	Range	Mfr				Cat	Calibration Due	Calibrated on
Asset #1522	9kHz - 18GHz	Florida RF				II	2/15/2016	2/15/2015
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	egon Scienti	C3166-1	831	I	3/19/2016	3/19/2014
TH A#2078		HTC-1	HDE		2078	II	4/2/2016	4/2/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Power Spectral Density

LIMIT

...the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.
[15.247(e)]

MEASUREMENTS / RESULTS

Power Spectral Density						
Date: 02-Nov-15		Company: Ideal Industries, Inc.			Work Order: P3128	
Engineer: Tuyen Truong		EUT Desc: SCLINE1000			EUT Operating Voltage/Frequency: 120Vac/60Hz	
Temp: 21°C		Humidity: 38%		Pressure: 1008mbar		
Frequency Range: 902.7 - 927.3 MHz						
Notes:						
Frequency (MHz)	Reading (dBm)	Attenuation (dB)	Adjusted Reading (dBm)	FCC 15.247		
				Limit (dBm)	Margin (dB)	Result (Pass/Fail)
902.7	-15.56	19.55	3.99	8.0	-4.01	Pass
915.0	-16.53	19.55	3.02	8.0	-4.98	Pass
927.3	-18.23	19.55	1.32	8.0	-6.68	Pass
Table Result: Pass by -4.01 dB				Worst Freq: 902.7 MHz		
Test Site: CEMI1		Attenuation: 791				
Analyzer: 1510						

Rev. 10/19/2015

Spectrum Analyzers / Receivers / Preselectors

Brown

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	6/30/2016	6/30/2015

Preamps / Couplers Attenuators / Filters

HF 20dB 50W Attenuator

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/31/2016	7/31/2015

Conducted Test Sites (Mains / Telco)

CEMI 1

FCC Code	VCCI Code	Cat	Calibration Due	Calibrated on
719150	A-0015	III	NA	N/A

Meteorological Meters


Weather Clock (Pressure Only)
TH A#2078

MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
HTC-1	HDE		2078	II	4/2/2016	4/2/2015


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.




PLOTS

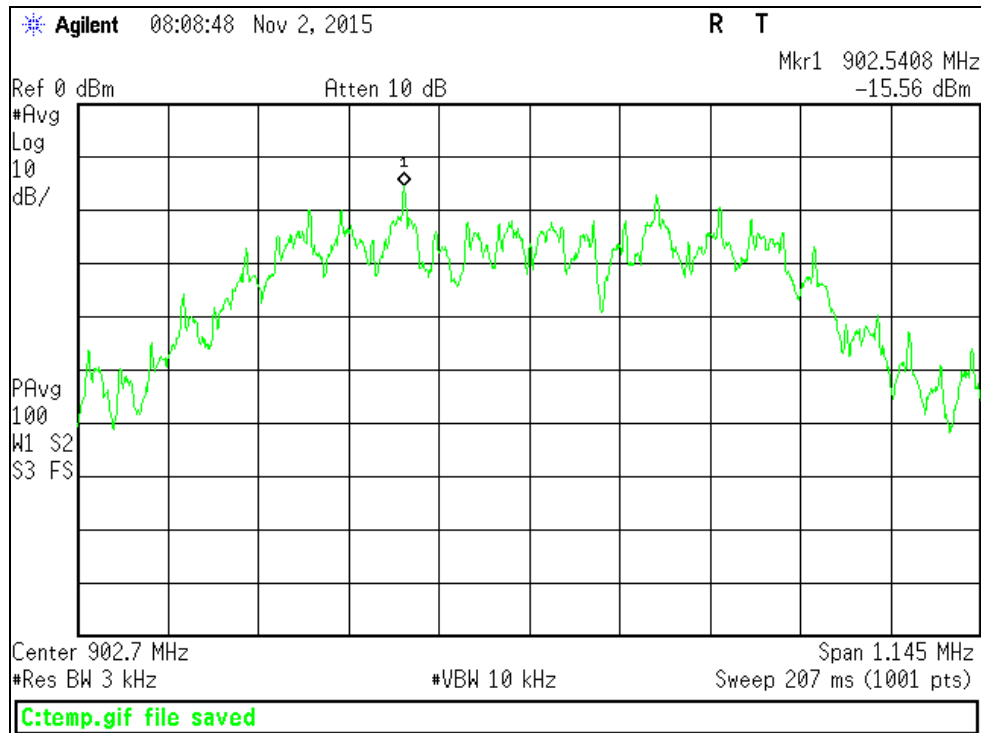

Power Spectral Density, Low Channel

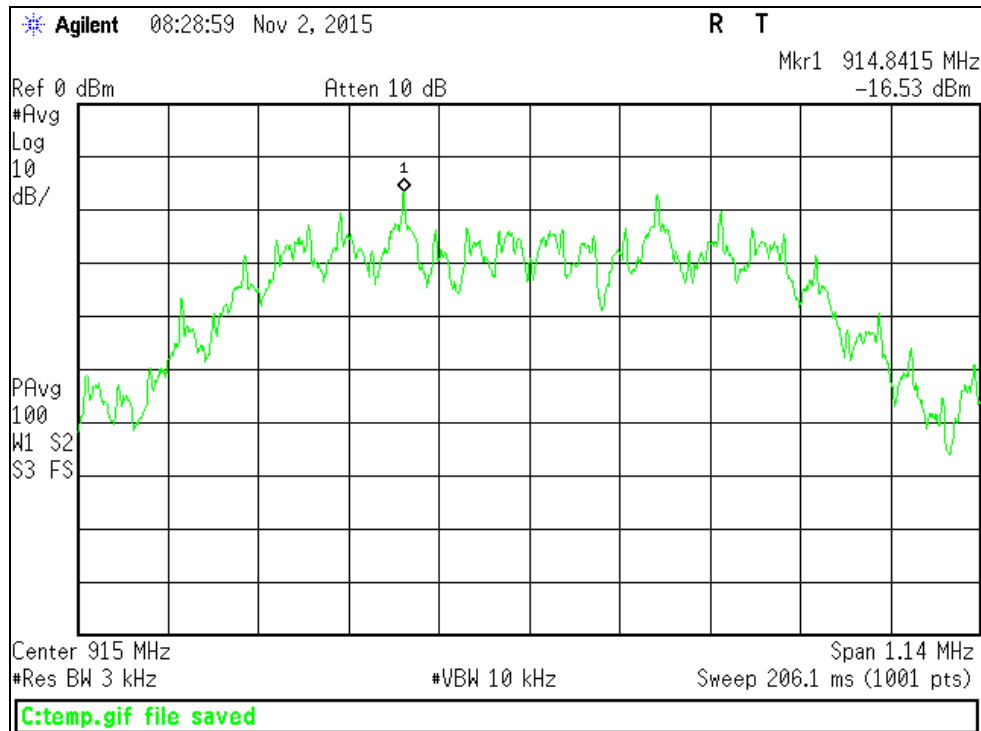

Power Spectral Density, Middle Channel

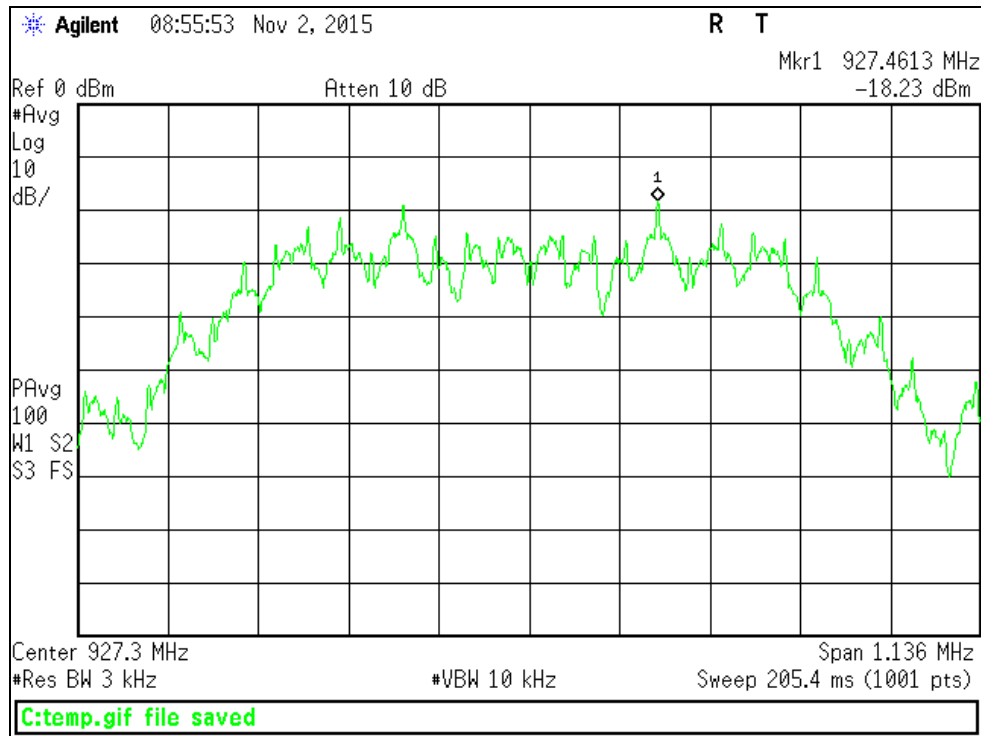

Power Spectral Density, High Channel

AC Line Conducted Emissions LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

AC Conducted Emissions Data Table														
Date: 26-Oct-15 Engineer: Tuyen Truong Temp: 21.9 °C Notes:							Company: Ideal Industries, Inc. EUT Desc: SCLINE1000 Humidity: 35%					Work Order: P3128 Pressure: 1021 mBar		
Frequency Range: 0.15 - 30 MHzEUT Input Voltage/Frequency: 120 Vac / 60Hz														
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC 15.207			FCC 15.207		
	QP1 (dBμV)	QP2 (dBμV)	AVG1 (dBμV)	AVG2 (dBμV)	L1 (dB)	L2 (dB)			QP Limit (dBμV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBμV)	Margin (dB)	Result (Pass/Fail)
0.37	18.9	15.4	18.9	15.4	0.0	0.0	-0.1	-20.3	58.4	-19.1	Pass	48.4	-9.2	Pass
0.77	16.8	13.5	16.8	13.5	0.0	0.0	-0.1	-20.3	56.0	-18.7	Pass	46.0	-8.8	Pass
1.14	19.4	15.5	14.1	15.5	-0.1	-0.1	-0.1	-20.3	56.0	-16.2	Pass	46.0	-10.0	Pass
7.50	12.7	13.0	12.7	13.0	-0.1	-0.1	-0.2	-20.3	60.0	-26.4	Pass	50.0	-16.4	Pass
18.61	16.5	16.0	16.5	16.0	-0.2	-0.2	-0.3	-20.3	60.0	-22.8	Pass	50.0	-12.7	Pass
21.44	12.9	11.7	12.9	11.7	-0.2	-0.2	-0.3	-20.3	60.0	-26.4	Pass	50.0	-16.4	Pass
Result: Pass					Worst Margin: -8.8 dB					Frequency: 0.766 MHz				
Measurement Device: LISN Asset 2092					Cable: CEM1-01					Spectrum Analyzer: Rental SA #5				
					Attenuator: 20dB Atten-4					Site: CEMI 6				

Rev.10/19/2015

Spectrum Analyzers / Receivers / Preselectors SA #2 (1860)	Range 9kHz-26.5 GHz	MN E7405A	Mfr Agilent	SN MY45104916	Asset 1860	Cat I	Calibration Due 7/30/2016	Calibrated on 7/30/2015
LISNs/Measurement Probes LISN Asset 2092	Range 9kHz-30MHz	MN NNLK 8121	Mfr Schwarzbeck	SN NNLK 8121-662	Asset 2092	Cat I	Calibration Due 6/30/2016	Calibrated on 6/30/2015
Conducted Test Sites (Mains / Telco) CEMI 6	FCC Code 719150		VCCI Code A-0015			Cat III	Calibration Due NA	Calibrated on N/A
Cables CEMI-01	Range 9kHz - 2GHz		Mfr C-S			Cat II	Calibration Due 9/11/2016	Calibrated on 9/11/2015
Attenuators 20dB Attenuator-04	Range 9kHz-2GHz	MN	Mfr	SN N/A	Asset	Cat II	Calibration Due 7/2/2016	Calibrated on 7/2/2015
Meteorological Meters Weather Clock (Pressure Only) TH A#2078		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1	Asset 831 2078	Cat I II	Calibration Due 3/19/2016 4/2/2016	Calibrated on 3/19/2014 4/2/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



AC Conducted Emissions Data Table

Date: 26-Oct-15 Engineer: Tuyen Truong Temp: 21.9 °C Notes:						Company: Ideal Industries, Inc EUT Desc: SCLINE1000 Humidity: 35%						Work Order: P3128 Pressure: 1021 mBar					
Frequency Range: 0.15 - 30 MHz												EUT Input Voltage/Frequency: 277 Vac / 60Hz					
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC 15.207			FCC 15.207					
	QP1 (dBµV)	QP2 (dBµV)	AVG1 (dBµV)	AVG2 (dBµV)	L1 (dB)	L2 (dB)			QP Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBµV)	Margin (dB)	Result (Pass/Fail)			
0.40	23.9	17.4	16.5	17.3	0.0	0.0	-0.1	-20.3	57.8	-13.5	Pass	47.8	-10.9	Pass			
0.78	14.1	8.9	14.1	8.9	0.0	0.0	-0.1	-20.3	56.0	-21.4	Pass	46.0	-11.4	Pass			
1.15	17.9	13.5	10.6	13.4	-0.1	-0.1	-0.1	-20.3	56.0	-17.7	Pass	46.0	-14.9	Pass			
5.24	14.2	15.2	14.2	15.2	-0.1	-0.1	-0.2	-20.3	60.0	-24.3	Pass	50.0	-14.3	Pass			
17.45	16.1	15.4	16.1	15.4	-0.2	-0.2	-0.2	-20.3	60.0	-23.2	Pass	50.0	-13.2	Pass			
21.30	13.8	12.1	13.8	12.1	-0.2	-0.2	-0.3	-20.3	60.0	-25.5	Pass	50.0	-15.5	Pass			
Result: Pass						Worst Margin: -10.9 dB						Frequency: 0.402 MHz					
Measurement Device: LISN Asset 2092						Cable: CEMI-01 Attenuator: 20dB Atten-4						Spectrum Analyzer: Rental SA #5 Site: CEMI6					

Rev.10/19/2015

Spectrum Analyzers / Receivers / Preselectors SA #2 (1860)	Range 9kHz-26.5 GHz	MN E7405A	Mfr Agilent	SN MY45104916	Asset 1860	Cat I	Calibration Due 7/30/2016	Calibrated on 7/30/2015
LISNs/Measurement Probes LISN Asset 2092	Range 9KHz-30MHz	MN NNLK 8121	Mfr Schwarzbeck	SN NNLK 8121-662	Asset 2092	Cat I	Calibration Due 6/30/2016	Calibrated on 6/30/2015
Conducted Test Sites (Mains / Telco) CEMI 6	FCC Code 719150		VCCI Code A-0015			Cat III	Calibration Due NA	Calibrated on N/A
Cables CEMI-01	Range 9kHz - 2GHz		Mfr C-S			Cat II	Calibration Due 9/11/2016	Calibrated on 9/11/2015
Attenuators 20dB Attenuator-04	Range 9kHz-2GHz	MN	Mfr	SN N/A	Asset	Cat II	Calibration Due 7/2/2016	Calibrated on 7/2/2015
Meteorological Meters Weather Clock (Pressure Only) TH A#2078		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1	Asset 831 2078	Cat I II	Calibration Due 3/19/2016 4/2/2016	Calibrated on 3/19/2014 4/2/2015

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Occupied Bandwidth

REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. [RSS-GEN 4.6.1]

MEASUREMENTS / RESULTS

99% OCCUPIED BANDWIDTH			
Date: 02-Nov-15		Company: Ideal Industries, Inc.	
Engineer: Tuyen Truong		EUT Desc: SCLINE1000	
Temp: 21°C		Humidity: 38%	
		Pressure: 1008mbar	
Frequency Range: 902.7 - 927.3 MHz			
Notes:			
Frequency (MHz)	Occupied Bandwidth Reading (KHz)		
902.7	763.0032		
915.0	759.7408		
927.3	756.9792		
Test Site: CEMI1		Attenuation: 791	
Analyzer: 1510			


Rev. 10/19/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	6/30/2016	6/30/2015
Preamplifiers / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator	0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/31/2016	7/31/2015
Conducted Test Sites (Mains / Telco)	FCC Code	VCCI Code				Cat	Calibration Due	Calibrated on
CEMI 1	719150	A-0015				III	NA	N/A
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#2078		HTC-1	HDE		2078	II	4/2/2016	4/2/2015


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.




PLOTS

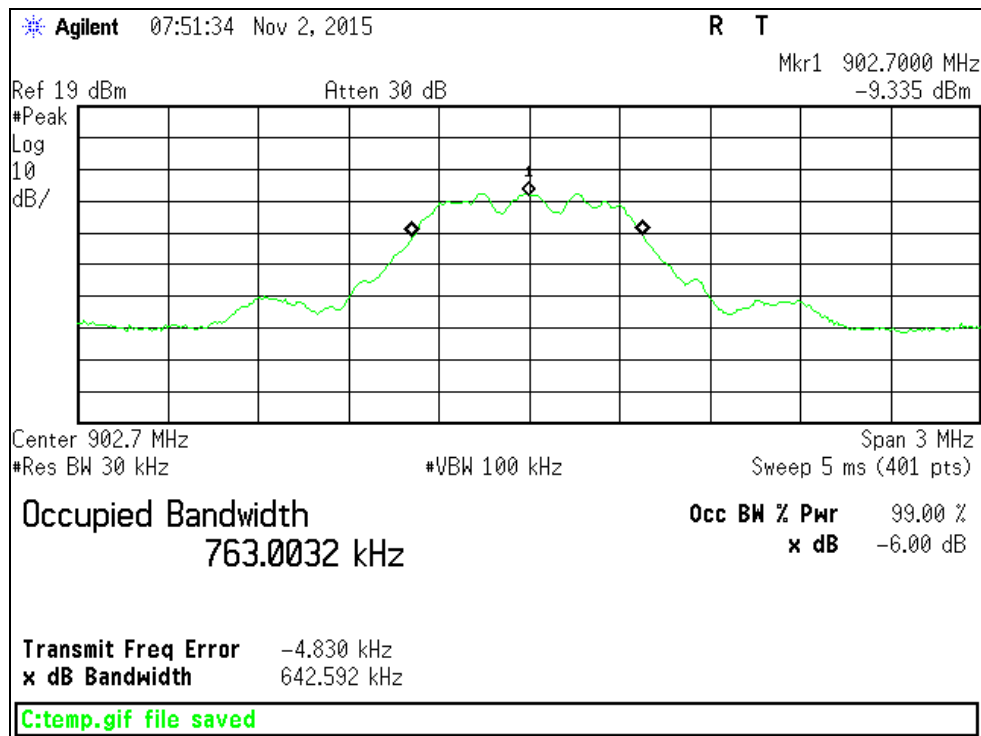

Occupied Bandwidth, Low Channel

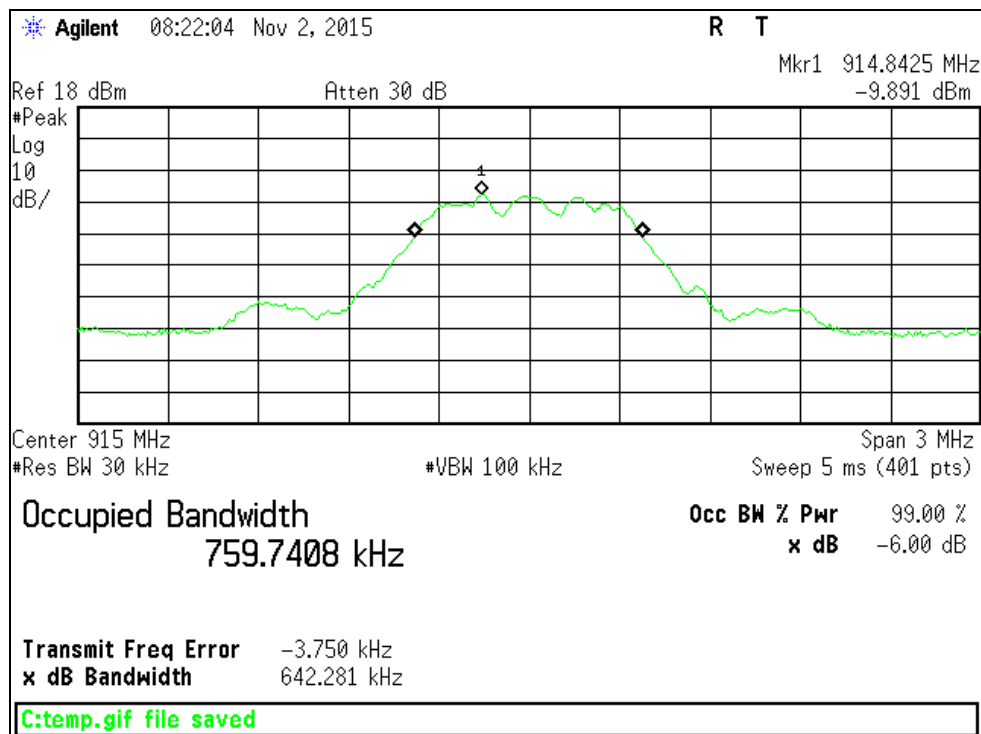

Occupied Bandwidth, Middle Channel

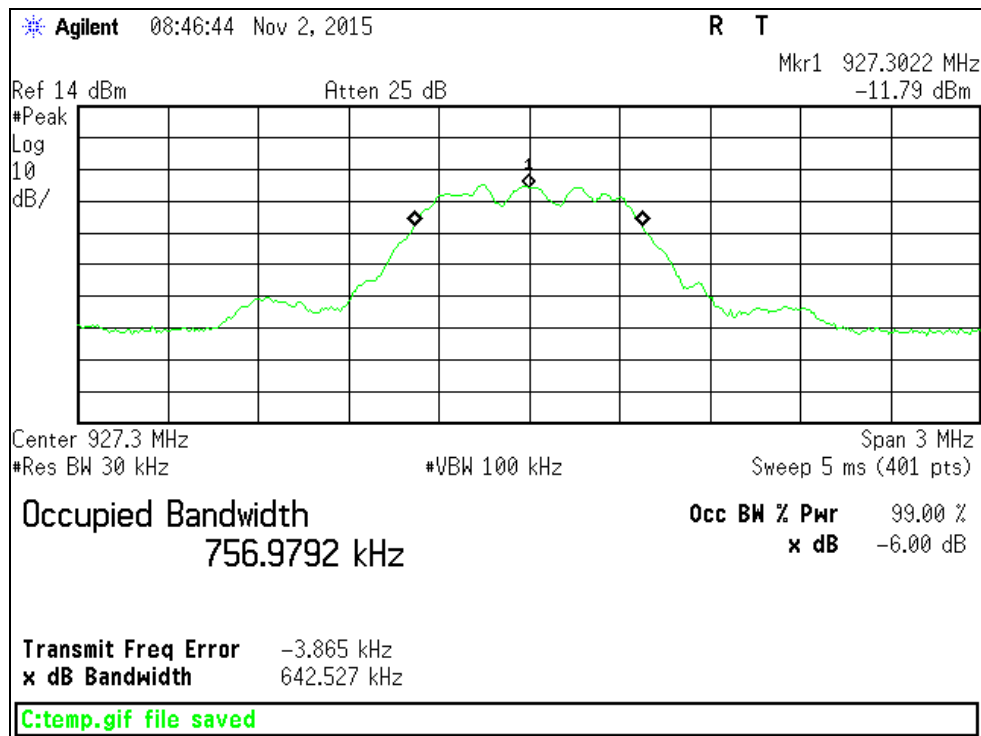

Occupied Bandwidth, High Channel

Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)	5.6dB	N/A
NIST	4.6dB	5.2dB (Ucisprr)
CISPR		
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4%	5%
	0.3dB	3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		

Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS

