



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan  
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM150600344402  
Page: 1 of 56

## FCC REPORT

**Application No:** SZEM1506003444CR  
**Applicant:** Gibson Innovations Limited  
**Manufacturer:** Gibson Innovations Limited  
**Factory:** INNOVATION SOUND TECHNOLOGY CO.,LTD  
**Product Name:** Bluetooth Headphone  
**Model No.(EUT):** Ti100  
**Add Model No.:** Ti100/XX, Ti100YY/XX (XX=00-99,YY=AA-ZZ)  
**Trade Mark:** TRAINER  
**FCC ID:** 2AANUT1100  
**Standards:** 47 CFR Part 15, Subpart C (2014)  
**Date of Receipt:** 2015-06-15  
**Date of Test:** 2015-06-24 to 2015-06-26  
**Date of Issue:** 2015-09-18

|                     |               |
|---------------------|---------------|
| <b>Test Result:</b> | <b>PASS *</b> |
|---------------------|---------------|

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.


The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 2 Version

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 00              |         | 2015-09-18 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                                                                                              |  |            |
|--------------------------|--|----------------------------------------------------------------------------------------------|--|------------|
| Authorized for issue by: |  |                                                                                              |  |            |
| Tested By                |  | <br><hr/> |  |            |
|                          |  |                                                                                              |  | 2015-06-26 |
| Prepared By              |  | <br><hr/> |  |            |
|                          |  |                                                                                              |  | 2015-09-18 |
| Checked By               |  | <br><hr/> |  |            |
|                          |  |                                                                                              |  | 2015-09-18 |
|                          |  | (Chris Zhong) /Project Engineer                                                              |  | Date       |
|                          |  | (Joyce Shi) /Clerk                                                                           |  | Date       |
|                          |  | (Eric Fu) /Reviewer                                                                          |  | Date       |



### 3 Test Summary

| Test Item                                                         | Test Requirement                                    | Test method      | Result |
|-------------------------------------------------------------------|-----------------------------------------------------|------------------|--------|
| Antenna Requirement                                               | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2009 | PASS   |
| AC Power Line Conducted Emission                                  | 47 CFR Part 15, Subpart C Section 15.207            | ANSI C63.10 2009 | PASS   |
| Conducted Peak Output Power                                       | 47 CFR Part 15, Subpart C Section 15.247 (b)(3)     | ANSI C63.10 2009 | PASS   |
| 6dB Occupied Bandwidth                                            | 47 CFR Part 15, Subpart C Section 15.247 (a)(2)     | ANSI C63.10 2009 | PASS   |
| Power Spectral Density                                            | 47 CFR Part 15, Subpart C Section 15.247 (e)        | ANSI C63.10 2009 | PASS   |
| Band-edge for RF Conducted Emissions                              | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2009 | PASS   |
| RF Conducted Spurious Emissions                                   | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2009 | PASS   |
| Radiated Spurious Emissions                                       | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2009 | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2009 | PASS   |

Remark:

Model No.: Ti100, Ti100/XX, Ti100YY/XX(XX=00-99,YY=AA-ZZ)

Only the model Ti100 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being of the model name and color of different models.



## 4 Contents

|                                                         | Page      |
|---------------------------------------------------------|-----------|
| <b>1 COVER PAGE .....</b>                               | <b>1</b>  |
| <b>2 VERSION.....</b>                                   | <b>2</b>  |
| <b>3 TEST SUMMARY .....</b>                             | <b>3</b>  |
| <b>4 CONTENTS.....</b>                                  | <b>4</b>  |
| <b>5 GENERAL INFORMATION .....</b>                      | <b>5</b>  |
| 5.1 CLIENT INFORMATION .....                            | 5         |
| 5.2 GENERAL DESCRIPTION OF EUT .....                    | 5         |
| 5.3 TEST ENVIRONMENT.....                               | 7         |
| 5.4 DESCRIPTION OF SUPPORT UNITS .....                  | 7         |
| 5.5 TEST LOCATION .....                                 | 7         |
| 5.6 TEST FACILITY .....                                 | 8         |
| 5.7 DEVIATION FROM STANDARDS .....                      | 8         |
| 5.8 ABNORMALITIES FROM STANDARD CONDITIONS.....         | 8         |
| 5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....    | 8         |
| 5.10 EQUIPMENT LIST .....                               | 9         |
| <b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>         | <b>12</b> |
| 6.1 ANTENNA REQUIREMENT.....                            | 12        |
| 6.2 CONDUCTED EMISSIONS .....                           | 13        |
| 6.3 CONDUCTED PEAK OUTPUT POWER.....                    | 17        |
| 6.4 6dB OCCUPY BANDWIDTH.....                           | 20        |
| 6.5 POWER SPECTRAL DENSITY .....                        | 23        |
| 6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....          | 26        |
| 6.7 SPURIOUS RF CONDUCTED EMISSIONS .....               | 28        |
| 6.8 RADIATED SPURIOUS EMISSION .....                    | 38        |
| 6.8.1 <i>Spurious Emissions</i> .....                   | 38        |
| 6.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY ..... | 45        |
| <b>7 PHOTOGRAPHS - EUT TEST SETUP.....</b>              | <b>55</b> |
| 7.1 CONDUCTED EMISSION .....                            | 55        |
| 7.2 RADIATED EMISSION .....                             | 55        |
| 7.3 RADIATED SPURIOUS EMISSION .....                    | 56        |
| <b>8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b> | <b>56</b> |



## 5 General Information

### 5.1 Client Information

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Applicant:               | Gibson Innovations Limited                                                                                                  |
| Address of Applicant:    | 5/F, Philips Electronics Building, .5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong, |
| Manufacturer:            | Gibson Innovations Limited                                                                                                  |
| Address of Manufacturer: | 5/F, Philips Electronics Building, .5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong, |
| Factory:                 | INNOVATION SOUND TECHNOLOGY CO., LTD                                                                                        |
| Address of Factory:      | Building 2nd/3rd/4th, Industrial Area of Huaide Cuihai Fengtang Road, Fuyong Town, Shenzhen                                 |

### 5.2 General Description of EUT

|                      |                                                        |
|----------------------|--------------------------------------------------------|
| Name:                | Bluetooth Headphone                                    |
| Model No.            | Ti100                                                  |
| Trade Mark:          | TRAINER                                                |
| Operation Frequency: | 2402MHz to 2480MHz                                     |
| Bluetooth Version:   | V4.0 dual mode                                         |
|                      | This report is for BLE mode.                           |
| Modulation Type:     | GFSK                                                   |
| Number of Channel:   | 40                                                     |
| Sample Type:         | Portable production                                    |
| Antenna Type:        | Integral                                               |
| Antenna Gain:        | 2dBi                                                   |
| Power Supply:        | Li-ion polymer battery, DC 3.7V/110mAh (Charge by USB) |



| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0                                   | 2402MHz   | 10      | 2422MHz   | 20      | 2442MHz   | 30      | 2462MHz   |
| 1                                   | 2404MHz   | 11      | 2424MHz   | 21      | 2444MHz   | 31      | 2464MHz   |
| 2                                   | 2406MHz   | 12      | 2426MHz   | 22      | 2446MHz   | 32      | 2466MHz   |
| 3                                   | 2408MHz   | 13      | 2428MHz   | 23      | 2448MHz   | 33      | 2468MHz   |
| 4                                   | 2410MHz   | 14      | 2430MHz   | 24      | 2450MHz   | 34      | 2470MHz   |
| 5                                   | 2412MHz   | 15      | 2432MHz   | 25      | 2452MHz   | 35      | 2472MHz   |
| 6                                   | 2414MHz   | 16      | 2434MHz   | 26      | 2454MHz   | 36      | 2474MHz   |
| 7                                   | 2416MHz   | 17      | 2436MHz   | 27      | 2456MHz   | 37      | 2476MHz   |
| 8                                   | 2418MHz   | 18      | 2438MHz   | 28      | 2458MHz   | 38      | 2478MHz   |
| 9                                   | 2420MHz   | 19      | 2440MHz   | 29      | 2460MHz   | 39      | 2480MHz   |

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel                    | Frequency |
|----------------------------|-----------|
| The lowest channel (CH0)   | 2402MHz   |
| The middle channel (CH19)  | 2440MHz   |
| The highest channel (CH39) | 2480MHz   |



### 5.3 Test Environment

| Operating Environment: |           |
|------------------------|-----------|
| Temperature:           | 25.0 °C   |
| Humidity:              | 52 % RH   |
| Atmospheric Pressure:  | 1005 mbar |

### 5.4 Description of Support Units

The EUT has been tested independent unit.

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

## 5.7 Deviation from Standards

None.

## 5.8 Abnormalities from Standard Conditions

None.

## 5.9 Other Information Requested by the Customer

None.





## 5.10 Equipment List

| Conducted Emission |                                    |                                    |                 |               |                              |
|--------------------|------------------------------------|------------------------------------|-----------------|---------------|------------------------------|
| Item               | Test Equipment                     | Manufacturer                       | Model No.       | Inventory No. | Cal.Due date<br>(yyyy-mm-dd) |
| 1                  | Shielding Room                     | ZhongYu Electron                   | GB-88           | SEL0042       | 2016-05-13                   |
| 2                  | LISN                               | Rohde & Schwarz                    | ENV216          | SEL0152       | 2015-10-24                   |
| 3                  | LISN                               | ETS-LINDGREN                       | 3816/2          | SEL0021       | 2016-05-13                   |
| 4                  | 8 Line ISN                         | Fischer Custom Communications Inc. | FCC-TLISN-T8-02 | SEL0162       | 2016-08-30                   |
| 5                  | 4 Line ISN                         | Fischer Custom Communications Inc. | FCC-TLISN-T4-02 | SEL0163       | 2016-08-30                   |
| 6                  | 2 Line ISN                         | Fischer Custom Communications Inc. | FCC-TLISN-T2-02 | SEL0164       | 2016-08-30                   |
| 7                  | EMI Test Receiver                  | Rohde & Schwarz                    | ESCI            | SEL0022       | 2016-05-13                   |
| 8                  | Coaxial Cable                      | SGS                                | N/A             | SEL0025       | 2016-05-13                   |
| 9                  | DC Power Supply                    | Zhao Xin                           | RXN-305D        | SEL0117       | 2015-10-24                   |
| 10                 | Humidity/<br>Temperature Indicator | Shanghai Qixiang                   | ZJ1-2B          | SEL0103       | 2015-10-24                   |
| 11                 | Barometer                          | Chang Chun                         | DYM3            | SEL0088       | 2016-05-13                   |





**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM150600344402

Page: 10 of 56

| RE in Chamber |                                    |                                          |           |               |                              |
|---------------|------------------------------------|------------------------------------------|-----------|---------------|------------------------------|
| Item          | Test Equipment                     | Manufacturer                             | Model No. | Inventory No. | Cal.Due date<br>(yyyy-mm-dd) |
| 1             | 3m Semi-Anechoic Chamber           | ETS-LINDGREN                             | N/A       | SEL0017       | 2016-05-13                   |
| 2             | EMI Test Receiver                  | Agilent Technologies                     | N9038A    | SEL0312       | 2015-09-16                   |
| 3             | EMI Test software                  | AUDIX                                    | E3        | SEL0050       | N/A                          |
| 4             | BiConiLog Antenna<br>(26-3000MHz)  | ETS-LINDGREN                             | 3142C     | SEL0015       | 2015-10-24                   |
| 5             | Double-ridged horn<br>(1-18GHz)    | ETS-LINDGREN                             | 3117      | SEL0006       | 2015-10-24                   |
| 6             | Horn Antenna<br>(18-26GHz)         | ETS-LINDGREN                             | 3160      | SEL0076       | 2015-10-24                   |
| 7             | Pre-amplifier<br>(0.1-1300MHz)     | Agilent Technologies                     | 8447D     | SEL0053       | 2016-05-13                   |
| 8             | Pre-Amplifier<br>(0.1-26.5GHz)     | Compliance<br>Directions Systems<br>Inc. | PAP-0126  | SEL0168       | 2015-10-24                   |
| 9             | Coaxial cable                      | SGS                                      | N/A       | SEL0027       | 2016-05-13                   |
| 10            | Coaxial cable                      | SGS                                      | N/A       | SEL0189       | 2016-05-13                   |
| 11            | Coaxial cable                      | SGS                                      | N/A       | SEL0121       | 2016-05-13                   |
| 12            | Coaxial cable                      | SGS                                      | N/A       | SEL0178       | 2016-05-13                   |
| 13            | Band filter                        | Amindeon                                 | 82346     | SEL0094       | 2016-05-13                   |
| 14            | Barometer                          | Chang Chun                               | DYM3      | SEL0088       | 2016-05-13                   |
| 15            | DC Power Supply                    | Zhao Xin                                 | RXN-305D  | SEL0117       | 2015-10-24                   |
| 16            | Humidity/<br>Temperature Indicator | Shanghai Qixiang                         | ZJ1-2B    | SEL0103       | 2015-10-24                   |
| 17            | Signal Generator<br>(10M-27GHz)    | Rohde & Schwarz                          | SMR27     | SEL0067       | 2016-05-13                   |
| 18            | Signal Generator                   | Rohde & Schwarz                          | SMY01     | SEL0155       | 2015-10-24                   |
| 19            | Loop Antenna                       | Beijing Daze                             | ZN30401   | SEL0203       | 2016-05-13                   |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




| RF connected test |                                       |                         |           |               |                              |
|-------------------|---------------------------------------|-------------------------|-----------|---------------|------------------------------|
| Item              | Test Equipment                        | Manufacturer            | Model No. | Inventory No. | Cal.Due date<br>(yyyy-mm-dd) |
| 1                 | DC Power Supply                       | Zhao Xin                | RXN-305D  | SEL0117       | 2015-10-24                   |
| 2                 | Humidity/<br>Temperature<br>Indicator | HYGRO                   | ZJ1-2B    | SEL0033       | 2015-10-24                   |
| 3                 | Spectrum Analyzer                     | Rohde & Schwarz         | FSP       | SEL0154       | 2015-10-24                   |
| 4                 | Coaxial cable                         | SGS                     | N/A       | SEL0178       | 2016-05-13                   |
| 5                 | Coaxial cable                         | SGS                     | N/A       | SEL0179       | 2016-05-13                   |
| 6                 | Barometer                             | ChangChun               | DYM3      | SEL0088       | 2016-05-13                   |
| 7                 | Signal Generator                      | Rohde & Schwarz         | SML03     | SEL0068       | 2016-04-25                   |
| 8                 | Band filter                           | amideon                 | 82346     | SEL0094       | 2016-05-13                   |
| 9                 | POWER METER                           | R & S                   | NRVS      | SEL0144       | 2015-10-24                   |
| 10                | Attenuator                            | Beijin feihang taida    | TST-2-6dB | SEL0205       | 2016-04-25                   |
| 11                | Power<br>Divider(splitter)            | Agilent<br>Technologies | 11636B    | SEL0130       | 2015-10-24                   |


Note: The calibration interval is one year, all the instruments are valid.

## 6 Test results and Measurement Data

### 6.1 Antenna Requirement
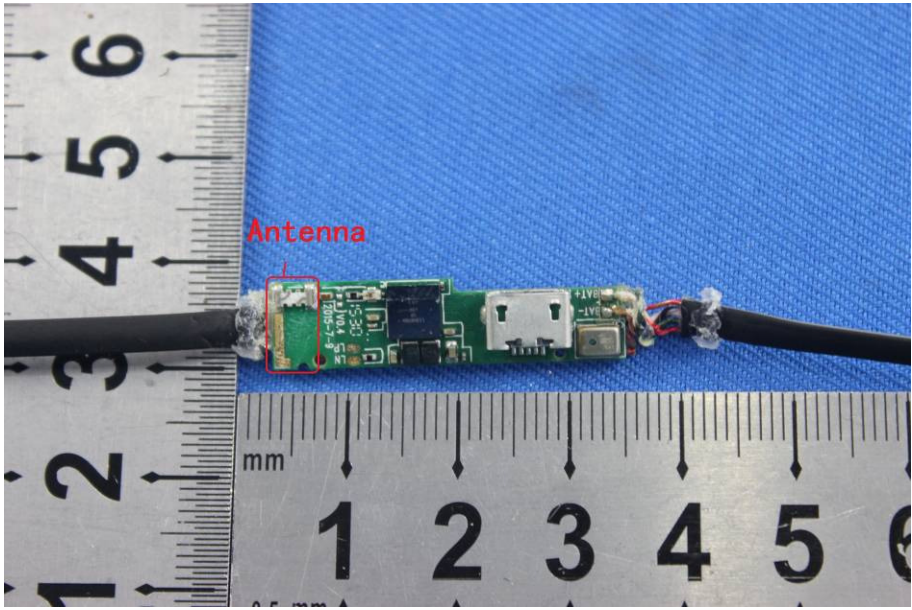
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 47 CFR Part 15C Section 15.203 /247(c)                                              |
| <p>15.203 requirement:<br/> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                                                                     |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |

## 6.2 Conducted Emissions
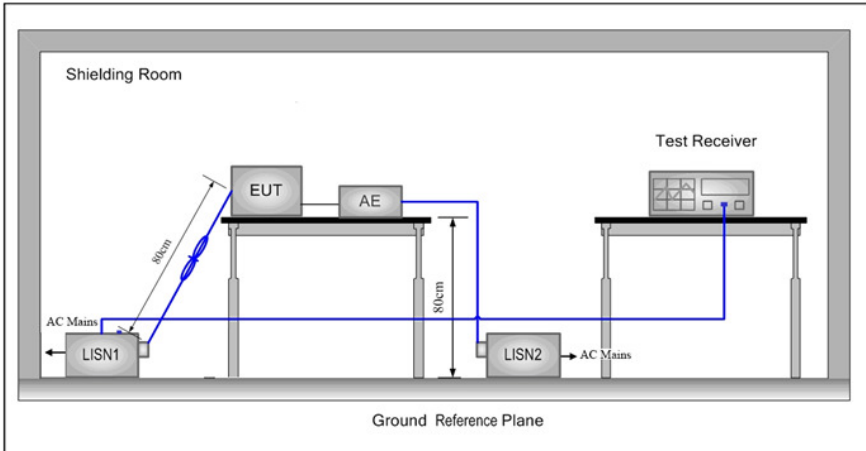
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |           |
| Test Method:                                     | ANSI C63.10: 2009                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Test Procedure:                                  | <ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.</li> </ol> |              |           |
| Test Setup:                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

Report No.: SZEM150600344402

Page: 14 of 56

|                   |                                                                  |
|-------------------|------------------------------------------------------------------|
| Test Mode:        | Transmitting with GFSK modulation.<br>Charge +Transmitting mode. |
| Instruments Used: | Refer to section 5.10 for details.                               |
| Test Results:     | Pass                                                             |




## Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

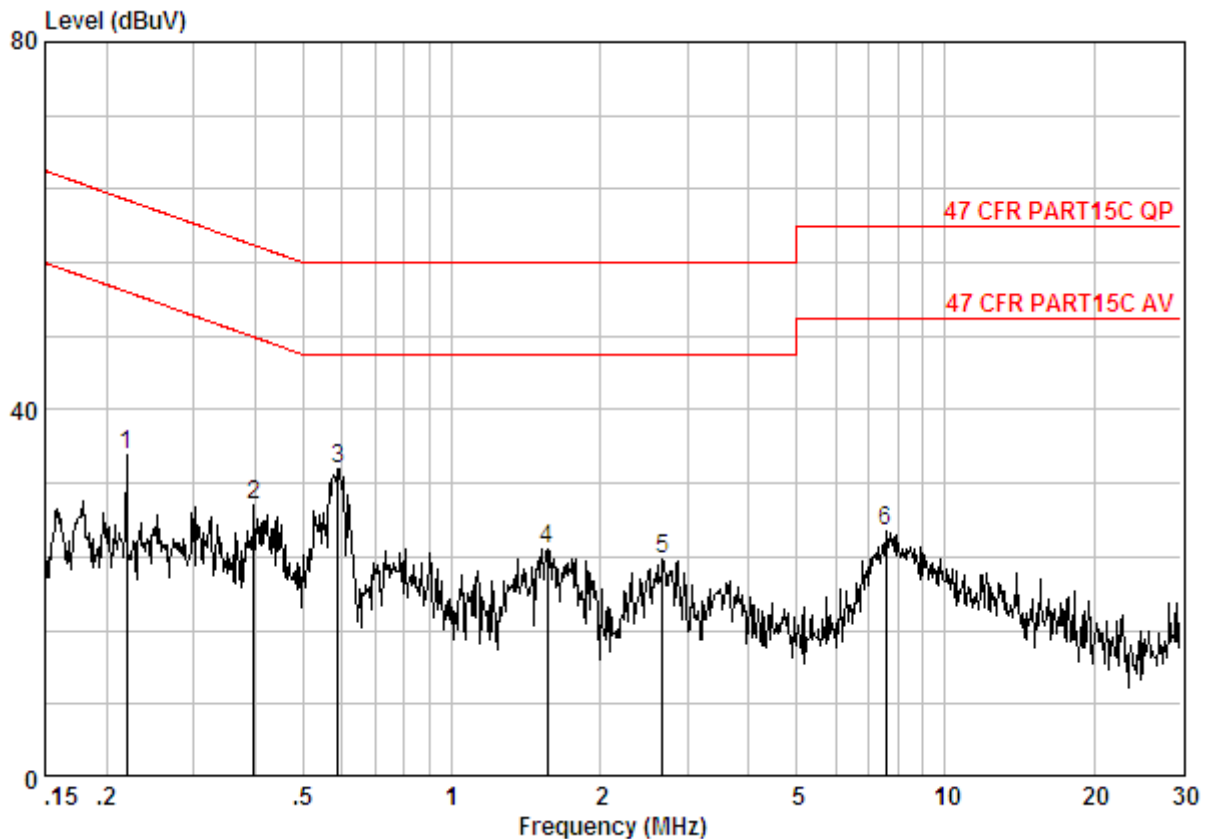


Site : Shielding Room  
Condition : 47 CFR PART15C AV CE LINE  
Job NO. : 3444CR  
Test Mode : AC charge + TX mode

|     | Freq    | Cable Loss | LISN Factor | Read Level | Limit Line | Over Limit | Remark      |
|-----|---------|------------|-------------|------------|------------|------------|-------------|
|     | MHz     | dB         | dB          | dBuV       | dBuV       | dB         |             |
| 1   | 0.21967 | 0.02       | 9.83        | 25.20      | 35.05      | 52.83      | -17.78 Peak |
| 2   | 0.39763 | 0.01       | 9.85        | 19.79      | 29.65      | 47.90      | -18.25 Peak |
| 3 @ | 0.58851 | 0.01       | 9.87        | 23.75      | 33.63      | 46.00      | -12.37 Peak |
| 4   | 1.560   | 0.02       | 9.93        | 14.91      | 24.86      | 46.00      | -21.14 Peak |
| 5   | 2.678   | 0.02       | 10.00       | 13.66      | 23.68      | 46.00      | -22.32 Peak |
| 6   | 7.566   | 0.01       | 10.15       | 16.66      | 26.82      | 50.00      | -23.18 Peak |





Neutral line:

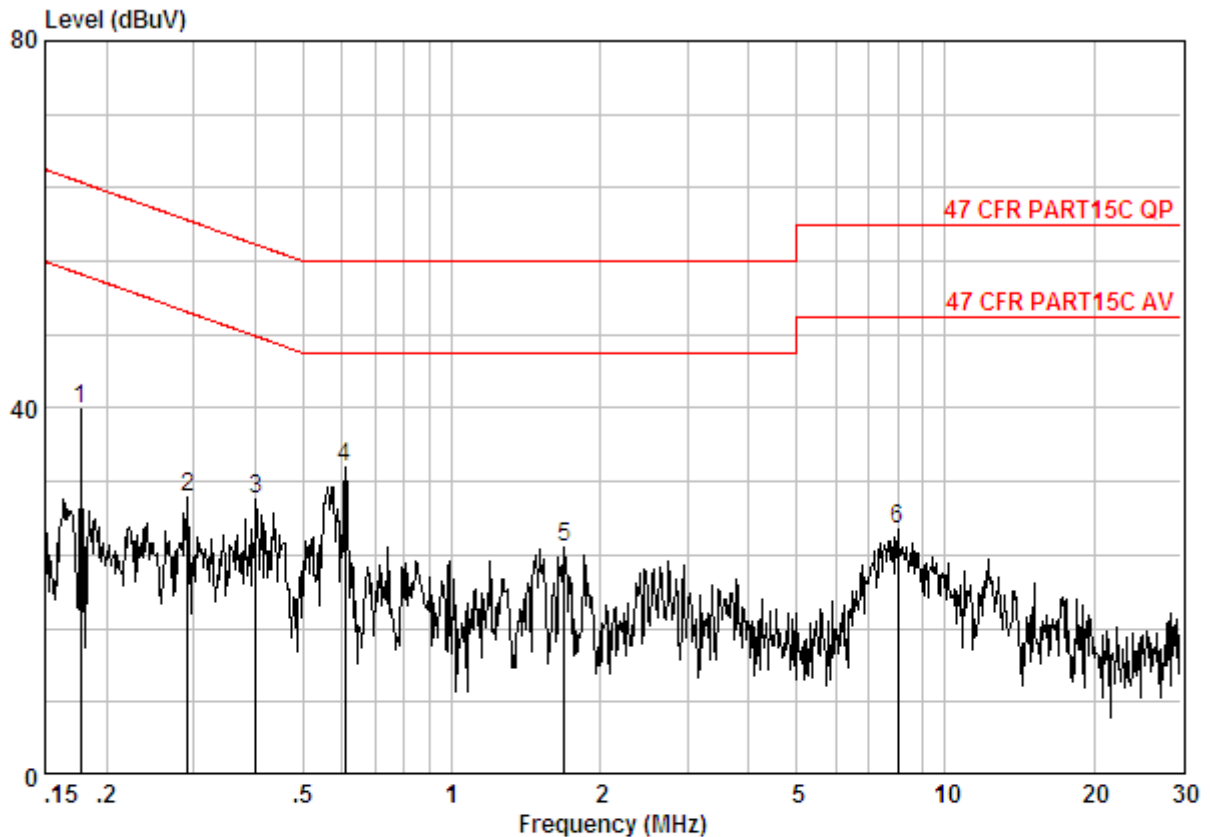

Site : Shielding Room  
Condition : 47 CFR PART15C AV CE NEUTRAL  
Job NO. : 3444CR  
Test Mode : AC charge + TX mode


|     | Freq    | Cable Loss | LISN Factor | Read Level | Limit | Over  |             |
|-----|---------|------------|-------------|------------|-------|-------|-------------|
|     | MHz     | dB         | dB          | dBuV       | dBuV  | Limit | Remark      |
| 1   | 0.17678 | 0.02       | 9.82        | 30.07      | 39.91 | 54.64 | -14.73 Peak |
| 2   | 0.29243 | 0.01       | 9.86        | 20.45      | 30.33 | 50.46 | -20.13 Peak |
| 3   | 0.40187 | 0.01       | 9.87        | 20.20      | 30.08 | 47.81 | -17.73 Peak |
| 4 @ | 0.60752 | 0.02       | 9.93        | 23.73      | 33.67 | 46.00 | -12.33 Peak |
| 5   | 1.689   | 0.02       | 10.10       | 14.71      | 24.82 | 46.00 | -21.18 Peak |
| 6   | 8.020   | 0.01       | 10.13       | 16.70      | 26.84 | 50.00 | -23.16 Peak |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



### 6.3 Conducted Peak Output Power
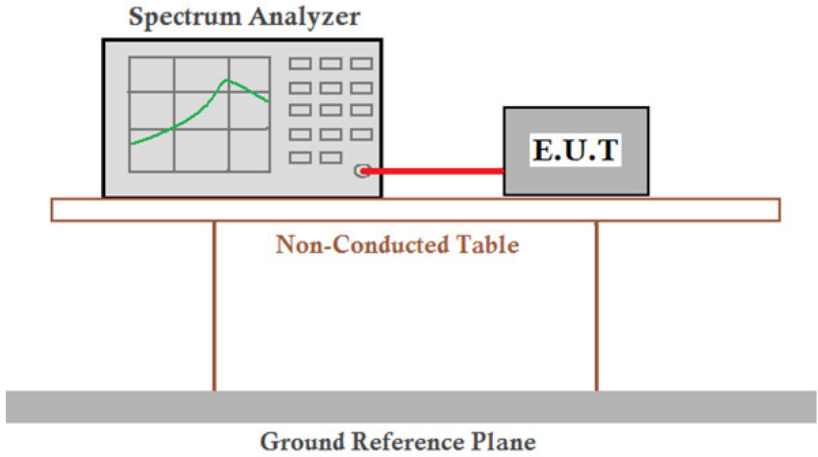
|                   |                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (b)(1)                                                                                                                                             |
| Test Method:      | ANSI C63.10 2009                                                                                                                                                                  |
| Test Setup:       |  <p><i>Remark:</i><br/>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p> |
| Limit:            | 30dBm                                                                                                                                                                             |
| Test Mode:        | Transmitting with GFSK modulation.                                                                                                                                                |
| Instruments Used: | Refer to section 5.10 for details.                                                                                                                                                |
| Test Results:     | Pass                                                                                                                                                                              |


#### Measurement Data

| GFSK mode    |                         |             |        |
|--------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest       | 0.83                    | 30.00       | Pass   |
| Middle       | 0.85                    | 30.00       | Pass   |
| Highest      | 0.85                    | 30.00       | Pass   |




Test plot as follows:

|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

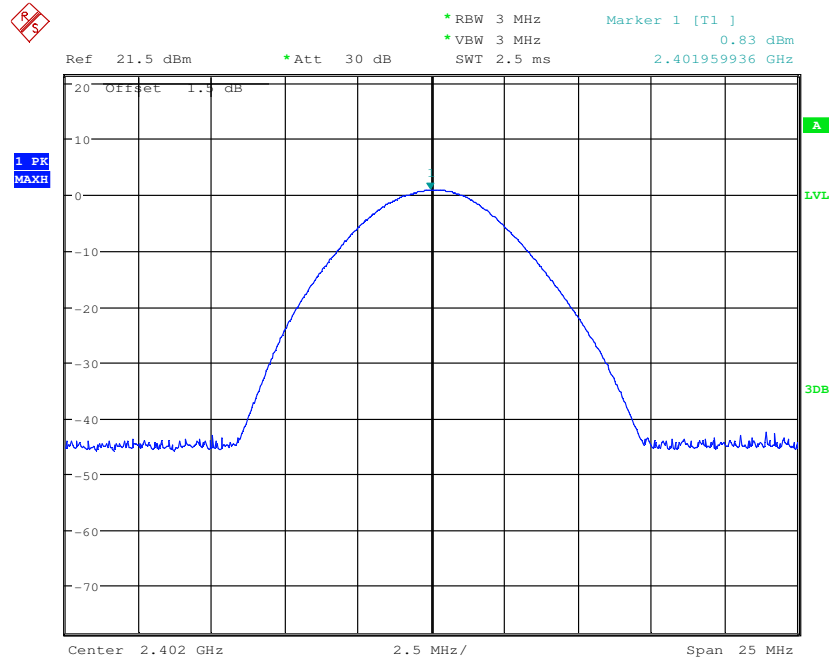


|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

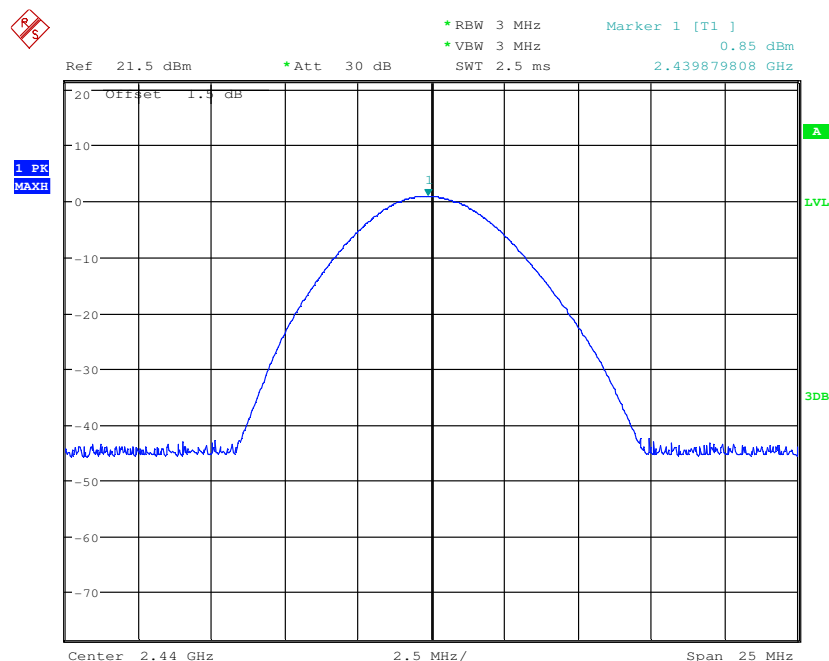




|            |      |               |         |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

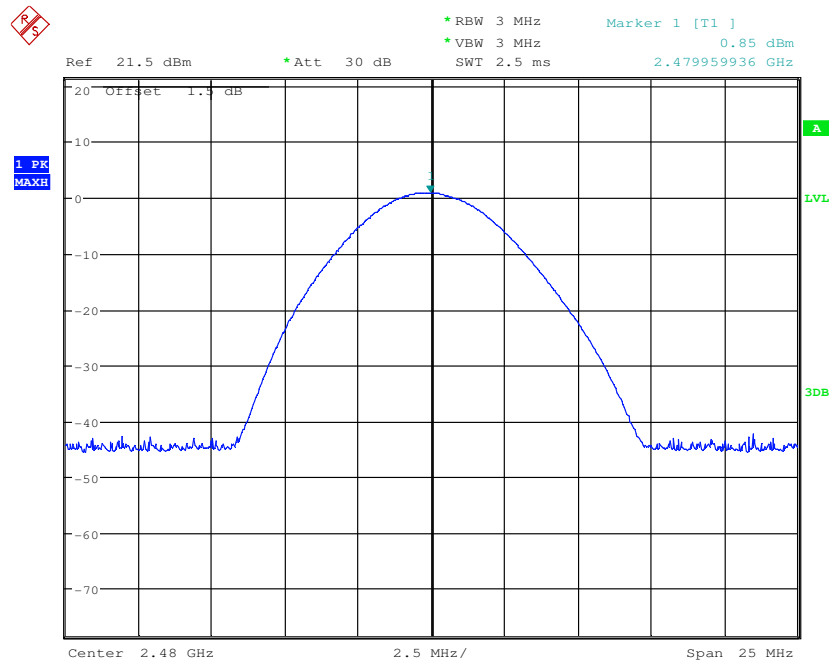

## 6.4 6dB Occupy Bandwidth
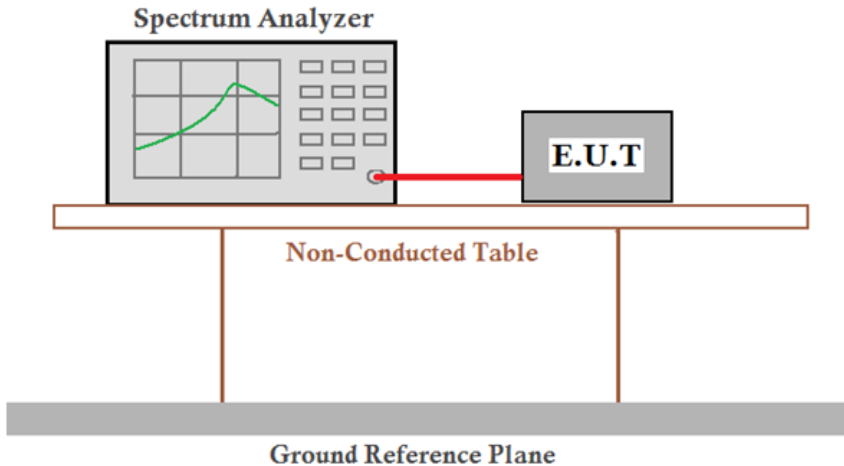
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(2)                                              |
| Test Method:      | ANSI C63.10 2009                                                                   |
| Test Setup:       |  |
| Limit:            | ≥ 500 kHz                                                                          |
| Test Mode:        | Transmitting with GFSK modulation.                                                 |
| Instruments Used: | Refer to section 5.10 for details.                                                 |
| Test Results:     | Pass                                                                               |


### Measurement Data

| GFSK mode    |                            |             |        |
|--------------|----------------------------|-------------|--------|
| Test channel | 6dB Occupy Bandwidth (MHz) | Limit (kHz) | Result |
| Lowest       | 0.707                      | ≥500        | Pass   |
| Middle       | 0.707                      | ≥500        | Pass   |
| Highest      | 0.707                      | ≥500        | Pass   |




Test plot as follows:

|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

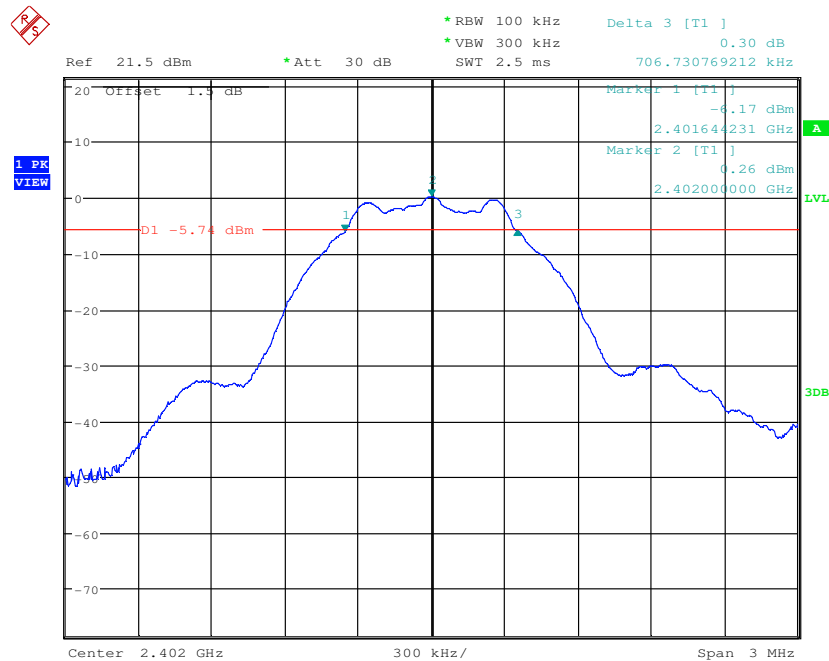


|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

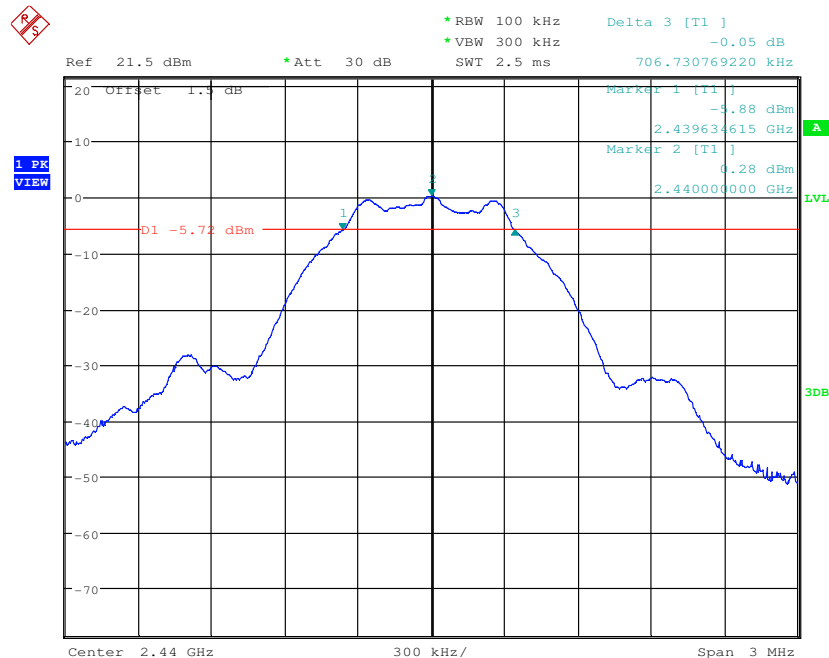




|            |      |               |         |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

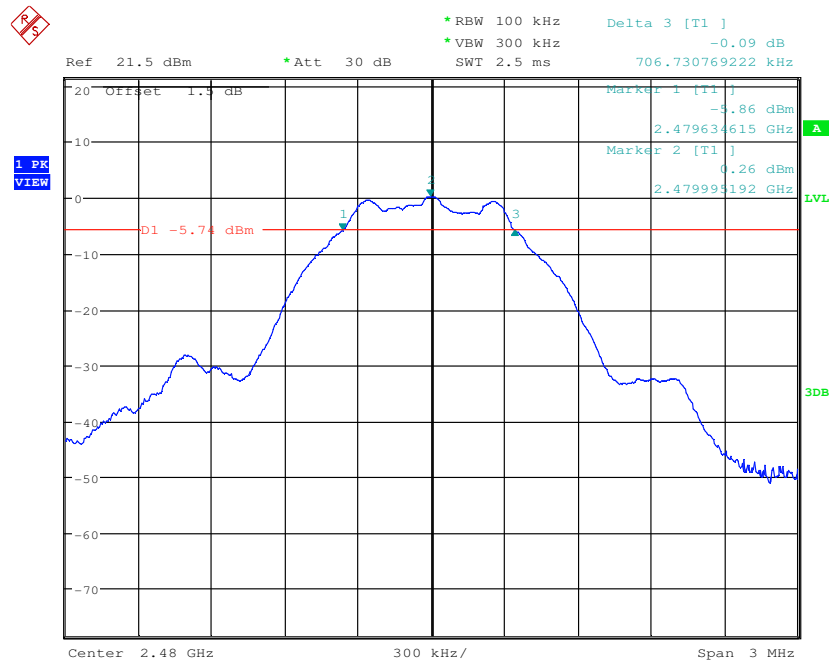

## 6.5 Power Spectral Density
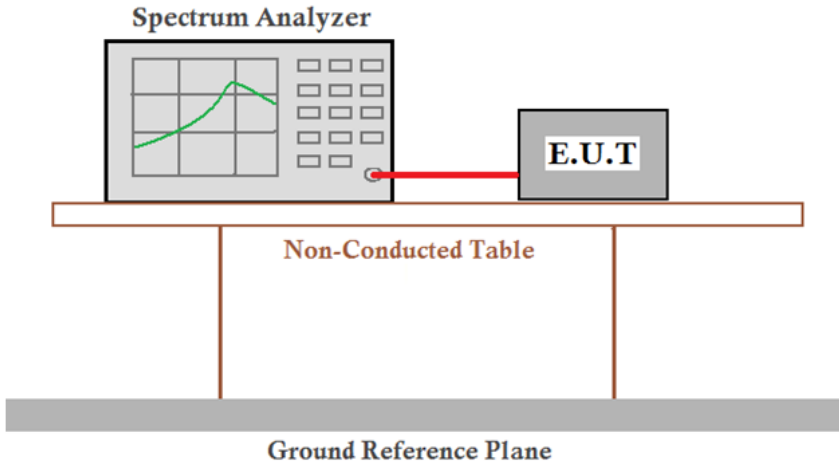
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (e)                                                 |
| Test Method:      | ANSI C63.10 2009                                                                   |
| Test Setup:       |  |
| Limit:            | $\leq 8.00 \text{ dBm/3kHz}$                                                       |
| Test Mode:        | Transmitting with GFSK modulation.                                                 |
| Instruments Used: | Refer to section 5.10 for details.                                                 |
| Test Results:     | Pass                                                                               |


### Measurement Data

| GFSK mode    |                                   |                  |        |
|--------------|-----------------------------------|------------------|--------|
| Test channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest       | -15.43                            | $\leq 8.00$      | Pass   |
| Middle       | -15.28                            | $\leq 8.00$      | Pass   |
| Highest      | -15.21                            | $\leq 8.00$      | Pass   |




Test plot as follows:

|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

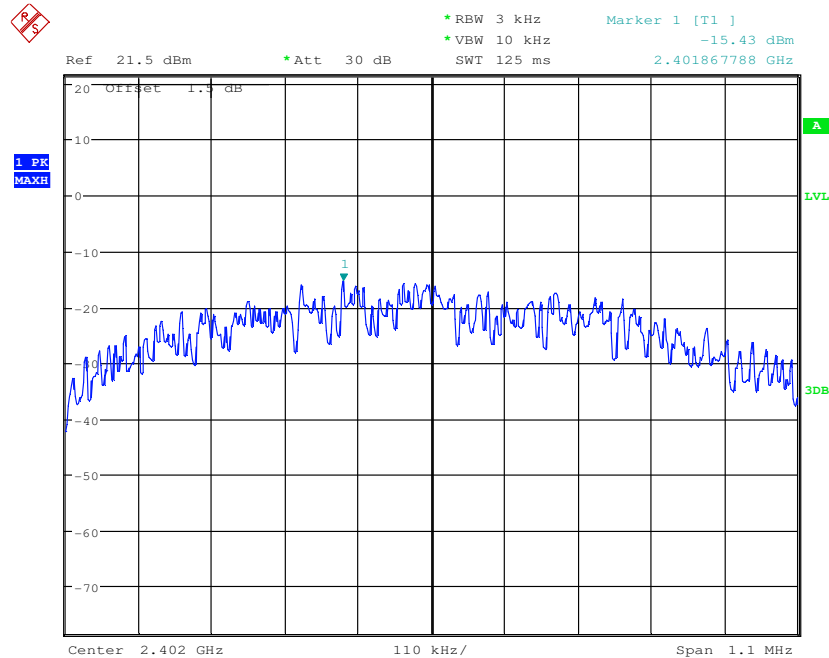

|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

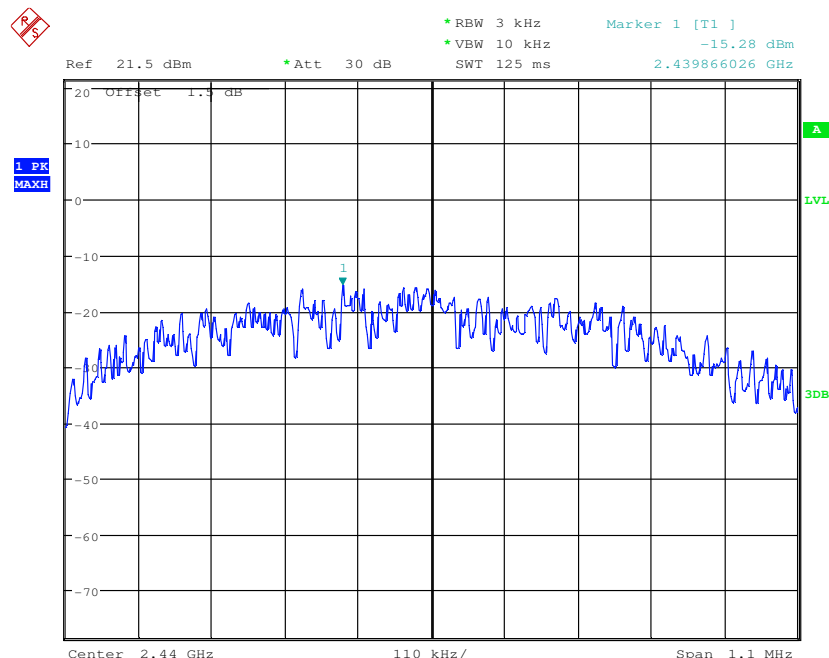






SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM150600344402


Page: 25 of 56

|            |      |               |         |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

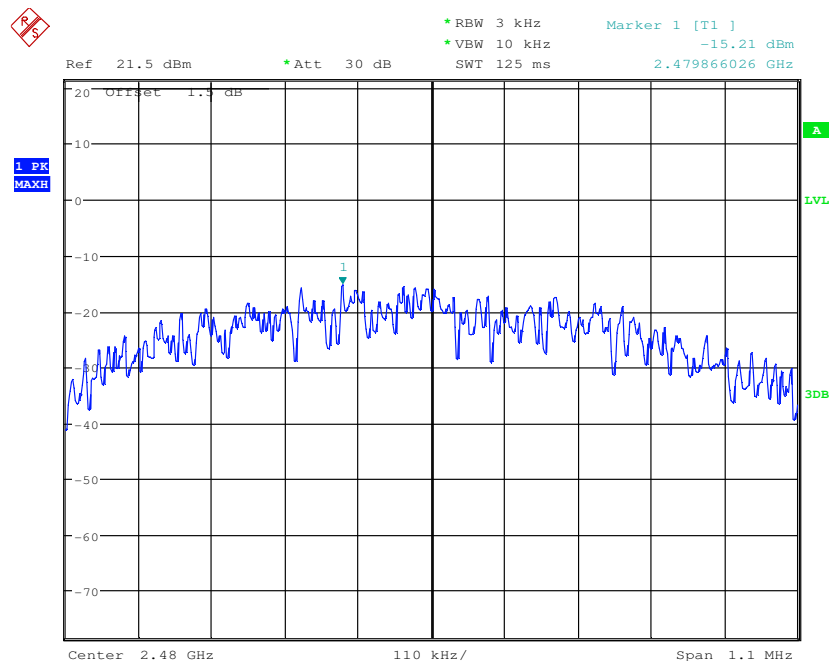

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


## 6.6 Band-edge for RF Conducted Emissions
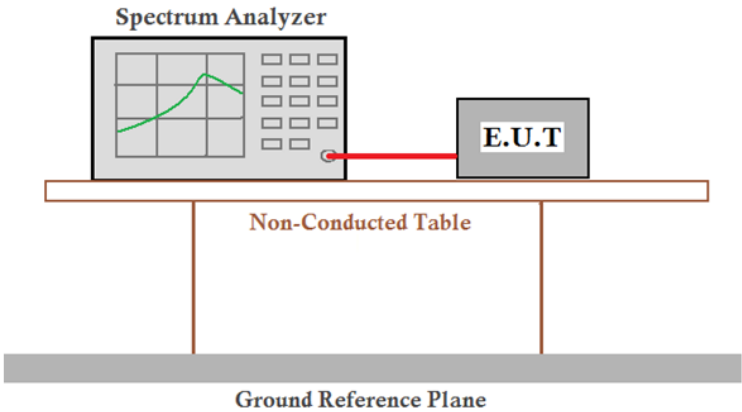
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | ANSI C63.10 2009                                                                                                                                                                                                                                                                                                                                                                        |
| Test Setup:       |  <p>Remark:<br/>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>                                                                                                                                                                                                              |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode:        | Transmitting with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                      |
| Instruments Used: | Refer to section 5.10 for details.                                                                                                                                                                                                                                                                                                                                                      |
| Test Results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |




Test plot as follows:


|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

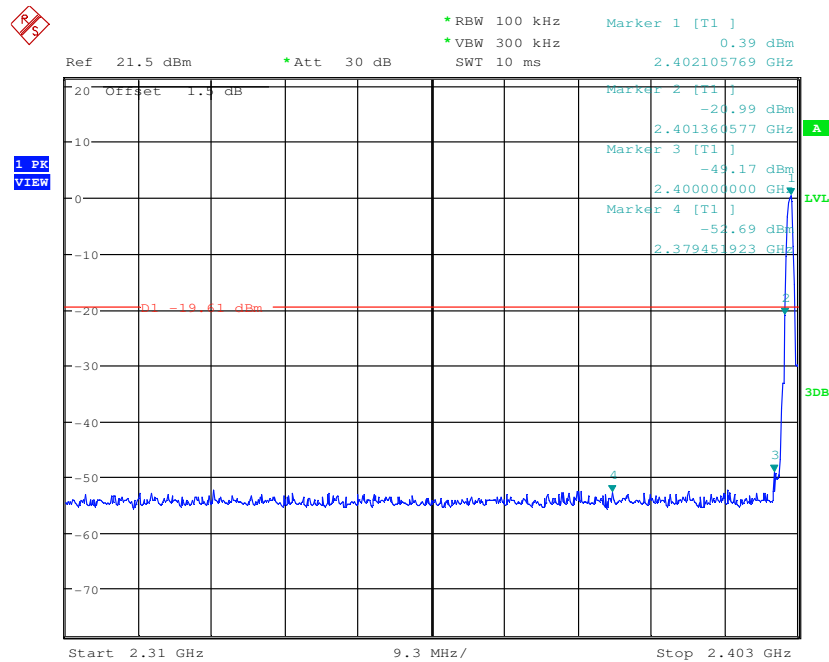

|            |      |               |         |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

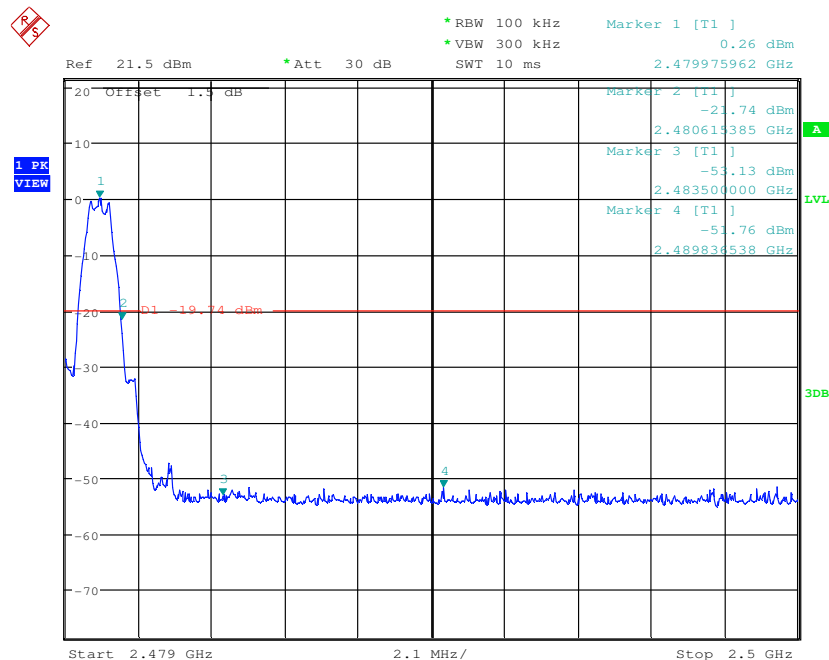



## 6.7 Spurious RF Conducted Emissions


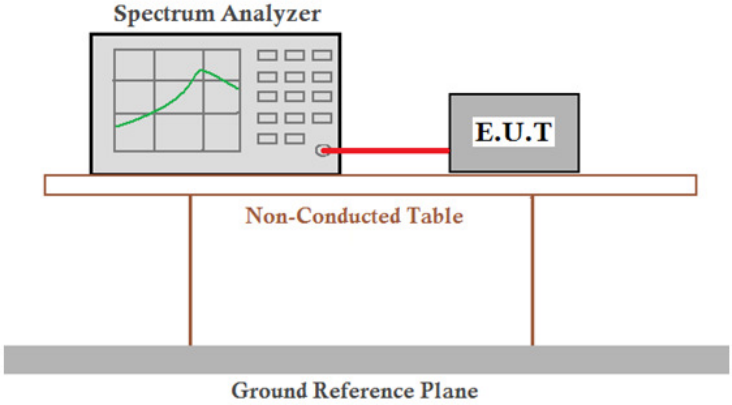
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | ANSI C63.10 2009                                                                                                                                                                                                                                                                                                                                                                        |
| Test Setup:       |  <p>Remark:<br/>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>                                                                                                                                                                                                              |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode:        | Transmitting with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                      |
| Instruments Used: | Refer to section 5.10 for details.                                                                                                                                                                                                                                                                                                                                                      |
| Test Results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |



Test plot as follows:

|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

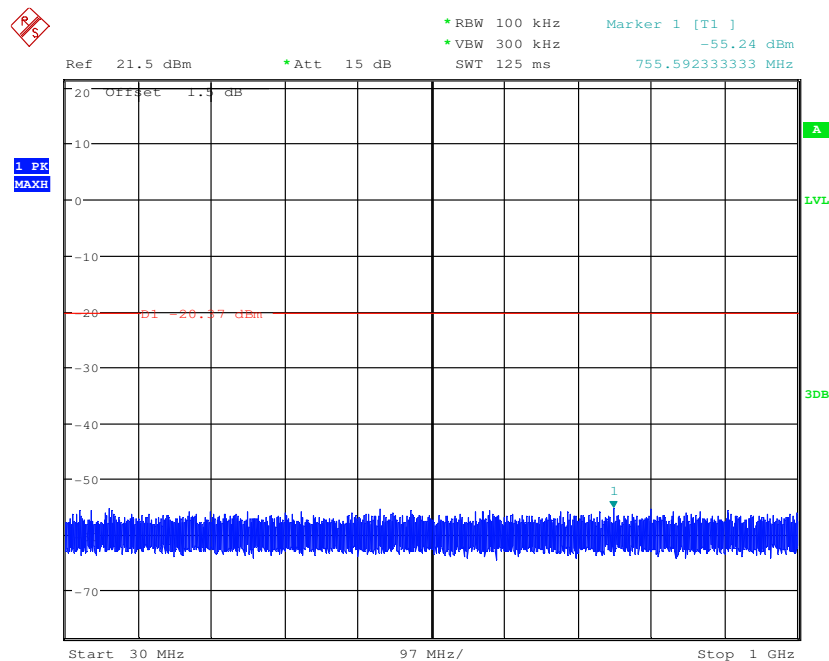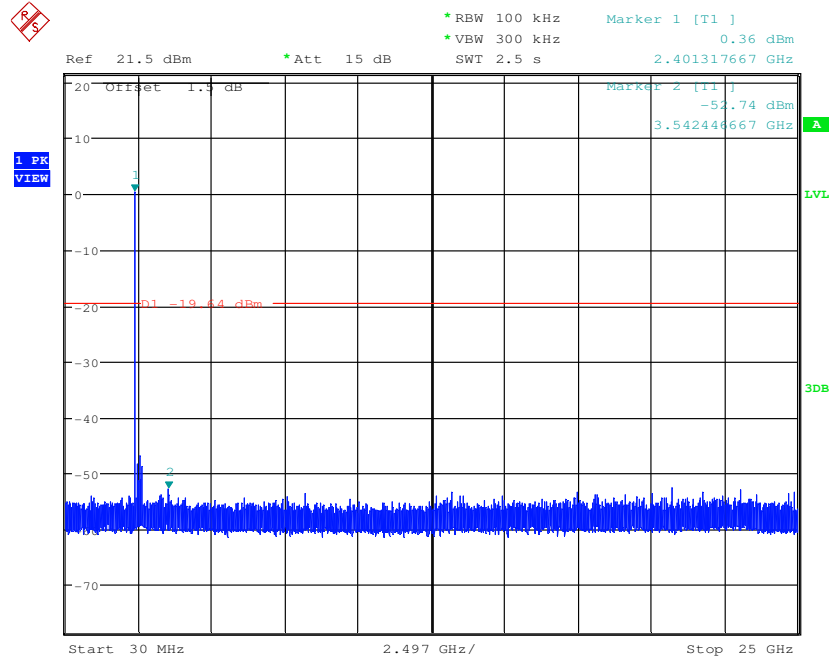

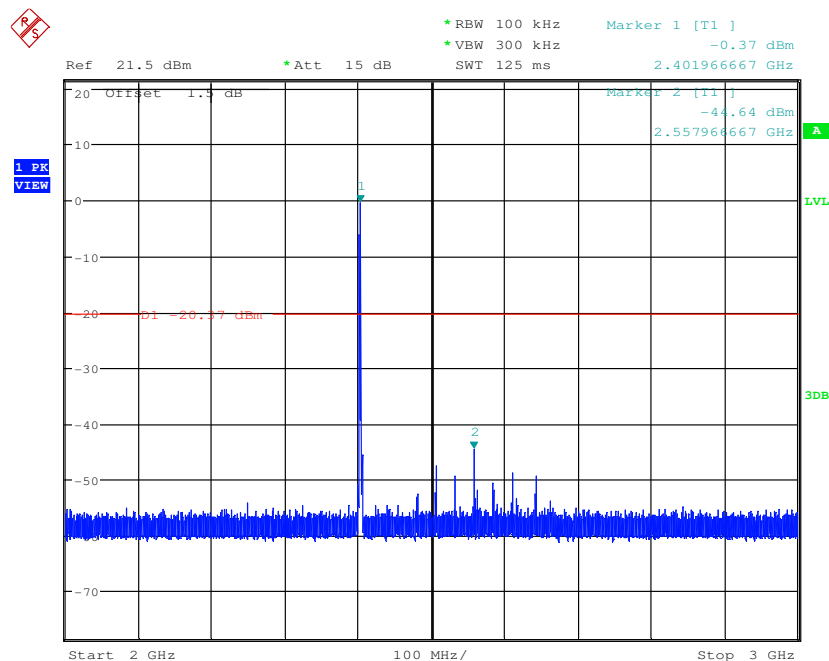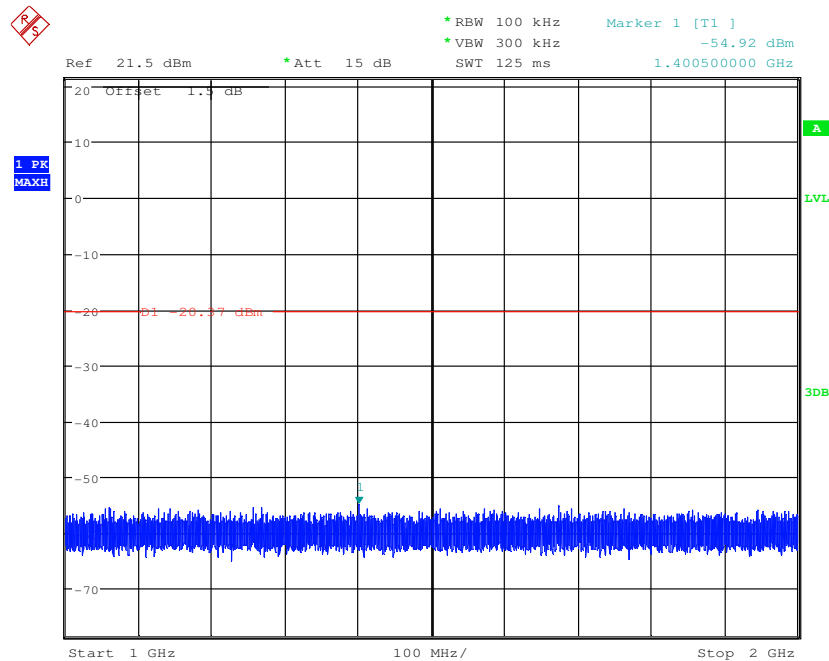




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM150600344402



Page: 31 of 56

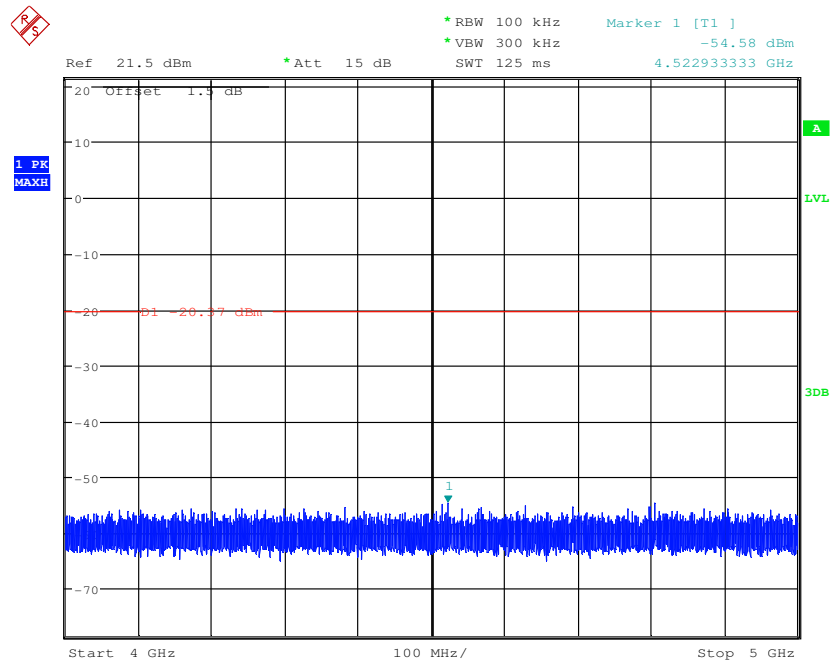



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



|            |      |               |        |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

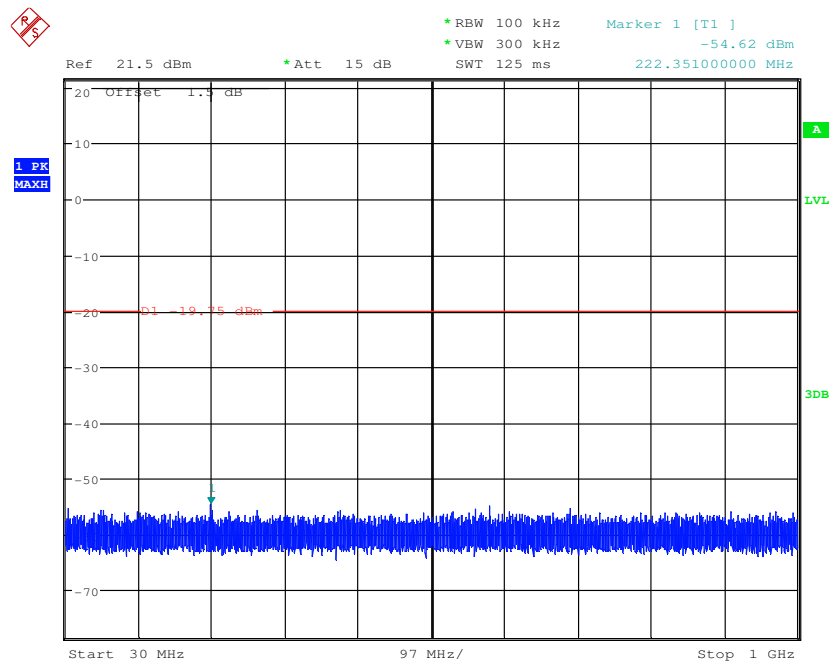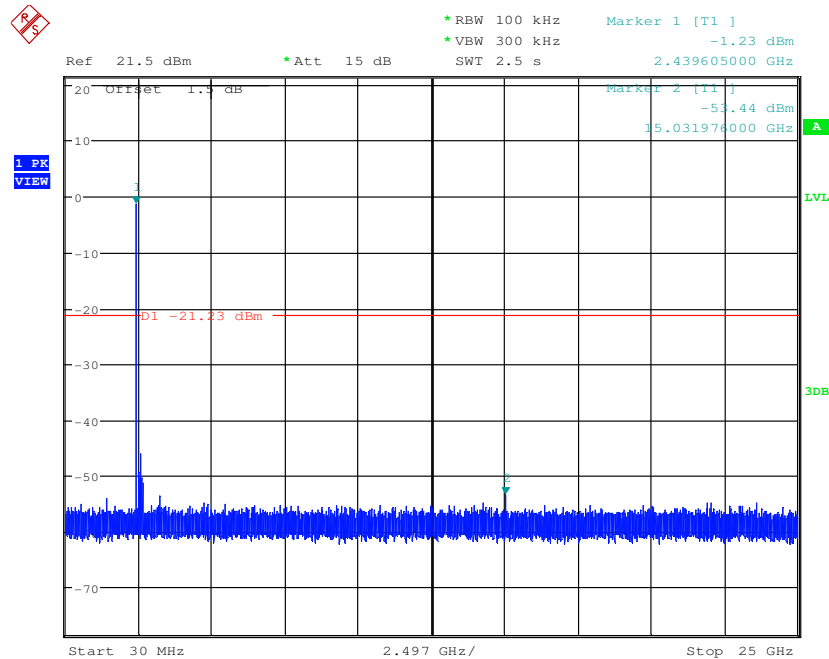



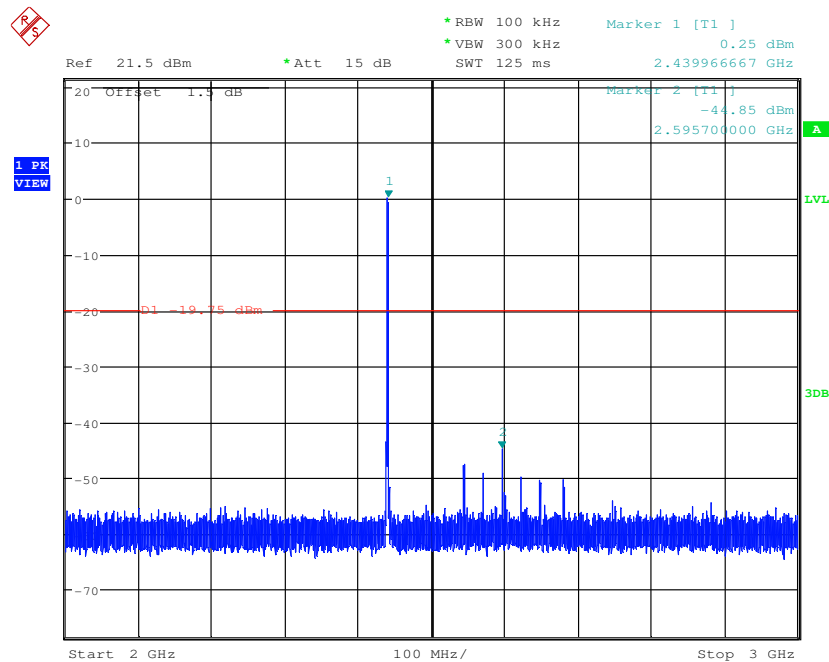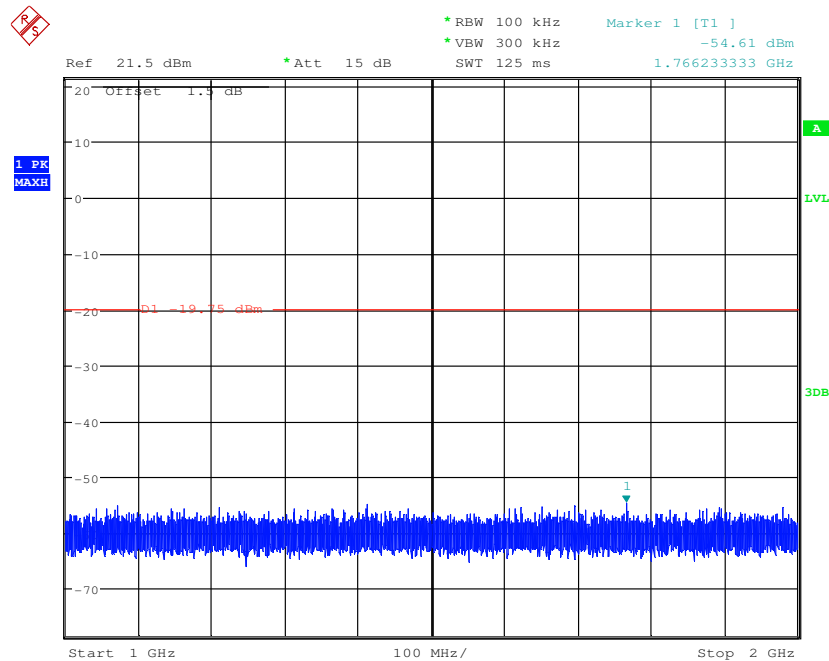




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM150600344402



Page: 34 of 56

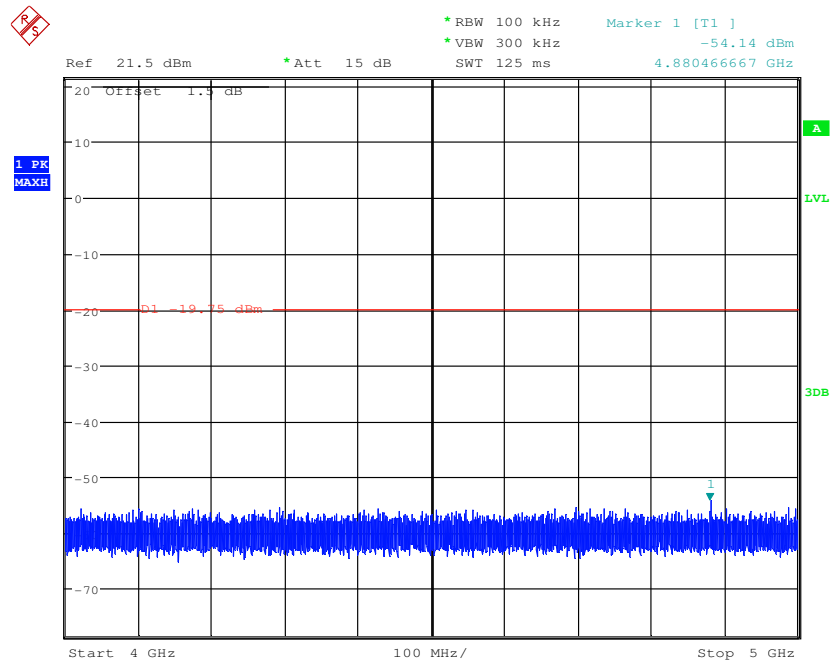

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



|            |      |               |         |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

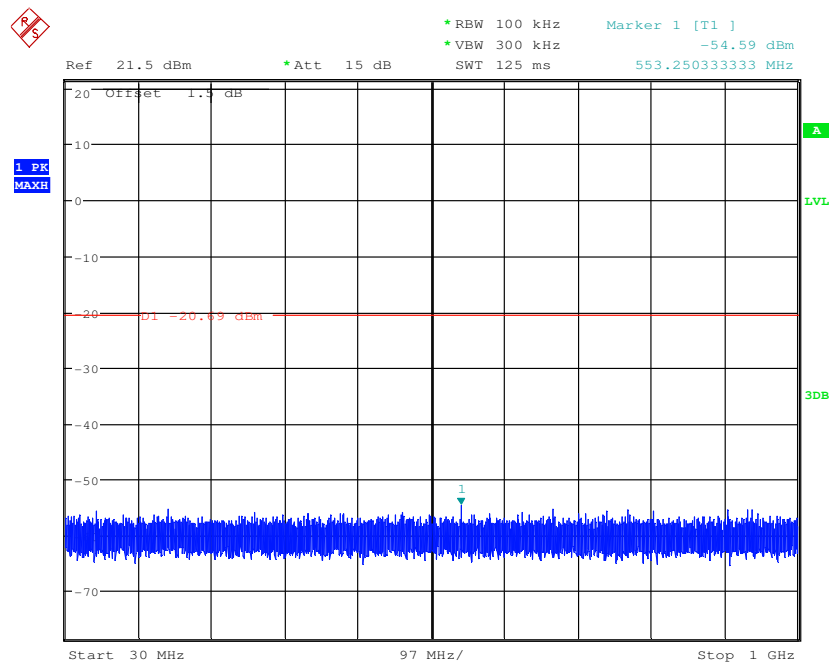
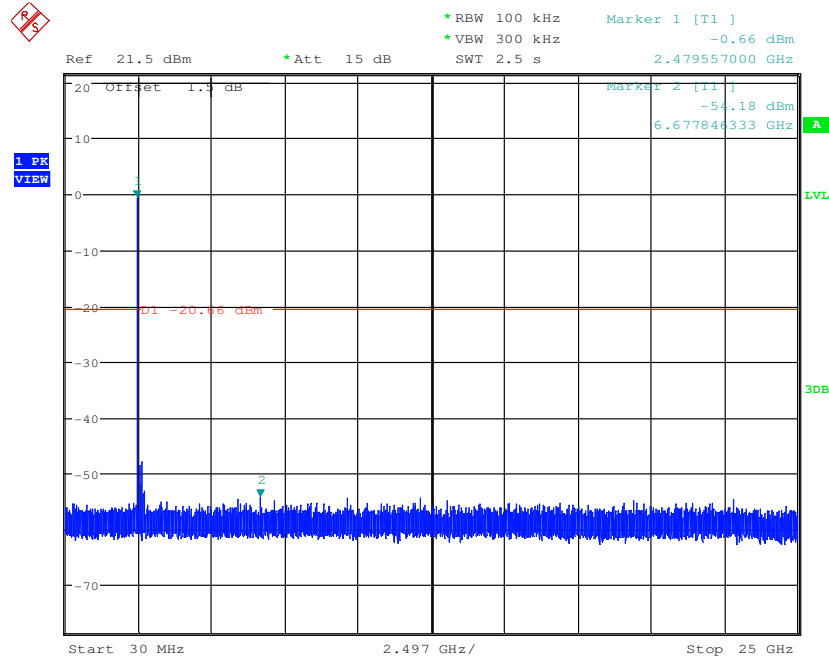





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM150600344402

Page: 36 of 56

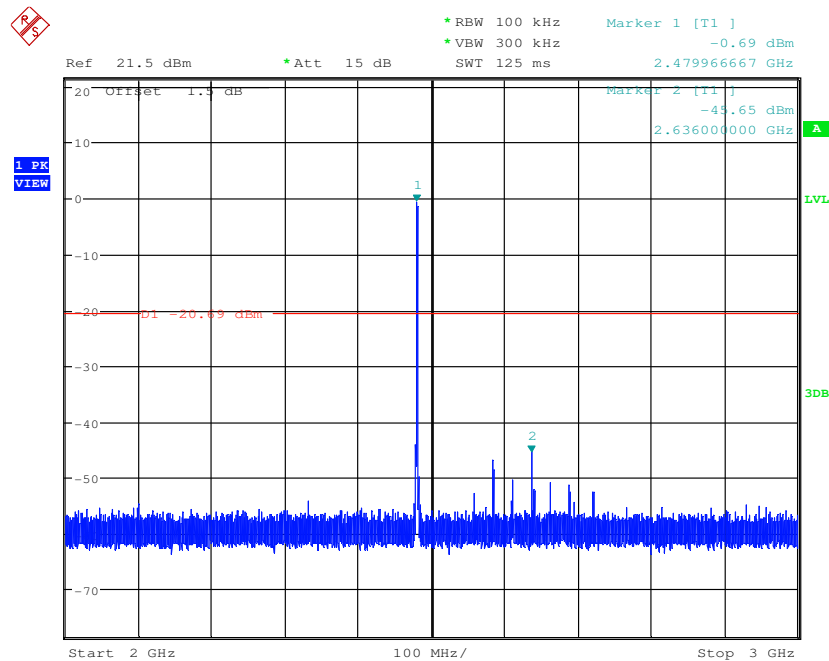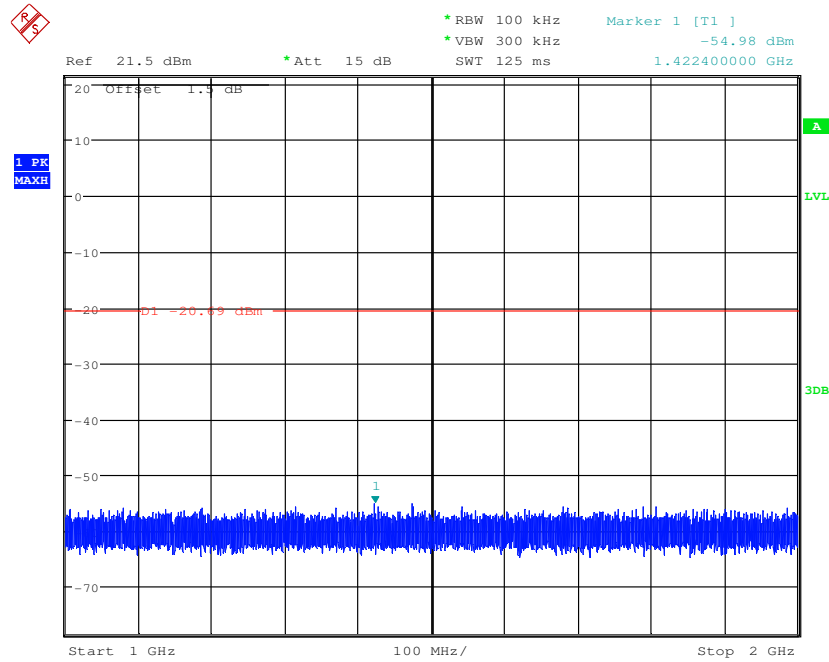

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

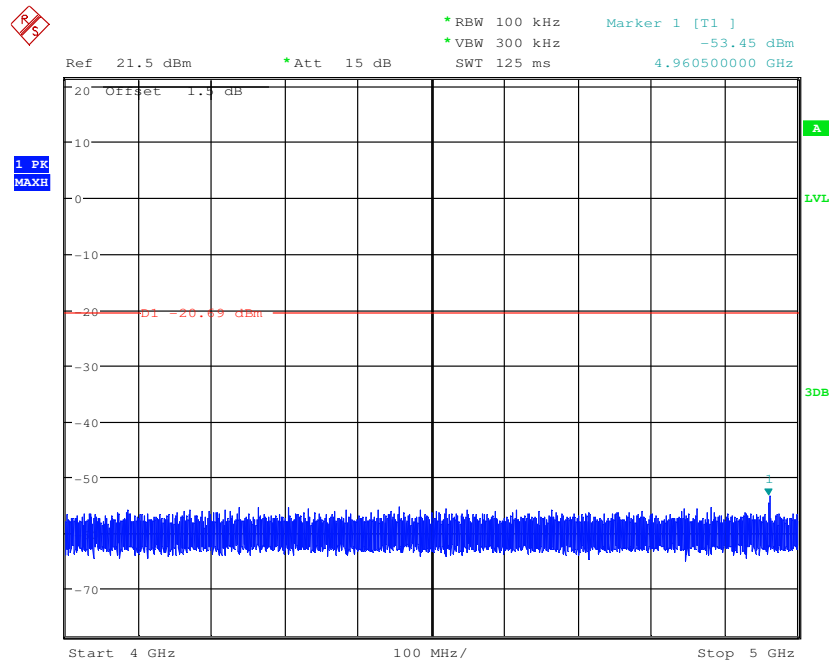

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o), The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



## 6.8 Radiated Spurious Emission

| 6.8.1 Spurious Emissions |                                                                                                                                                                                                                                                                             |                                     |                   |            |                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement:        | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                   |                                     |                   |            |                             |
| Test Method:             | ANSI C63.10 2009                                                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Test Site:               | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Receiver Setup:          | Frequency                                                                                                                                                                                                                                                                   | Detector                            | RBW               | VBW        | Remark                      |
|                          | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                          | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                          | 0.090MHz-0.110MHz                                                                                                                                                                                                                                                           | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                          | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                          | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                          | 0.490MHz -30MHz                                                                                                                                                                                                                                                             | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                          | 30MHz-1GHz                                                                                                                                                                                                                                                                  | Quasi-peak                          | 100 kHz           | 300kHz     | Quasi-peak                  |
|                          | Above 1GHz                                                                                                                                                                                                                                                                  | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                          |                                                                                                                                                                                                                                                                             | Peak                                | 1MHz              | 10Hz       | Average                     |
| Limit:                   | Frequency                                                                                                                                                                                                                                                                   | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                          | 0.009MHz-0.490MHz                                                                                                                                                                                                                                                           | 2400/F(kHz)                         | -                 | -          | 300                         |
|                          | 0.490MHz-1.705MHz                                                                                                                                                                                                                                                           | 24000/F(kHz)                        | -                 | -          | 30                          |
|                          | 1.705MHz-30MHz                                                                                                                                                                                                                                                              | 30                                  | -                 | -          | 30                          |
|                          | 30MHz-88MHz                                                                                                                                                                                                                                                                 | 100                                 | 40.0              | Quasi-peak | 3                           |
|                          | 88MHz-216MHz                                                                                                                                                                                                                                                                | 150                                 | 43.5              | Quasi-peak | 3                           |
|                          | 216MHz-960MHz                                                                                                                                                                                                                                                               | 200                                 | 46.0              | Quasi-peak | 3                           |
|                          | 960MHz-1GHz                                                                                                                                                                                                                                                                 | 500                                 | 54.0              | Quasi-peak | 3                           |
|                          | Above 1GHz                                                                                                                                                                                                                                                                  | 500                                 | 54.0              | Average    | 3                           |
|                          | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                     |                   |            |                             |

**Test Setup:**

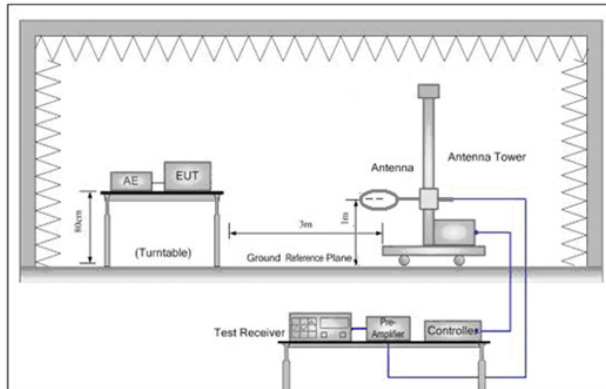


Figure 1. Below 30MHz

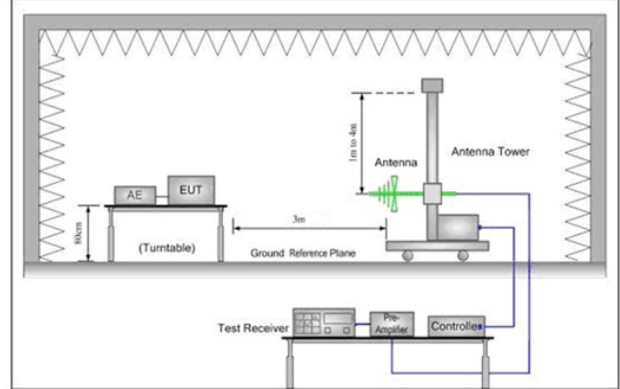


Figure 2. 30MHz to 1GHz

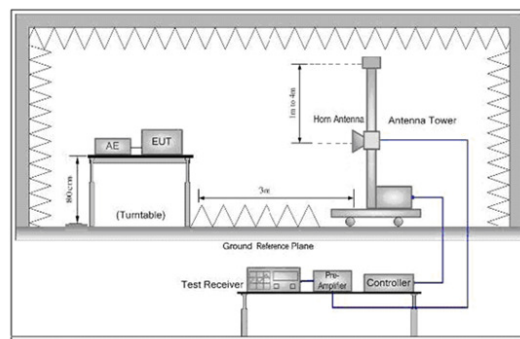


Figure 3. Above 1 GHz

**Test Procedure:**

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
- The radiation measurements are performed in X, Y, Z axis positioning




|                        |                                                                                                                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | for Transmitting mode, and found the X axis positioning which it is the worst case.<br>i. Repeat above procedures until all frequencies measured was complete.                                                                                                                                            |
| Exploratory Test Mode: | Transmitting with GFSK modulation.<br>Transmitting mode, Charge + Transmitting mode.                                                                                                                                                                                                                      |
| Final Test Mode:       | Transmitting with GFSK modulation.<br>Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case.<br>For below 1GHz part, through pre-scan, the worst case is the lowest channel.<br>Only the worst case is recorded in the report. |
| Instruments Used:      | Refer to section 5.10 for details.                                                                                                                                                                                                                                                                        |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                      |





|                              |                            |          |
|------------------------------|----------------------------|----------|
| Radiated Emission below 1GHz |                            |          |
| 30MHz~1GHz (QP)              |                            |          |
| Test mode:                   | Charge + Transmitting mode | Vertical |

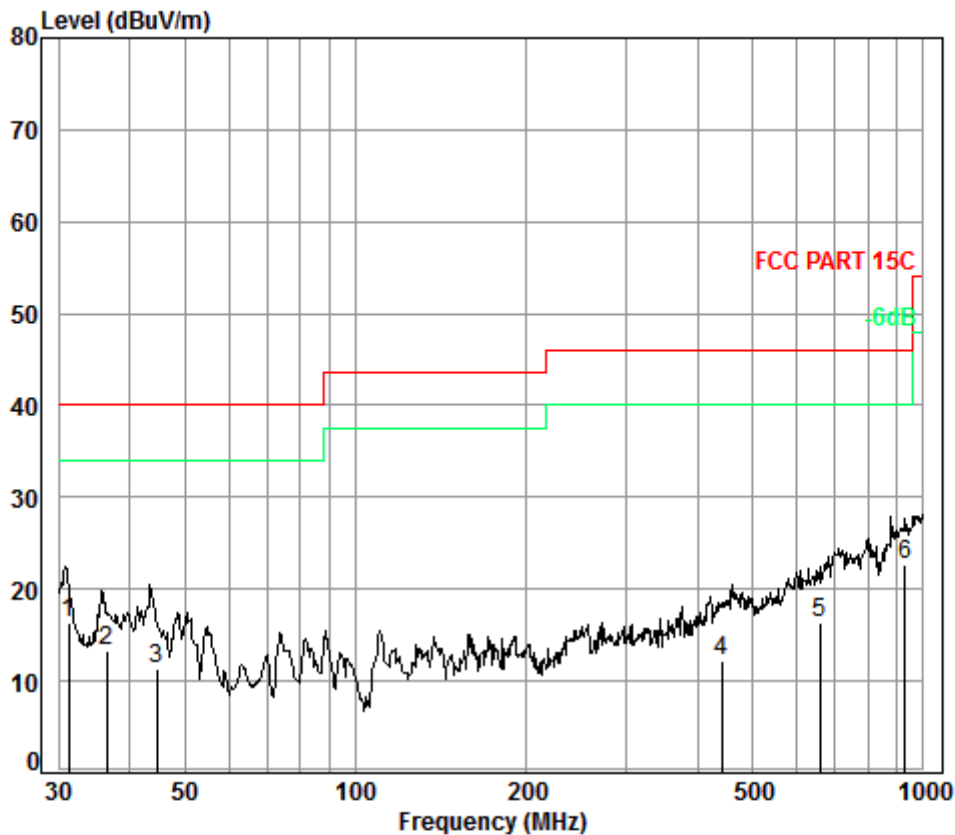

Condition: FCC PART 15C 3m Vertical


Job No. : 3444CR

Test Mode: AC charge mode+TX mode

|   | Freq   | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|--------|------------|------------|---------------------|------------|--------|------------|------------|--------|
|   | MHz    | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 31.29  | 0.60       | 17.98      | 27.35               | 25.11      | 16.34  | 40.00      | -23.66     |        |
| 2 | 36.51  | 0.60       | 15.05      | 27.33               | 25.03      | 13.35  | 40.00      | -26.65     |        |
| 3 | 44.74  | 0.70       | 11.01      | 27.30               | 27.02      | 11.43  | 40.00      | -28.57     |        |
| 4 | 441.74 | 2.38       | 16.73      | 27.40               | 20.45      | 12.16  | 46.00      | -33.84     |        |
| 5 | 656.53 | 2.82       | 20.81      | 27.47               | 20.21      | 16.37  | 46.00      | -29.63     |        |
| 6 | 929.01 | 3.63       | 23.30      | 26.64               | 22.46      | 22.75  | 46.00      | -23.25     |        |



|            |                            |            |
|------------|----------------------------|------------|
| Test mode: | Charge + Transmitting mode | Horizontal |
|------------|----------------------------|------------|

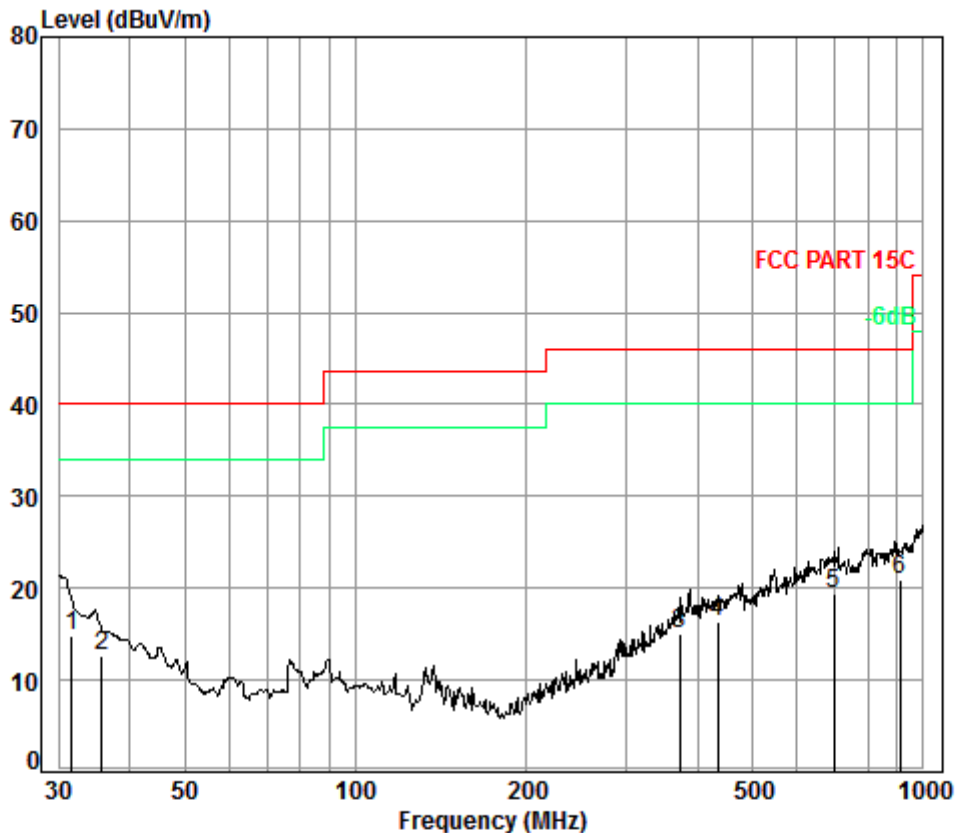

Condition: FCC PART 15C 3m HORIZONTAL

Job No. : 3444CR

Test Mode: AC charge mode+TX mode

|   | Freq   | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|--------|------------|------------|---------------------|------------|--------|------------|------------|--------|
|   | MHz    | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 31.62  | 0.60       | 17.79      | 27.35               | 23.82      | 14.86  | 40.00      | -25.14     |        |
| 2 | 35.75  | 0.60       | 15.48      | 27.33               | 23.80      | 12.55  | 40.00      | -27.45     |        |
| 3 | 372.00 | 2.12       | 15.75      | 26.95               | 24.03      | 14.95  | 46.00      | -31.05     |        |
| 4 | 434.07 | 2.35       | 16.58      | 27.35               | 24.67      | 16.25  | 46.00      | -29.75     |        |
| 5 | 696.86 | 2.90       | 21.57      | 27.41               | 22.31      | 19.37  | 46.00      | -26.63     |        |
| 6 | 909.67 | 3.61       | 23.24      | 26.71               | 20.84      | 20.98  | 46.00      | -25.02     |        |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM150600344402

Page: 43 of 56

| Transmitter Emission above 1GHz |                 |                       |                    |                   |                |                     |                 |              |
|---------------------------------|-----------------|-----------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|
| Test mode:                      |                 | GFSK                  |                    | Test channel:     |                | Lowest              |                 | Remark:      |
| Frequency (MHz)                 | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 3662.775                        | 5.80            | 33.05                 | 38.81              | 46.19             | 46.23          | 74                  | -27.77          | Vertical     |
| 4804.000                        | 5.49            | 34.70                 | 39.24              | 52.09             | 53.04          | 74                  | -20.96          | Vertical     |
| 6047.776                        | 7.47            | 36.25                 | 39.18              | 46.70             | 51.24          | 74                  | -22.76          | Vertical     |
| 7206.000                        | 8.27            | 35.63                 | 39.07              | 46.38             | 51.21          | 74                  | -22.79          | Vertical     |
| 9608.000                        | 9.26            | 37.33                 | 37.93              | 43.78             | 52.44          | 74                  | -21.56          | Vertical     |
| 11963.890                       | 10.24           | 38.66                 | 38.68              | 43.45             | 53.67          | 74                  | -20.33          | Vertical     |
| 3616.451                        | 5.83            | 33.01                 | 38.79              | 46.83             | 46.88          | 74                  | -27.12          | Horizontal   |
| 4804.000                        | 5.49            | 34.70                 | 39.24              | 50.45             | 51.40          | 74                  | -22.60          | Horizontal   |
| 5880.782                        | 7.24            | 36.07                 | 39.20              | 47.23             | 51.34          | 74                  | -22.66          | Horizontal   |
| 7206.000                        | 8.27            | 35.63                 | 39.07              | 46.72             | 51.55          | 74                  | -22.45          | Horizontal   |
| 9608.000                        | 9.26            | 37.33                 | 37.93              | 43.82             | 52.48          | 74                  | -21.52          | Horizontal   |
| 11140.850                       | 9.76            | 38.11                 | 38.29              | 43.56             | 53.14          | 74                  | -20.86          | Horizontal   |

| Test mode:      |                 | GFSK                   |                    | Test channel:        | Middle                  |                | Remark:         |              | Peak |
|-----------------|-----------------|------------------------|--------------------|----------------------|-------------------------|----------------|-----------------|--------------|------|
| Frequency (MHz) | Cable loss (dB) | Antenna factors (dB/m) | Preamp factor (dB) | Reading Level (dBμV) | Emission Level (dBμV/m) | Limit (dBμV/m) | Over limit (dB) | Polarization |      |
| 3216.838        | 5.83            | 32.30                  | 38.61              | 45.52                | 45.04                   | 74             | -28.96          | Vertical     |      |
| 4880.000        | 5.69            | 34.78                  | 39.26              | 46.98                | 48.19                   | 74             | -25.81          | Vertical     |      |
| 6001.768        | 7.51            | 36.30                  | 39.18              | 46.57                | 51.20                   | 74             | -22.80          | Vertical     |      |
| 7320.000        | 8.41            | 35.51                  | 39.06              | 47.20                | 52.06                   | 74             | -21.94          | Vertical     |      |
| 9760.000        | 9.18            | 37.80                  | 37.84              | 43.33                | 52.47                   | 74             | -21.53          | Vertical     |      |
| 11341.140       | 9.94            | 38.14                  | 38.39              | 43.57                | 53.26                   | 74             | -20.74          | Vertical     |      |
| 3588.939        | 5.85            | 32.99                  | 38.78              | 46.18                | 46.24                   | 74             | -27.76          | Horizontal   |      |
| 4880.000        | 5.69            | 34.78                  | 39.26              | 47.13                | 48.34                   | 74             | -25.66          | Horizontal   |      |
| 5836.044        | 7.14            | 35.98                  | 39.20              | 47.39                | 51.31                   | 74             | -22.69          | Horizontal   |      |
| 7320.000        | 8.41            | 35.51                  | 39.06              | 46.30                | 51.16                   | 74             | -22.84          | Horizontal   |      |
| 9760.000        | 9.18            | 37.80                  | 37.84              | 43.30                | 52.44                   | 74             | -21.56          | Horizontal   |      |
| 10971.980       | 9.64            | 38.07                  | 38.21              | 43.59                | 53.09                   | 74             | -20.91          | Horizontal   |      |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



| Test mode:      |                 | GFSK                   |                     | Test channel:        |                         | Highest        | Remark:         |              | Peak |
|-----------------|-----------------|------------------------|---------------------|----------------------|-------------------------|----------------|-----------------|--------------|------|
| Frequency (MHz) | Cable loss (dB) | Antenna factors (dB/m) | Preampl factor (dB) | Reading Level (dBμV) | Emission Level (dBμV/m) | Limit (dBμV/m) | Over limit (dB) | Polarization |      |
| 3428.206        | 5.89            | 32.81                  | 38.71               | 45.55                | 45.54                   | 74             | -28.46          | Vertical     |      |
| 4960.000        | 5.89            | 34.86                  | 39.29               | 46.91                | 48.37                   | 74             | -25.63          | Vertical     |      |
| 5880.782        | 7.24            | 36.07                  | 39.20               | 47.23                | 51.34                   | 74             | -22.66          | Vertical     |      |
| 7440.000        | 8.54            | 35.43                  | 39.05               | 47.14                | 52.06                   | 74             | -21.94          | Vertical     |      |
| 9920.000        | 9.09            | 38.27                  | 37.75               | 42.95                | 52.56                   | 74             | -21.44          | Vertical     |      |
| 11963.890       | 10.24           | 38.66                  | 38.68               | 43.31                | 53.53                   | 74             | -20.47          | Vertical     |      |
| 3766.785        | 5.74            | 33.13                  | 38.86               | 46.04                | 46.05                   | 74             | -27.95          | Horizontal   |      |
| 4960.000        | 5.89            | 34.86                  | 39.29               | 45.98                | 47.44                   | 74             | -26.56          | Horizontal   |      |
| 6047.776        | 7.47            | 36.25                  | 39.18               | 46.70                | 51.24                   | 74             | -22.76          | Horizontal   |      |
| 7440.000        | 8.54            | 35.43                  | 39.05               | 45.39                | 50.31                   | 74             | -23.69          | Horizontal   |      |
| 9920.000        | 9.09            | 38.27                  | 37.75               | 42.72                | 52.33                   | 74             | -21.67          | Horizontal   |      |
| 11515.680       | 10.08           | 38.24                  | 38.47               | 43.77                | 53.62                   | 74             | -20.38          | Horizontal   |      |

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 6.9 Restricted bands around fundamental frequency

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                    |                  |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------|-----------|--------------------|--------|-------------|------|------------------|--------------|------|------------------|---------------|------|------------------|-------------|------|------------------|------------|------|---------------|------|------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                               |                    |                  |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
| Test Method:      | ANSI C63.10 2009                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |                  |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |                  |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
| Limit:            | <table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>74.0</td><td>Peak Value</td></tr></table> |                    |                  | Frequency | Limit (dBuV/m @3m) | Remark | 30MHz-88MHz | 40.0 | Quasi-peak Value | 88MHz-216MHz | 43.5 | Quasi-peak Value | 216MHz-960MHz | 46.0 | Quasi-peak Value | 960MHz-1GHz | 54.0 | Quasi-peak Value | Above 1GHz | 54.0 | Average Value | 74.0 | Peak Value |
|                   | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Limit (dBuV/m @3m) | Remark           |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|                   | 30MHz-88MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 40.0               | Quasi-peak Value |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|                   | 88MHz-216MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 43.5               | Quasi-peak Value |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|                   | 216MHz-960MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 46.0               | Quasi-peak Value |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|                   | 960MHz-1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 54.0               | Quasi-peak Value |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|                   | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 54.0               | Average Value    |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 74.0               | Peak Value       |           |                    |        |             |      |                  |              |      |                  |               |      |                  |             |      |                  |            |      |               |      |            |

|             |  |
|-------------|--|
| Test Setup: |  |
|-------------|--|

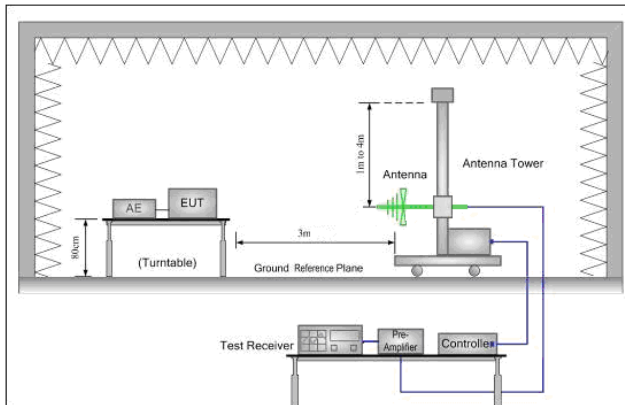


Figure 1. 30MHz to 1GHz

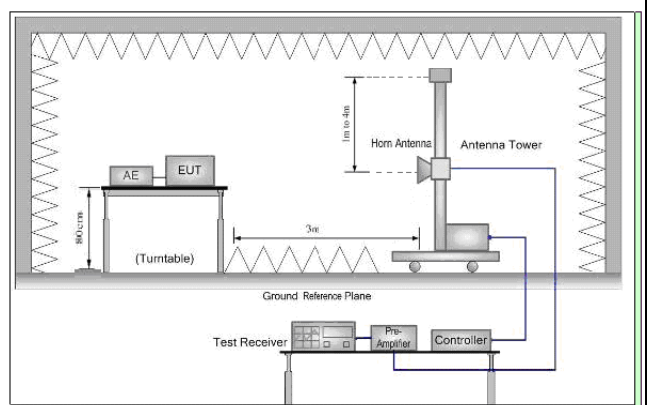


Figure 2. Above 1 GHz

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure: | <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|




|                        |                                                                                                                                                                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>g. Test the EUT in the lowest channel , the Highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with GFSK modulation.</p> <p>Transmitting mode, Charge + Transmitting mode.</p>                                                                                                                                                                                                                      |
| Final Test Mode:       | <p>Transmitting with GFSK modulation.</p> <p>Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case.</p> <p>Only the worst case is recorded in the report.</p>                                                                             |
| Instruments Used:      | <p>Refer to section 5.10 for details.</p>                                                                                                                                                                                                                                                                            |
| Test Results:          | <p>Pass</p>                                                                                                                                                                                                                                                                                                          |



Test plot as follows:

|            |      |               |        |         |      |          |
|------------|------|---------------|--------|---------|------|----------|
| Test mode: | GFSK | Test channel: | Lowest | Remark: | Peak | Vertical |
|------------|------|---------------|--------|---------|------|----------|

Data: 613

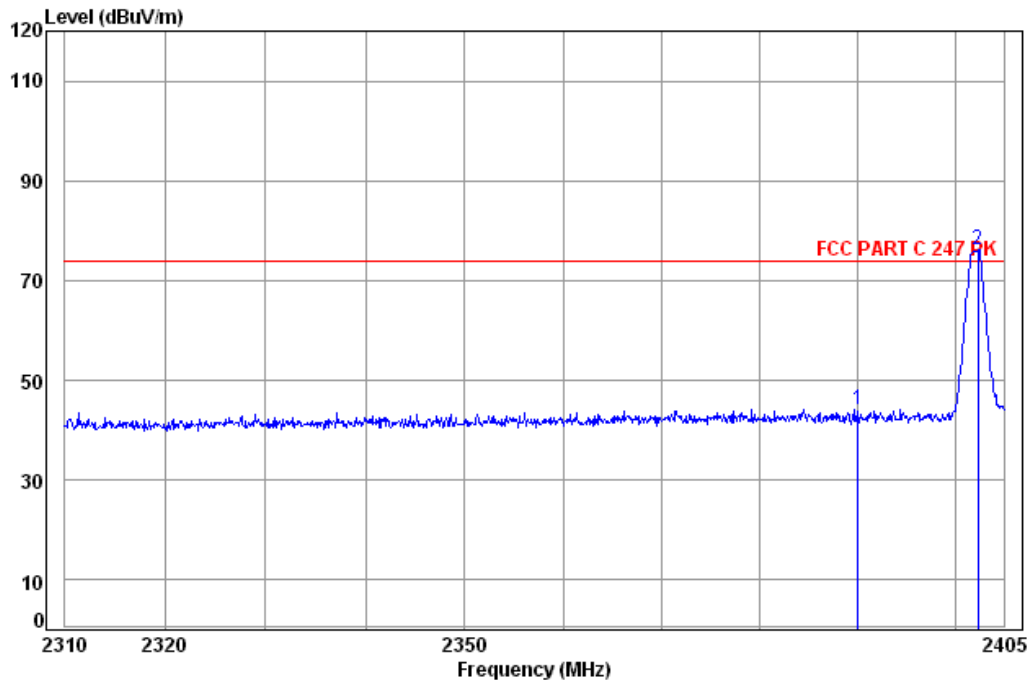


Site : chamber  
Condition: FCC PART C 247 PK 3m Vertical  
Job No: : 3444CR  
Mode: : 2402 Band edge BLE

|      | Freq    | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|---------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz     | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 2390.00 | 4.90       | 32.35      | 38.46         | 45.24      | 44.03  | 74.00      | -29.97     |
| 2 pp | 2402.38 | 4.92       | 32.41      | 38.46         | 77.30      | 76.17  | 74.00      | 2.17       |



|            |      |               |        |         |      |            |
|------------|------|---------------|--------|---------|------|------------|
| Test mode: | GFSK | Test channel: | Lowest | Remark: | Peak | Horizontal |
|------------|------|---------------|--------|---------|------|------------|

Data: 611

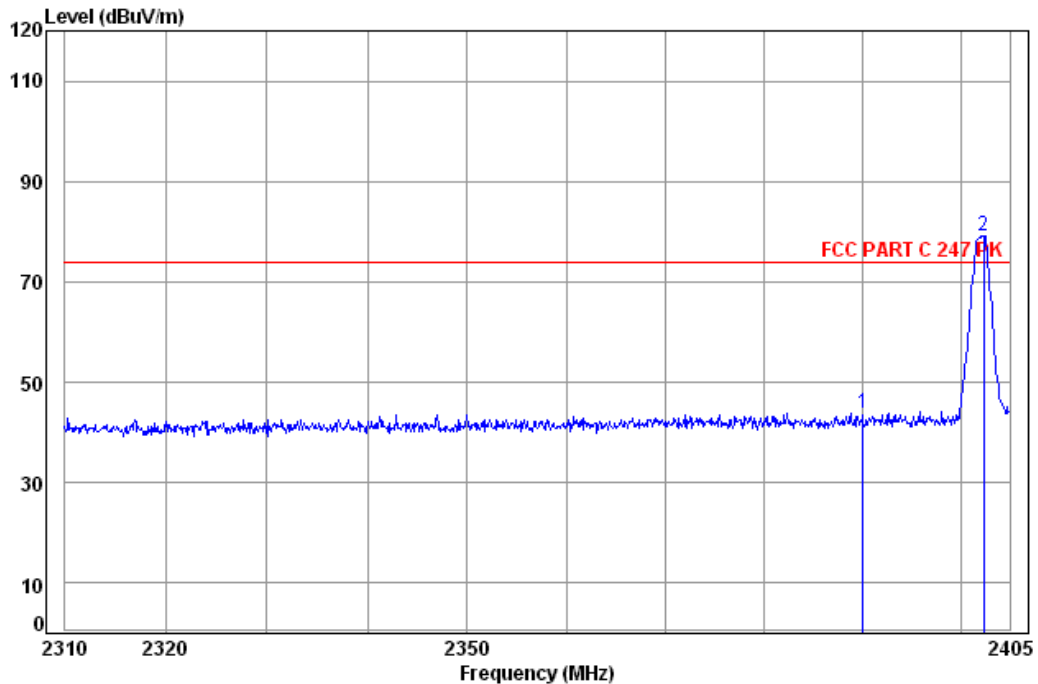

Site : chamber  
Condition: FCC PART C 247 PK 3m Horizontal  
Job No: : 3444CR  
Mode: : 2402 Band edge BLE


|      |         | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|---------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq    | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz     | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1    | 2390.00 | 4.90  | 32.35  | 38.46  | 45.09 | 43.88  | 74.00  | -30.12 |
| 2 pp | 2402.38 | 4.92  | 32.41  | 38.46  | 80.27 | 79.14  | 74.00  | 5.14   |





|            |      |               |        |         |         |          |
|------------|------|---------------|--------|---------|---------|----------|
| Test mode: | GFSK | Test channel: | Lowest | Remark: | Average | Vertical |
|------------|------|---------------|--------|---------|---------|----------|

Data: 614

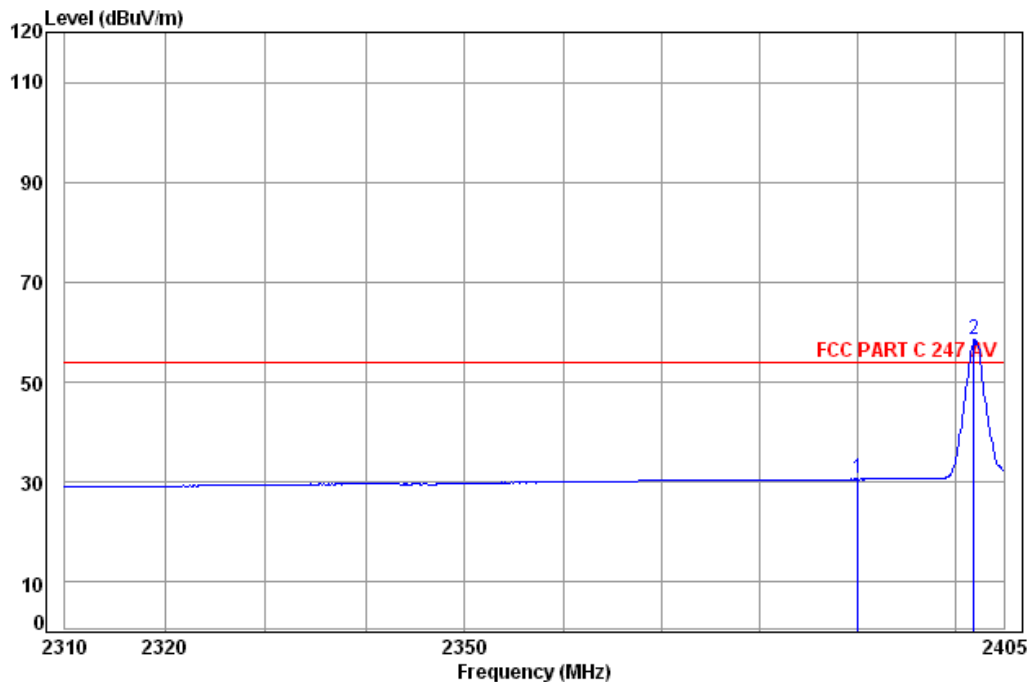

Site : chamber  
Condition: FCC PART C 247 AV 3m Vertical  
Job No: : 3444CR  
Mode: : 2402 Band edge BLE


|      | Freq    | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|---------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz     | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 2390.00 | 4.90       | 32.35      | 38.46         | 31.87      | 30.66  | 54.00      | -23.34     |
| 2 pp | 2401.90 | 4.92       | 32.41      | 38.46         | 59.53      | 58.40  | 54.00      | 4.40       |





|            |      |               |        |         |         |            |
|------------|------|---------------|--------|---------|---------|------------|
| Test mode: | GFSK | Test channel: | Lowest | Remark: | Average | Horizontal |
|------------|------|---------------|--------|---------|---------|------------|

Data: 612

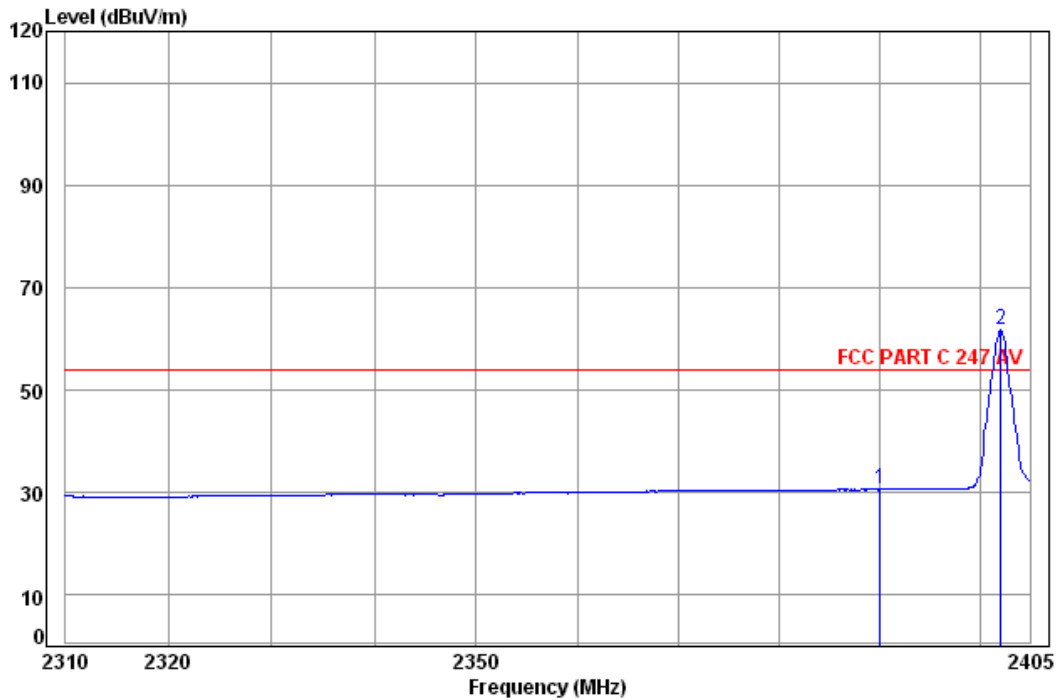


Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal  
Job No: : 3444CR  
Mode: : 2402 Band edge BLE

|      |         | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|---------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq    | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz     | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1    | 2390.00 | 4.90  | 32.35  | 38.46  | 31.98 | 30.77  | 54.00  | -23.23 |
| 2 pp | 2402.09 | 4.92  | 32.41  | 38.46  | 62.88 | 61.75  | 54.00  | 7.75   |



|            |      |               |         |         |      |          |
|------------|------|---------------|---------|---------|------|----------|
| Test mode: | GFSK | Test channel: | Highest | Remark: | Peak | Vertical |
|------------|------|---------------|---------|---------|------|----------|

Data: 609

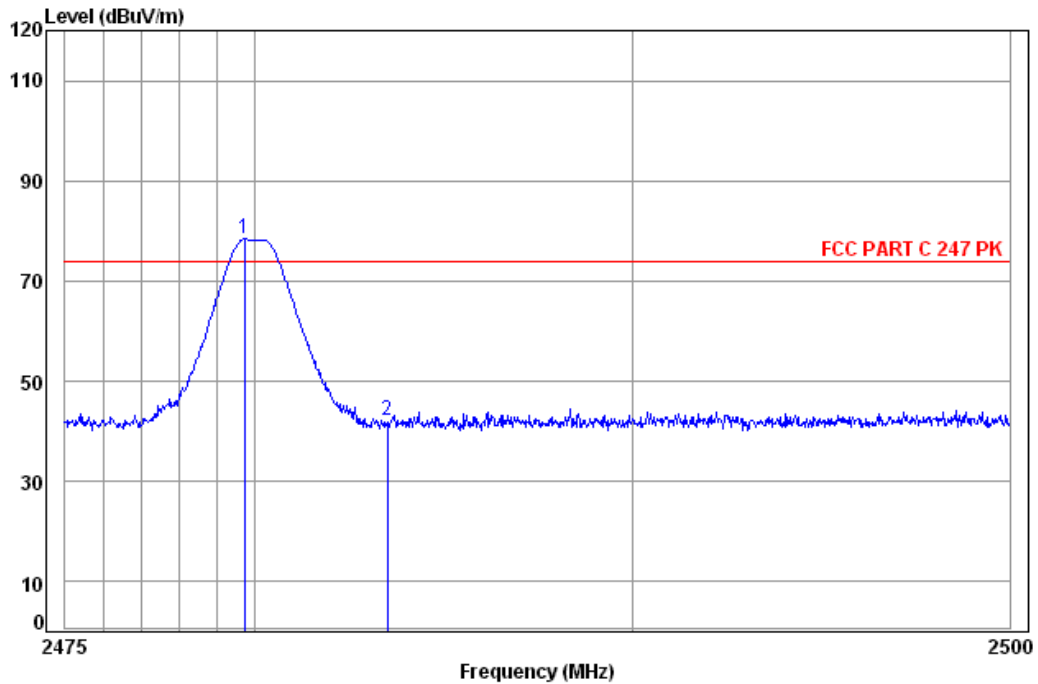


Site : chamber  
Condition: FCC PART C 247 PK 3m Vertical  
Job No: : 3444CR  
Mode: : 2480 Band edge BLE

|      |         | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|---------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq    | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz     | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1 pp | 2479.73 | 5.02  | 32.44  | 38.47  | 79.48 | 78.47  | 74.00  | 4.47   |
| 2    | 2483.50 | 5.03  | 32.44  | 38.47  | 43.30 | 42.30  | 74.00  | -31.70 |



|            |      |               |         |         |      |            |
|------------|------|---------------|---------|---------|------|------------|
| Test mode: | GFSK | Test channel: | Highest | Remark: | Peak | Horizontal |
|------------|------|---------------|---------|---------|------|------------|

Data: 607

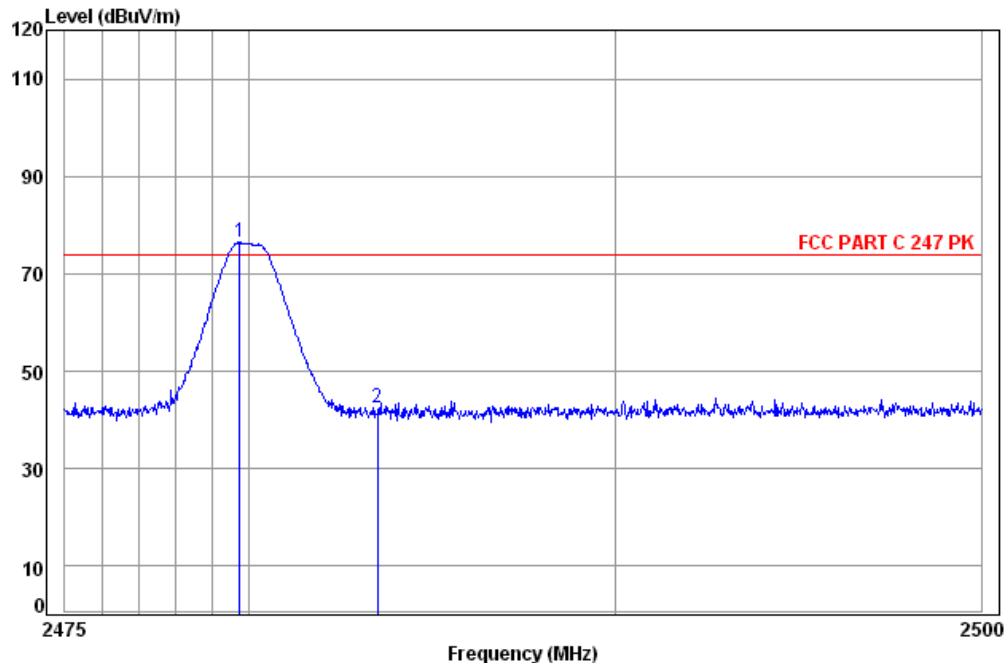

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3444CR


Mode: : 2480 Band edge BLE

|      |         | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|---------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq    | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz     | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1 pp | 2479.76 | 5.02  | 32.44  | 38.47  | 77.44 | 76.43  | 74.00  | 2.43   |
| 2    | 2483.50 | 5.03  | 32.44  | 38.47  | 43.46 | 42.46  | 74.00  | -31.54 |



|            |      |               |         |         |         |          |
|------------|------|---------------|---------|---------|---------|----------|
| Test mode: | GFSK | Test channel: | Highest | Remark: | Average | Vertical |
|------------|------|---------------|---------|---------|---------|----------|

Data: 610

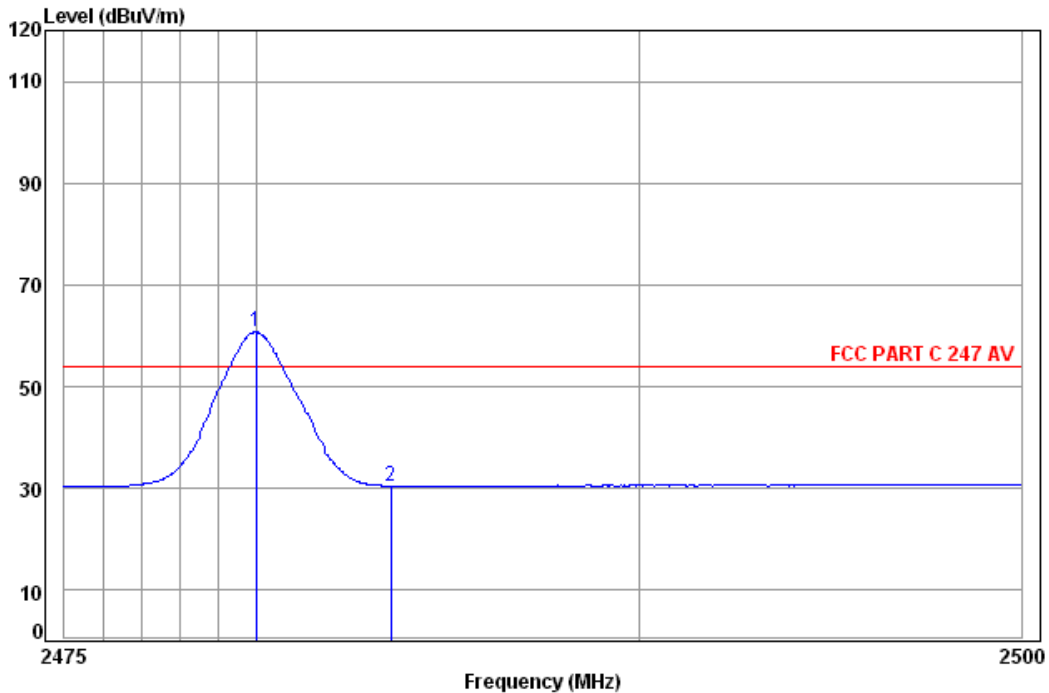


Site : chamber  
Condition: FCC PART C 247 AV 3m Vertical  
Job No: : 3444CR  
Mode: : 2480 Band edge BLE

|      |         | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|---------|-------|--------|--------|-------|--------|--------|--------|
|      | Freq    | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz     | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1 pp | 2479.98 | 5.02  | 32.44  | 38.47  | 61.74 | 60.73  | 54.00  | 6.73   |
| 2    | 2483.50 | 5.03  | 32.44  | 38.47  | 31.45 | 30.45  | 54.00  | -23.55 |



|            |      |               |         |         |         |            |
|------------|------|---------------|---------|---------|---------|------------|
| Test mode: | GFSK | Test channel: | Highest | Remark: | Average | Horizontal |
|------------|------|---------------|---------|---------|---------|------------|

Data: 608

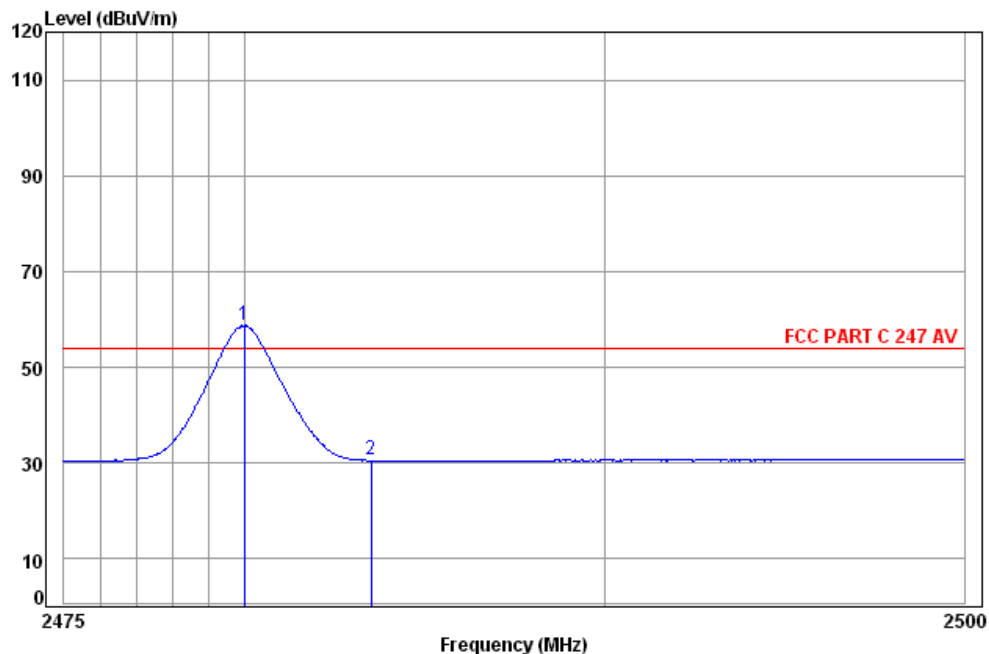

Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal  
Job No: : 3444CR  
Mode: : 2480 Band edge BLE

|      | Freq    | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|---------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz     | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1 pp | 2479.98 | 5.02       | 32.44      | 38.47         | 59.74      | 58.73  | 54.00      | 4.73       |
| 2    | 2483.50 | 5.03       | 32.44      | 38.47         | 31.59      | 30.59  | 54.00      | -23.41     |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


## 7 Photographs - EUT Test Setup

Test model No.: Ti100

### 7.1 Conducted Emission



### 7.2 Radiated Emission

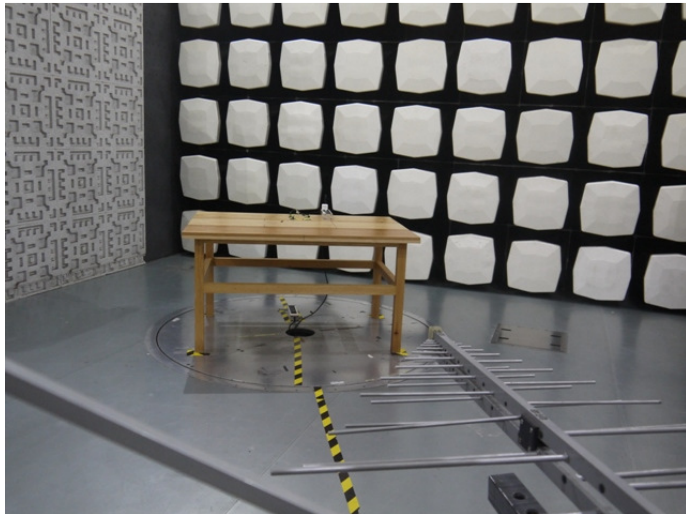

### 7.3 Radiated Spurious Emission



## 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1506003444CR.