



Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Speaker
Trade Mark: FOREVER SUNDAYS
Test Model: SUN-SPCH
FCC ID: 2AANZSPCH

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.978	2401.445	2402.423	---	---
DH5	Ant1	2441	1.032	2440.391	2441.423	---	---
DH5	Ant1	2480	1.011	2479.412	2480.423	---	---
2DH5	Ant1	2402	1.290	2401.289	2402.579	---	---
2DH5	Ant1	2441	1.329	2440.256	2441.585	---	---
2DH5	Ant1	2480	1.290	2479.286	2480.576	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs






DH5-Ant1-2480

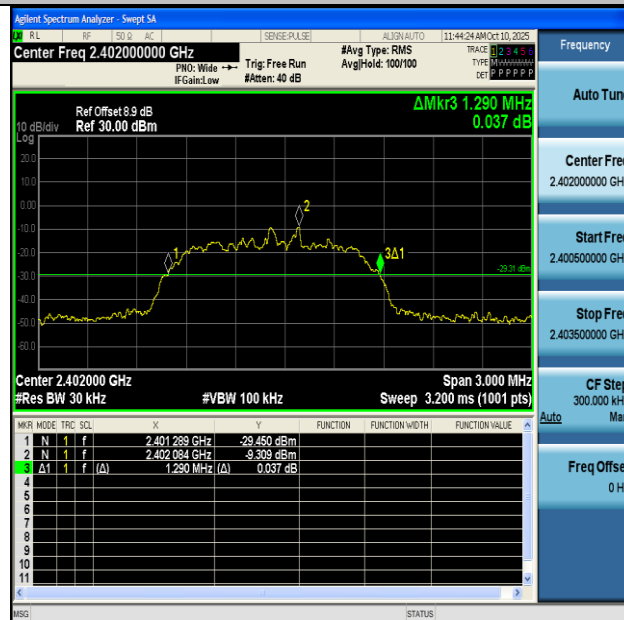


2DH5-Ant1-2402



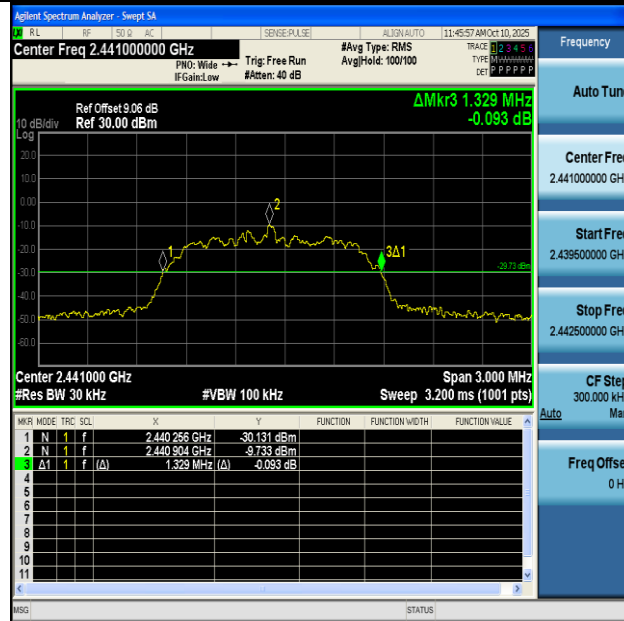

2DH5-Ant1-2441

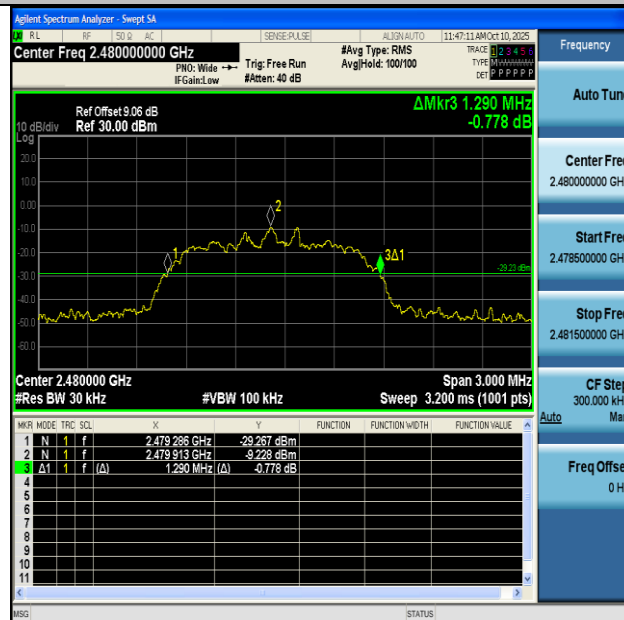

2DH5-Ant1-2480





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.91388	2401.4690	2402.3829	---	---
DH5	Ant1	2441	0.91306	2440.4672	2441.3803	---	---
DH5	Ant1	2480	0.90427	2479.4720	2480.3763	---	---
2DH5	Ant1	2402	1.2082	2401.3200	2402.5282	---	---
2DH5	Ant1	2441	1.1879	2440.3267	2441.5146	---	---
2DH5	Ant1	2480	1.2035	2479.3235	2480.5270	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs



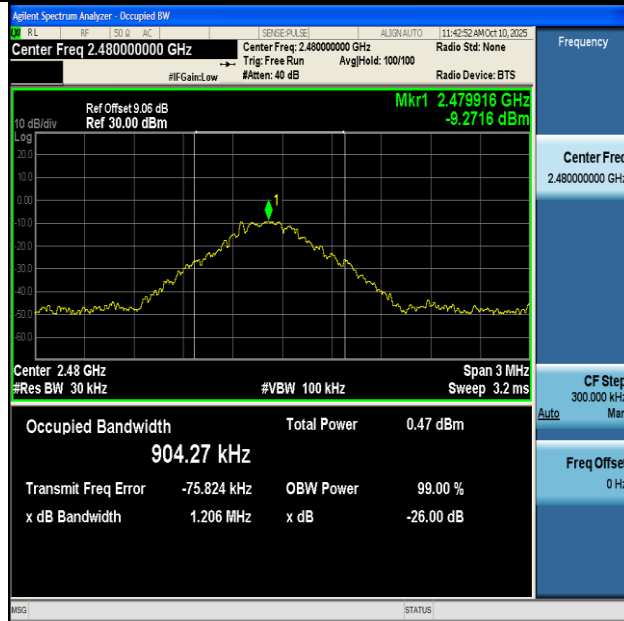


DH5-Ant1-2480

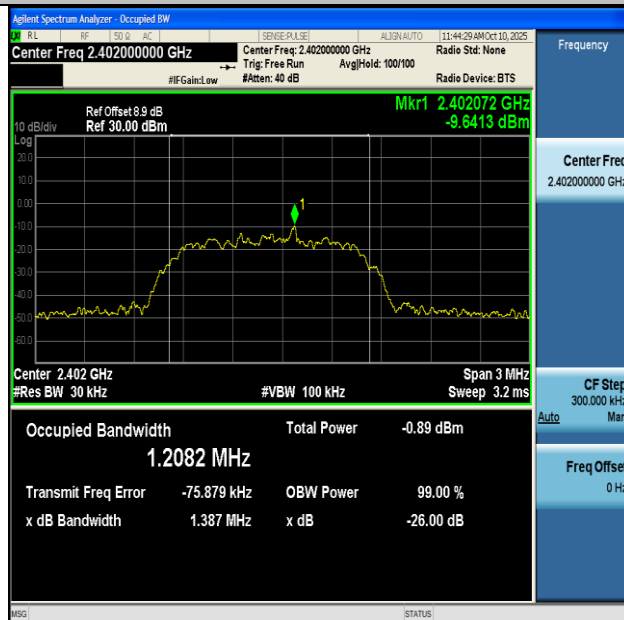


2DH5-Ant1-2402



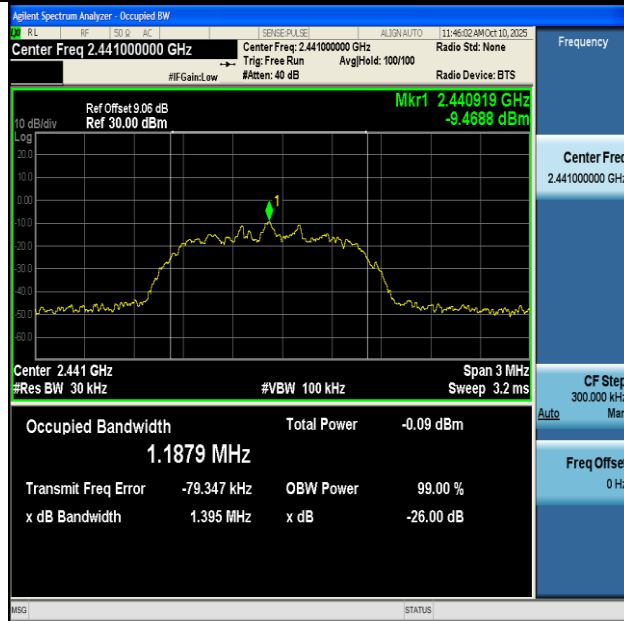

2DH5-Ant1-2441

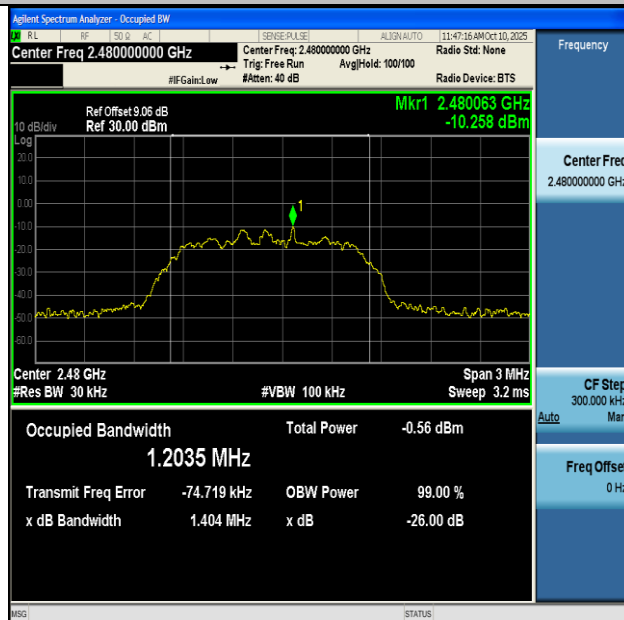

2DH5-Ant1-2480





Appendix C: Maximum peak conducted output power

Test Result


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH5	Ant1	2402	-6.09	≤20.97	PASS
DH5	Ant1	2441	-5.75	≤20.97	PASS
DH5	Ant1	2480	-5.84	≤20.97	PASS
2DH5	Ant1	2402	-5.51	≤20.97	PASS
2DH5	Ant1	2441	-5.06	≤20.97	PASS
2DH5	Ant1	2480	-5.30	≤20.97	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

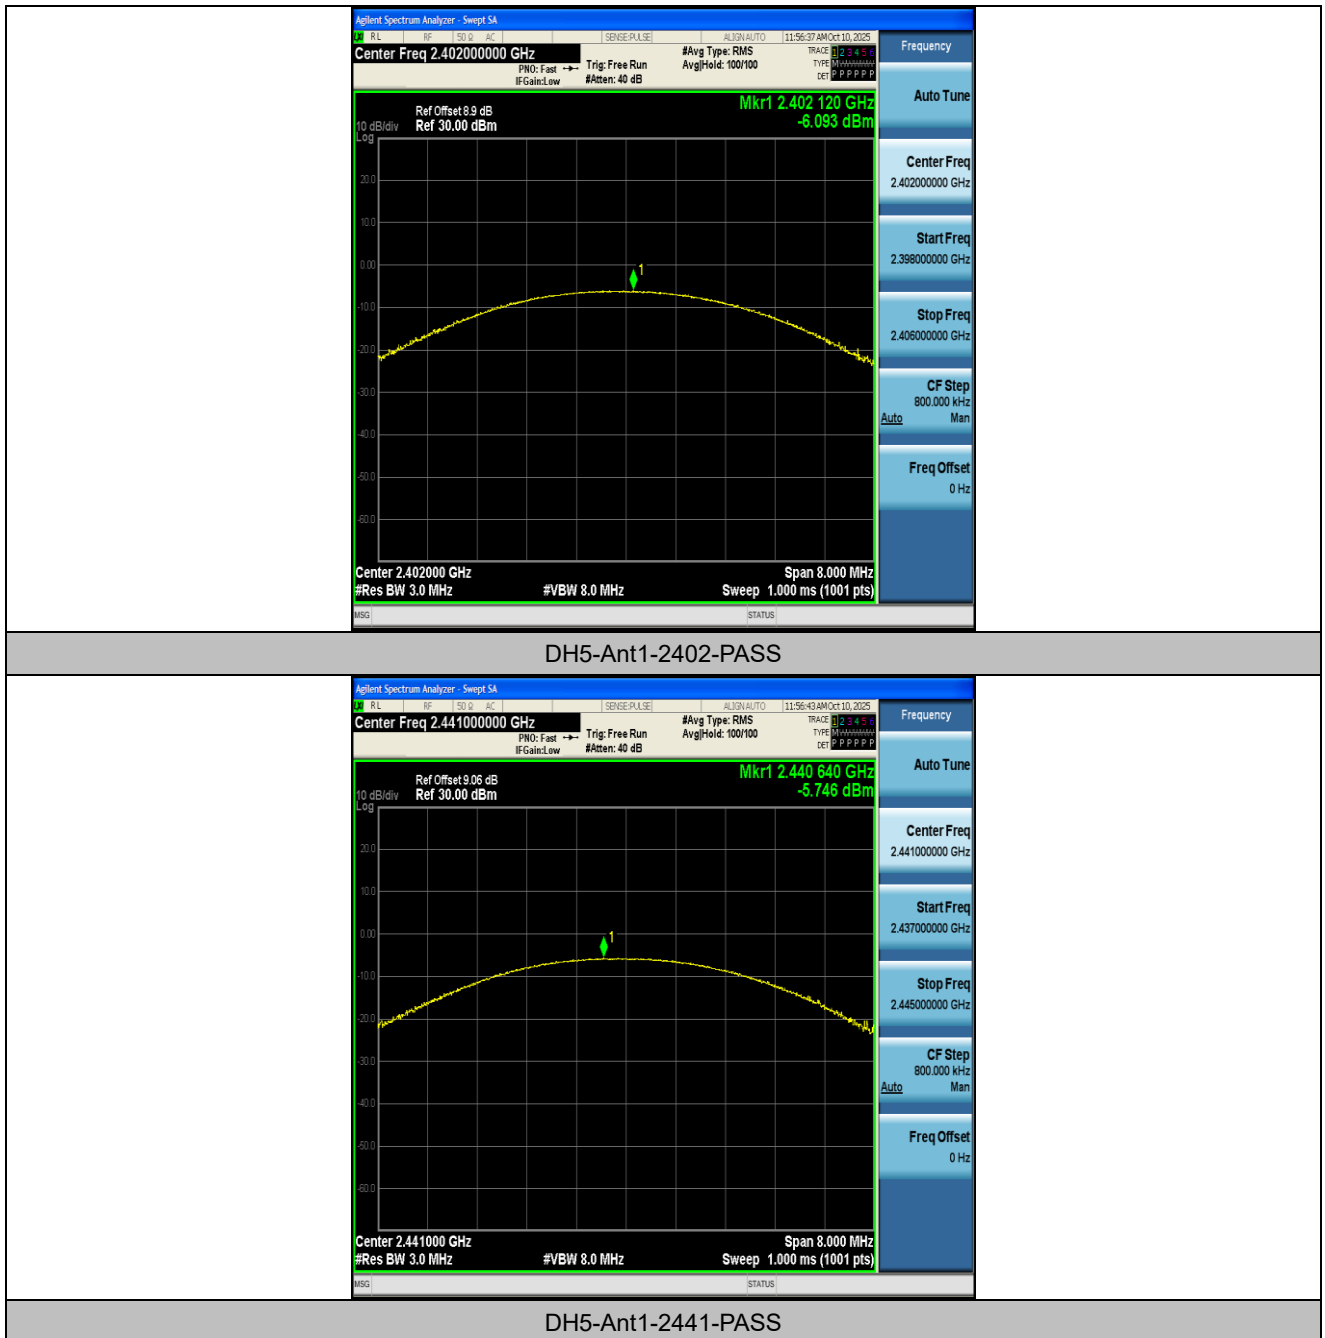

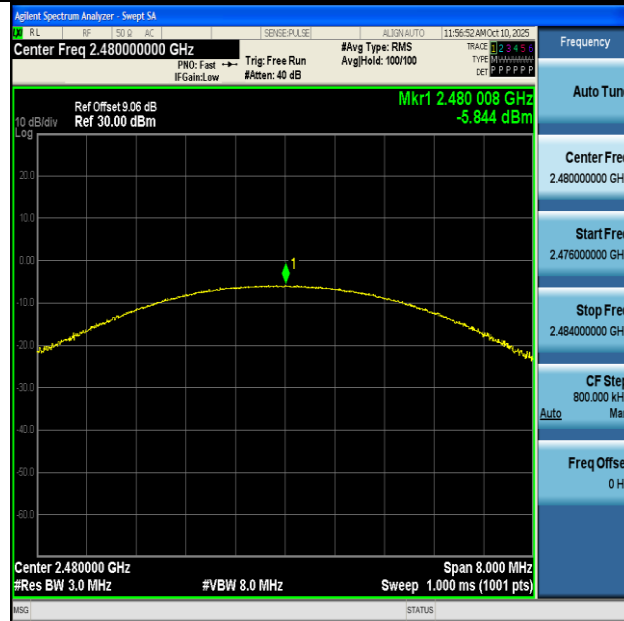


DH5-Ant1-2480-PASS




2DH5-Ant1-2402-PASS



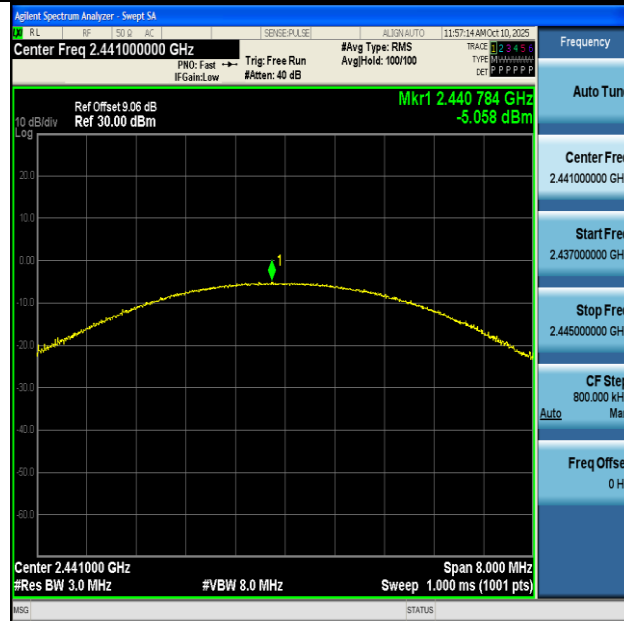

2DH5-Ant1-2441-PASS

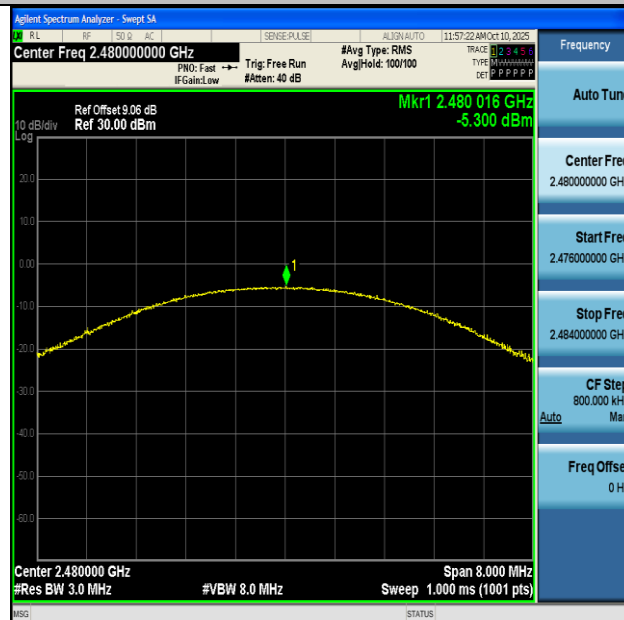

2DH5-Ant1-2480-PASS





Appendix D: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	0.976	≥0.688	PASS
2DH5	Ant1	Hop	1.028	≥0.886	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





Appendix E: Time of occupancy

Test Result


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	TotalHops [Num]	Result [s]	Limit [s]	Verdict
DH5	Ant1	Hop	2.879	90	0.259	≤0.4	PASS
2DH5	Ant1	Hop	2.885	130	0.375	≤0.4	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

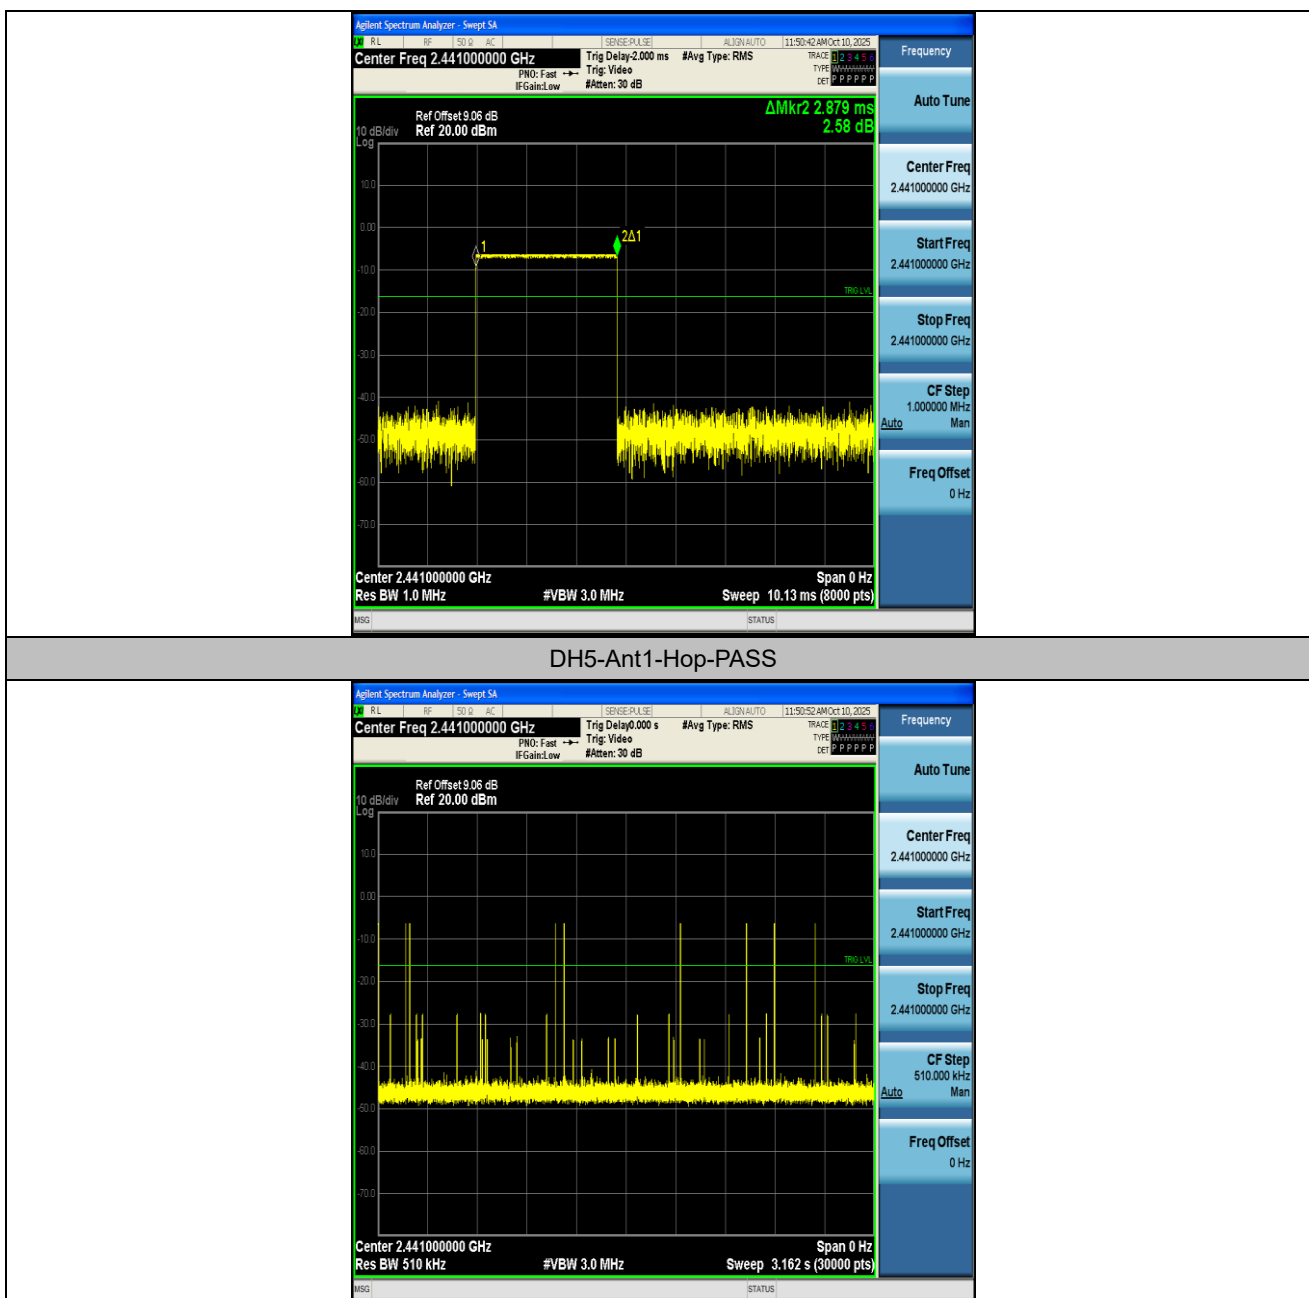

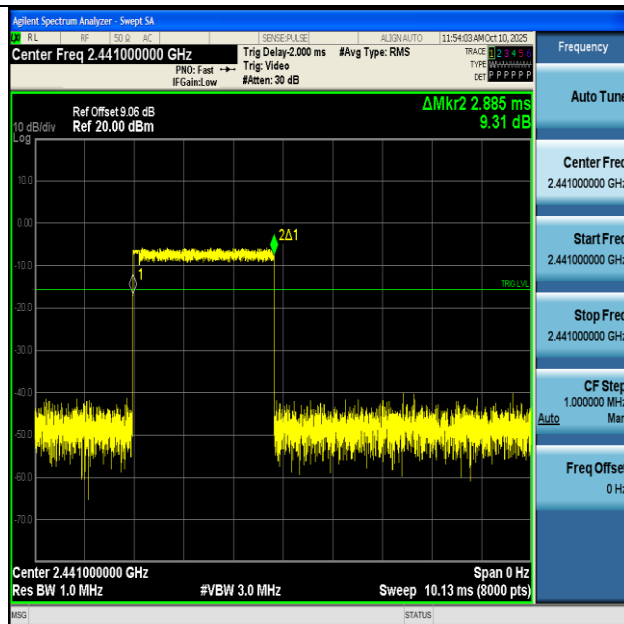

2DH5-Ant1-Hop-PASS

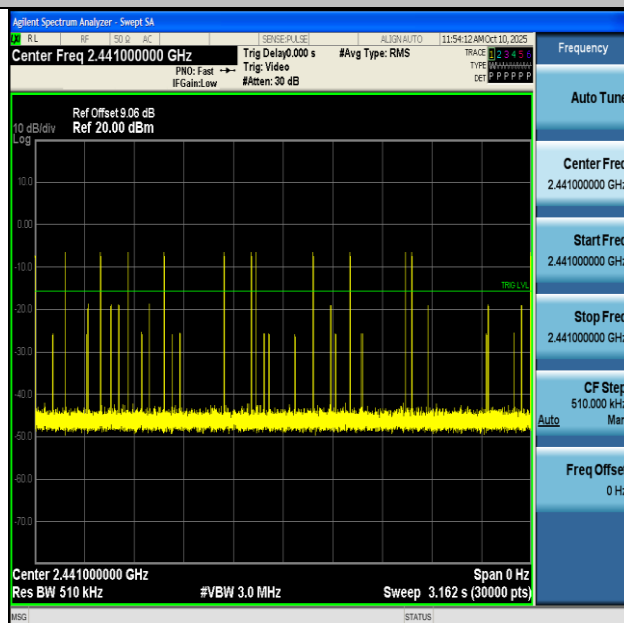



Appendix F: Number of hopping channels

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





Appendix G: Band edge measurements

Test Result


Test Mode	Antenna	Ch.Name	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-6.97	-47.69	≤ -26.97	PASS
DH5	Ant1	High	2480	-6.85	-48.93	≤ -26.85	PASS
DH5	Ant1	Low	Hop_2402	-8.38	-48.9	≤ -28.38	PASS
DH5	Ant1	High	Hop_2480	-6.97	-47.56	≤ -26.97	PASS
2DH5	Ant1	Low	2402	-7.80	-49.01	≤ -27.8	PASS
2DH5	Ant1	High	2480	-6.70	-48.45	≤ -26.7	PASS
2DH5	Ant1	Low	Hop_2402	-10.67	-48.08	≤ -30.67	PASS
2DH5	Ant1	High	Hop_2480	-7.71	-48.21	≤ -27.71	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

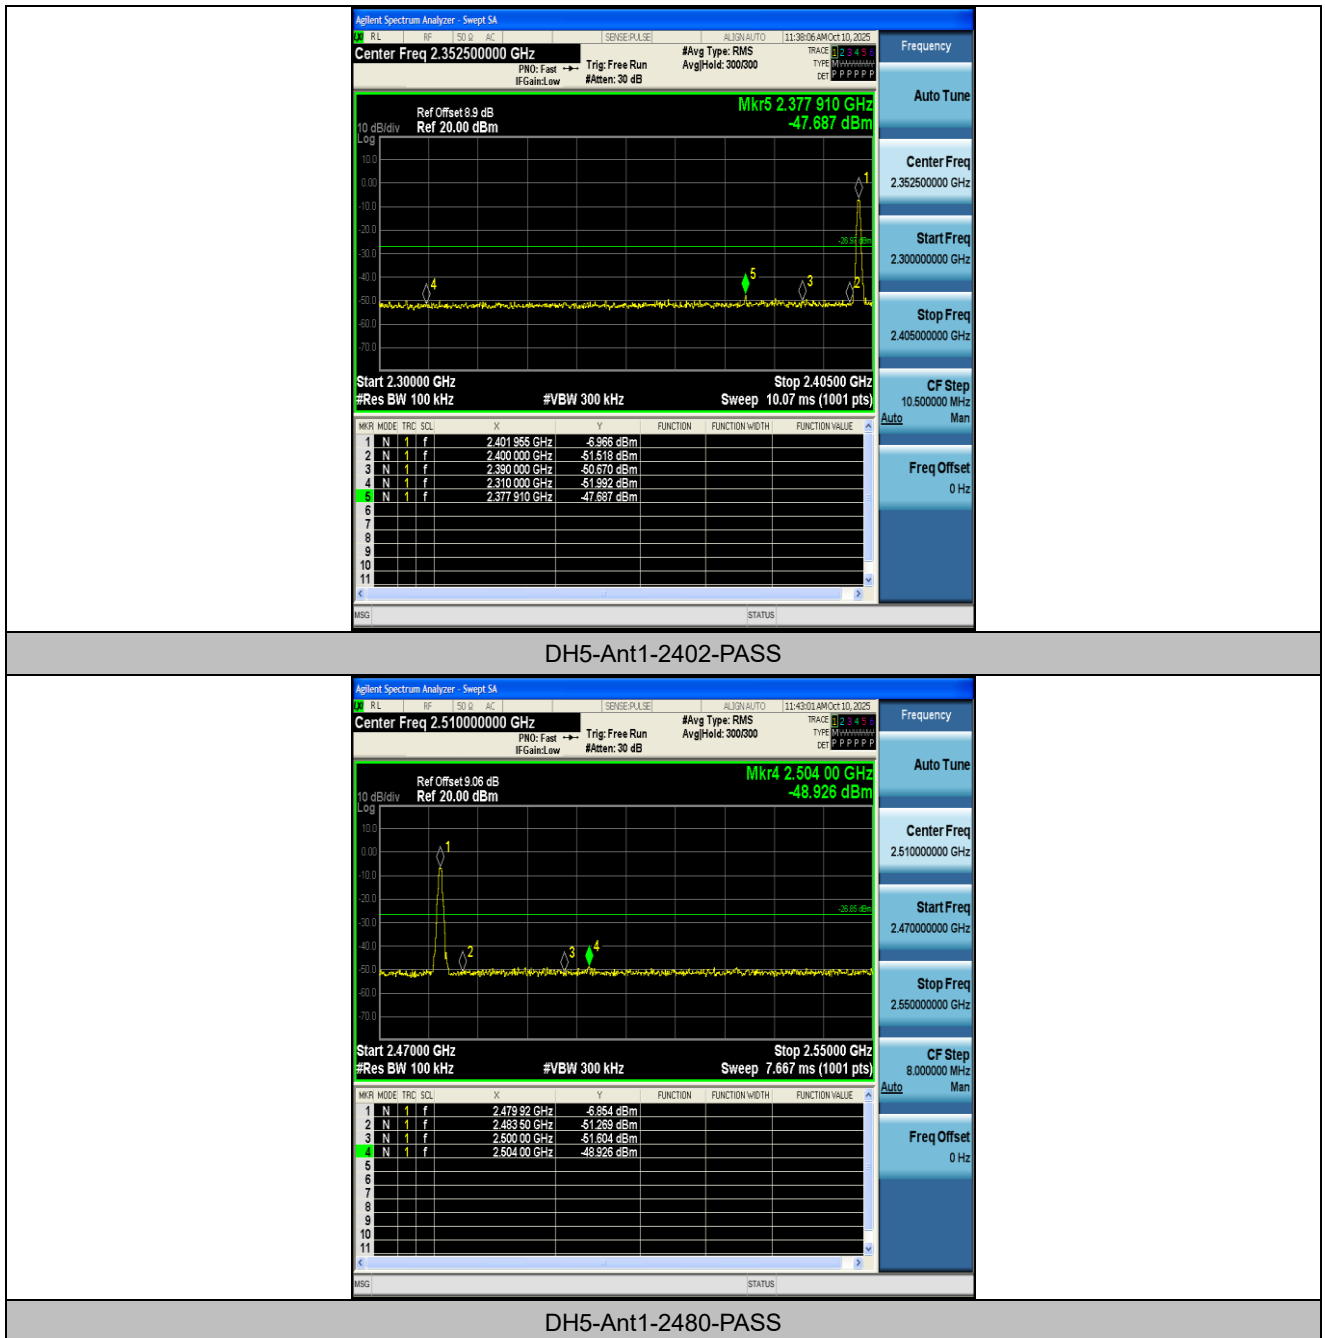

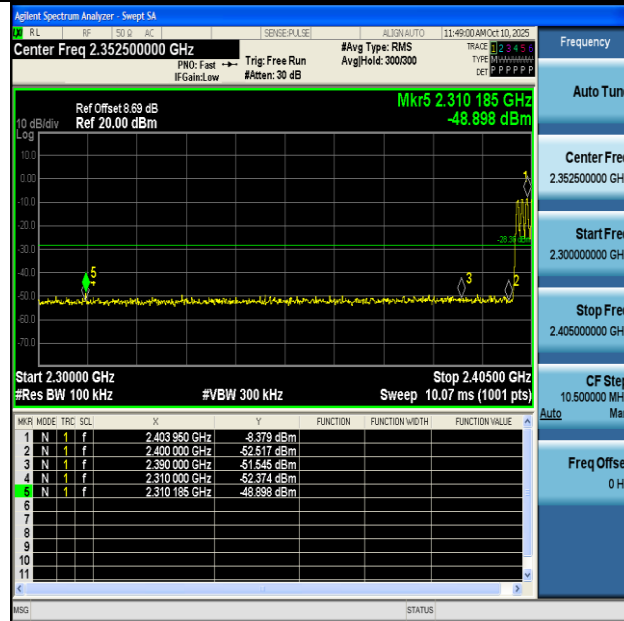


DH5-Ant1-Hop_2402-PASS

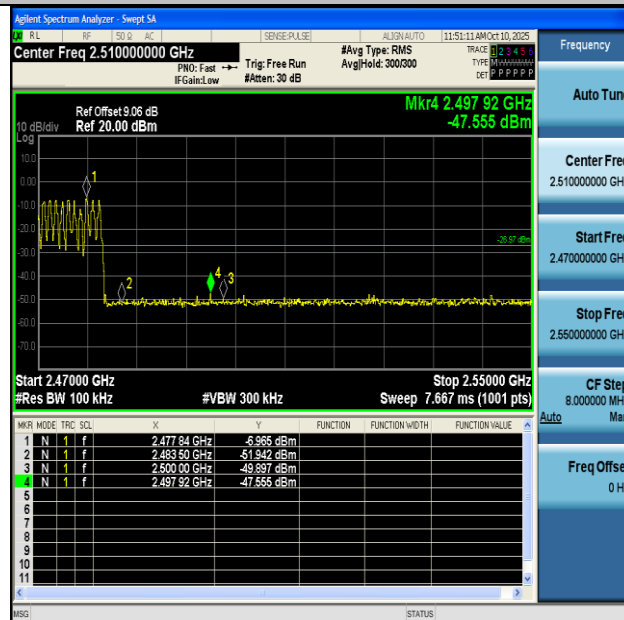


DH5-Ant1-Hop_2480-PASS



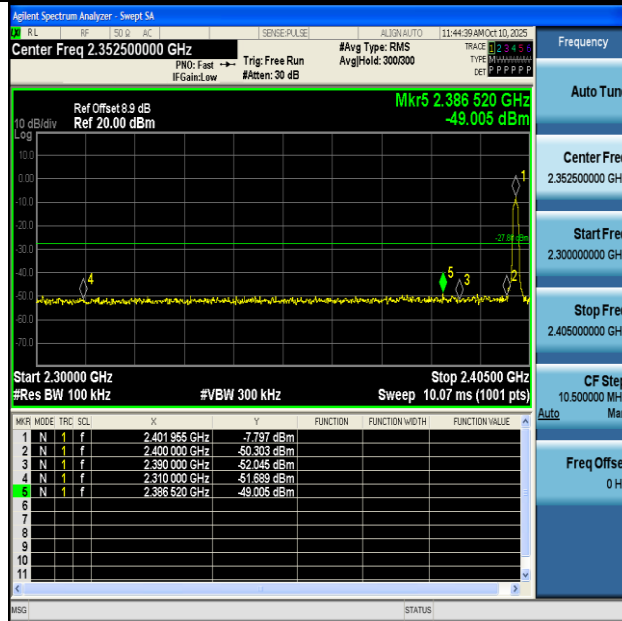


2DH5-Ant1-2402-PASS

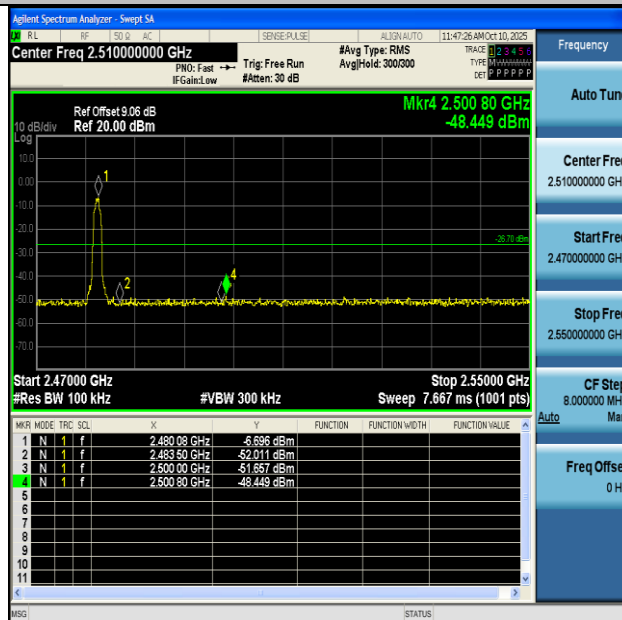


2DH5-Ant1-2480-PASS



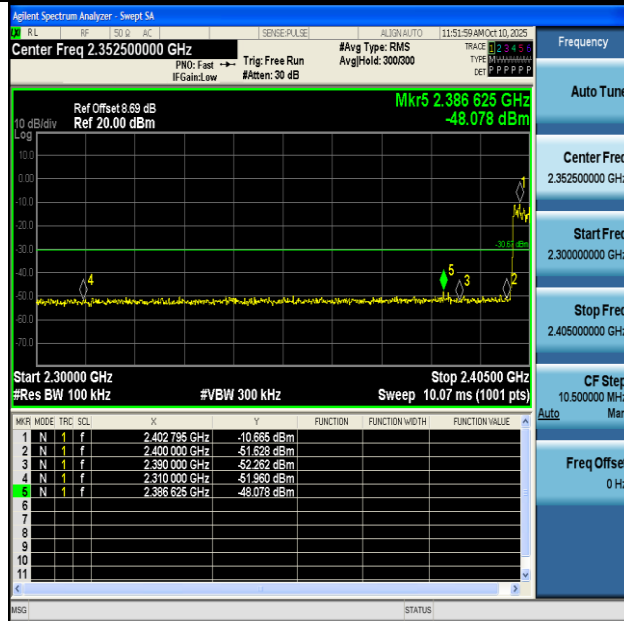

2DH5-Ant1-Hop_2402-PASS

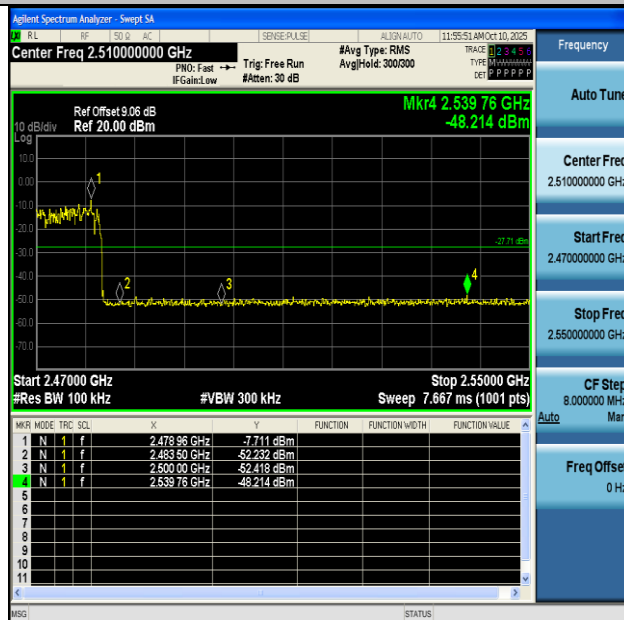

2DH5-Ant1-Hop_2480-PASS





Appendix H: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-7.05	-7.05	---	PASS
DH5	Ant1	2402	30~1000	-7.05	-62.43	≤-27.05	PASS
DH5	Ant1	2402	1000~26500	-7.05	-45.46	≤-27.05	PASS
DH5	Ant1	2441	0~Reference	-7.17	-7.17	---	PASS
DH5	Ant1	2441	30~1000	-7.17	-59.64	≤-27.17	PASS
DH5	Ant1	2441	1000~26500	-7.17	-45.33	≤-27.17	PASS
DH5	Ant1	2480	0~Reference	-7.13	-7.13	---	PASS
DH5	Ant1	2480	30~1000	-7.13	-61.88	≤-27.13	PASS
DH5	Ant1	2480	1000~26500	-7.13	-45.18	≤-27.13	PASS
2DH5	Ant1	2402	0~Reference	-10.38	-10.38	---	PASS
2DH5	Ant1	2402	30~1000	-10.38	-61.69	≤-30.38	PASS
2DH5	Ant1	2402	1000~26500	-10.38	-45.69	≤-30.38	PASS
2DH5	Ant1	2441	0~Reference	-6.54	-6.54	---	PASS
2DH5	Ant1	2441	30~1000	-6.54	-60.73	≤-26.54	PASS
2DH5	Ant1	2441	1000~26500	-6.54	-45.04	≤-26.54	PASS
2DH5	Ant1	2480	0~Reference	-8.14	-8.14	---	PASS
2DH5	Ant1	2480	30~1000	-8.14	-62.04	≤-28.14	PASS
2DH5	Ant1	2480	1000~26500	-8.14	-45.37	≤-28.14	PASS


Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.






Test Graphs

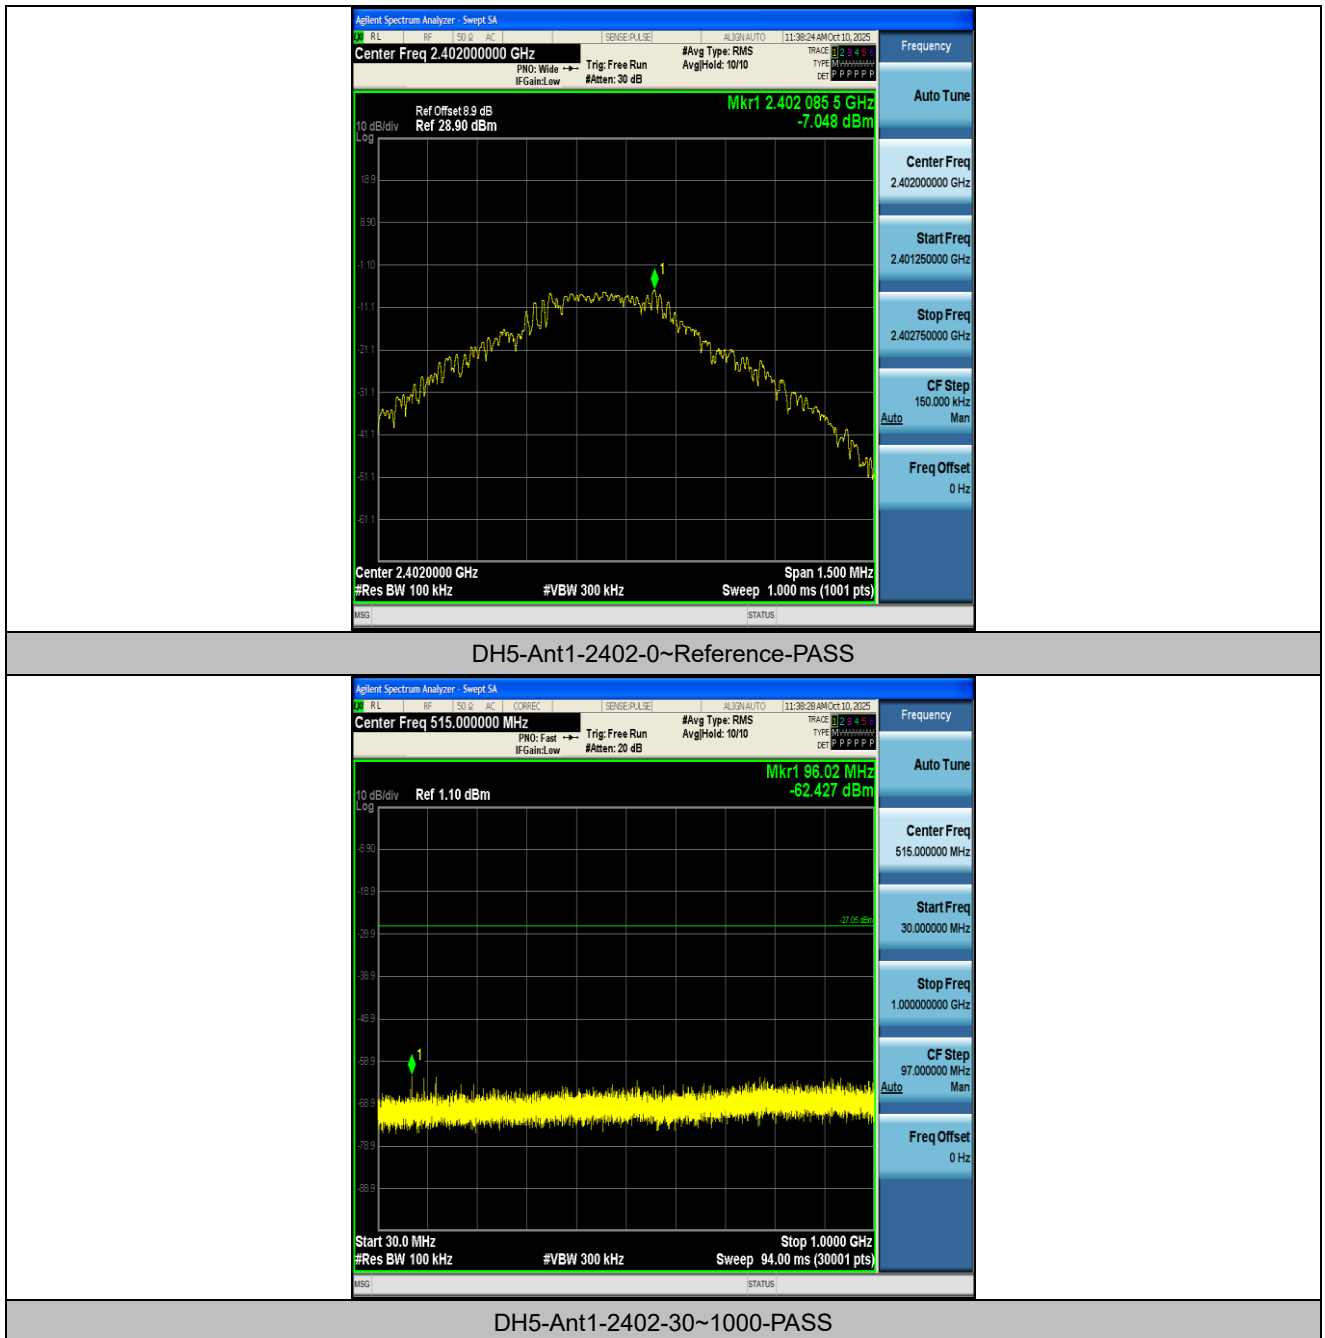

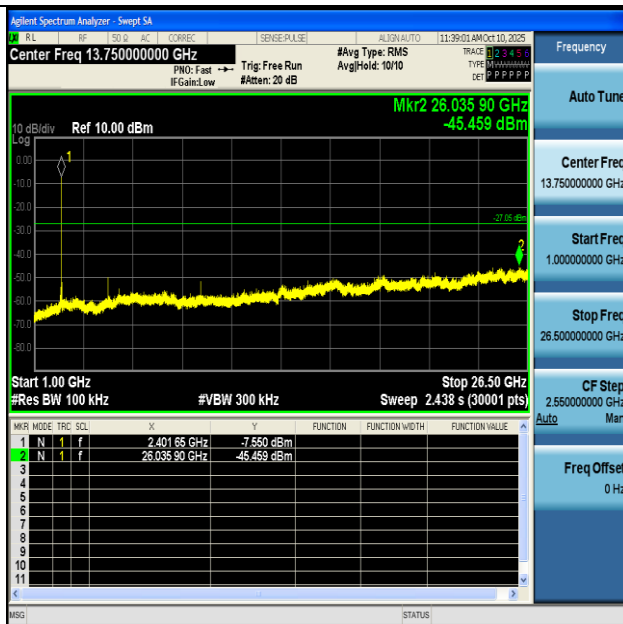


DH5-Ant1-2402-1000~26500-PASS

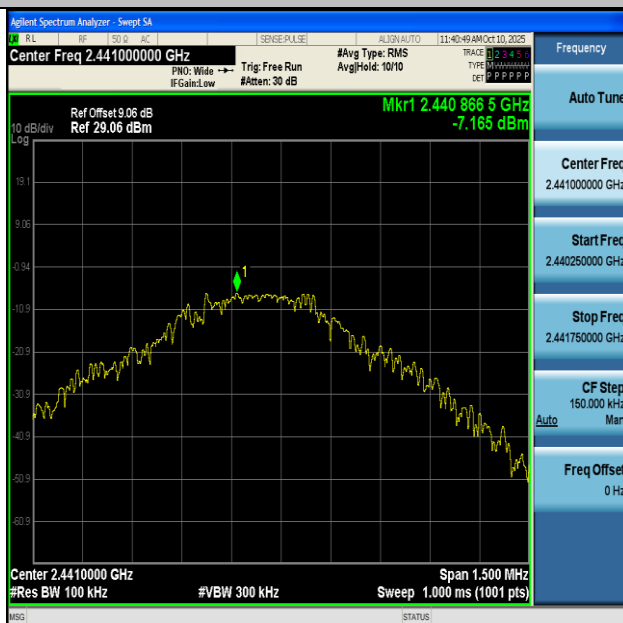


DH5-Ant1-2441-0~Reference-PASS



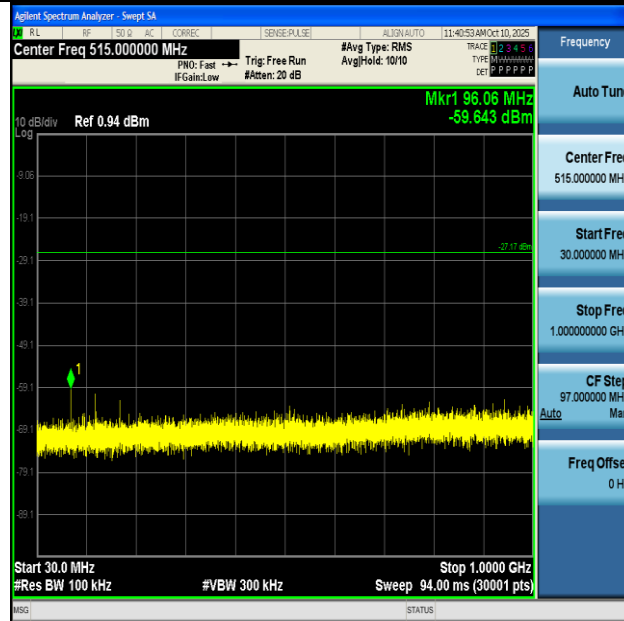

DH5-Ant1-2441-30~1000-PASS

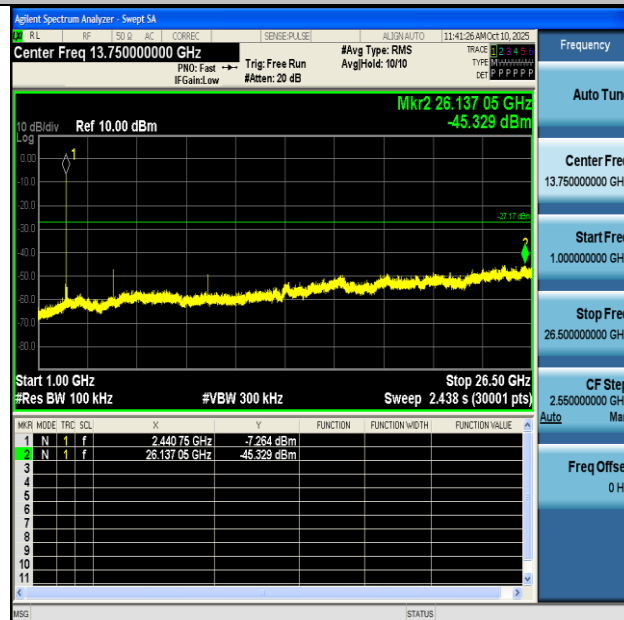


DH5-Ant1-2441-1000~26500-PASS






DH5-Ant1-2480-0~Reference-PASS

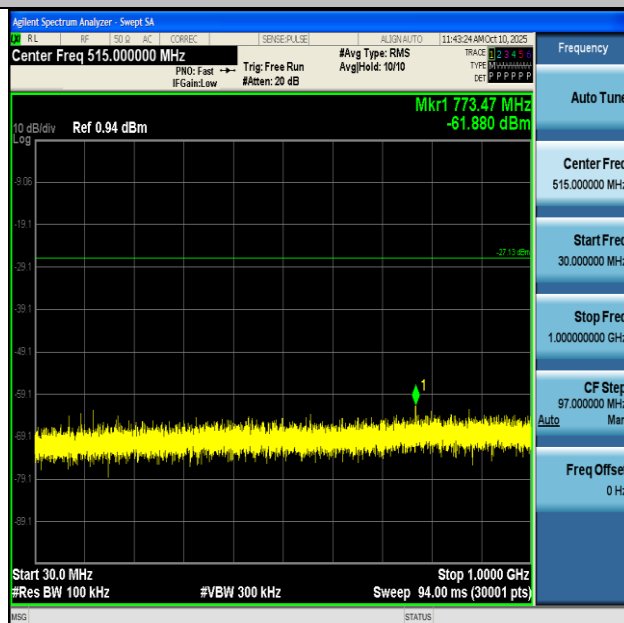


DH5-Ant1-2480-30~1000-PASS



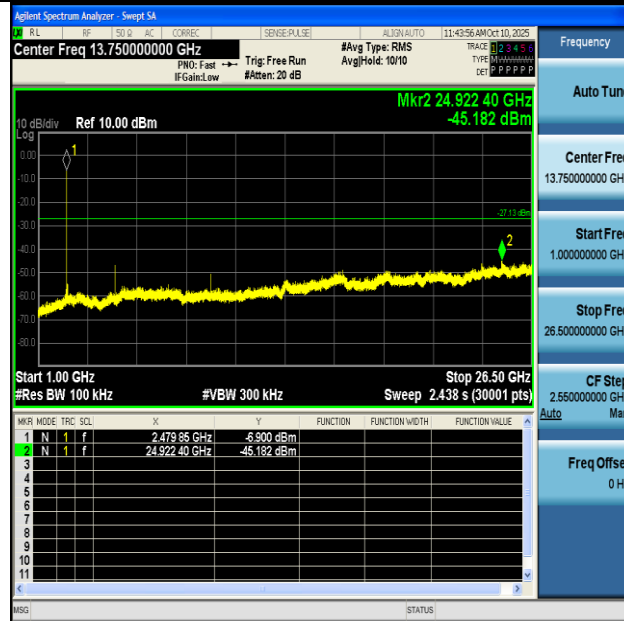


DH5-Ant1-2480-1000~26500-PASS

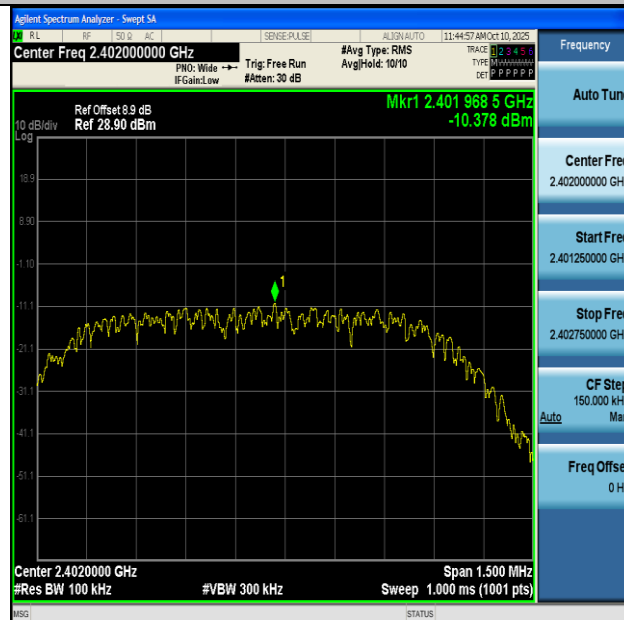


2DH5-Ant1-2402-0~Reference-PASS



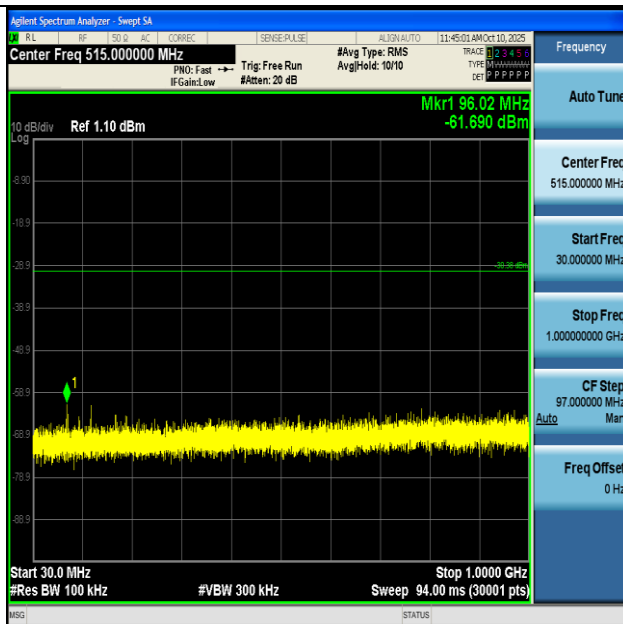

2DH5-Ant1-2402-30~1000-PASS

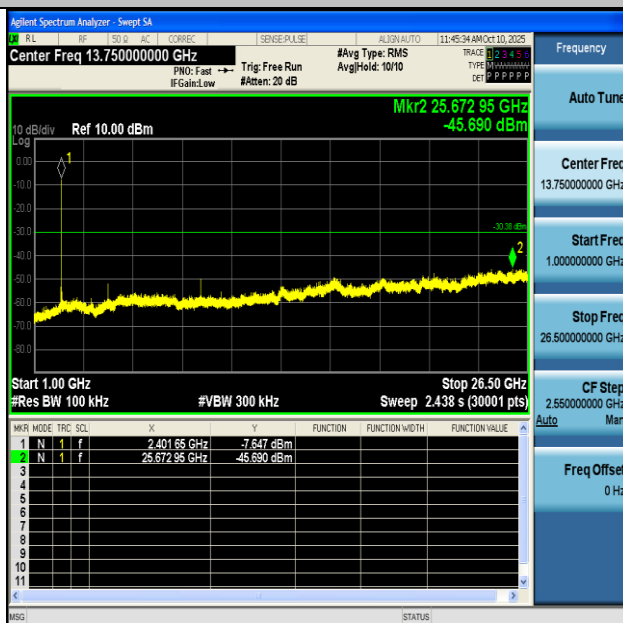


2DH5-Ant1-2402-1000~26500-PASS






2DH5-Ant1-2441-0~Reference-PASS

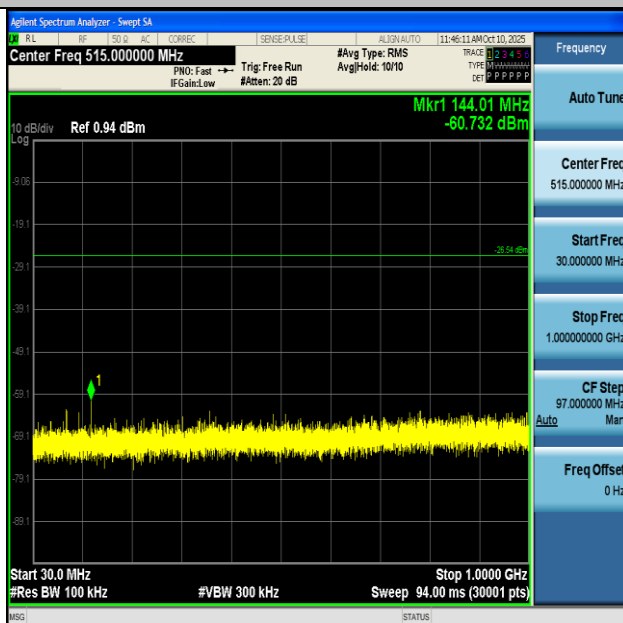


2DH5-Ant1-2441-30~1000-PASS



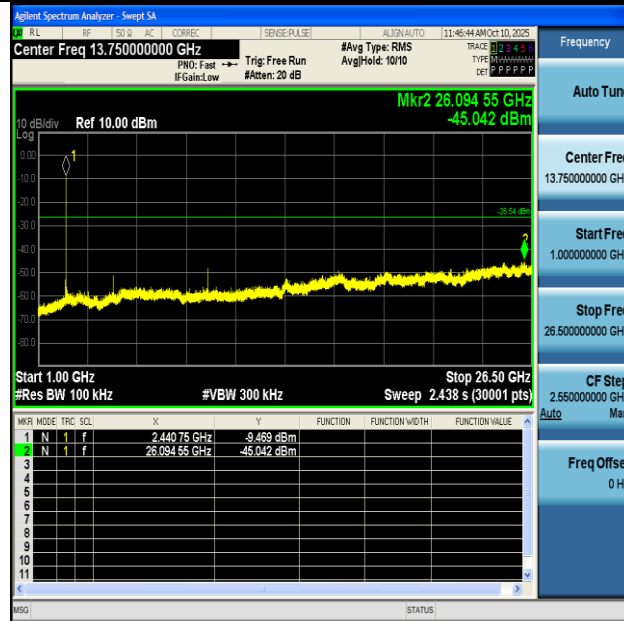


2DH5-Ant1-2441-1000~26500-PASS

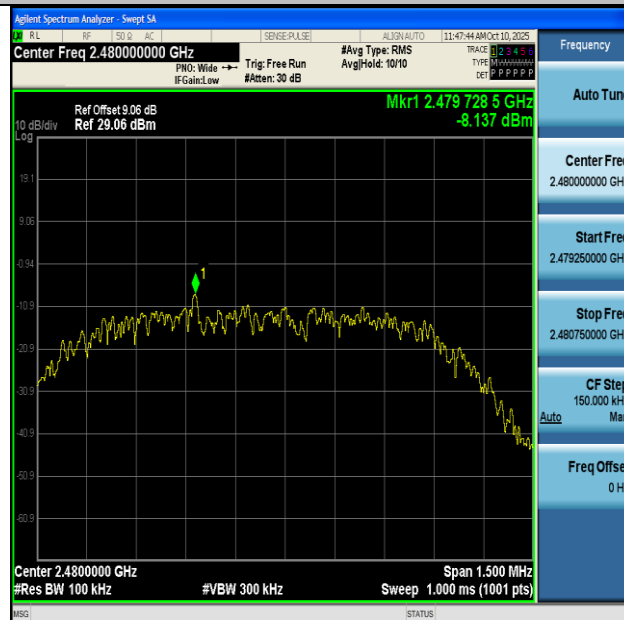


2DH5-Ant1-2480-0~Reference-PASS



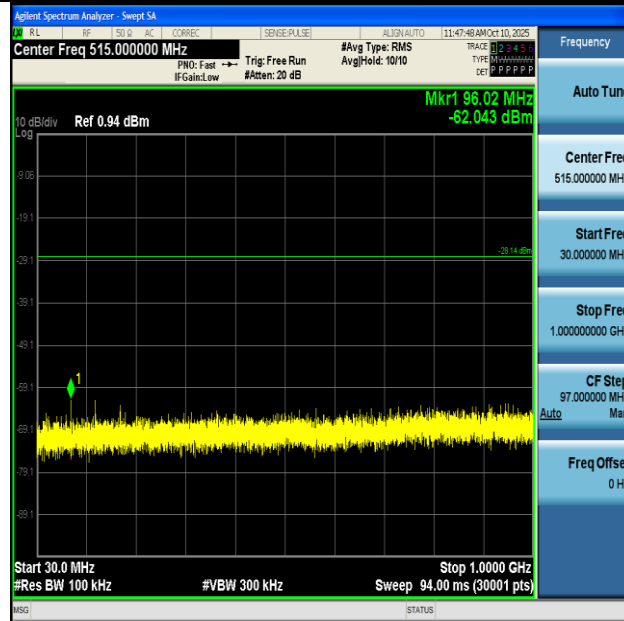

2DH5-Ant1-2480-30~1000-PASS

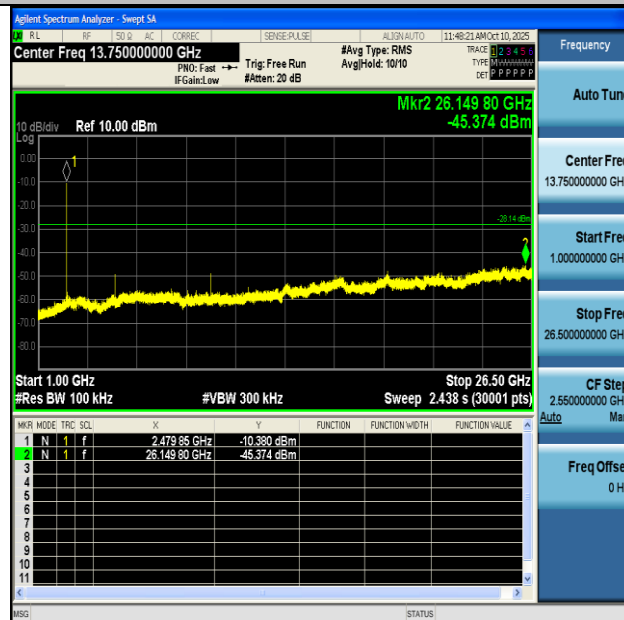

2DH5-Ant1-2480-1000~26500-PASS





Appendix I: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.88	3.75	76.80	1.15
DH5	Ant1	2441	2.88	3.75	76.80	1.15
DH5	Ant1	2480	2.88	3.75	76.80	1.15
2DH5	Ant1	2402	2.89	3.75	77.07	1.13
2DH5	Ant1	2441	2.88	3.75	76.80	1.15
2DH5	Ant1	2480	2.89	3.76	76.86	1.14


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs



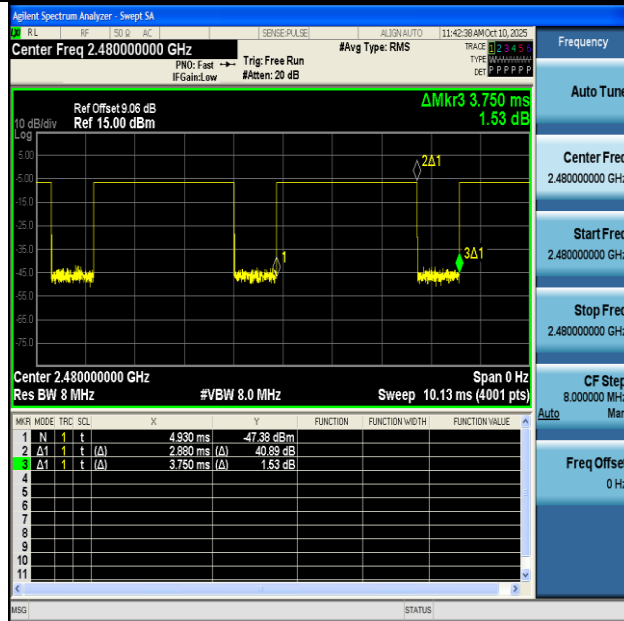


NTNV-DH5-Ant1-2480

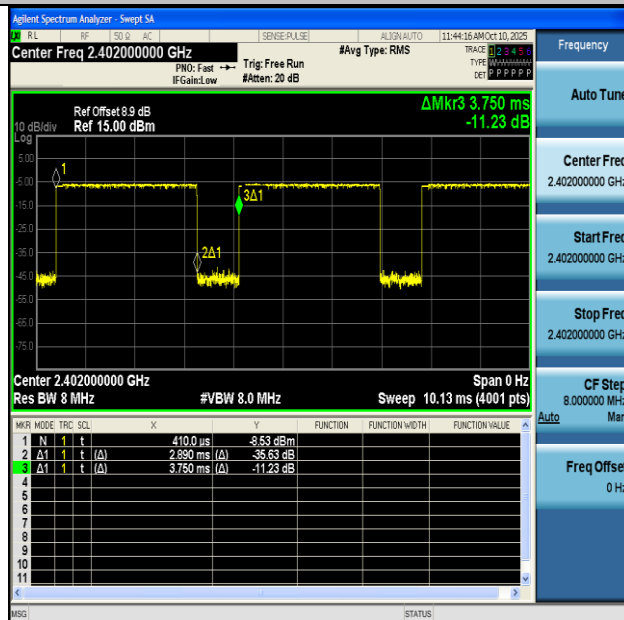


NTNV-2DH5-Ant1-2402



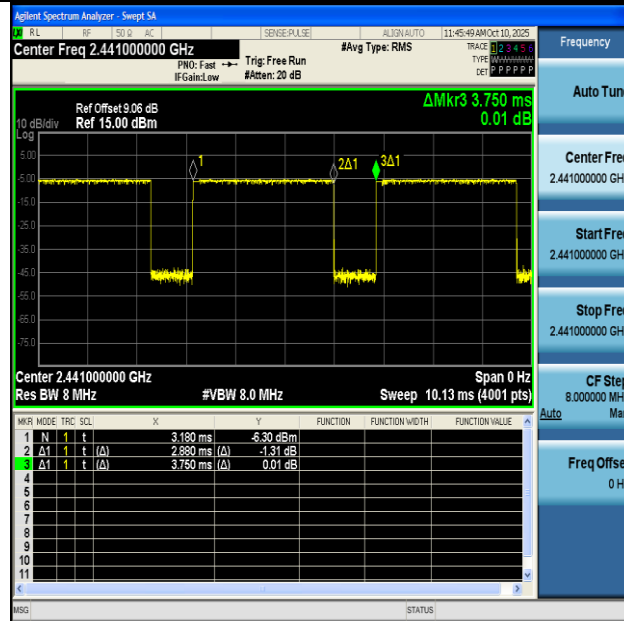

NTNV-2DH5-Ant1-2441

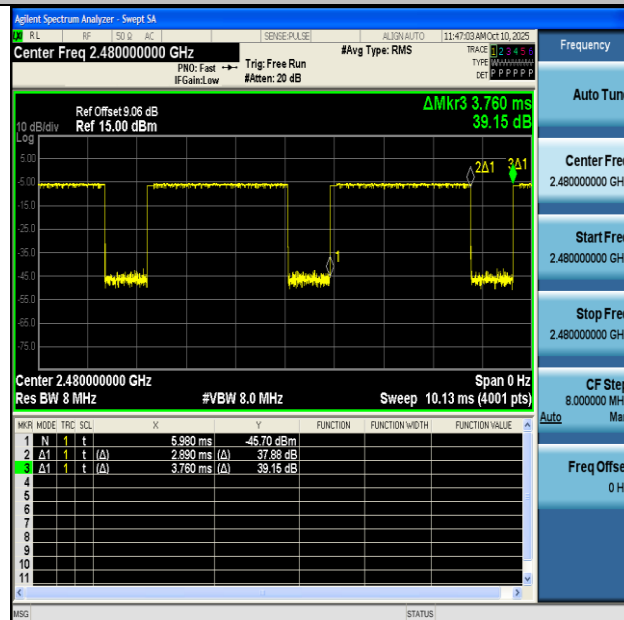

NTNV-2DH5-Ant1-2480

