

SPECIFICATION FOR APPROVAL

CUSTOMER: Evervictory Electronic Company Limited

CUSTOMER P/N: 030703000230

Customer model: _____

DESCRIPTION: DIP, coil inductance is 6.3uH, and the diameter of circular magnetic plate is 40mm; Thickness of 1mm, bottom double-sided 3M adhesive.

Sen Yijia P/N: _____

SAMPLE DELIVERY DATE 2025-11-17

SUPPLIER SIGNATURE

		DRAWING
		QIU

CUSTOMER SIGNATURE

JUDGE:		
APPROVED	CHECKED	TESTING

The supplier:Shenzhen Senyijia Technology Co.,Ltd
Add:Floor 3, Building A3, Rongchang Industrial Park,
Hengkeng Hedong Industrial Zone, Guanlan Town,
Shenzhen

Phone: 0755-686535

Fax: 0755-29686531

Shenzhen Senyijia Technology Co.,Ltd

Change record

CUSTOMER	Everictory Electronic Company Limited	CUSTOMER P/N	030703000230
Customer model		DESCRIPTION	DIP, coil inductance is 6.3uH, and the diameter of circular magnetic plate is 40mm; Thickness of 1mm, bottom double-sided 3M adhesive.
Sen Yijia P/N		Version	A

DATE	Version	The Content Description	Prepared By
2025-11-17	A	Directiy admitted for the first time	QIU




Shenzhen Senyijia Technology Co.,Ltd

Product Specification

CUSTOMER	Everictory Electronic Company Limited	CUSTOMER P/N	030703000230
Customer model		DESCRIPTION	DIP, coil inductance is 6.3uH, and the diameter of circular magnetic plate is 40mm; Thickness of 1mm, bottom double-sided 3M adhesive.
Sen Yijia P/N		Version	A

1. DIMENSION (mm)

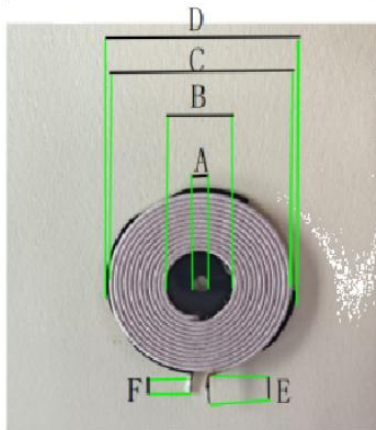

A	3 ± 0.5
B	14 ± 0.5
C	38 ± 1
D	40 ± 0.5
E	6.5 ± 1
F	2 ± 1

1. The coil must not have non-crossing leads, and the wires must not be loosened.
2. Non-planar coil with 3*40*1.0mm ferrite permanent magnet in special shape
3. Magnetic sheet with double-sided adhesive tape (5.1*36*31.5*0.08mm)

2. SCHEMATIC



3. Winding parameters

Product Name	terminal		WIRE	Turns	Winding direction	UL NO
Wireless charging magnetic coil	S	F	ø0.08mm*105P silk covered wire	12TS	counterclockwise	E345710

4. Electrical parameters

Product Name	terminal	L	Q 值	TESTING CONDITIONS	INSTRUMENT
Wireless charging magnetic coil	S-F	$6.3\mu H \pm 10\%$	78 Min	100KHz 1.0V 25℃	LCR

