



Prüfbericht-Nr.: <i>Test Report No.:</i>	17043527 001	Auftrags-Nr.: <i>Order No.:</i>	164021717	Seite 1 von 165 <i>Page 1 of 165</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	17.09.2014	
Auftraggeber: <i>Client:</i>	Shenzhen Zowee Technology Co., Ltd., Science & Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, China			
Prüfgegenstand: <i>Test item:</i>	Tablet PC			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011			
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Certification			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-210 Issue 8 December 2010 RSS-Gen Issue 3 December 2010			
Wareneingangsdatum: <i>Date of receipt:</i>	08.10.2014			
Prüfmuster-Nr.: <i>Test sample No.:</i>	1401911, 1401912, 1401913, 1401914, 1401915			
Prüfzeitraum: <i>Testing period:</i>	10.10.2014 - 18.10.2014			
Ort der Prüfung: <i>Place of testing:</i>	Accurate Technology Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
29.10.2014  Owen Tian/Project Manager		29.10.2014  Sam Lin/Technical Certifier		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
				Unterschrift <i>Signature</i>
Sonstiges / Other: this test report is for evaluation of Bluetooth function only.				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

W04

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Pass***5.1.2 PEAK OUTPUT POWER***RESULT: Pass***5.1.3 20dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.4 6dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHz BANDWIDTH***RESULT: Pass***5.1.6 POWER SPECTRAL DENSITY***RESULT: Pass***5.1.7 SPURIOUS EMISSION***RESULT: Pass***5.1.8 FREQUENCY SEPARATION***RESULT: Pass***5.1.9 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.10 TIME OF OCCUPANCY***RESULT: Pass***5.1.11 CONDUCTED EMISSIONS***RESULT: Pass*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	Antenna Requirement	14
5.1.2	Peak Output Power	15
5.1.3	20dB Bandwidth and 99% Bandwidth.....	16
5.1.4	6dB Bandwidth and 99% Bandwidth.....	17
5.1.5	Conducted Spurious Emissions measured in 100kHz Bandwidth	18
5.1.6	Power spectral density	28
5.1.7	Spurious Emission	29
5.1.8	Frequency Separation.....	154
5.1.9	Number of hopping frequency.....	155
5.1.10	Time of Occupancy.....	156
5.1.11	Conducted emissions	157
6.	PHOTOGRAPHS OF THE TEST SET-UP	162
7.	LIST OF TABLES	165
8.	LIST OF PHOTOGRAPHS	165

Prüfbericht - Nr.: 17043527 001
Test Report No.**Seite 4 von 165**
Page 4 of 165

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Accurate Technology Co., Ltd.

(FCC Registration No.: 752051)

(Test site Industry Canada No.: 5077A-2)

F1, Bldg. A, Changyuan New Material Port
Keyuan Rd., Science & Industry Park, Nanshan
Shenzhen, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions & Receiver spurious emissions				
Spectrum Analyzer	Agilent	E7405A	MY45115511	2015-01-11
Test Receiver	Rohde&Schwarz	ESCS30	100307	2015-01-11
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2015-01-11
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2015-01-11
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2015-01-11
50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	2015-01-11
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	2015-01-11
Temp. & Humid. Chamber	Gongwen	HSD-500	0109	2015-01-11
Radio Spectrum Test				
EMI Test Receiver	Rohde&Schwarz	ESPI-3	100396/003	2015-01-11
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2015-06-11
Temp. & Humid. Chamber	Gongwen	HSD-500	0109	2015-01-11
Conducted Emission				
Test Receiver	Rohde&Schwarz	ESCS30	100307	2015-01-11
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2015-01-11
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100815	2015-01-11
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2015-01-11

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Spectrum	$< \pm 0.60 \text{ dB}$
Radiated emission of transmitter, valid up to 26.5 GHz	$< \pm 4.42 \text{ dB}$
Conducted Emission	$< \pm 2.23 \text{ dB}$
Radiated Emission	$< \pm 4.42 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan, Shenzhen, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUTs are tablet with Wi-Fi, Bluetooth & GPS function.

The models UB-15MS10, UB-15MS101, UB-15MS10SA & M1045 are identical except the model name; the models NS-15MS08, NS-15MS081 & M8011 are identical except the model name.

The models UB-15MS10 & NS-15MS08 have the same circuit, PCB layout and RF module, only some functions are different.

The differences between UB-15MS10 and NS-15MS08:

Model	PCBA	Function	Screen	DDR	EMMC	Antenna
UB-15MS10	With GPS board & POPO-Pin for keyboard	With light sensor, GPS & compass	10.1"	2G	Internal 32G	With GPS antenna
NS-15MS08	Without	Without	8"	1G	Internal 16G + external 16G	Without GPS antenna, the position of Wi-Fi antenna is different

For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of Bluetooth (BDR & EDR mode)

Technical Specification	Value
Kind of Equipment	Tablet PC
Type Designation	UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011
FCC ID	2AAP6UB15MS10
Operating Frequency band	2402 – 2480MHz
Channel separation	1MHz
Extreme Temperature Range	-30~+75°C
Operation Voltage	DC 3.7V (via built in battery)
	DC 5V (via AC/DC adapter)
Modulation	FHSS, GFSK, 8DPSK, $\pi/4$ DQPSK
Bluetooth version	4.0, Dual Mode
Antenna Gain	1dBi

Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	21	2423.00	42	2444.00	63	2465.00
1	2403.00	22	2424.00	43	2445.00	64	2466.00
2	2404.00	23	2425.00	44	2446.00	65	2467.00

3	2405.00	24	2426.00	45	2447.00	66	2468.00
4	2406.00	25	2427.00	46	2448.00	67	2469.00
5	2407.00	26	2428.00	47	2449.00	68	2470.00
6	2408.00	27	2429.00	48	2450.00	69	2471.00
7	2409.00	28	2430.00	49	2451.00	70	2472.00
8	2410.00	29	2431.00	50	2452.00	71	2473.00
9	2411.00	30	2432.00	51	2453.00	72	2474.00
10	2412.00	31	2433.00	52	2454.00	73	2475.00
11	2413.00	32	2434.00	53	2455.00	74	2476.00
12	2414.00	33	2435.00	54	2456.00	75	2477.00
13	2415.00	34	2436.00	55	2457.00	76	2478.00
14	2416.00	35	2437.00	56	2458.00	77	2479.00
15	2417.00	36	2438.00	57	2459.00	78	2480.00
16	2418.00	37	2439.00	58	2460.00		
17	2419.00	38	2440.00	59	2461.00		
18	2420.00	39	2441.00	60	2462.00		
19	2421.00	40	2442.00	61	2463.00		
20	2422.00	41	2443.00	62	2464.00		

Table 5: Technical Specification of Bluetooth (LE mode)

Technical Specification	Value
Kind of Equipment	Tablet PC
Type Designation	UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011
FCC ID	2AAP6UB15MS10
Operating Frequency band	2402 – 2480MHz
Channel separation	2MHz
Extreme Temperature Range	-30~+75°C
Operation Voltage	DC 3.7V (via built in battery)
	DC 5V (via AC/DC adapter)
Modulation	GFSK
Bluetooth version	4.0, Dual Mode
Antenna Gain	1dBi

Table 6: RF channel and frequency of Bluetooth (LE mode)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	11	2424.00	22	2446.00	33	2468.00
1	2404.00	12	2426.00	23	2448.00	34	2470.00
2	2406.00	13	2428.00	24	2450.00	35	2472.00
3	2408.00	14	2430.00	25	2452.00	36	2474.00
4	2410.00	15	2432.00	26	2454.00	37	2476.00
5	2412.00	16	2434.00	27	2456.00	38	2478.00
6	2414.00	17	2436.00	28	2458.00	39	2480.00
7	2416.00	18	2438.00	29	2460.00		

Prüfbericht - Nr.: 17043527 001
Test Report No.

Seite 9 von 165
Page 9 of 165

8	2418.00	19	2440.00	30	2462.00	
9	2420.00	20	2442.00	31	2464.00	
10	2422.00	21	2444.00	32	2466.00	

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
 - 1. Bluetooth mode (BDR & EDR mode)
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Bluetooth mode (LE mode)
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
- B. Standby
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|--------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003.

According to clause 3.1, the tests 'Spurious Emission' & 'Conducted Emission' were applied on model UB-15MS10 & NS-15MS08, other tests were applied on model UB-15MS10.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	S/N	Rating
Notebook PC	Lenovo	4290-RT8	R9-FW93G	N/A
Switching Power Adaptor	Shenzhen Frecom Electronics Co., Ltd.	F12L6-050200SPAU L.P.S.	N/A	Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5V, 2.4A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
Micro USB port	4 cores, non-shielded port, 3m	DC Power Input

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

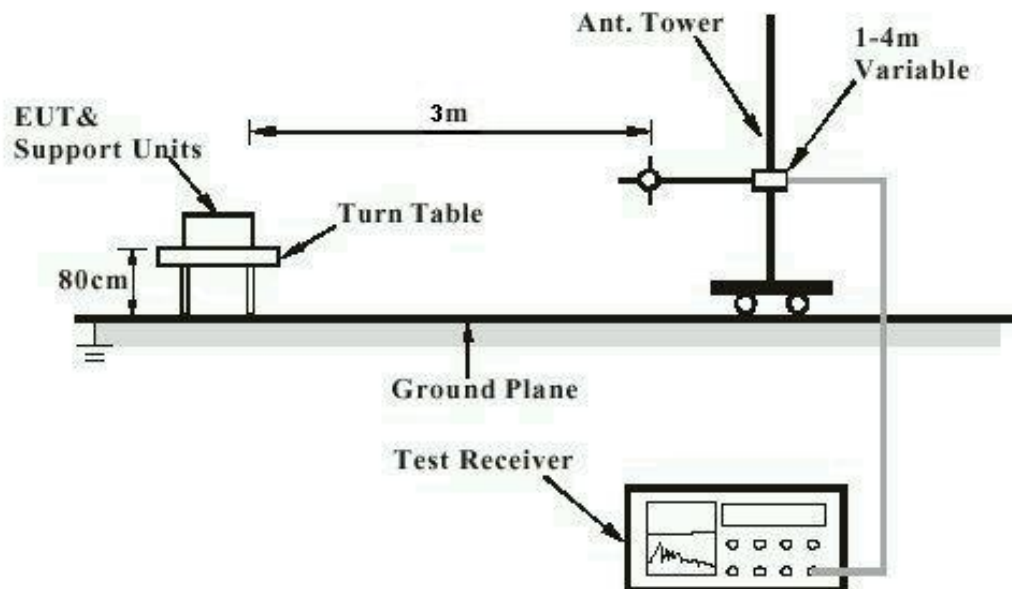


Diagram of Measurement Equipment Configuration for Conduction Measurement

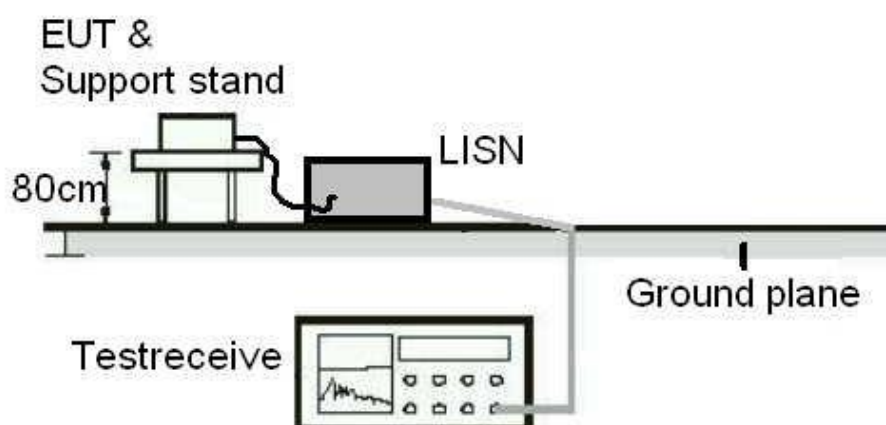
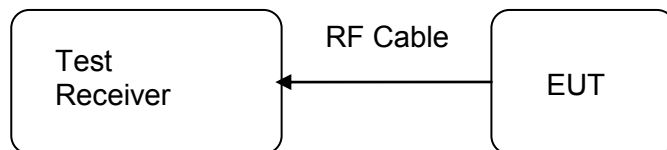


Diagram of Measurement Equipment Configuration for Transmitter Measurement

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	FCC Part 15.247(b)(4) and Part 15.203 RSS-Gen 7.1.4
Limit		The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

5.1.2 Peak Output Power

RESULT:
Pass

Test date : 2014-10-10
 Test standard : FCC Part 15.247(b)(1)
 FCC Part 15.247(b)(3)
 RSS-210 A8.4(2)
 RSS-210 A8.4(4)
 Basic standard : ANSI C63.4: 2003
 Clause 9.1 of KDB 558074 v03r01
 Limit : 125mW, 1W
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1.a, A.2.a
 Ambient temperature : 25°C
 Relative humidity : 52%
 Atmospheric pressure : 101kPa

Table 7: Test result of Peak Output Power of Bluetooth (BDR mode)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	2.94	21
Middle Channel	2441	2.83	21
High Channel	2480	2.18	21

Table 8: Test result of Peak Output Power of Bluetooth (EDR mode)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	5.62	21
Middle Channel	2441	5.95	21
High Channel	2480	5.78	21

Table 9: Test result of Peak Output Power of Bluetooth (LE mode)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	3.10	30
Middle Channel	2440	2.83	30
High Channel	2480	2.22	30

5.1.3 20dB Bandwidth and 99% Bandwidth

RESULT:

Pass

Date of testing	:	2014-10-10
Test standard	:	FCC Part 15.247(a)(1) RSS-210 A8.1(a)
Basic standard	:	ANSI C63.4: 2003 Clause 8 of KDB 558074 v03r01
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa

Table 10: Test result of 20dB & 99% Bandwidth of BDR mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.025	0.968
Mid Channel	2441	1.025	0.968
High Channel	2480	1.025	0.968

Table 11: Test result of 20dB & 99% Bandwidth of EDR mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.303	1.229
Mid Channel	2441	1.298	1.229
High Channel	2480	1.303	1.229

5.1.4 6dB Bandwidth and 99% Bandwidth**RESULT:****Pass**

Date of testing : 2014-10-10
Test standard : FCC Part 15.247(a)(2)
RSS-210 A8.2(a)
Basic standard : ANSI C63.4: 2003
Clause 8 of KDB 558074 v03r01
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A.2.a
Ambient temperature : 25°C
Relative humidity : 52%
Atmospheric pressure : 101kPa

Table 12: Test result of 6dB & 99% Bandwidth of Bluetooth, LE mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	0.742	1.072
Mid Channel	2440	0.742	1.077
High Channel	2480	0.742	1.077

Prüfbericht - Nr.: 17043527 001

Test Report No.

Seite 18 von 165

Page 18 of 165

5.1.5 Conducted Spurious Emissions measured in 100kHz Bandwidth**RESULT:****Pass**


Date of testing	:	2014-10-10
Test standard	:	FCC part 15.247(d) RSS-210 A8.5
Basic standard	:	ANSI C63.4: 2003
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power);
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1.a, A.2.a
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa


For details refer to following test plot.

Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of BDR mode Low Channel

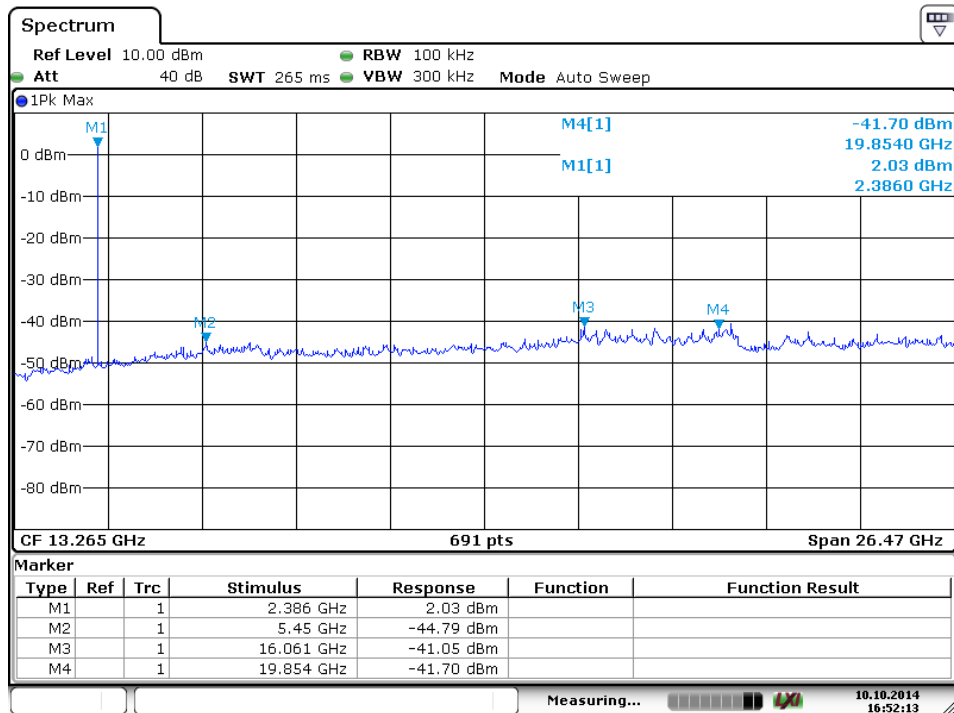


Date: 10.OCT.2014 16:52:12

Middle Channel

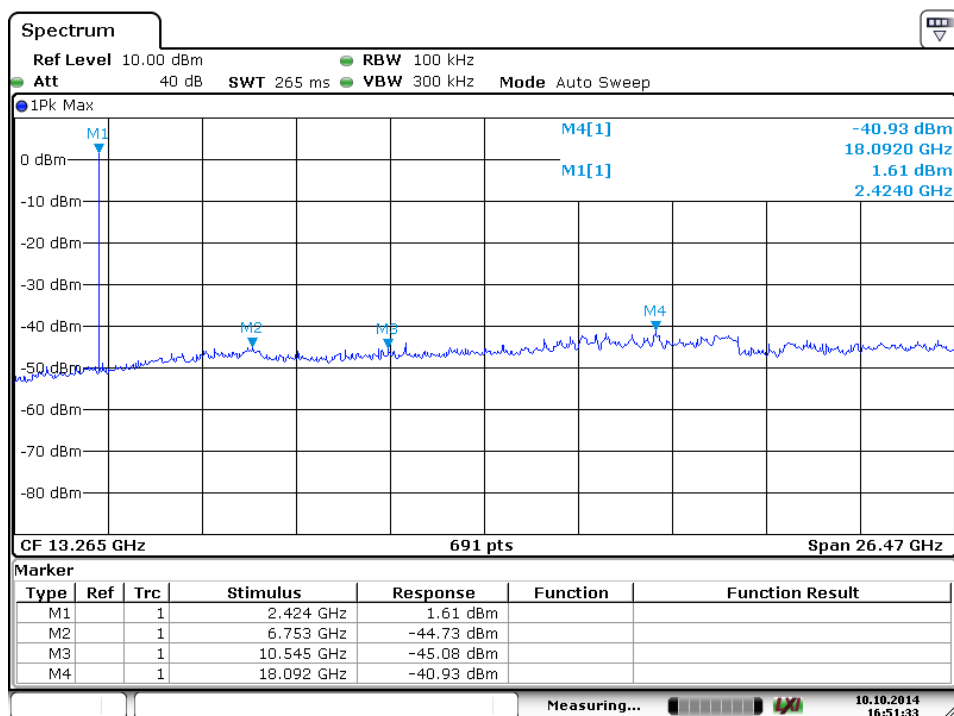


Date: 10.OCT.2014 16:51:33


High Channel

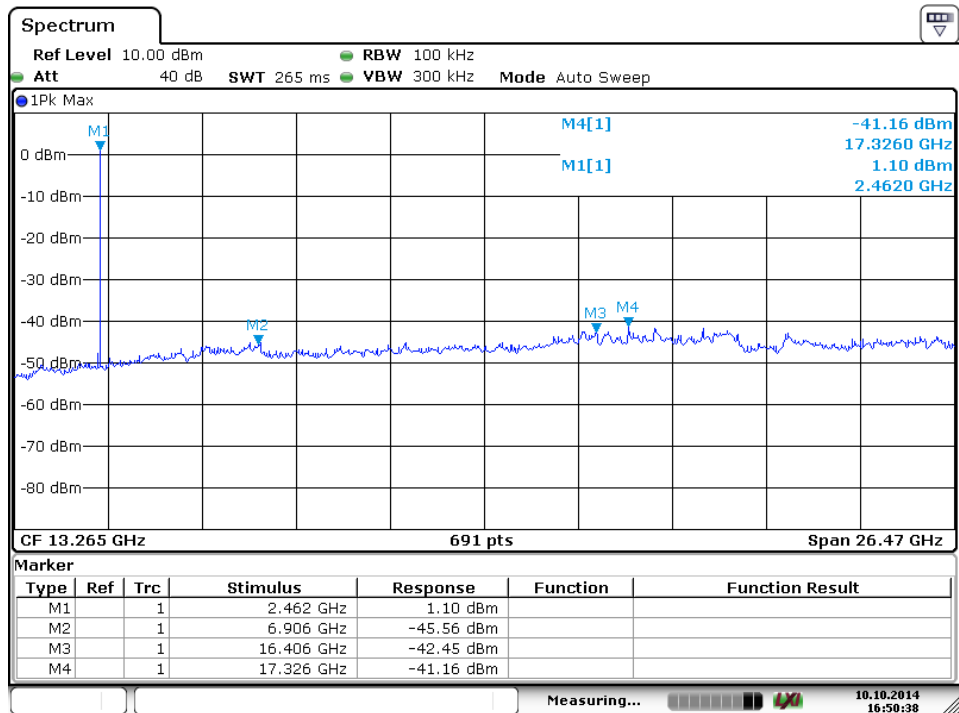

Date: 10.OCT.2014 16:50:38

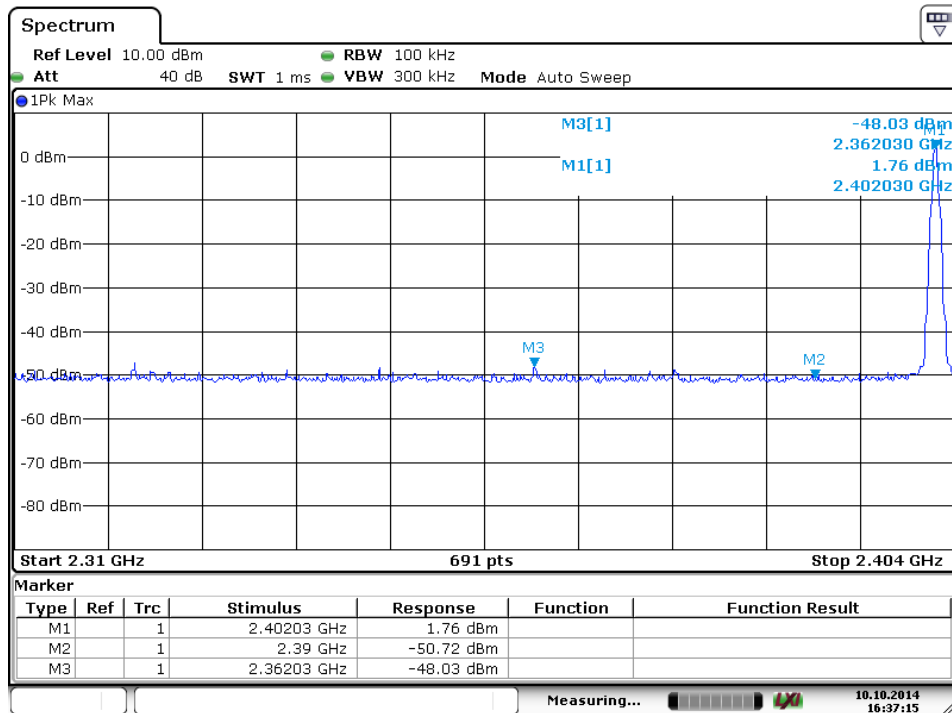Band Edge


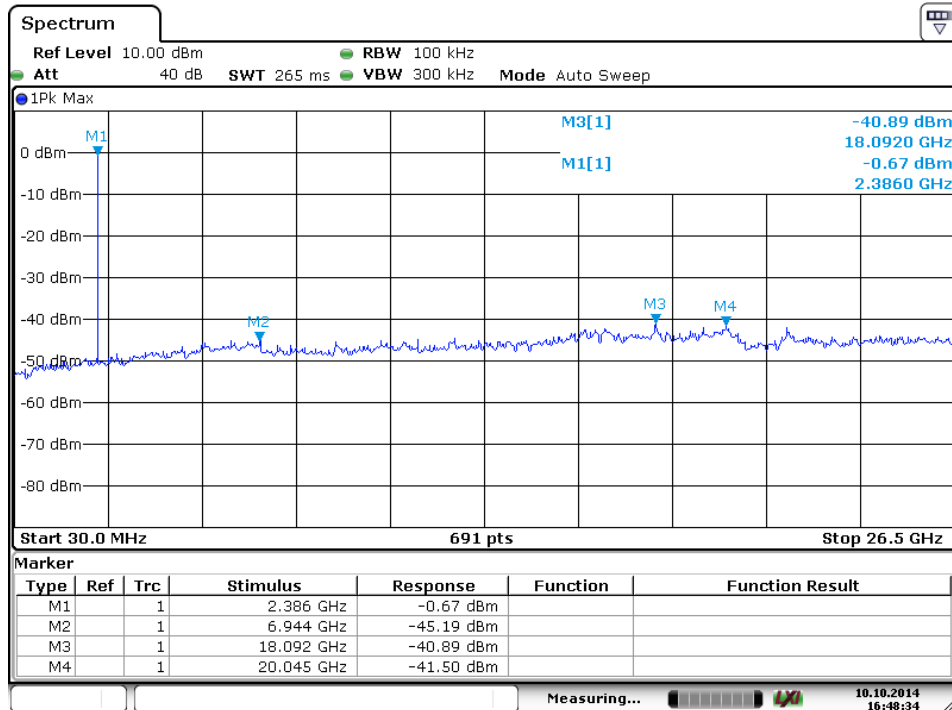
Date: 10.OCT.2014 16:37:14

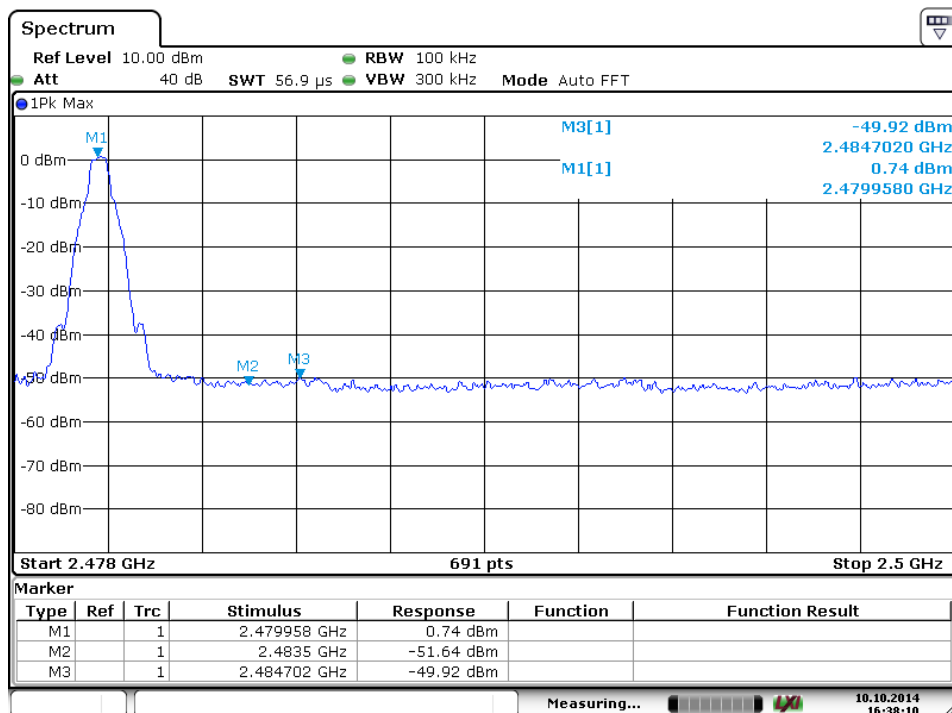

Date: 10.OCT.2014 16:38:10


Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of EDR mode

Low Channel




Date: 10.OCT.2014 16:48:33

Middle Channel

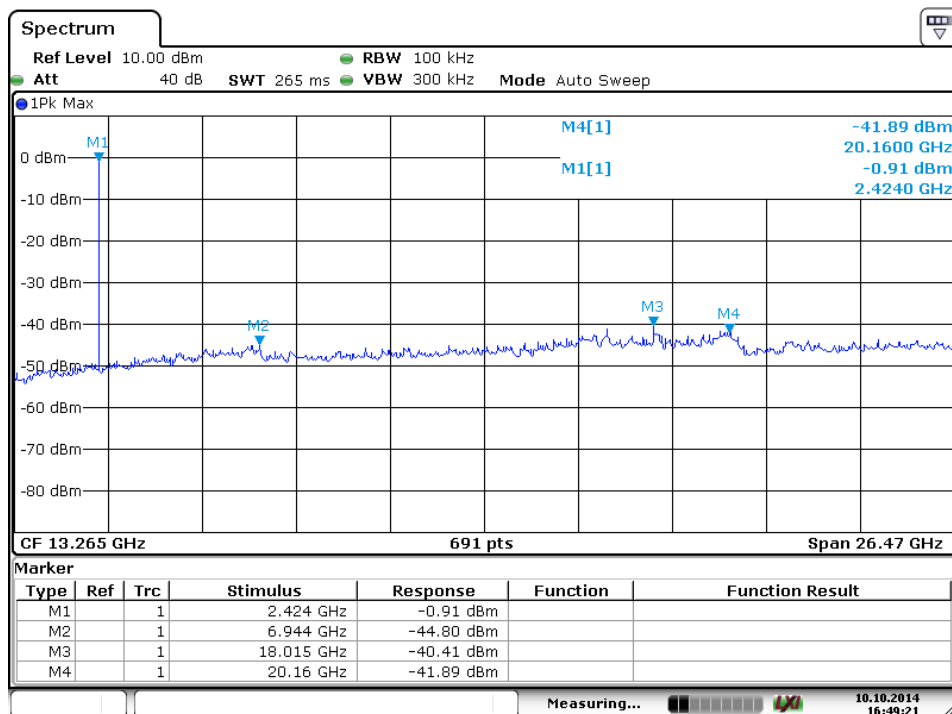


Date: 10.OCT.2014 16:49:21


High Channel

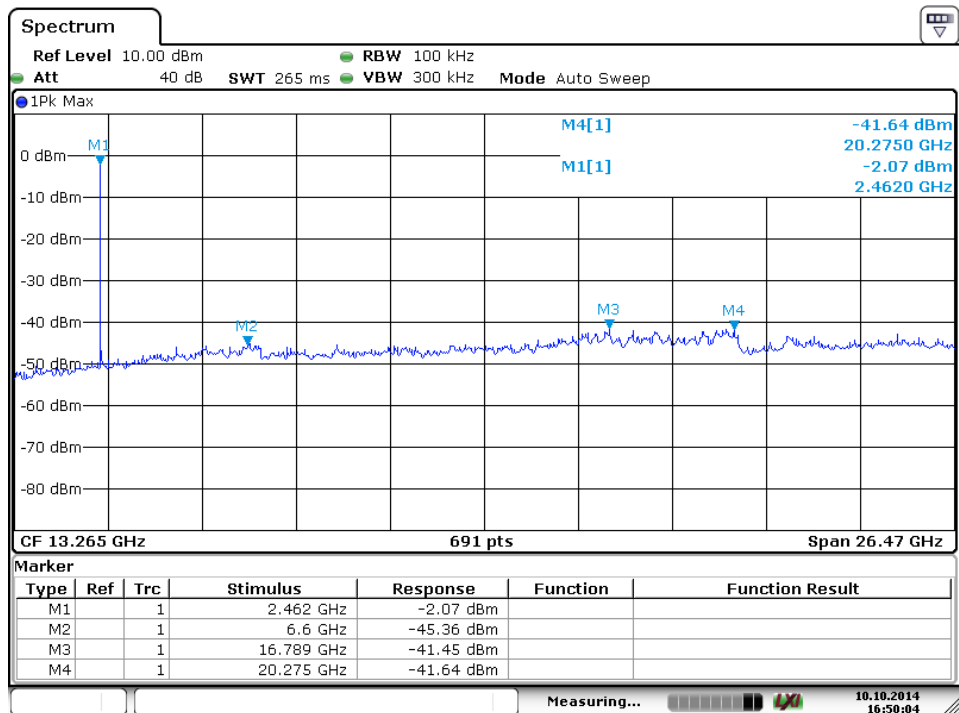

Date: 10.OCT.2014 16:50:04

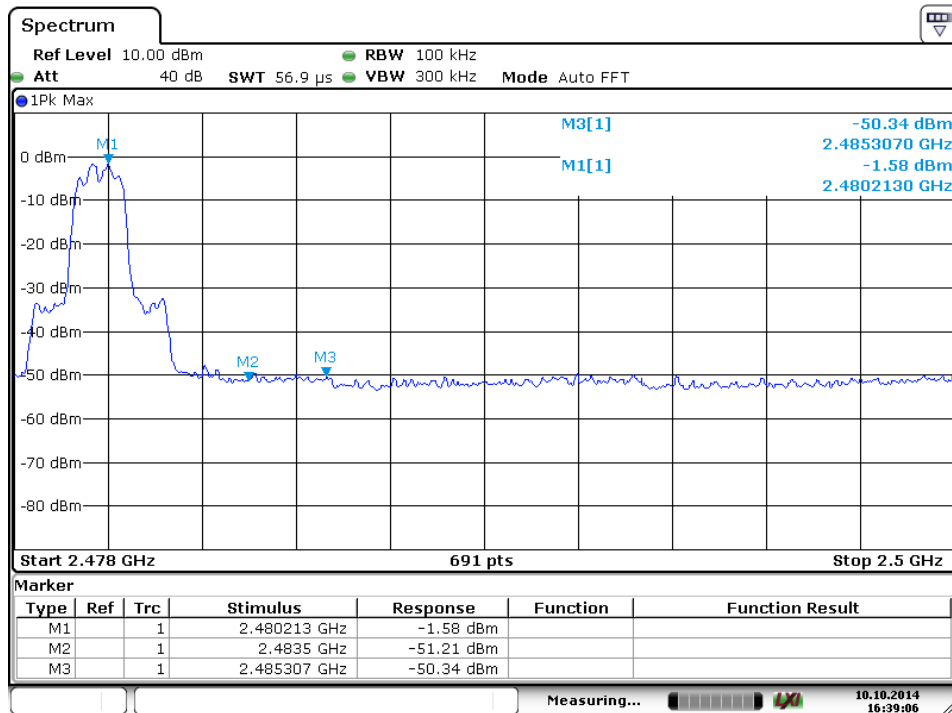Band Edge


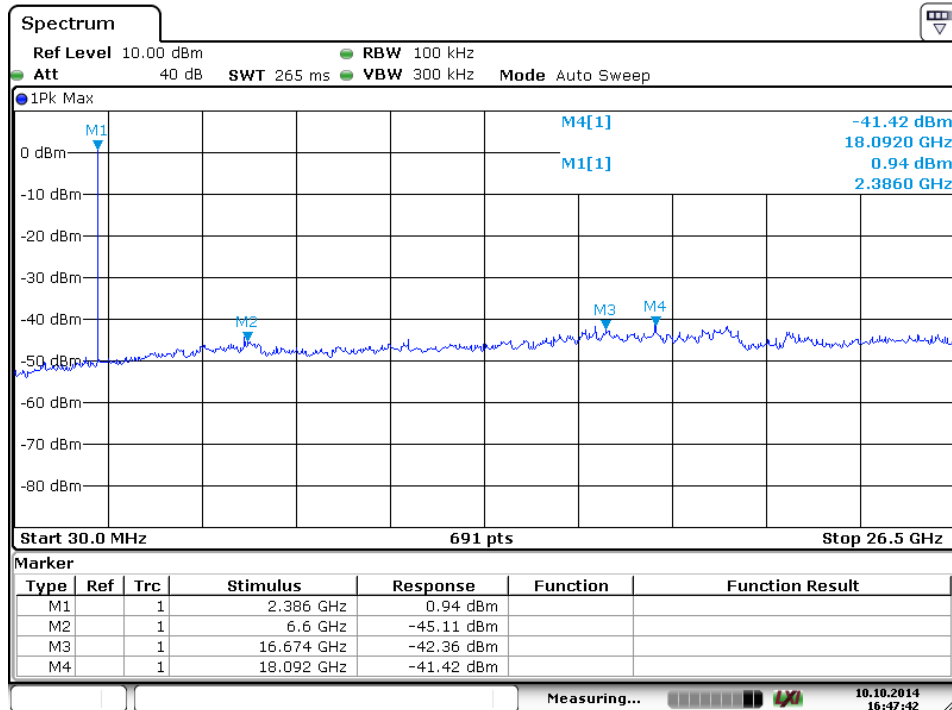
Date: 10.OCT.2014 16:39:06

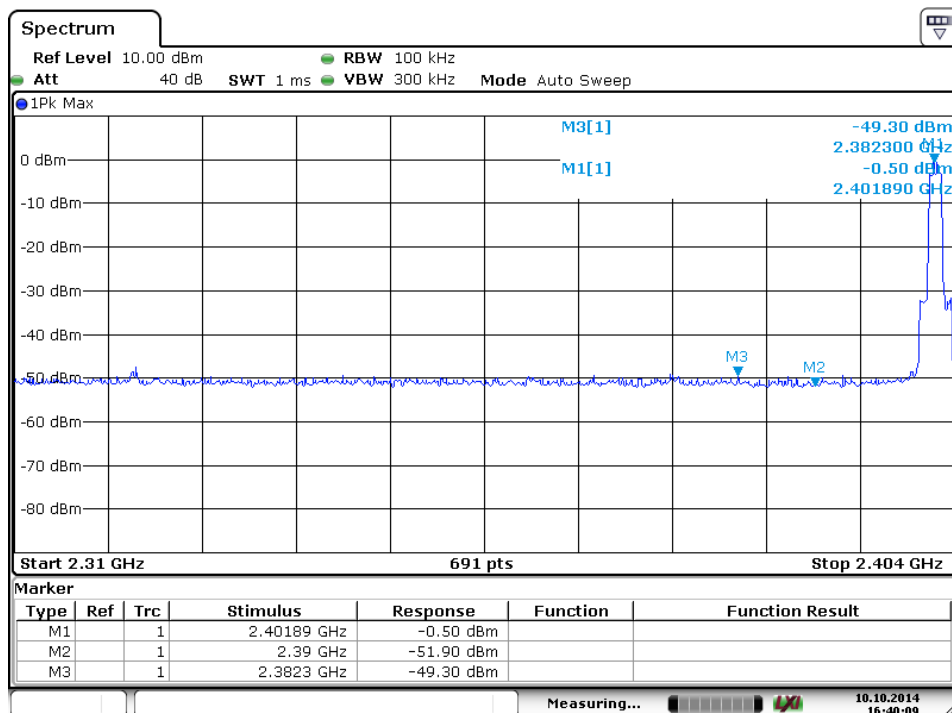

Date: 10.OCT.2014 16:40:09


Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of LE mode

Low Channel




Date: 10.OCT.2014 16:47:41

Middle Channel

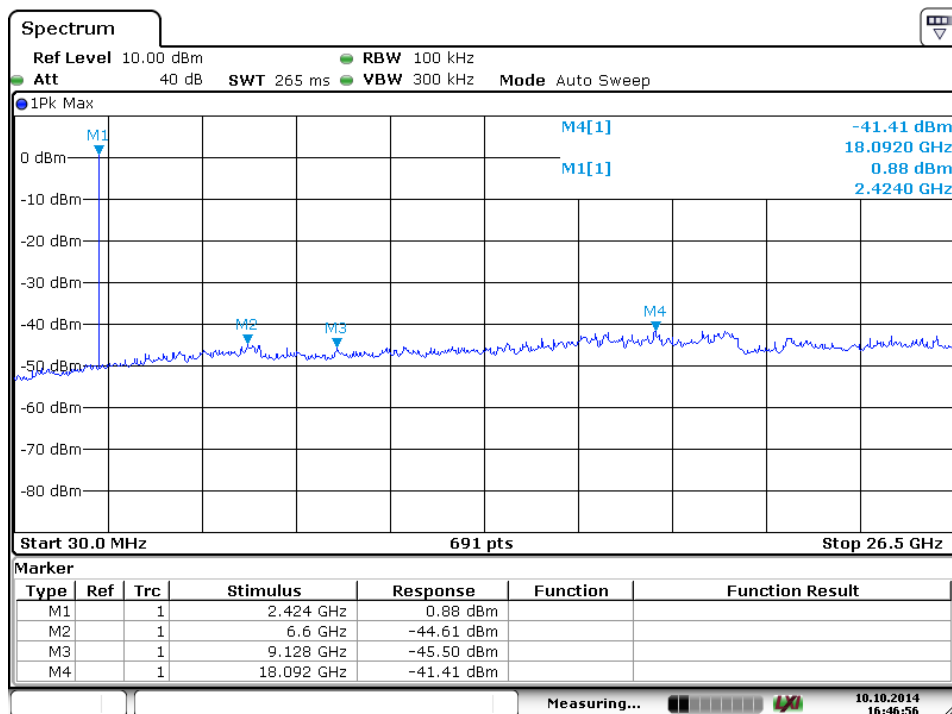


Date: 10.OCT.2014 16:46:56


High Channel

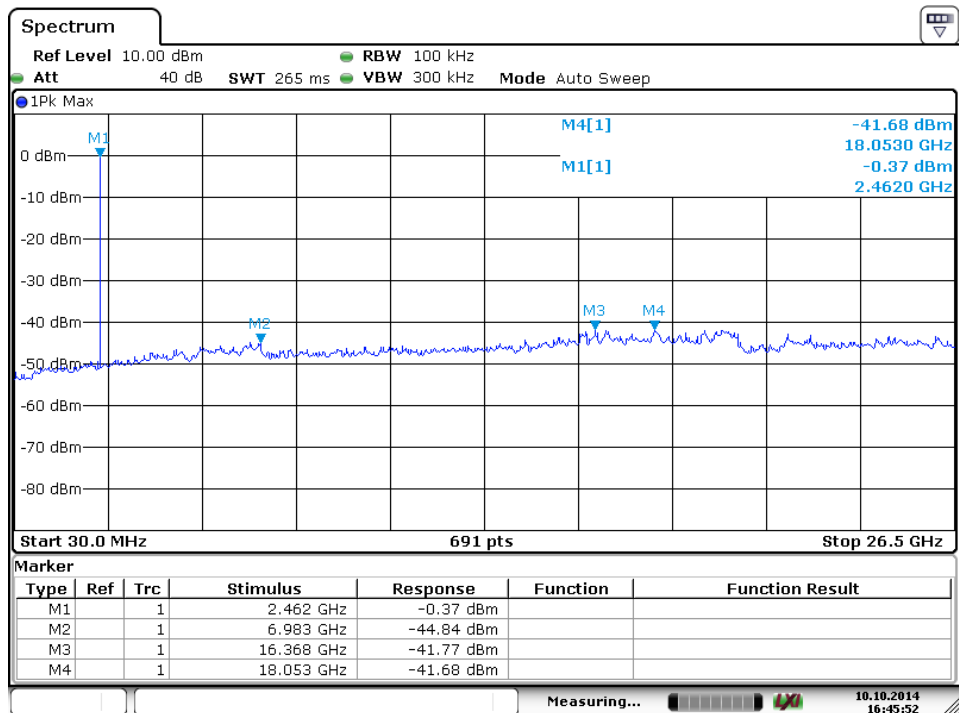

Date: 10.OCT.2014 16:45:52

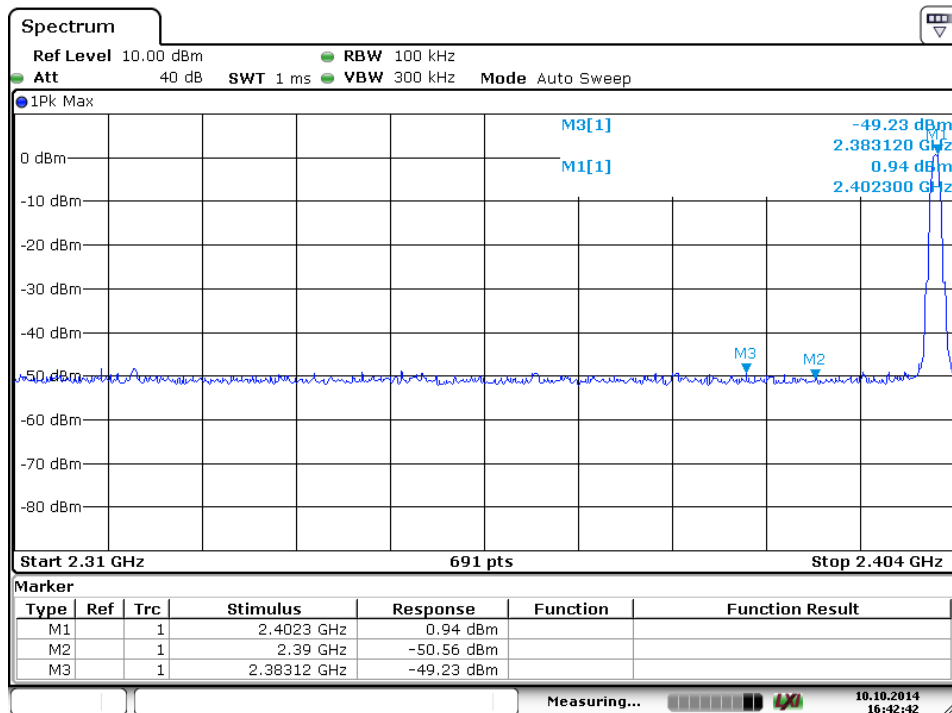Band Edge


Date: 10.OCT.2014 16:42:42

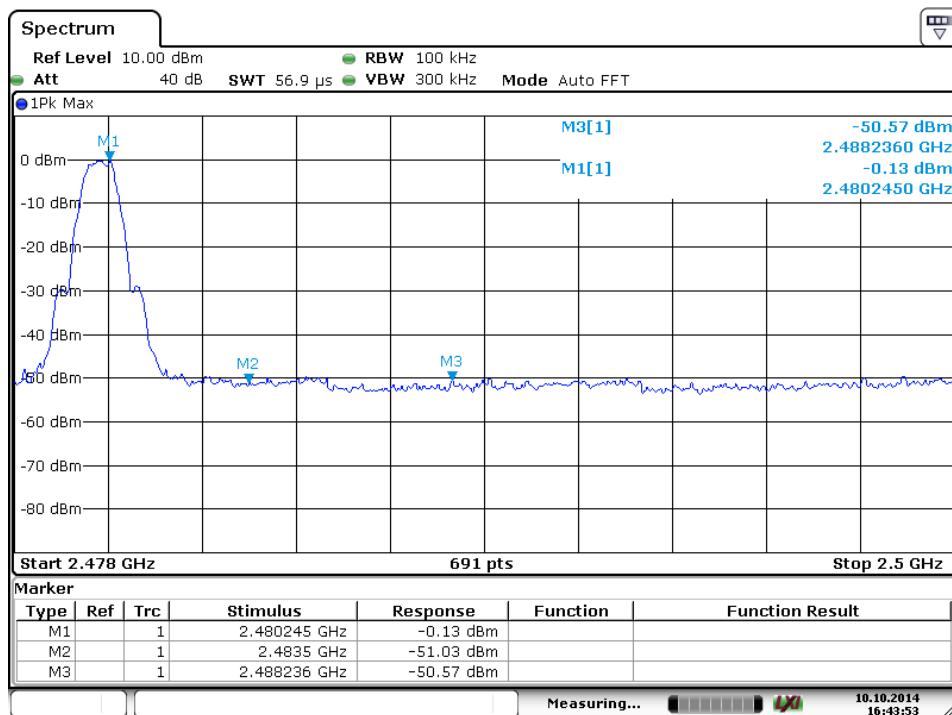

Date: 10.OCT.2014 16:43:53

Prüfbericht - Nr.: 17043527 001

Test Report No.

Seite 28 von 165

Page 28 of 165

5.1.6 Power spectral density**RESULT:****Pass**

Date of testing : 2014-10-10
Test standard : FCC part 15.247(e)
RSS-210 A8.2
Basic standard : ANSI C63.4: 2003
Clause 10 of KDB 558074 v03r01
Limit : 8dBm/3kHz
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation mode : A.2.a
Ambient temperature : 25°C
Relative humidity : 52%
Atmospheric pressure : 101kPa

Table 13: Test result of power spectral density:

Mode	Channel (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Conclusion
Bluetooth LE mode	2402	-13.61	8	Pass
	2440	-13.75	8	Pass
	2480	-14.41	8	Pass

Prüfbericht - Nr.: 17043527 001

Test Report No.

Seite 29 von 165

Page 29 of 165

5.1.7 Spurious Emission**RESULT:****Pass**

Date of testing	:	2014-10-18
Test standard	:	FCC part 15.247(d) RSS-210 Clause 2.2
Basic standard	:	ANSI C63.4: 2003 Clause 11 of KDB 558074 v03r01
Limits	:	FCC part 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1.a, A.2.a
Ambient temperature	:	23°C
Relative humidity	:	48%
Atmospheric pressure	:	101kPa

For details refer to following test plot.

Test Plot of Spurious Emission of transmitting


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

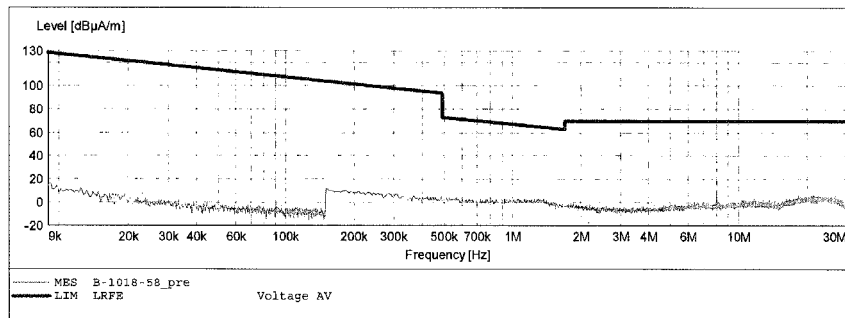


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

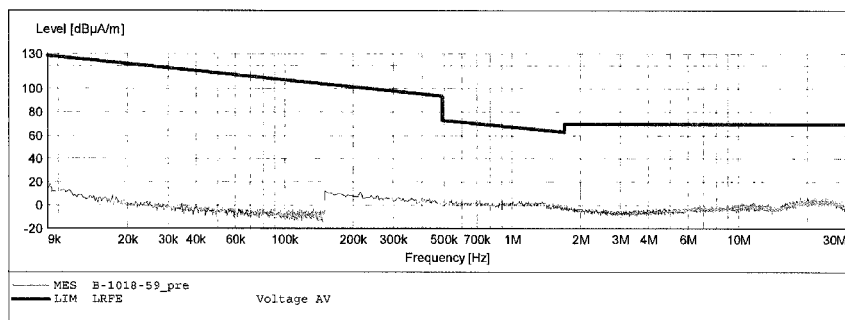


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

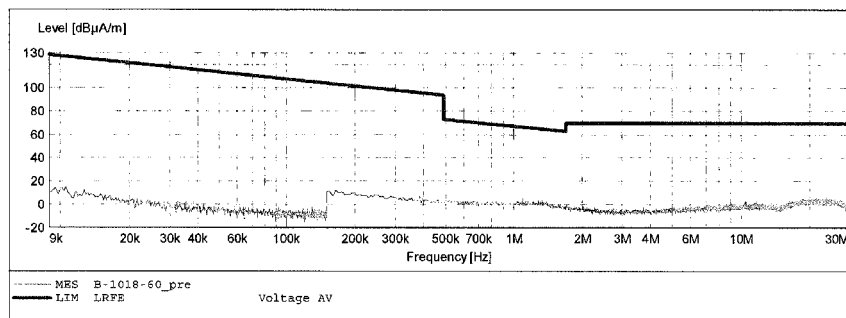


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2441MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70						
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

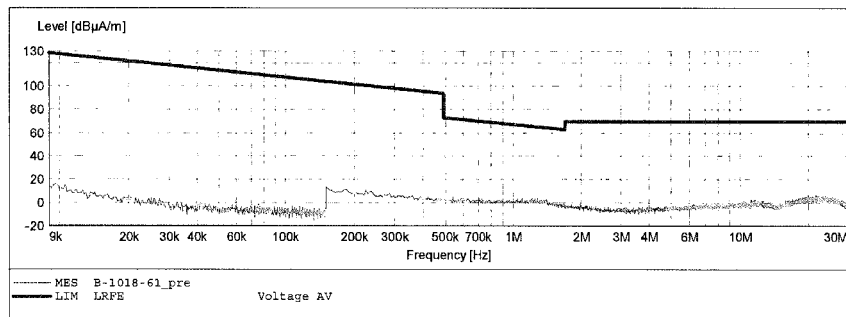


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2441MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

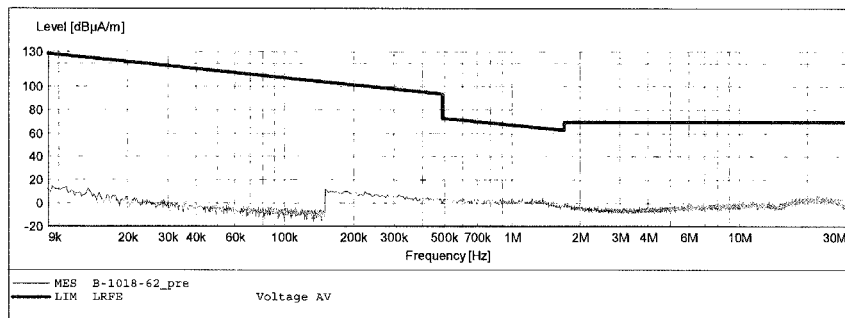


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2441MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

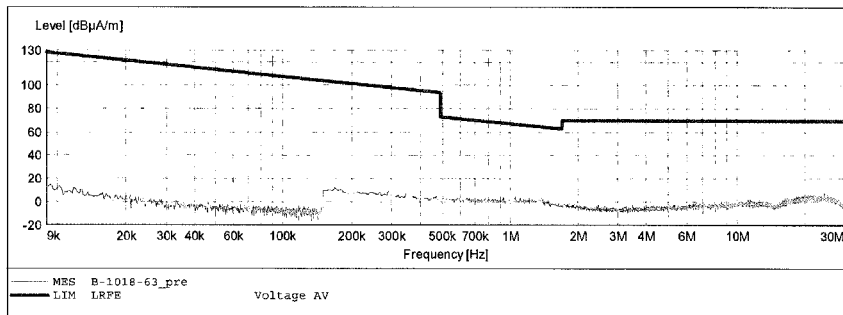


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

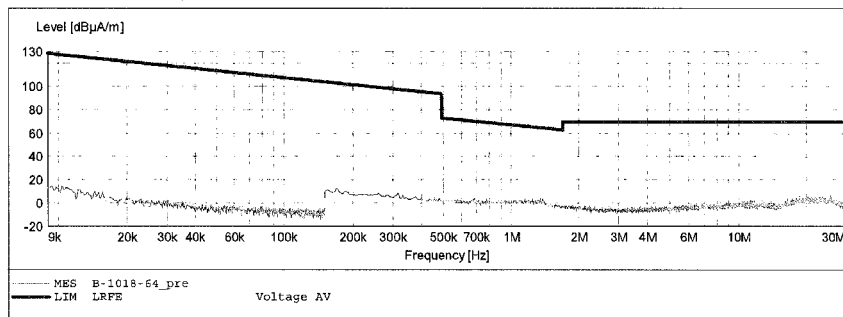


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

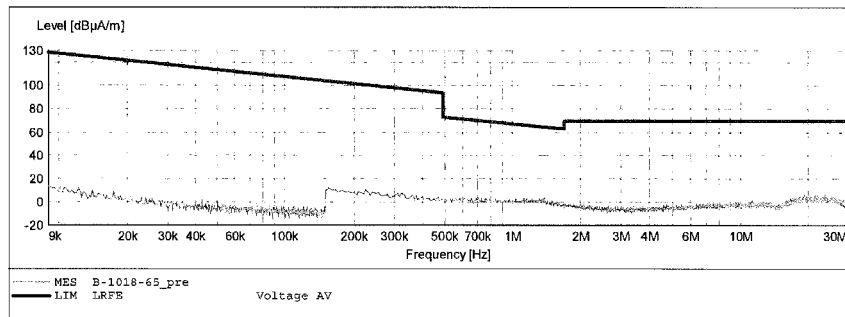


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: SUB_STD VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

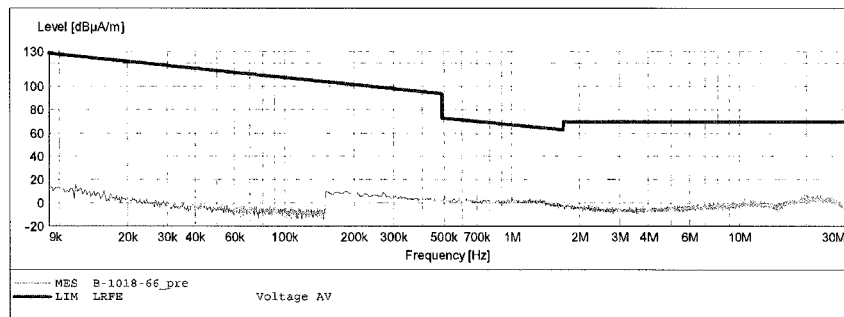


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #791

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

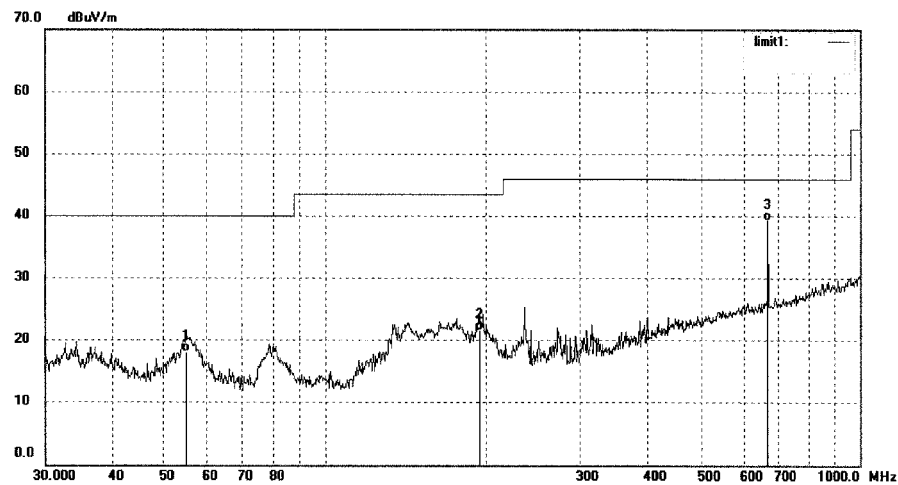


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.0274	31.02	-12.98	18.04	40.00	-21.96	QP			
2	193.7727	34.08	-12.51	21.57	43.50	-21.93	QP			
3	668.1422	41.45	-2.16	39.29	46.00	-6.71	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #792	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

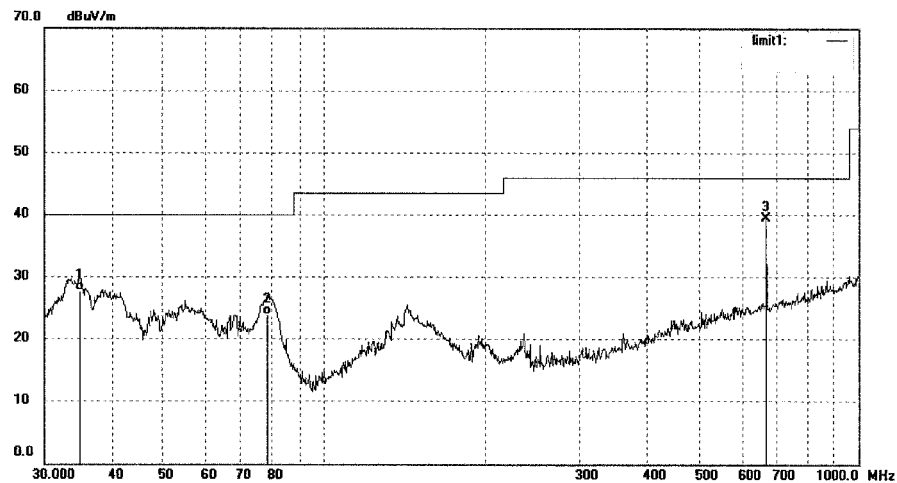

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8823	38.23	-10.41	27.82	40.00	-12.18	QP			
2	78.4133	40.57	-16.60	23.97	40.00	-16.03	QP			
3	668.1422	41.58	-2.16	39.42	46.00	-6.58	peak			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #794

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

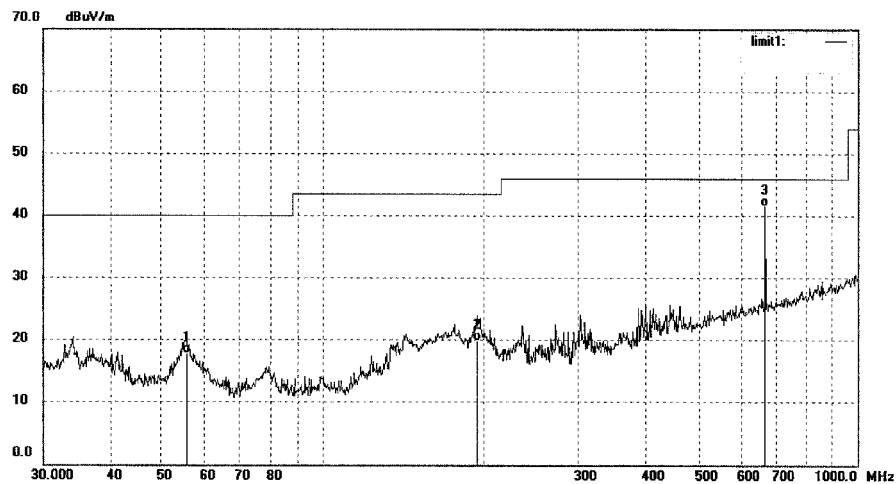

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.6094	30.79	-13.09	17.70	40.00	-22.30	QP			
2	193.7727	32.46	-12.51	19.95	43.50	-23.55	QP			
3	668.1422	43.67	-2.16	41.51	46.00	-4.49	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #793

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

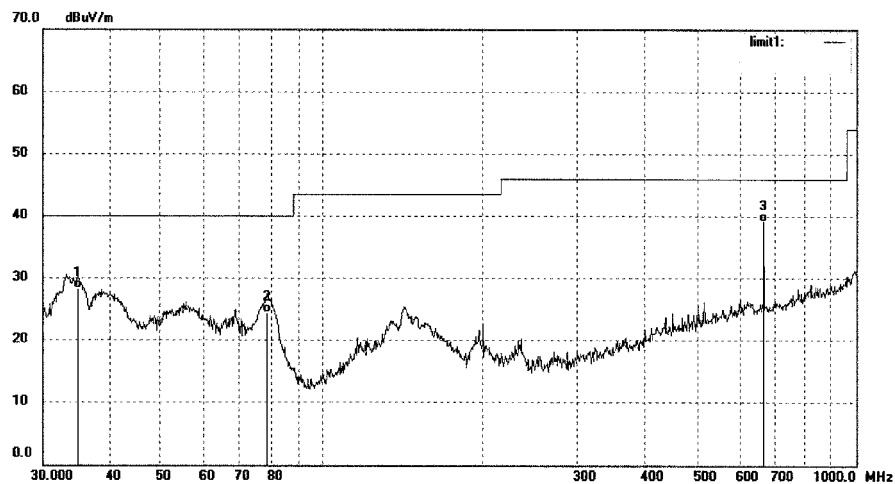

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8823	38.66	-10.41	28.25	40.00	-11.75	QP			
2	78.6888	40.96	-16.58	24.38	40.00	-15.62	QP			
3	668.1422	41.21	-2.16	39.05	46.00	-6.95	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #795

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: Bluetooth

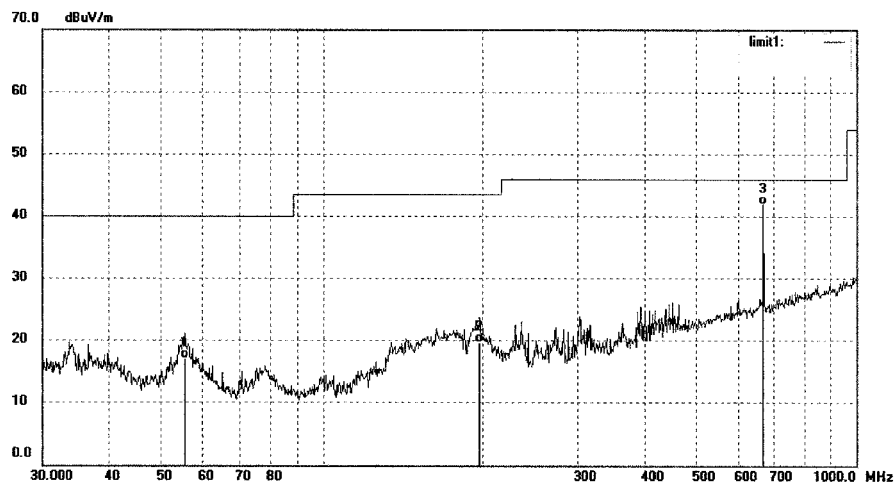

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	30.21	-13.06	17.15	40.00	-22.85	QP			
2	197.2000	32.12	-12.46	19.66	43.50	-23.84	QP			
3	668.1422	44.04	-2.16	41.88	46.00	-4.12	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #796

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

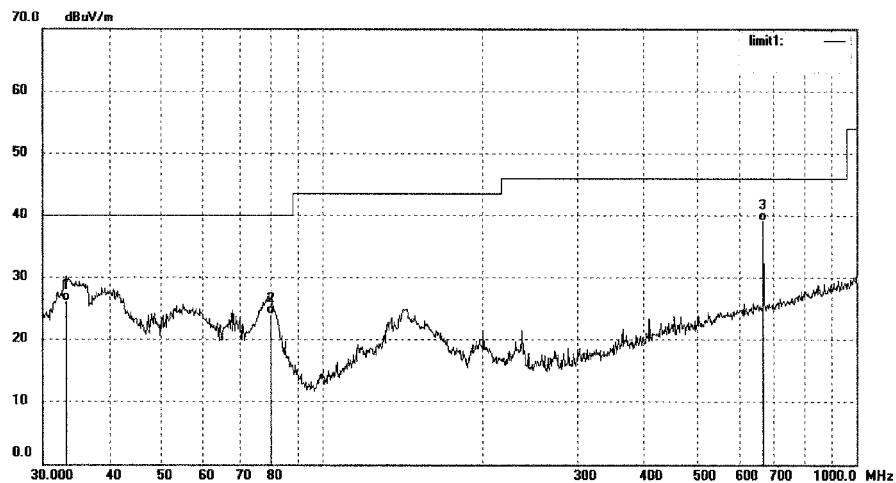

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2111	36.48	-10.25	26.23	40.00	-13.77	QP			
2	79.8002	40.50	-16.52	23.98	40.00	-16.02	QP			
3	668.1422	41.29	-2.16	39.13	46.00	-6.87	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #940

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: Bluetooth

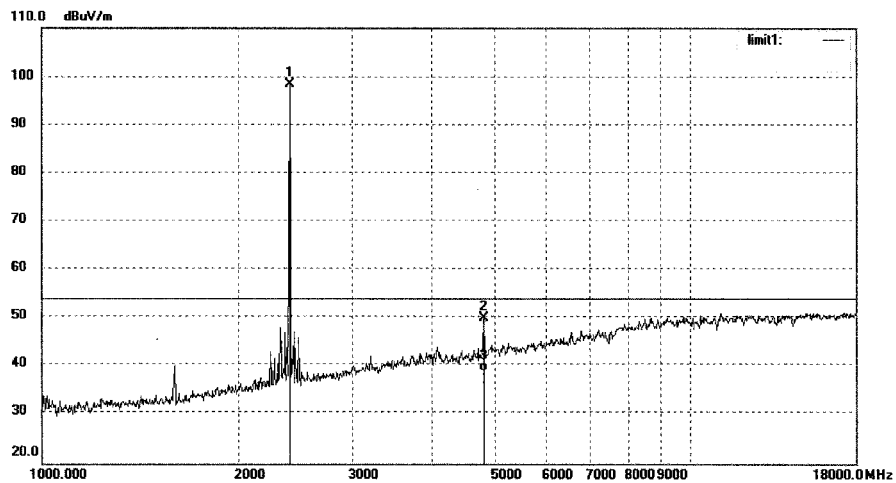

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.033	50.37	-0.30	50.07	74.00	-23.93	peak			
3	4804.033	39.28	-0.30	38.98	54.00	-15.02	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #939

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: Bluetooth

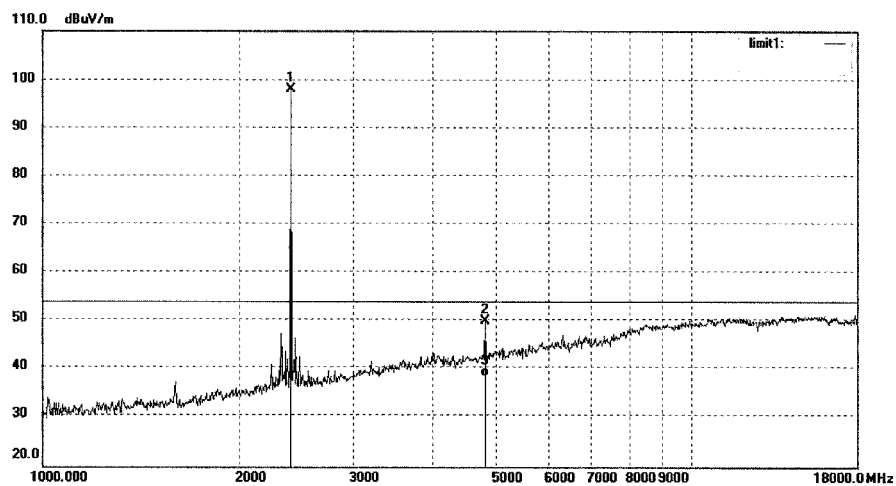

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.36	-7.45	97.91	/	/	peak			
2	4804.045	50.23	-0.30	49.93	74.00	-24.07	peak			
3	4804.045	38.97	-0.30	38.67	54.00	-15.33	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #941

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

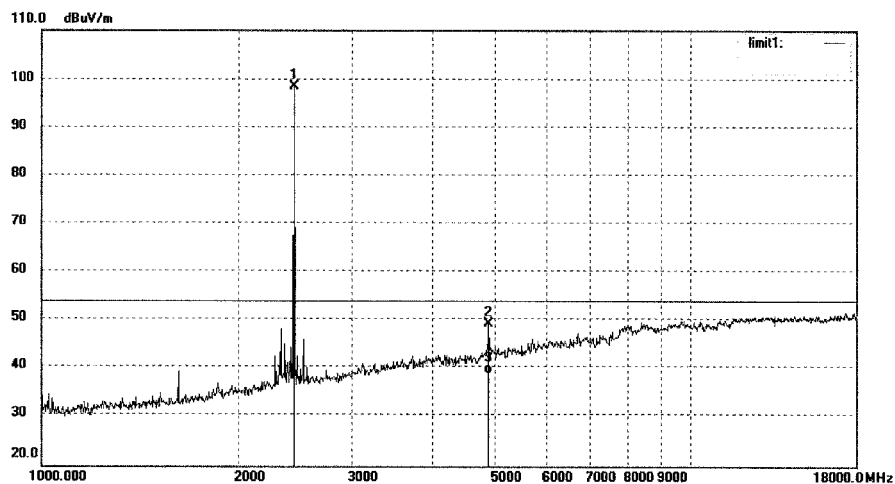

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	105.85	-7.35	98.50	/	/	peak			
2	4882.011	49.24	0.14	49.38	74.00	-24.62	peak			
3	4882.011	38.94	0.14	39.08	54.00	-14.92	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 48 von 165
Page 48 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #942

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

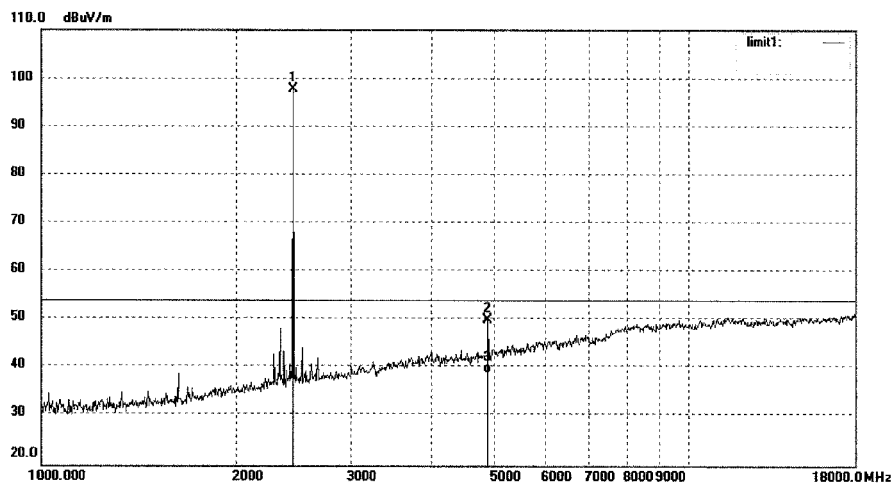

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	105.20	-7.35	97.85	/	/	peak			
2	4882.031	49.84	0.14	49.98	74.00	-24.02	peak			
3	4882.031	38.98	0.14	39.12	54.00	-14.88	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #944

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

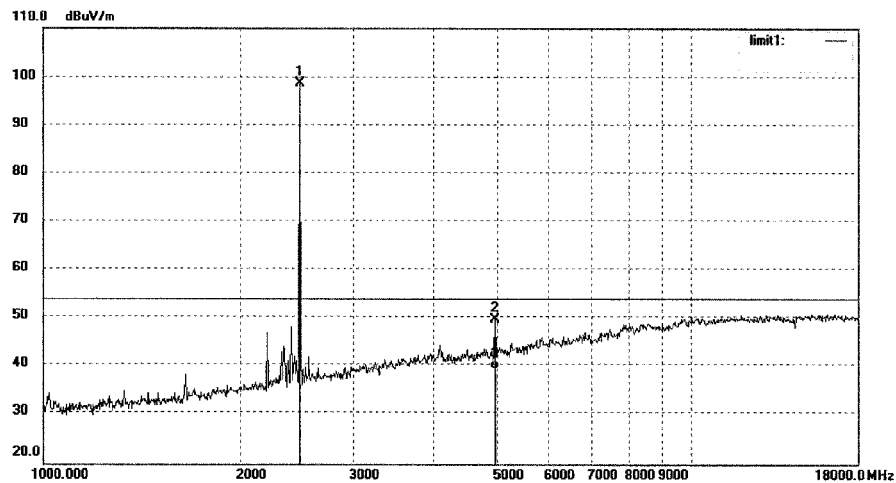

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.024	49.24	0.52	49.76	74.00	-24.24	peak			
3	4960.024	38.97	0.52	39.49	54.00	-14.51	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #943

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

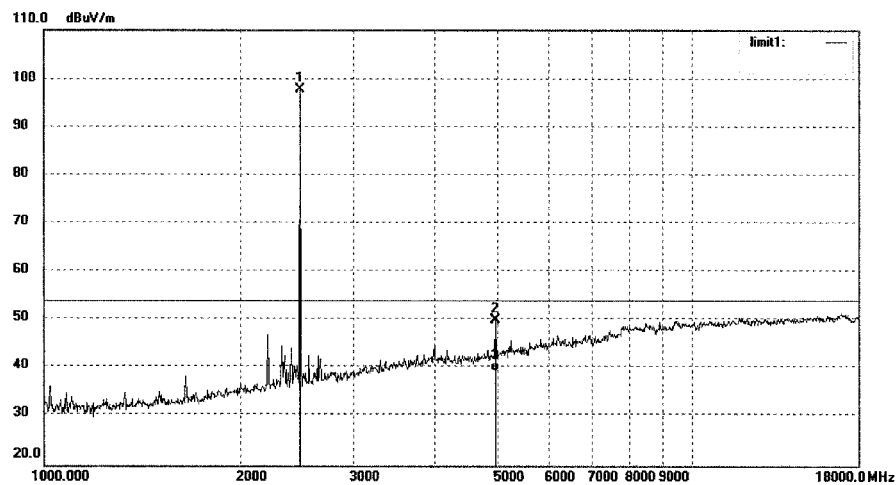

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.18	-7.37	97.81	/	/	peak			
2	4960.007	49.46	0.52	49.98	74.00	-24.02	peak			
3	4960.007	38.94	0.52	39.46	54.00	-14.54	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 51 von 165
Page 51 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1051

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

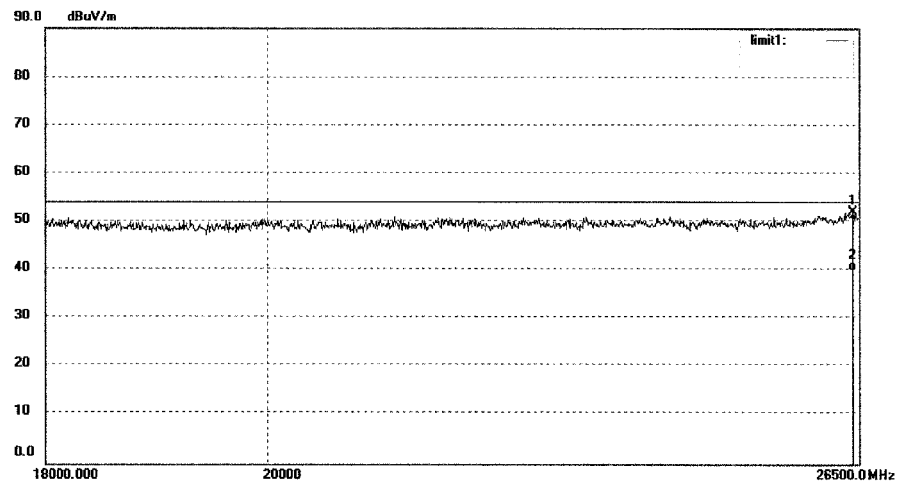

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26428.207	35.67	16.50	52.17	74.00	-21.83	peak			
2	26428.207	23.37	16.50	39.87	54.00	-14.13	AVG			


Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 52 von 165
Page 52 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1052	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

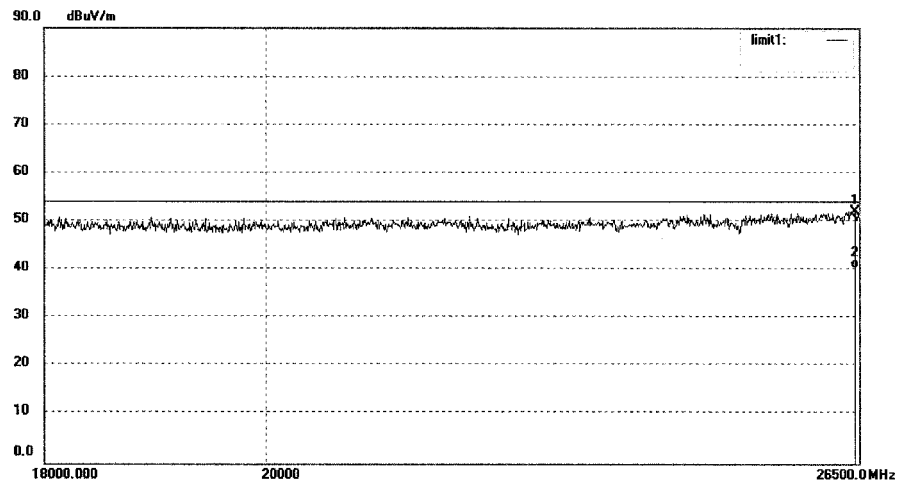

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.13	16.93	52.06	74.00	-21.94	peak			
2	26458.952	23.45	16.93	40.38	54.00	-13.62	AVG			


Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 53 von 165
Page 53 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1054	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

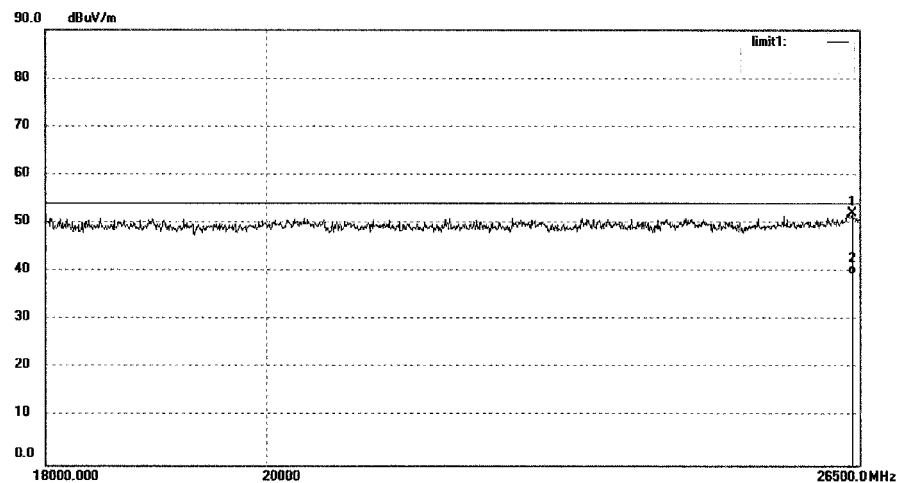

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.48	16.50	51.98	74.00	-22.02	peak			
2	26407.731	23.05	16.50	39.55	54.00	-14.45	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 54 von 165
Page 54 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1053

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

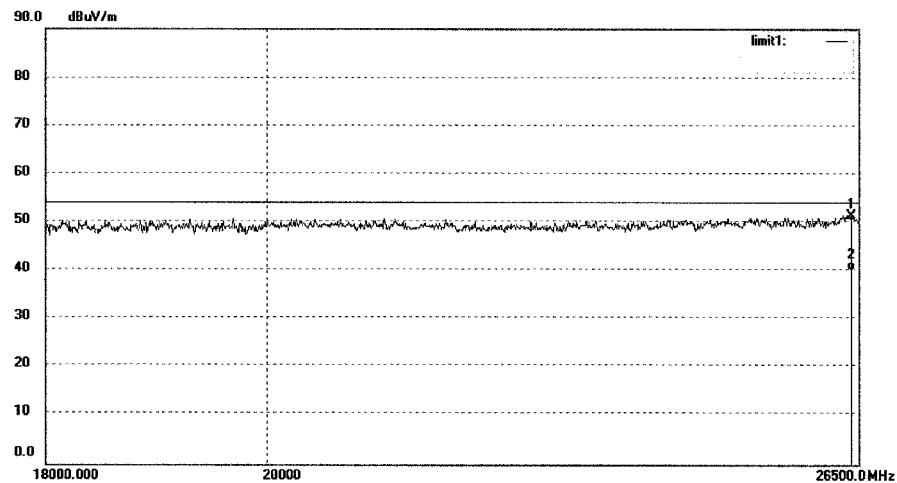

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26417.967	34.54	16.95	51.49	74.00	-22.51	peak			
2	26417.967	23.15	16.95	40.10	54.00	-13.90	AVG			


Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 55 von 165
Page 55 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1055	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

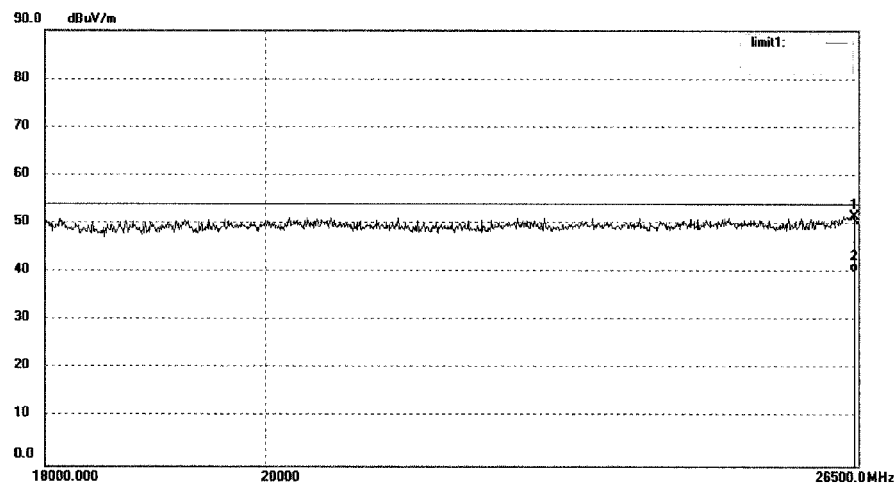

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26448.699	35.11	16.50	51.61	74.00	-22.39	peak			
2	26448.699	23.58	16.50	40.08	54.00	-13.92	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 56 von 165
Page 56 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #1056
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2480MHz
 Model: UB-15MS10
 Manufacturer: Zowee

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth

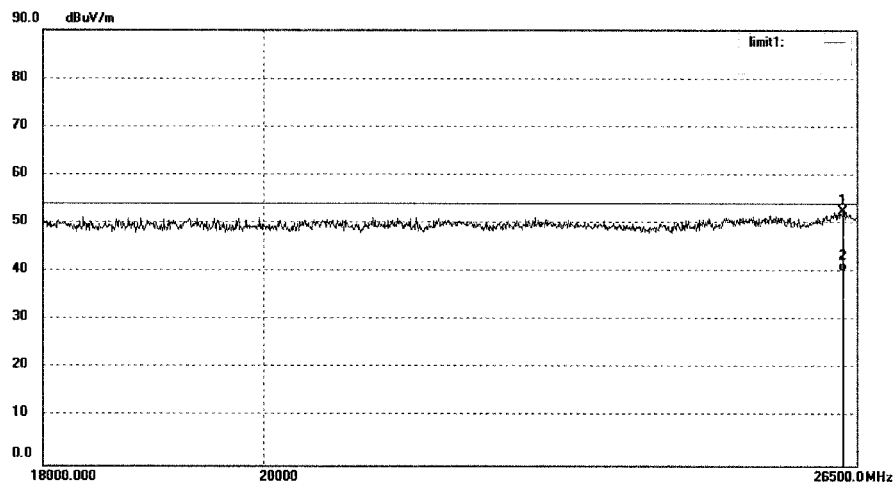


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	35.42	17.01	52.43	74.00	-21.57	peak			
2	26336.188	23.26	17.01	40.27	54.00	-13.73	AVG			

ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

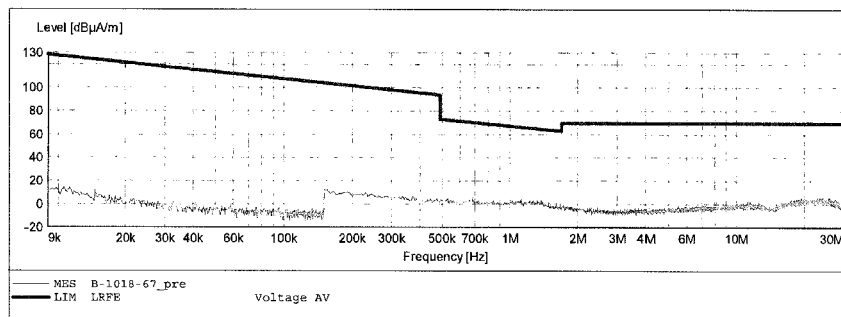


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

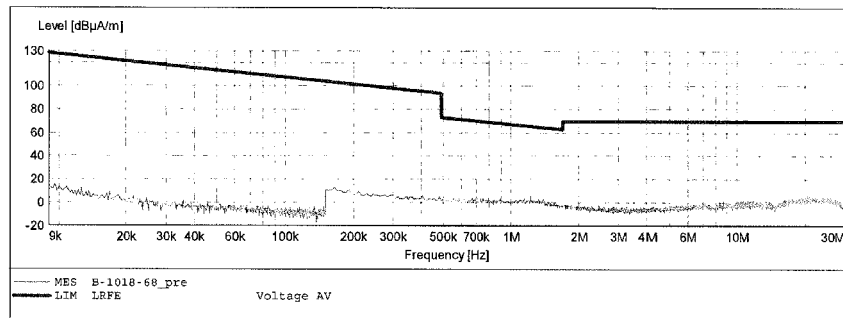


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70				Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width	Step				
9.0 kHz	150.0 kHz	100.0 Hz		QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz		QuasiPeak	1.0 s	9 kHz	1516M

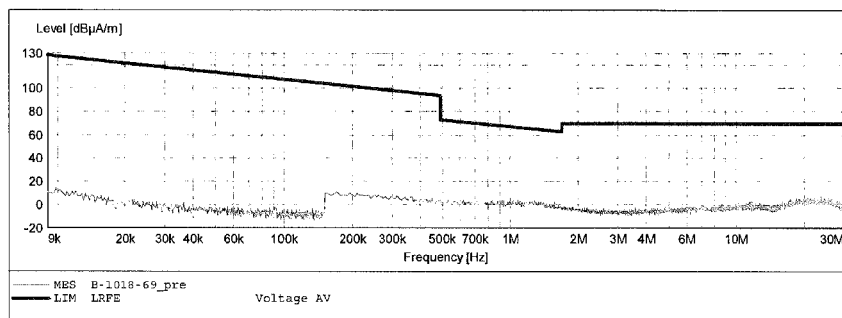


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

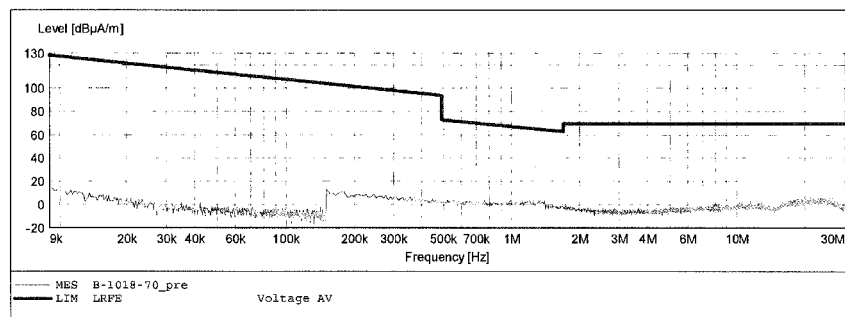


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

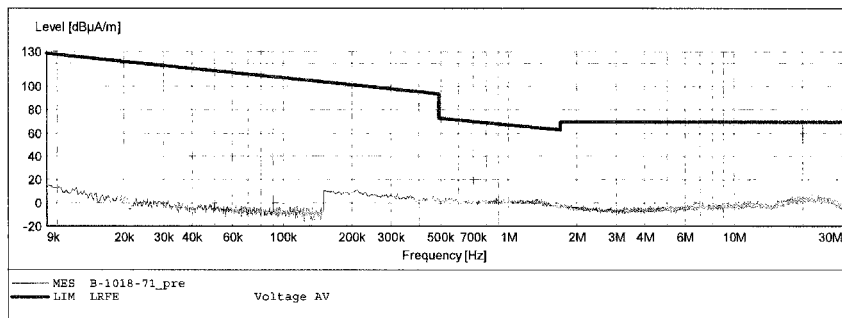


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

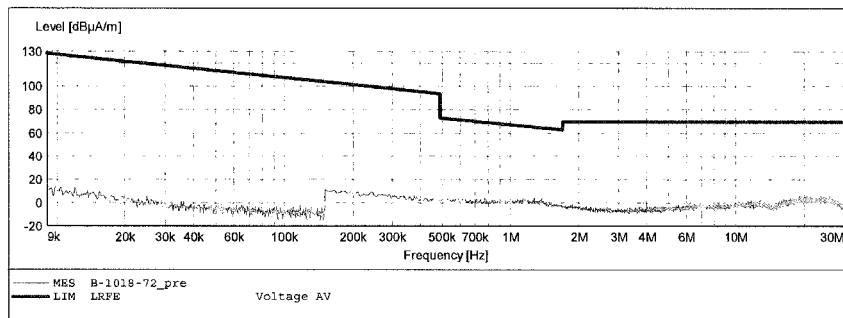


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

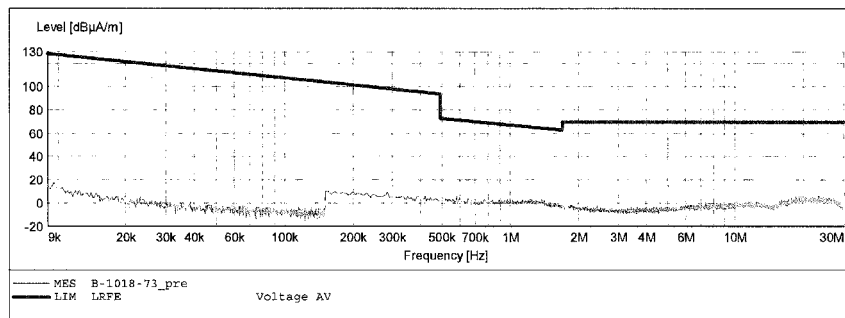


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

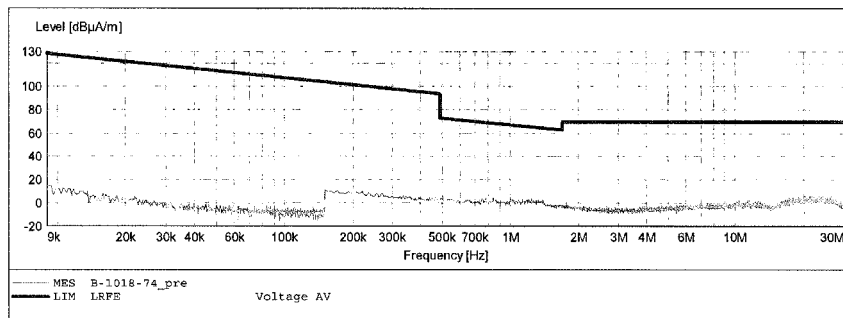


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

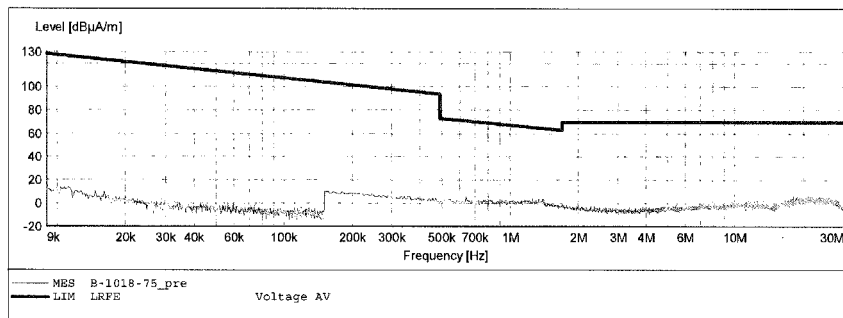


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #797

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

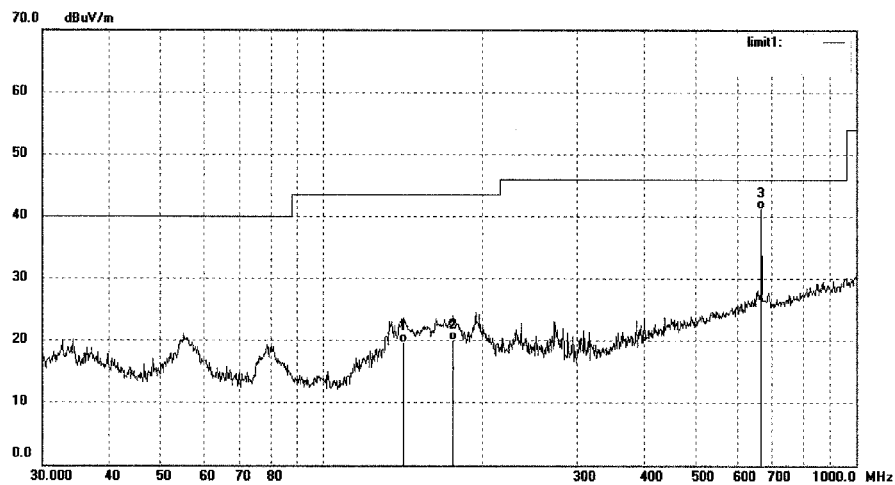

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	141.8262	34.97	-15.23	19.74	43.50	-23.76	QP			
2	175.6516	33.73	-13.62	20.11	43.50	-23.39	QP			
3	668.1422	43.45	-2.16	41.29	46.00	-4.71	QP			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 67 von 165
Page 67 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #798

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: Bluetooth 4.0

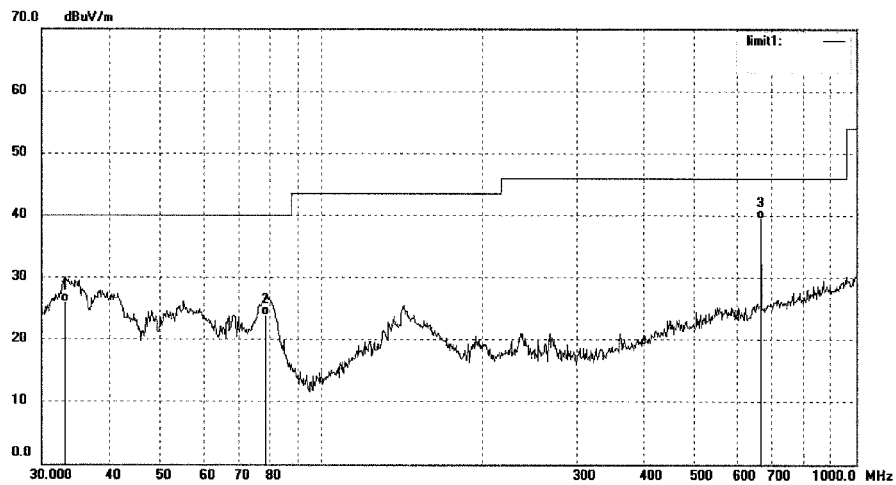

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2111	36.32	-10.25	26.07	40.00	-13.93	QP			
2	78.4133	40.57	-16.60	23.97	40.00	-16.03	QP			
3	668.1422	41.58	-2.16	39.42	46.00	-6.58	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #800

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

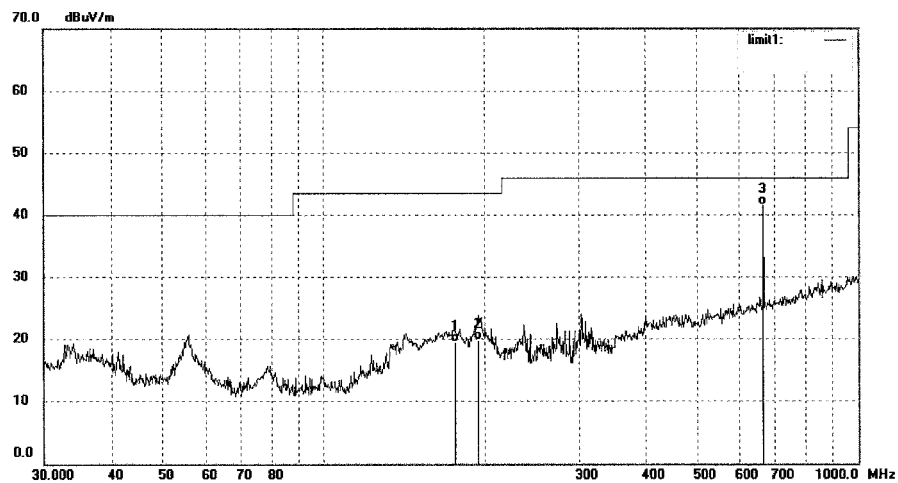

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	175.6516	33.14	-13.62	19.52	43.50	-23.98	QP			
2	193.7726	32.46	-12.51	19.95	43.50	-23.55	QP			
3	668.1422	43.67	-2.16	41.51	46.00	-4.49	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #799

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

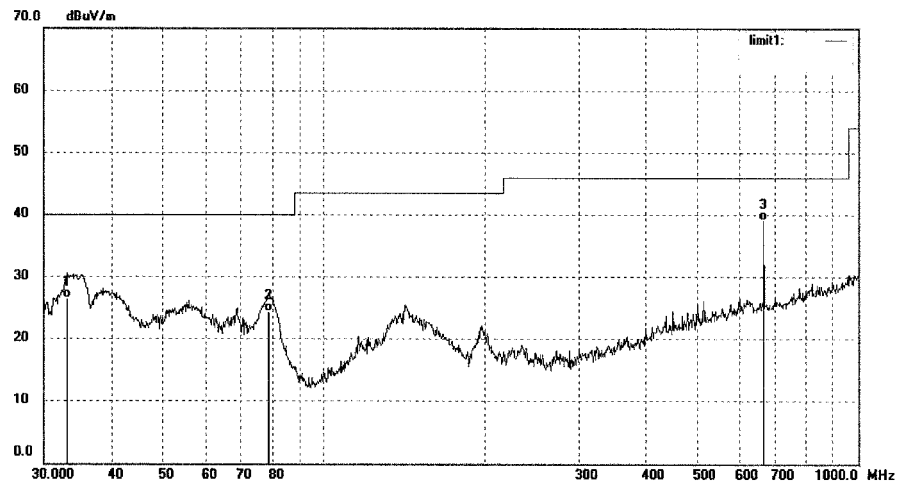

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	36.73	-10.24	26.49	40.00	-13.51	QP			
2	78.6888	40.96	-16.58	24.38	40.00	-15.62	QP			
3	668.1422	41.21	-2.16	39.05	46.00	-6.95	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #801

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

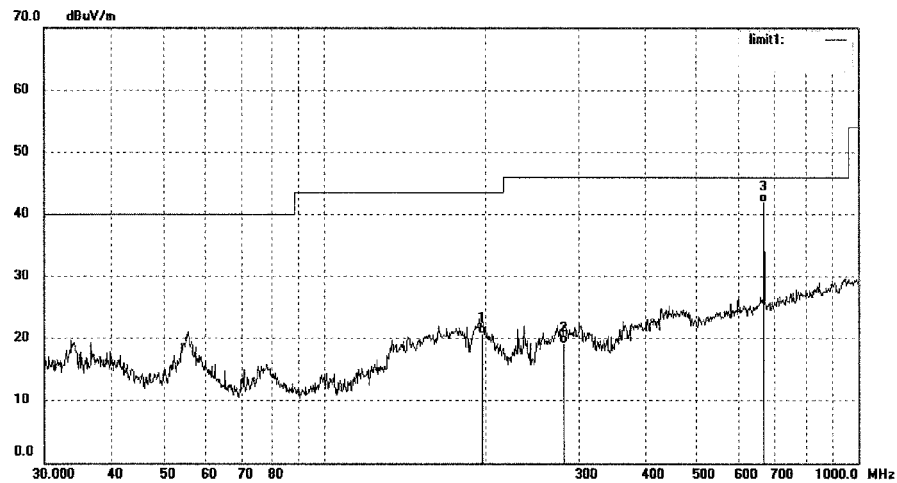

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	197.1999	33.12	-12.46	20.66	43.50	-22.84	QP			
2	281.0074	28.93	-9.81	19.12	46.00	-26.88	QP			
3	668.1422	44.04	-2.16	41.88	46.00	-4.12	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #802

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

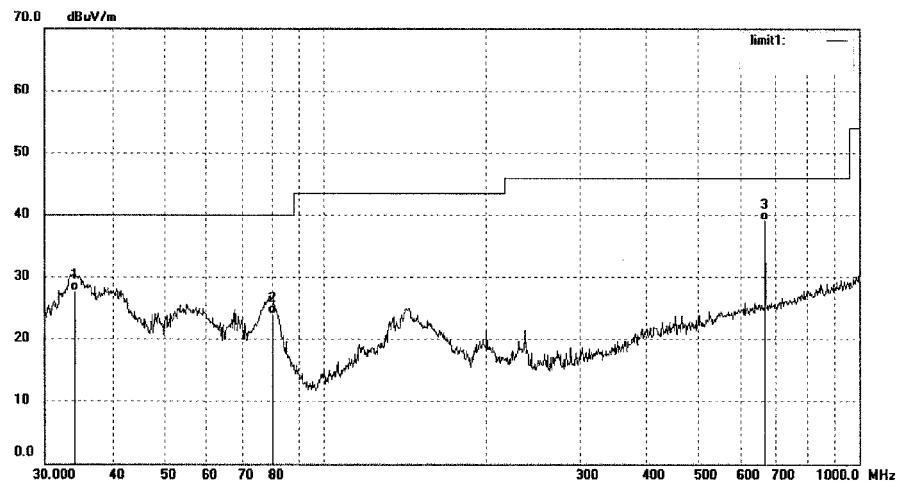

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.1561	38.06	-10.33	27.73	40.00	-12.27	QP			
2	79.8002	40.50	-16.52	23.98	40.00	-16.02	QP			
3	668.1422	41.29	-2.16	39.13	46.00	-6.87	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #949

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

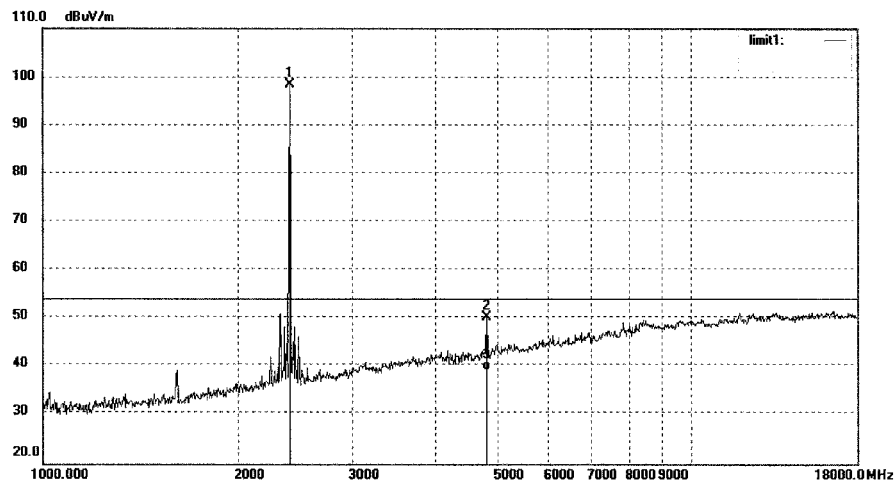

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.042	50.61	-0.30	50.31	74.00	-23.69	peak			
3	4804.042	39.47	-0.30	39.17	54.00	-14.83	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 73 von 165
Page 73 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: LAN2014 #950

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

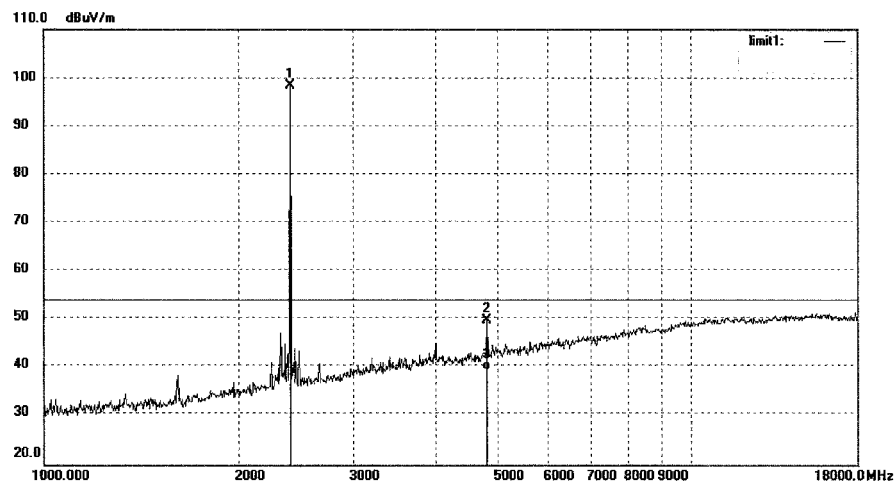

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.127	50.18	-0.30	49.88	74.00	-24.12	peak			
3	4804.127	39.75	-0.30	39.45	54.00	-14.55	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #952

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

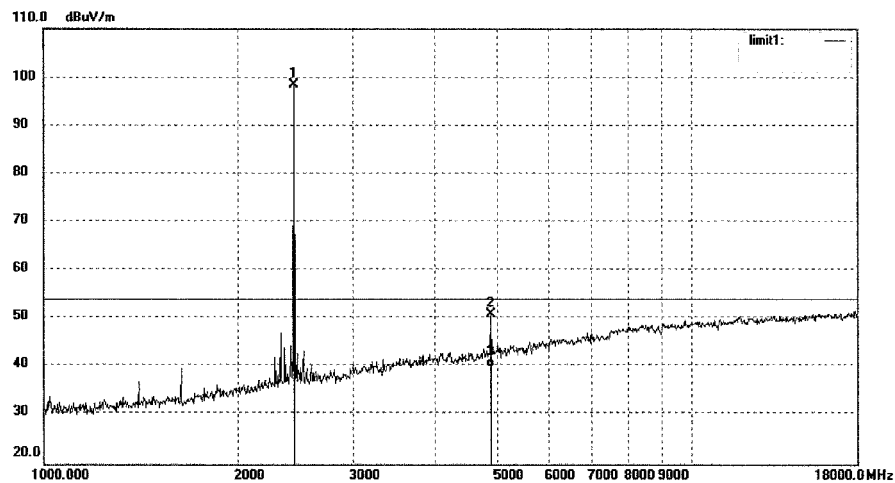

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	105.85	-7.36	98.49	/	/	peak			
2	4874.042	50.85	0.09	50.94	74.00	-23.06	peak			
3	4874.042	39.76	0.09	39.85	54.00	-14.15	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #951

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2440MHz

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: Bluetooth 4.0

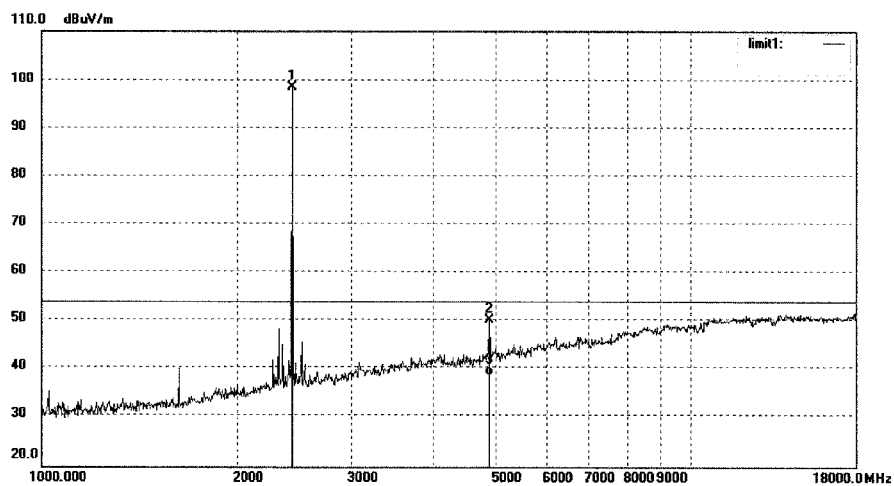

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	105.76	-7.36	98.40	/	/	peak			
2	4874.041	50.08	0.09	50.17	74.00	-23.83	peak			
3	4874.041	38.79	0.09	38.88	54.00	-15.12	AVG			

Prüfbericht - Nr.: 17043527 001
 Test Report No.

Seite 76 von 165
 Page 76 of 165

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #953

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

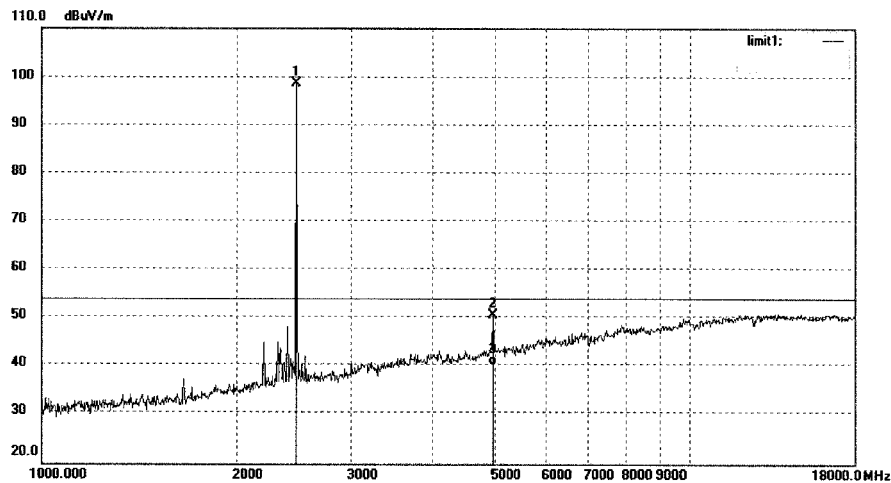

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.017	50.25	0.52	50.77	74.00	-23.23	peak			
3	4960.017	39.79	0.52	40.31	54.00	-13.69	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 77 von 165
Page 77 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #954

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

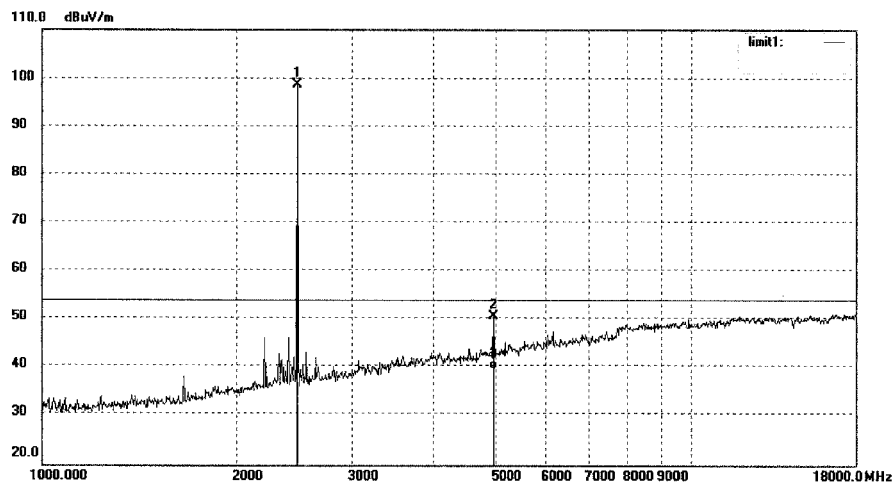


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.023	50.10	0.52	50.62	74.00	-23.38	peak			
3	4960.023	39.07	0.52	39.59	54.00	-14.41	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1058	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth 4.0

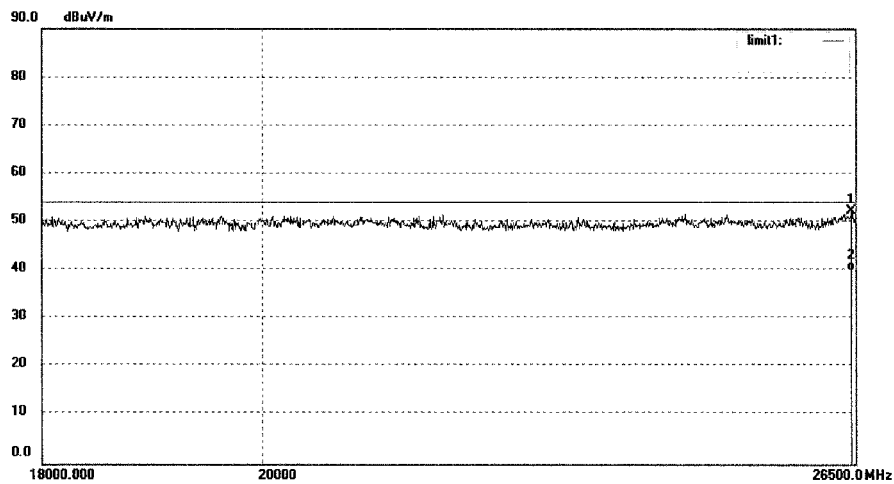

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.31	16.93	52.24	74.00	-21.76	peak			
2	26458.952	23.03	16.93	39.96	54.00	-14.04	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1057

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

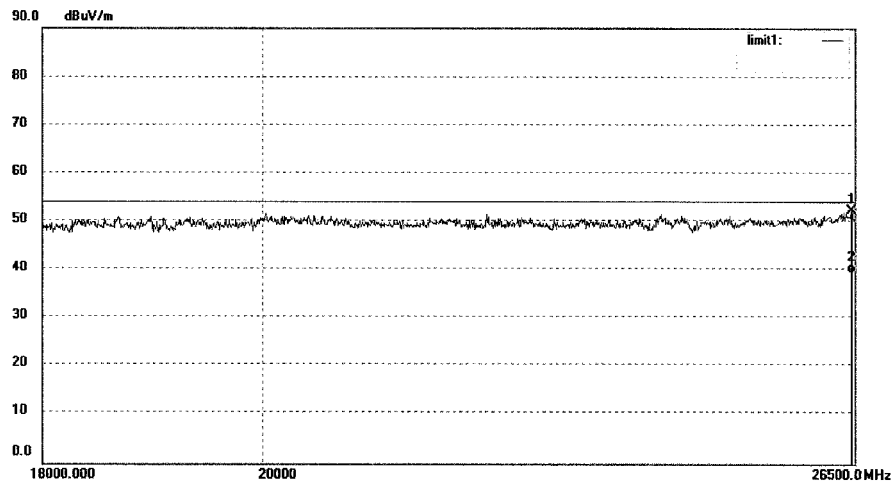


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26469.208	35.80	16.50	52.30	74.00	-21.70	peak			
2	26469.208	22.98	16.50	39.48	54.00	-14.52	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1059	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

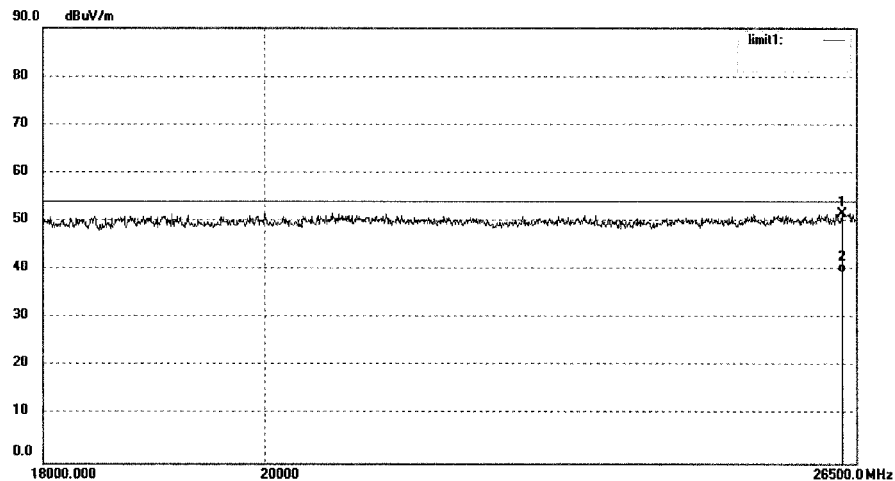

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	34.68	17.01	51.69	74.00	-22.31	peak			
2	26336.188	22.57	17.01	39.58	54.00	-14.42	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1060

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

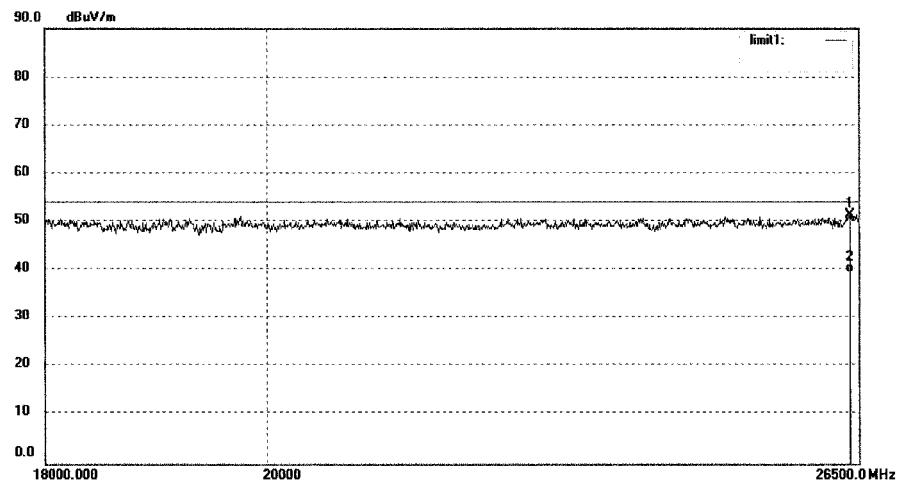

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26397.499	34.93	16.50	51.43	74.00	-22.57	peak			
2	26397.499	22.98	16.50	39.48	54.00	-14.52	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1062

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

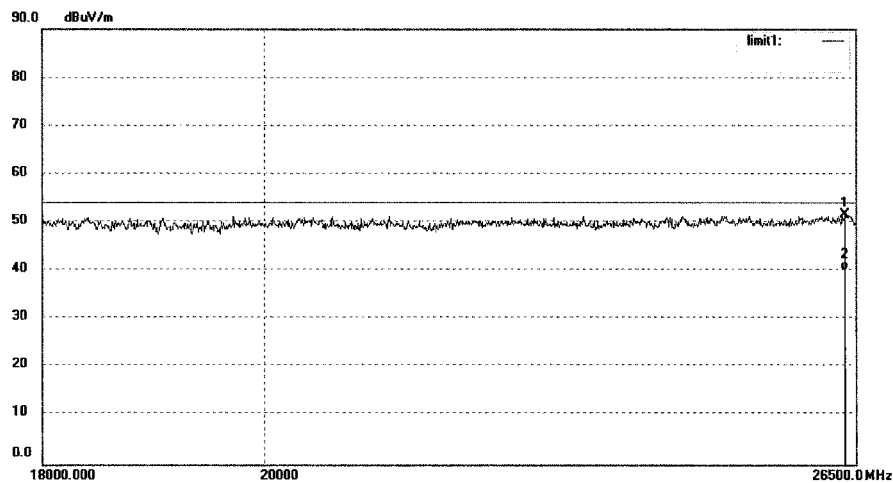


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.046	35.22	16.50	51.72	54.00	-22.27	peak			
2	26377.046	23.68	16.50	40.18	54.00	-13.82	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 83 von 165
Page 83 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1061	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

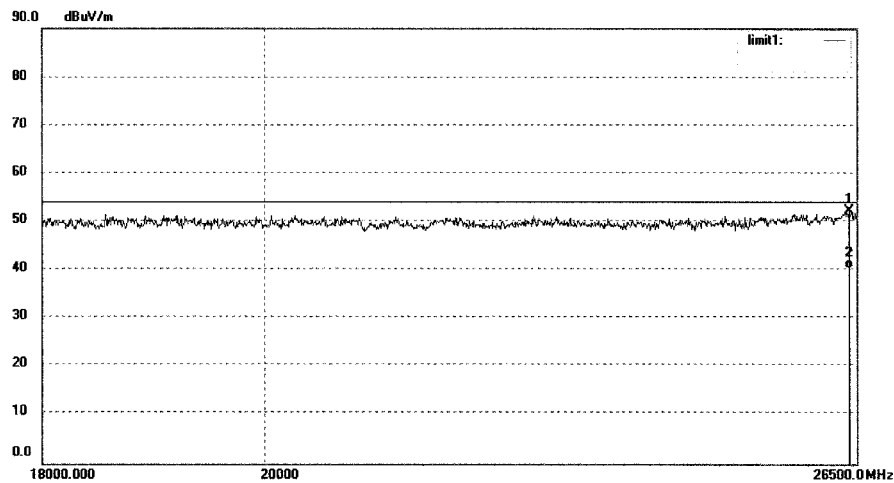


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.26	16.96	52.22	74.00	-21.78	peak			
2	26407.731	23.43	16.96	40.39	54.00	-13.61	AVG			

ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70						
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

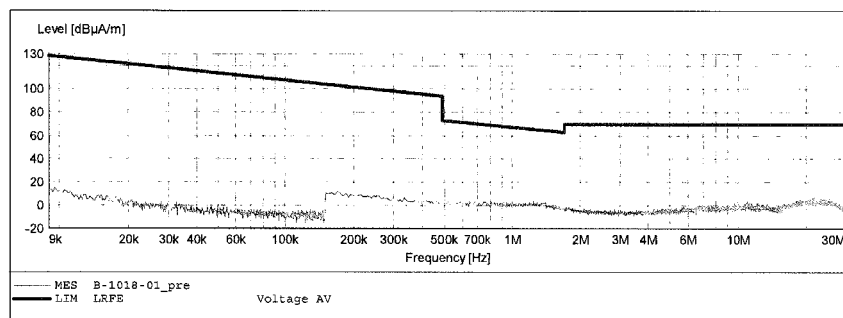


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

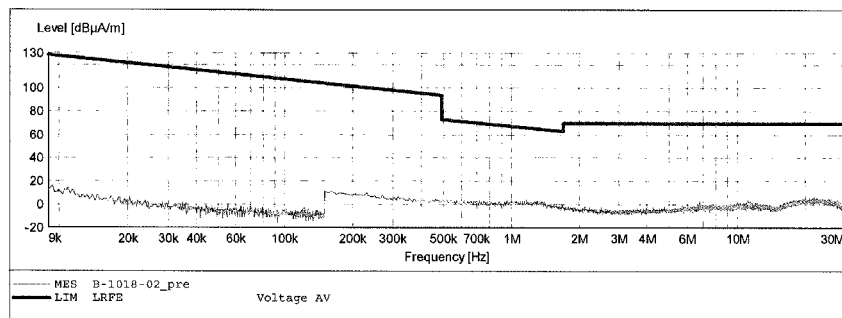


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

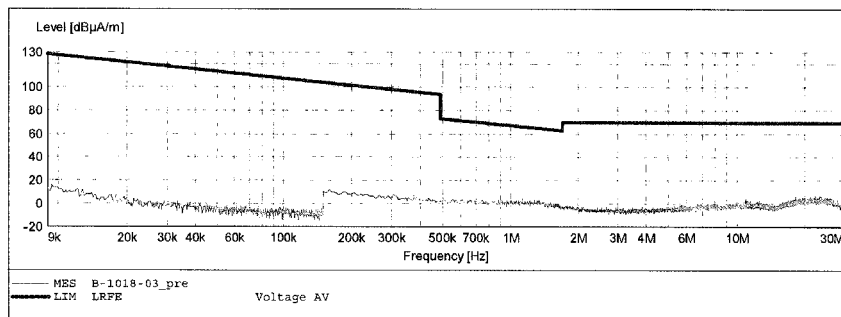


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2441MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

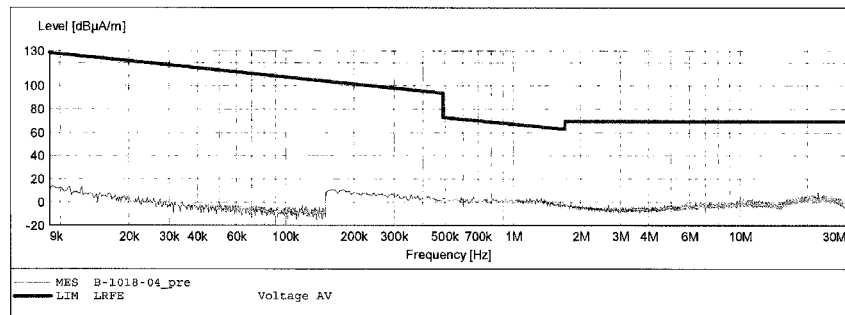


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2441MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

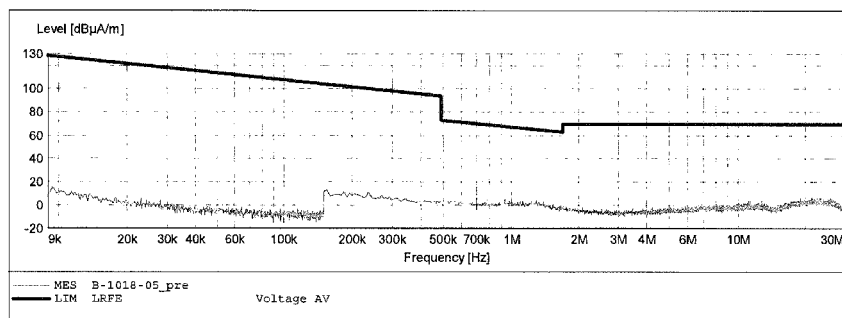


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2441MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

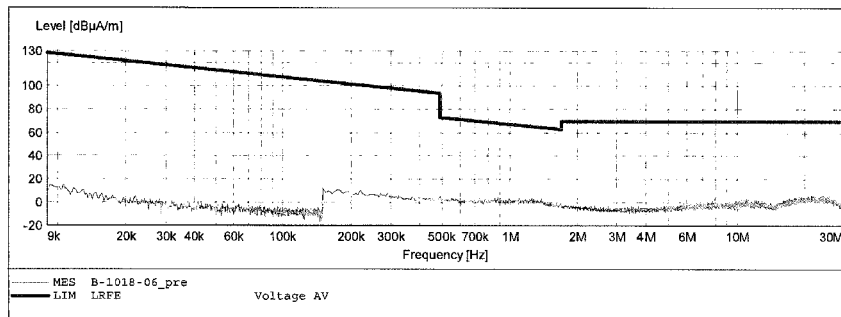


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start	Stop	Step				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

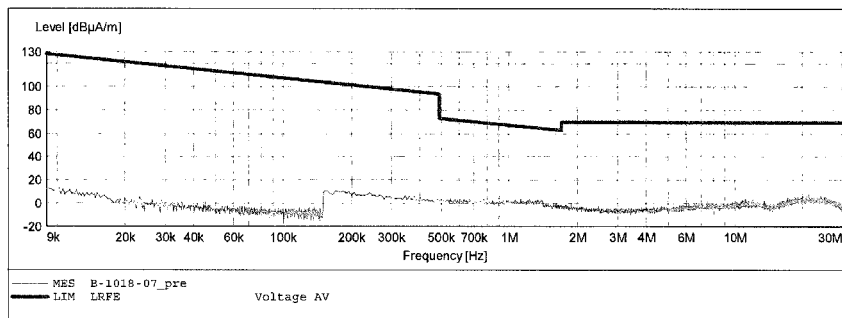


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70				Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width	Step				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak 1.0 s	200 Hz	1516M		
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak 1.0 s	9 kHz	1516M		

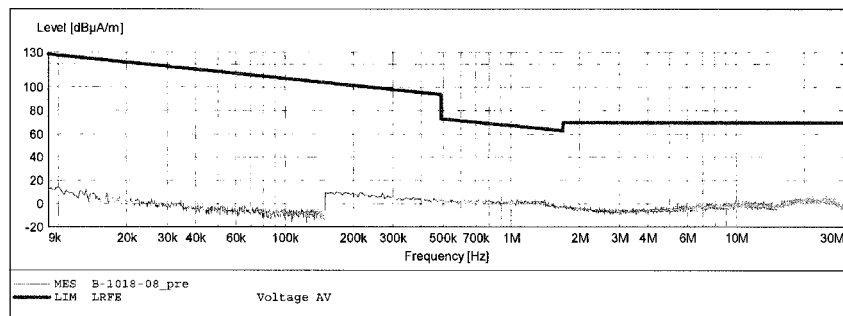


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

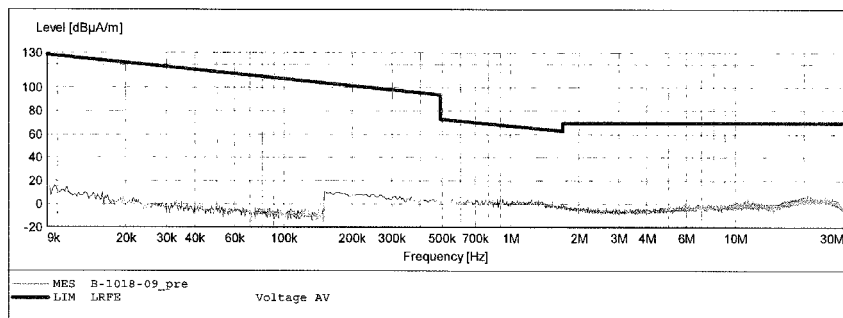


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #828

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

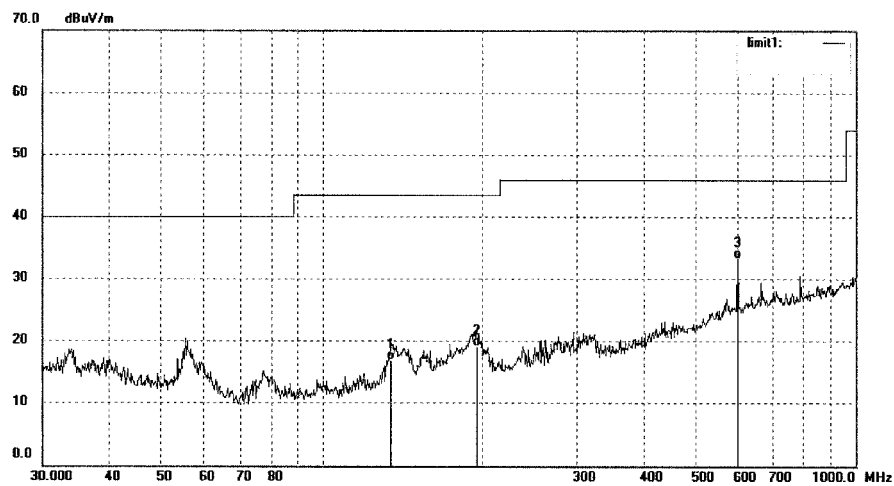

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	135.0319	31.02	-14.08	16.94	43.50	-26.56	QP			
2	195.1365	31.66	-12.47	19.19	43.50	-24.31	QP			
3	601.4265	36.31	-2.96	33.35	46.00	-12.65	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #827

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

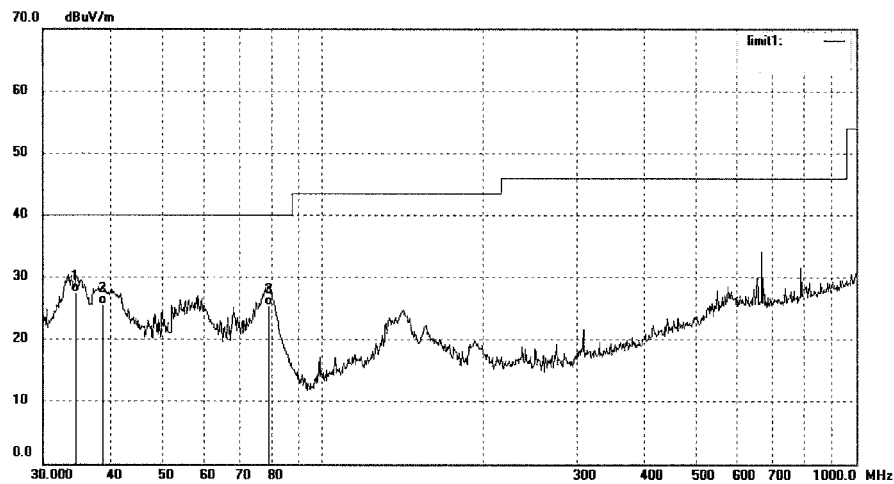


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.6385	37.91	-10.39	27.52	40.00	-12.48	QP			
2	38.8878	36.87	-11.30	25.57	40.00	-14.43	QP			
3	78.9651	42.11	-16.57	25.54	40.00	-14.46	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #829	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

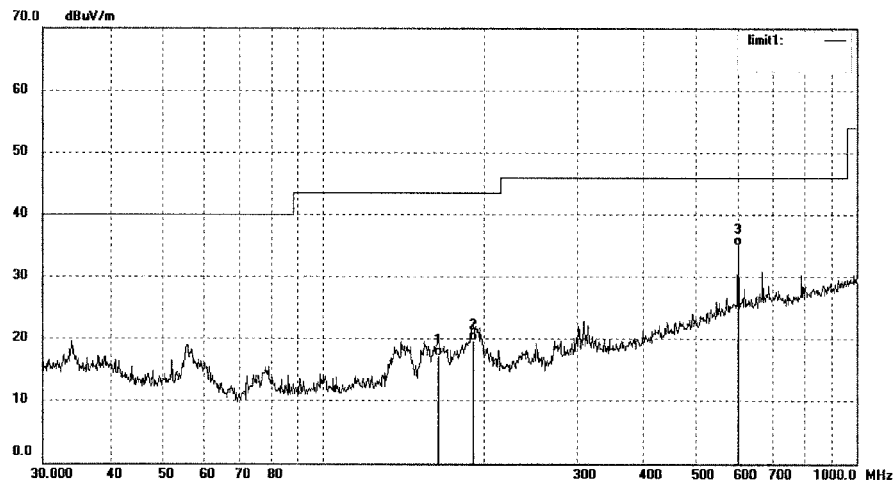

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	164.9074	31.69	-14.46	17.23	43.50	-26.27	QP			
2	191.7450	32.29	-12.59	19.70	43.50	-23.80	QP			
3	601.4265	38.07	-2.96	35.11	46.00	-10.89	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #830

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

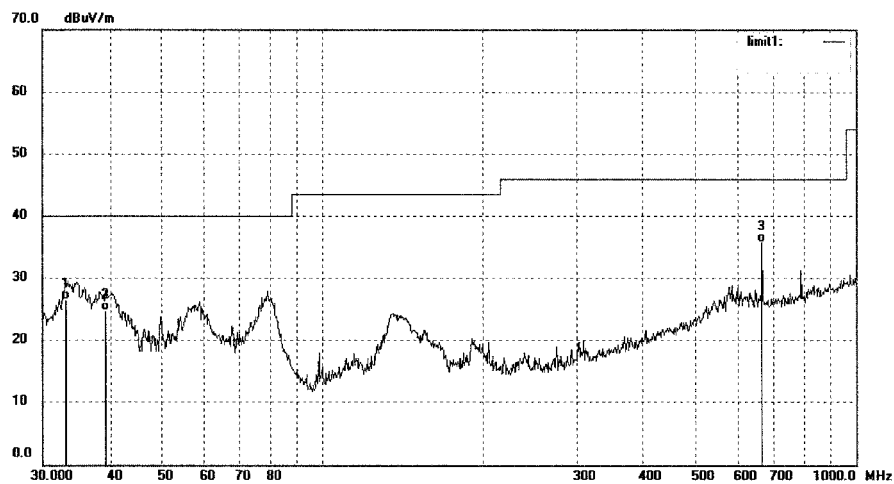


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2111	36.73	-10.25	26.48	40.00	-13.52	QP			
2	39.2991	36.24	-11.39	24.85	40.00	-15.15	QP			
3	668.1422	37.88	-2.16	35.72	46.00	-10.28	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #832	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

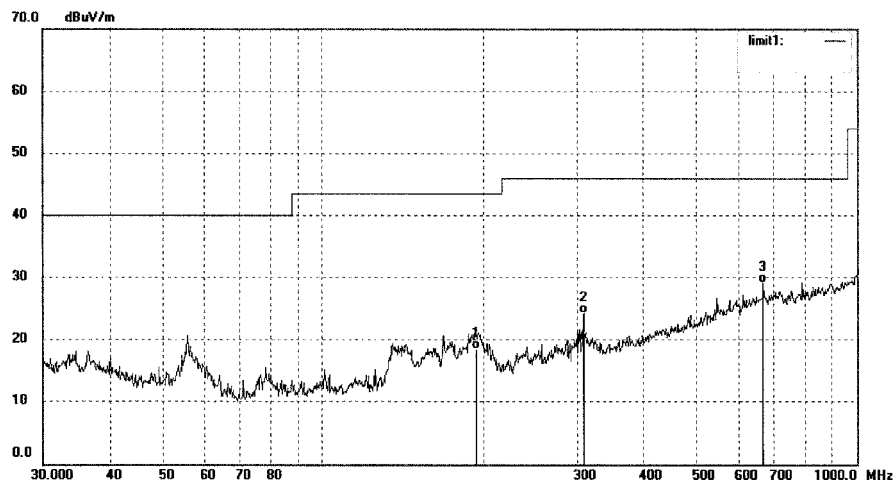


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	193.0945	31.06	-12.54	18.52	43.50	-24.98	QP			
2	307.8312	33.25	-9.09	24.16	46.00	-21.84	QP			
3	668.1422	31.38	-2.16	29.22	46.00	-16.78	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #831	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

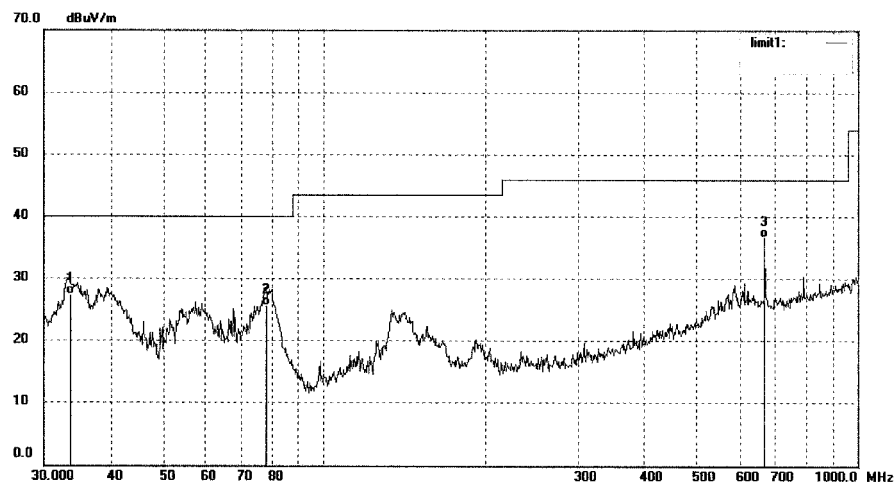


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.5623	37.72	-10.27	27.45	40.00	-12.55	QP			
2	78.1389	42.20	-16.61	25.59	40.00	-14.41	QP			
3	668.1422	38.87	-2.16	36.71	46.00	-9.29	QP			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #863	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

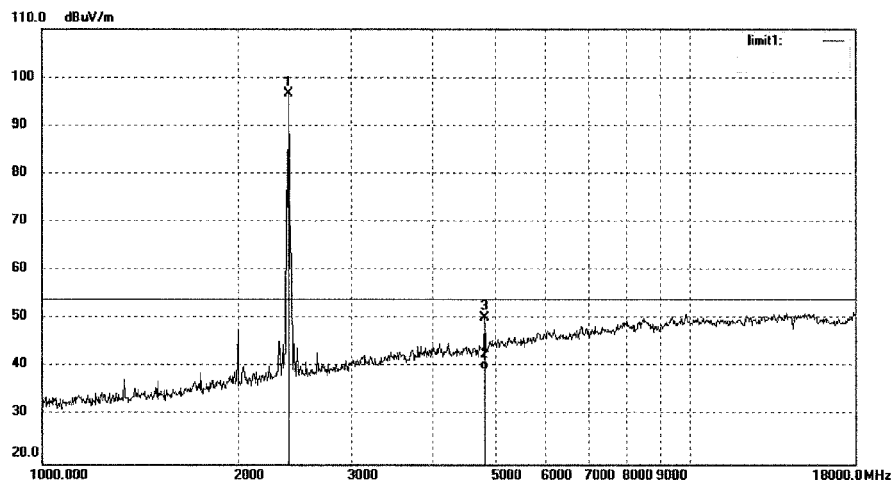


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	103.98	-7.45	96.53	/	/	peak			
2	4804.010	39.84	-0.30	39.54	54.00	-14.46	AVG			
3	4804.110	50.52	-0.30	50.22	74.00	-23.78	peak			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #864	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

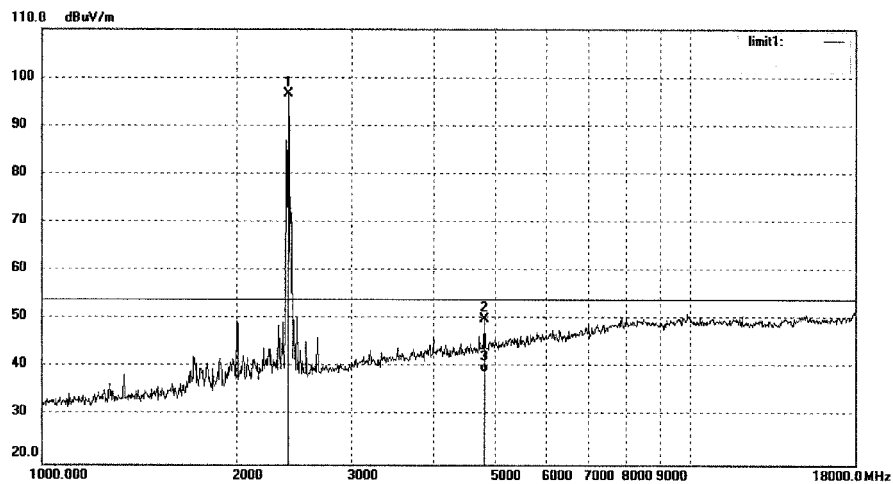

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	103.98	-7.45	96.53	/	/	peak			
2	4804.045	50.27	-0.30	49.97	74.00	-24.03	peak			
3	4804.045	39.39	-0.30	39.09	54.00	-14.91	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 101 von 165
Page 101 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #867

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2441MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

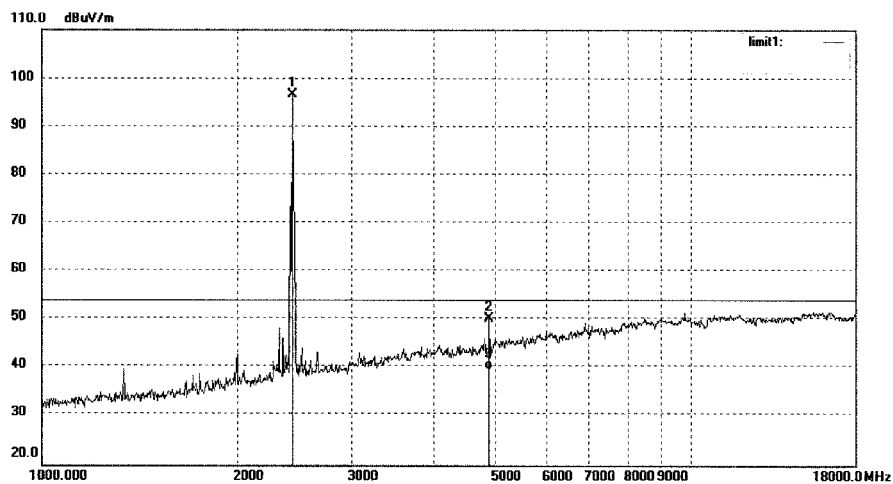

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	103.96	-7.35	96.61	/	/	peak			
2	4882.025	50.19	0.14	50.33	74.00	-23.67	peak			
3	4882.025	39.64	0.14	39.78	54.00	-14.22	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #866

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2441MHz

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Bluetooth

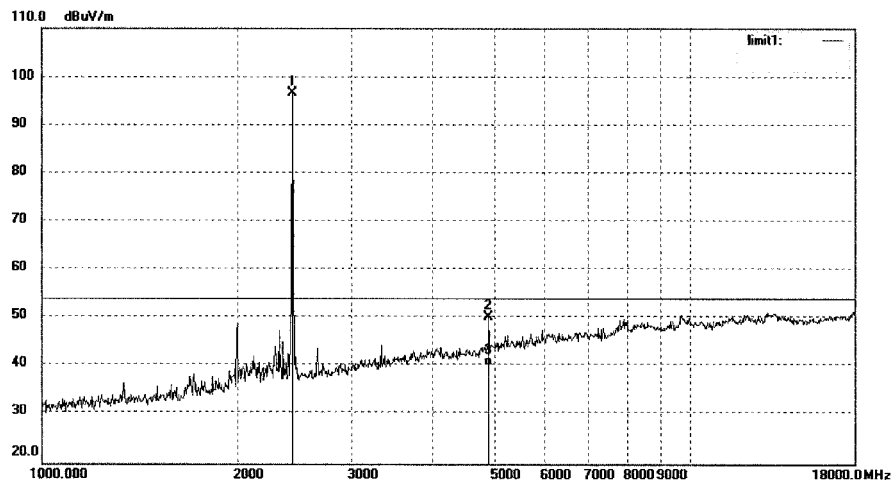

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	103.96	-7.35	96.61	/	/	peak			
2	4882.031	50.10	0.14	50.24	74.00	-23.76	peak			
3	4882.031	40.04	0.14	40.18	54.00	-13.82	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #868

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Bluetooth

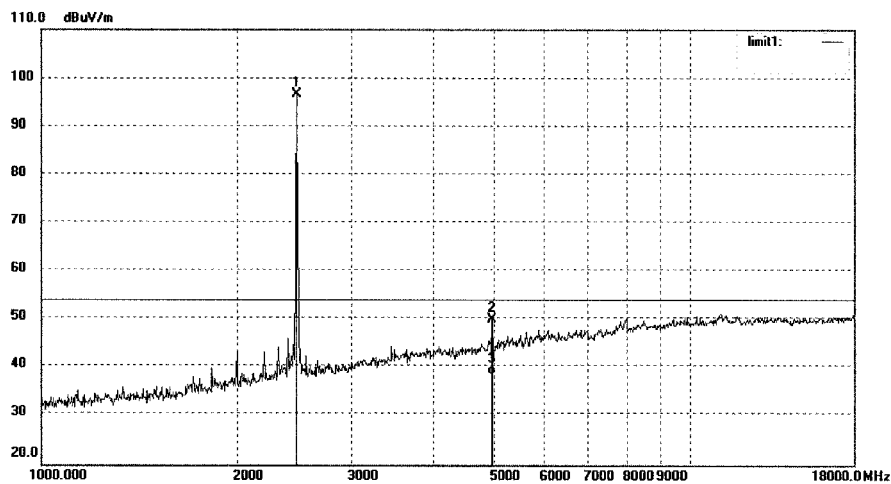


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	104.02	-7.37	96.65	/	/	peak			
2	4960.007	49.53	0.52	50.05	74.00	-23.95	peak			
3	4960.007	37.97	0.52	38.49	54.00	-15.51	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #869	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

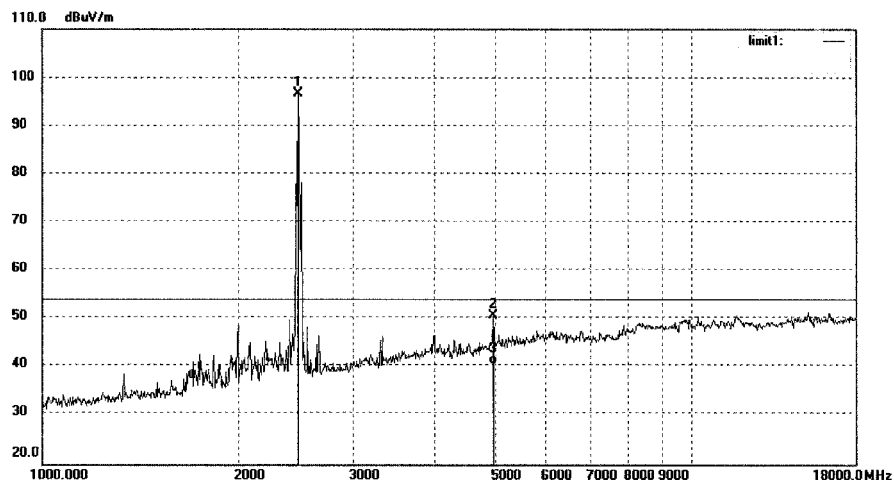


Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 105 von 165
Page 105 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1007	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

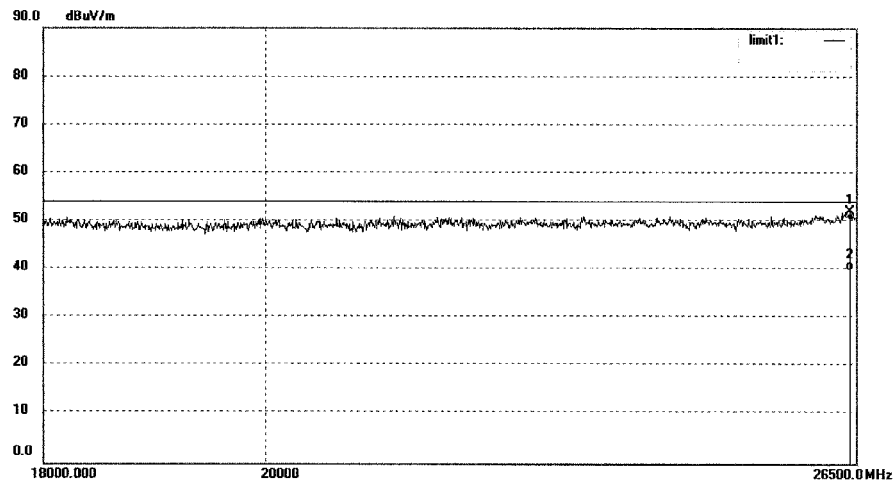


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26428.207	35.67	16.50	52.17	74.00	-21.83	peak			
2	26428.207	23.37	16.50	39.87	54.00	-14.13	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 106 von 165
Page 106 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1008	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

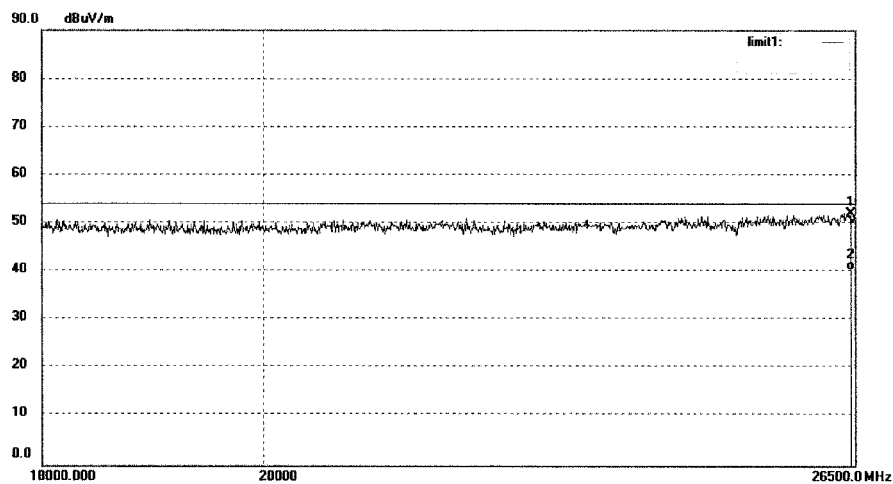

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.13	16.93	52.06	74.00	-21.94	peak			
2	26458.952	23.45	16.93	40.38	54.00	-13.62	AVG			


Prüfbericht - Nr.: 17043527 001
 Test Report No.

Seite 107 von 165
 Page 107 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1010	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

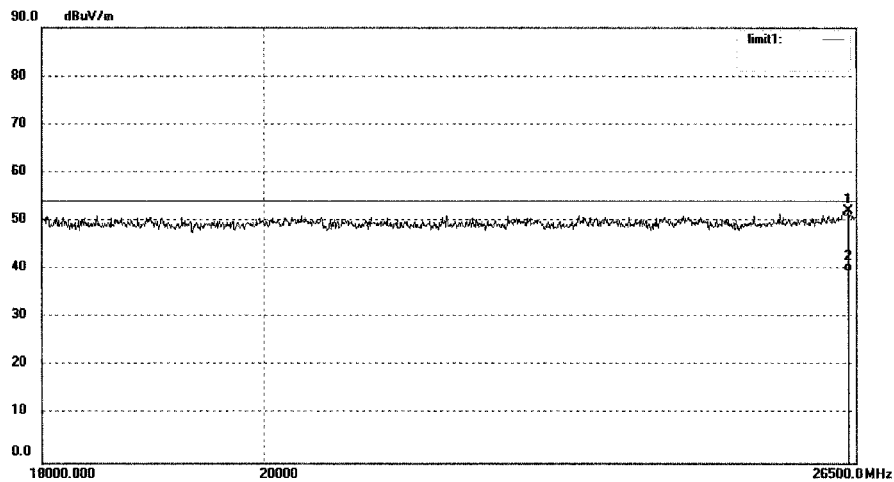


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.48	16.50	51.98	74.00	-22.02	peak			
2	26407.731	23.05	16.50	39.55	54.00	-14.45	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 108 von 165
Page 108 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1009	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

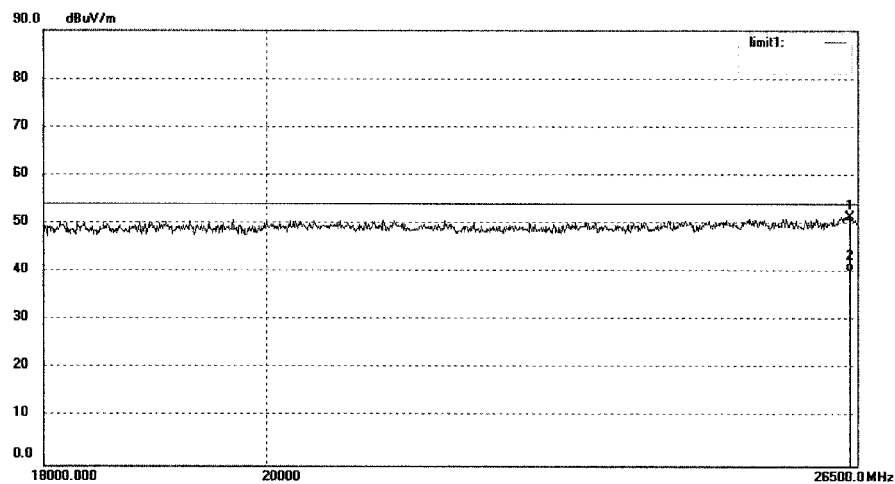

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26417.967	34.54	16.95	51.49	74.00	-22.51	peak			
2	26417.967	23.15	16.95	40.10	54.00	-13.90	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1011

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

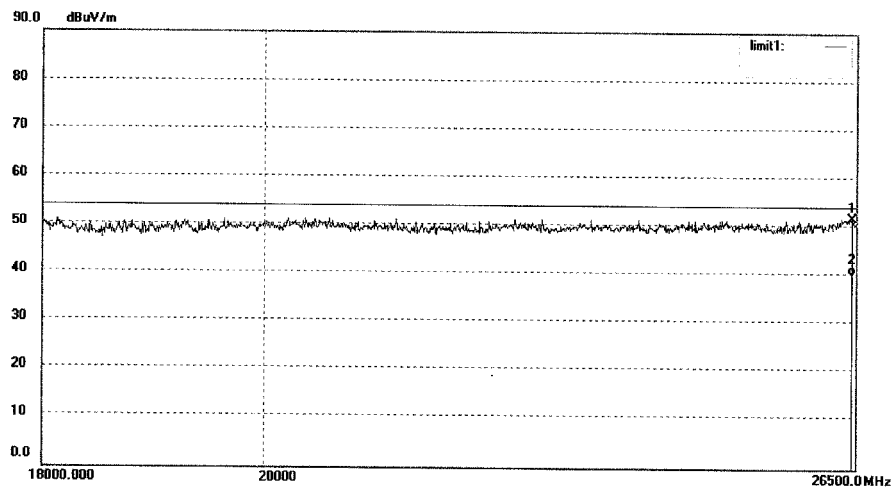

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26448.699	35.11	16.50	51.61	74.00	-22.39	peak			
2	26448.699	23.58	16.50	40.08	54.00	-13.92	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 110 von 165
Page 110 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1012

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

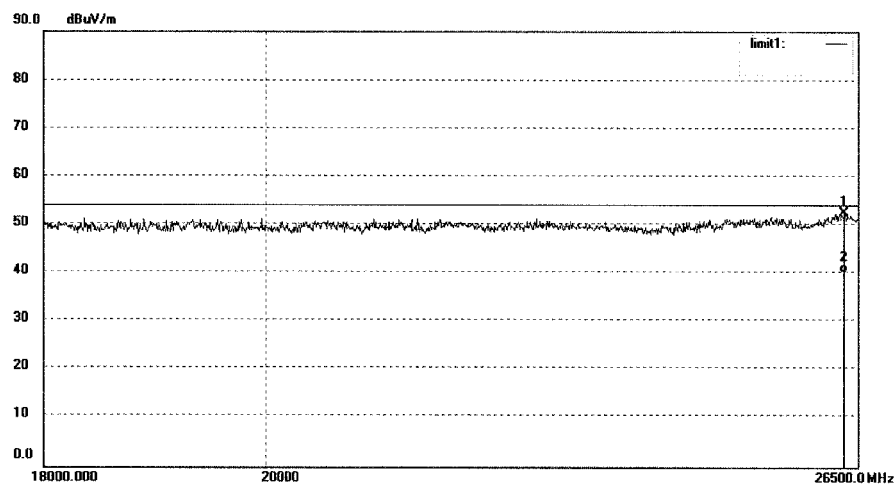

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	35.42	17.01	52.43	74.00	-21.57	peak			
2	26336.188	23.26	17.01	40.27	54.00	-13.73	AVG			


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

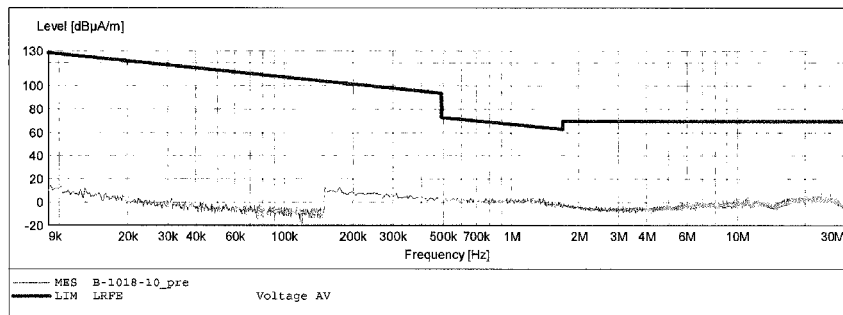


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:		SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

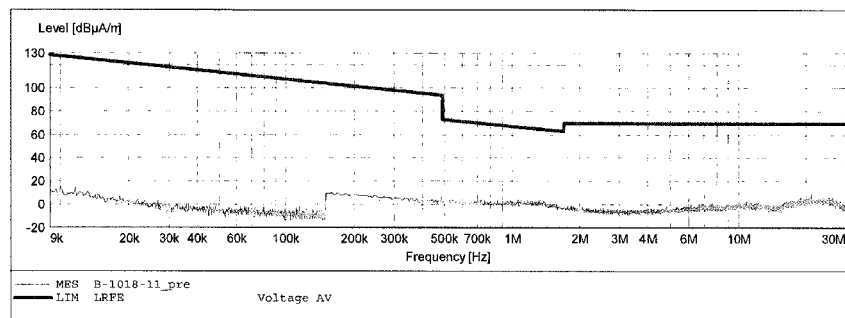


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2402MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start	Stop	Step				
Frequency	Frequency	Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

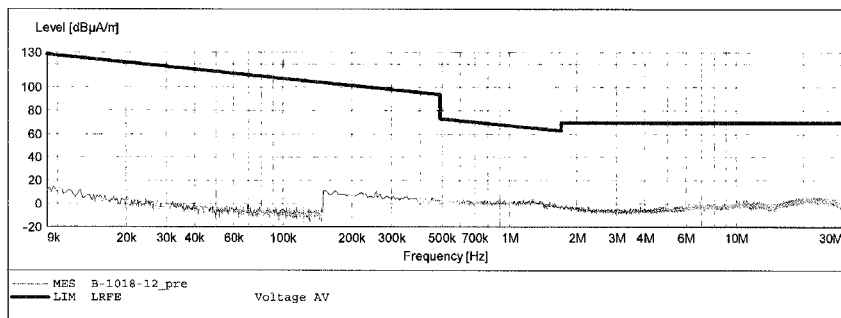


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas.	IF	Transducer
Start	Stop	Step		Time	Bandw.	
Frequency	Frequency	Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

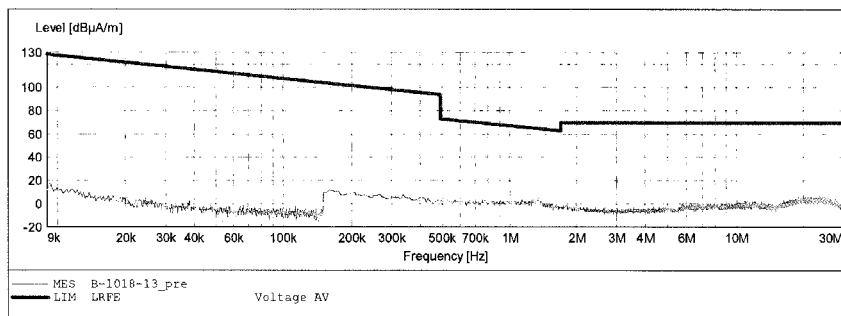


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

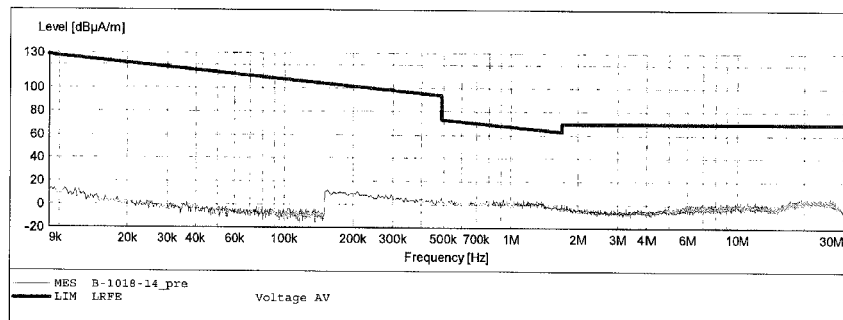


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

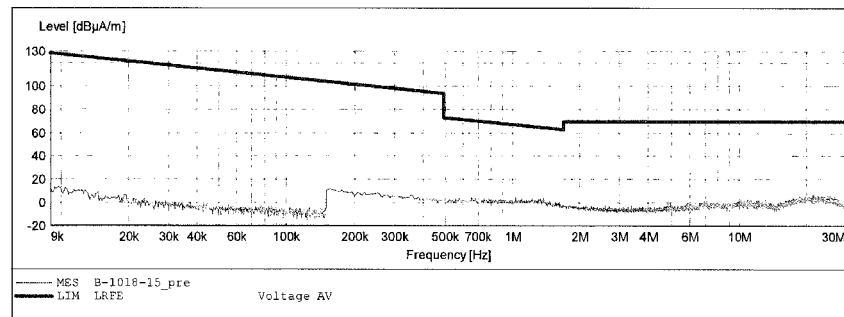


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:				SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

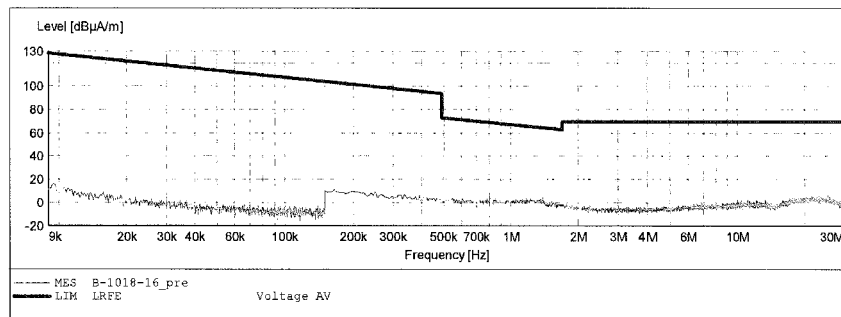


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

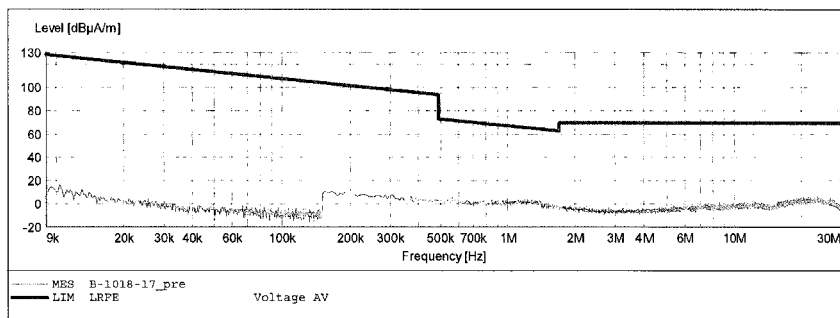


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Tablet PC M/N:NS-15MS08
 Manufacturer: Zowee
 Operating Condition: TX 2480MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2014-10-18 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70				Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width					
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

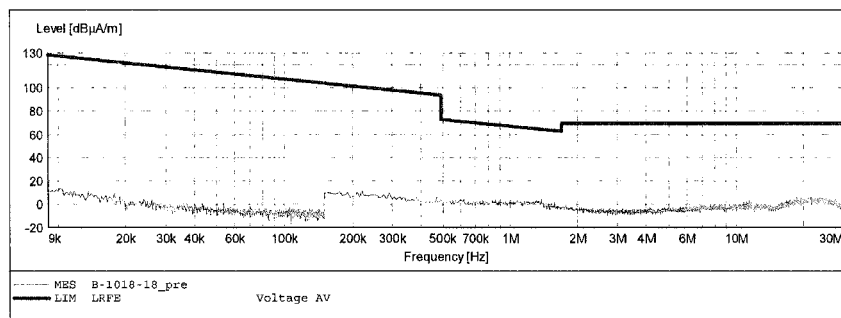


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A.Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #833

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

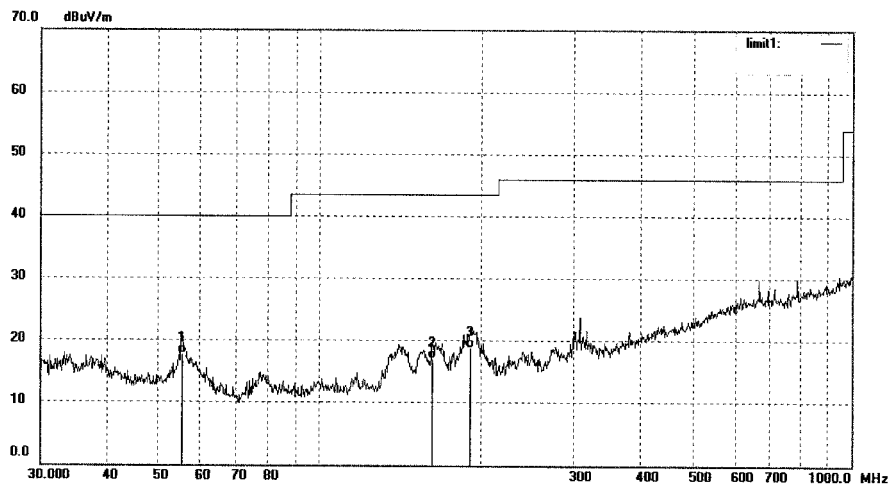

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	30.89	-13.06	17.83	40.00	-22.17	QP			
2	162.6106	31.53	-14.50	17.03	43.50	-26.47	QP			
3	191.7450	31.49	-12.59	18.90	43.50	-24.60	QP			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 121 von 165
Page 121 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #834
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2402MHz
 Model: NS-15MS08
 Manufacturer: Zowee

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth 4.0

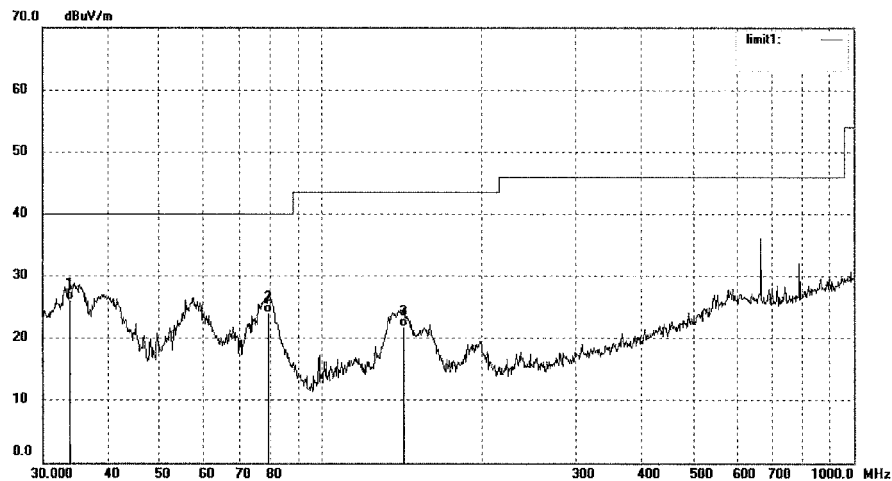

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.7986	36.50	-10.30	26.20	40.00	-13.80	QP			
2	78.9651	40.64	-16.57	24.07	40.00	-15.93	QP			
3	142.3243	37.01	-15.24	21.77	43.50	-21.73	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #836

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

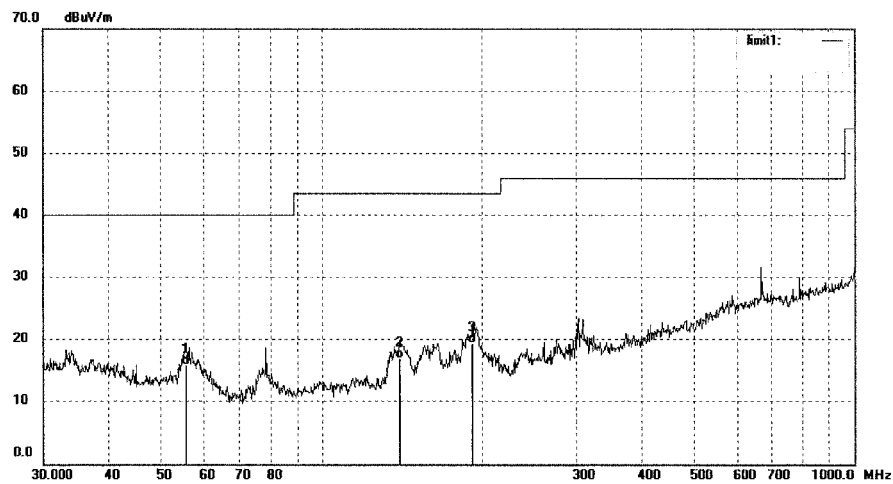

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.8046	28.93	-13.13	15.80	40.00	-24.20	QP			
2	139.8507	32.03	-15.20	16.83	43.50	-26.67	QP			
3	191.7450	32.01	-12.59	19.42	43.50	-24.08	QP			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 123 von 165
Page 123 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #835

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

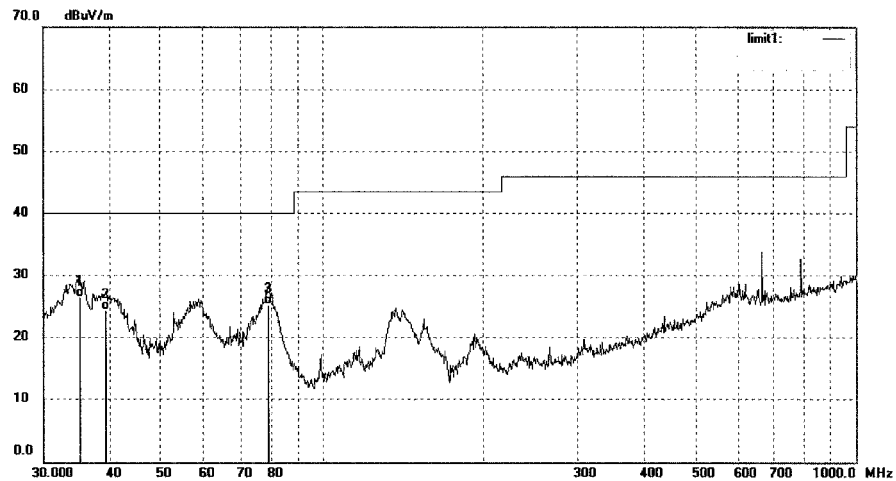

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2511	36.93	-10.48	26.45	40.00	-13.55	QP			
2	39.4371	35.76	-11.42	24.34	40.00	-15.66	QP			
3	78.6888	41.79	-16.58	25.21	40.00	-14.79	QP			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 124 von 165
Page 124 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #837

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

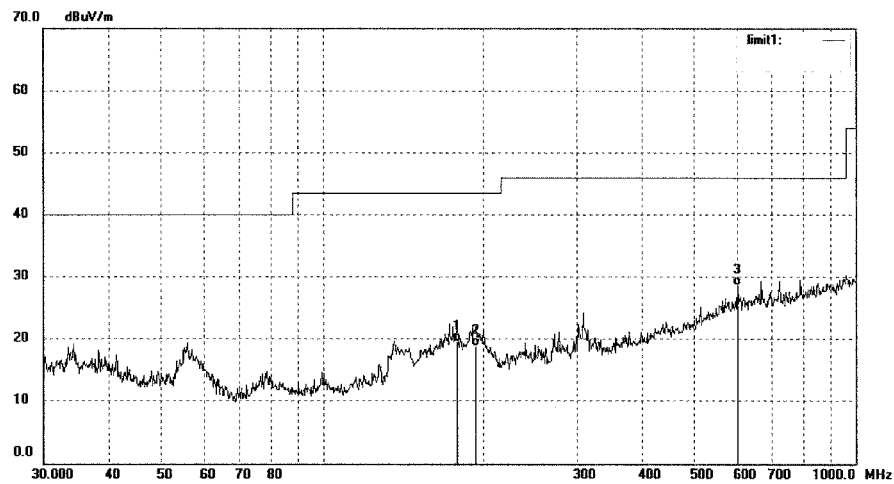

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	179.3863	32.94	-13.49	19.45	43.50	-24.05	QP			
2	194.4533	31.39	-12.49	18.90	43.50	-24.60	QP			
3	601.4265	31.49	-2.96	28.53	46.00	-17.47	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #838

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

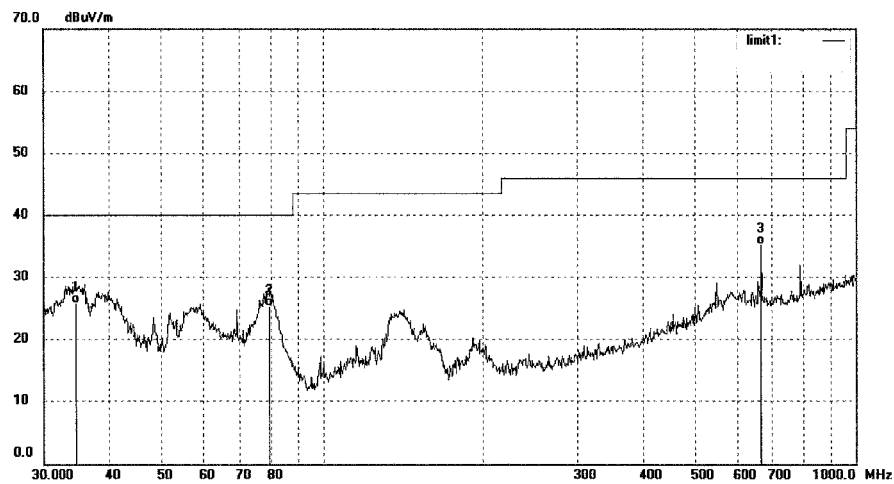

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.6385	36.21	-10.39	25.82	40.00	-14.18	QP			
2	79.2425	41.83	-16.56	25.27	40.00	-14.73	QP			
3	668.1422	37.49	-2.16	35.33	46.00	-10.67	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #877

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

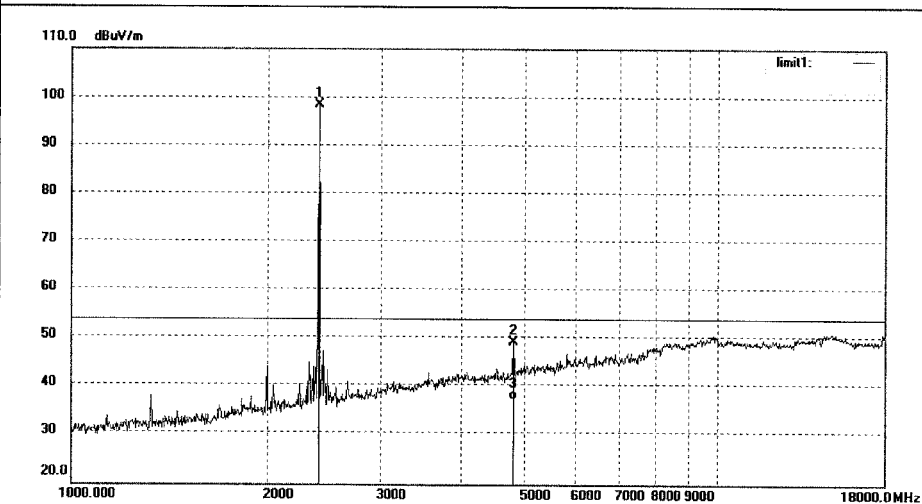

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.028	49.63	-0.30	49.33	74.00	-24.67	peak			
3	4804.028	37.82	-0.30	37.52	54.00	-16.48	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #876

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Bluetooth 4.0

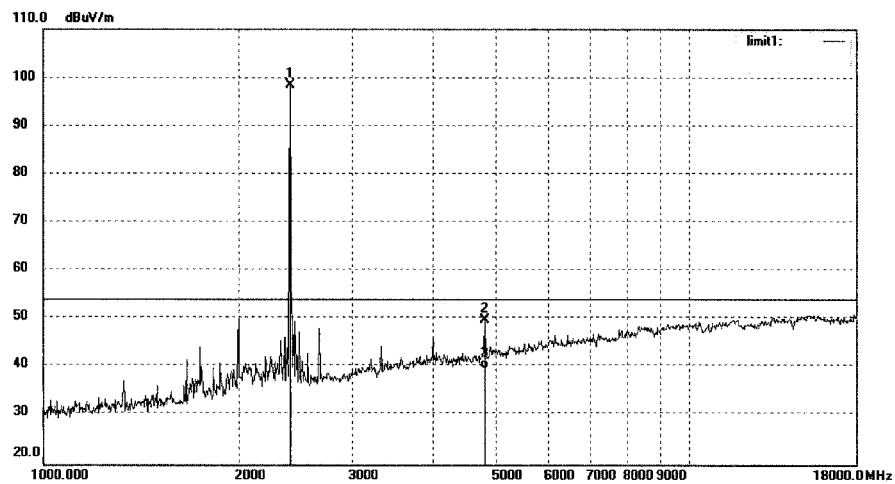

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.019	50.07	-0.30	49.77	74.00	-24.23	peak			
3	4804.019	39.96	-0.30	39.66	54.00	-14.34	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #878

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

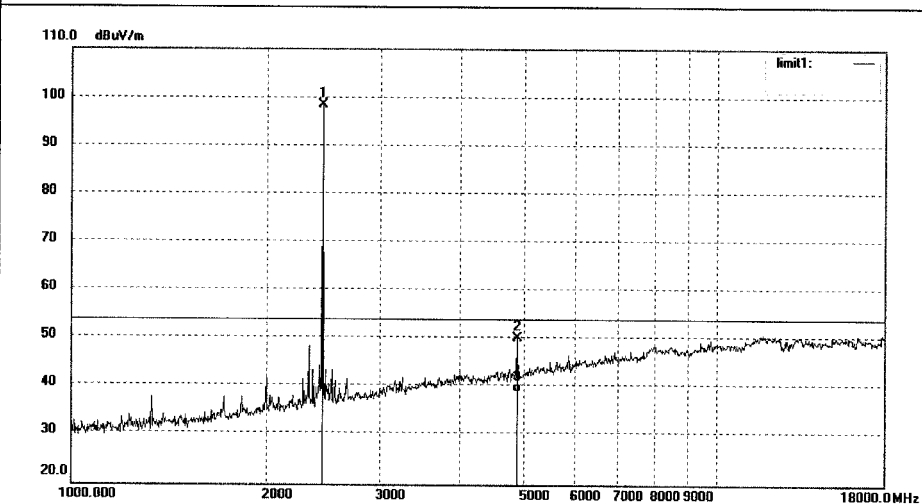

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	105.85	-7.36	98.49	/	/	peak			
2	4880.022	50.03	0.13	50.16	74.00	-23.84	peak			
3	4880.022	38.92	0.13	39.05	54.00	-14.95	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #879

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2440MHz

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Bluetooth 4.0

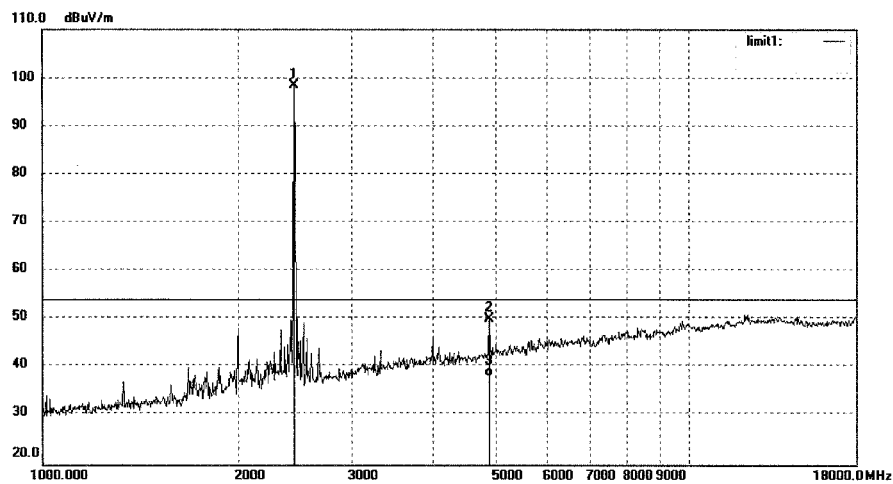

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	105.85	-7.36	98.49	/	/	peak			
2	4880.030	49.95	0.13	50.08	74.00	-23.92	peak			
3	4880.030	38.03	0.13	38.16	54.00	-15.84	AVG			


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #881

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Bluetooth 4.0

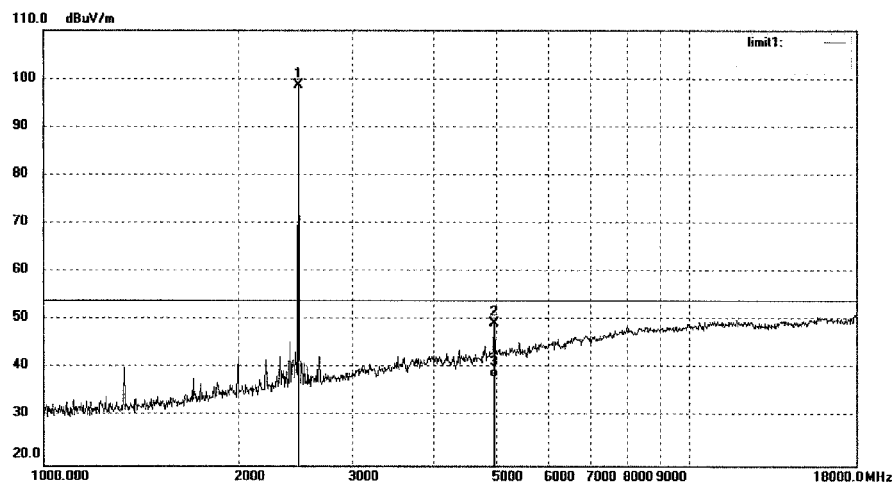

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.013	48.76	0.52	49.28	74.00	-24.72	peak			
3	4960.013	37.57	0.52	38.09	54.00	-15.91	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #880

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

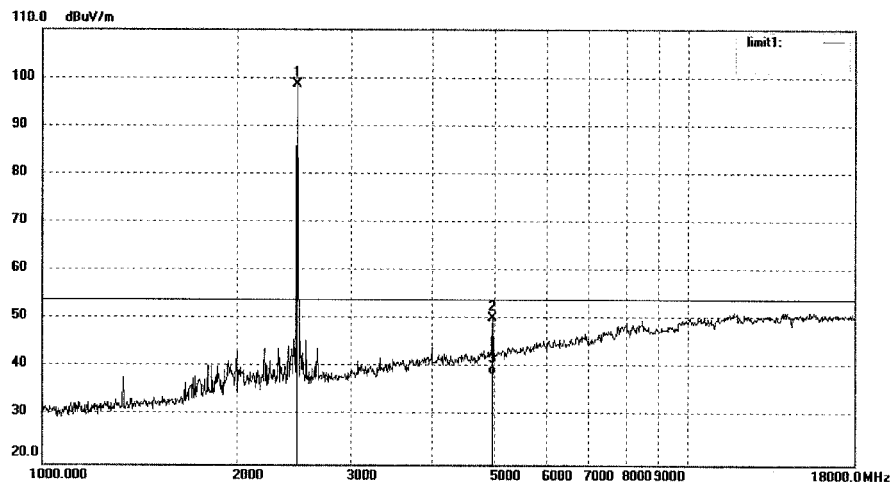

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.007	49.72	0.52	50.24	74.00	-23.76	peak			
3	4960.007	37.93	0.52	38.45	54.00	-15.55	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 132 von 165
Page 132 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1014

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

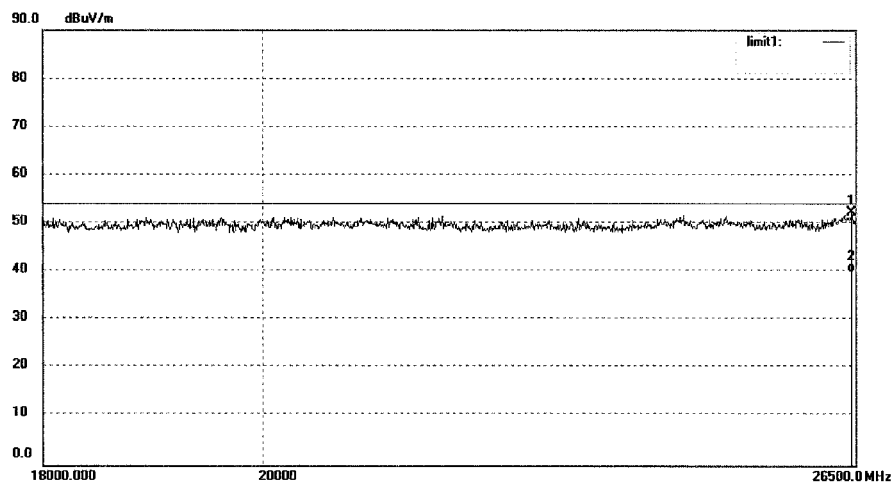

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.31	16.93	52.24	74.00	-21.76	peak			
2	26458.952	23.03	16.93	39.96	54.00	-14.04	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 133 von 165
Page 133 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1013

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

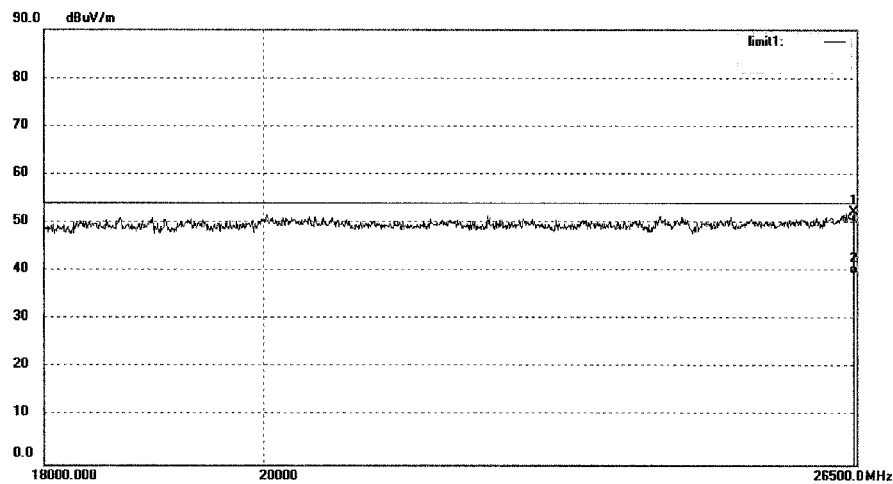


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26469.208	35.80	16.50	52.30	74.00	-21.70	peak			
2	26469.208	22.98	16.50	39.48	54.00	-14.52	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 134 von 165
Page 134 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1015	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test Item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

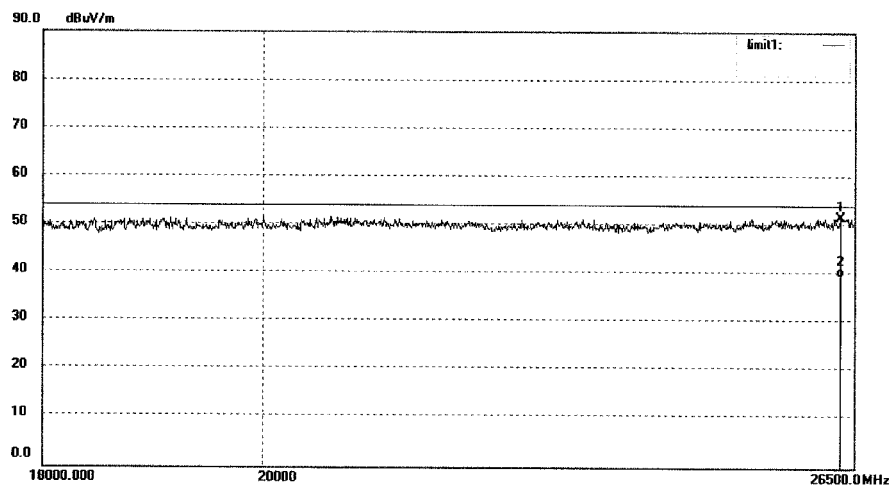

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	34.68	17.01	51.69	74.00	-22.31	peak			
2	26336.188	22.57	17.01	39.58	54.00	-14.42	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 135 von 165
Page 135 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #1016
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2440MHz
 Model: NS-15MS08
 Manufacturer: Zowee

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth 4.0

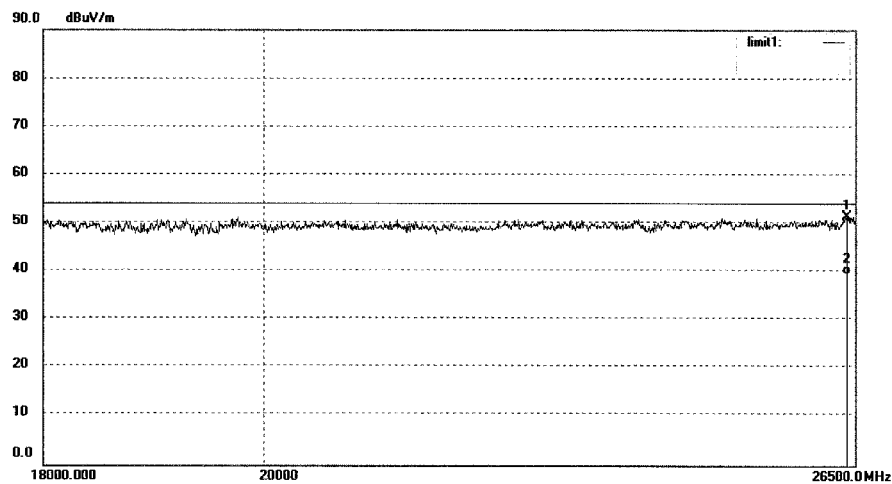

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26397.499	34.93	16.50	51.43	74.00	-22.57	peak			
2	26397.499	22.98	16.50	39.48	54.00	-14.52	AVG			

Prüfbericht - Nr.: 17043527 001
 Test Report No.

Seite 136 von 165
 Page 136 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #1018

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Bluetooth 4.0

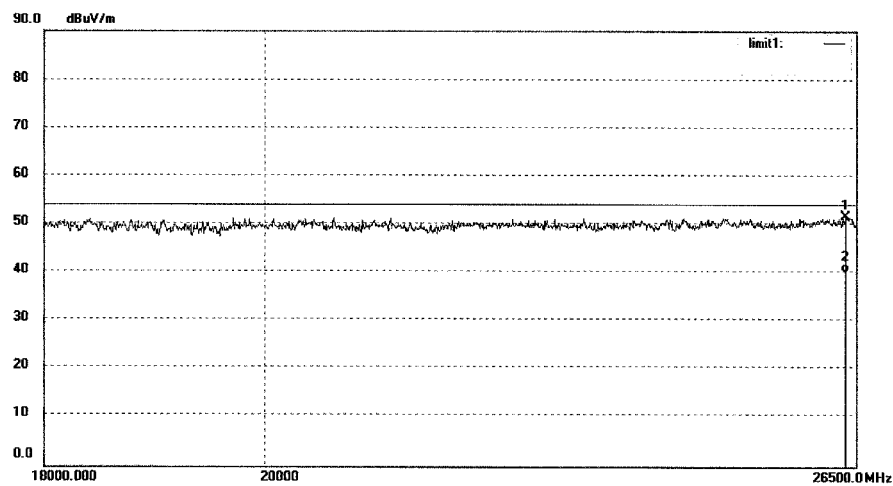

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.046	35.22	16.50	51.72	74.00	-22.28	peak			
2	26377.046	23.68	16.50	40.18	54.00	-13.82	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 137 von 165
Page 137 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1017

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

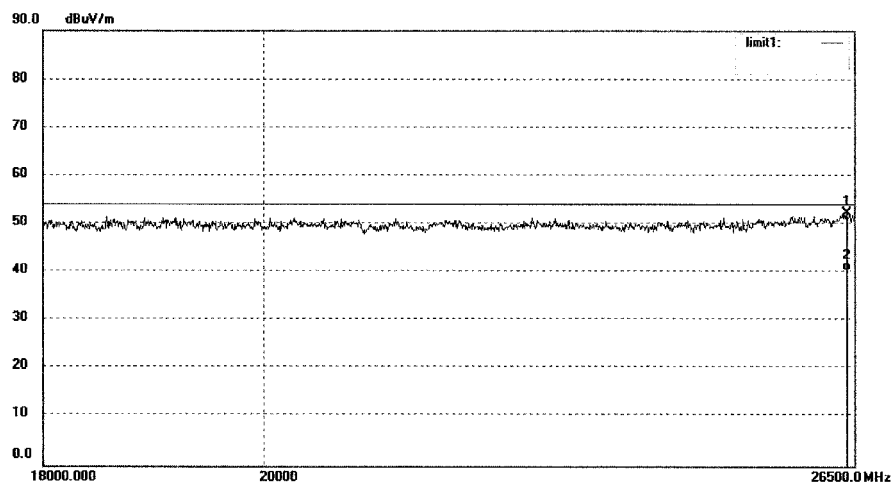

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.26	16.96	52.22	74.00	-21.78	peak			
2	26407.731	23.43	16.96	40.39	54.00	-13.61	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 138 von 165
Page 138 of 165

Test Plot of Frequency Band Edge



ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #945
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2402MHz
 Model: UB-15MS10
 Manufacturer: Zowee

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth

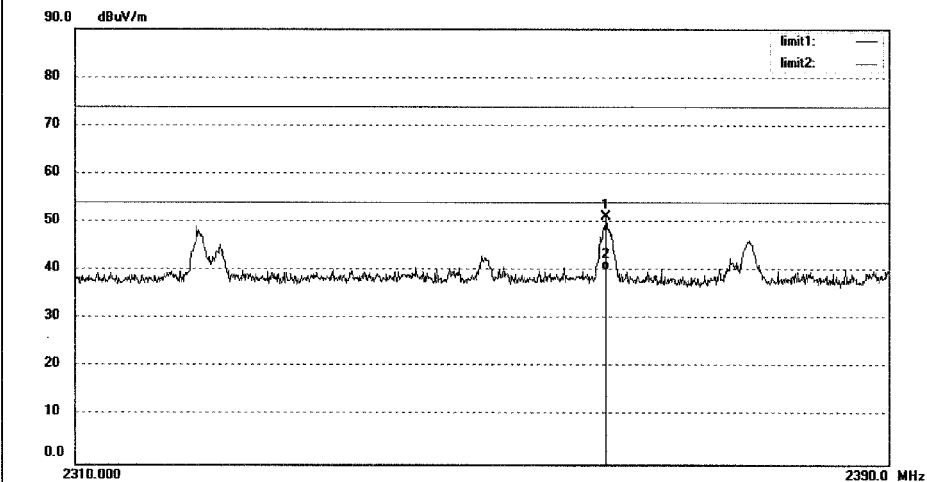

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2362.000	58.98	-7.71	51.27	74.00	-22.73	peak			
2	2362.000	47.82	-7.71	40.11	54.00	-13.89	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 139 von 165
Page 139 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #946
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2402MHz
 Model: UB-15MS10
 Manufacturer: Zowee

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth

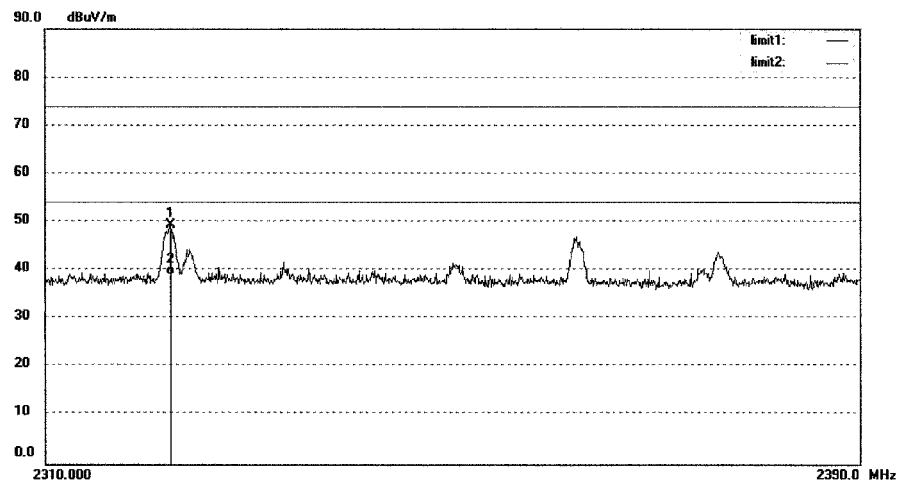


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2322.160	57.23	-7.81	49.42	74.00	-24.58	peak			
2	2322.160	46.87	-7.81	39.06	54.00	-14.94	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 140 von 165
Page 140 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #948	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

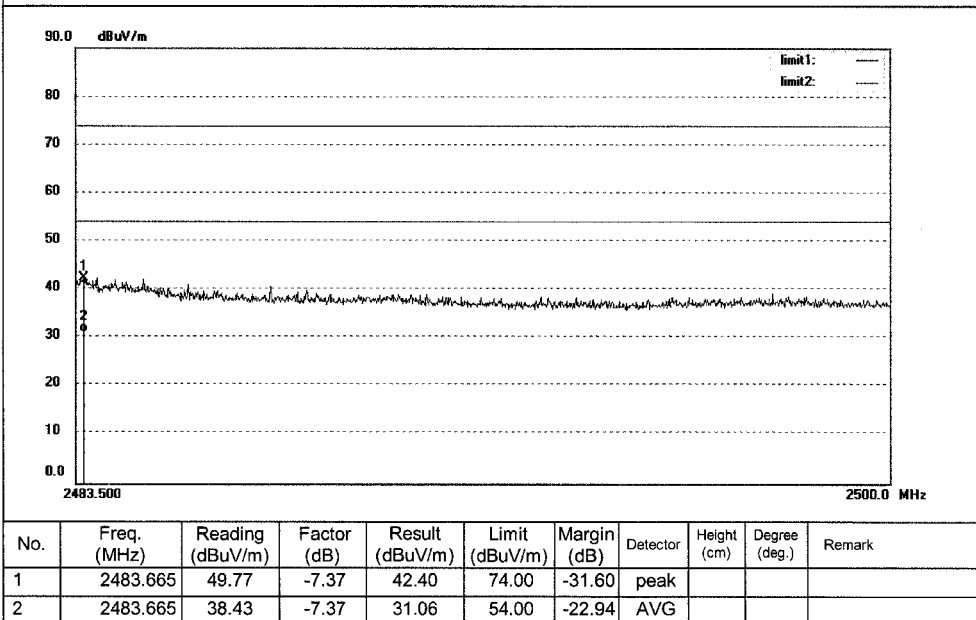


Prüfbericht - Nr.: 17043527 001
 Test Report No.

Seite 141 von 165
 Page 141 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #947	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

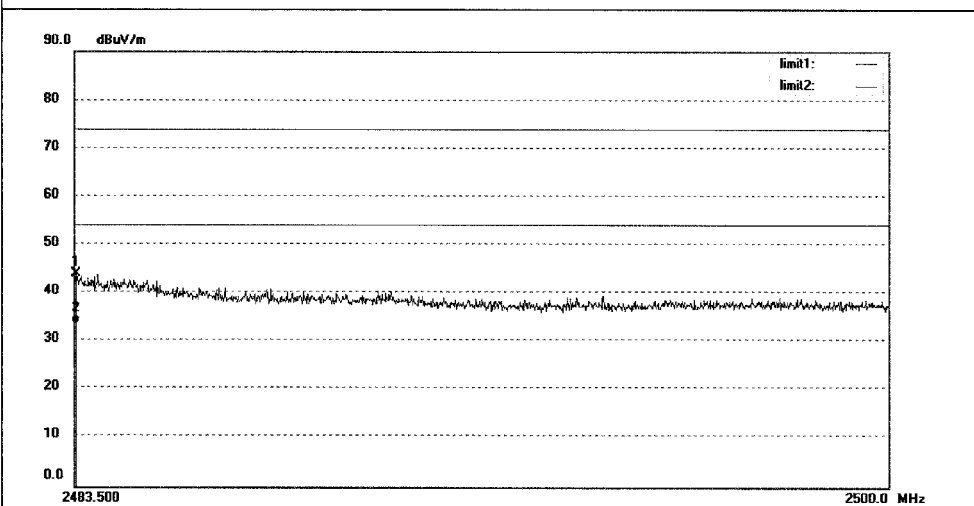

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.533	51.46	-7.37	44.09	74.00	-29.91	peak			
2	2483.533	40.94	-7.37	33.57	54.00	-20.43	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #956

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Note: Bluetooth 4.0

Polarization: Horizontal


Power Source: AC 120V/60Hz

Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

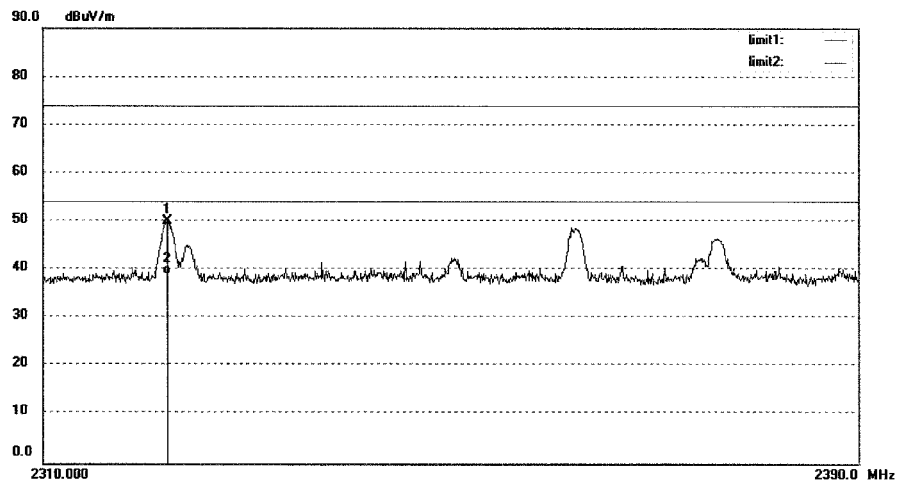

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2321.920	57.91	-7.81	50.10	74.00	-23.90	peak			
2	2321.920	46.85	-7.81	39.04	54.00	-14.96	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #955

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

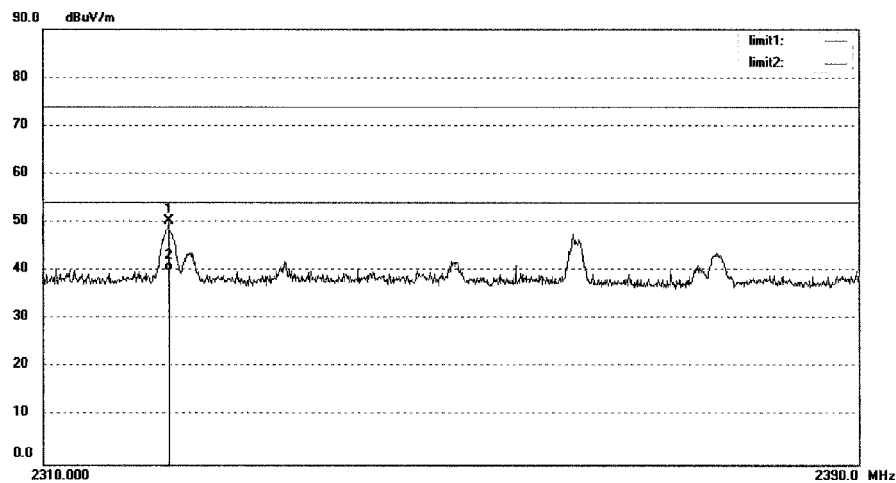

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2322.000	58.14	-7.81	50.33	74.00	-23.67	peak			
2	2322.000	47.79	-7.81	39.98	54.00	-14.02	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 144 von 165
Page 144 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #957
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2480MHz
 Model: UB-15MS10
 Manufacturer: Zowee

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth 4.0

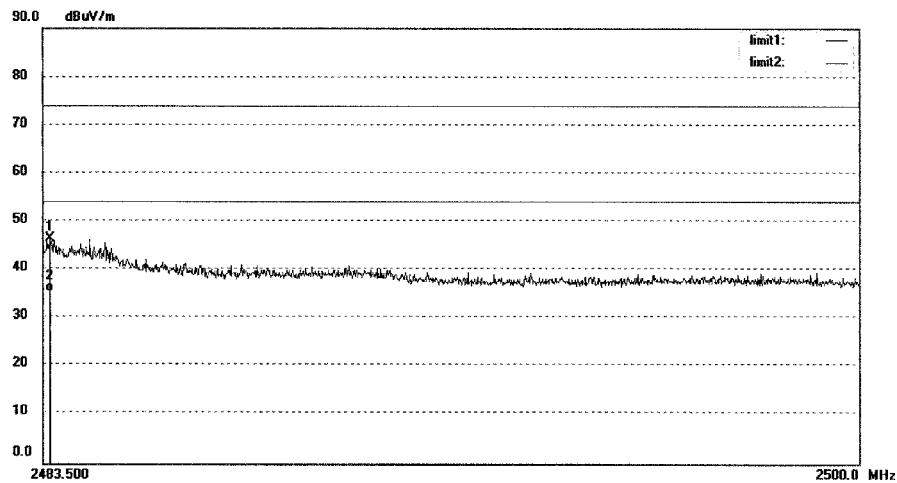

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.648	53.94	-7.37	46.57	74.00	-27.43	peak			
2	2483.648	42.81	-7.37	35.44	54.00	-18.56	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 145 von 165
Page 145 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #958

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

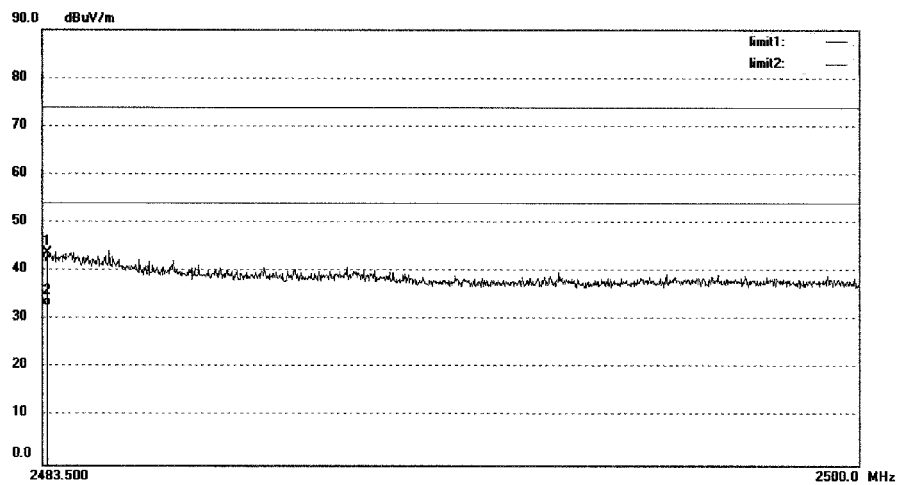

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.599	51.20	-7.37	43.83	74.00	-30.17	peak			
2	2483.599	40.05	-7.37	32.68	54.00	-21.32	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 146 von 165
Page 146 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #873
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2402MHz
 Model: NS-15MS08
 Manufacturer: Zowee

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth

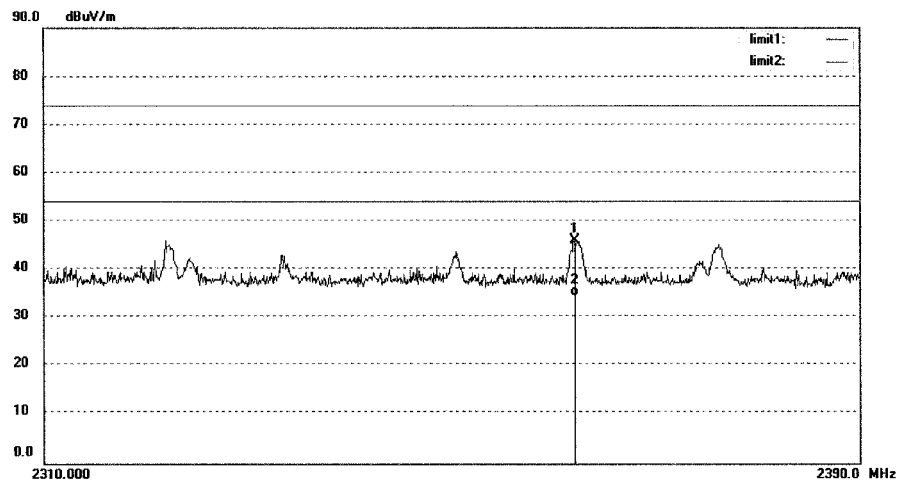

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.840	53.62	-7.71	45.91	74.00	-28.09	peak			
2	2361.840	42.18	-7.71	34.47	54.00	-19.53	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 147 von 165
Page 147 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #871
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2402MHz
 Model: NS-15MS08
 Manufacturer: Zowee

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth

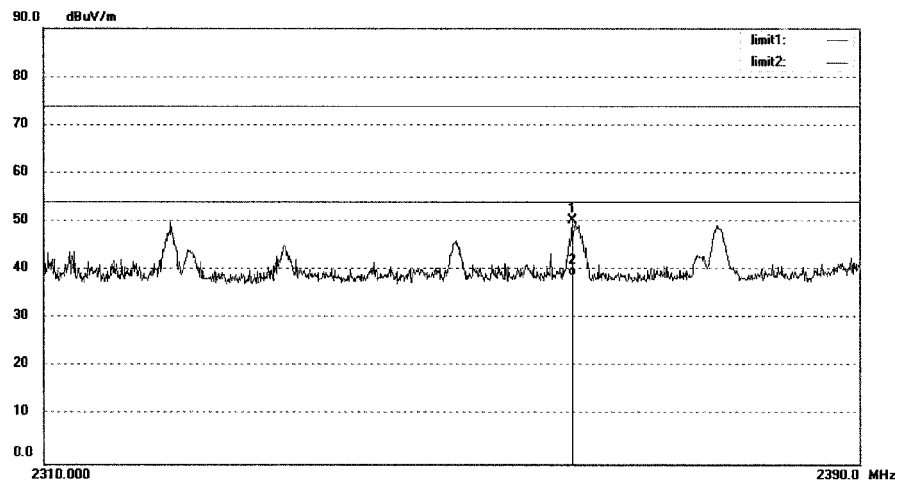

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.600	57.95	-7.71	50.24	74.00	-23.76	peak			
2	2361.600	46.58	-7.71	38.87	54.00	-15.13	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 148 von 165
Page 148 of 165

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #874

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

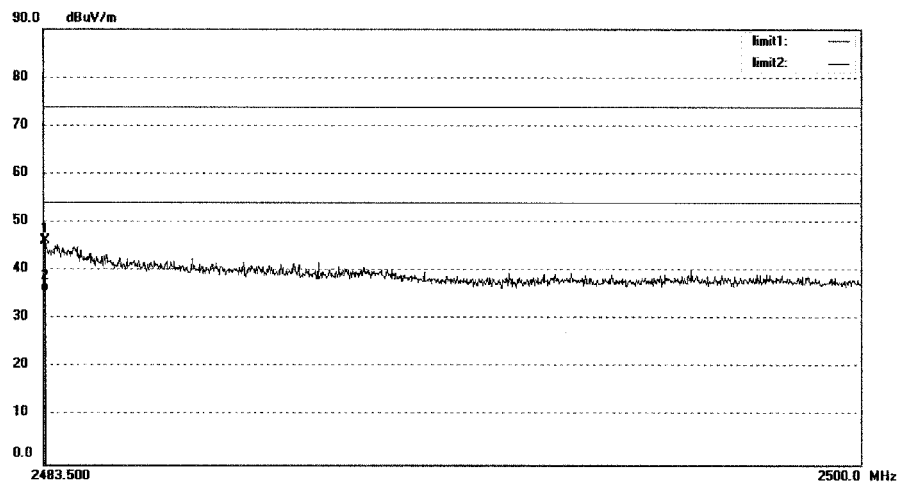


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.533	53.62	-7.37	46.25	74.00	-27.75	peak			
2	2483.533	42.94	-7.37	35.57	54.00	-18.43	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 149 von 165
Page 149 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #875	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth	

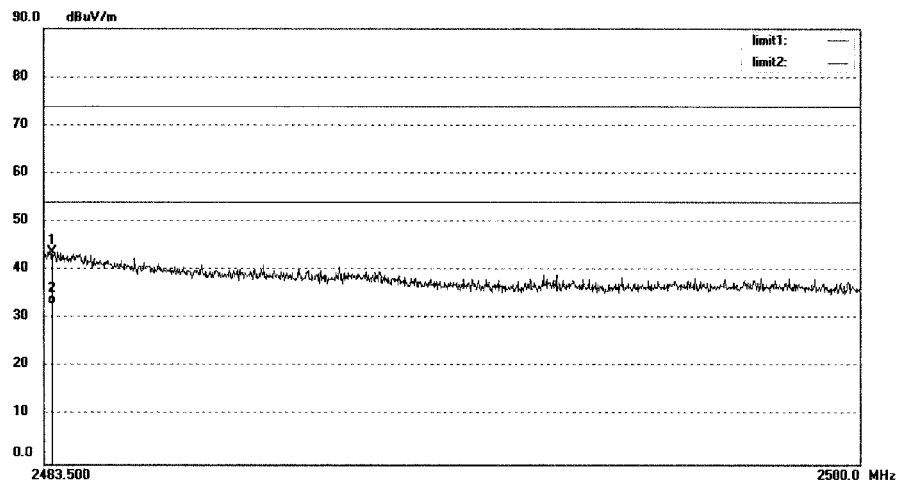

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.665	51.17	-7.37	43.80	74.00	-30.20	peak			
2	2483.665	40.39	-7.37	33.02	54.00	-20.98	AVG			



ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #882
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2402MHz
 Model: NS-15MS08
 Manufacturer: Zowee

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth 4.0

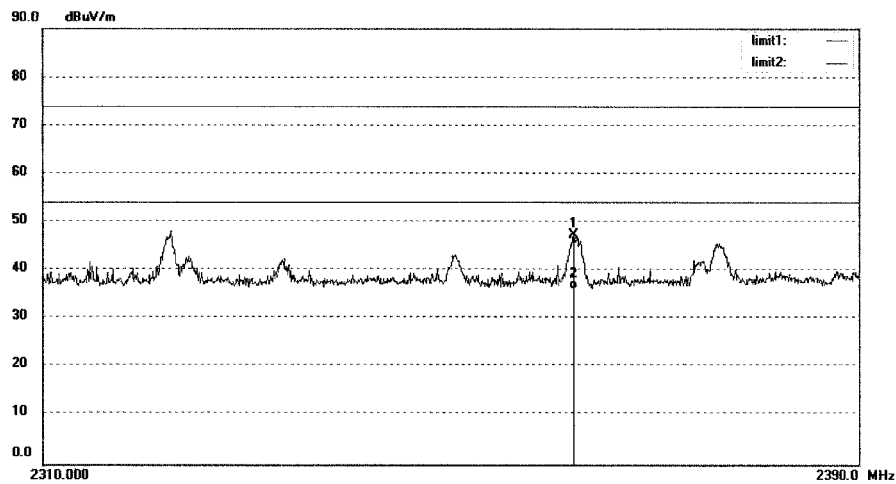

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.840	54.98	-7.71	47.27	74.00	-26.73	peak			
2	2361.840	43.86	-7.71	36.15	54.00	-17.85	AVG			


Prüfbericht - Nr.: 17043527 001
 Test Report No.

Seite 151 von 165
 Page 151 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #883	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

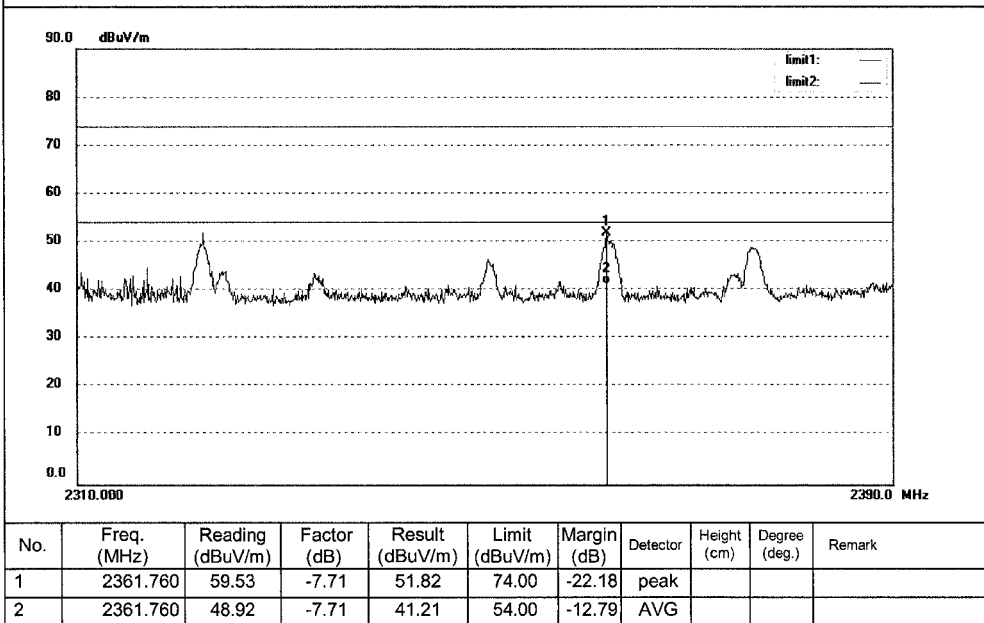

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 152 von 165
Page 152 of 165


ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: LAN2014 #886
 Standard: FCC (Band Edge)
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 48 %
 EUT: Tablet PC
 Mode: TX 2480MHz
 Model: NS-15MS08
 Manufacturer: Zowee

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 14/10/12/
 Time:
 Engineer Signature:
 Distance: 3m

Note: Bluetooth 4.0

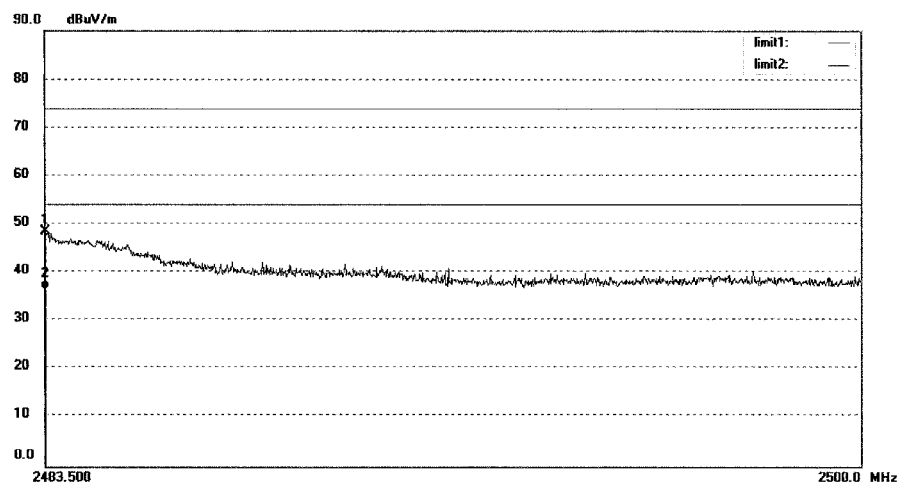


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	55.92	-7.37	48.55	74.00	-25.45	peak			
2	2483.517	44.04	-7.37	36.67	54.00	-17.33	AVG			

Prüfbericht - Nr.: 17043527 001
Test Report No.
Seite 153 von 165
Page 153 of 165

ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2014 #885	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

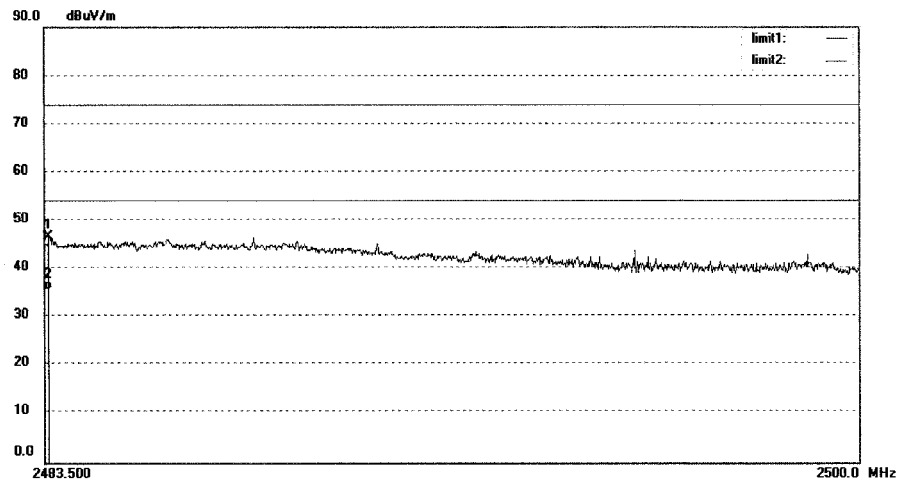

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.582	54.08	-7.37	46.71	74.00	-27.29	peak			
2	2483.582	43.05	-7.37	35.68	54.00	-18.32	AVG			

5.1.8 Frequency Separation

RESULT:

Pass

Date of testing	:	2014-10-10
Test standard	:	FCC part 15.247(a)(1) RSS-210 A8.1(b)
Basic standard	:	ANSI C63.4: 2003
Limit	:	≥ 25kHz or two-thirds of 20dB bandwidth, whichever is greater
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa

Table 14: Test result of Frequency Separation

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Low Channel	2402	1.0029	≥ 25kHz or two-thirds of 20dB bandwidth	Pass
Adjacency Channel	2403			
Mid Channel	2441	1.0029	≥ 25kHz or two-thirds of 20dB bandwidth	Pass
Adjacency Channel	2442			
High Channel	2479	1.0029	≥ 25kHz or two-thirds of 20dB bandwidth	Pass
Adjacency Channel	2480			

Prüfbericht - Nr.: 17043527 001

Test Report No.

Seite 155 von 165

Page 155 of 165

5.1.9 Number of hopping frequency**RESULT:****Pass**

Date of testing : 2014-10-10
Test standard : FCC part 15.247(a)(1)(iii)
RSS-210 A8.1(d)
Basic standard : ANSI C63.4: 2003
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%
Atmospheric pressure : 101kPa

Table 15: Test result of Number of hopping frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
2402 to 2480MHz	79	≥ 15	Pass

5.1.10 Time of Occupancy

RESULT:

Pass

Date of testing	:	2014-10-10
Test standard	:	FCC part 15.247(a)(1)(iii) RSS-210 A8.1(d)
Basic standard	:	ANSI C63.4: 2003
Limits	:	0.4s
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa

Table 16: Test result of Time of Occupancy

Mode	Packet Type	Channel Frequency (MHz)	Packet Duration [ms]	Number of Hops per Channel	Dwell Time (ms)	Limit [ms]
BDR	DH1	2402	0.435	293	127.455	400
		2441	0.428	285	121.980	400
		2480	0.428	291	124.548	400
	DH3	2402	1.703	157	267.371	400
		2441	1.703	155	263.965	400
		2480	1.703	145	246.935	400
	DH5	2402	2.942	103	303.026	400
		2441	2.942	96	282.432	400
		2480	2.942	107	314.794	400
EDR	DH1	2402	0.428	286	122.408	400
		2441	0.435	284	123.540	400
		2480	0.435	285	123.975	400
	DH3	2402	1.688	158	266.704	400
		2441	1.688	151	254.888	400
		2480	1.674	156	261.144	400
	DH5	2402	2.949	102	300.798	400
		2441	2.971	115	341.665	400
		2480	2.964	115	240.860	400

Prüfbericht - Nr.: 17043527 001

Test Report No.

Seite 157 von 165

Page 157 of 165

5.1.11 Conducted emissions**RESULT:****Pass**

Date of testing	:	2014-10-13
Test standard	:	FCC Part 15.207 RSS-210 Clause 2.6
Basic standard	:	ANSI C63.4: 2003
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207 Table 4 of RSS-Gen
Kind of test site	:	Shield room

Test setup

Input Voltage	:	AC 120V, 60Hz
Operation Mode	:	A
Earthing	:	Not Connected
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa


For details refer to following test plot.

ACCURATE TECHNOLOGY CO., LTD
CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: On with Bluetooth
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 10/13/2014 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK6126 2008
 Average

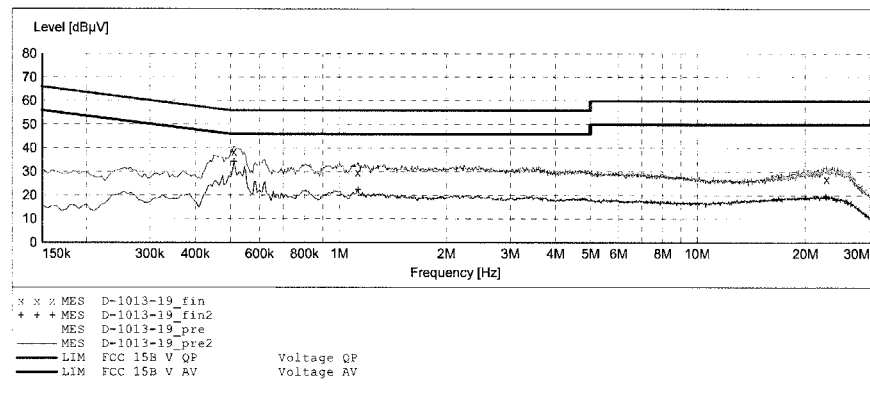
MEASUREMENT RESULT: "D-1013-19_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.510000	38.50	10.7	56	17.5	QP	L1	GND
1.130000	29.70	10.9	56	26.3	QP	L1	GND
22.850000	27.00	11.4	60	33.0	QP	L1	GND

MEASUREMENT RESULT: "D-1013-19_fin2"


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.510000	34.20	10.7	46	11.8	AV	L1	GND
1.130000	22.40	10.9	46	23.6	AV	L1	GND
22.750000	19.40	11.4	50	30.6	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD
CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Tablet PC M/N:UB-15MS10
 Manufacturer: Zowee
 Operating Condition: On with Bluetooth
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: N 120V/60Hz
 Comment: Mains Port
 Start of Test: 10/13/2014 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

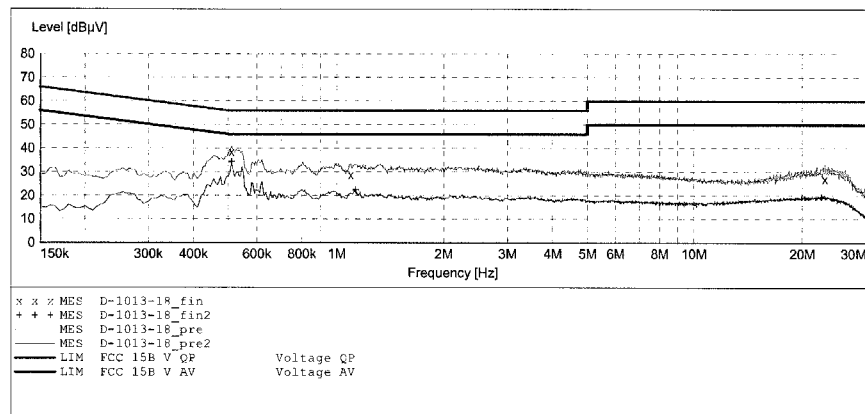
MEASUREMENT RESULT: "D-1013-18_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.510000	38.50	10.7	56	17.5	QP	N	GND
1.095000	28.70	10.9	56	27.3	QP	N	GND
23.075000	27.10	11.4	60	32.9	QP	N	GND

MEASUREMENT RESULT: "D-1013-18_fin2"


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.510000	34.20	10.7	46	11.8	AV	N	GND
1.130000	22.40	10.9	46	23.6	AV	N	GND
22.550000	19.30	11.4	50	30.7	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD
CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: On with Bluetooth
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 10/13/2014 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

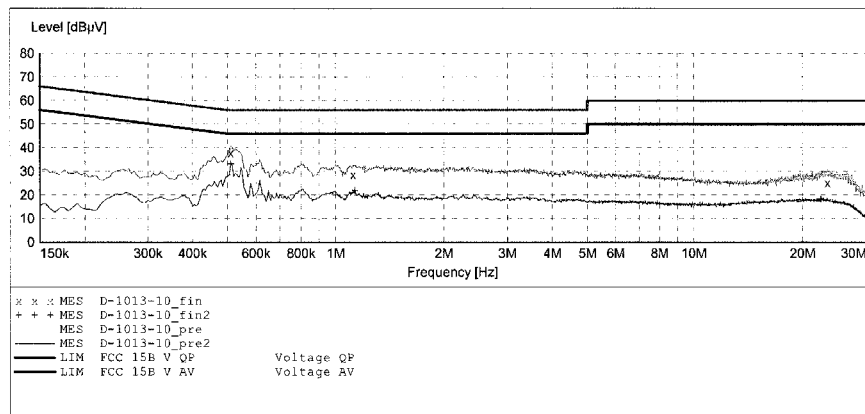
MEASUREMENT RESULT: "D-1013-10_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.510000	37.80	10.7	56	18.2	QP	L1	GND
1.120000	28.50	10.9	56	27.5	QP	L1	GND
23.400000	25.10	11.5	60	34.9	QP	L1	GND

MEASUREMENT RESULT: "D-1013-10_fin2"


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.510000	33.10	10.7	46	12.9	AV	L1	GND
1.130000	21.80	10.9	46	24.2	AV	L1	GND
22.425000	18.20	11.4	50	31.8	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD
CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Tablet PC M/N: NS-15MS08
 Manufacturer: Zowee
 Operating Condition: On with Bluetooth
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: N 120V/60Hz
 Comment: Mains Port
 Start of Test: 10/13/2014 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

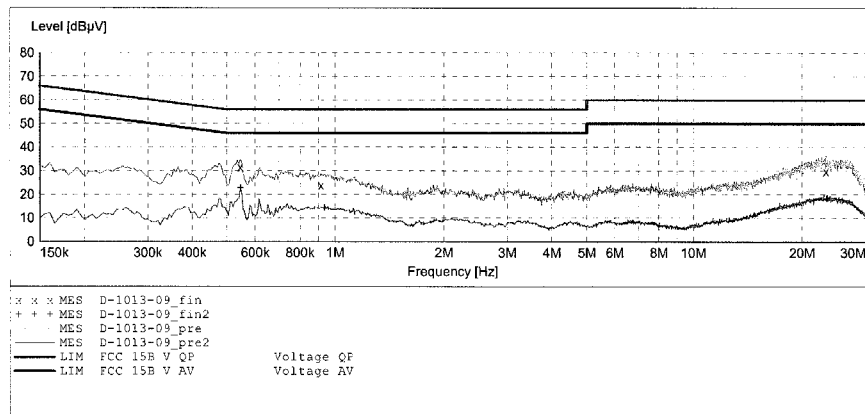
MEASUREMENT RESULT: "D-1013-09_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.545000	31.60	10.7	56	24.4	QP	N	GND
0.915000	23.80	10.8	56	32.2	QP	N	GND
23.275000	29.80	11.5	60	30.2	QP	N	GND

MEASUREMENT RESULT: "D-1013-09_fin2"


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.545000	22.70	10.7	46	23.3	AV	N	GND
0.935000	14.30	10.8	46	31.7	AV	N	GND
23.375000	18.30	11.5	50	31.7	AV	N	GND

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Conducted Emissions




Photograph 2: Set-up for Spurious Emissions for below 30MHz

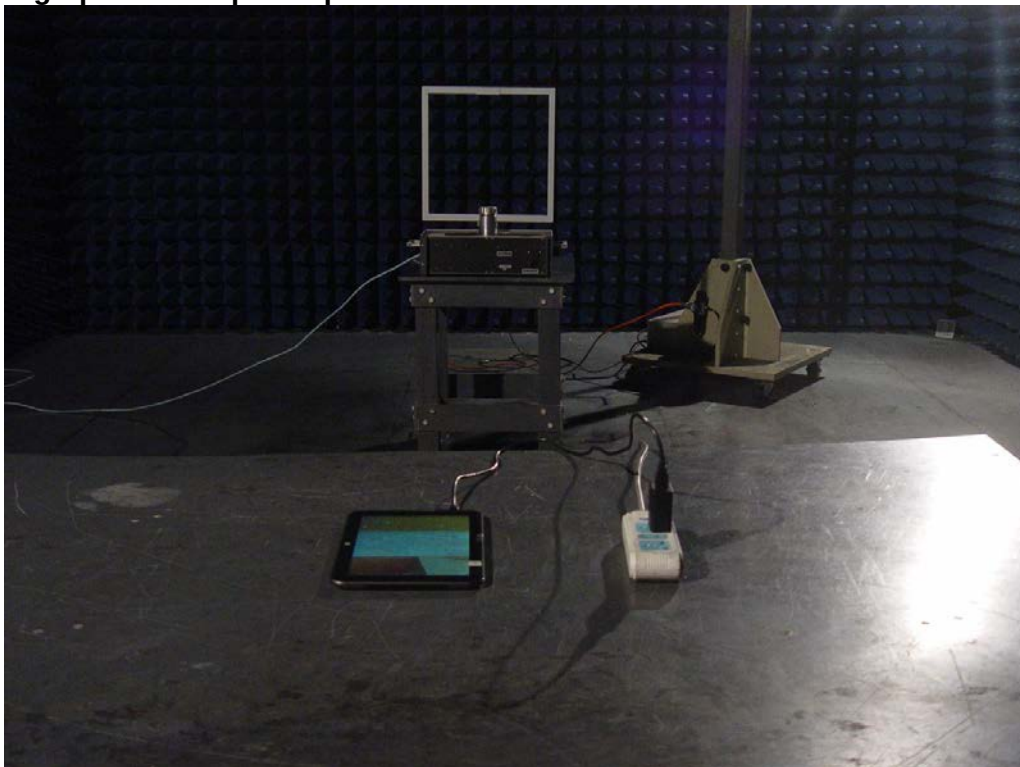


Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz

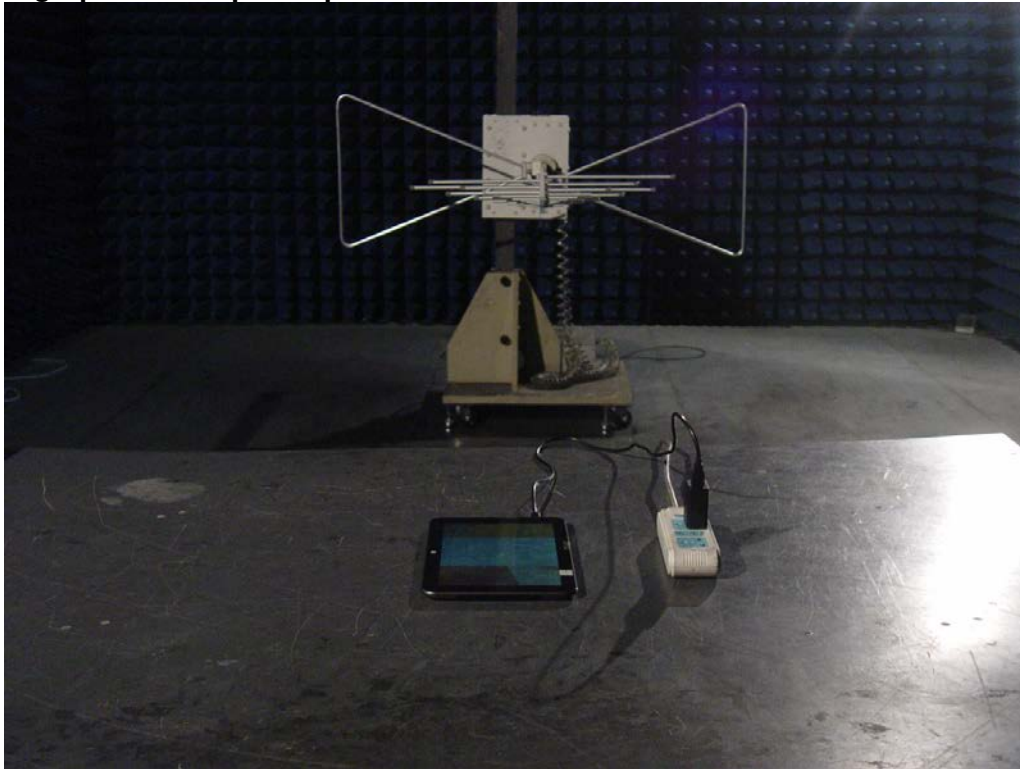

Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz

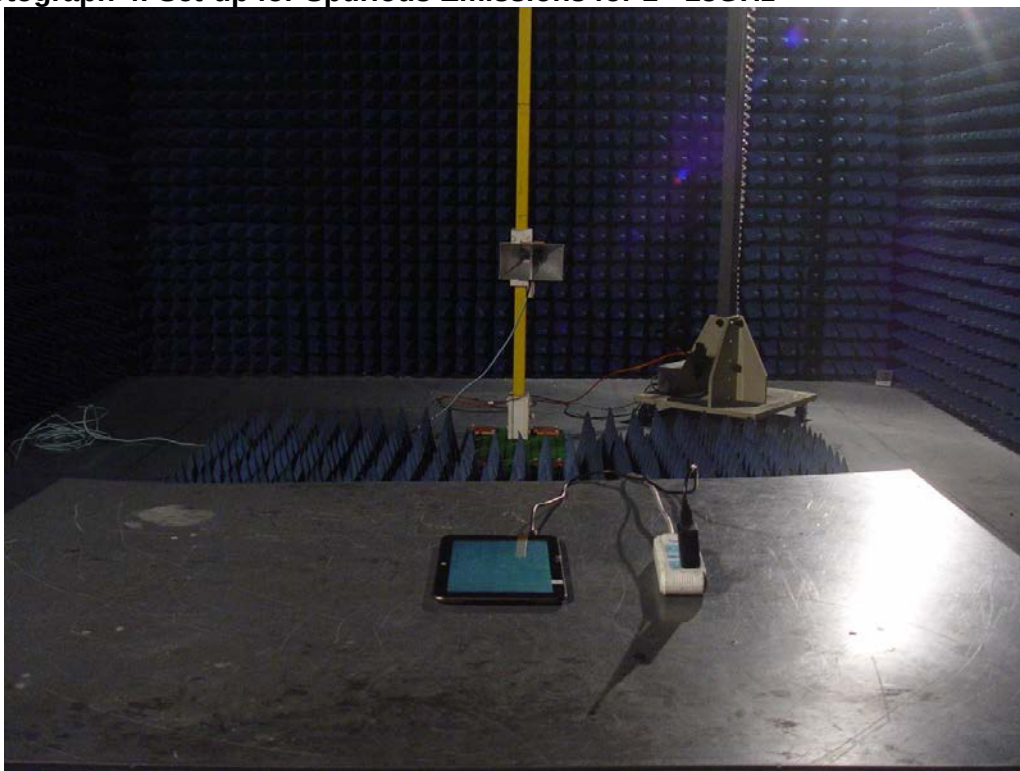

Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz

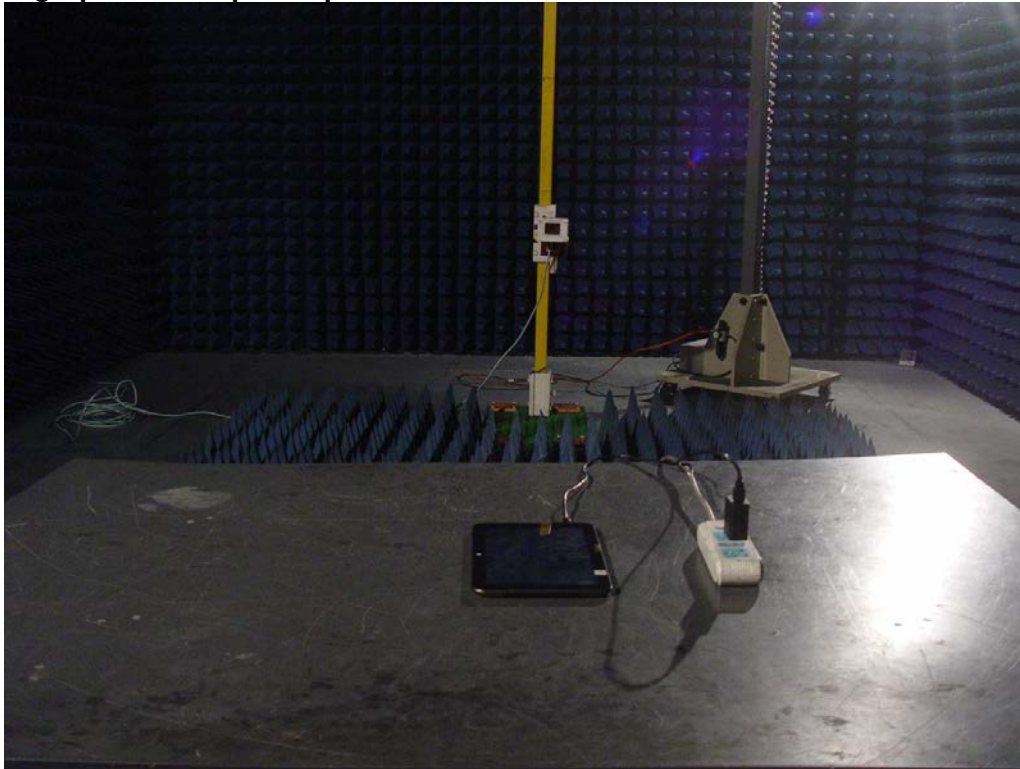

7. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of Bluetooth (BDR & EDR mode)	7
Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode).....	7
Table 5: Technical Specification of Bluetooth (LE mode)	8
Table 6: RF channel and frequency of Bluetooth (LE mode).....	8
Table 7: Test result of Peak Output Power of Bluetooth (BDR mode).....	15
Table 8: Test result of Peak Output Power of Bluetooth (EDR mode).....	15
Table 9: Test result of Peak Output Power of Bluetooth (LE mode).....	15
Table 10: Test result of 20dB & 99% Bandwidth of BDR mode	16
Table 11: Test result of 20dB & 99% Bandwidth of EDR mode	16
Table 12: Test result of 6dB & 99% Bandwidth of Bluetooth, LE mode	17
Table 13: Test result of power spectral density:.....	28
Table 14: Test result of Frequency Separation	154
Table 15: Test result of Number of hopping frequency	155
Table 16: Test result of Time of Occupancy.....	156

8. List of Photographs

Photograph 1: Set-up for Conducted Emissions	162
Photograph 2: Set-up for Spurious Emissions for below 30MHz	162
Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz	163
Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz.....	163
Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz.....	164