



## FCC PART 15.249 TEST REPORT

For

**Shenzhen Kingsun Enterprises Co., Ltd.**

25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong

**FCC ID: 2AAPK-TE21R**

|                                        |                                                                                                                                                                                                                                                                                                         |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Type:</b><br>2.4G Wireless Mouse USB receiver                                                                                                                                                                                                                                                |
| <b>Report Number:</b> RSZ200923831-00  |                                                                                                                                                                                                                                                                                                         |
| <b>Report Date:</b> 2020-11-04         |                                                                                                                                                                                                                                                                                                         |
| Jimmy Xiao <i>Jimmy Xiao</i>           |                                                                                                                                                                                                                                                                                                         |
| <b>Reviewed By:</b>                    | RF Engineer                                                                                                                                                                                                                                                                                             |
| <b>Prepared By:</b>                    | Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial<br>Building, Shihua Road, Futian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                       | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....              | 3         |
| OBJECTIVE .....                                                       | 3         |
| TEST METHODOLOGY .....                                                | 3         |
| MEASUREMENT UNCERTAINTY .....                                         | 4         |
| TEST FACILITY .....                                                   | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                 | <b>5</b>  |
| JUSTIFICATION .....                                                   | 5         |
| EUT EXERCISE SOFTWARE .....                                           | 5         |
| EQUIPMENT MODIFICATIONS .....                                         | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                              | 5         |
| SUPPORT CABLE DESCRIPTIONS.....                                       | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                     | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                  | <b>7</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                      | <b>8</b>  |
| <b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>                          | <b>9</b>  |
| APPLICABLE STANDARD .....                                             | 9         |
| ANTENNA CONNECTOR CONSTRUCTION .....                                  | 9         |
| <b>FCC §15.207 – AC LINE CONDUCTED EMISSIONS.....</b>                 | <b>10</b> |
| APPLICABLE STANDARD .....                                             | 10        |
| EUT SETUP .....                                                       | 10        |
| EMI TEST RECEIVER SETUP.....                                          | 10        |
| TEST PROCEDURE .....                                                  | 10        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                           | 11        |
| TEST RESULTS SUMMARY .....                                            | 11        |
| TEST DATA .....                                                       | 11        |
| <b>FCC§15.205, §15.209 &amp; §15.249(D) - RADIATED EMISSIONS.....</b> | <b>14</b> |
| APPLICABLE STANDARD .....                                             | 14        |
| TEST EQUIPMENT SETUP .....                                            | 14        |
| EUT SETUP .....                                                       | 15        |
| TEST PROCEDURE .....                                                  | 16        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                        | 16        |
| TEST RESULTS SUMMARY .....                                            | 16        |
| TEST DATA .....                                                       | 16        |
| <b>FCC§15.215(C) - 20DB EMISSION BANDWIDTH .....</b>                  | <b>24</b> |
| APPLICABLE STANDARD .....                                             | 24        |
| TEST PROCEDURE .....                                                  | 24        |
| TEST DATA .....                                                       | 24        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                        |                                                |
|------------------------|------------------------------------------------|
| Product                | 2.4G Wireless Mouse USB receiver               |
| Tested Model           | TE21-WM-TA                                     |
| Multiple Model         | CP-135A, WM-TE21-BL, WM-TE21-VB, WM-TE21-TR    |
| Model Differences      | Refer to the DoS letter                        |
| Frequency Range        | 2407~2477MHz                                   |
| Maximum Field Strength | 75.85dBuV/m@3m                                 |
| Antenna Specification* | 0 dBi (provided by the applicant)              |
| Voltage Range          | DC 5.0V from USB Port                          |
| Date of Test           | 2020-10-28 to 2020-11-04                       |
| Sample serial number   | RSZ200923831-RF-S1(Assigned by BACL, Shenzhen) |
| Received date          | 2020-09-23                                     |
| Sample/EUT Status      | Good condition                                 |

### Objective

This type approval report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Parameter                          |            | Uncertainty |
|------------------------------------|------------|-------------|
| Occupied Channel Bandwidth         |            | ±5%         |
| RF Output Power with Power meter   |            | ±0.73dB     |
| RF conducted test with spectrum    |            | ±1.6dB      |
| AC Power Lines Conducted Emissions |            | ±1.95dB     |
| Emissions,<br>Radiated             | Below 1GHz | ±4.75dB     |
|                                    | Above 1GHz | ±4.88dB     |
| Temperature                        |            | ±1℃         |
| Humidity                           |            | ±6%         |
| Supply voltages                    |            | ±0.4%       |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing by manufacturer.

#### Frequency List

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2408            | 9       | 2468            |
| 2       | 2440            | 10      | 2407            |
| 3       | 2467            | 11      | 2442            |
| 4       | 2414            | 12      | 2449            |
| 5       | 2437            | 13      | 2421            |
| 6       | 2477            | 14      | 2435            |
| 7       | 2410            | 15      | 2455            |
| 8       | 2428            | 16      | 2441            |

Channel 10, Channel 2 and Channel 6 were selected for testing.

### EUT Exercise Software

No software was used.

### Equipment Modifications

No modifications were made to the unit tested.


### Support Equipment List and Details

| Manufacturer | Description         | Model          | Serial Number |
|--------------|---------------------|----------------|---------------|
| TOSHIBA      | Laptop              | Satellite C600 | 3B255547Q     |
| DELL         | Laptop              | Latitude E5430 | 11429208685   |
| Kingsun      | 2.4G Wireless Mouse | TE21-WM-TA     | M21567864     |

### Support Cable Descriptions

| Cable Description                   | Length (m) | From/Port | To     |
|-------------------------------------|------------|-----------|--------|
| Un-shielding Un-Detachable AC Cable | 1.0        | Socket    | LISN   |
| Un-shielding Un-Detachable DC Cable | 1.2        | Adapter   | Laptop |

## Block Diagram of Test Setup

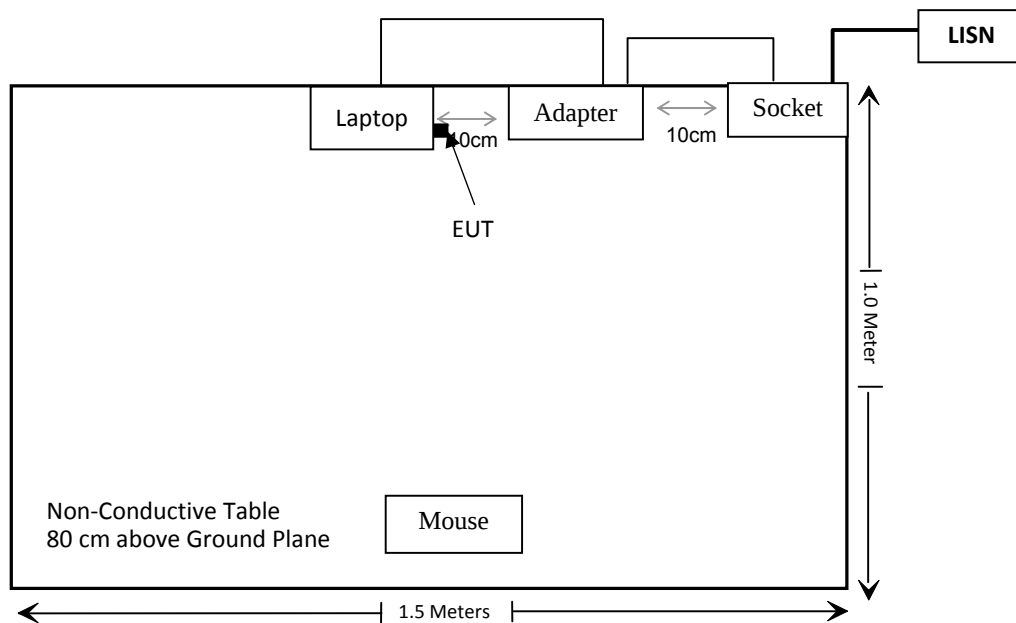

**SUMMARY OF TEST RESULTS**

| FCC Rules                   | Description of Test                          | Result     |
|-----------------------------|----------------------------------------------|------------|
| §15.203                     | Antenna Requirement                          | Compliance |
| §15.207(a)                  | Conduction Emissions                         | Compliance |
| 15.205, §15.209, §15.249(d) | Radiated Emissions& Outside of Band Emission | Compliance |
| §15.215 (c)                 | 20 dB Bandwidth                              | Compliance |

**TEST EQUIPMENT LIST**

| Manufacturer          | Description        | Model                   | Serial Number          | Calibration Date | Calibration Due Date |
|-----------------------|--------------------|-------------------------|------------------------|------------------|----------------------|
| Rohde & Schwarz       | EMI Test Receiver  | ESCI                    | 101120                 | 2020/08/04       | 2021/08/03           |
| Rohde & Schwarz       | LISN               | ENV216                  | 101613                 | 2020/08/04       | 2021/08/03           |
| Rohde & Schwarz       | Transient Limitor  | ESH3Z2                  | DE25985                | 2019/11/29       | 2020/11/28           |
| Unknown               | CE Cable           | CE Cable                | UF A210B-1-0720-504504 | 2019/11/29       | 2020/11/28           |
| Rohde & Schwarz       | CE Test software   | EMC 32                  | V8.53.0                | NCR              | NCR                  |
| R&S                   | EMI Test Receiver  | ESR3                    | 102455                 | 2020/08/04       | 2021/08/03           |
| Sonoma instrument     | Pre-amplifier      | 310 N                   | 186238                 | 2020/08/04       | 2021/08/03           |
| Sunol Sciences        | Broadband Antenna  | JB1                     | A040904-1              | 2017/12/22       | 2020/12/21           |
| Unknown               | Cable 2            | RF Cable 2              | F-03-EM197             | 2019/11/29       | 2020/11/28           |
| Unknown               | Cable              | Chamber Cable 1         | F-03-EM236             | 2019/11/29       | 2020/11/28           |
| Rohde & Schwarz       | Auto test software | EMC 32                  | V9.10                  | NCR              | NCR                  |
| Rohde & Schwarz       | Spectrum Analyzer  | FSV40-N                 | 102259                 | 2020/08/04       | 2021/08/03           |
| COM-POWER             | Pre-amplifier      | PA-122                  | 181919                 | 2019/11/29       | 2020/11/28           |
| Quinstar              | Amplifier          | QLW-18405536-J0         | 15964001002            | 2019/11/29       | 2020/11/28           |
| Sunol Sciences        | Horn Antenna       | DRH-118                 | A052604                | 2017/12/22       | 2020/12/21           |
| Insulted Wire Inc.    | RF Cable           | SPS-2503-3150           | 02222010               | 2019/11/29       | 2020/11/28           |
| Unknown               | RF Cable           | W1101-EQ1 OUT           | F-19-EM005             | 2019/11/29       | 2020/11/28           |
| SNSD                  | Band Reject filter | BSF2402-2480MN-0898-001 | 2.4G filter            | 2020/04/20       | 2021/04/20           |
| Ducommun Technologies | Horn antenna       | ARH-4223-02             | 1007726-02 1304        | 2017/12/06       | 2020/12/05           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

**FCC§15.203 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one internal antenna which was permanently attached and the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

According to FCC §15.207

### EUT Setup

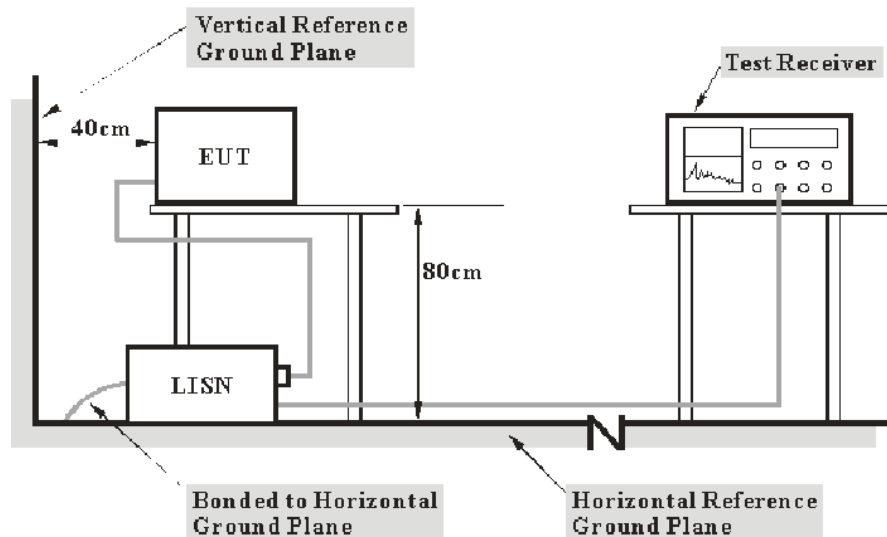

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the EUT complied with the FCC Part 15.207,

#### Test Data


##### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 65 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Haiguo Li on 2020-11-04*

*EUT operation mode: Transmitting*

## AC 120V/60 Hz, Line

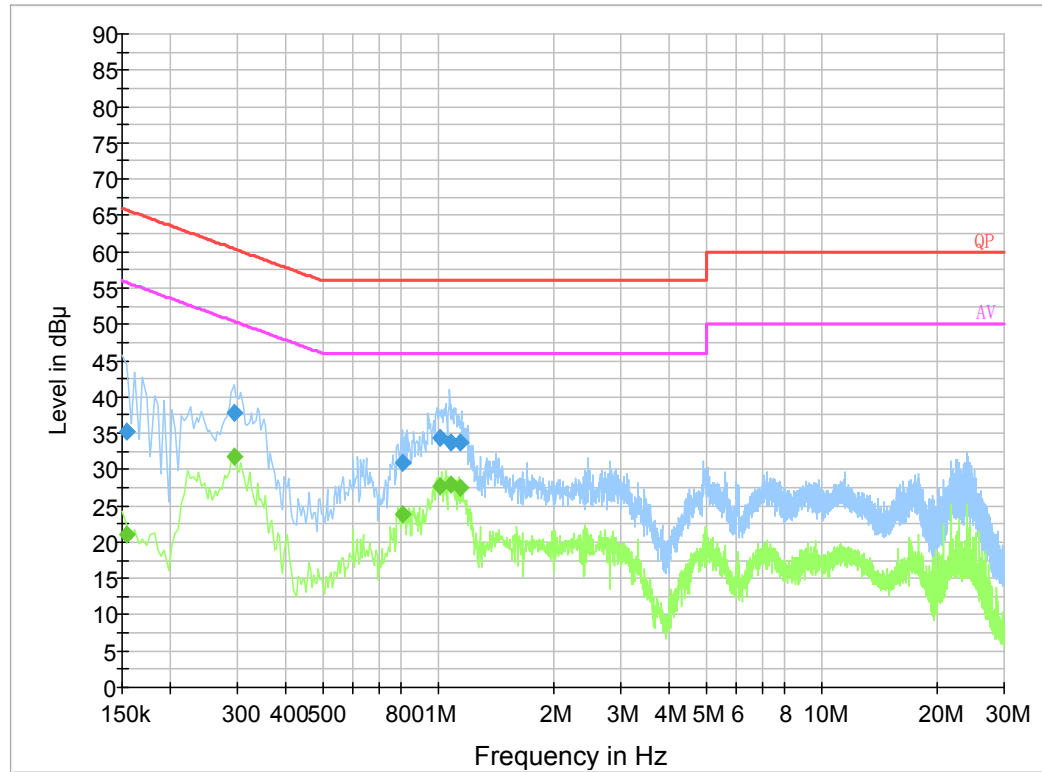


## Final Result 1

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) |
|-----------------|------------------------|-----------------|------|------------|-------------|--------------------|
| 0.154500        | 35.3                   | 9.000           | L1   | 19.8       | 30.5        | 65.8               |
| 0.293500        | 37.7                   | 9.000           | L1   | 19.7       | 22.7        | 60.4               |
| 0.809910        | 31.0                   | 9.000           | L1   | 19.8       | 25.0        | 56.0               |
| 1.008910        | 34.3                   | 9.000           | L1   | 19.9       | 21.7        | 56.0               |
| 1.085890        | 33.8                   | 9.000           | L1   | 19.9       | 22.2        | 56.0               |
| 1.148690        | 33.7                   | 9.000           | L1   | 19.8       | 22.3        | 56.0               |

## Final Result 2

| Frequency (MHz) | Average (dB $\mu$ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V) |
|-----------------|----------------------|-----------------|------|------------|-------------|--------------------|
| 0.154500        | 21.0                 | 9.000           | L1   | 19.8       | 34.8        | 55.8               |
| 0.293500        | 31.9                 | 9.000           | L1   | 19.7       | 18.5        | 50.4               |
| 0.809910        | 23.9                 | 9.000           | L1   | 19.8       | 22.1        | 46.0               |
| 1.008910        | 27.7                 | 9.000           | L1   | 19.9       | 18.3        | 46.0               |
| 1.085890        | 27.9                 | 9.000           | L1   | 19.9       | 18.1        | 46.0               |
| 1.148690        | 27.4                 | 9.000           | L1   | 19.8       | 18.6        | 46.0               |

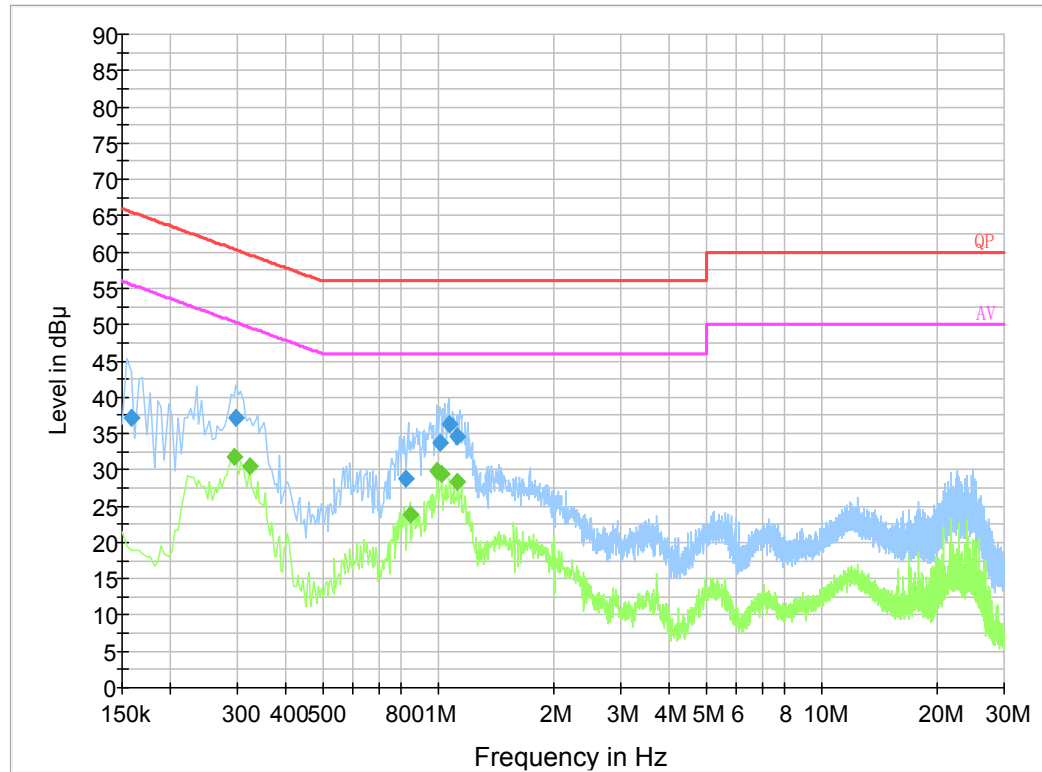**AC 120V/60 Hz, Neutral****Final Result 1**

| Frequency (MHz) | QuasiPeak (dB μ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|--------------------|-----------------|------|------------|-------------|----------------|
| 0.158500        | 37.1               | 9.000           | N    | 19.8       | 28.4        | 65.5           |
| 0.297500        | 37.1               | 9.000           | N    | 19.7       | 23.2        | 60.3           |
| 0.825430        | 28.8               | 9.000           | N    | 19.8       | 27.2        | 56.0           |
| 1.012970        | 33.6               | 9.000           | N    | 19.8       | 22.4        | 56.0           |
| 1.073950        | 36.3               | 9.000           | N    | 19.8       | 19.7        | 56.0           |
| 1.124870        | 34.6               | 9.000           | N    | 19.8       | 21.4        | 56.0           |

**Final Result 2**

| Frequency (MHz) | Average (dB μ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|------------------|-----------------|------|------------|-------------|----------------|
| 0.294000        | 31.7             | 9.000           | N    | 19.7       | 18.7        | 50.4           |
| 0.322000        | 30.5             | 9.000           | N    | 19.8       | 19.2        | 49.7           |
| 0.846000        | 23.8             | 9.000           | N    | 19.8       | 22.2        | 46.0           |
| 0.998000        | 29.8             | 9.000           | N    | 19.8       | 16.2        | 46.0           |
| 1.022000        | 29.4             | 9.000           | N    | 19.8       | 16.6        | 46.0           |
| 1.126000        | 28.3             | 9.000           | N    | 19.8       | 17.7        | 46.0           |

**FCC§15.205, §15.209 & §15.249(d) - RADIATED EMISSIONS****Applicable Standard**

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902–928 MHz           | 50                                               | 500                                            |
| 2400–2483.5 MHz       | 50                                               | 500                                            |
| 5725–5875 MHz         | 50                                               | 500                                            |
| 24.0–24.25 GHz        | 250                                              | 2500                                           |

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

**Test Equipment Setup**

The spectrum analyzer or receiver is set as:

Below 1000MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto


Above 1000MHz:

Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto


Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

## EUT Setup

### Below 1GHz:

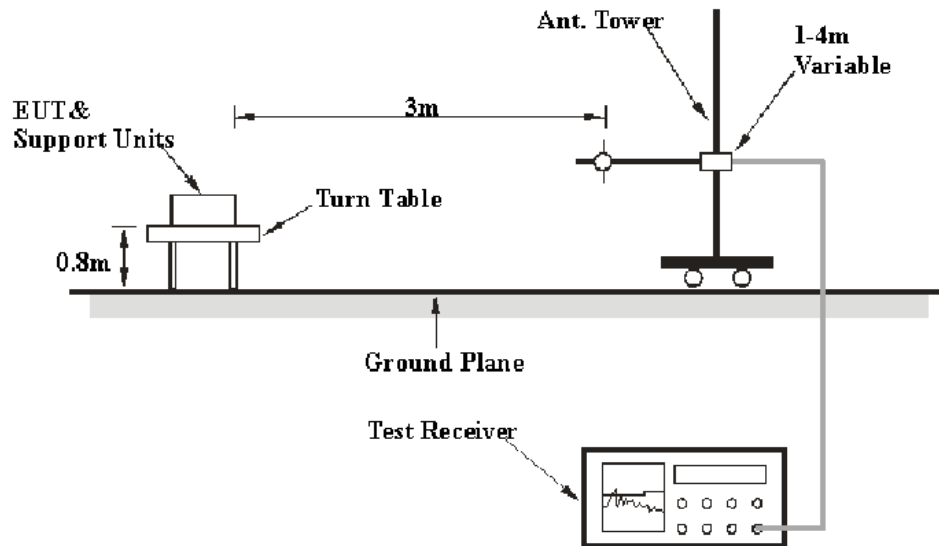

### Above 1GHz:

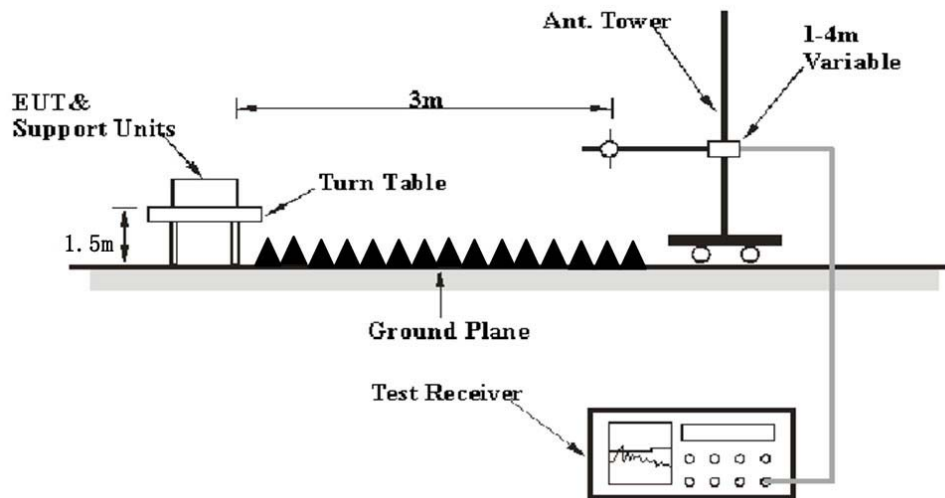

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the EUT complied with the FCC Part 15.205, 15.209 & §15.249


## Test Data

### Environmental Conditions

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 26~28.4 °C |
| <b>Relative Humidity:</b> | 45~62 %    |
| <b>ATM Pressure:</b>      | 101.0 kPa  |

*The testing was performed by Harris He on 2020-11-04 for below 1GHz and Alan on 2020-10-28 for above 1GHz.*

*EUT operation mode: Transmitting*

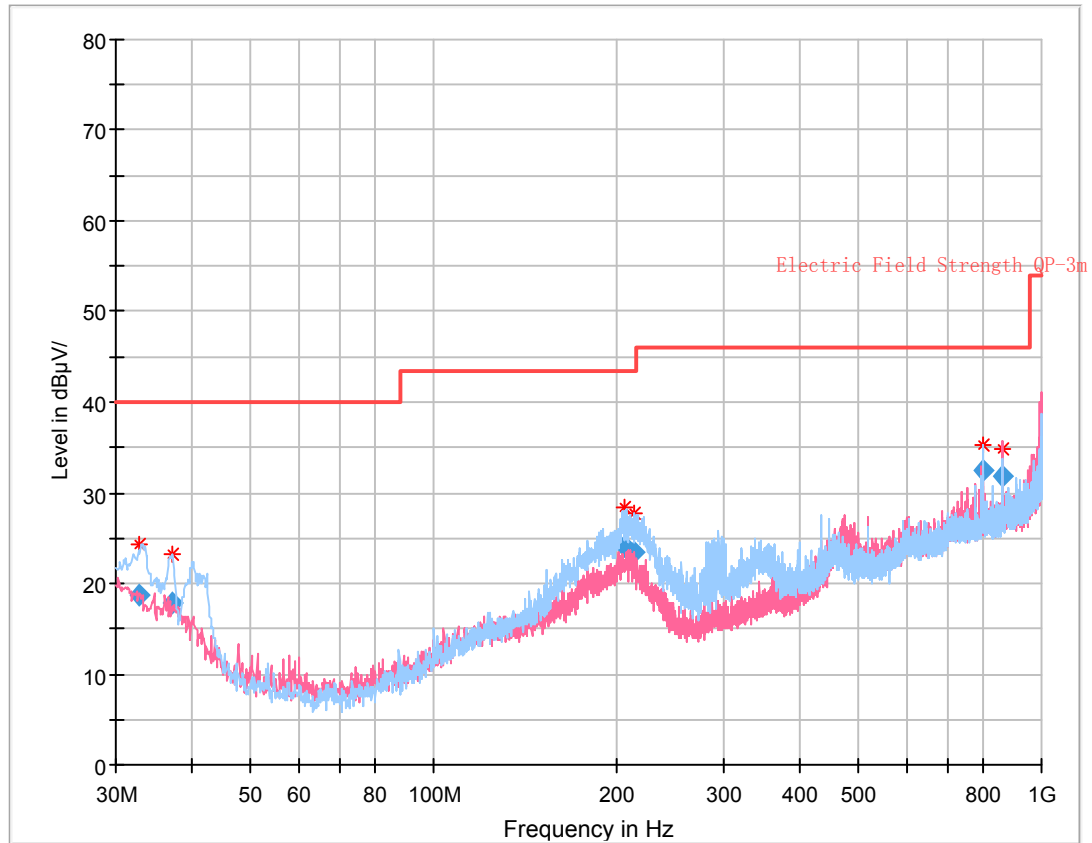**30MHz – 1 GHz: (High channel was worst case)****Final Result**

| Frequency (MHz) | QuasiPeak (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|----------------------|------------------|-------------|-------------|-----|---------------|------------|
| 32.768875       | 18.71                | 40.00            | 21.29       | 126.0       | H   | 176.0         | -6.1       |
| 37.033500       | 17.86                | 40.00            | 22.14       | 110.0       | H   | 291.0         | -8.7       |
| 205.349500      | 24.04                | 43.50            | 19.46       | 153.0       | H   | 94.0          | -10.7      |
| 213.826375      | 23.42                | 43.50            | 20.08       | 138.0       | H   | 86.0          | -10.7      |
| 799.426875      | 32.51                | 46.00            | 13.49       | 133.0       | H   | 124.0         | -0.2       |
| 862.477000      | 31.86                | 46.00            | 14.14       | 327.0       | V   | 90.0          | 0.8        |

**1 GHz - 25 GHz:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.249&15.209 |                |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|---------------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    | Limit<br>(dBμV/m)         | Margin<br>(dB) |
| Low Channel (2407MHz)    |                   |            |                     |               |                |                               |                                    |                           |                |
| 2407.00                  | 42.91             | PK         | 235                 | 1.8           | H              | 31.87                         | 74.78                              | 114                       | 39.22          |
| 2407.00                  | 16.92             | Ave.       | 235                 | 1.8           | H              | 31.87                         | 48.79                              | 94                        | 45.21          |
| 2407.00                  | 35.99             | PK         | 23                  | 2.0           | V              | 31.87                         | 67.86                              | 114                       | 46.14          |
| 2407.00                  | 15.97             | Ave.       | 23                  | 2.0           | V              | 31.87                         | 47.84                              | 94                        | 46.16          |
| 2388.44                  | 29.06             | PK         | 26                  | 1.5           | H              | 36.23                         | 65.29                              | 74                        | 8.71           |
| 2388.44                  | 14.33             | Ave.       | 26                  | 1.5           | H              | 36.23                         | 50.56                              | 54                        | 3.44           |
| 2483.58                  | 28.26             | PK         | 11                  | 2.4           | H              | 36.70                         | 64.96                              | 74                        | 9.04           |
| 2483.58                  | 14.27             | Ave.       | 11                  | 2.4           | H              | 36.70                         | 50.97                              | 54                        | 3.03           |
| 4814.00                  | 43.43             | PK         | 309                 | 1.5           | H              | 5.40                          | 48.83                              | 74                        | 25.17          |
| 4814.00                  | 29.24             | Ave.       | 309                 | 1.5           | H              | 5.40                          | 34.64                              | 54                        | 19.36          |
| Middle Channel (2440MHz) |                   |            |                     |               |                |                               |                                    |                           |                |
| 2440.00                  | 43.72             | PK         | 202                 | 1.4           | H              | 31.97                         | 75.69                              | 114                       | 38.31          |
| 2440.00                  | 17.17             | Ave.       | 202                 | 1.4           | H              | 31.97                         | 49.14                              | 94                        | 44.86          |
| 2440.00                  | 39.58             | PK         | 228                 | 1.5           | V              | 31.97                         | 71.55                              | 114                       | 42.45          |
| 2440.00                  | 16.59             | Ave.       | 228                 | 1.5           | V              | 31.97                         | 48.56                              | 94                        | 45.44          |
| 4880.00                  | 43.55             | PK         | 64                  | 1.5           | H              | 6.43                          | 49.98                              | 74                        | 24.02          |
| 4880.00                  | 29.13             | Ave.       | 64                  | 1.5           | H              | 6.43                          | 35.56                              | 54                        | 18.44          |
| High Channel (2477MHz)   |                   |            |                     |               |                |                               |                                    |                           |                |
| 2477.00                  | 43.72             | PK         | 267                 | 1.6           | H              | 32.13                         | 75.85                              | 114                       | 38.15          |
| 2477.00                  | 17.14             | Ave.       | 267                 | 1.6           | H              | 32.13                         | 49.27                              | 94                        | 44.73          |
| 2477.00                  | 40.73             | PK         | 111                 | 2.3           | V              | 32.13                         | 72.86                              | 114                       | 41.14          |
| 2477.00                  | 16.83             | Ave.       | 111                 | 2.3           | V              | 32.13                         | 48.96                              | 94                        | 45.04          |
| 2389.17                  | 29.42             | PK         | 84                  | 2.4           | H              | 36.23                         | 65.65                              | 74                        | 8.35           |
| 2389.17                  | 14.35             | Ave.       | 84                  | 2.4           | H              | 36.23                         | 50.58                              | 54                        | 3.42           |
| 2483.69                  | 28.87             | PK         | 120                 | 1.1           | H              | 36.70                         | 65.57                              | 74                        | 8.43           |
| 2483.69                  | 14.31             | Ave.       | 120                 | 1.1           | H              | 36.70                         | 51.01                              | 54                        | 2.99           |
| 4954.00                  | 43.71             | PK         | 195                 | 2.0           | H              | 6.95                          | 50.66                              | 74                        | 23.34          |
| 4954.00                  | 28.84             | Ave.       | 195                 | 2.0           | H              | 6.95                          | 35.79                              | 54                        | 18.21          |

**Note:**


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor


Margin = Limit- Corr. Amplitude

The emission more than 20dB below the limit was not required to be recorded.

### Pre-scan with High channel Peak Horizontal


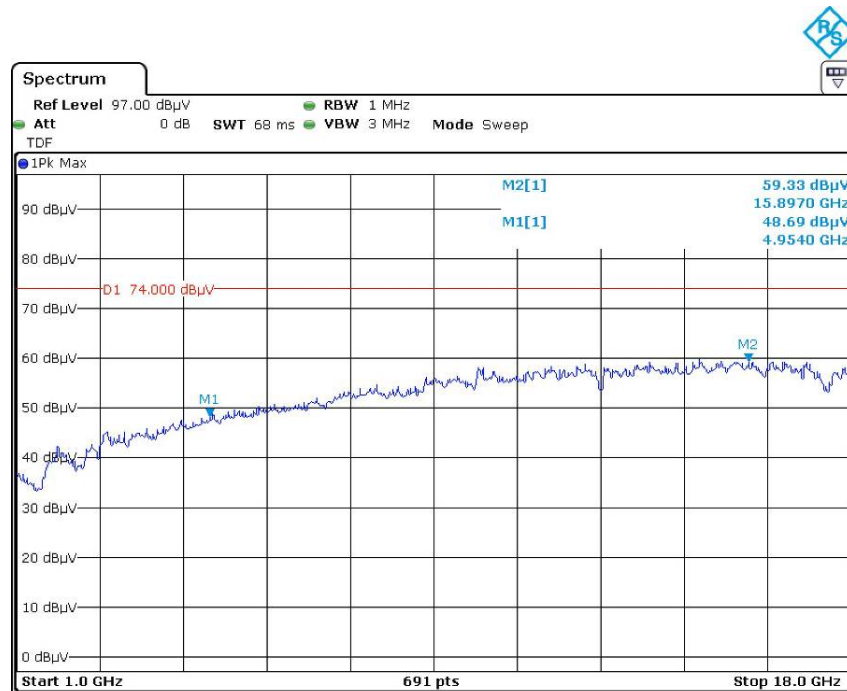


Date: 28.OCT.2020 15:26:38

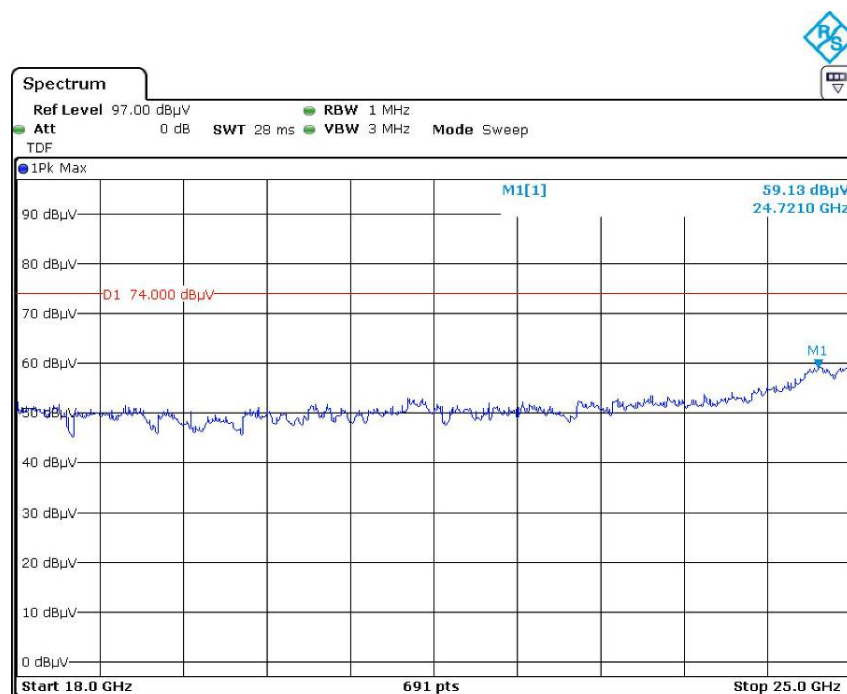


Date: 28.OCT.2020 15:22:36


## Vertical

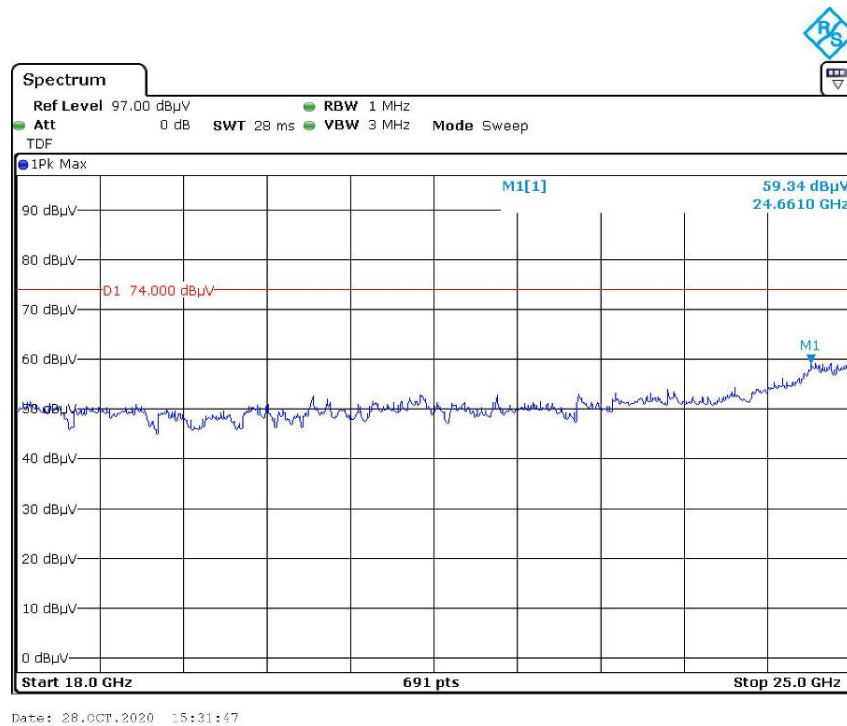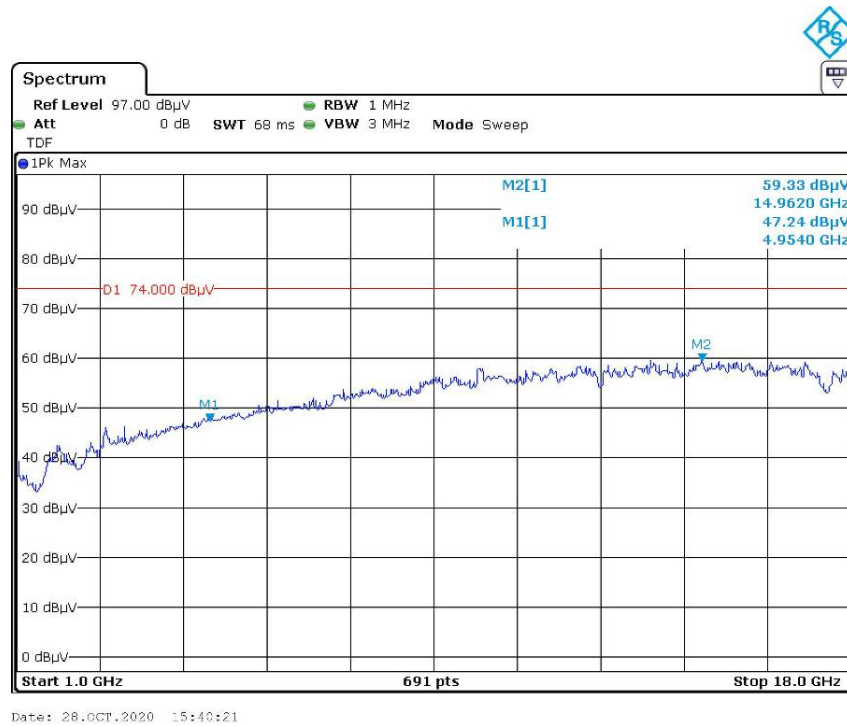


# Average value Horizontal

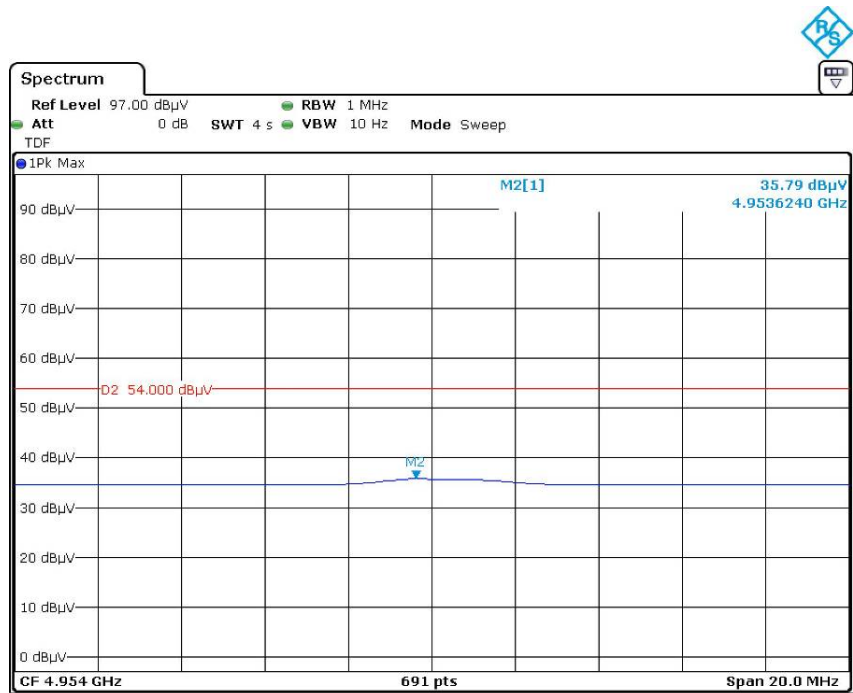

Date: 28.OCT.2020 15:35:23

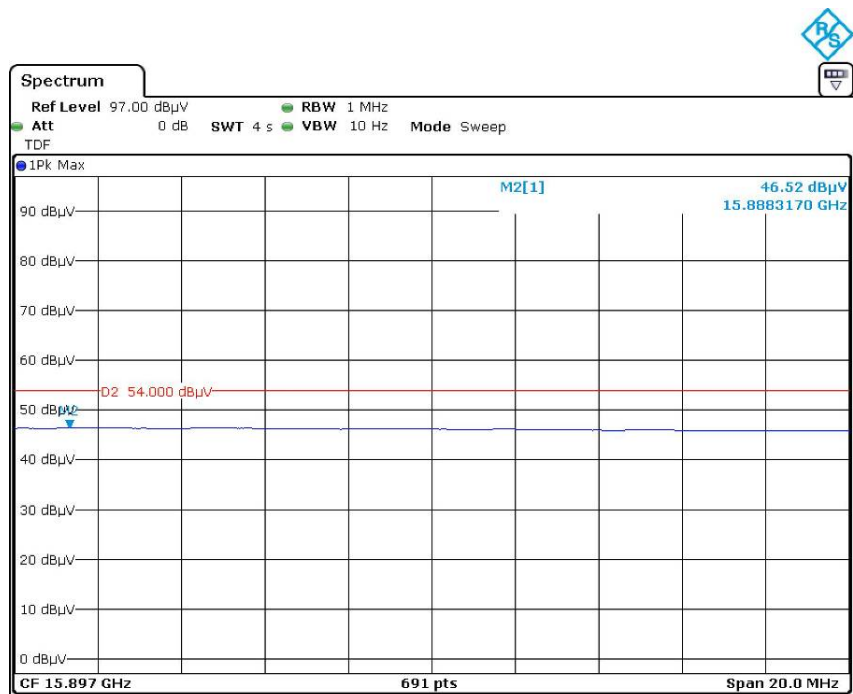


Date: 28.OCT.2020 15:31:42

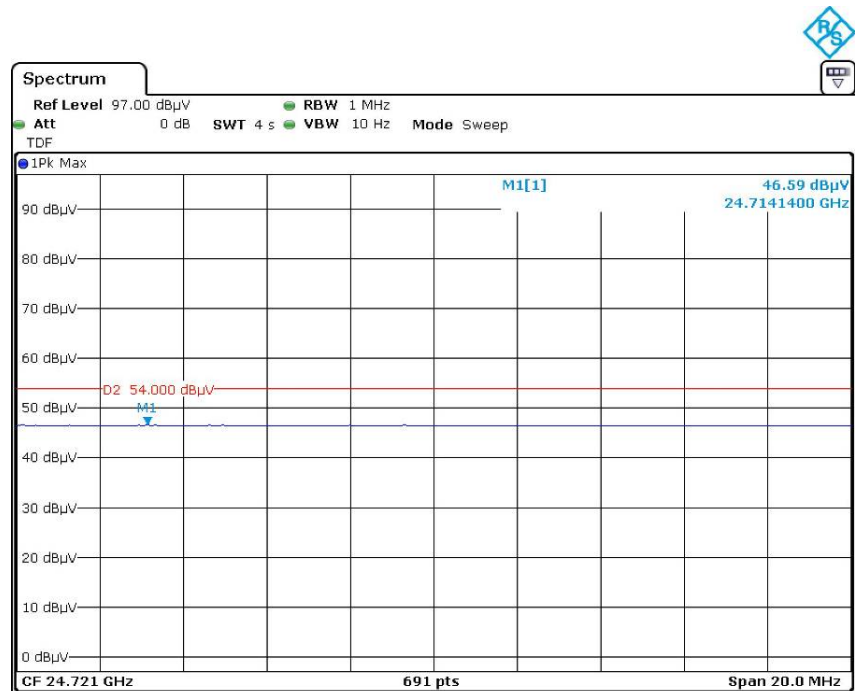


Date: 28.OCT.2020 15:27:11


## Vertical

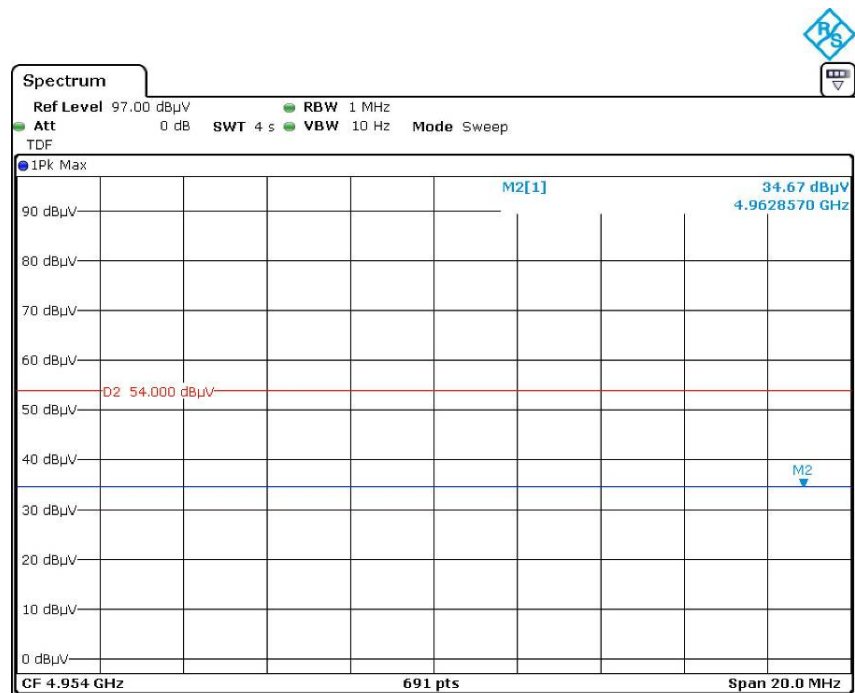

Date: 28.OCT.2020 15:50:35

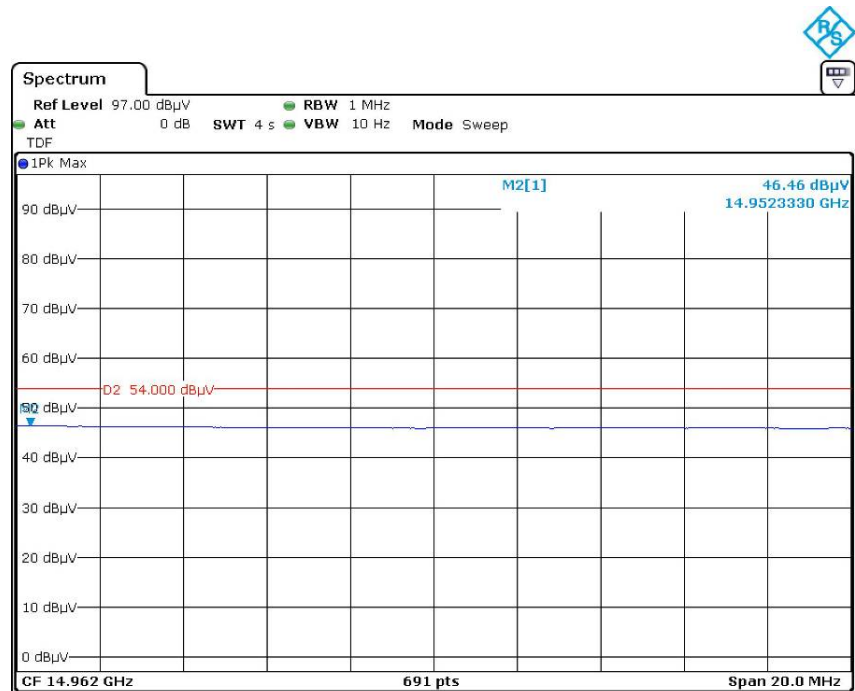

Date: 28.OCT.2020 15:45:27

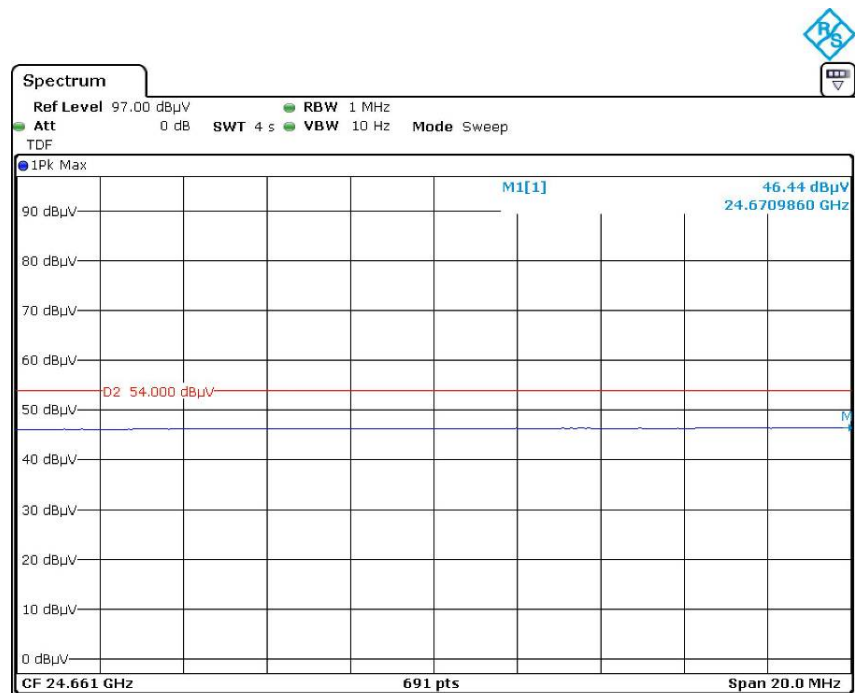

Date: 28.OCT.2020 15:36:24

## FCC§15.215(c) - 20dB EMISSION BANDWIDTH

### Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

ANSI C63.10-2013 Section 6.9

### Test Data

#### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 56.1 %    |
| <b>ATM Pressure:</b>      | 101.0 kPa |


*The testing was performed by Hailey Yang on 2020-10-28.*

*Test Mode: Transmitting*


*Please refer to the following table and plots.*

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| Low     | 2407            | 3.234                |
| Middle  | 2440            | 3.191                |
| High    | 2477            | 3.213                |


# Low Channel

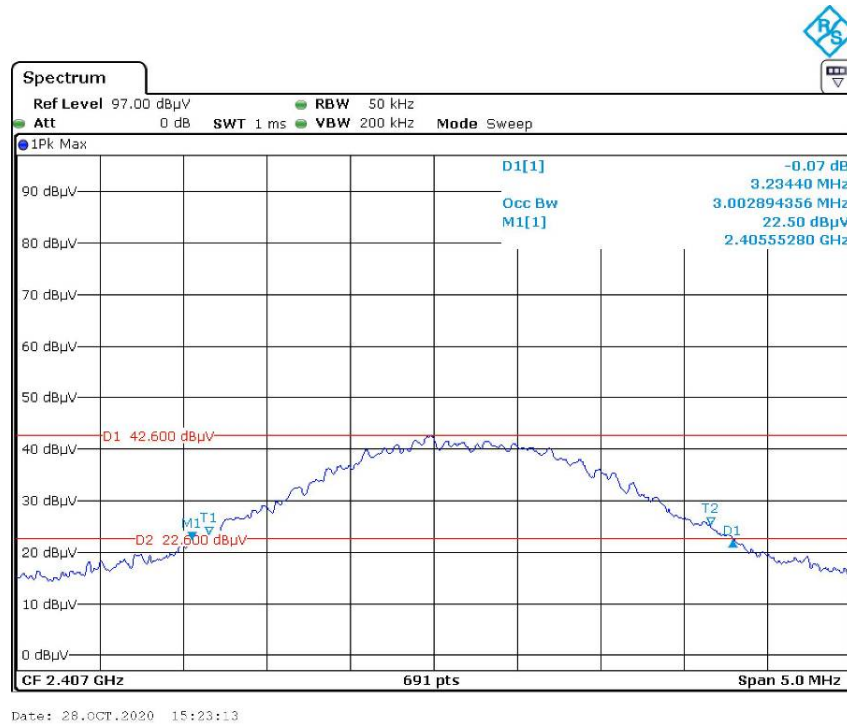

# Middle Channel

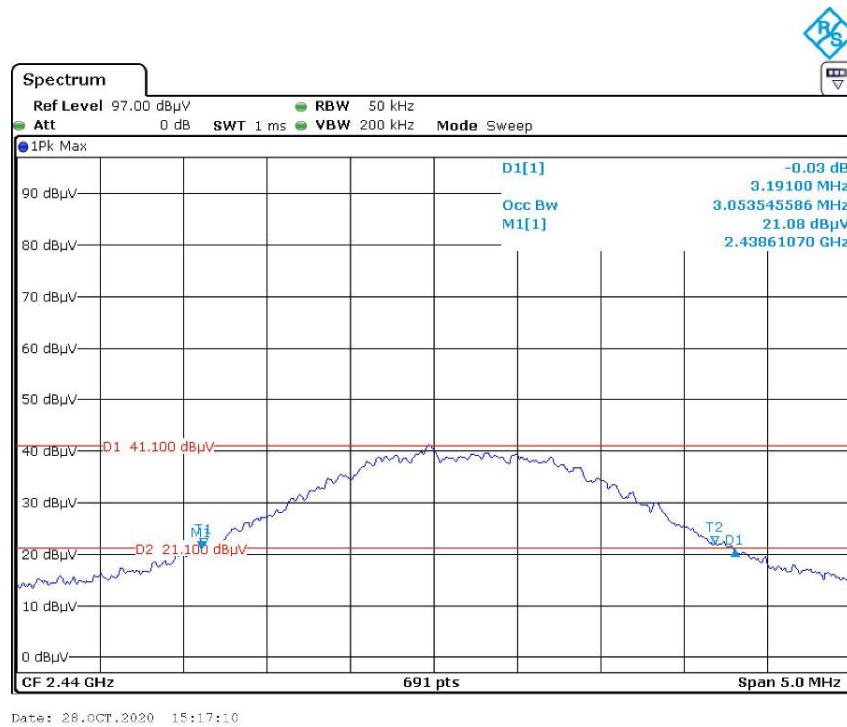

# High Channel

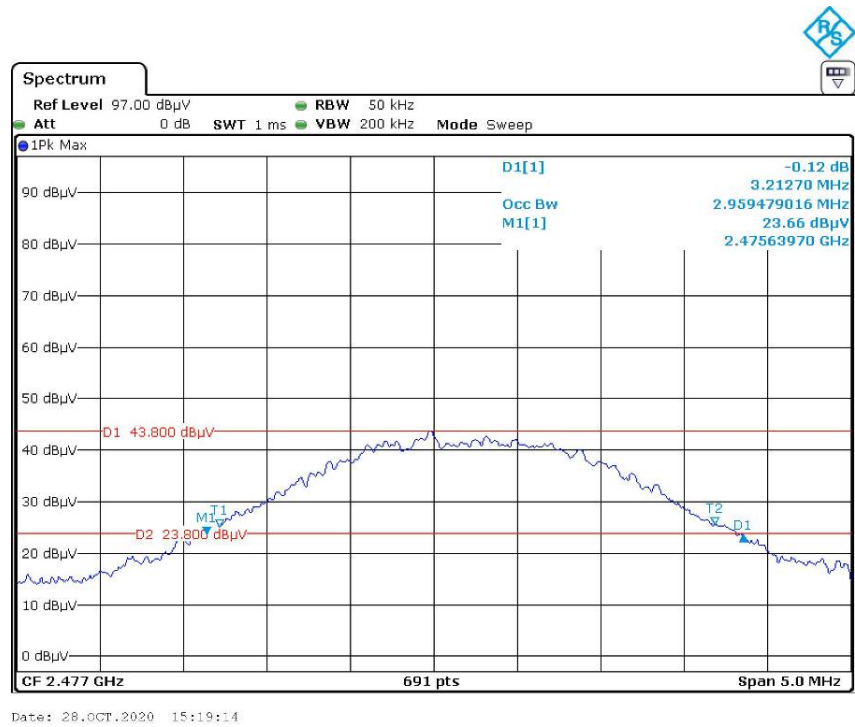

\*\*\*\*\* END OF REPORT \*\*\*\*\*