


Prüfbericht-Nr.: Test report no.:	CN25X99G 001	Auftrags-Nr.: Order no.:	168561682	Seite 1 von 15 Page 1 of 15
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-06-26	
Auftraggeber: Client:	UP Global Sourcing UK Ltd. Manor Mill, Victoria Street, Chadderton, Oldham OL9 0DD, United Kingdom			
Prüfgegenstand: Test item:	10W Wireless Charging Phone Holder			
Bezeichnung / Typ-Nr.: Identification / Type no.:	EE7321, 084112-991155136-0804, 04495, EE7321XXXXXXXXXX / XXXXXX (X=any alphanumeric character or blank, marketing purpose only, no technical difference)			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2025-06-25	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A004028360-007~008 A004028360-013~014			
Prüfzeitraum: Testing period:	2025-07-09 - 2025-07-15			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	 Lin Lin		genehmigt von: authorized by:	 Hardy Suo
Datum: Date:	2025-08-11		Ausstellungsdatum: Issue date:	2025-08-11
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2AAR2EE7321-26			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25X99G 001
Test report no.:

Seite 2 von 15
Page 2 of 15

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüflabors kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25X99G 001
Test Report No.:

Seite 3 von 15
Page 3 of 15

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM.....	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	15
7	LIST OF TABLES.....	15

Prüfbericht - Nr.: CN25X99G 001
Test Report No.:

Seite 5 von 15
Page 5 of 15

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2024-09-26	2025-09-25
OSP	R&S	OSP 150	101017	2024-10-31	2025-10-30
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2024-10-31	2025-10-30
Wideband Power Sensor	R&S	NRP-Z81	105677	2024-09-26	2025-09-25
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2024-09-29	2025-09-28
Signal Analyzer	R&S	FSV 40	101439	2024-09-29	2025-09-28
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2024-09-29	2025-09-28
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-09-29	2025-09-28
Amplifier	R&S	SCU-18F	180070	2024-09-29	2025-09-28
Amplifier	R&S	SCU40A	100475	2024-09-29	2025-09-28
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2025-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2025-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	$\pm 2.08 \%$
All emissions, radiated	$\pm 4.17 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 10W Wireless Charging Phone Holder which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	10W Wireless Charging Phone Holder
Type Designation:	EE7321, 084112-991155136-0804, 04495, EE7321XXXXXXXXXXXX / XXXXXX (X=any alphanumeric character or blank, marketing purpose only, no technical difference)
FCC ID:	2AAR2EE7321-26
Operating Voltage:	USB operated (DC 5V/2A or DC 9V/1.67A)
Technical Specification of WPT	
Frequency Range:	110kHz to 205kHz
Type of Modulation:	FSK
Antenna Type:	Induction coil
Wireless output power:	5W / 10W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless charging (5W, 10W)
- B. Standby mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

Prüfbericht - Nr.: CN25X99G 001
Test Report No.:

Seite 9 von 15
Page 9 of 15

3.5 Submitted Documents

- Application Form
- Operation Description
- User Manual
- ID Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model *EE7321* in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Electric Load	YBZ	5W/10W/15W/25W	N/A
Adapter	MI	MDY-10-EX	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

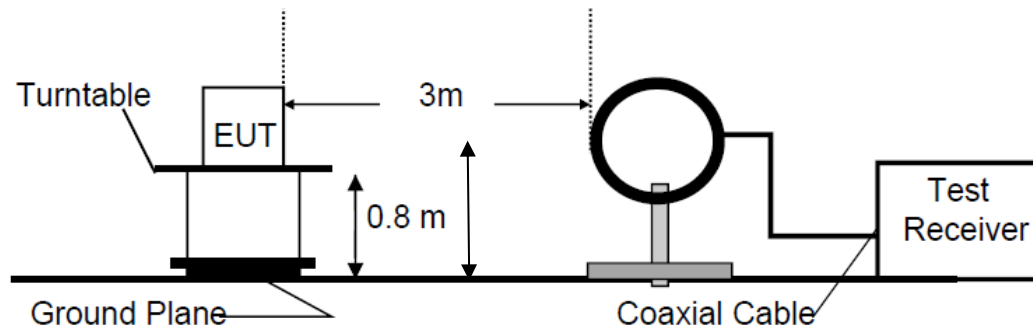


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


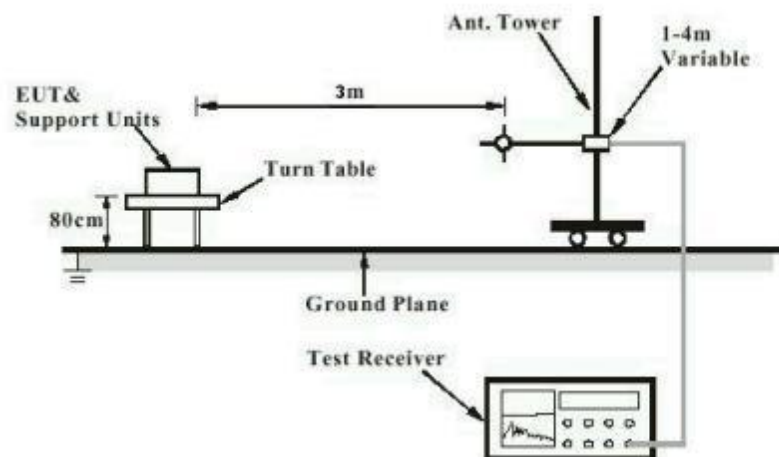


Diagram of Measurement Configuration for Mains Conduction Measurement

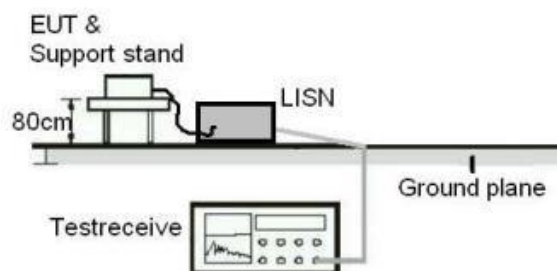

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.203
the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25X99G 001
Test Report No.:

Seite 13 von 15
Page 13 of 15

5.1.2 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10: 2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-10 to 2025-07-11
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B
Ambient temperature	: 24 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25X99G 001
Test Report No.:

Seite 14 von 15
Page 14 of 15

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.209 & 15.205
Basic standard : ANSI C63.10: 2020
Limits : Refer to 15.209(a)
Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2025-07-09 to 2025-07-11
Input voltage : AC 120V, 60Hz
Operation mode : A, B
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C

APPENDIX A: TEST RESULTS OF FCC PART 15C	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging (5W)	2
Wireless charging (10W)	3
Standby mode	4
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH	5
Wireless charging (5W)	5
Wireless charging (10W)	6
Standby mode	7
APPENDIX A.3: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	8
Wireless charging (5W)	8
Wireless charging (10W)	19
Standby mode	30


Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging (5W)

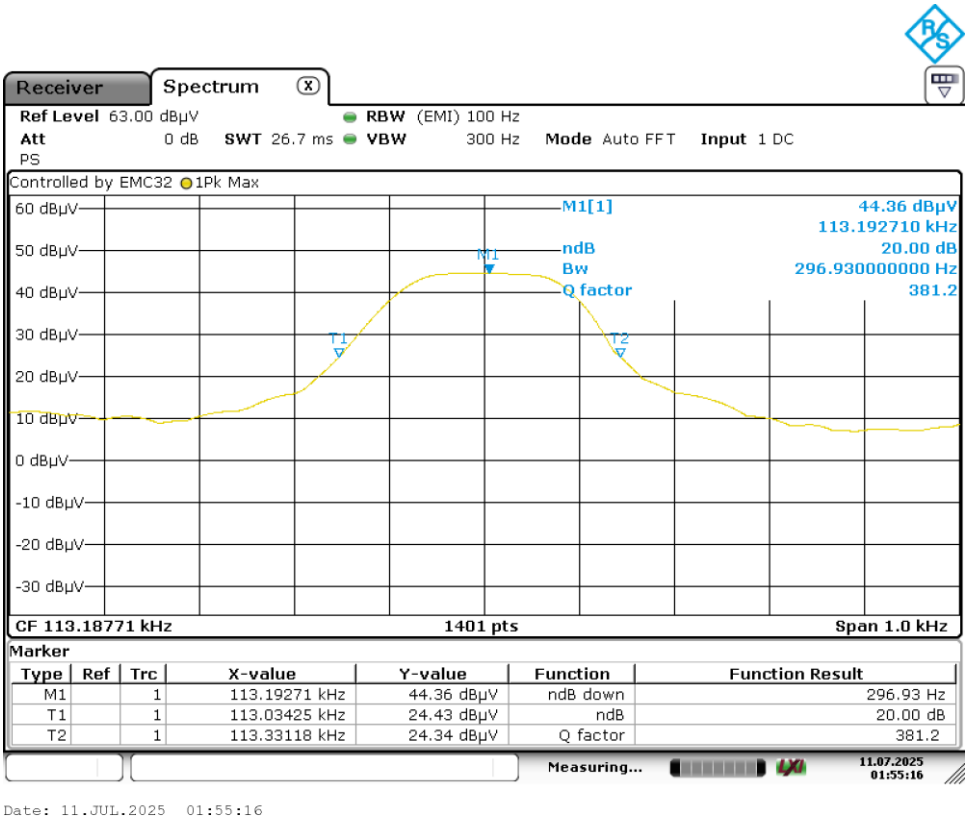


Date: 11.JUL.2025 01:55:16

Wireless charging (10W)

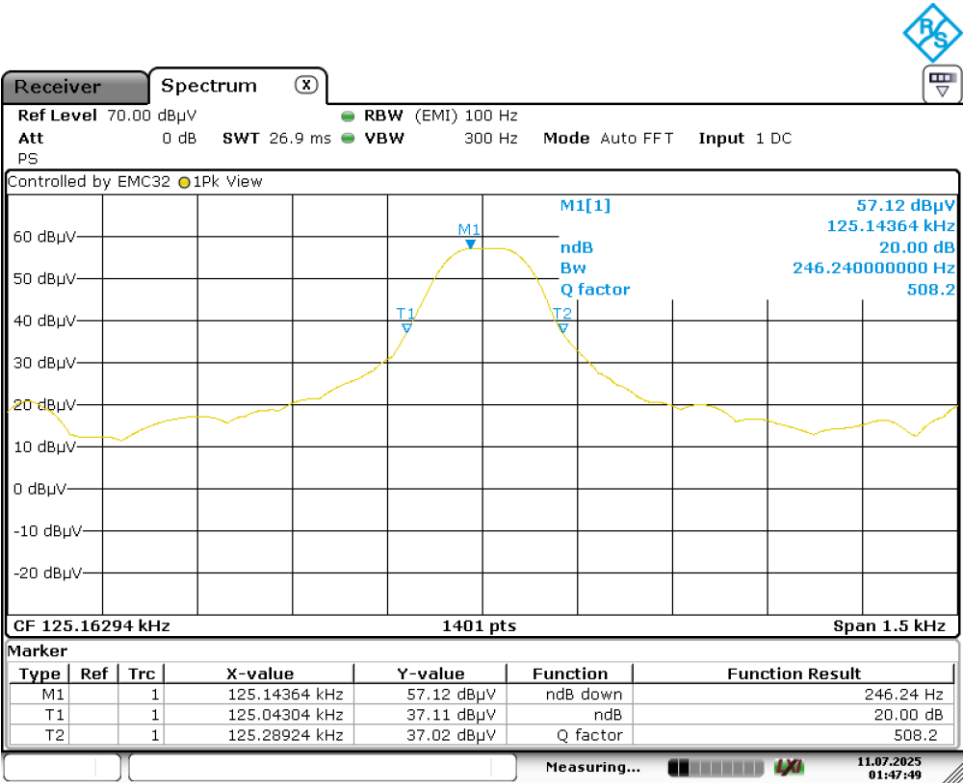

Date: 11.JUL.2025 01:47:49


Standby mode

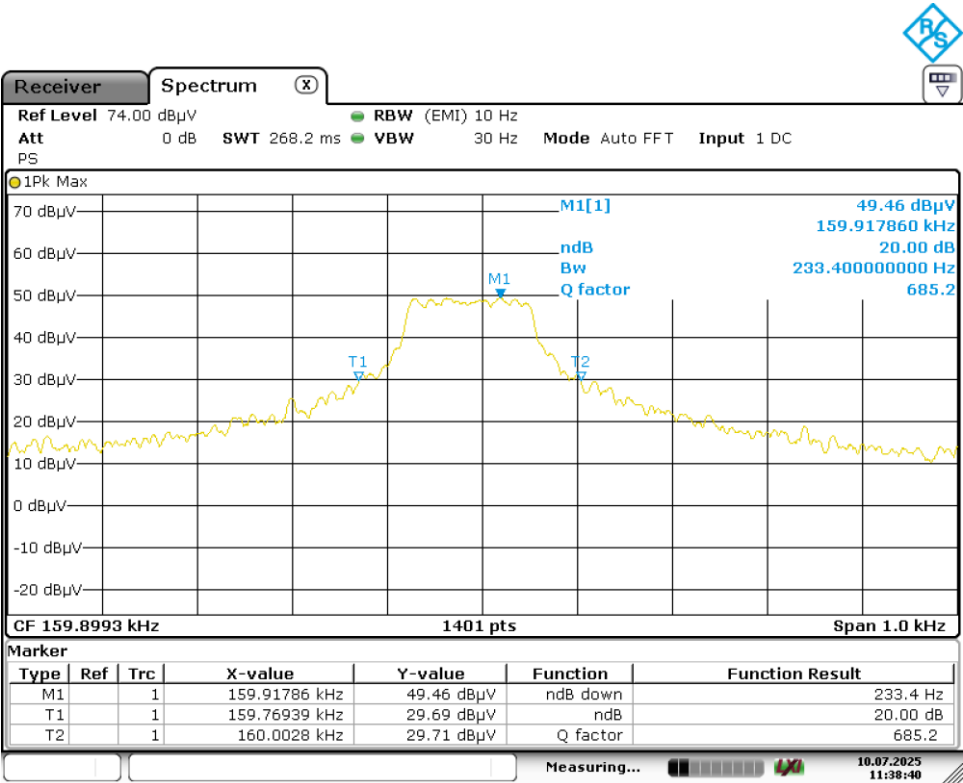

Date: 10.JUL.2025 11:38:39


Appendix A.2: Test Results of 99% Bandwidth

Wireless charging (5W)

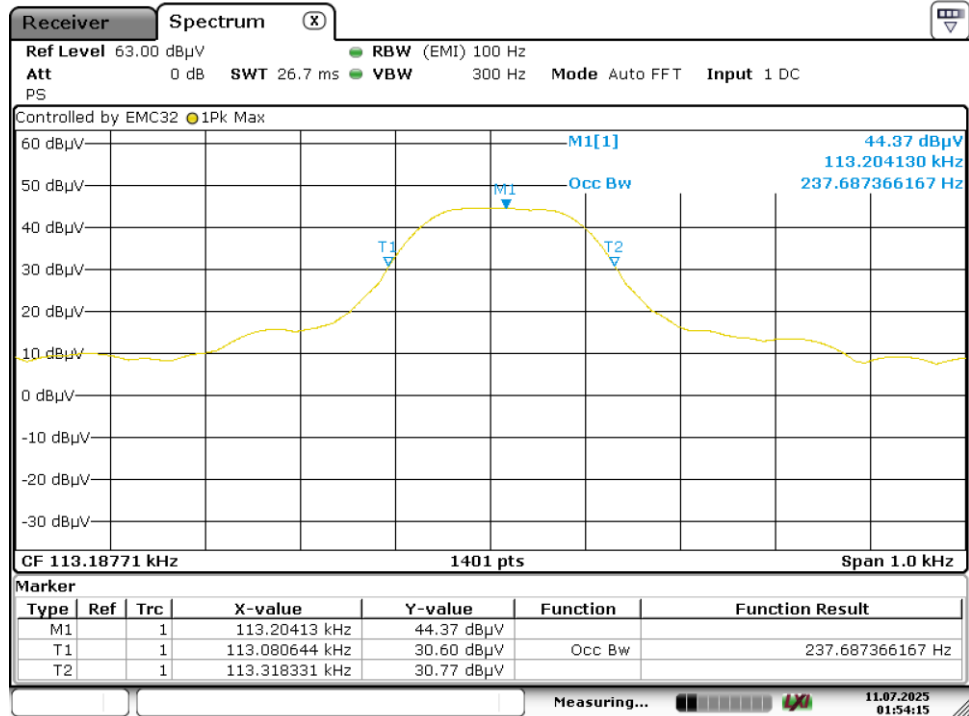


Date: 11.JUL.2025 01:54:15

Wireless charging (10W)

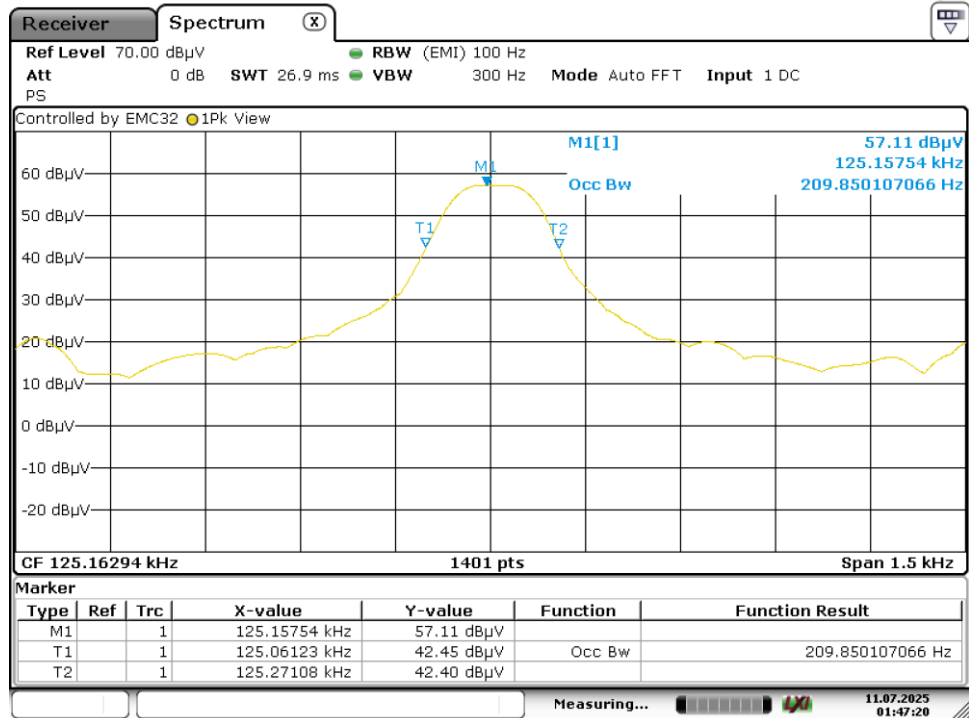

Date: 11.JUL.2025 01:47:20

Standby mode

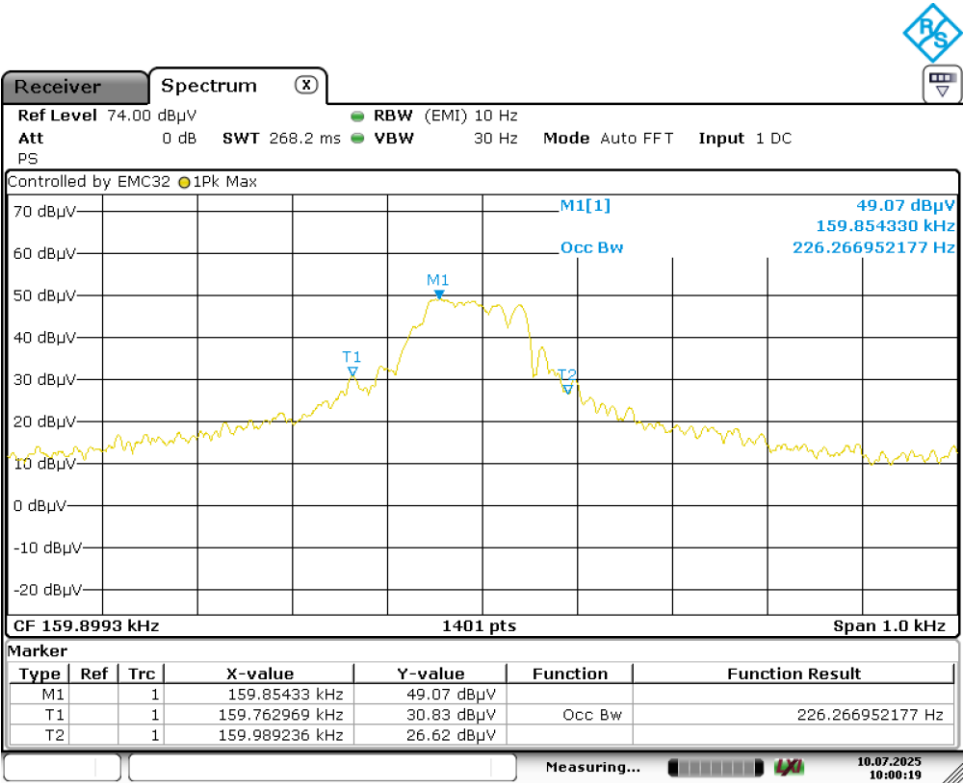


Appendix A.3: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (5W)

EUT Information

EUT Name:	10W WIRELESS CHARGING PHONE HOLDER
Model:	EE7321
Test Mode:	Charging
Order No/Sample No:	168561682/A004028360-007
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

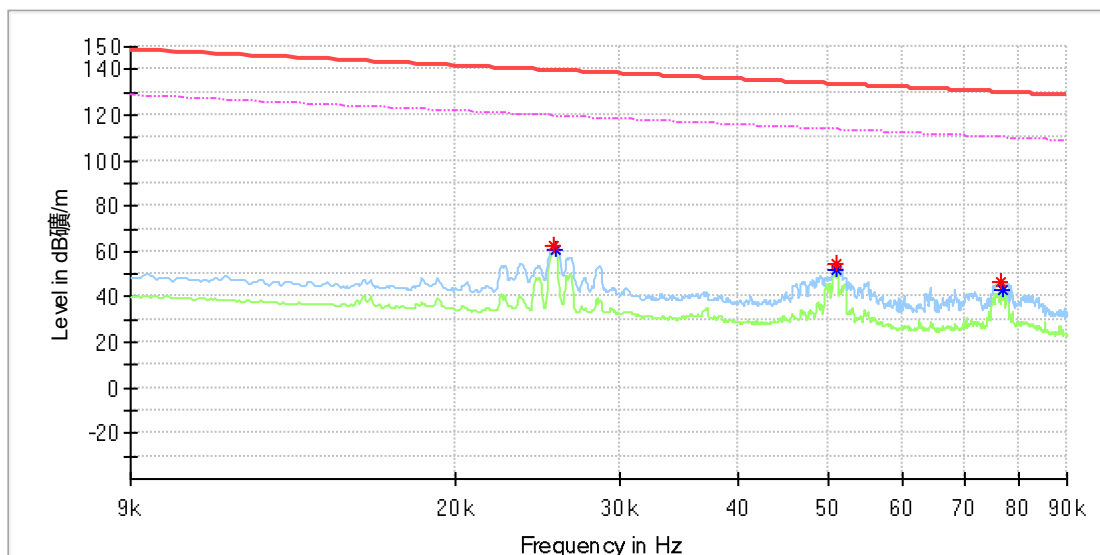


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.025489	62.41	---	139.46	77.05	100.0	X	13.0	20.0
0.025547	---	60.55	119.44	58.90	100.0	X	13.0	20.0
0.051062	54.14	---	133.43	79.29	100.0	X	19.0	20.0
0.051120	---	52.07	113.42	61.35	100.0	X	7.0	20.0
0.076577	46.48	---	129.91	83.43	100.0	X	24.0	20.0
0.076751	---	43.00	109.89	66.90	100.0	X	7.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

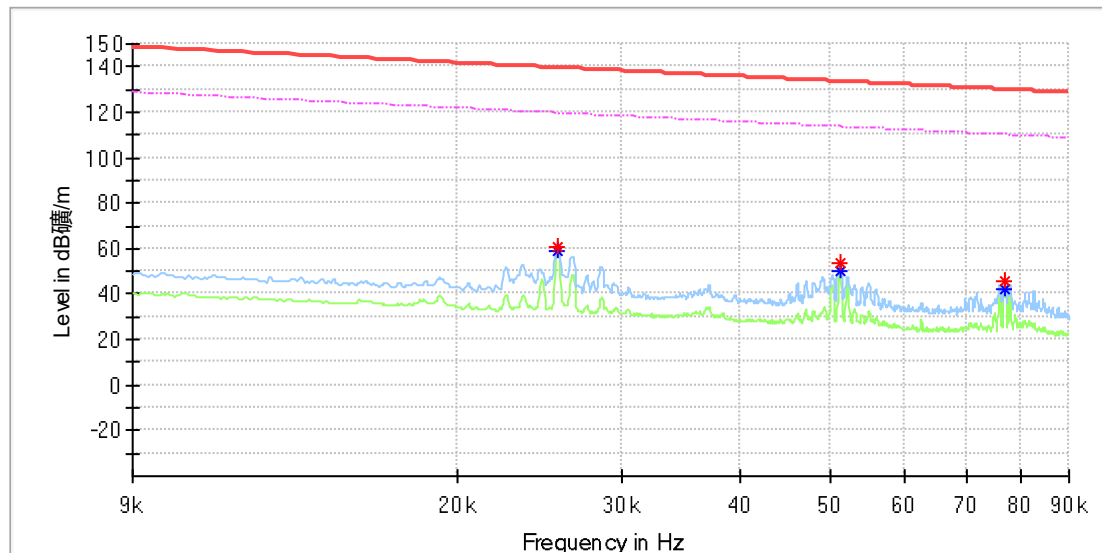


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.025605	61.12	---	139.42	78.30	100.0	Y	64.0	20.0
0.025605	---	59.13	119.42	60.30	100.0	Y	64.0	20.0
0.051178	53.26	---	133.41	80.15	100.0	Y	57.0	20.0
0.051236	---	50.56	113.40	62.84	100.0	Y	57.0	20.0
0.076866	---	41.81	109.88	68.07	100.0	Y	57.0	20.0
0.076924	45.60	---	129.87	84.27	100.0	Y	71.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

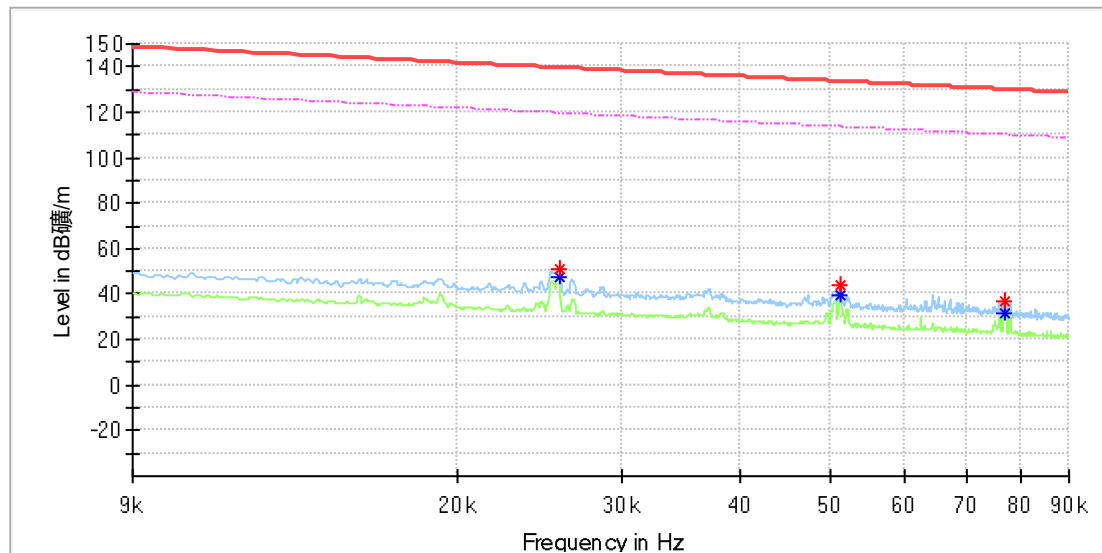


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.025663	---	47.78	119.40	71.62	100.0	Z	115.0	20.0
0.025663	50.95	---	139.40	88.46	100.0	Z	115.0	20.0
0.051294	43.96	---	133.39	89.43	100.0	Z	115.0	20.0
0.051351	---	39.89	113.38	73.49	100.0	Z	115.0	20.0
0.077040	36.89	---	129.86	92.97	100.0	Z	115.0	20.0
0.077040	---	31.93	109.86	77.93	100.0	Z	115.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

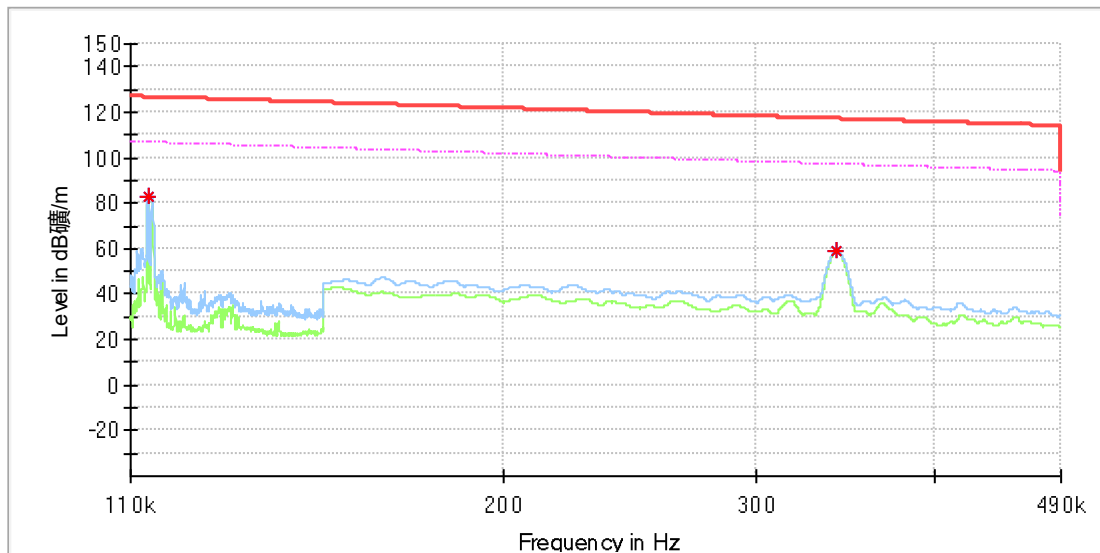


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.113114	82.90	---	126.53	43.62	100.0	X	0.0	20.0
0.113114	---	82.53	106.53	23.99	100.0	X	0.0	20.0
0.341900	---	58.66	96.92	38.27	100.0	X	356.0	20.0
0.342000	59.02	---	116.92	57.90	100.0	X	356.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

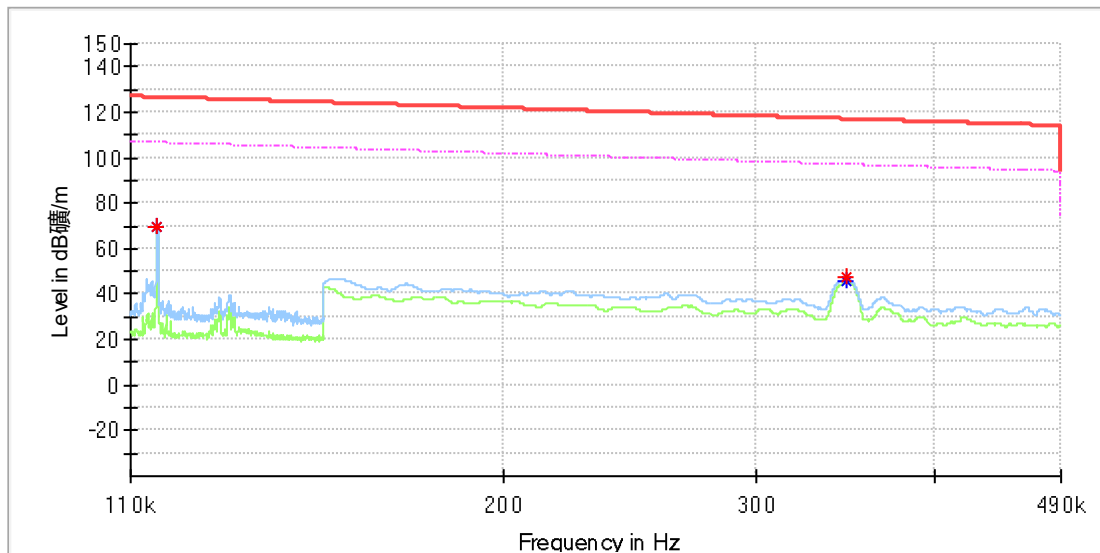


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.114800	69.55	---	126.40	56.85	100.0	Y	149.0	20.0
0.114800	---	69.25	106.40	37.14	100.0	Y	149.0	20.0
0.346950	47.27	---	116.80	69.52	100.0	Y	152.0	20.0
0.347100	---	45.99	96.79	50.81	100.0	Y	152.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

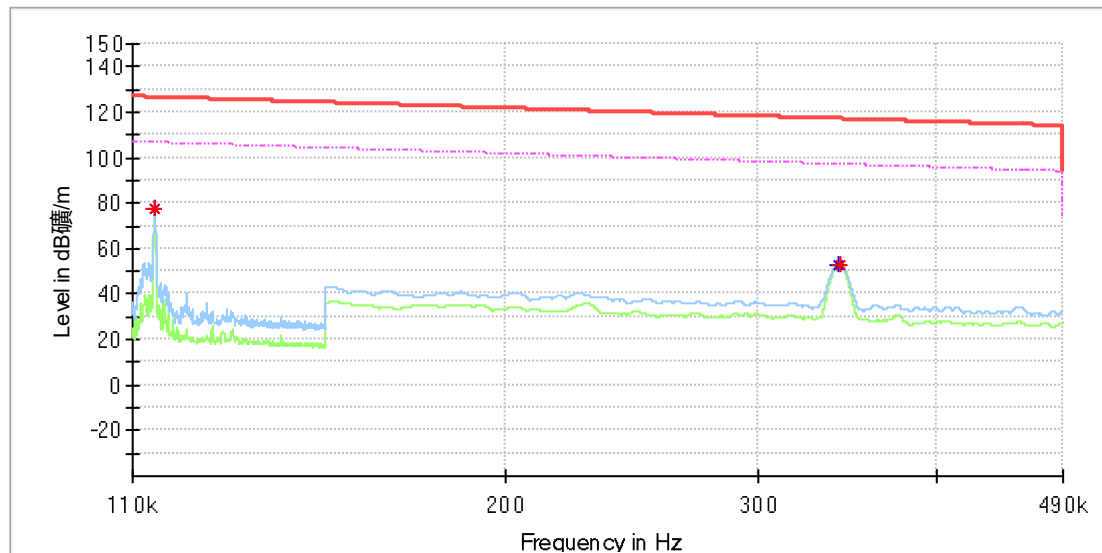


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.113943	---	77.21	106.46	29.25	100.0	Z	206.0	20.0
0.113972	77.50	---	126.46	48.97	100.0	Z	191.0	20.0
0.342100	---	52.57	96.92	44.35	100.0	Z	169.0	20.0
0.342250	53.16	---	116.92	63.76	100.0	Z	169.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

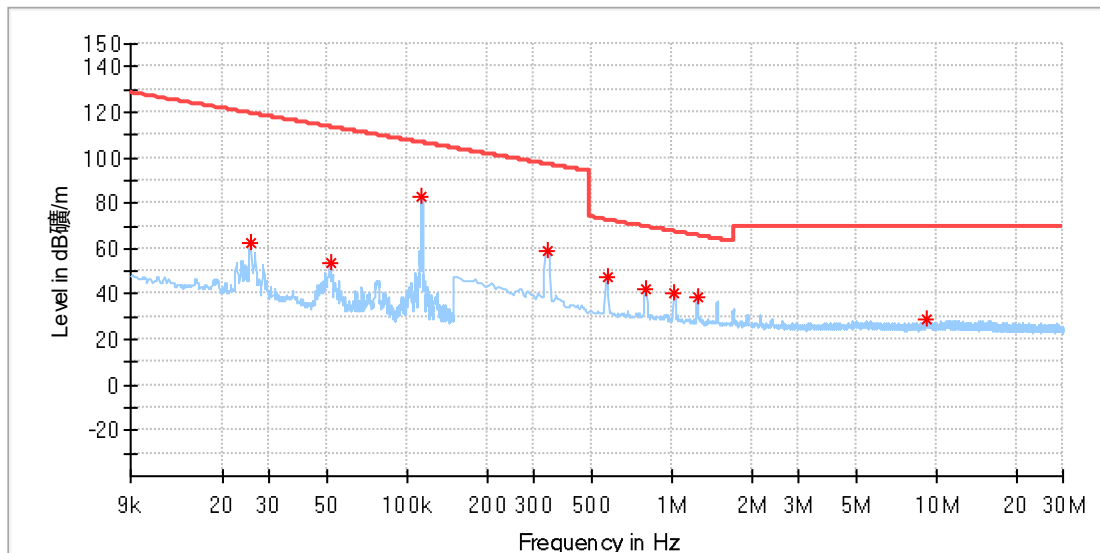

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.025719	62.33	119.39	57.06	100.0	X	16.0	19.9
0.051300	53.99	113.39	59.40	100.0	X	3.0	19.9
0.113038	82.78	106.53	23.76	100.0	X	0.0	19.9
0.338758	58.85	97.00	38.15	100.0	X	11.0	19.9
0.567022	47.47	72.54	25.07	100.0	X	354.0	19.9
0.790897	42.19	69.65	27.47	100.0	X	11.0	19.9
1.023552	40.53	67.42	26.89	100.0	X	354.0	19.9
1.251816	38.92	65.68	26.76	100.0	X	340.0	19.9
9.236691	29.02	69.50	40.48	100.0	X	58.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

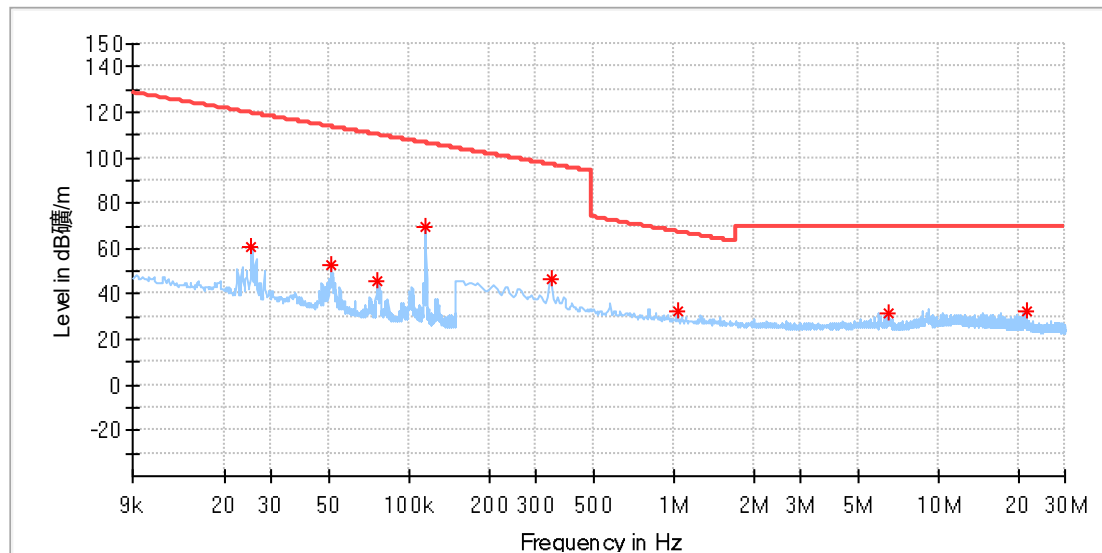

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.025316	60.74	119.52	58.78	100.0	Y	60.0	19.9
0.050696	52.94	113.49	60.56	100.0	Y	65.0	19.9
0.076176	45.37	109.96	64.59	100.0	Y	65.0	19.9
0.114750	69.30	106.40	37.10	100.0	Y	158.0	19.9
0.343147	46.61	96.89	50.29	100.0	Y	163.0	19.9
1.032331	32.30	67.35	35.04	100.0	Y	329.0	19.9
6.427280	31.90	69.50	37.60	100.0	Y	4.0	20.1
21.356669	32.45	69.50	37.05	100.0	Y	34.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

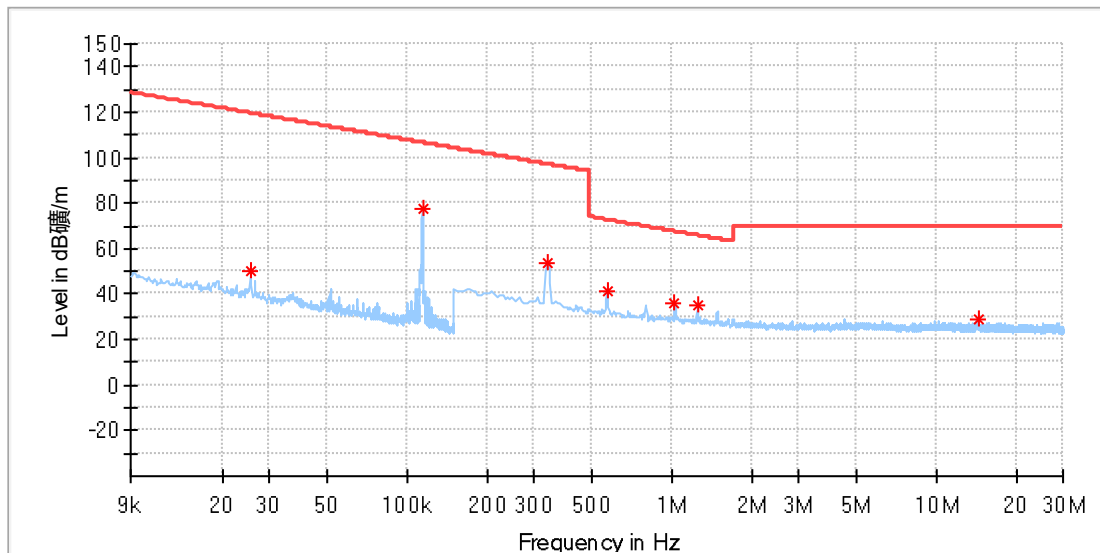

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.025618	50.09	119.42	69.33	100.0	Z	121.0	19.9
0.113944	77.34	106.46	29.12	100.0	Z	193.0	19.9
0.338758	53.68	97.00	43.32	100.0	Z	168.0	19.9
0.567022	40.97	72.54	31.56	100.0	Z	203.0	19.9
1.023552	35.91	67.42	31.51	100.0	Z	164.0	19.9
1.251816	34.77	65.68	30.90	100.0	Z	183.0	19.9
14.385816	28.79	69.50	40.71	100.0	Z	67.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

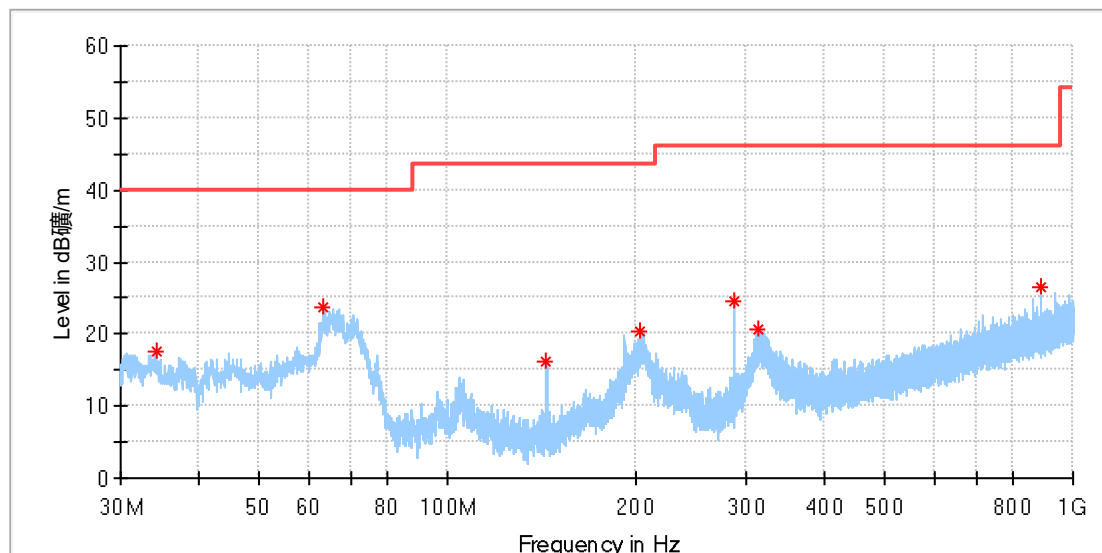

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.141154	17.46	40.00	22.54	100.0	H	295.0	-22.3
63.353077	23.71	40.00	16.29	100.0	H	225.0	-19.9
144.012308	16.07	43.50	27.43	100.0	H	66.0	-22.4
203.256923	20.30	43.50	23.20	100.0	H	90.0	-19.0
288.057308	24.43	46.00	21.57	100.0	H	261.0	-16.6
314.732308	20.73	46.00	25.27	100.0	H	326.0	-15.9
890.986923	26.57	46.00	19.43	100.0	H	287.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

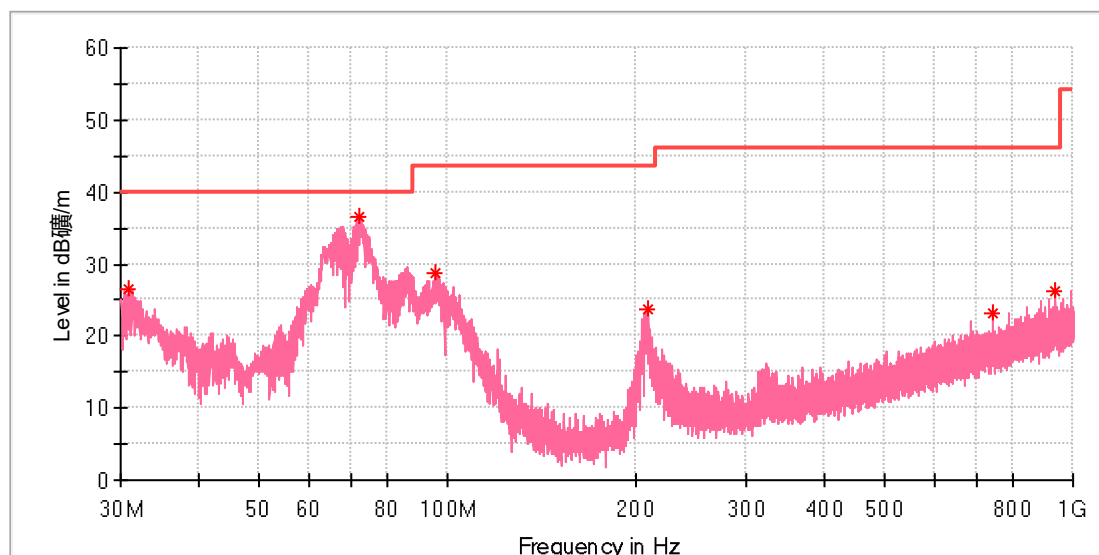

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.007308	26.42	40.00	13.58	100.0	V	148.0	-22.9
72.120385	36.42	40.00	3.58	100.0	V	0.0	-22.6
95.698846	28.80	43.50	14.70	100.0	V	239.0	-19.7
209.450000	23.58	43.50	19.92	100.0	V	337.0	-18.9
742.539615	23.14	46.00	22.86	100.0	V	353.0	-7.2
938.442308	26.35	46.00	19.65	100.0	V	8.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Wireless charging (10W)

EUT Information

EUT Name:	10W WIRELESS CHARGING PHONE HOLDER
Model:	EE7321
Test Mode:	Charging
Order No/Sample No:	168561682/A004028360-007
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

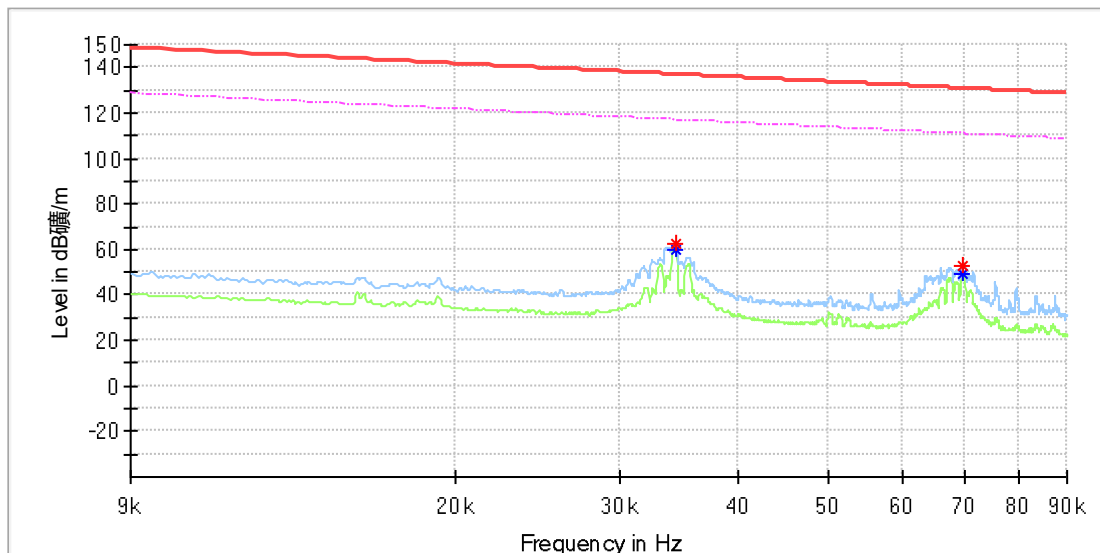


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034341	62.25	---	136.88	74.62	100.0	X	351.0	20.0
0.034341	---	60.00	116.88	56.88	100.0	X	351.0	20.0
0.069750	---	49.03	110.72	61.69	100.0	X	112.0	20.0
0.069808	53.02	---	130.72	77.69	100.0	X	112.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

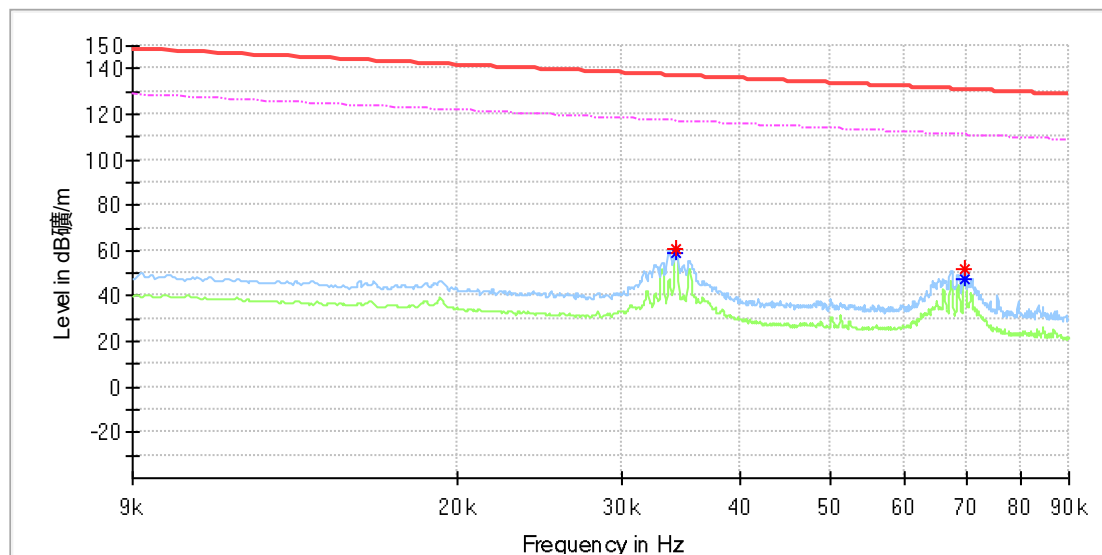


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034168	---	58.72	116.92	58.20	100.0	Y	58.0	20.0
0.034226	61.13	---	136.90	75.78	100.0	Y	58.0	20.0
0.069634	---	47.65	110.74	63.09	100.0	Y	58.0	20.0
0.069750	51.87	---	130.72	78.85	100.0	Y	52.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

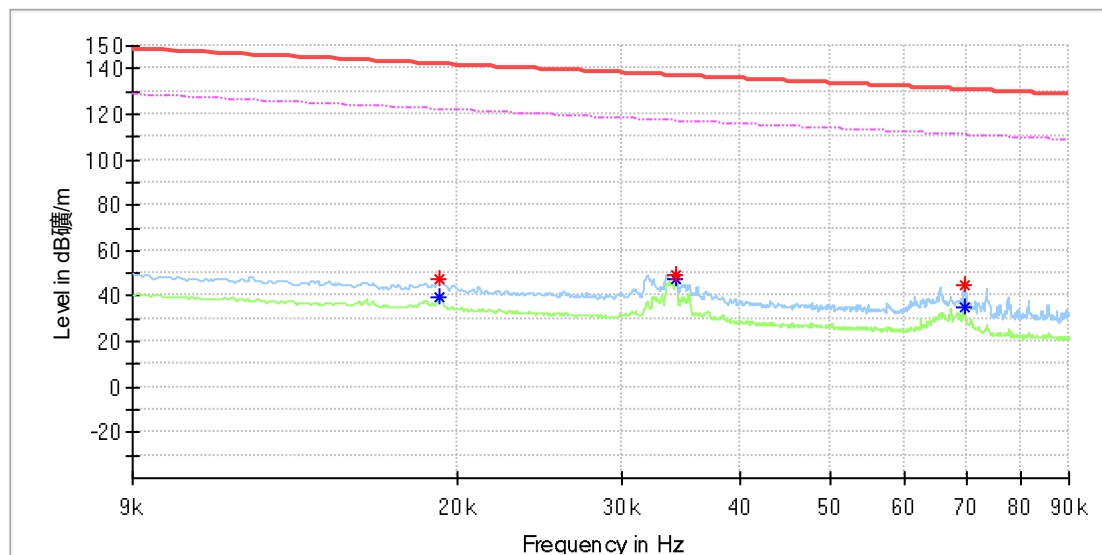


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	47.52	---	141.96	94.43	100.0	Z	30.0	20.0
0.019183	---	39.88	121.93	82.05	100.0	Z	159.0	20.0
0.034168	49.38	---	136.92	87.54	100.0	Z	356.0	20.0
0.034226	---	47.51	116.90	69.40	100.0	Z	0.0	20.0
0.069519	44.76	---	130.75	85.99	100.0	Z	199.0	20.0
0.069692	---	35.51	110.73	75.22	100.0	Z	179.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

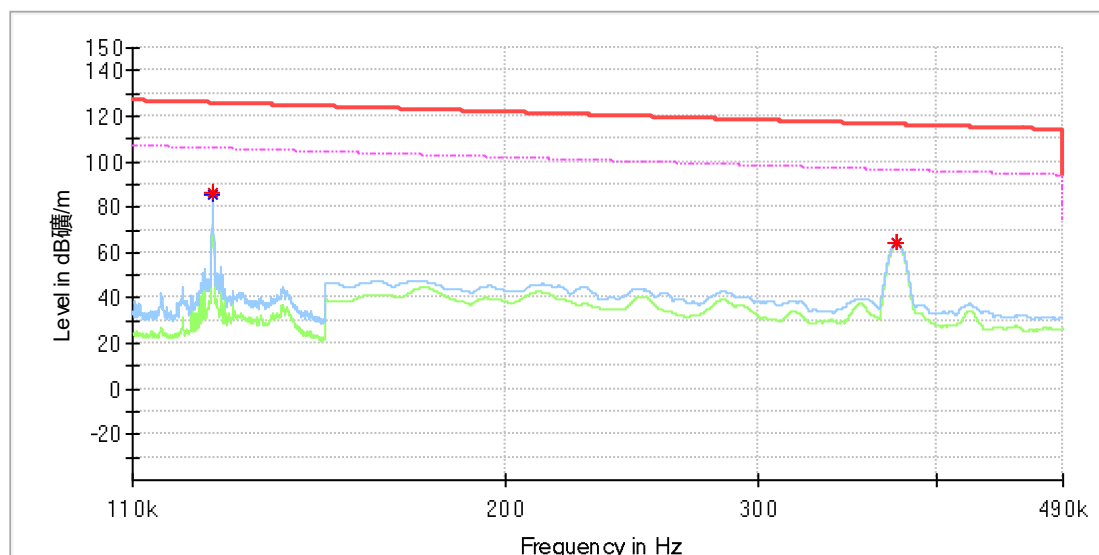


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125114	85.95	---	125.65	39.70	100.0	X	71.0	20.0
0.125114	---	85.85	105.65	19.80	100.0	X	71.0	20.0
0.375300	---	63.92	96.12	32.19	100.0	X	74.0	20.0
0.375400	64.07	---	116.11	52.04	100.0	X	74.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

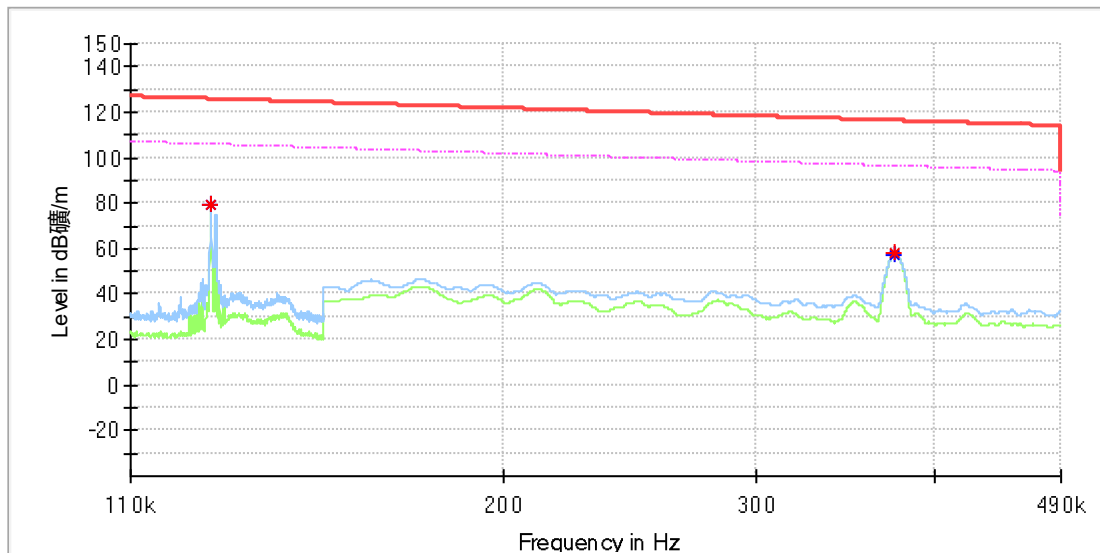


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125143	79.56	---	125.65	46.09	100.0	Y	165.0	20.0
0.125143	---	79.43	105.65	26.22	100.0	Y	165.0	20.0
0.375450	---	57.56	96.11	38.55	100.0	Y	163.0	20.0
0.375550	57.81	---	116.11	58.30	100.0	Y	163.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

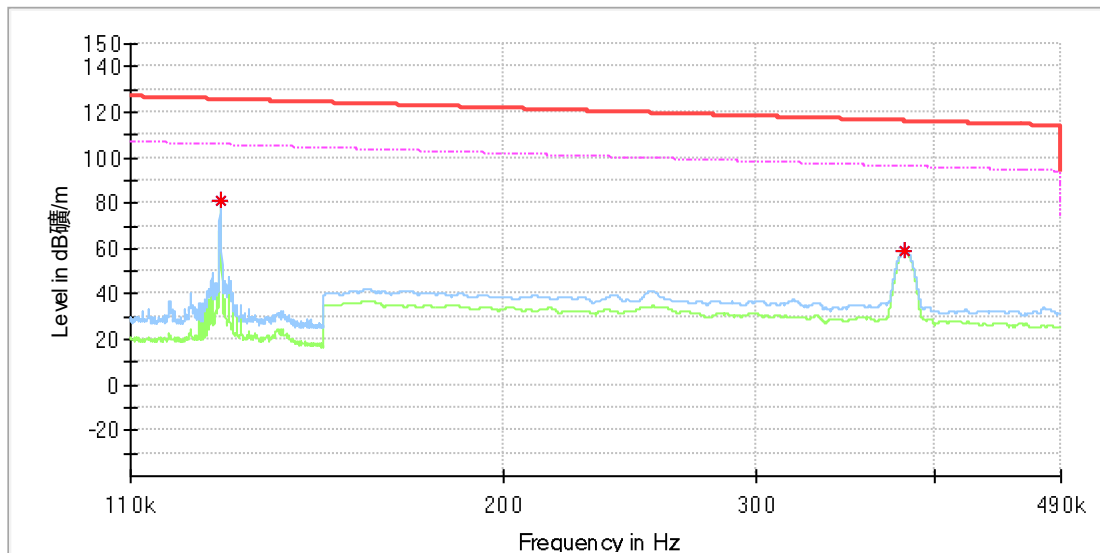


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127086	---	81.24	105.52	24.28	100.0	Z	186.0	20.0
0.127114	81.34	---	125.51	44.17	100.0	Z	192.0	20.0
0.381300	---	59.04	95.98	36.93	100.0	Z	193.0	20.0
0.381500	59.27	---	115.97	56.70	100.0	Z	193.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

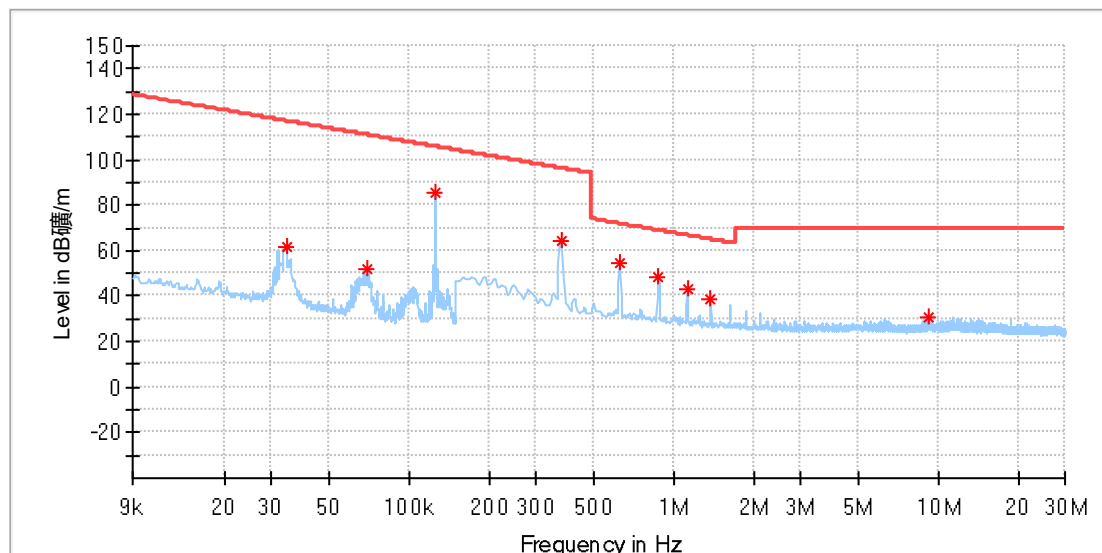

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034279	61.66	116.89	55.23	100.0	X	113.0	19.9
0.069831	52.12	110.71	58.59	100.0	X	113.0	19.9
0.125124	85.81	105.65	19.84	100.0	X	68.0	19.9
0.373875	63.90	96.15	32.25	100.0	X	79.0	19.9
0.624088	54.27	71.71	17.43	100.0	X	76.0	19.9
0.874302	48.08	68.79	20.71	100.0	X	50.0	19.9
1.124515	42.85	66.61	23.76	100.0	X	90.0	19.9
1.374728	39.06	64.87	25.80	100.0	X	79.0	19.9
9.140118	30.95	69.50	38.55	100.0	X	94.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

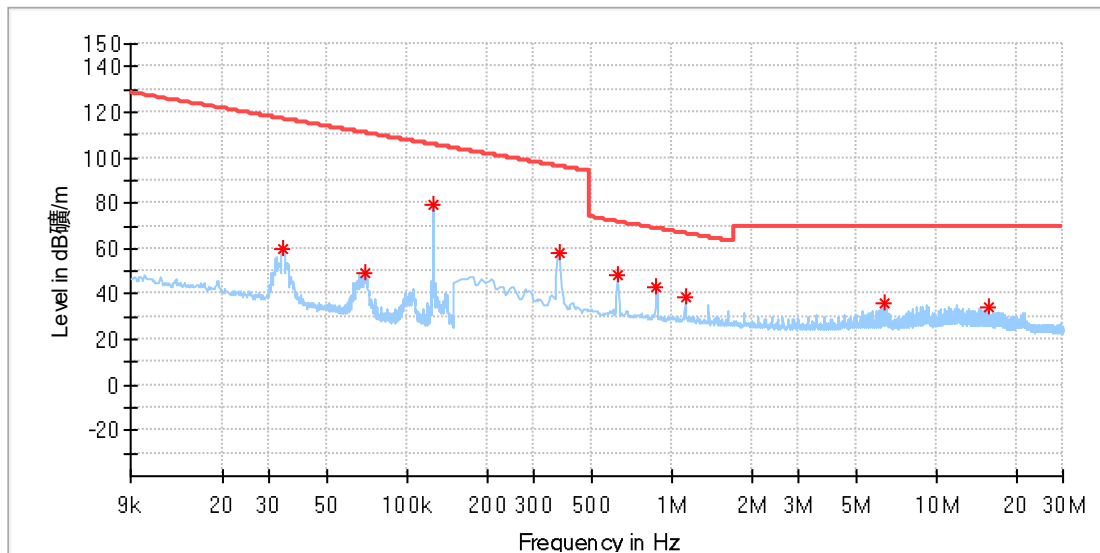

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.033675	60.07	117.05	56.97	100.0	Y	65.0	19.9
0.069630	49.24	110.74	61.50	100.0	Y	61.0	19.9
0.125124	79.34	105.65	26.31	100.0	Y	163.0	19.9
0.373875	57.82	96.15	38.33	100.0	Y	173.0	19.9
0.624088	48.35	71.71	23.36	100.0	Y	166.0	19.9
0.874302	43.26	68.79	25.53	100.0	Y	163.0	19.9
1.124515	38.32	66.61	28.29	100.0	Y	141.0	19.9
6.378993	35.94	69.50	33.56	100.0	Y	37.0	20.1
15.645662	33.92	69.50	35.58	100.0	Y	33.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

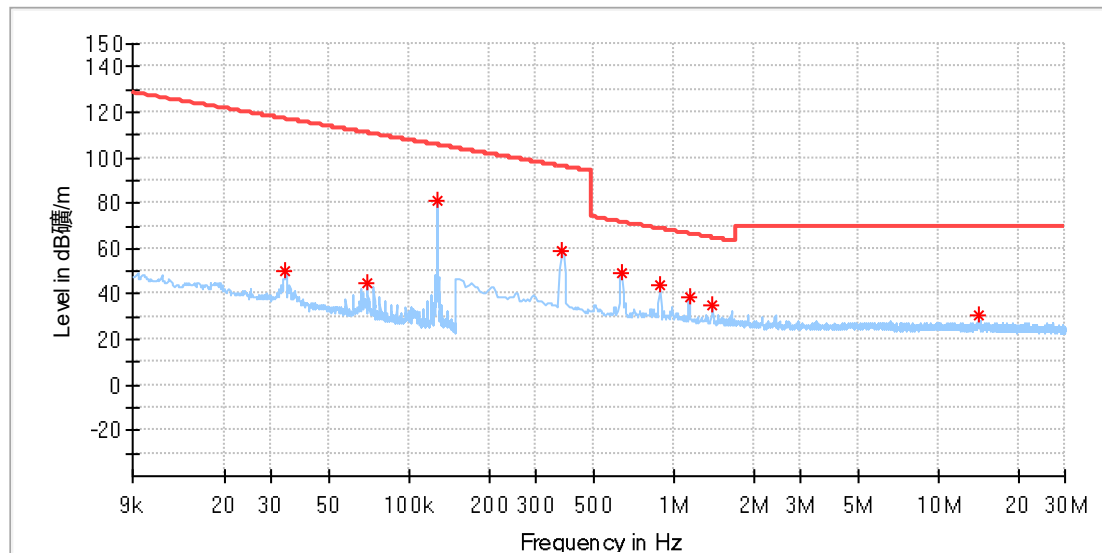

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.034078	49.91	116.94	67.04	100.0	Z	118.0	19.9
0.069429	45.26	110.76	65.50	100.0	Z	179.0	19.9
0.127138	81.17	105.51	24.35	100.0	Z	184.0	19.9
0.378265	59.21	96.05	36.83	100.0	Z	192.0	19.9
0.632868	49.64	71.58	21.95	100.0	Z	189.0	19.9
0.887471	43.70	68.66	24.96	100.0	Z	164.0	19.9
1.142074	38.97	66.47	27.50	100.0	Z	189.0	19.9
1.392287	35.11	64.76	29.65	100.0	Z	185.0	19.9
14.113655	30.82	69.50	38.68	100.0	Z	243.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

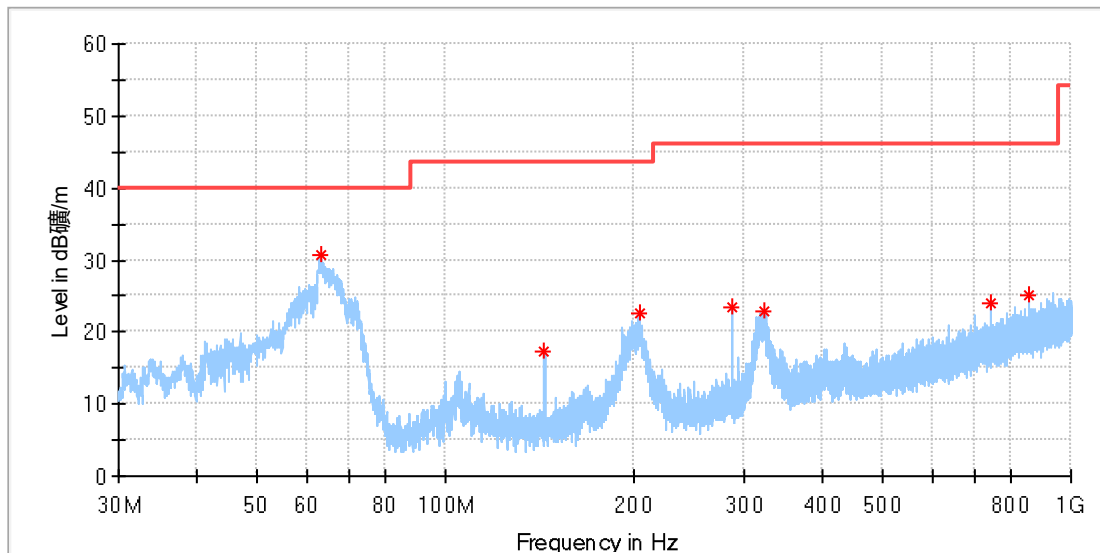

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
63.054615	30.78	40.00	9.22	100.0	H	260.0	-19.8
144.012308	17.43	43.50	26.07	100.0	H	55.0	-22.4
204.450769	22.64	43.50	20.86	100.0	H	73.0	-19.0
288.057308	23.47	46.00	22.53	100.0	H	223.0	-16.6
322.604231	22.85	46.00	23.15	100.0	H	73.0	-15.6
742.465000	24.10	46.00	21.90	100.0	H	31.0	-7.2
856.104231	25.20	46.00	20.80	100.0	H	15.0	-5.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Charging
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

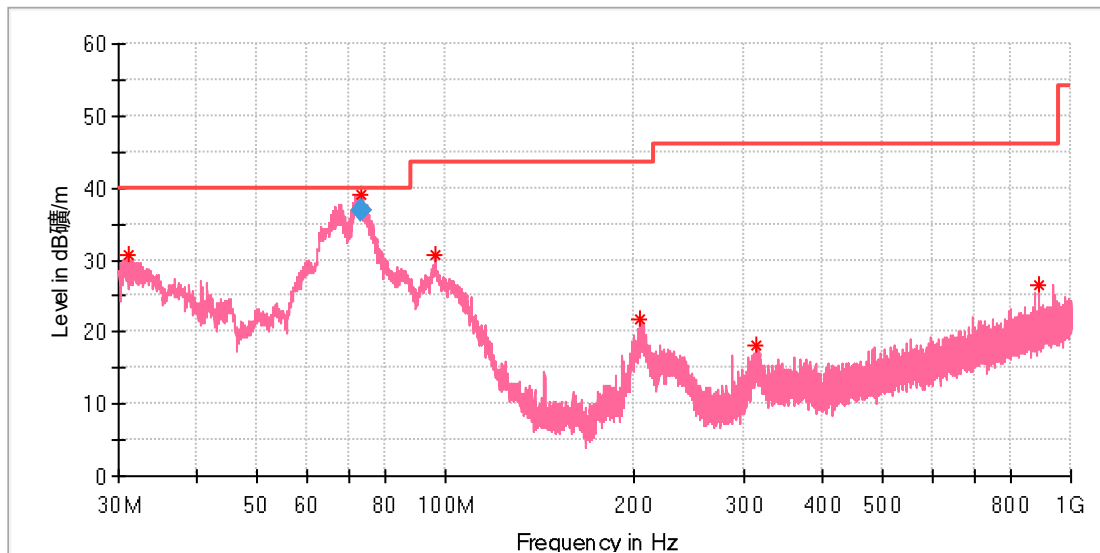

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.156539	30.60	40.00	9.40	100.0	V	104.0	-22.9
73.122654	39.13	40.00	0.87	100.0	V	72.0	-22.9
96.071923	30.82	43.50	12.68	100.0	V	356.0	-19.7
204.749231	21.73	43.50	21.77	100.0	V	348.0	-19.0
313.911539	18.14	46.00	27.86	100.0	V	308.0	-15.9
890.949615	26.64	46.00	19.36	100.0	V	0.0	-4.9


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.122654	36.84	40.00	3.16	100.0	V	72.0	-22.9

Standby mode

EUT Information

EUT Name:	10W WIRELESS CHARGING PHONE HOLDER
Model:	EE7321
Test Mode:	Standby
Order No/Sample No:	168561682/A004028360-007
Test Voltage:	Adaptor
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

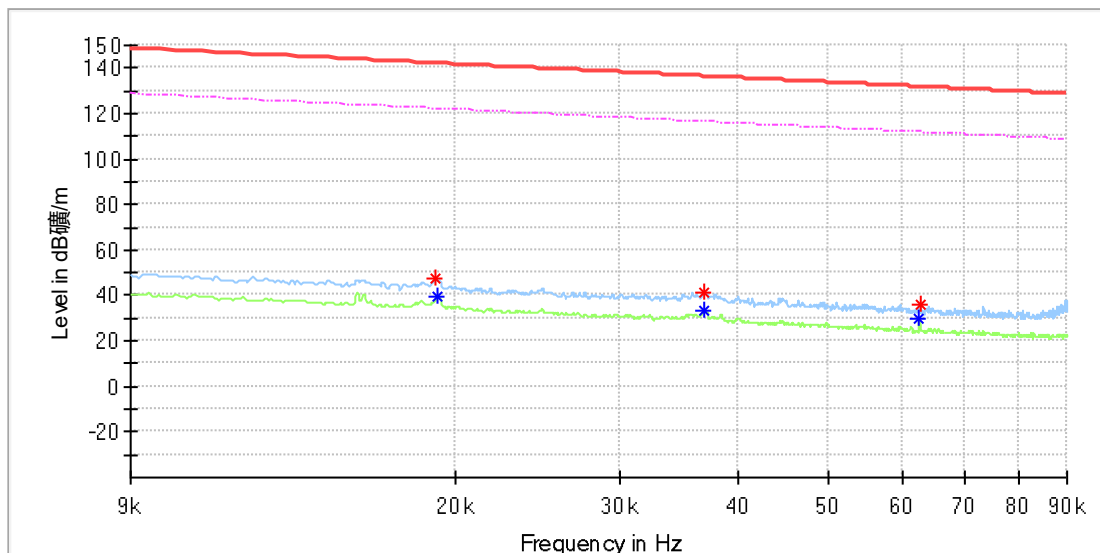


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019067	47.05	---	141.98	94.93	100.0	X	271.0	20.0
0.019183	---	39.96	121.93	81.97	100.0	X	282.0	20.0
0.036945	41.52	---	136.24	94.72	100.0	X	4.0	20.0
0.036945	---	33.11	116.24	83.13	100.0	X	4.0	20.0
0.062634	---	29.72	111.66	81.94	100.0	X	305.0	20.0
0.062691	35.96	---	131.65	95.69	100.0	X	179.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

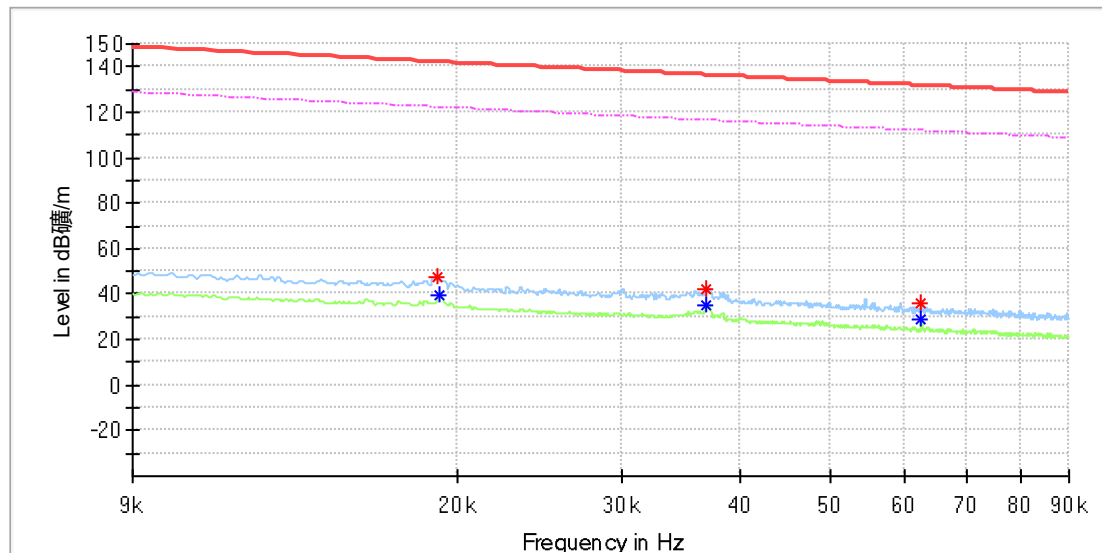


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019009	47.66	---	142.01	94.35	100.0	Y	8.0	20.0
0.019183	---	39.50	121.93	82.43	100.0	Y	177.0	20.0
0.036887	42.33	---	136.25	93.92	100.0	Y	171.0	20.0
0.036945	---	35.09	116.24	81.15	100.0	Y	8.0	20.0
0.062634	35.83	---	131.66	95.83	100.0	Y	338.0	20.0
0.062634	---	29.29	111.66	82.37	100.0	Y	338.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

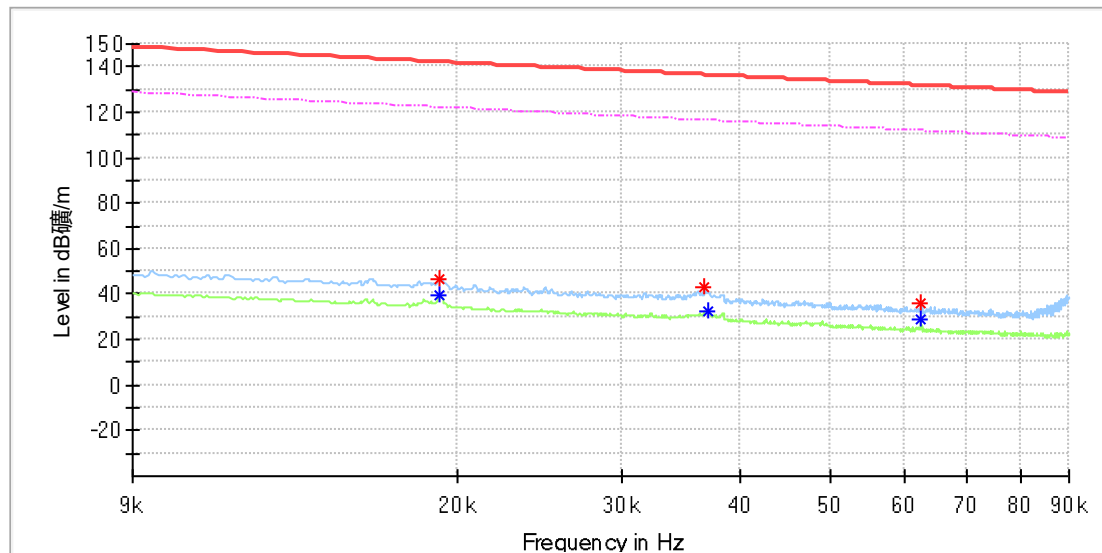


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	46.64	---	141.93	95.29	100.0	Z	250.0	20.0
0.019183	---	39.45	121.93	82.48	100.0	Z	250.0	20.0
0.036771	42.68	---	136.28	93.60	100.0	Z	0.0	20.0
0.037003	---	32.73	116.23	83.50	100.0	Z	81.0	20.0
0.062518	---	29.23	111.67	82.45	100.0	Z	143.0	20.0
0.062576	35.56	---	131.67	96.11	100.0	Z	143.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

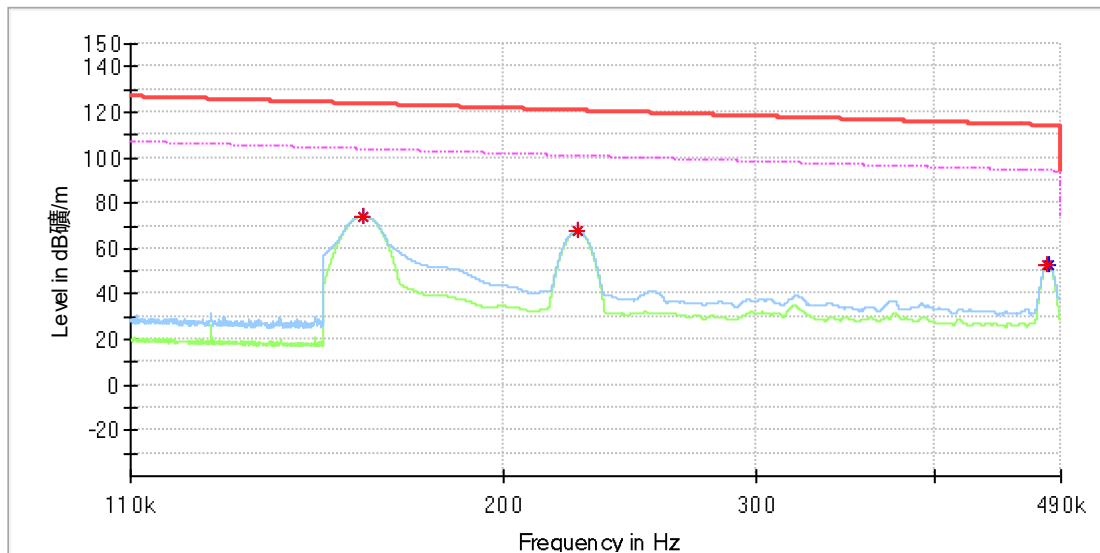


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.159650	74.35	---	123.54	49.19	100.0	X	260.0	20.0
0.159750	---	74.28	103.53	29.25	100.0	X	260.0	20.0
0.225200	67.73	---	120.55	52.82	100.0	X	158.0	20.0
0.225250	---	67.68	100.55	32.87	100.0	X	158.0	20.0
0.479750	53.04	---	113.98	60.94	100.0	X	260.0	20.0
0.479900	---	52.81	93.98	41.18	100.0	X	260.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

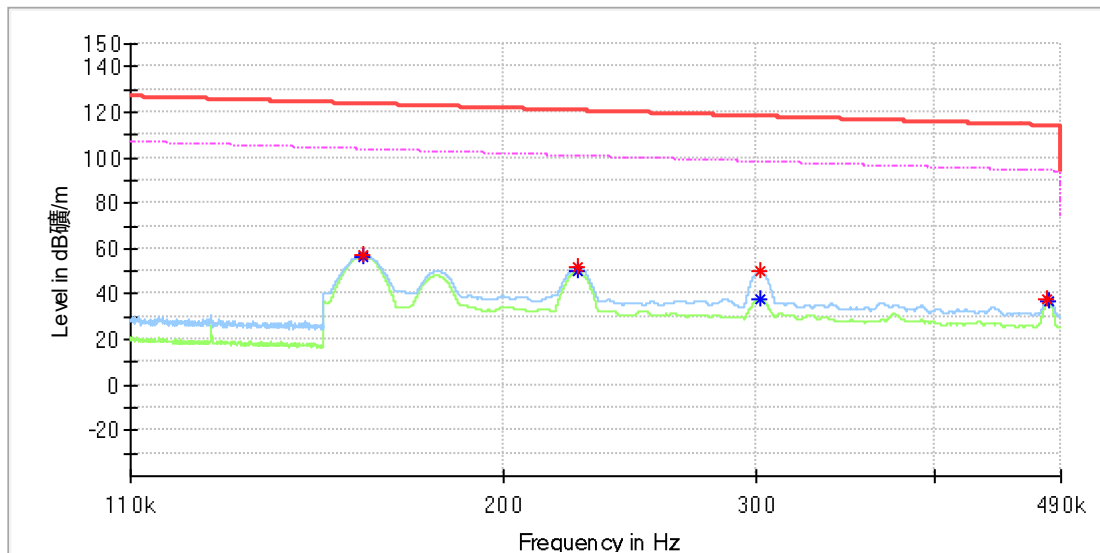


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.159650	56.94	---	123.54	66.60	100.0	Y	350.0	20.0
0.159800	---	56.59	103.53	46.93	100.0	Y	350.0	20.0
0.225300	52.15	---	120.55	68.40	100.0	Y	321.0	20.0
0.225300	---	49.78	100.55	50.77	100.0	Y	321.0	20.0
0.302350	49.95	---	117.99	68.04	100.0	Y	321.0	20.0
0.302700	---	38.04	97.98	59.94	100.0	Y	321.0	20.0
0.479600	37.97	---	113.99	76.01	100.0	Y	350.0	20.0
0.479950	---	36.59	93.98	57.39	100.0	Y	350.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

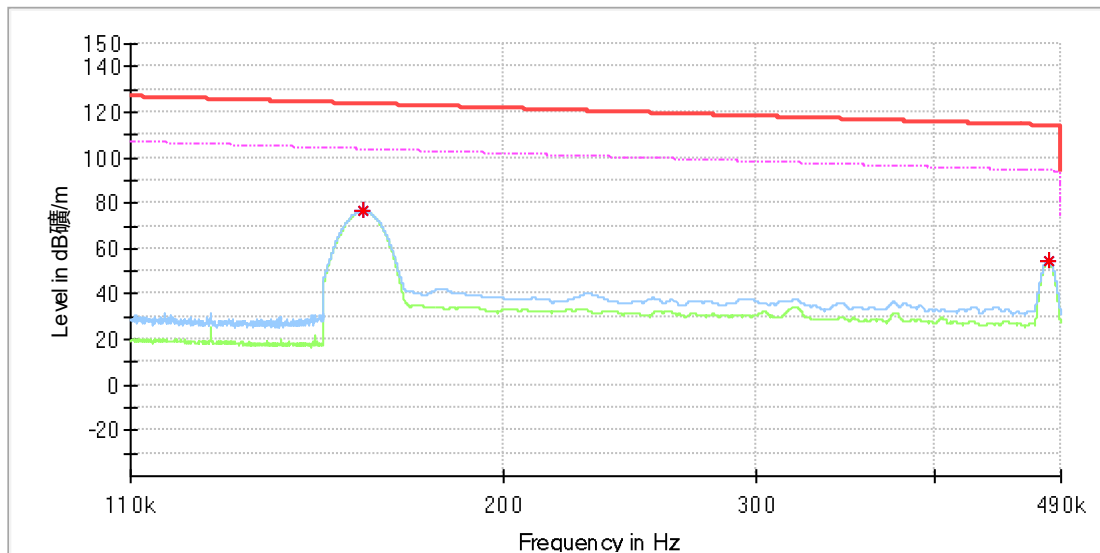


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.159650	76.51	---	123.54	47.02	100.0	Z	260.0	20.0
0.159700	---	76.45	103.53	27.08	100.0	Z	260.0	20.0
0.479900	---	54.72	93.98	39.26	100.0	Z	232.0	20.0
0.480250	54.86	---	113.97	59.11	100.0	Z	232.0	20.0

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

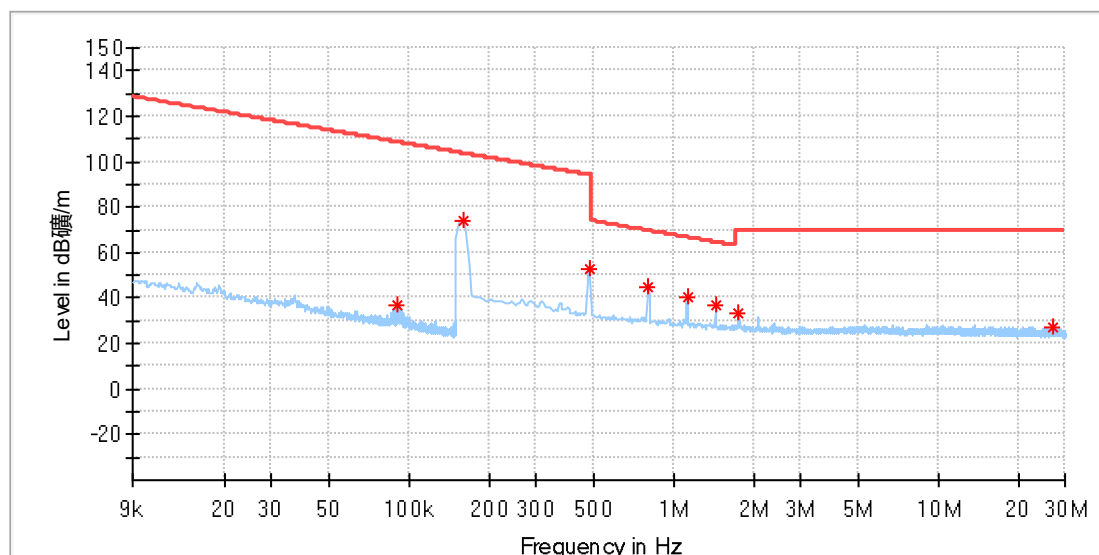

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.089773	37.16	108.53	71.38	100.0	X	306.0	19.9
0.158780	74.30	103.58	29.28	100.0	X	257.0	19.9
0.479228	52.87	93.99	41.12	100.0	X	257.0	19.9
0.795287	45.09	69.61	24.52	100.0	X	257.0	19.9
1.120125	40.20	66.64	26.43	100.0	X	257.0	19.9
1.436184	36.56	64.49	27.92	100.0	X	311.0	20.0
1.756632	33.40	69.50	36.10	100.0	X	257.0	20.0
27.010610	27.46	69.50	42.04	100.0	X	117.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

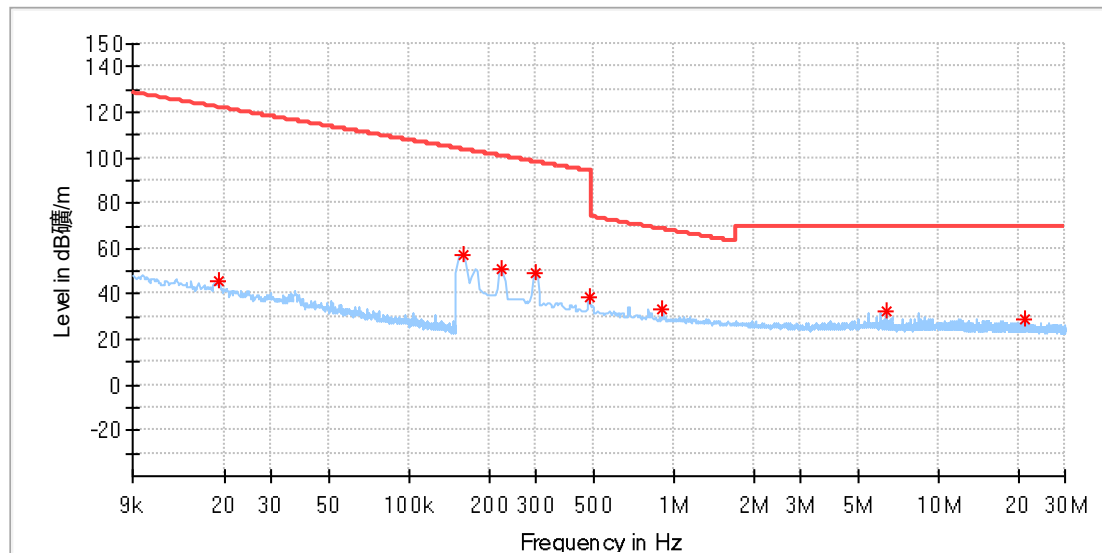

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	45.99	121.94	75.94	100.0	Y	88.0	19.9
0.158780	57.35	103.58	46.23	100.0	Y	345.0	19.9
0.224625	51.03	100.57	49.54	100.0	Y	316.0	19.9
0.299250	49.66	98.08	48.42	100.0	Y	316.0	19.9
0.479228	38.71	93.99	55.28	100.0	Y	345.0	19.9
0.905030	33.77	68.49	34.71	100.0	Y	316.0	19.9
6.308757	32.10	69.50	37.40	100.0	Y	60.0	20.1
20.996713	29.03	69.50	40.47	100.0	Y	4.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

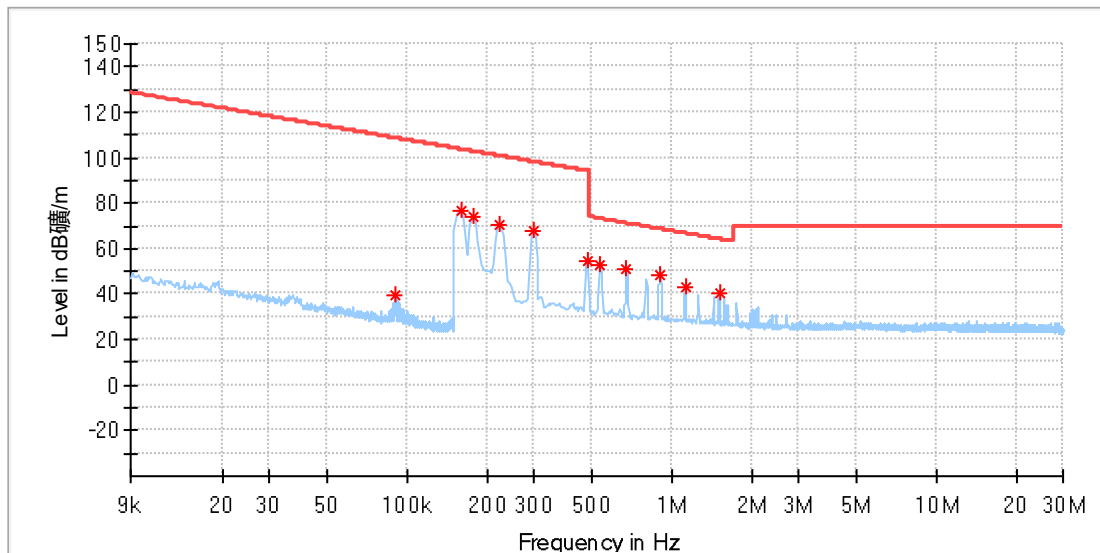

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.089874	39.41	108.52	69.12	100.0	Z	311.0	19.9
0.158780	76.42	103.58	27.16	100.0	Z	246.0	19.9
0.176338	74.21	102.67	28.47	100.0	Z	138.0	19.8
0.224625	70.63	100.57	29.94	100.0	Z	138.0	19.9
0.299250	67.56	98.08	30.52	100.0	Z	84.0	19.9
0.479228	54.90	93.99	39.09	100.0	Z	246.0	19.9
0.536294	52.83	73.02	20.19	100.0	Z	138.0	19.9
0.672375	50.95	71.06	20.11	100.0	Z	138.0	19.9
0.905030	48.50	68.49	19.98	100.0	Z	84.0	19.9
1.124515	42.64	66.61	23.97	100.0	Z	138.0	19.9
1.506419	40.65	64.07	23.42	100.0	Z	84.0	20.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

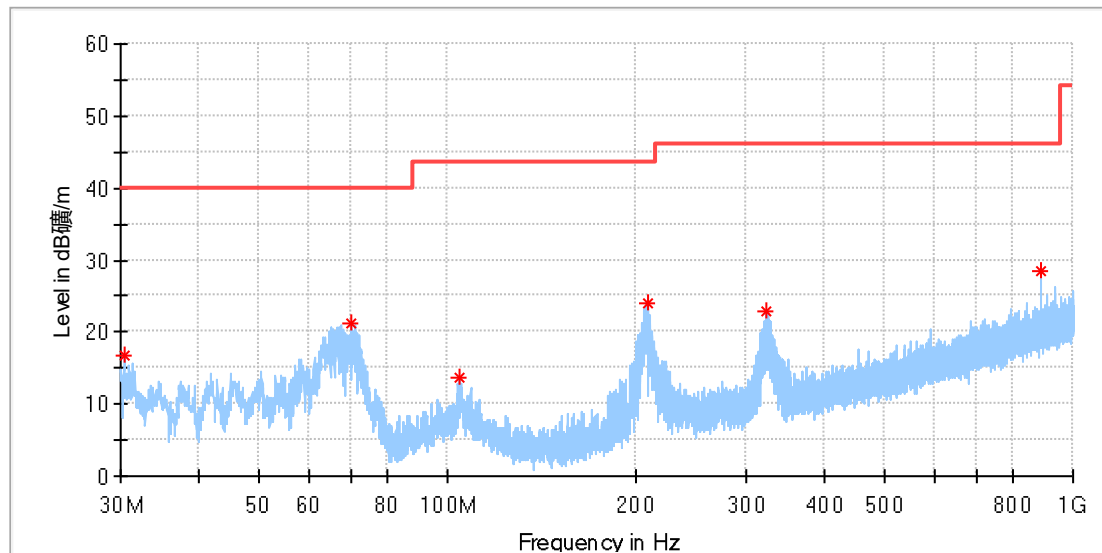

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.373077	16.72	40.00	23.28	100.0	H	43.0	-23.0
70.180385	21.16	40.00	18.84	100.0	H	43.0	-22.0
104.316923	13.56	43.50	29.94	100.0	H	6.0	-18.9
208.703846	24.04	43.50	19.46	100.0	H	61.0	-18.9
323.275769	22.91	46.00	23.09	100.0	H	267.0	-15.6
890.986923	28.43	46.00	17.57	100.0	H	52.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 10W WIRELESS CHARGING PHONE HOLDER
Model: EE7321
Test Mode: Standby
Order No/Sample No: 168561682/A004028360-007
Test Voltage: Adaptor
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

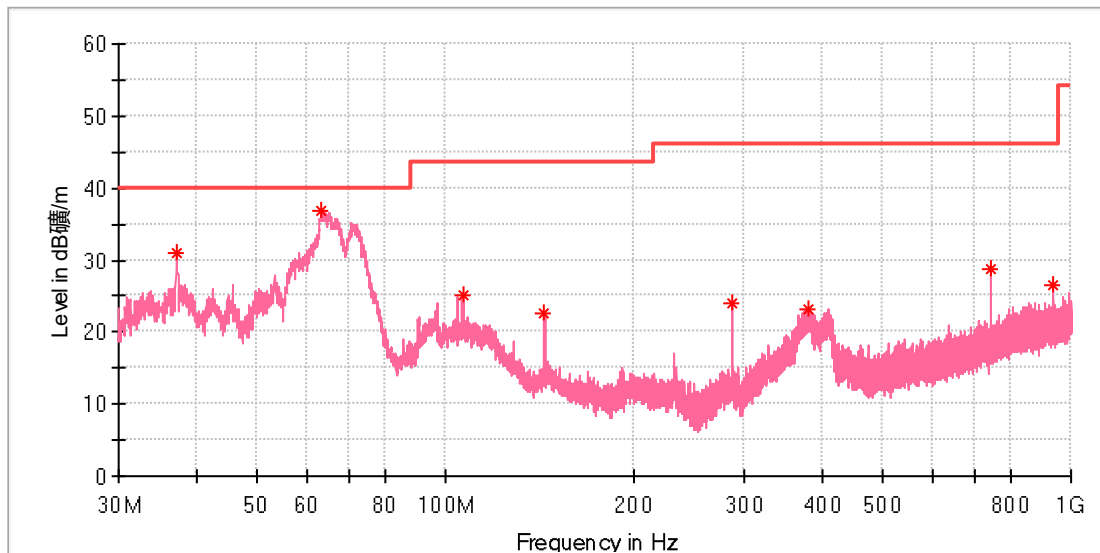

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.088462	31.01	40.00	8.99	100.0	V	271.0	-21.2
63.278462	36.97	40.00	3.03	100.0	V	358.0	-19.8
106.406154	25.21	43.50	18.29	100.0	V	25.0	-19.0
144.012308	22.68	43.50	20.82	100.0	V	206.0	-22.4
288.057308	24.11	46.00	21.89	100.0	V	311.0	-16.6
379.237308	23.18	46.00	22.82	100.0	V	358.0	-14.2
742.502308	28.77	46.00	17.23	100.0	V	254.0	-7.2
938.442308	26.55	46.00	19.45	100.0	V	0.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---