

Prüfbericht-Nr.: Test report no.:	CN25BH6F 002	Auftrags-Nr.: Order no.:	168563345	Seite 1 von 22 Page 1 of 22	
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-07-07		
Auftraggeber: Client:	UP Global Sourcing UK Ltd. Manor Mill, Victoria Street, Chadderton, Oldham, OL9 0DD, United Kingdom				
Prüfgegenstand: Test item:	OVER EAR EARBUDS				
Bezeichnung / Typ-Nr.: Identification / Type no.:	084112-991154553-0002, 56443, EE8152				
Auftrags-Inhalt: Order content:	Test Report				
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15, Subpart C, Section 15.247				
Wareneingangsdatum: Date of sample receipt:	2025-07-14	Please refer to Photo Document			
Prüfmuster-Nr.: Test sample no.:	A004035270-022~024 A004045072-001~004				
Prüfzeitraum: Testing period:	2025-07-28 - 2025-08-07				
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: Test result*:	Pass				
geprüft von: tested by:			genehmigt von: authorized by:		
Datum: Date:	2025-11-28	Signed by: Lin Lin		Ausstellungsdatum: Issue date:	2025-11-28
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / Other:	FCC ID: 2AAR2EE8152				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged				
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht-Nr.: CN25BH6F 002
Test report no.:

Seite 2 von 22
Page 2 of 22

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 99% BANDWIDTH

RESULT: Pass

5.1.4 20dB BANDWIDTH

RESULT: Pass

5.1.5 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.6 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.7 TIME OF OCCUPANCY

RESULT: Pass

5.1.8 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.9 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>14</i>
5.1.3	<i>99% Bandwidth</i>	<i>15</i>
5.1.4	<i>20dB Bandwidth</i>	<i>16</i>
5.1.5	<i>Carrier Frequency Separation.....</i>	<i>17</i>
5.1.6	<i>Number of Hopping Frequency</i>	<i>18</i>
5.1.7	<i>Time of Occupancy</i>	<i>19</i>
5.1.8	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>20</i>
5.1.9	<i>Radiated Spurious Emission</i>	<i>21</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	22
7	LIST OF TABLES.....	22

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Bluetooth BR & EDR

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Registration No.: 694916

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2024-09-26	2025-09-25
OSP	R&S	OSP 150	101017	2024-10-31	2025-10-30
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2024-10-31	2025-10-30
Wideband Power Sensor	R&S	NRP-Z81	105677	2024-09-26	2025-09-25
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2024-09-29	2025-09-28
Signal Analyzer	R&S	FSV 40	101439	2024-09-29	2025-09-28
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2024-09-29	2025-09-28
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-09-29	2025-09-28
Amplifier	R&S	SCU-18F	180070	2024-09-29	2025-09-28
Amplifier	R&S	SCU40A	100475	2024-09-29	2025-09-28
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2025-09-27
Double-Ridged Antenna (1-18 GHz)	ETS-LINDGREN	3117	00218717	2024-09-28	2025-09-27
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-09-28	2025-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2025-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:Seite 7 von 22
Page 7 of 22

3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13
--------------------------	-----------	--------	--------------	------------	------------

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUTs are OVER EAR EARBUDS which consist of a left earbud, a right earbud and a charging box. The left and right earbuds support Classic Bluetooth wireless technology.

Note: 1. When the EUT is charged, other functions cannot be used.

2. Full test left earbud and additional test RSE item for right earbud in this report.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	OVER EAR EARBUDS
Type Designation:	084112-991154553-0002, 56443, EE8152 Note: All models covered in this test report are the same except for the model's name.
FCC ID:	2AAR2EE8152
Operating Voltage (for earbuds):	Internal battery operated (3.7Vdc, 30mAh) or Charge by charging box
Operating Voltage (for charging box):	Internal battery operated (3.7Vdc, 300mAh) or USB-C operated (PC input voltage 120Vac, 60Hz)
Operating Temperature Range:	0 °C ~ +45 °C
Technical Specification of Bluetooth BR & EDR	
Characteristic	Description
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels
Channel Separation:	1MHz
Antenna Type:	Integral Antenna
Antenna Gain:	2.7 dBi (Provided by the Client)

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

Table 4: RF Channel and Frequency of Bluetooth BR & EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00

5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth BR & EDR

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- Operation Description
- ID Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10:2020.

According to clause 3.1, all tests were performed on model 084112-991154553-0002 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

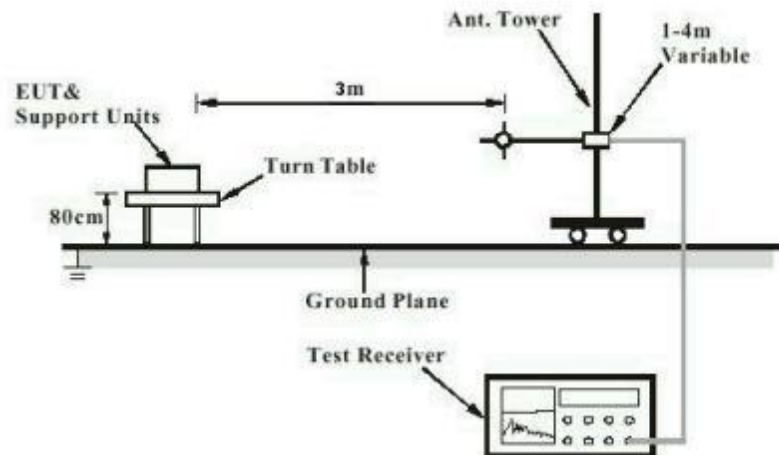


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


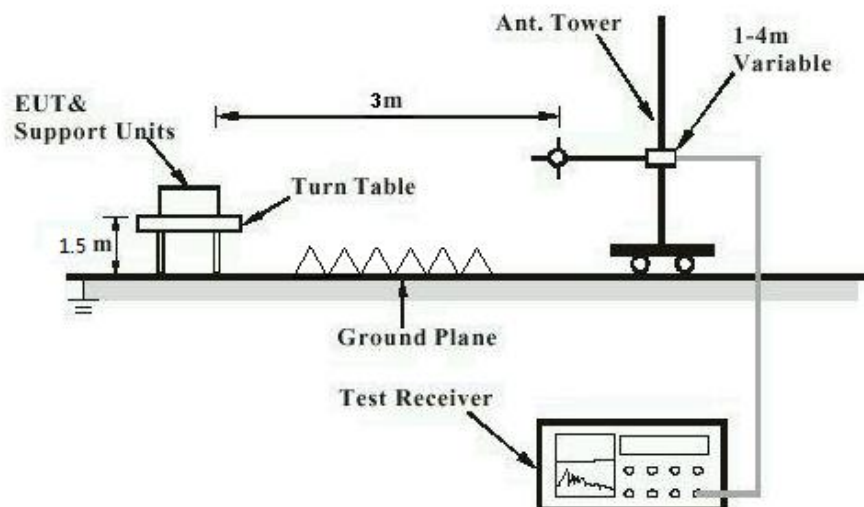


Diagram of Measurement Configuration for Conducted Transmitter Measurement

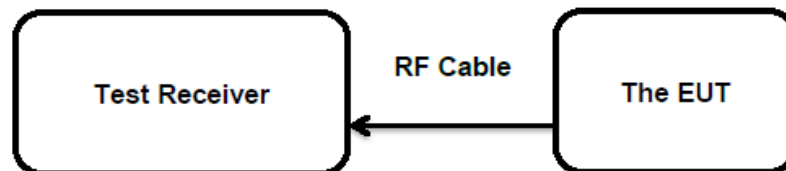

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an Integral antenna, permanent attachment and no consideration of replacement, refer to section 3.2 for details.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:

Seite 14 von 22
Page 14 of 22

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(1)
 Basic standard : ANSI C63.10:2020
 Limits : FHSS < 0.125 Watts
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-07-28
 Input voltage : Battery operated (3.7Vdc)
 Operation mode : A
 Ambient temperature : 23.3 °C
 Relative humidity : 56 %
 Atmospheric pressure : 101 kPa

For details refer to following test result.

Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BR)	2402.0	2.90	0.0019	< 0.125
	2441.0	3.00	0.0020	
	2480.0	4.30	0.0027	
Maximum Measured Value		4.30	0.0027	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	4.50	0.0028	< 0.125
	2441.0	4.60	0.0029	
	2480.0	5.90	0.0039	
Maximum Measured Value		5.90	0.0039	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.7 dBi

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:

Seite 15 von 22
Page 15 of 22

5.1.3 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a)
Basic standard	: ANSI C63.10:2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-28
Input voltage	: Battery operated (3.7Vdc)
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 23.3 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:

Seite 16 von 22
Page 16 of 22

5.1.4 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.10:2020
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-07-28
Input voltage : Battery operated (3.7Vdc)
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 23.3 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:

Seite 17 von 22
Page 17 of 22

5.1.5 Carrier Frequency Separation

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a)(1)
Basic standard	: ANSI C63.10:2020
Limits	: $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-28
Input voltage	: Battery operated (3.7Vdc)
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 23.3 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:

Seite 18 von 22
Page 18 of 22

5.1.6 Number of Hopping Frequency

RESULT:

Pass

Test Specification

Test standard	: FCC part 15.247(a)(1)(iii)
Basic standard	: ANSI C63.10:2020
Limits	: ≥ 15 non-overlapping channels
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-28
Input voltage	: Battery operated (3.7Vdc)
Operation mode	: B
Ambient temperature	: 23.3 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:

Seite 19 von 22
Page 19 of 22

5.1.7 Time of Occupancy

RESULT:

Pass

Test Specification

Test standard	: FCC part 15.247(a)(1)(iii)
Basic standard	: ANSI C63.10:2020
Limits	: < 0.4s
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-28
Input voltage	: Battery operated (3.7Vdc)
Operation mode	: B
Ambient temperature	: 23.3 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25BH6F 002
Test Report No.:Seite 20 von 22
Page 20 of 22

5.1.8 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10:2020
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-07-28
Input voltage	: Battery operated (3.7Vdc)
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 23.3 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN25BH6F 002**
Test Report No.:Seite 21 von 22
Page 21 of 22

5.1.9 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10:2020
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2025-08-05 to 2025-08-07
Input voltage	: Battery operated (3.7Vdc)
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: RF Channel and Frequency of Bluetooth BR & EDR	8
Table 5: List of Accessories and Auxiliary Equipment.....	10
Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR	14

Appendix A: Test Results of Bluetooth BR & EDR

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR	1
APPENDIX A.1: TEST RESULTS OF 99% BANDWIDTH.....	2
<i>BR mode (DH5)</i>	<i>2</i>
<i>EDR mode (3-DH5)</i>	<i>5</i>
APPENDIX A.2: TEST RESULTS OF 20DB BANDWIDTH	8
<i>BR mode (DH5)</i>	<i>8</i>
<i>EDR mode (3-DH5)</i>	<i>11</i>
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	14
<i>BR mode (DH5)</i>	<i>14</i>
<i>EDR mode (3-DH5)</i>	<i>16</i>
APPENDIX A.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	18
<i>BR mode (DH5)</i>	<i>18</i>
<i>EDR mode (3-DH5)</i>	<i>19</i>
APPENDIX A.5: TEST RESULTS OF TIME OF OCCUPANCY.....	20
<i>BR mode (DH5)</i>	<i>20</i>
<i>EDR mode (3-DH5)</i>	<i>23</i>
APPENDIX A.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH	26
<i>BR mode (DH5).....</i>	<i>26</i>
<i>Fixed mode, Band Edge.....</i>	<i>26</i>
<i>Fixed mode, Conducted Spurious Emission</i>	<i>27</i>
<i>Hopping Mode, Band Edge</i>	<i>30</i>
<i>Hopping Mode, Conducted Spurious Emission</i>	<i>31</i>
<i>EDR mode (3-DH5)</i>	<i>32</i>
<i>Fixed mode, Band Edge.....</i>	<i>32</i>
<i>Fixed mode, Conducted Spurious Emission</i>	<i>33</i>
<i>Hopping Mode, Band Edge</i>	<i>36</i>
<i>Hopping Mode, Conducted Spurious Emission</i>	<i>37</i>
APPENDIX A.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	38
<i>30 MHz - 1GHz, Left earbud</i>	<i>38</i>
<i>1GHz - 18GHz, Left earbud</i>	<i>40</i>
<i>30 MHz - 1GHz, Right earbud.....</i>	<i>52</i>
<i>1GHz - 18GHz, Right earbud</i>	<i>54</i>
APPENDIX A.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	66
<i>For Left earbud</i>	<i>66</i>
<i>For Right earbud</i>	<i>70</i>

Appendix A.1: Test Results of 99% Bandwidth

BR mode (DH5)


Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.865000	---	---	2401.547500	2402.412500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

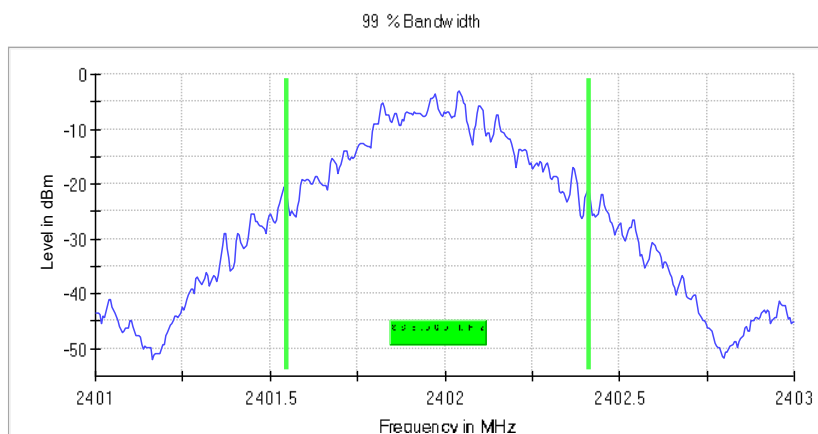

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.30 dB


Occupied Channel Bandwidth 99% (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.865000	---	---	2440.547500	2441.412500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

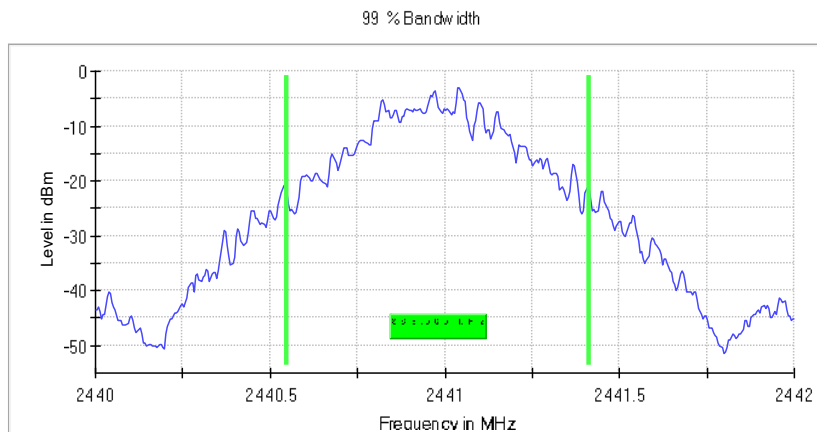

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.15 dB	0.30 dB


Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.865000	---	---	2479.547500	2480.412500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

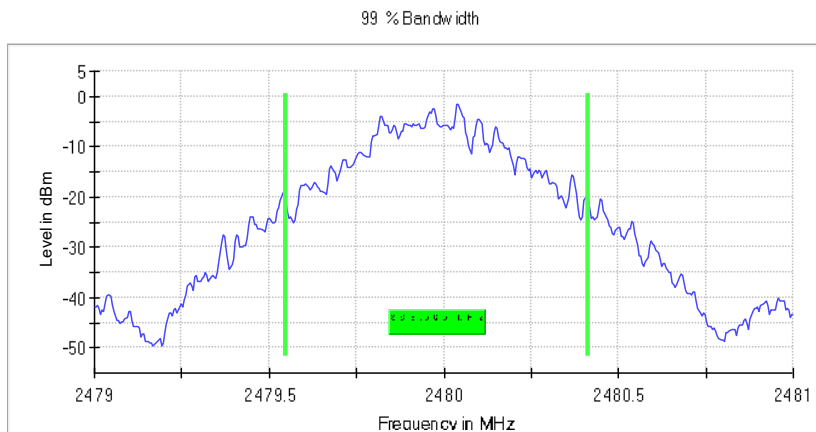

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.29 dB	0.30 dB

EDR mode (3-DH5)


Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.190000	---	---	2401.397500	2402.587500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

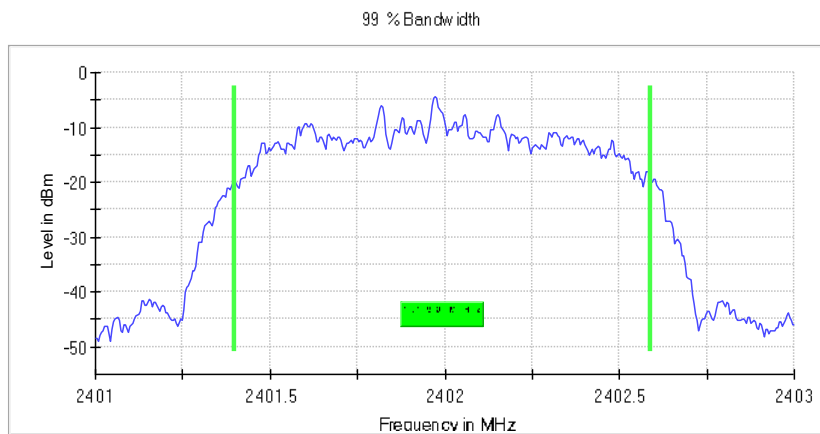

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.30 dB


Occupied Channel Bandwidth 99% (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.190000	---	---	2440.397500	2441.587500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

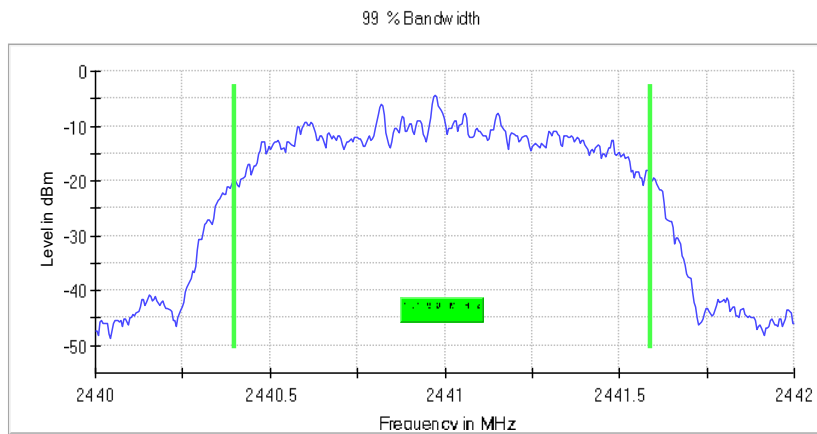

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB


Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.190000	---	---	2479.397500	2480.587500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

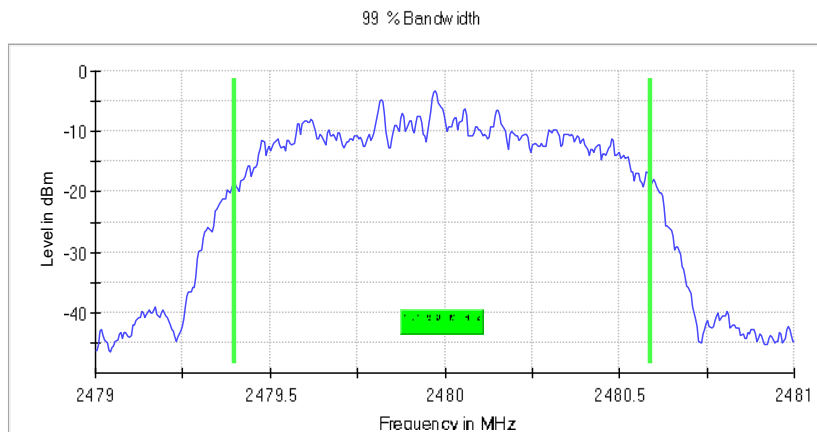

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

Appendix A.2: Test Results of 20dB Bandwidth

BR mode (DH5)


Emission Bandwidth 20 dB (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.930000	---	---	2401.527500	2402.457500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-3.0	PASS

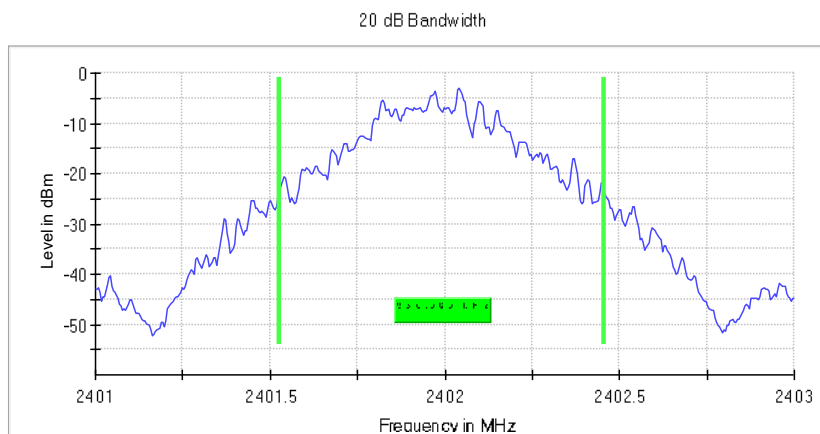

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.50 dB

Emission Bandwidth 20 dB (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.930000	---	---	2440.527500	2441.457500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	-2.9	PASS

20 dB Bandwidth

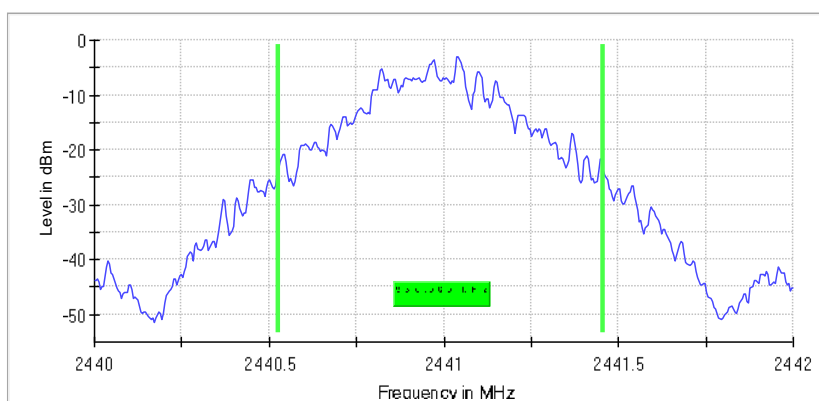

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.13 dB	0.50 dB

Emission Bandwidth 20 dB (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.930000	---	---	2479.527500	2480.457500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-1.6	PASS

20 dB Bandwidth

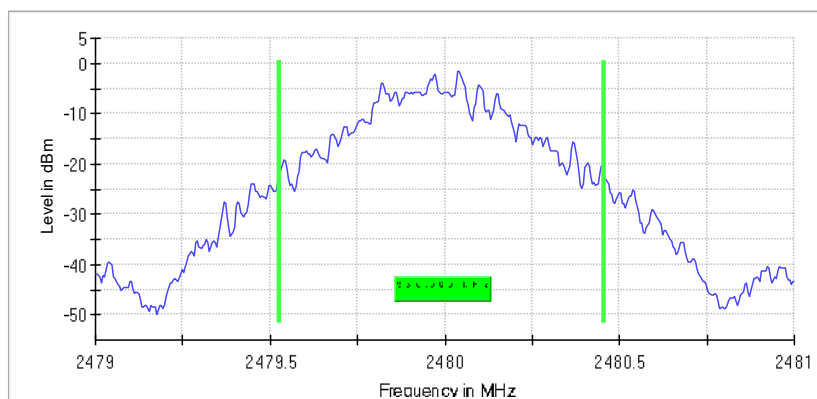

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB

EDR mode (3-DH5)

Emission Bandwidth 20 dB (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.290000	---	---	2401.342500	2402.632500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-4.5	PASS

20 dB Bandwidth

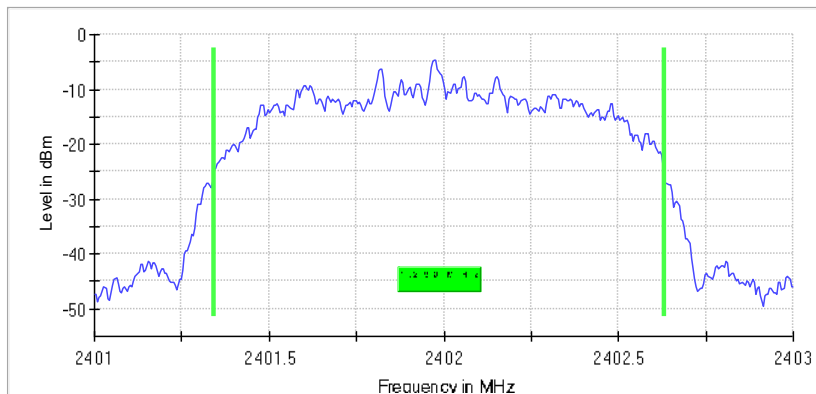

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.26 dB	0.50 dB

Emission Bandwidth 20 dB (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.290000	---	---	2440.342500	2441.632500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	-4.4	PASS

20 dB Bandwidth

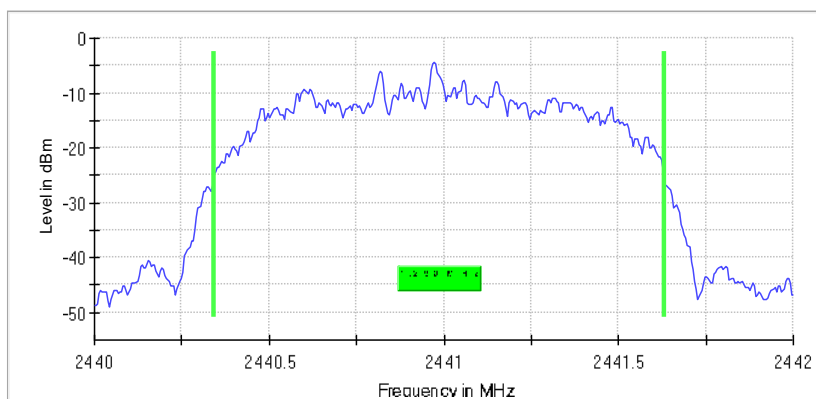

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Emission Bandwidth 20 dB (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.290000	---	---	2479.342500	2480.632500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-3.2	PASS

20 dB Bandwidth

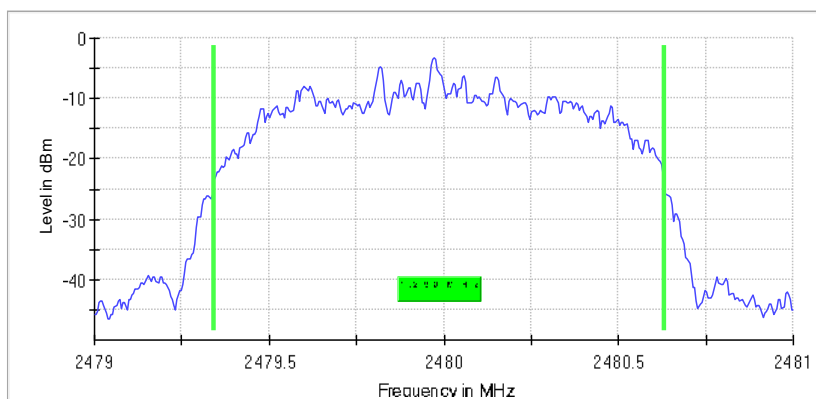

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.23 dB	0.50 dB

Appendix A.3: Test Results of Carrier Frequency Separation


BR mode (DH5)



1DH5_2402MHz

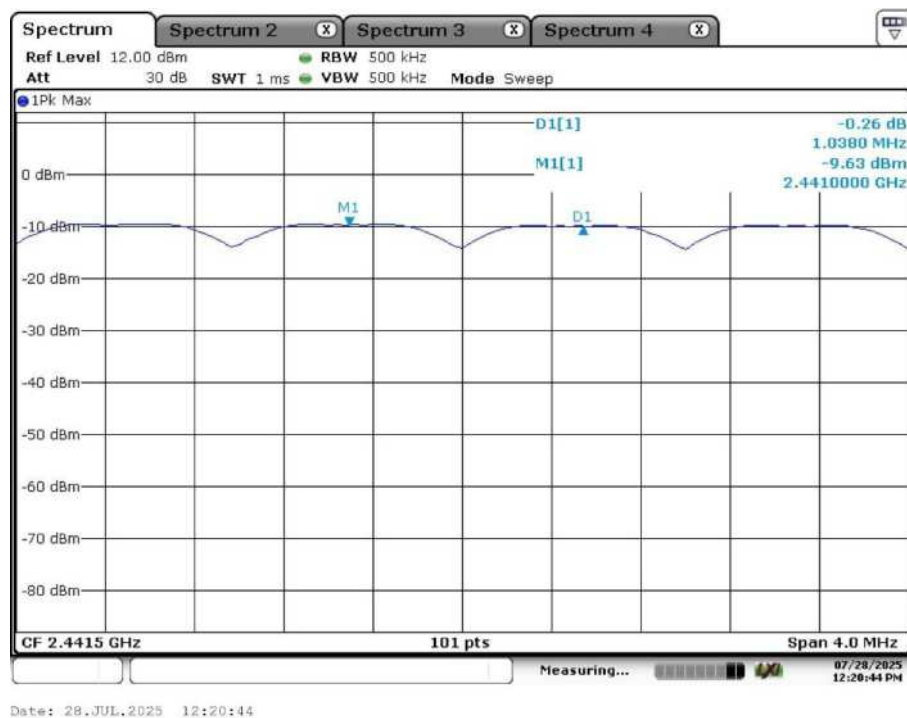

1DH5_2441MHz

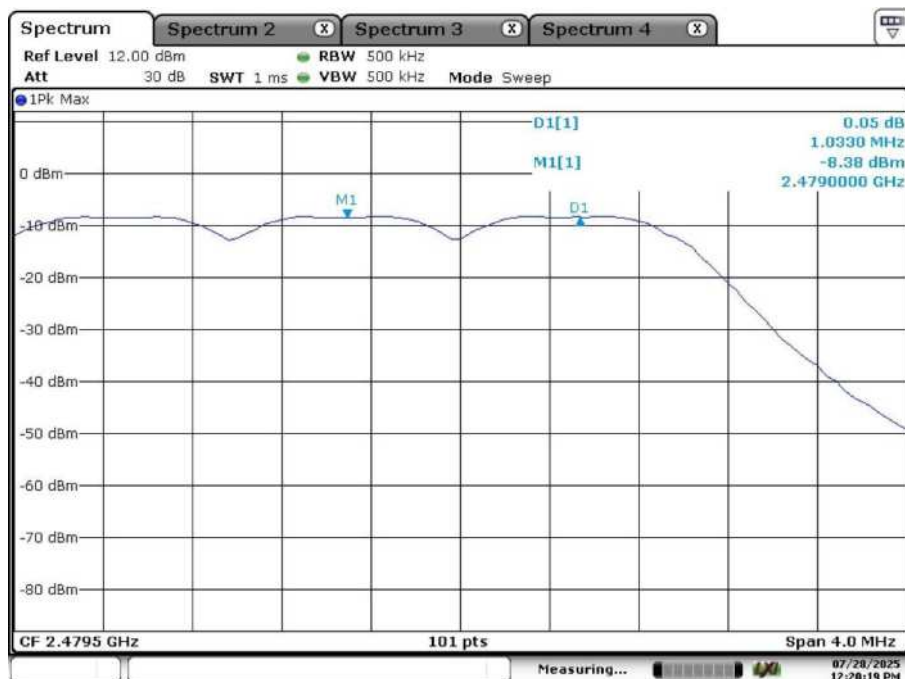


Date: 28.JUL.2025 12:20:19

1DH5_2480MHz


EDR mode (3-DH5)



3DH5_2402MHz

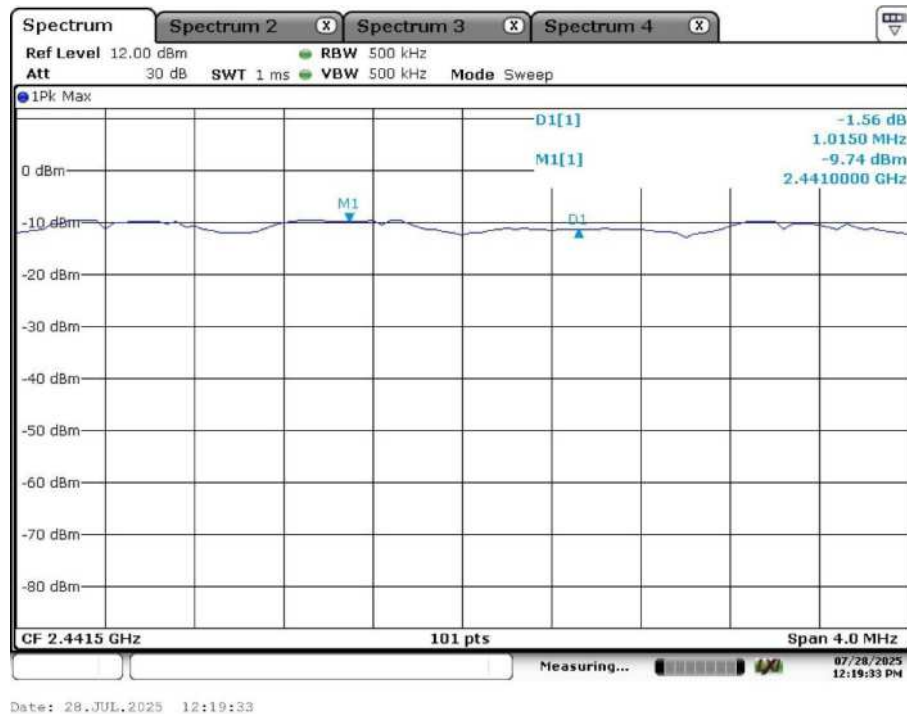

3DH5_2441MHz

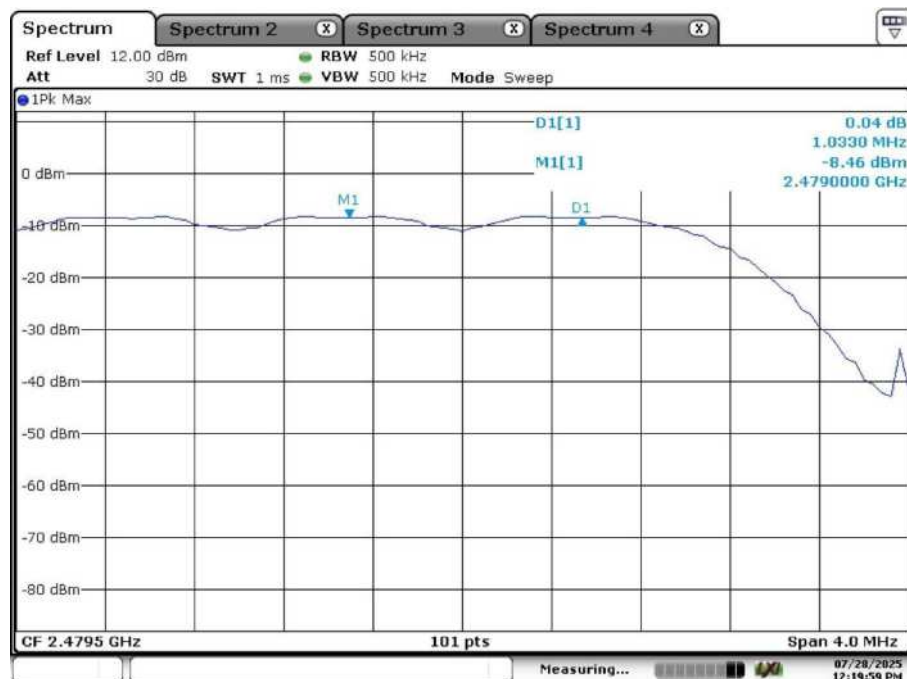

Date: 28.JUL.2025 12:19:59

3DH5_2480MHz

Appendix A.4: Test Results of Number of Hopping Frequency


BR mode (DH5)

Hopping Frequencies (frequency independent; 10.000 dBm; 1 MHz)

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

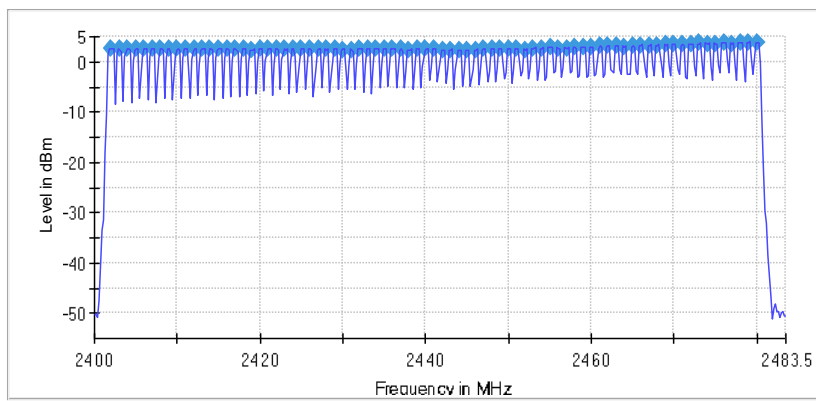

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	65 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.35 dB	0.50 dB

EDR mode (3-DH5)

Hopping Frequencies (frequency independent; 10.000 dBm; 1 MHz)

Channels

Channels	Limit Min	Limit Max	Result
80	15	---	PASS

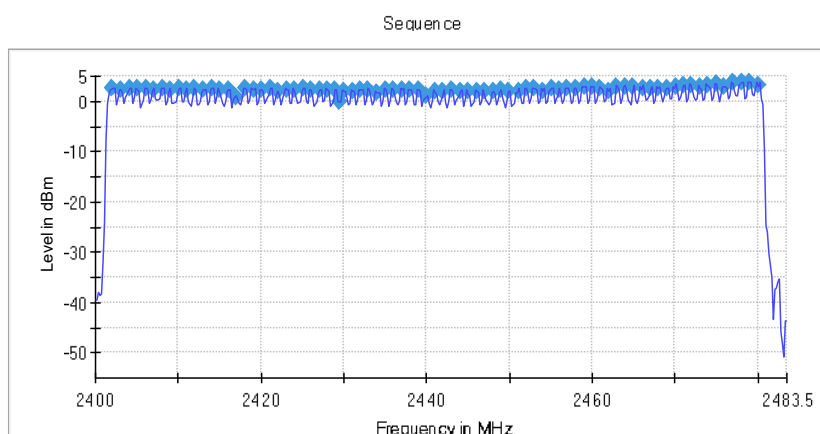

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweeptime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	134 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Appendix A.5: Test Results of Time of Occupancy

BR mode (DH5)

Time of Channel Occupancy (2441 MHz; 10.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	319	132.310	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
7.500	193.750	98.791


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.41	0.42	400.000	0.000	0.413

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.41	0.42	0.413

Time of Channel Occupancy

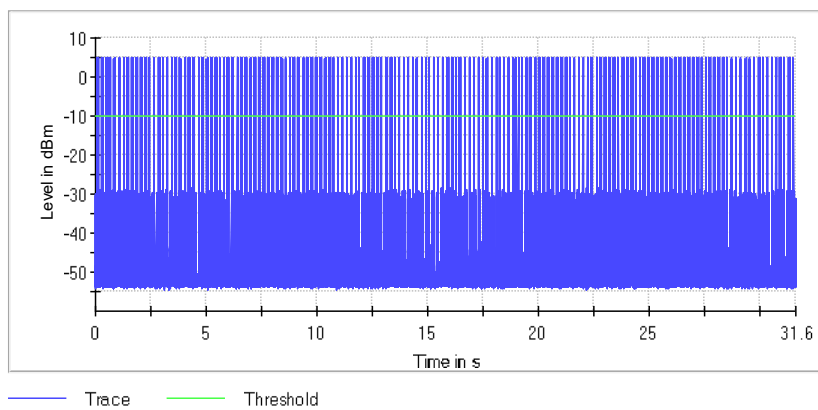

Time of Channel Occupancy(2) (2441 MHz; 10.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	163	273.750	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
7.500	587.490	192.141


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.660	1.670	400.000	0.000	1.669

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.660	1.670	1.669

Time of Channel Occupancy(2)

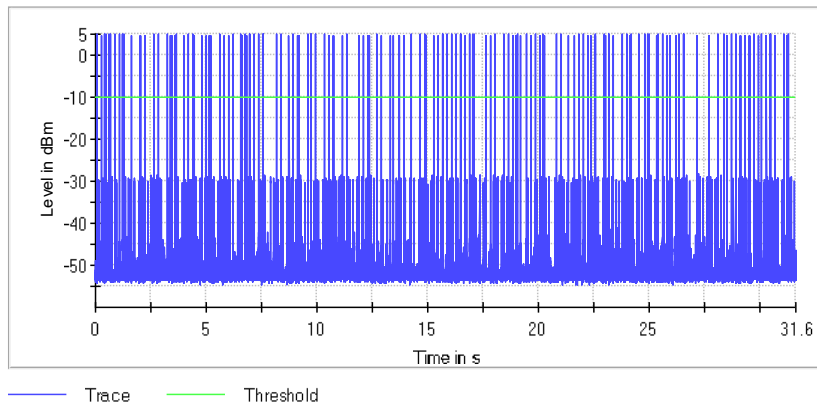

Time of Channel Occupancy(3) (2441 MHz; 10.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	111	326.720	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
7.500	1004.980	281.892


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.910	2.920	400.000	0.000	2.917

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.910	2.920	2.917

Time of Channel Occupancy(3)

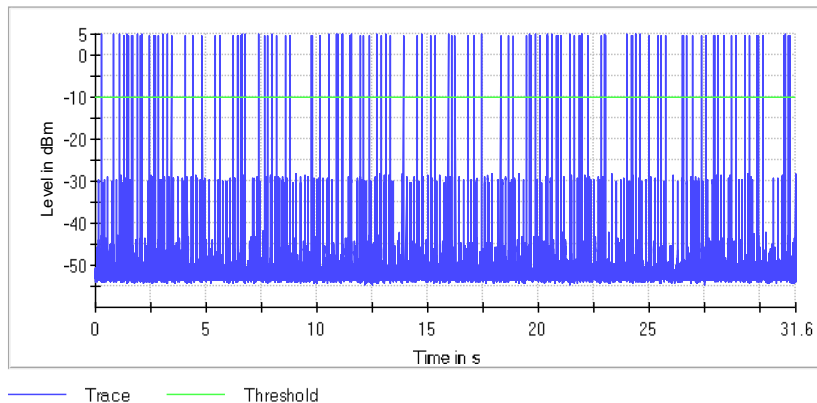

EDR mode (3-DH5)

Time of Channel Occupancy (2441 MHz; 10.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	319	135.210	-10.0

Periode


Min (ms)	Max (ms)	Mean (ms)
7.500	193.750	98.756

Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.41	0.43	400.000	0.000	0.423

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.42	0.43	0.425

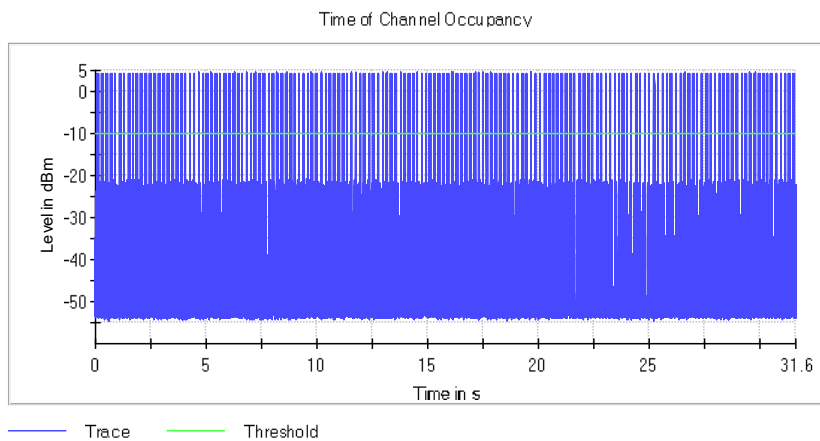

Time of Channel Occupancy(2) (2441 MHz; 10.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	163	272.610	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
7.500	587.490	192.527


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.630	1.680	400.000	0.000	1.662

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.670	1.680	1.675

Time of Channel Occupancy(2)

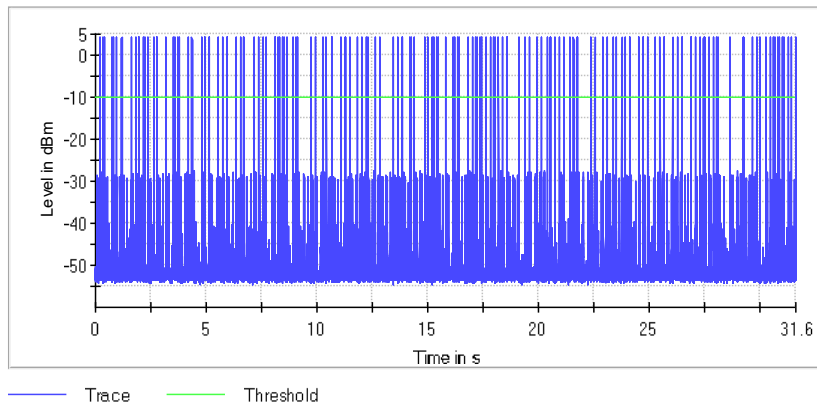

Time of Channel Occupancy(3) (2441 MHz; 10.000 dBm; 1 MHz)

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	105	307.160	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
22.500	1968.710	297.795


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.860	2.920	400.000	0.000	2.898

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.920	2.930	2.926

Time of Channel Occupancy(3)

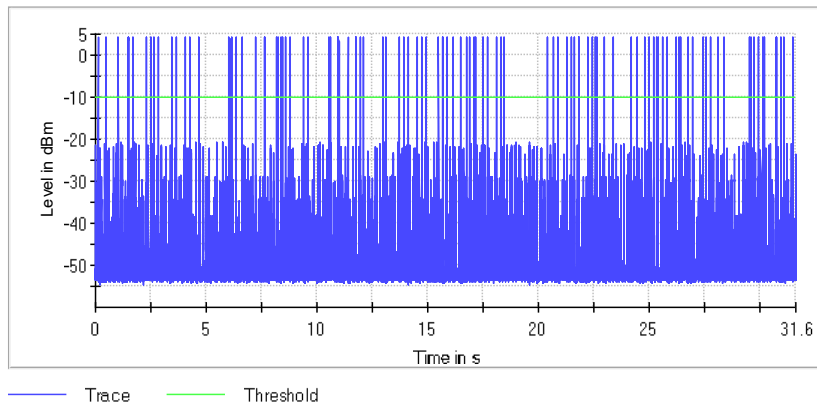


Appendix A.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


BR mode (DH5)

Fixed mode, Band Edge



Low Channel

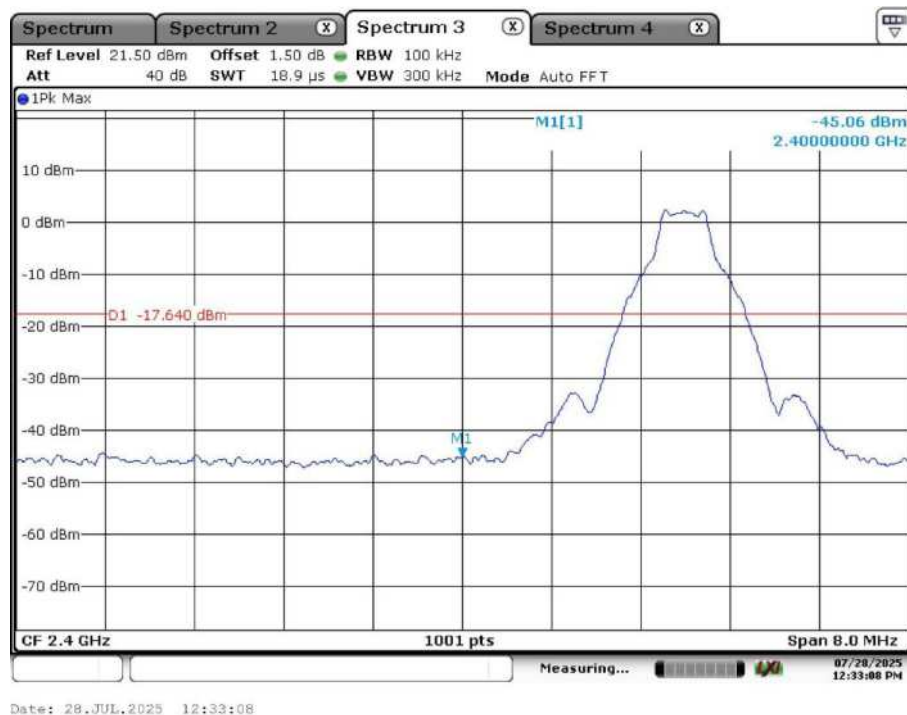



High Channel

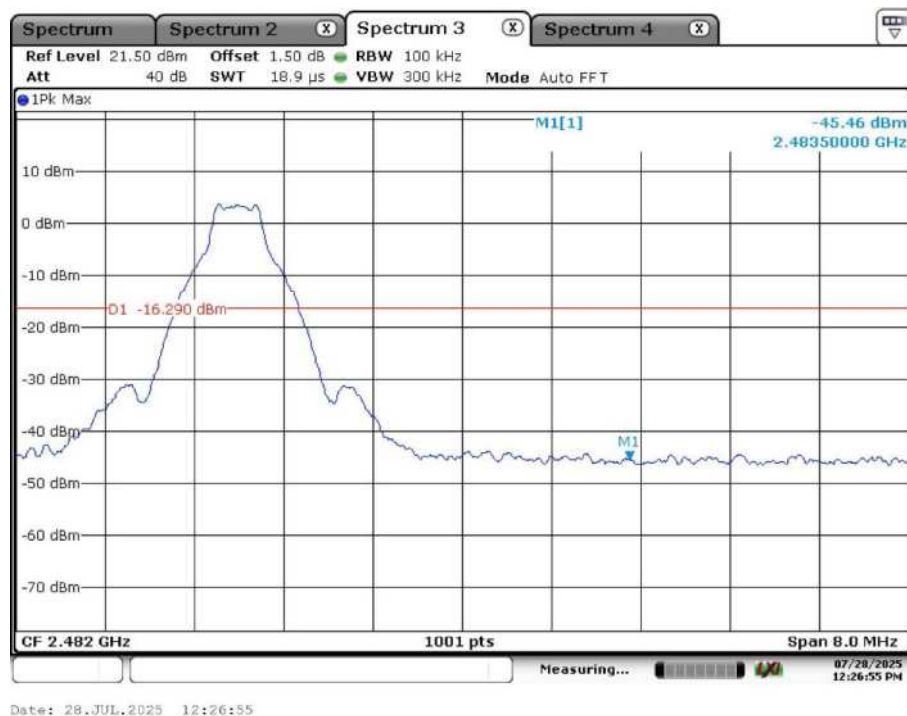

Middle Channel

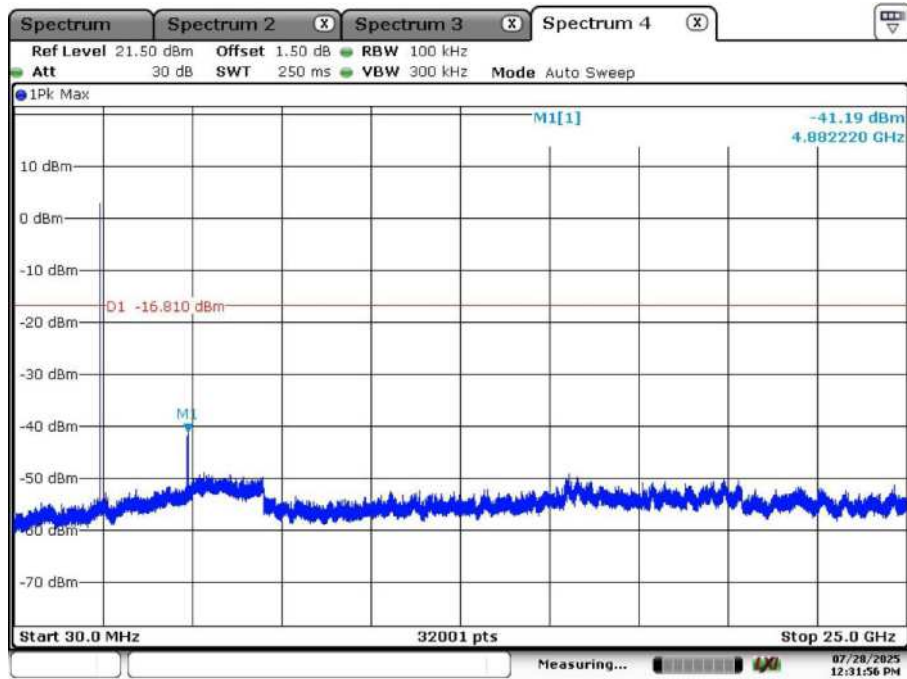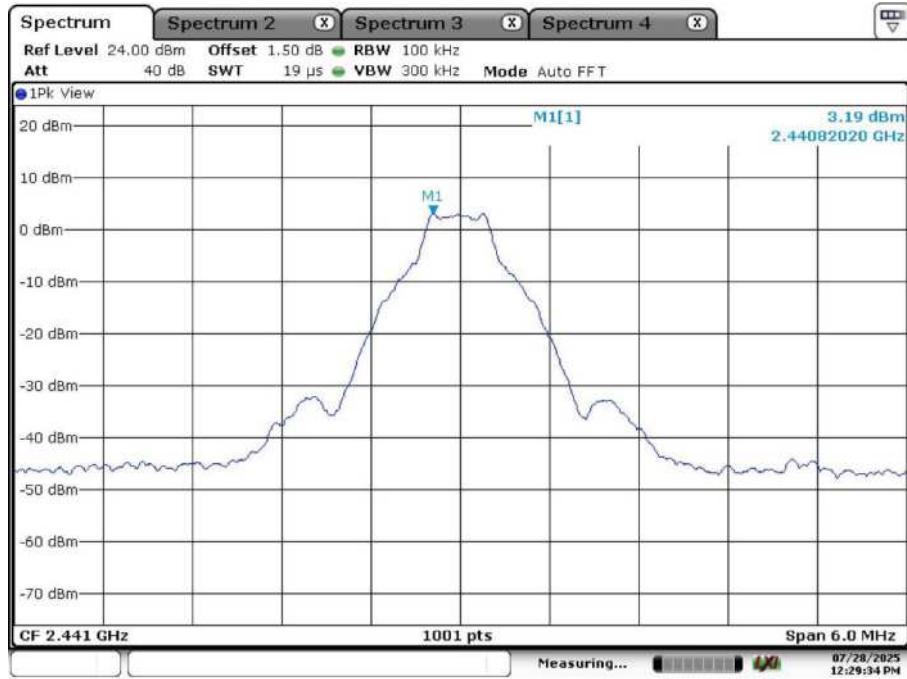


High Channel

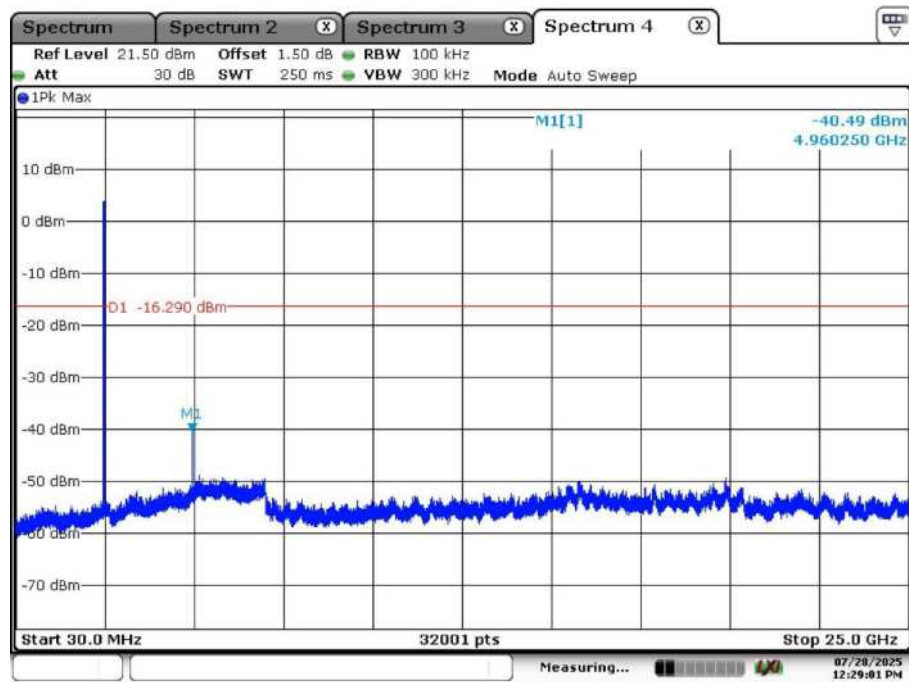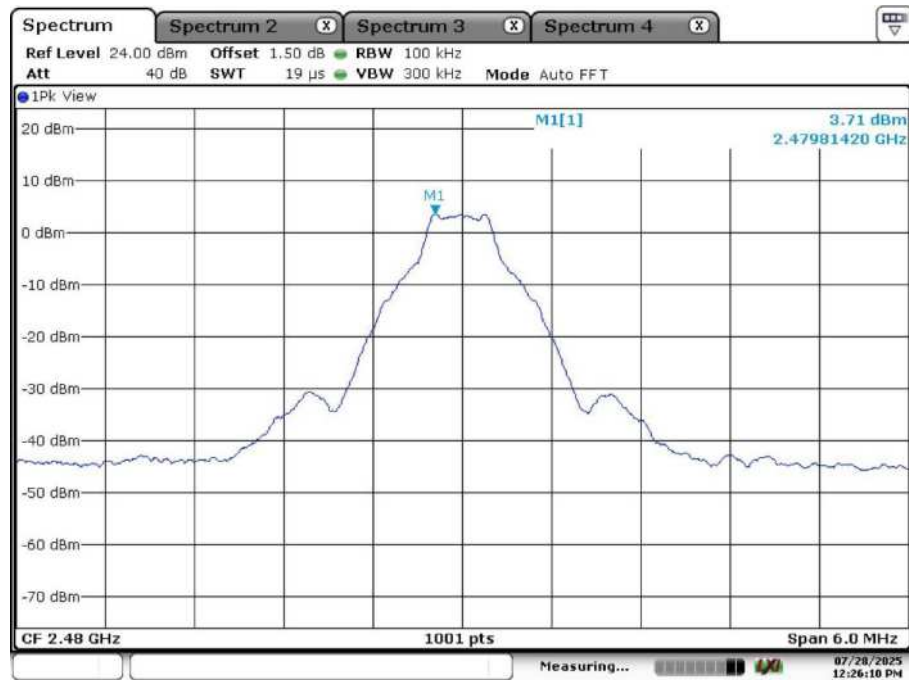


Hopping Mode, Band Edge


Low Channel

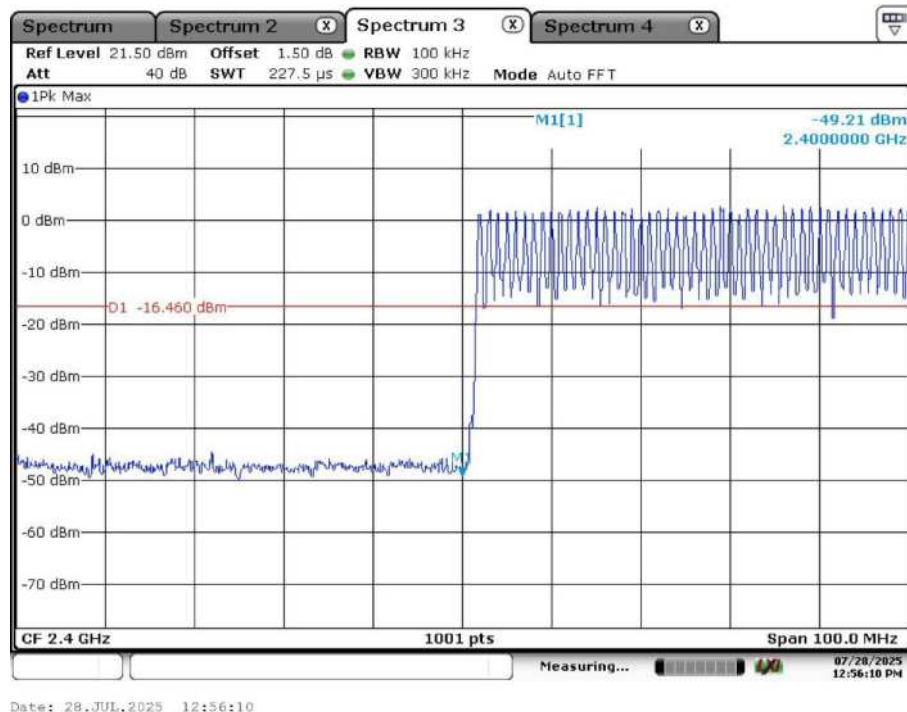


High Channel

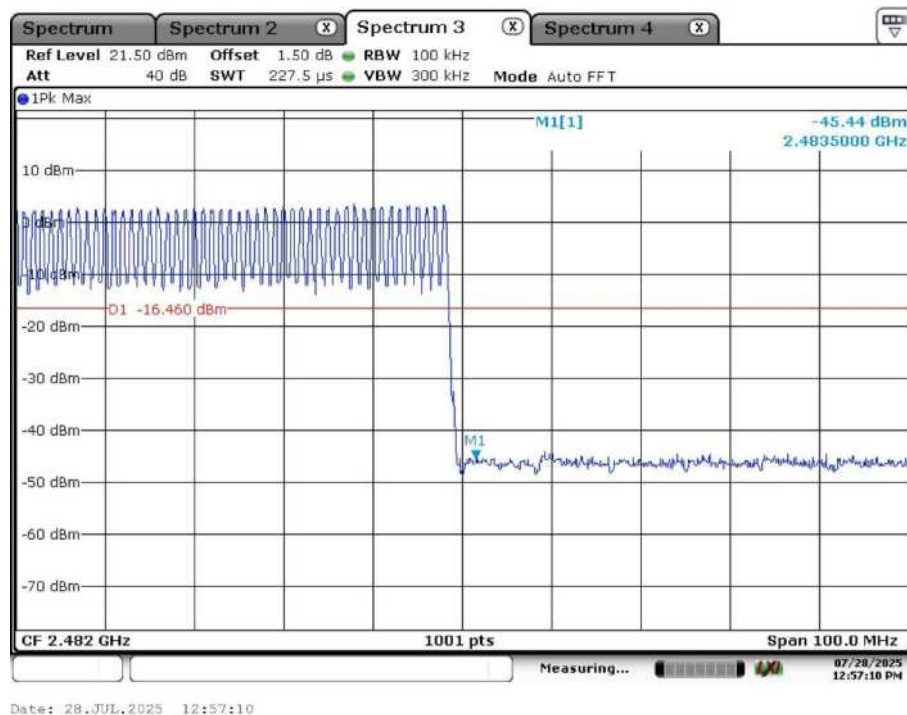

Hopping Mode, Conducted Spurious Emission

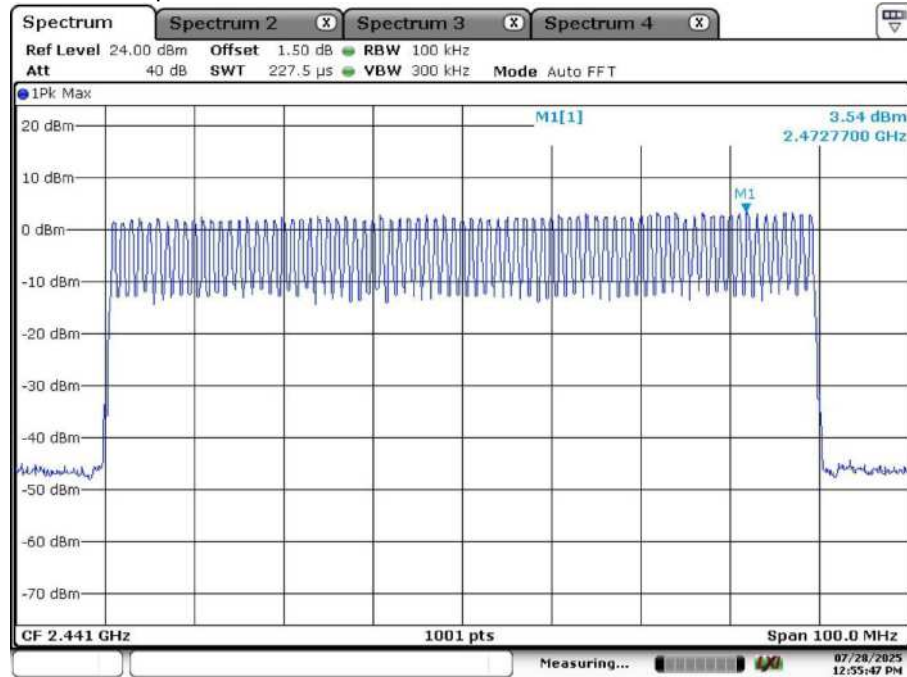

Date: 28.JUL.2025 12:55:47

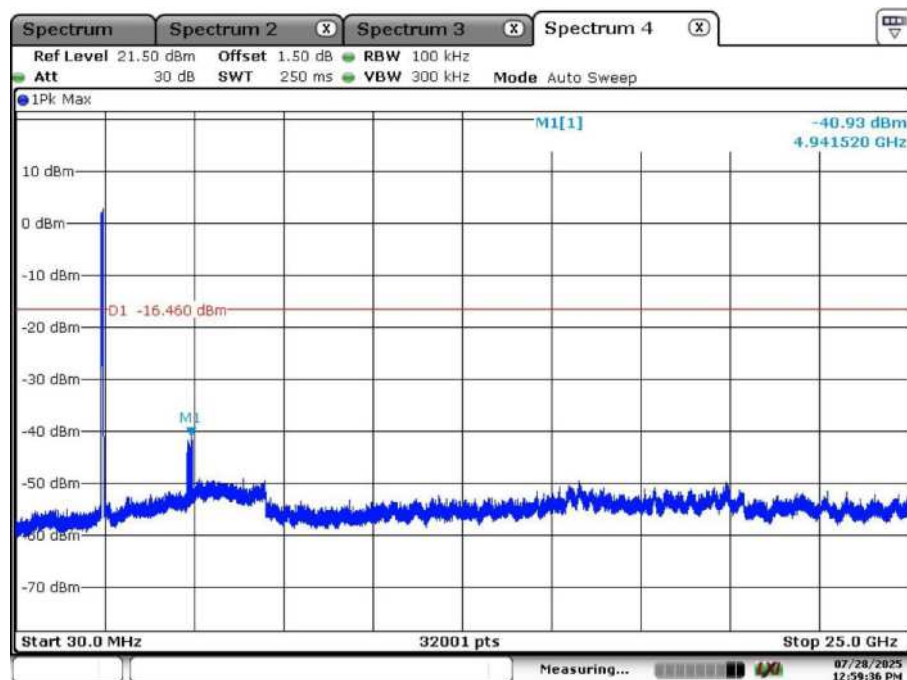


Date: 28.JUL.2025 12:59:36


EDR mode (3-DH5)

Fixed mode, Band Edge

Low Channel


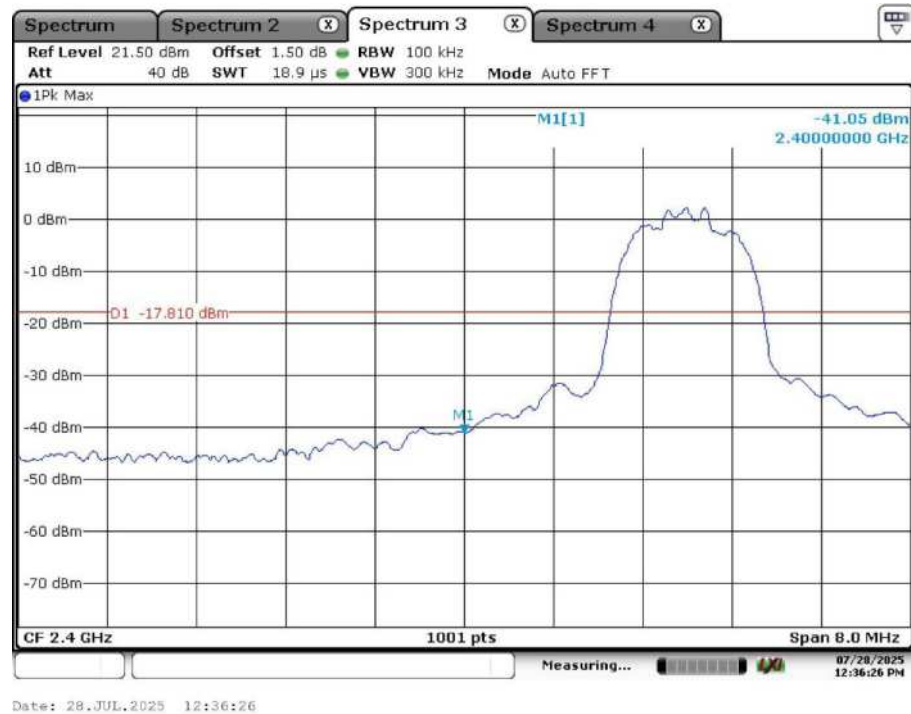


High Channel

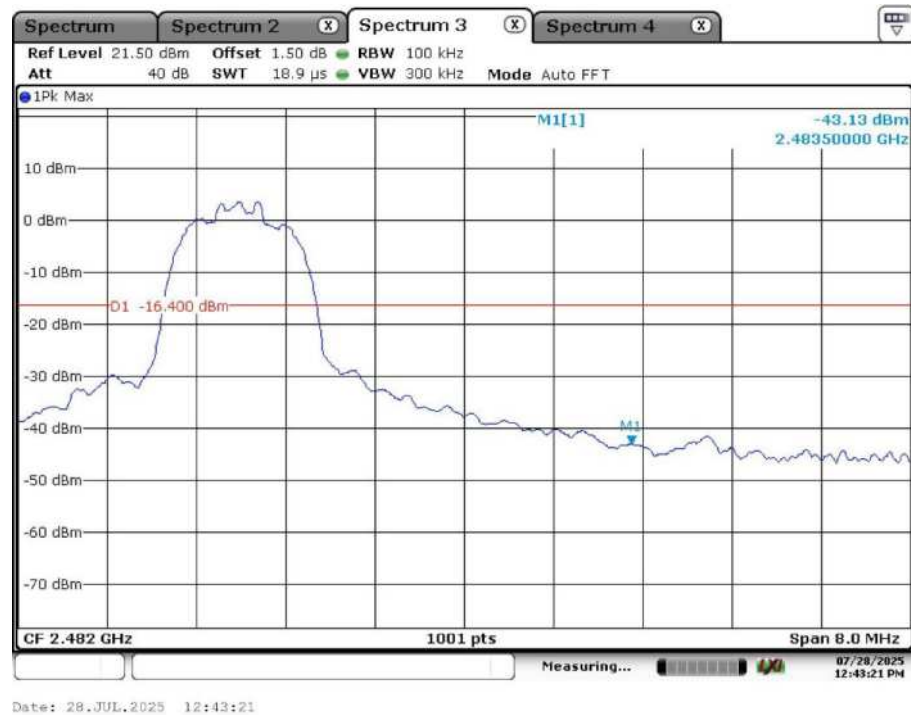


Fixed mode, Conducted Spurious Emission


Low Channel

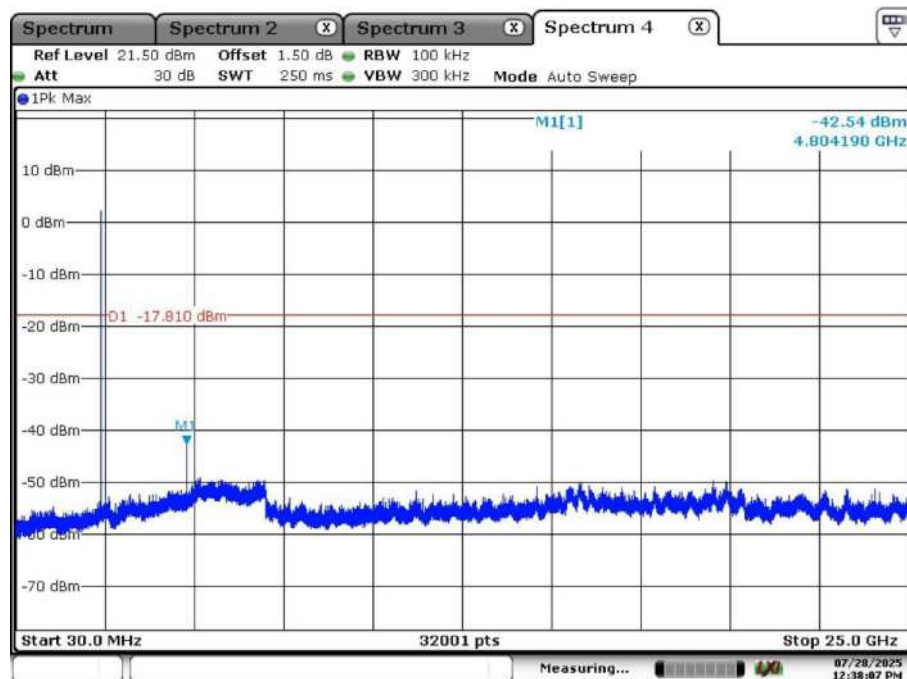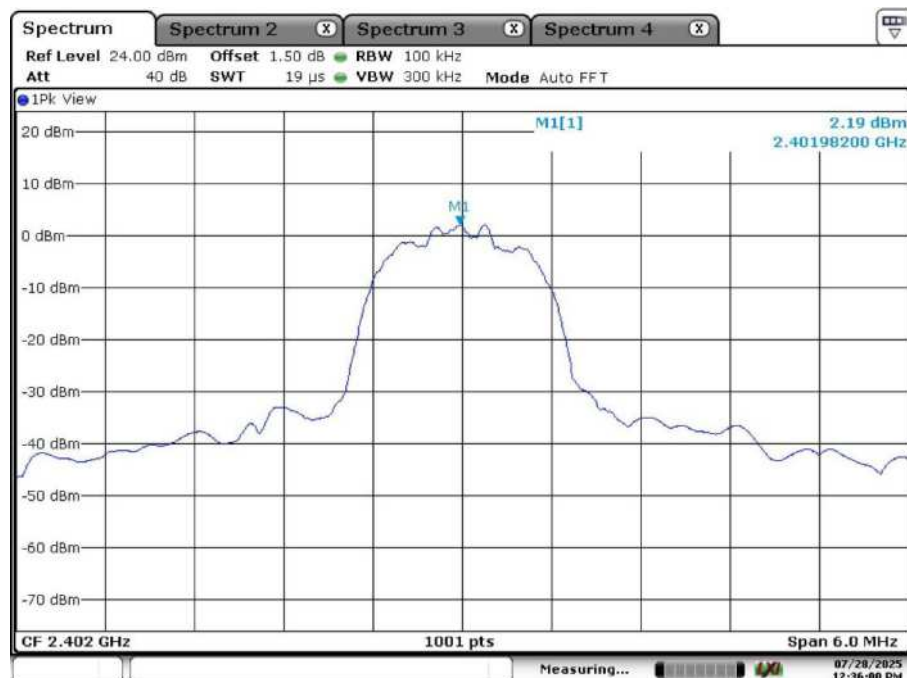

Middle Channel

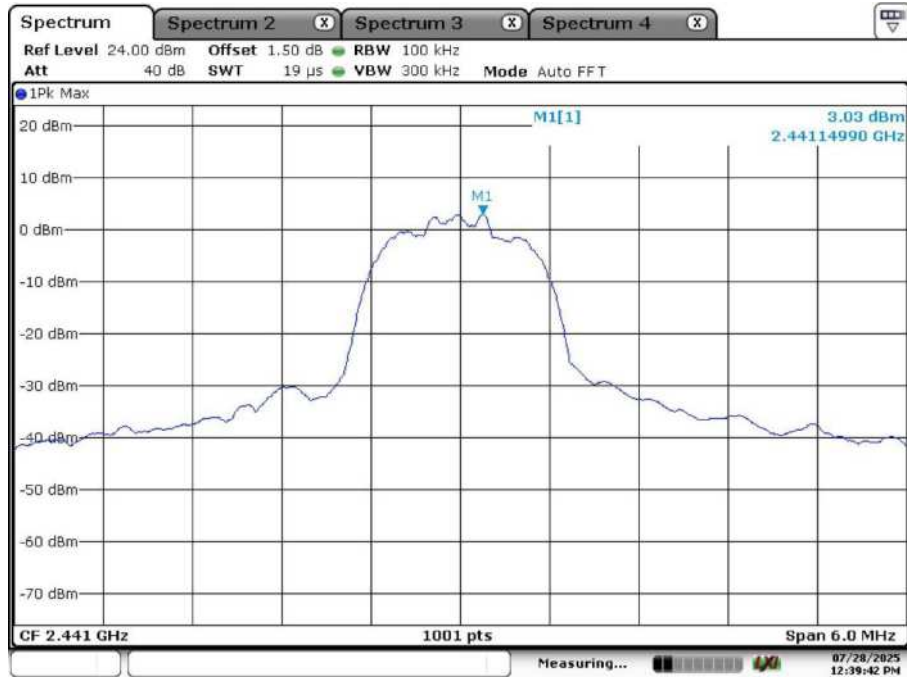


Date: 28.JUL.2025 12:39:42

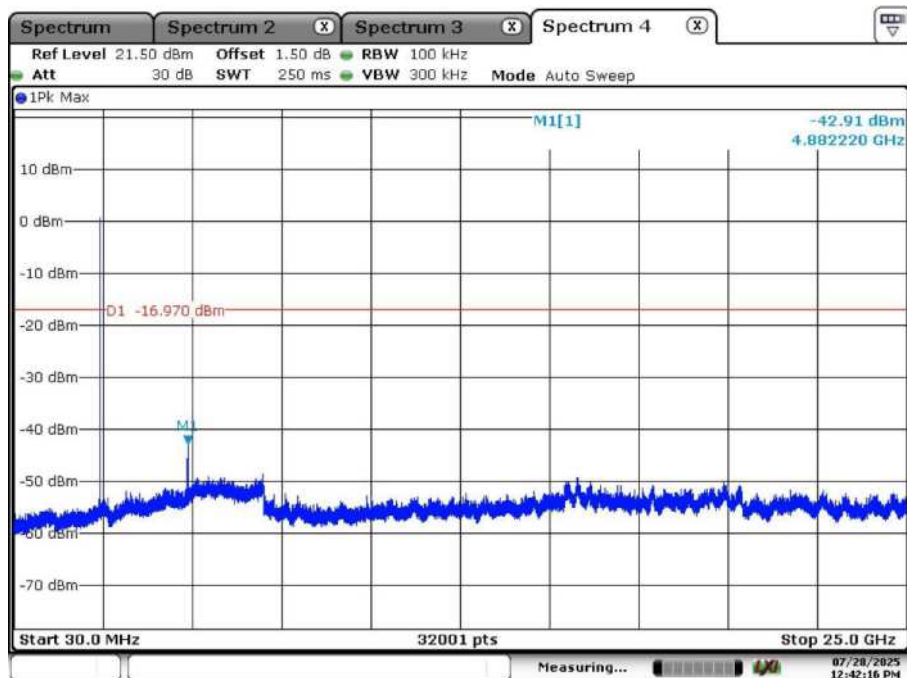


Date: 28.JUL.2025 12:42:16

High Channel

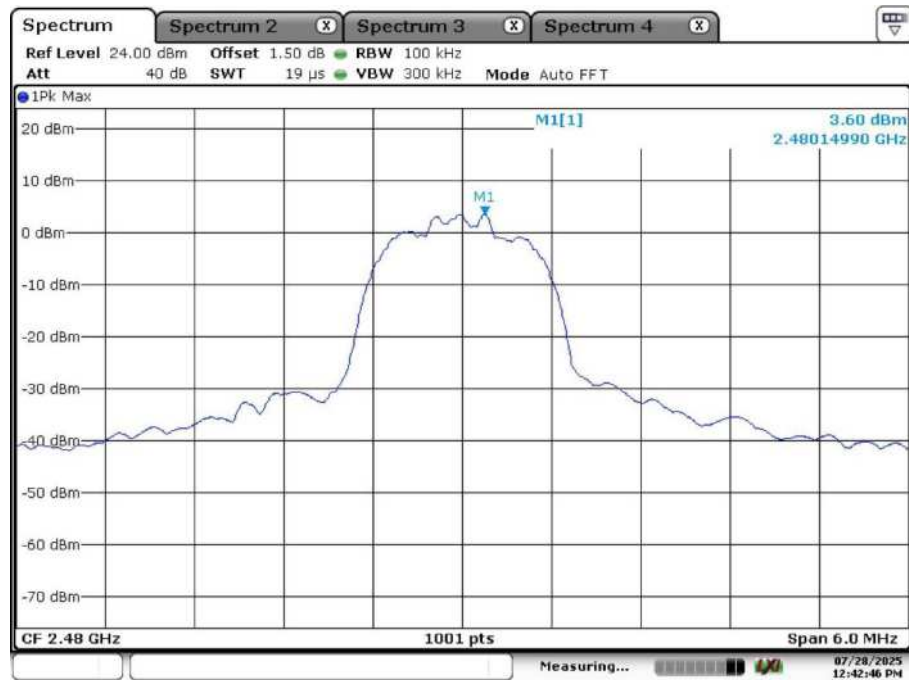


Date: 28.JUL.2025 12:42:46

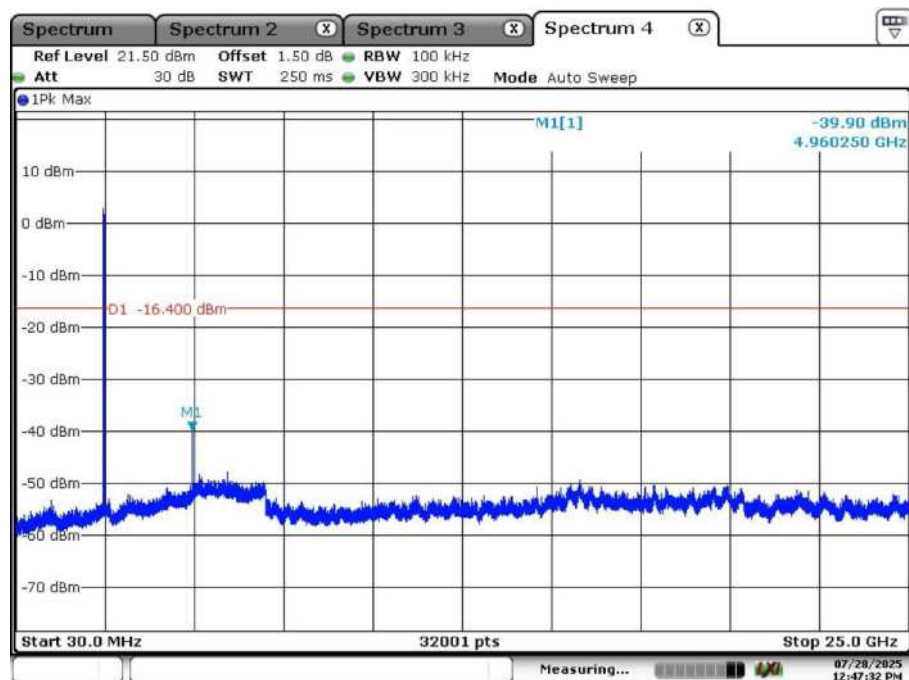


Date: 28.JUL.2025 12:47:32

Hopping Mode, Band Edge


Low Channel

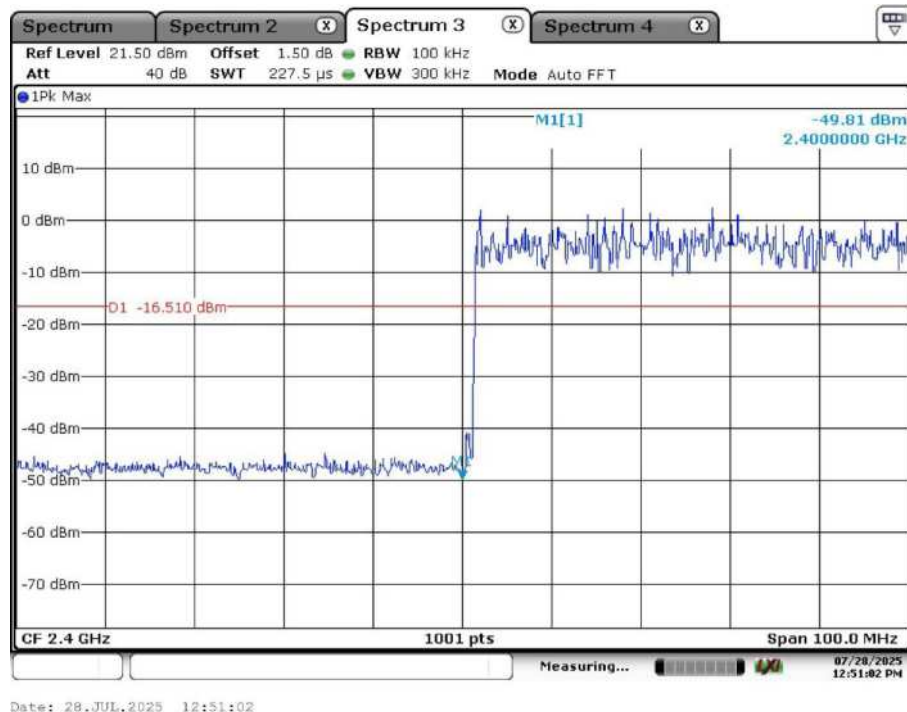


High Channel

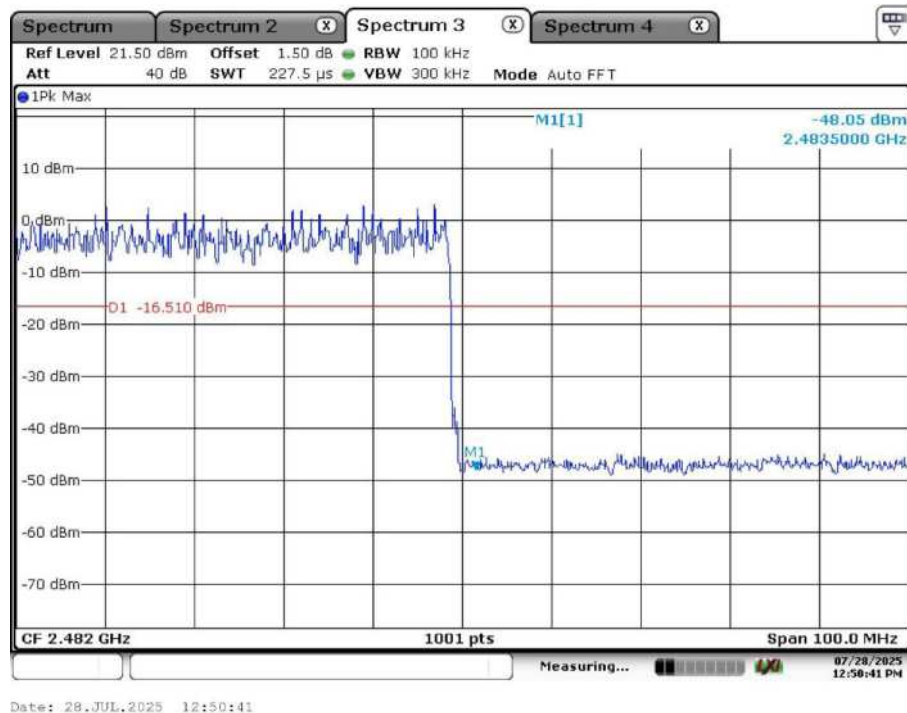

Hopping Mode, Conducted Spurious Emission

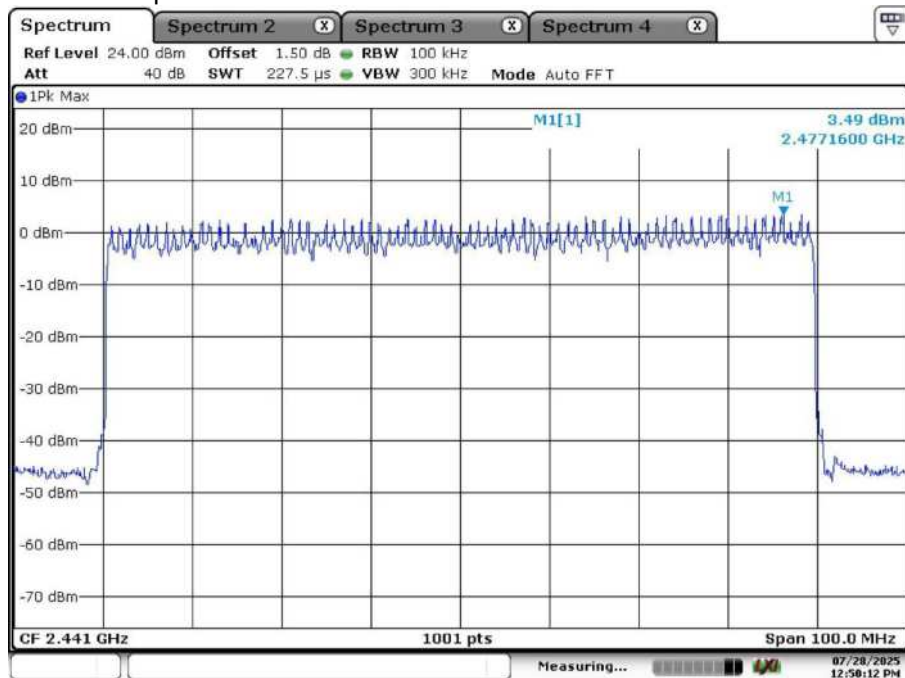

Date: 28.JUL.2025 12:50:12

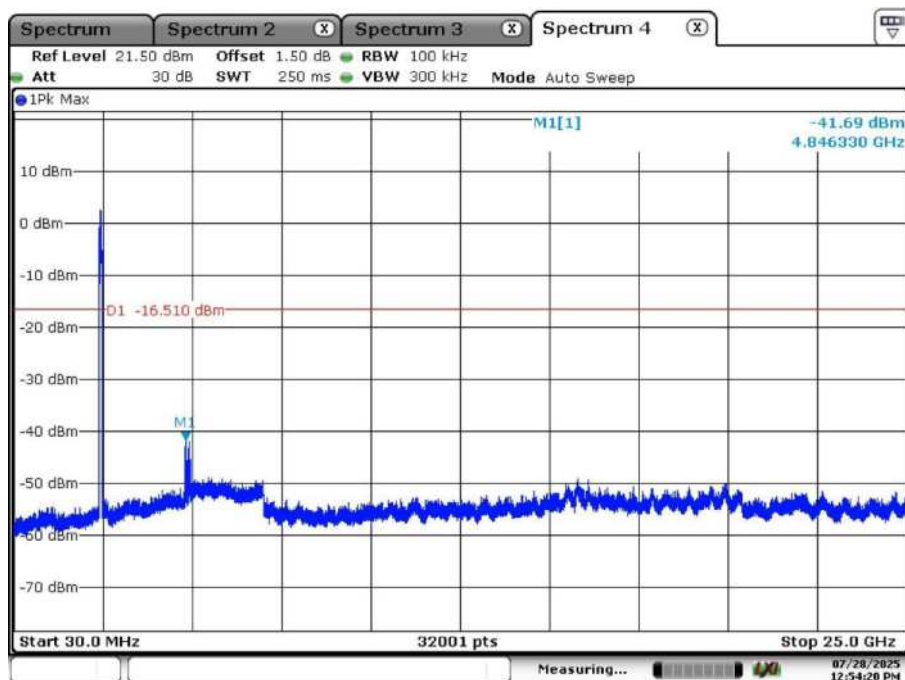

Date: 28.JUL.2025 12:54:20

Appendix A.7: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz, Left earbud

EUT Information

EUT Name: OVER EAR EARBUDS
Model: 084112-991154553-0002
Test Mode: BR_DH5_Mid channel
Order No/Sample No: A004045072-003
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

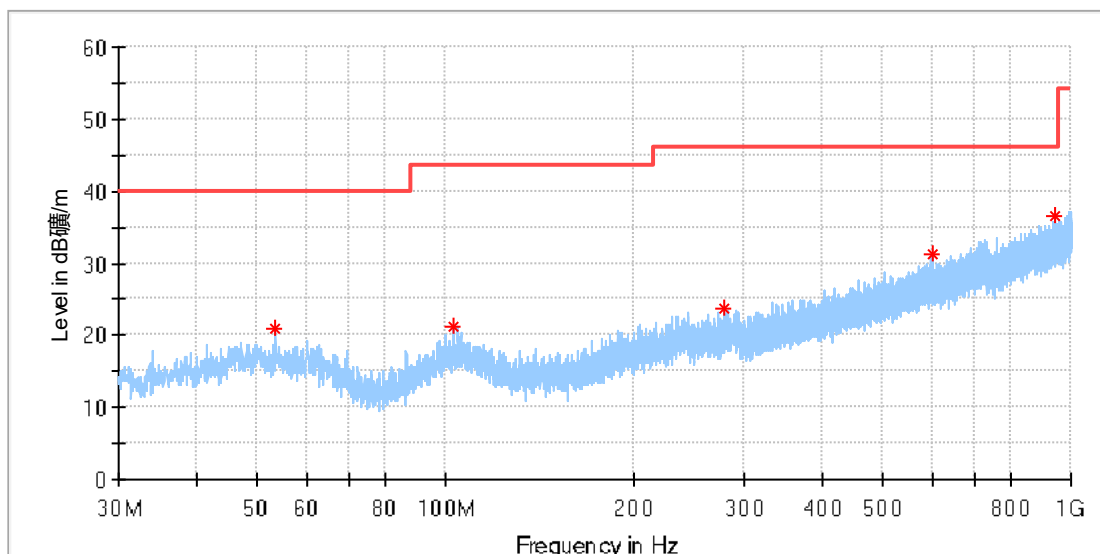

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.503846	20.90	40.00	19.10	100.0	H	66.0	-18.5
103.197692	21.18	43.50	22.32	100.0	H	280.0	-19.0
278.506539	23.69	46.00	22.31	100.0	H	188.0	-16.8
600.173462	31.22	46.00	14.78	100.0	H	357.0	-9.7
944.038462	36.46	46.00	9.54	100.0	H	343.0	-4.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OVER EAR EARBUDS
Model: 084112-991154553-0002
Test Mode: BR_DH5_Mid channel
Order No/Sample No: A004045072-003
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

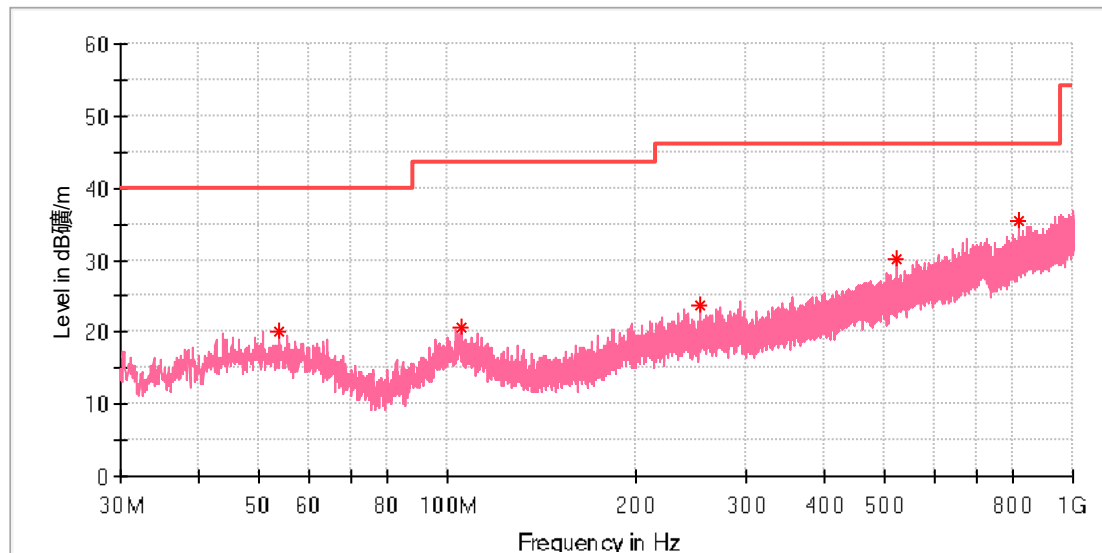

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.876923	20.20	40.00	19.80	100.0	V	313.0	-18.5
104.951154	20.71	43.50	22.79	100.0	V	142.0	-18.9
252.689615	23.66	46.00	22.34	100.0	V	165.0	-17.3
522.573462	30.13	46.00	15.87	100.0	V	149.0	-11.4
820.475385	35.35	46.00	10.65	100.0	V	173.0	-5.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

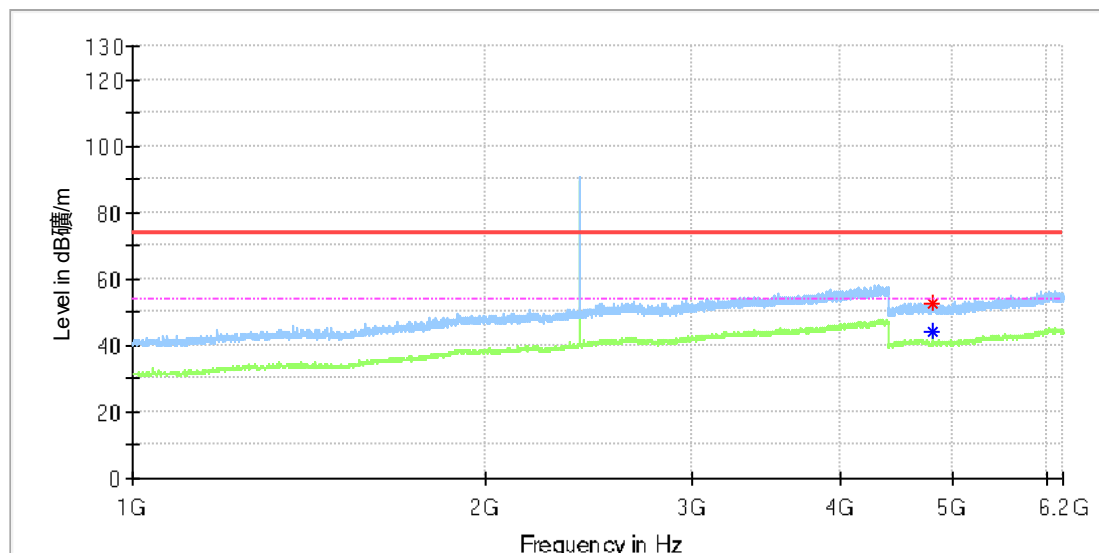


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	---	44.23	54.00	9.78	150.0	H	81.0	13.3
4808.000000	52.37	---	74.00	21.63	150.0	H	81.0	13.3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---


EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

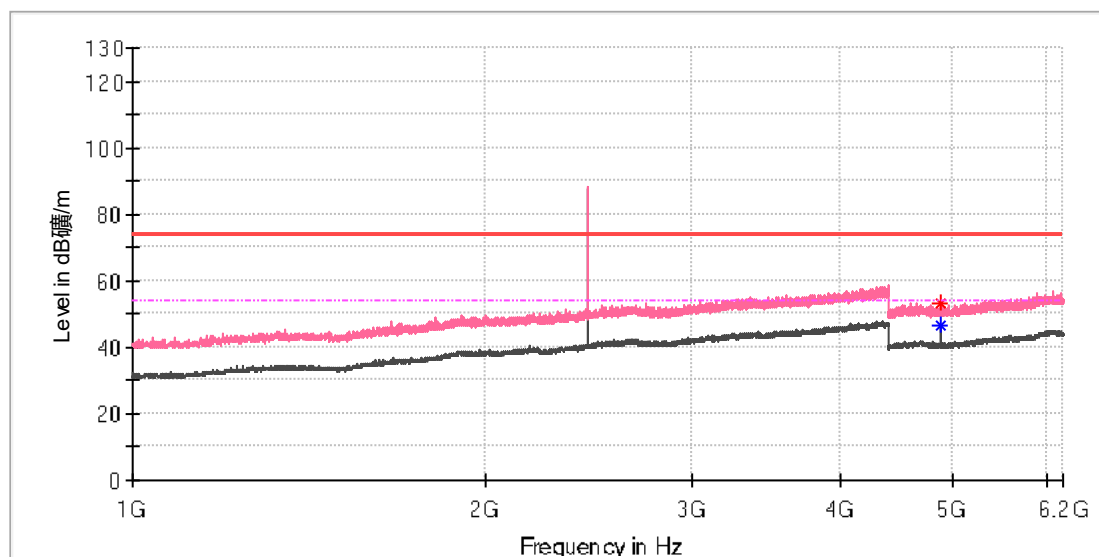

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	53.21	---	74.00	20.79	150.0	V	90.0	13.3
4882.000000	---	46.50	54.00	7.50	150.0	V	90.0	13.3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---


EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

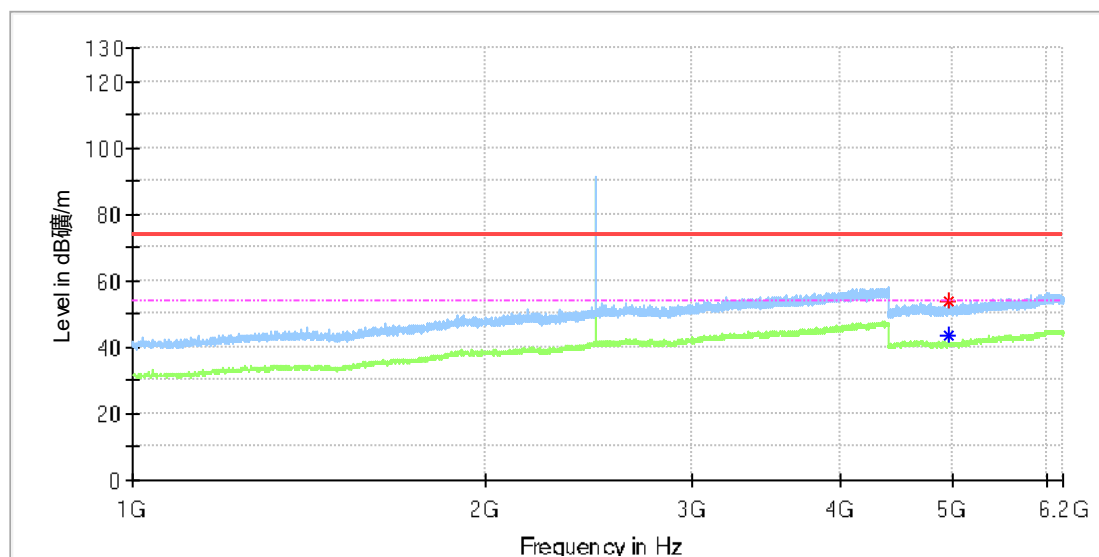

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4950.000000	53.64	---	74.00	20.36	150.0	H	268.0	13.3
4960.000000	---	43.68	54.00	10.32	150.0	H	69.0	13.3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

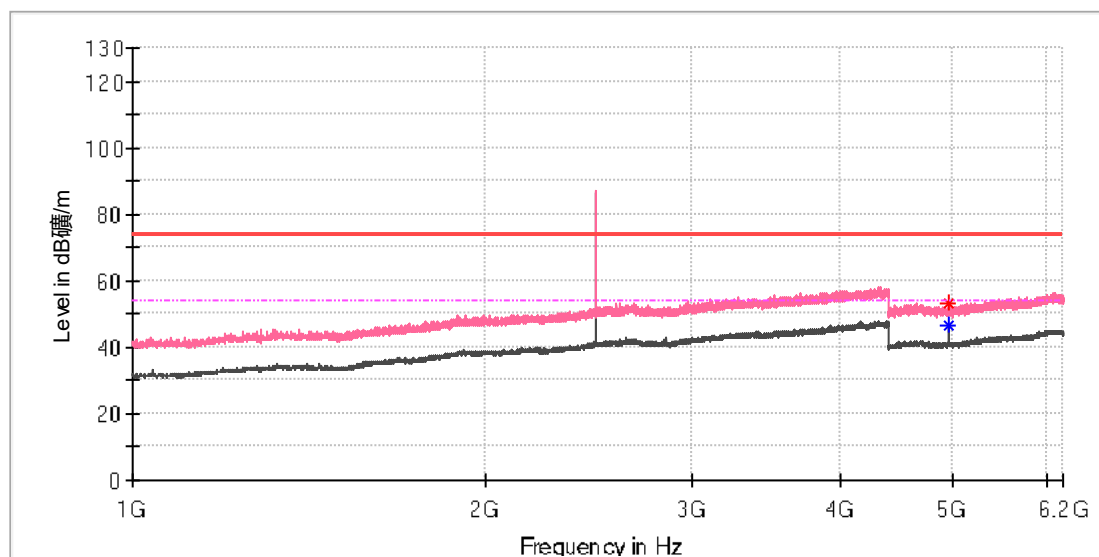


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	53.44	---	74.00	20.56	150.0	V	79.0	13.3
4960.000000	---	46.58	54.00	7.42	150.0	V	79.0	13.3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

30 MHz - 1GHz, Right earbud

EUT Information

EUT Name: OVER EAR EARBUDS
Model: 084112-991154553-0002
Test Mode: BR_DH5_Mid channel
Order No/Sample No: A004045072-004
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

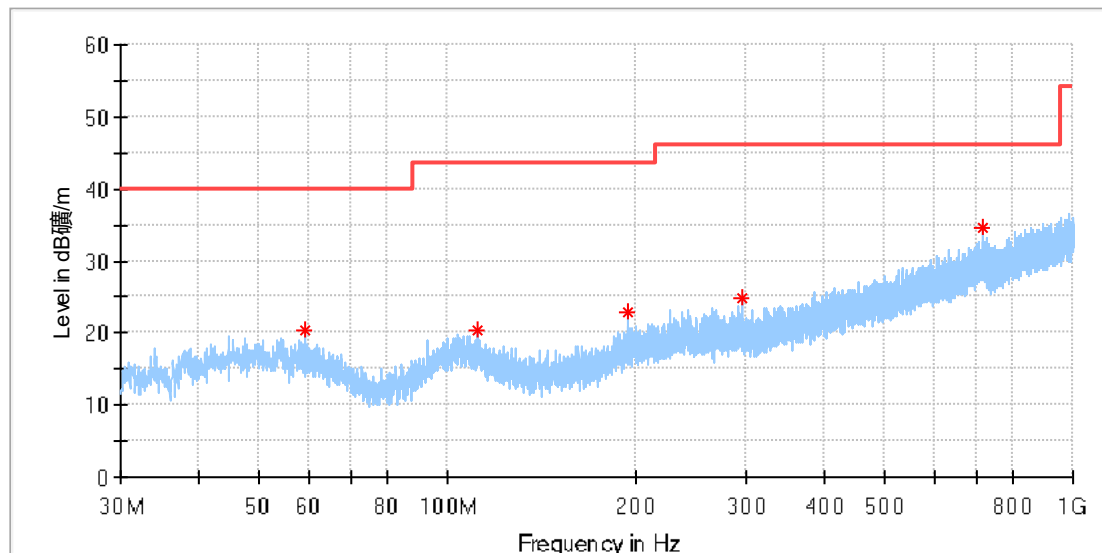

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.323846	20.34	40.00	19.66	100.0	H	266.0	-19.0
111.703846	20.49	43.50	23.01	100.0	H	5.0	-19.4
194.452308	22.77	43.50	20.73	100.0	H	314.0	-19.3
294.996539	24.84	46.00	21.16	100.0	H	101.0	-16.4
717.431539	34.48	46.00	11.52	100.0	H	22.0	-7.6

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OVER EAR EARBUDS
Model: 084112-991154553-0002
Test Mode: BR_DH5_Mid channel
Order No/Sample No: A004045072-004
Test Voltage: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

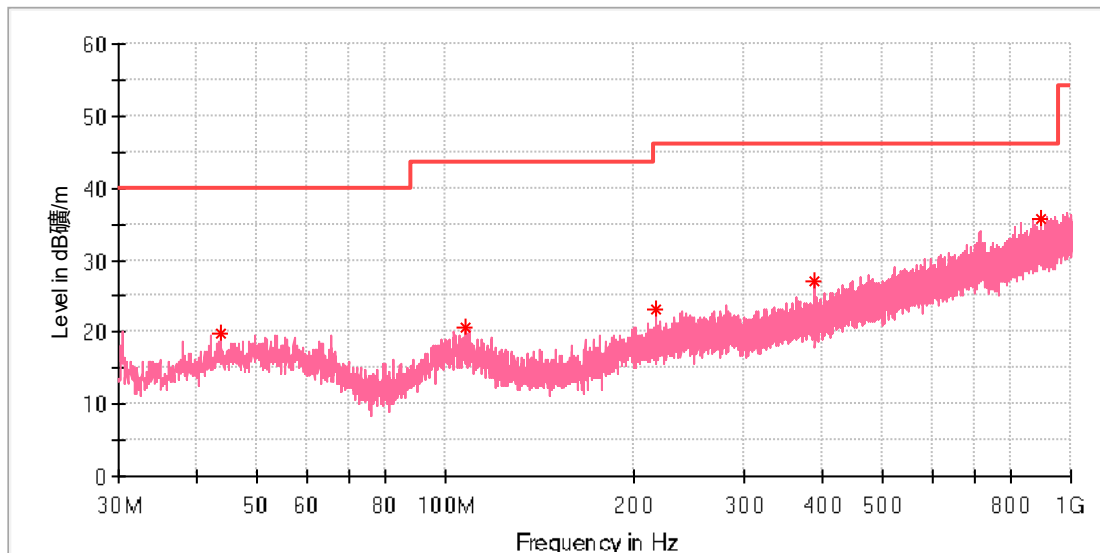

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.803846	19.68	40.00	20.32	100.0	V	286.0	-19.2
107.898462	20.61	43.50	22.89	100.0	V	280.0	-19.1
216.725000	23.19	46.00	22.81	100.0	V	0.0	-18.7
388.489615	27.17	46.00	18.83	100.0	V	91.0	-14.0
897.478462	35.72	46.00	10.28	100.0	V	302.0	-4.8

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz, Right earbud

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

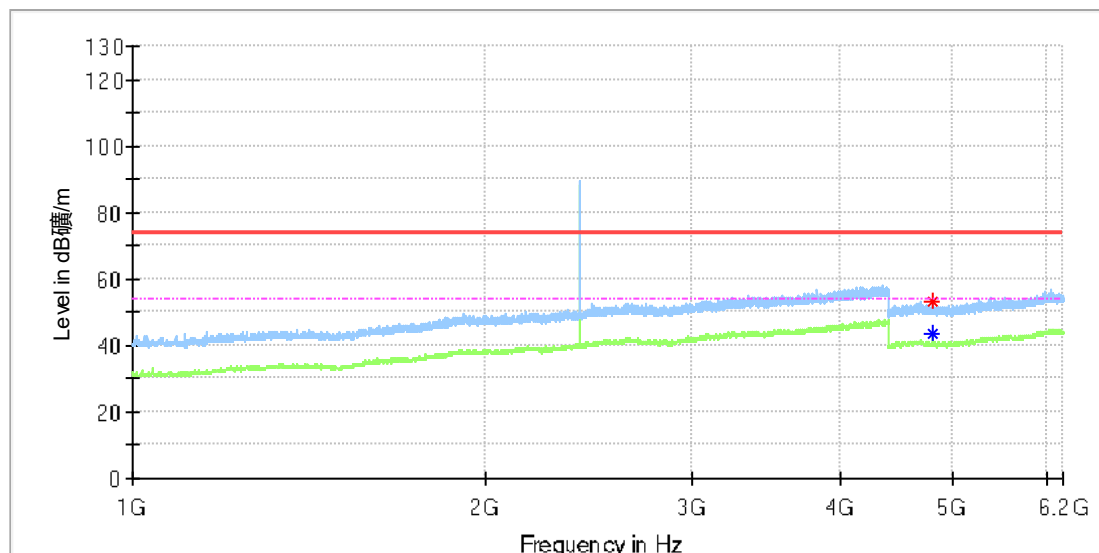


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	53.15	---	74.00	20.85	150.0	H	54.0	13.3
4804.000000	---	43.44	54.00	10.56	150.0	H	54.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---


EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

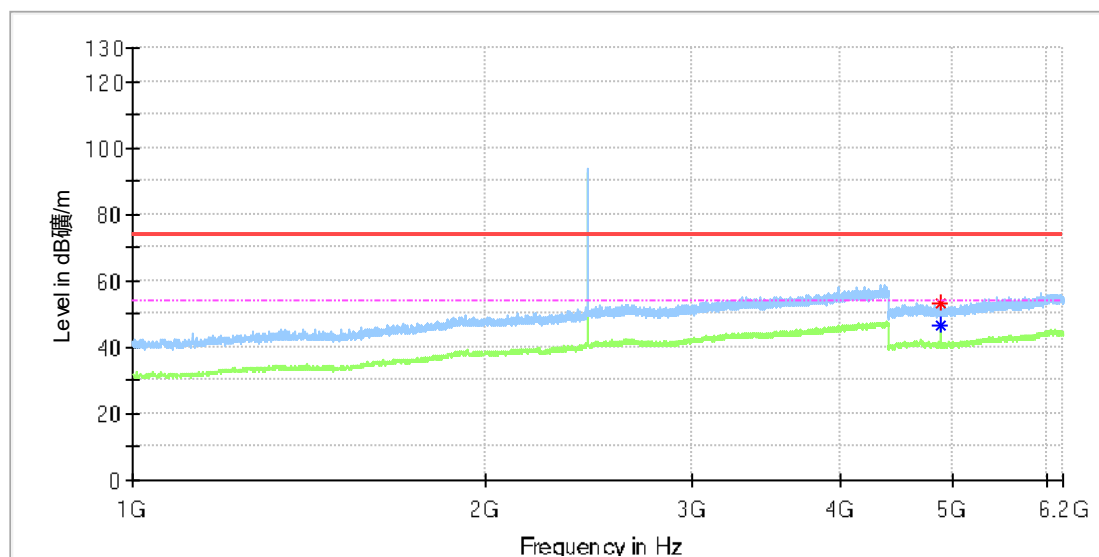

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	53.07	---	74.00	20.93	150.0	H	71.0	13.3
4882.000000	---	46.79	54.00	7.21	150.0	H	71.0	13.3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

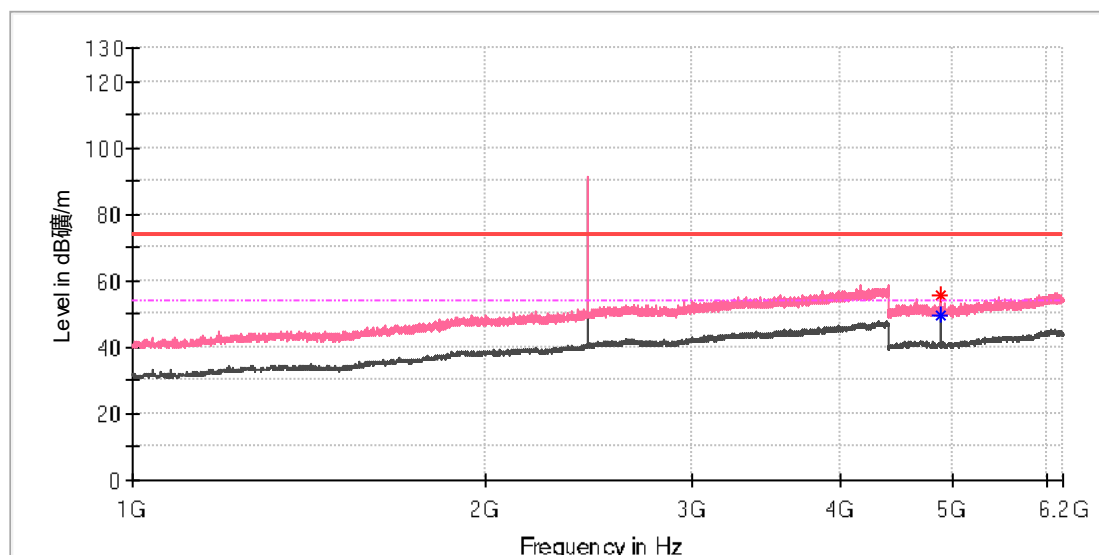


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.500000	55.49	---	74.00	18.51	150.0	V	85.0	13.3
4881.500000	---	49.39	54.00	4.61	150.0	V	85.0	13.3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin




Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

For Left earbud

EUT Information

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

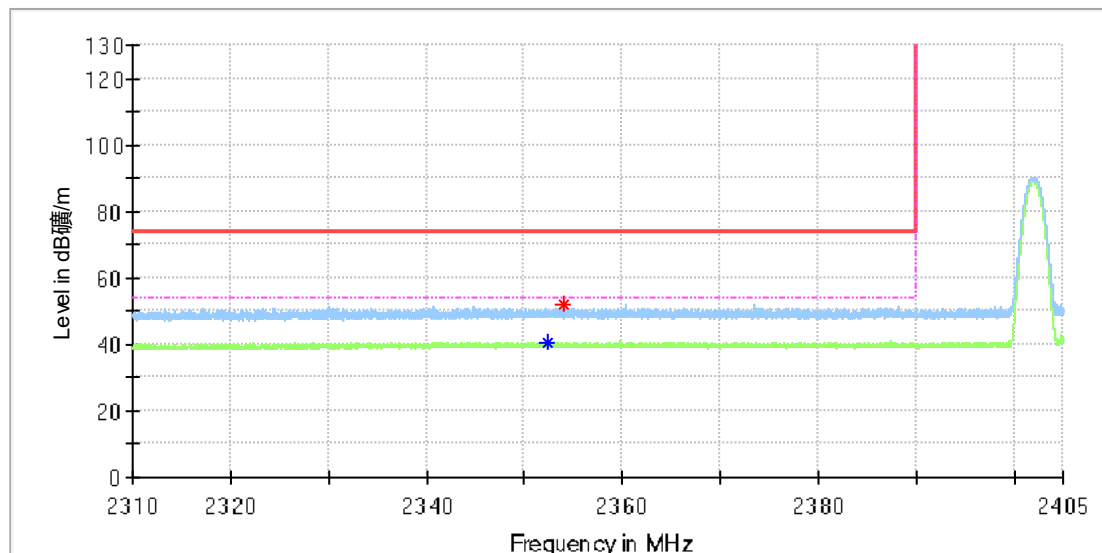


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.288971	---	40.56	54.00	13.44	150.0	H	16.0	8.5
2353.923530	52.20	---	74.00	21.80	150.0	H	49.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---


EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

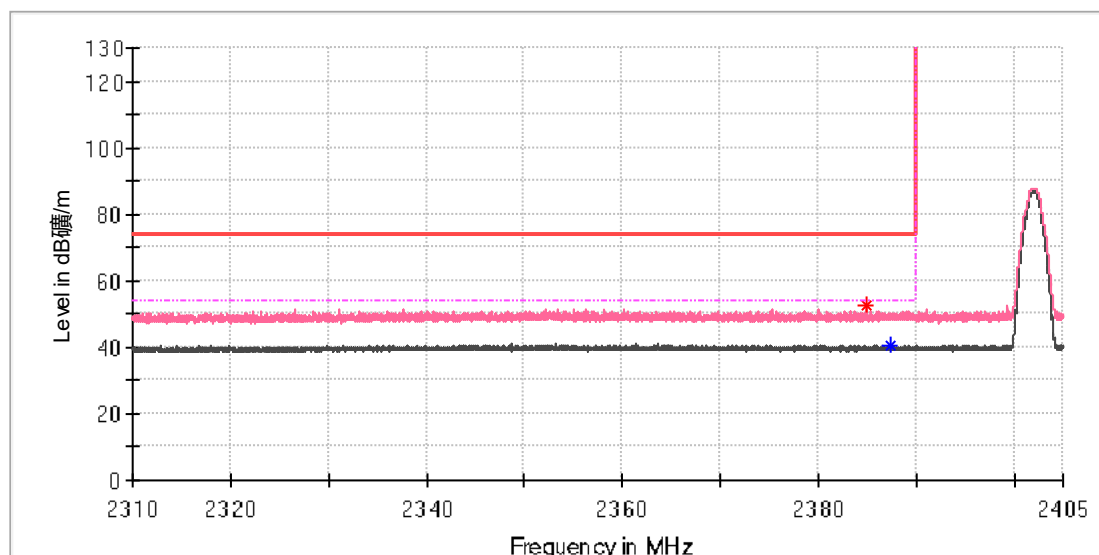

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2385.022059	52.37	---	74.00	21.63	150.0	V	287.0	8.5
2387.383088	---	40.78	54.00	13.22	150.0	V	18.0	8.5

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---


EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

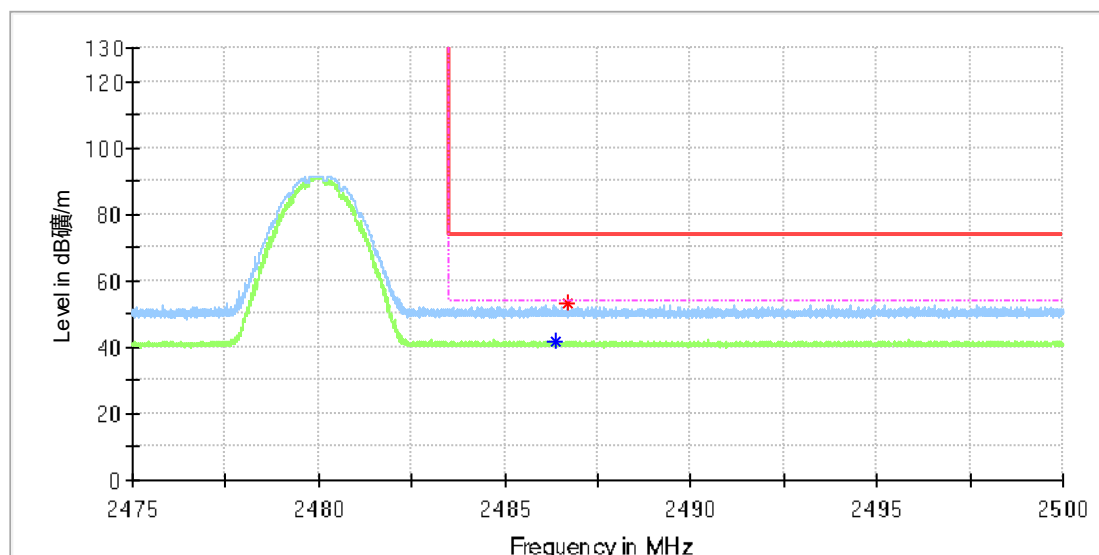

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.378677	---	41.64	54.00	12.36	150.0	H	3.0	9.0
2486.709559	53.44	---	74.00	20.56	150.0	H	110.0	9.0

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

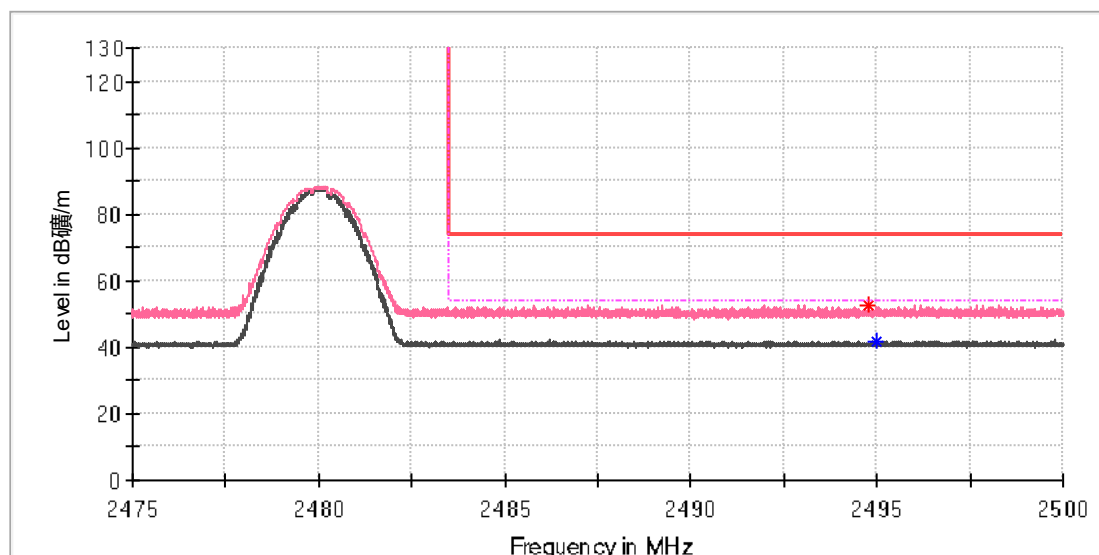


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2494.768382	52.86	---	74.00	21.14	150.0	V	294.0	9.0
2495.000000	---	41.98	54.00	12.02	150.0	V	73.0	9.0

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---


EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

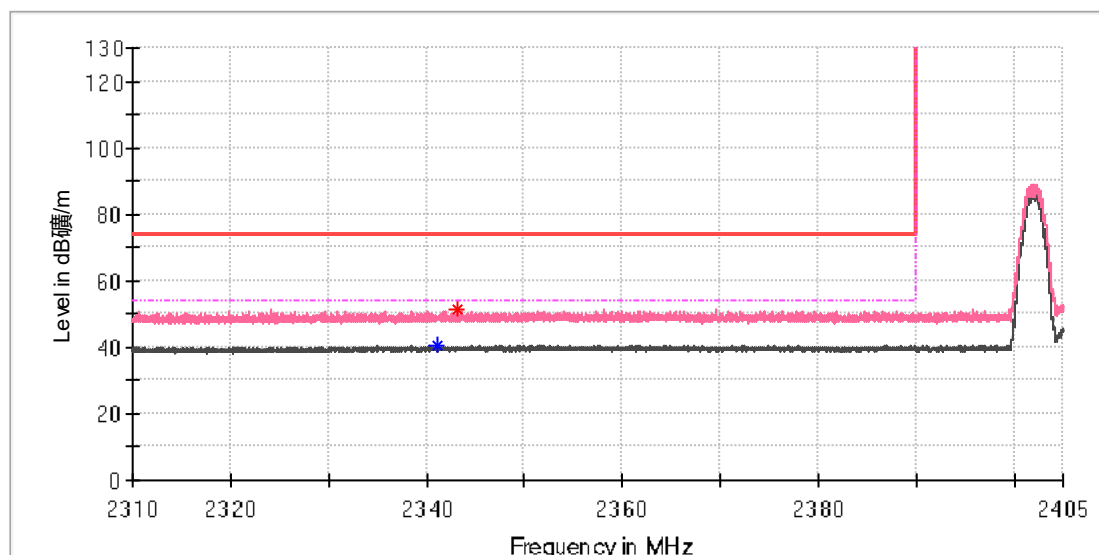

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2341.112500	---	40.36	54.00	13.64	150.0	V	0.0	8.4
2343.124265	51.42	---	74.00	22.58	150.0	V	183.0	8.4

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Name:	OVER EAR EARBUDS
Model:	084112-991154553-0002
Test Mode:	BR_DH5_High channel
Order No/Sample No:	A004045072-004
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

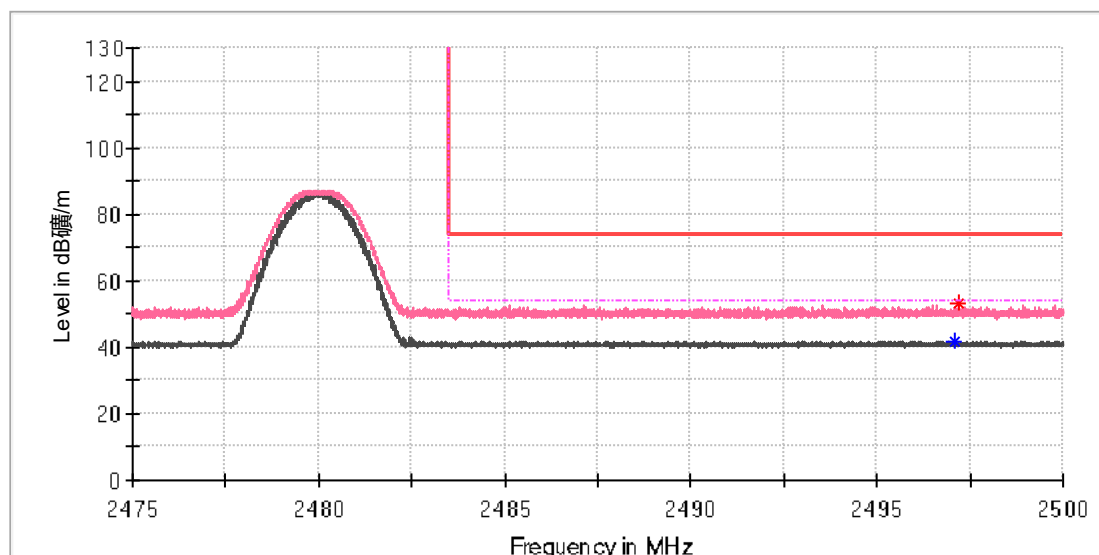

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2497.110294	---	41.70	54.00	12.30	150.0	V	284.0	9.0
2497.180147	52.93	---	74.00	21.07	150.0	V	144.0	9.0

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---