



TEST REPORT

Report Reference No..... : TRE1407014201 R/C.....:70908
FCC ID..... : 2AAS7-BW6004B
Applicant's name : Shenzhen Pump Medical System Co.,Ltd.
Address..... : 2/F West, M-7 Sinosteel Building, Maqueling Estate, Hi-Tech Industrial Park, Nanshan District, Shenzhen, 518057,China
Manufacturer..... : Shenzhen Pump Medical System Co.,Ltd.
Address..... : 2/F West, M-7 Sinosteel Building, Maqueling Estate, Hi-Tech Industrial Park, Nanshan District, Shenzhen, 518057,China
Test item description : Arm Automatic Blood Pressure Monitor
Trade Mark : /
Model/Type reference..... : BW6004B
Listed Model(s)..... : BW8000B/ BW8100B/ BW2001B/ BW2101B/ BW6002B/ BW6102B/ BW6103B/ BW6113B/ BW6104B/ BW6014B/ BW6114B/ BW6005B/ BW6105B/ BW6006B/ BW6106B/ BW6007B/ BW6107B/ BW6008B/ BW6108B/ BW6009B/ BW6109B/ BE8000B/ BE8100B/ BE2001B/ BE2101B/ BE6002B/ BE6102B/ BE6103B/ BE6113B/ BE6004B/ BE6104B/ BE6014B/ BE6114B/ BE6005B/ BE6105B/ BE6006B/ BE6106B/ BE6007B/ BE6107B/ BE6008B/ BE6108B/ BE6009B/ BE6109B
Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample..... : Jul 24, 2014
Date of testing..... : Jul 25, 2014- Aug 18, 2014
Date of issue..... : Aug 18, 2014
Result..... : PASS

Compiled by
(position+printedname+signature)....: File administrators Any Yang

Supervised by
(position+printedname+signature)....: Project Engineer Lion Cai

Approved by
(position+printedname+signature)....: RF Manager Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd
Address..... : Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>TEST STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Test Description	3
<u>2.</u>	<u>SUMMARY</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	EUT operation mode	5
2.4.	EUT configuration	5
2.5.	Modifications	5
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Antenna requirement	9
4.2.	Conducted Emission (AC Main)	10
4.3.	Conducted Peak Output Power	13
4.4.	Power Spectral Density	15
4.5.	6dB bandwidth	17
4.6.	Band Edge	19
4.7.	Spurious Emission (conducted)	22
4.8.	Spurious Emission (radiated)	25
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>32</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>33</u>

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03R02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
Line Conducted Emission (AC Main)	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Power Spectral Density	15.247 (e)	Pass
6dB Bandwidth	15.247 (a)(2)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Remark: The measurement uncertainty is not included in the test result.

2. SUMMARY

2.1. Client Information

Applicant:	Shenzhen Pump Medical System Co.,Ltd.
Address:	2/F West, M-7 Sinosteel Building, Maqueling Estate, Hi-Tech Industrial Park, Nanshan District, Shenzhen, 518057, China
Manufacturer:	Shenzhen Pump Medical System Co.,Ltd.
Address:	2/F West, M-7 Sinosteel Building, Maqueling Estate, Hi-Tech Industrial Park, Nanshan District, Shenzhen, 518057, China

2.2. Product Description

Name of EUT	Arm Automatic Blood Pressure Monitor
Trade Mark:	/
Model No.:	BW6004B
Listed Model(s):	BW8000B/ BW8100B/ BW2001B/ BW2101B/ BW6002B/ BW6102B/ BW6103B/ BW6113B/ BW6104B/ BW6014B/ BW6114B/ BW6005B/ BW6105B/ BW6006B/ BW6106B/ BW6007B/ BW6107B/ BW6008B/ BW6108B/ BW6009B/ BW6109B/ BE8000B/ BE8100B/ BE2001B/ BE2101B/ BE6002B/ BE6102B/ BE6103B/ BE6113B/ BE6004B/ BE6104B/ BE6014B/ BE6114B/ BE6005B/ BE6105B/ BE6006B/ BE6106B/ BE6007B/ BE6107B/ BE6008B/ BE6108B/ BE6009B/ BE6109B
Power supply:	DC 6.0V From battery
Adapter information:	Model:UE08WCP-060050SPA Input: 100-240VAC, 50-60HZ, 400mA Output: 6VDC, 0.5A
Bluetooth	
Version:	Supported BT4.0
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	Internal Antenna
Antenna gain:	0.0dBi

Note: The product model(s), is identical in the same PCB layout, interior structure and electrical circuits.

Operation Frequency List:

Channel	Frequency (MHz)
1	2402
2	2404
:	:
19	2438
20	2440
21	2442
:	:
39	2478
40	2480

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

2.3. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing, and the duty cycle is 98%.

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

☐	Power Cable	Length (m) :	/
☐		Shield :	/
☐		Detachable :	/
☐	Multimeter	Manufacturer :	/
☐		Model No. :	/

2.5. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd.
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26748019 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 01, 2012. Valid time is until February 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept 30, 2015.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jul. 01, 2012, valid time is until Jun. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

3.5. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Due
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2014/10/25
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2014/10/25
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2014/10/25
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
5	RF Cable	HTW	C04	11128	
6	RF Cable	HTW	C05	11129	

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Due
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2014/10/25
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2014/10/25
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2014/10/25
8	Amplifer	Sonoma	310N	E009-13	2014/10/25
9	JS amplifer	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2014/10/25
10	High pass filter	Compliance Direction systems	BSU-6	34202	2014/10/25
11	HORNANTENNA	ShwarzBeck	9120D	1012	2014/10/25
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2014/10/25
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2014/10/25
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2014/10/25
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2014/10/25
18	RF Cable	HTW	C02	11126	
19	RF Cable	HTW	C03	11127	

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Due
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2014/10/25
2	Power Meter	Anritsu	MA2411B	100258	2014/10/25
3	RF Cable	HTW	C01	11125	
4	SMA Connector	mini-circuits	C02	14851	

The Cal.Interval was one year

4. TEST CONDITIONS AND RESULTS

4.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The antenna is integral antenna, the best case gain of the antenna is 0.0dBi

BT Antenna Location

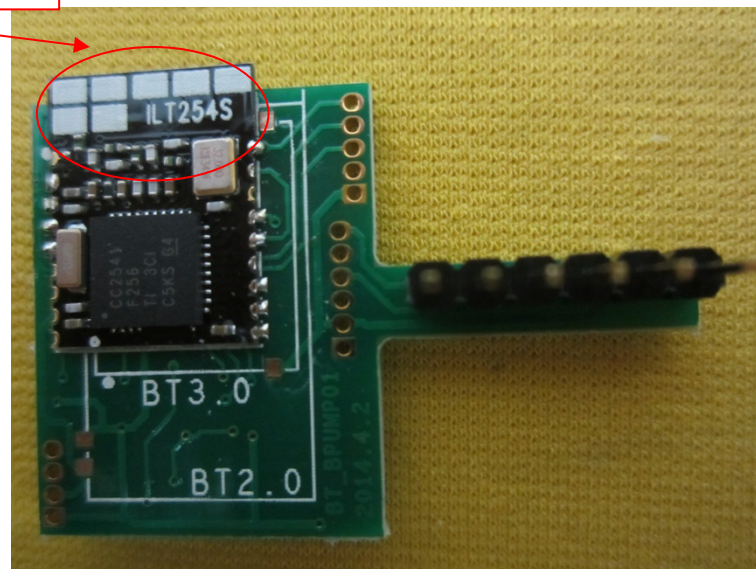

4.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

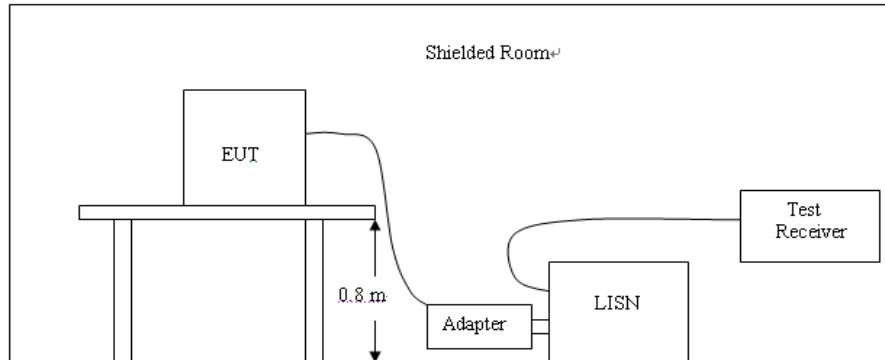

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Test mode:	BT mode	Polarization	L
------------	---------	--------------	---

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

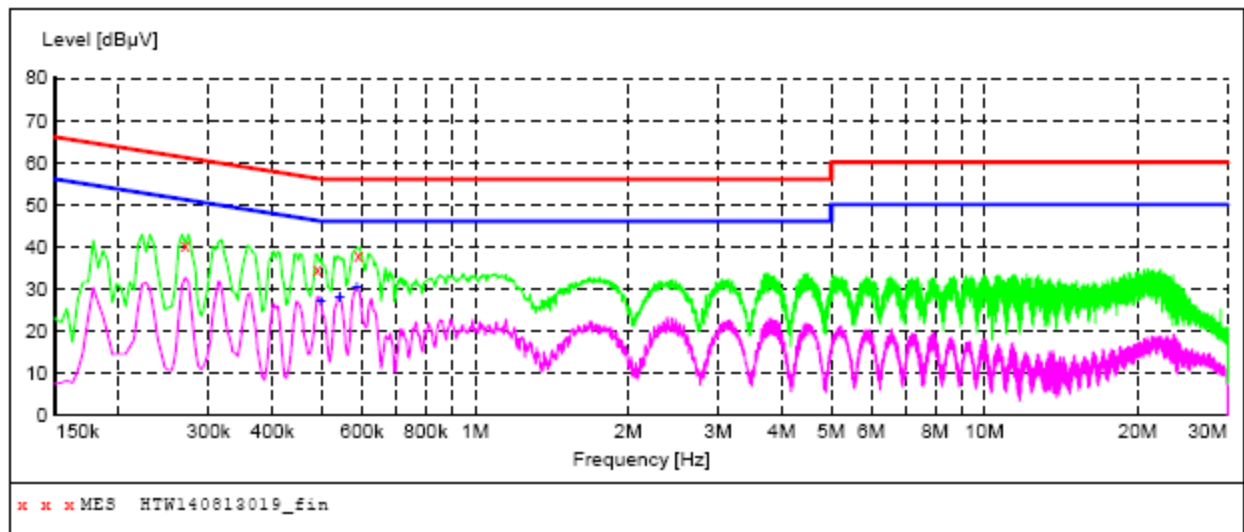**MEASUREMENT RESULT: "HTW140813019_fin"**

8/13/2014 1:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.270000	40.30	11.7	61	20.7	QP	L1	GND
0.490000	34.80	10.0	56	21.2	QP	L1	GND
0.590000	37.90	9.9	56	18.1	QP	L1	GND

MEASUREMENT RESULT: "HTW140813019_fin2"

8/13/2014 1:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.498000	26.90	9.9	46	19.1	AV	L1	GND
0.542000	28.00	9.9	46	18.0	AV	L1	GND
0.586000	30.30	9.9	46	15.7	AV	L1	GND

Test mode:


BT mode

Polarization

N

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

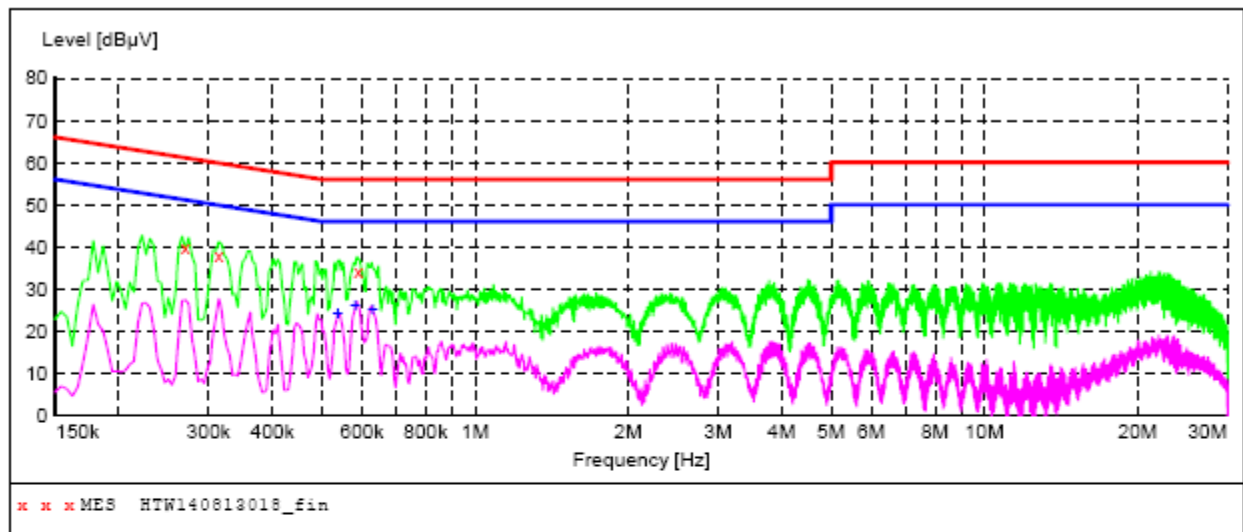

MEASUREMENT RESULT: "HTW140813018_fin"

8/13/2014 1:45PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.270000	39.90	11.7	61	21.1	QP	N	GND
0.314000	38.10	11.4	60	21.9	QP	N	GND
0.590000	34.30	9.9	56	21.7	QP	N	GND

MEASUREMENT RESULT: "HTW140813018_fin2"

8/13/2014 1:45PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.538000	24.00	9.9	46	22.0	AV	N	GND
0.582000	26.10	9.9	46	19.9	AV	N	GND
0.630000	25.10	9.9	46	20.9	AV	N	GND

4.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**

TEST CONFIGURATION




TEST PROCEDURE

1. The EUT was directly connected to the spectrum analyzer and antenna output port as shown in the block diagram as TEST CONFIGURATION shows.
2. According to KDB558074 D01 V03, This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth. Set the RBW $\geq$ DTS bandwidth, Set VBW $\geq 3 \times$ RBW, Set span $\geq 3 \times$ RBW, Sweep time = auto couple, Detector = peak, Trace mode = max hold, Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.


TEST RESULTS

Channel	Output power (dBm)	Limit (dBm)	Result
01	-5.99	30.00	Pass
20	-5.96		
40	-6.68		


Test plot as follows:

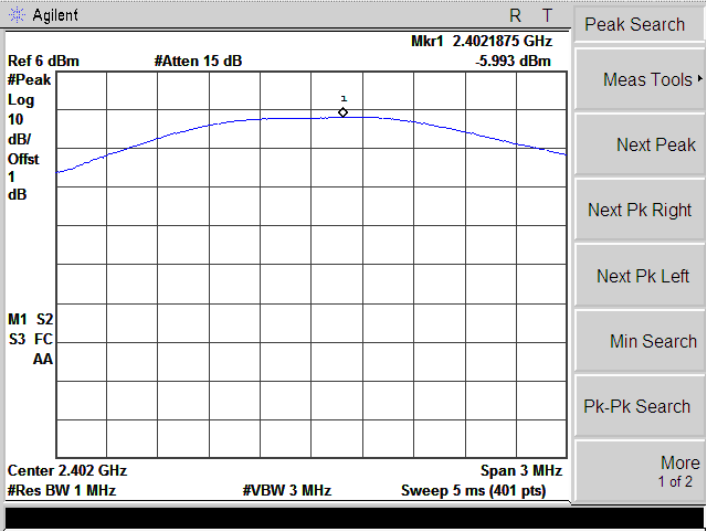

CH01

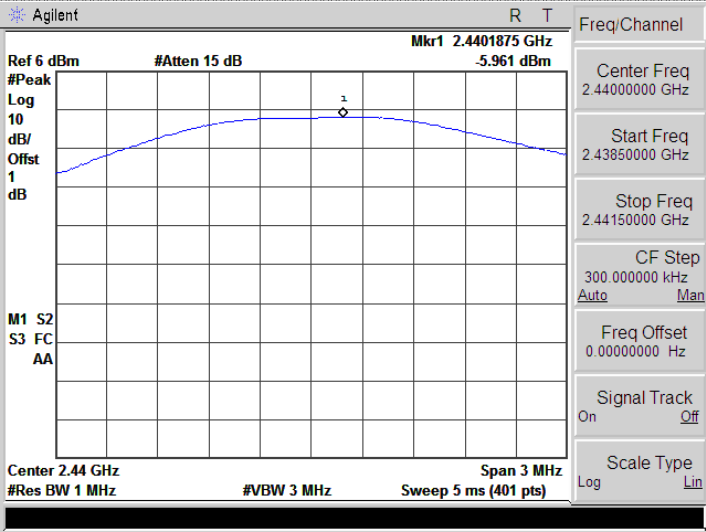

CH20

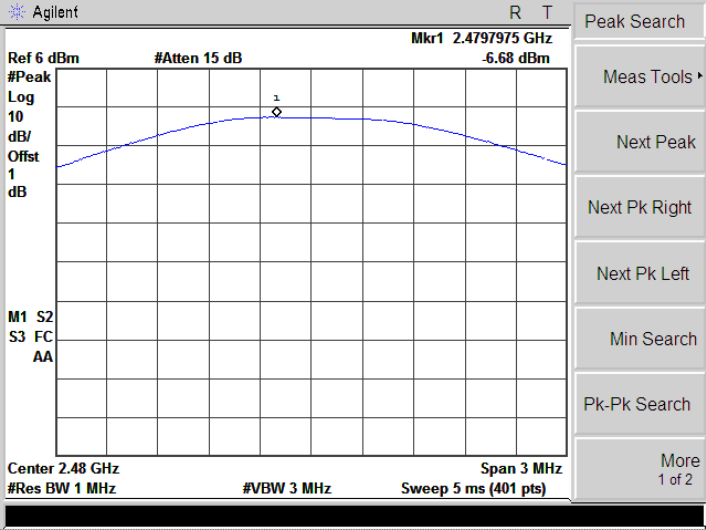

CH40

4.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e): **8dBm/3KHz**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION




TEST PROCEDURE

1. According to KDB 558074 D01 V03R02 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.
2. Analyzer set:
Center frequency = Channel center frequency
RBW = 3 kHz ~ 100 kHz, VBW $\geq$ 3RBW, Detector = Peak, Span = 1.5 times the bandwidth
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


TEST RESULTS

Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	-18.96	8.00	Pass
20	-18.98		
40	-19.06		


Test plot as follows:

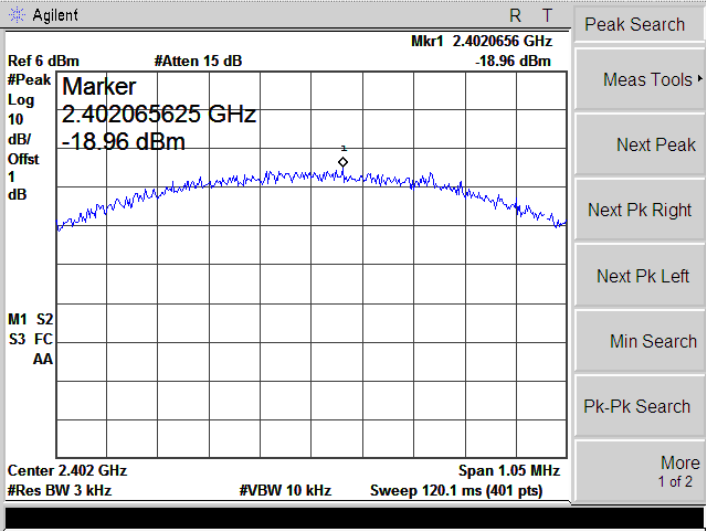

CH01

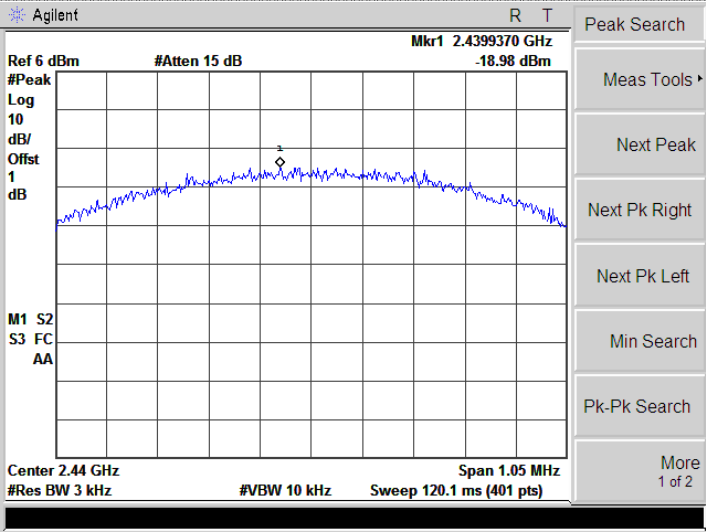

CH20

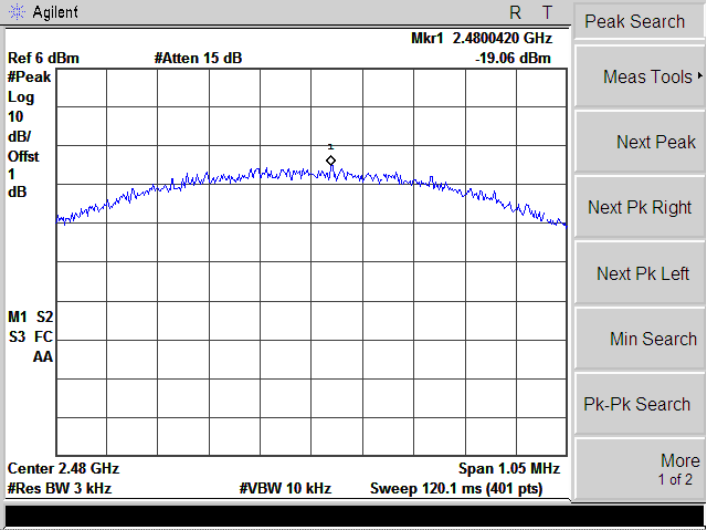

CH40

4.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2): **500KHz**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION




TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer
2. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.
3. According to KDB558074 D01 V03R02 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.
Center frequency = Channel center frequency
RBW = 100 kHz, VBW $\geq$ 3RBW, Detector = Peak,
4. Allow the trace to stabilize.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


TEST RESULTS

Channel	6dB Bandwidth (KHz)	Limit (KHz)	Result
01	714.882	≥ 500	Pass
20	717.560		
40	712.482		


Test plot as follows:

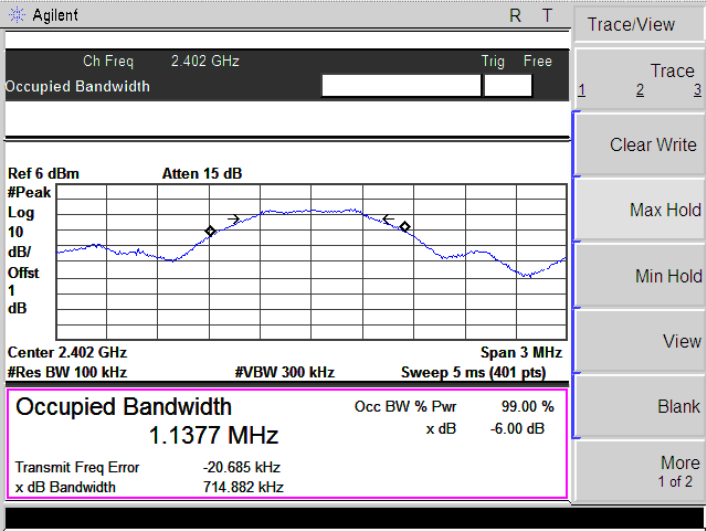

CH01

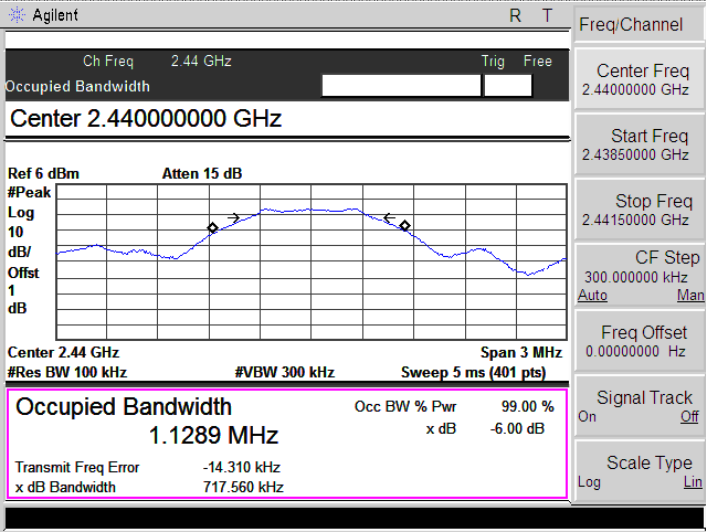

CH20

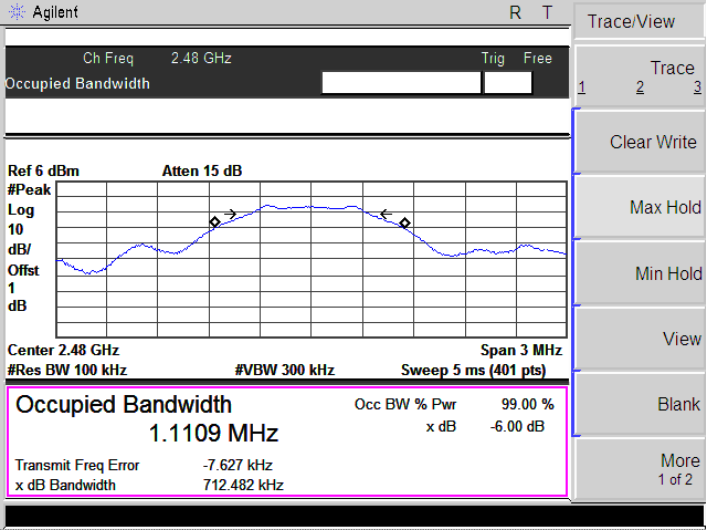

CH40

4.6. Band Edge

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. According to KDB 558074 D01 V03R02 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW of spectrum analyzer to 100kHz and the VBW to 3xRBW with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$
 where:
 E = electric field strength in dB μ V/m,
 EIRP = equivalent isotropic radiated power in dBm
 D = specified measurement distance in meters.
11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test procedures until all measured frequencies were complete.

TEST RESULTS


A. Test Verdict

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-52.89	0.00	0.00	42.37	Peak	74.00	Plot 4.5.3 A1
2390.00	-62.48	0.00	0.00	32.78	AV	54.00	Plot 4.5.3 A2
2402.20	-10.08	0.00	0.00	85.18	Peak	---	Plot 4.5.3 A1
2401.92	-10.84	0.00	0.00	84.42	AV	---	Plot 4.5.3 A2
2479.70	-9.62	0.00	0.00	85.64	Peak	---	Plot 4.5.3 A3
2480.00	-10.42	0.00	0.00	84.84	AV	---	Plot 4.5.3 A4
2483.50	-40.88	0.00	0.00	54.38	Peak	74.00	Plot 4.5.3 A3
2483.50	-45.9	0.00	0.00	49.36	AV	54.00	Plot 4.5.3 A4


Note: 1. The test results including the cable lose.

1. “---” means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

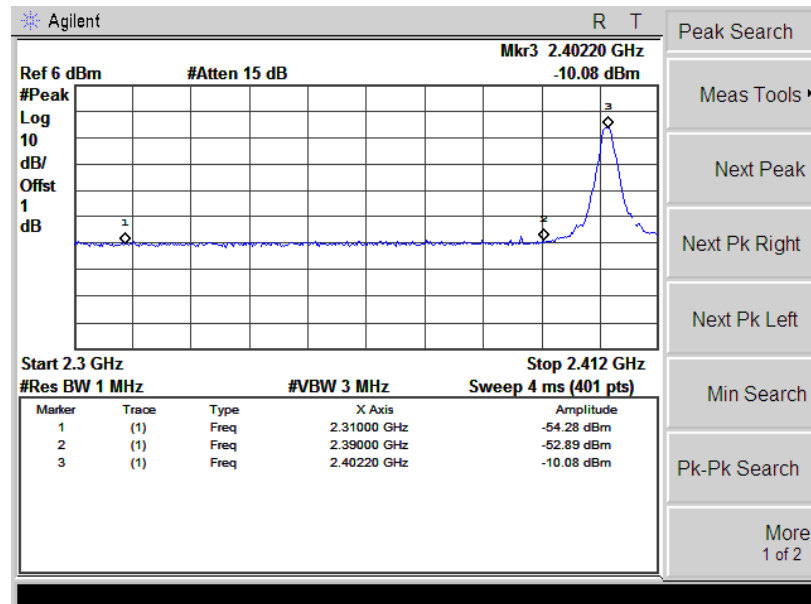


(Plot 4.5.3 A1: Channel 1: 2402MHz)

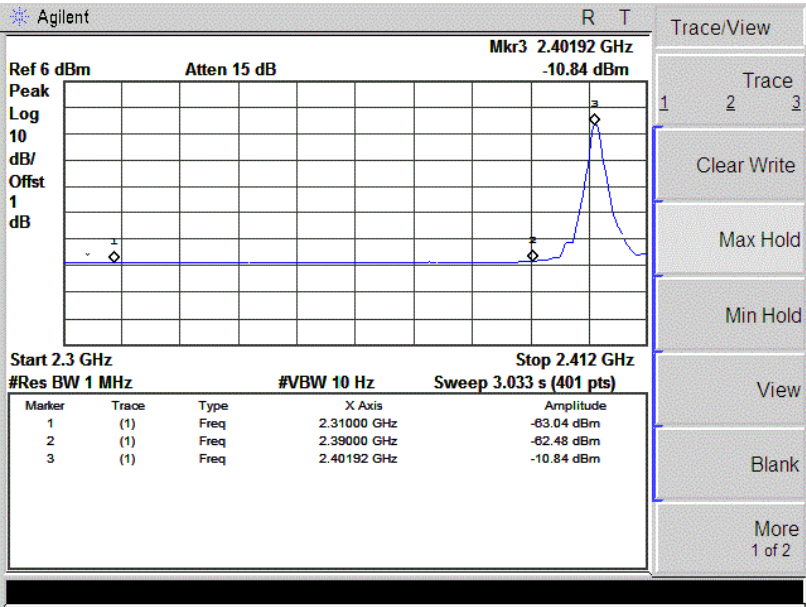

(Plot 4.5.3 A2:Channel 1: 2402MHz)

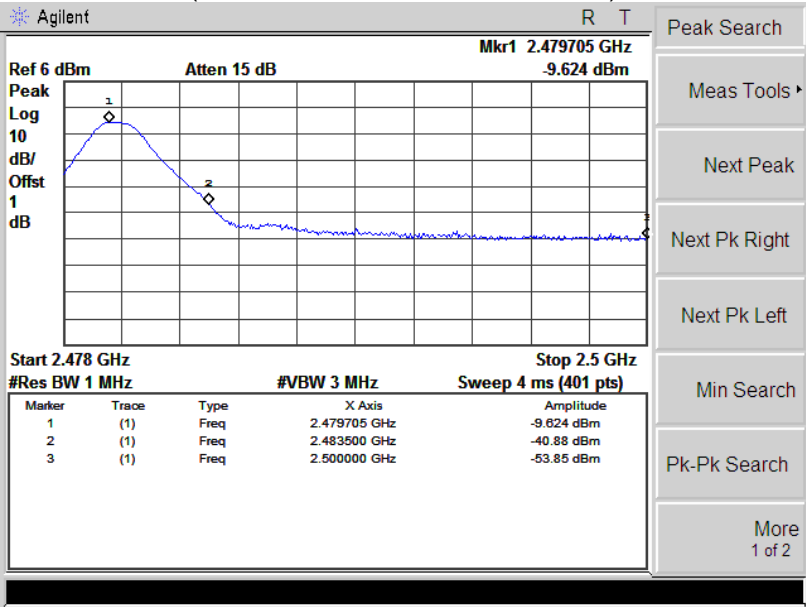

(Plot 4.5.3 A3:Channel 40: 2480MHz)

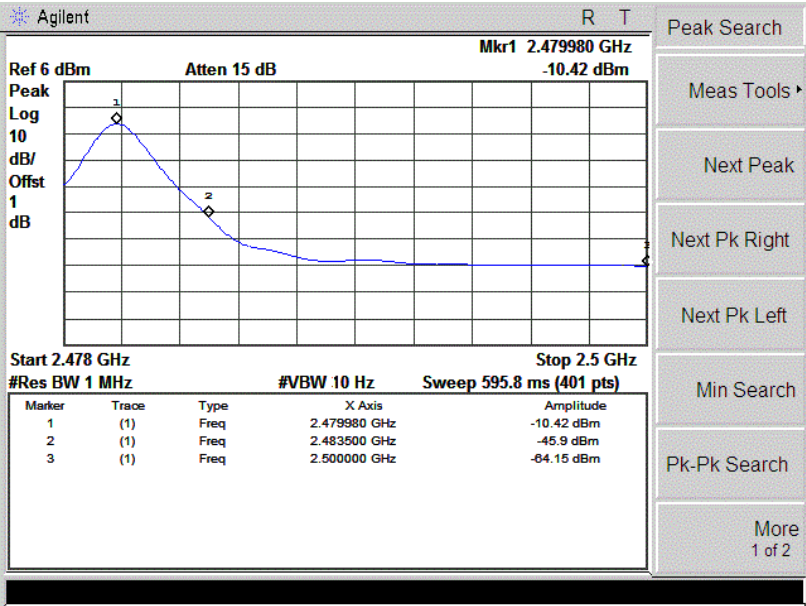

(Plot 4.5.3 A4:Channel 40: 2480MHz)

4.7. Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION





TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz.
3. Below -20dB of the highest emission level in operating band.

TEST RESULTS

Test plot as follows:

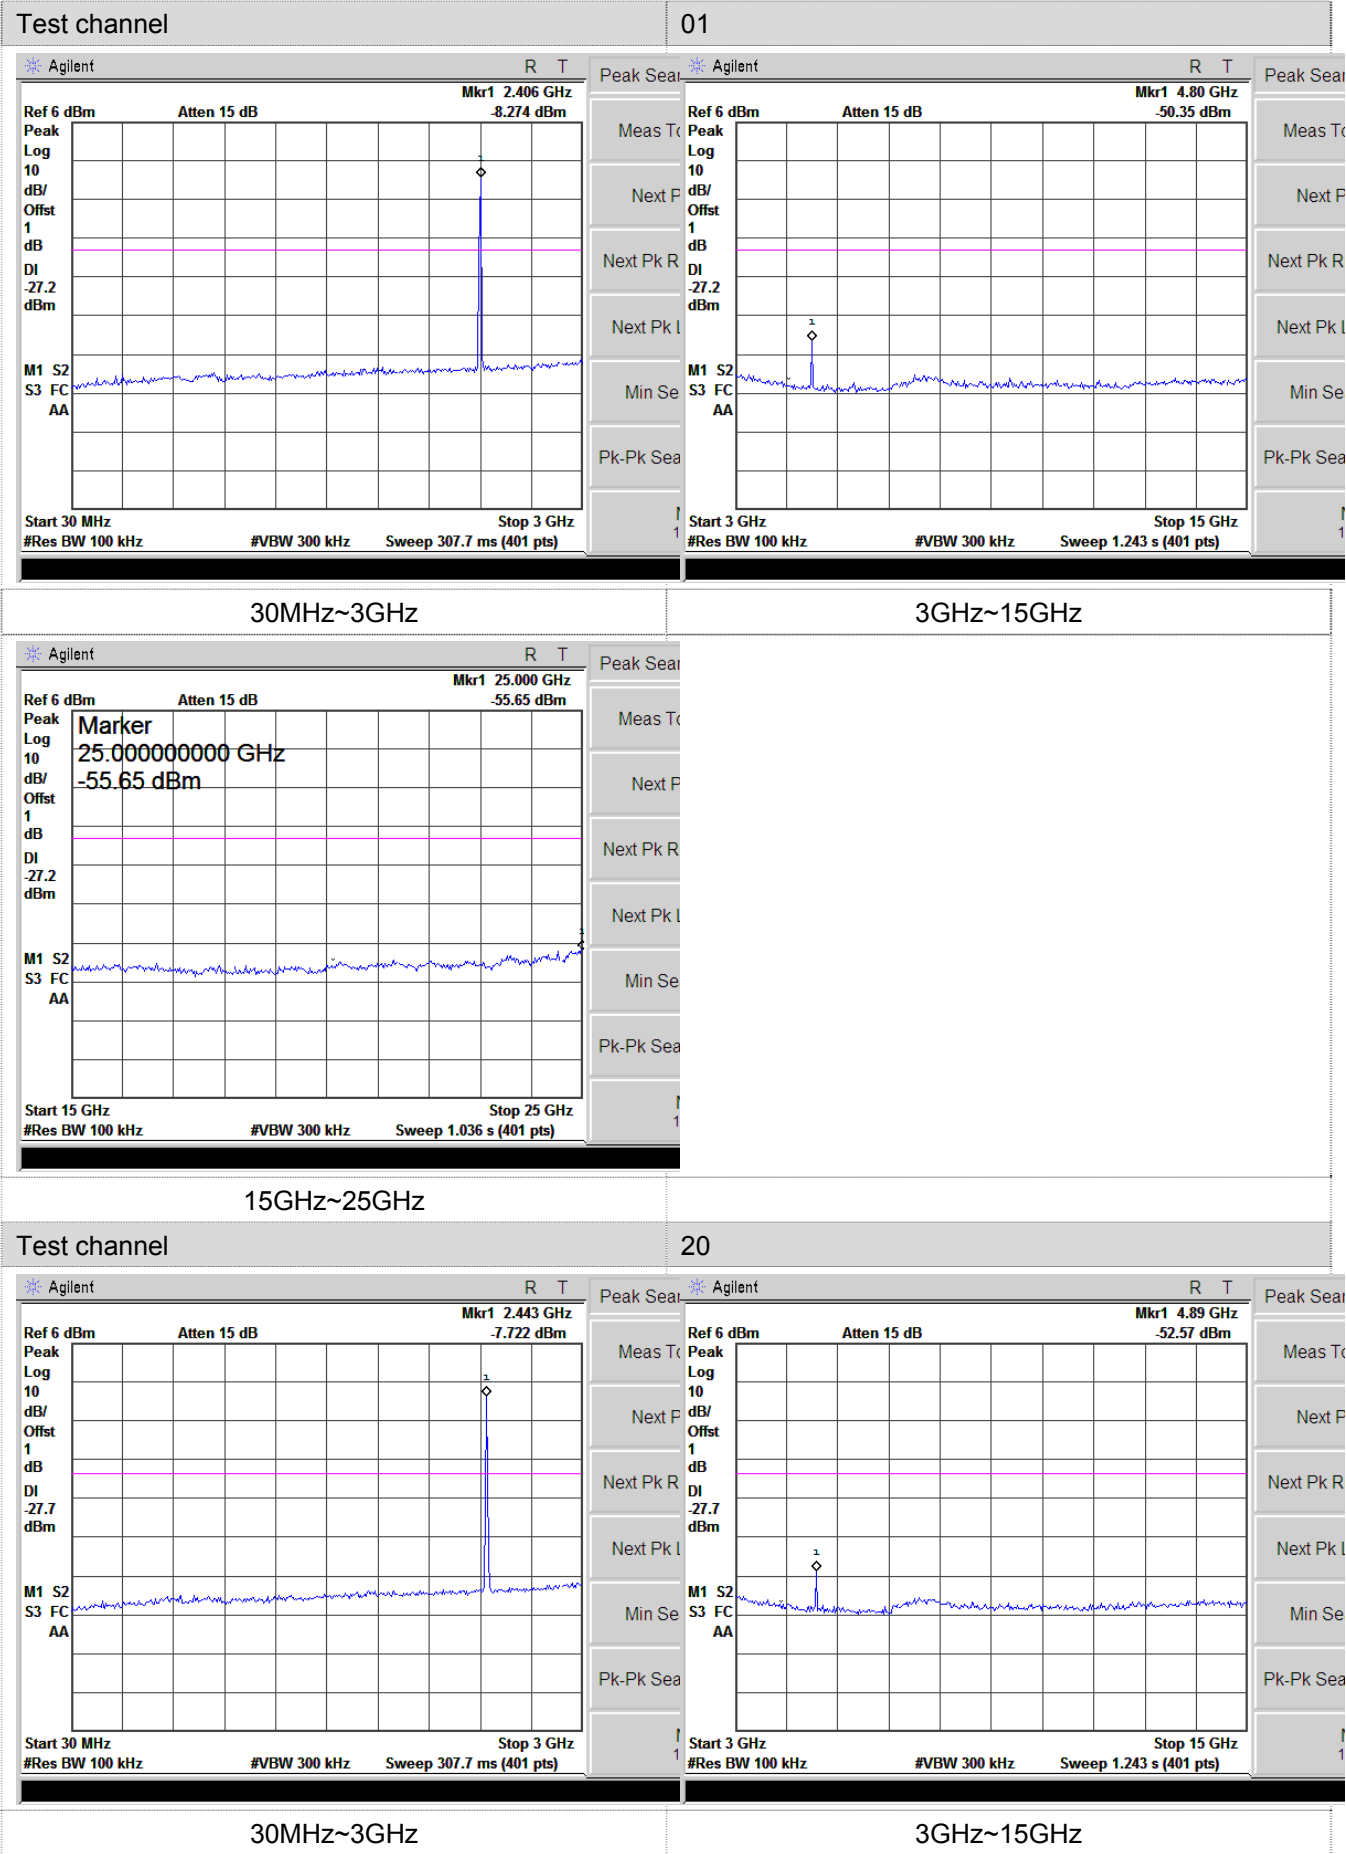


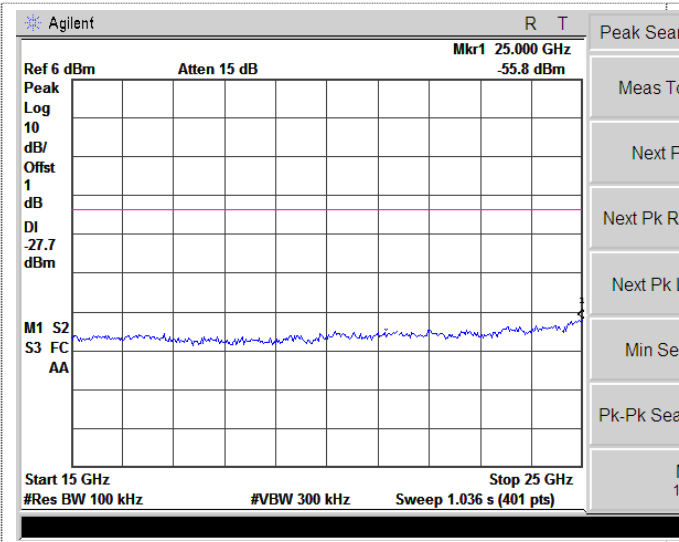


15GHz~25GHz

Test channel


40

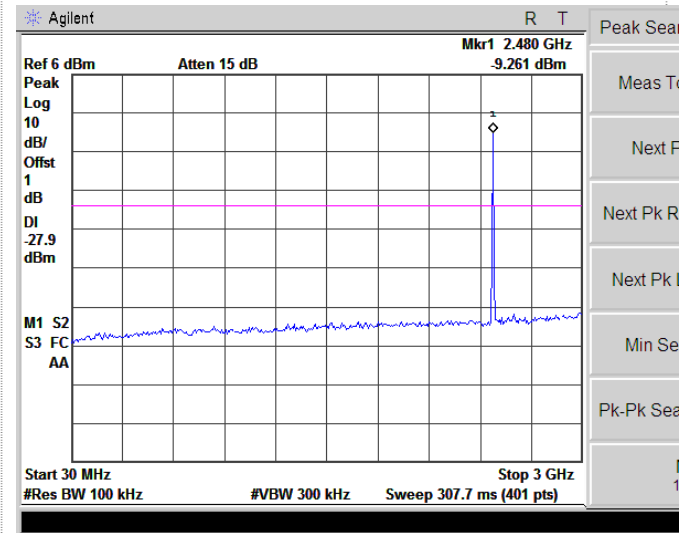

30MHz~3GHz

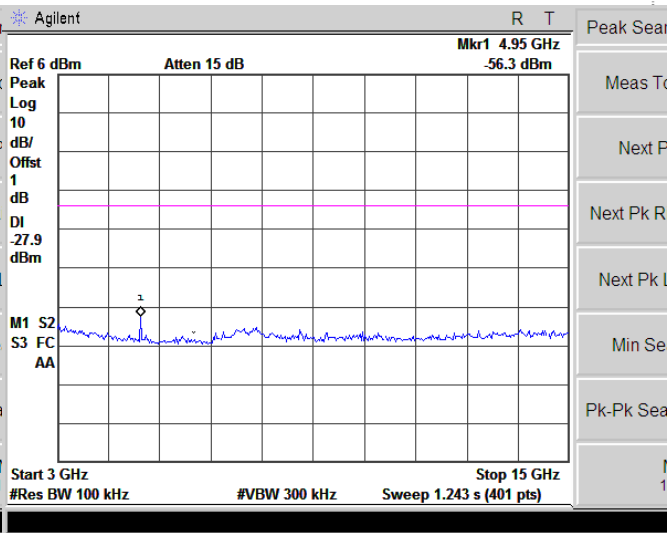

3GHz~15GHz

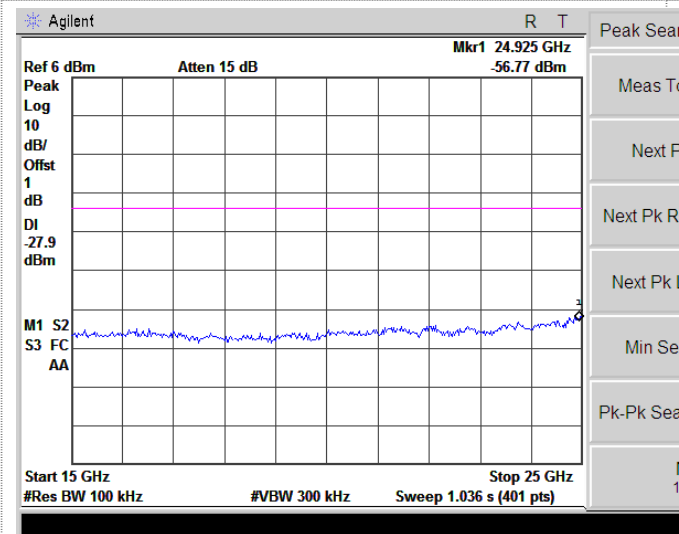

15GHz~25GHz



10GHz~25GHz

4.8. Spurious Emission (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- Below 30MHz

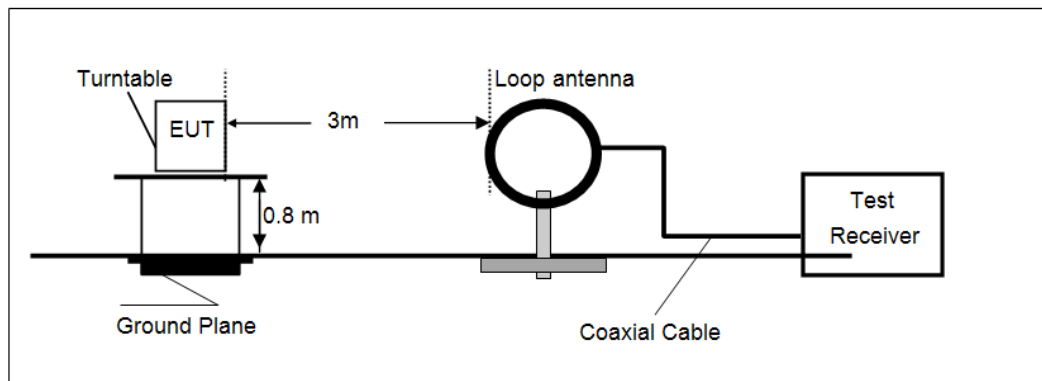

- 30MHz~1000MHz

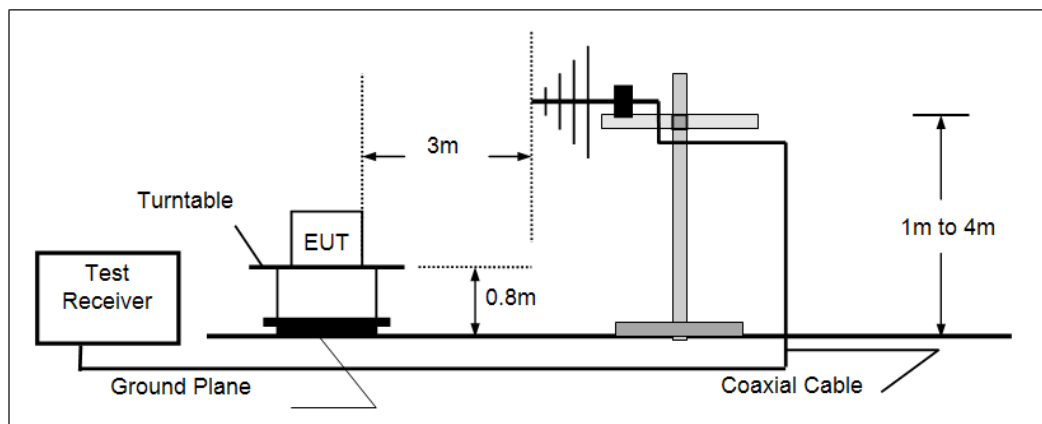

- Above 1GHz

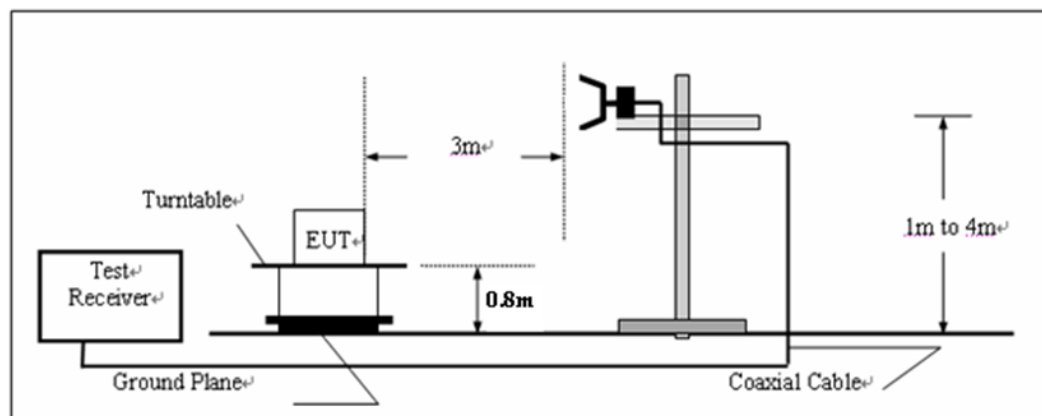

TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:
Peak RBW=VBW= 1MHz
Average RBW 1MHz , VBW=10Hz
7. These settings as per ANSI C63.10

TEST RESULTS

Noted:

Test GFSK modulation . The low channel the worst case during the radiated emission test below 1GHz and is recorded in the test report


Measurement data:***For 9KHz to 30MHz***

Frequency (MHz)	Level (dBuV/m)@3m	Limit Line (dBuV/m)@3m	Margin (dB)	Detector	Result
13.68	42.19	69.54	27.35	QP	PASS
24.75	41.68	69.54	27.86	QP	PASS

■ Below 1GHz

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.1 GHz	MaxPeak	Coupled	100 kHz	VULB9163

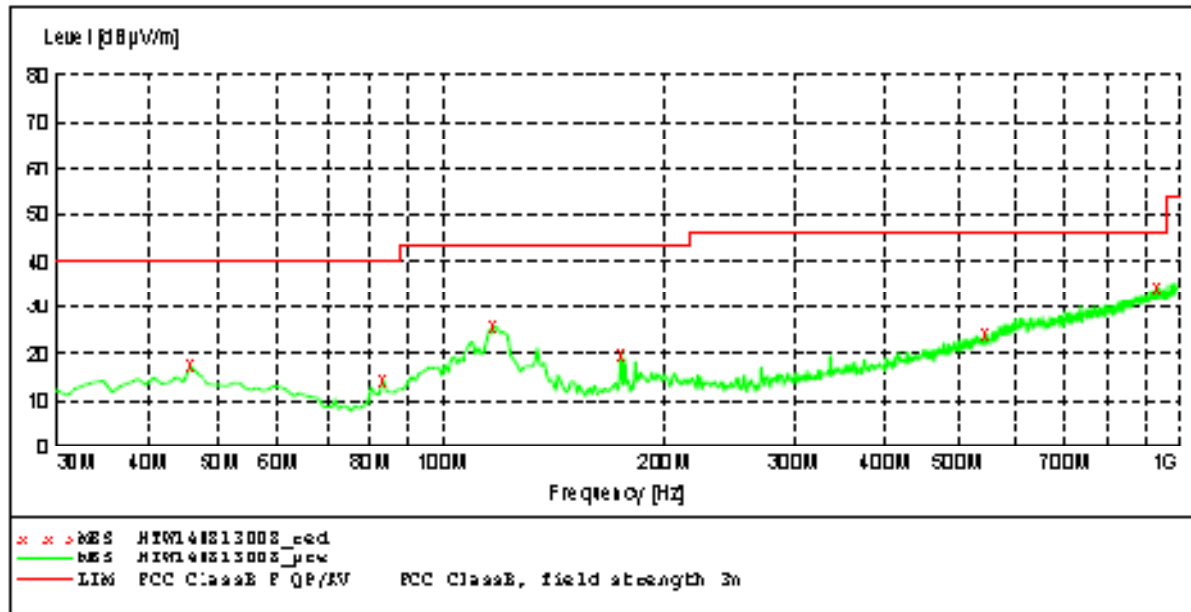


MEASUREMENT RESULT: "H1W140813008_red"

8/13/2014 10:52AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	17.40	-15.0	40.0	22.6	QF	100.0	345.00	HORIZONTAL
82.350000	14.60	-17.9	40.0	25.4	QF	300.0	180.00	HORIZONTAL
113.270000	25.70	-16.2	43.5	17.8	QF	300.0	163.00	HORIZONTAL
175.500000	20.00	-16.4	43.5	23.5	QF	100.0	235.00	HORIZONTAL
543.130000	24.10	-5.6	46.0	21.9	QF	100.0	292.00	HORIZONTAL
937.920000	34.60	3.3	46.0	11.4	QF	100.0	248.00	HORIZONTAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.1 GHz	MaxPeak	Coupled	100 kHz	VULB9163

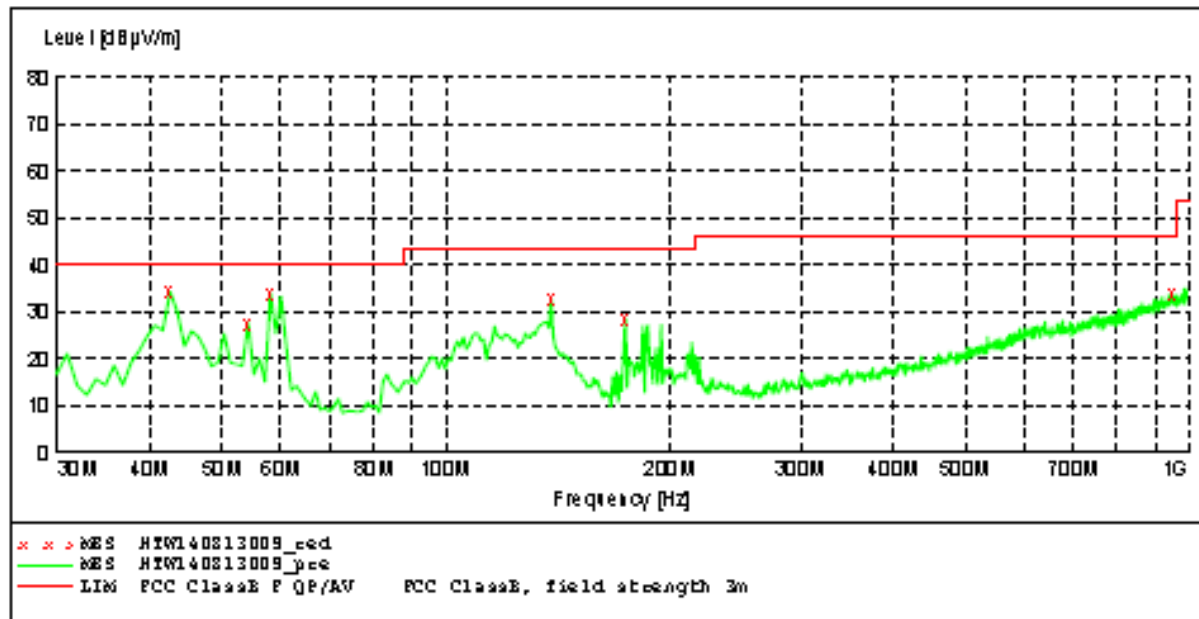***MEASUREMENT RESULT: "H10140813009_red"***

8/13/2014 10:55AM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
42.510000	34.30	-15.0	40.0	5.7	QP	100.0	111.00	VERTICAL
54.250000	27.50	-15.4	40.0	12.4	QP	100.0	295.00	VERTICAL
58.130000	34.10	-15.5	40.0	5.9	QP	100.0	309.00	VERTICAL
138.540000	32.70	-18.4	43.5	10.8	QP	100.0	154.00	VERTICAL
174.530000	28.50	-16.5	43.5	14.9	QP	100.0	154.00	VERTICAL
948.590000	33.50	3.4	46.0	12.4	QP	100.0	1.00	VERTICAL

■ Above 1GHz

Test channel:	01
---------------	----

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	43.86	31.28	5.66	35.29	45.51	74	-28.49	Vertical
7206.00	39.91	36.22	6.87	35.15	47.85	74	-26.15	Vertical
9608.00	35.83	37.85	8.8	35.55	46.93	74	-27.07	Vertical
12010.00	35.09	38.25	8.9	35.84	46.4	74	-27.6	Vertical
14412.00	35.08	39.25	9.2	36.15	47.38	74	-26.62	Vertical
24569.00	*	*	*	*	*	74	*	Vertical
4804.00	44.61	31.28	5.66	35.29	46.26	74	-27.74	Horizontal
7206.00	39.9	36.22	6.87	35.15	47.84	74	-26.16	Horizontal
9608.00	35.85	37.85	8.8	35.55	46.95	74	-27.05	Horizontal
12010.00	35.58	38.25	8.9	35.84	46.89	74	-27.11	Horizontal
14412.00	34.95	39.25	9.2	36.15	47.25	74	-26.75	Horizontal
24569.00	*	*	*	*	*	74	*	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	38.6	31.28	5.66	35.29	40.25	54	-13.75	Vertical
7206.00	31.8	36.22	6.87	35.15	39.74	54	-14.26	Vertical
9608.00	28.53	37.85	8.8	35.55	39.63	54	-14.37	Vertical
12010.00	28.17	38.25	8.9	35.84	39.48	54	-14.52	Vertical
14412.00	27.27	39.25	9.2	36.15	39.57	54	-14.43	Vertical
24569.00	*	*	*	*	*	54	*	Vertical
4804.00	39	31.28	5.66	35.29	40.65	54	-13.35	Horizontal
7206.00	32.14	36.22	6.87	35.15	40.08	54	-13.92	Horizontal
9608.00	28.64	37.85	8.8	35.55	39.74	54	-14.26	Horizontal
12010.00	28.47	38.25	8.9	35.84	39.78	54	-14.22	Horizontal
14412.00	28.35	39.25	9.2	36.15	40.65	54	-13.35	Horizontal
24569.00	*	*	*	*	*	54	*	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	20
---------------	----

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880	44.2	31.26	5.65	35.27	45.84	74	-28.16	Vertical
7320	39.03	36.2	6.86	35.13	46.96	74	-27.04	Vertical
9760	35.49	37.83	8.79	35.53	46.58	74	-27.42	Vertical
12200	34.01	38.78	8.95	35.95	45.79	74	-28.21	Vertical
14410	34.21	39.64	9.27	36.74	46.38	74	-27.62	Vertical
24578	*	*	*	*	*	74	*	Vertical
4880	45.61	31.26	5.65	35.27	47.25	74	-26.75	Horizontal
7320	39.05	36.2	6.86	35.13	46.98	74	-27.02	Horizontal
9760	35.16	37.83	8.79	35.53	46.25	74	-27.75	Horizontal
12200	34.6	38.78	8.95	35.95	46.38	74	-27.62	Horizontal
14412	35.19	39.64	9.27	36.74	47.36	74	-26.64	Horizontal
24578	*	*	*	*	*	74	*	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880	38.48	31.26	5.65	35.27	40.12	54	-13.88	Vertical
7320	31.74	36.2	6.86	35.13	39.67	54	-14.33	Vertical
9760	28.45	37.83	8.79	35.53	39.54	54	-14.46	Vertical
12200	28	38.78	8.95	35.95	39.78	54	-14.22	Vertical
14410	26.85	39.64	9.27	36.74	39.02	54	-14.98	Vertical
24578	*	*	*	*	*	74	*	Vertical
4880	39.61	31.26	5.65	35.27	41.25	54	-12.75	Horizontal
7320	31.91	36.2	6.86	35.13	39.84	54	-14.16	Horizontal
9760	29.16	37.83	8.79	35.53	40.25	54	-13.75	Horizontal
12200	27.58	38.78	8.95	35.95	39.36	54	-14.64	Horizontal
14412	28.22	39.64	9.27	36.74	40.39	54	-13.61	Horizontal
24578	*	*	*	*	*	54	*	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	40
---------------	----

Peak value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
4960.00	44.53	31.44	5.87	35.46	46.38	74	-27.62	Vertical
7440.00	37.6	36.38	7.08	35.32	45.74	74	-28.26	Vertical
9920.00	34.95	38.01	9.01	35.72	46.25	74	-27.75	Vertical
12400.00	33.48	38.95	8.98	36.05	45.36	74	-28.64	Vertical
14880.00	35.25	39.87	9.34	36.88	47.58	74	-26.42	Vertical
24583.00	*	*	*	*	*	74	*	Vertical
4960.00	44.64	31.44	5.87	35.46	46.49	74	-27.51	Horizontal
7440.00	37.6	36.38	7.08	35.32	45.74	74	-28.26	Horizontal
9920.00	34.39	38.01	9.01	35.72	45.69	74	-28.31	Horizontal
12400.00	34.9	38.95	8.98	36.05	46.78	74	-27.22	Horizontal
14880.00	34.82	39.87	9.34	36.88	47.15	74	-26.85	Horizontal
24583.00	*	*	*	*	*	74	*	Horizontal

Average value:


Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
4960.00	39.06	31.42	5.87	35.46	40.89	54	-13.11	Vertical
7440.00	31.55	36.36	7.08	35.32	39.67	54	-14.33	Vertical
9920.00	28.56	37.99	9.01	35.72	39.84	54	-14.16	Vertical
12400.00	27.38	38.95	8.98	36.05	39.26	54	-14.74	Vertical
14880.00	27.21	39.87	9.34	36.88	39.54	54	-14.46	Vertical
24583.00	*	*	*	*	*	74	*	Vertical
4960.00	38.75	31.42	5.87	35.46	40.58	54	-13.42	Horizontal
7440.00	31.51	36.36	7.08	35.32	39.63	54	-14.37	Horizontal
9920.00	29.36	37.99	9.01	35.72	40.64	54	-13.36	Horizontal
12400.00	27.59	38.95	8.98	36.05	39.47	54	-14.53	Horizontal
14880.00	28.06	39.87	9.34	36.88	40.39	54	-13.61	Horizontal
24583.00	*	*	*	*	*	74	*	Horizontal

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

5. Test Setup Photos of the EUT


Conducted Emission

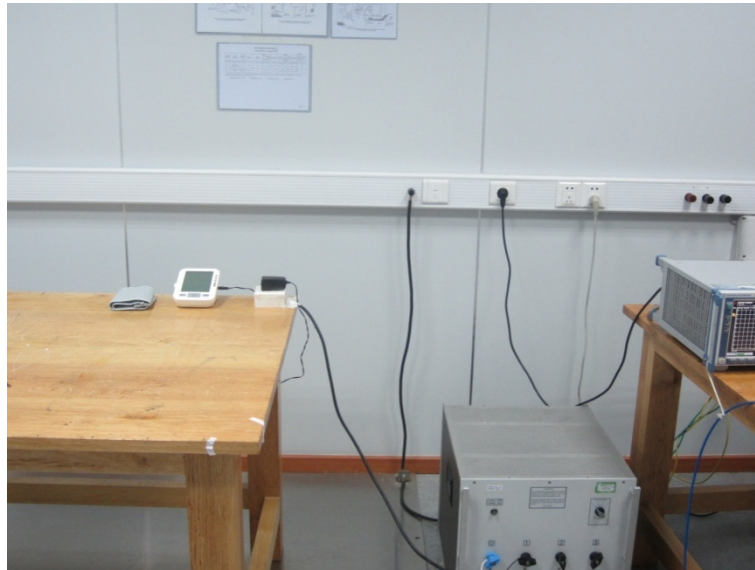

Radiated Emission (30MHz-1GHz)

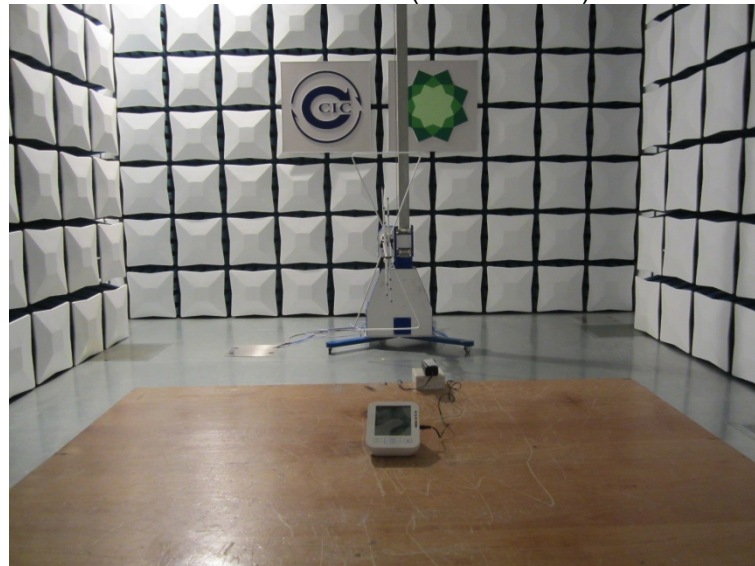

Radiated Emission (Above 1GHz)

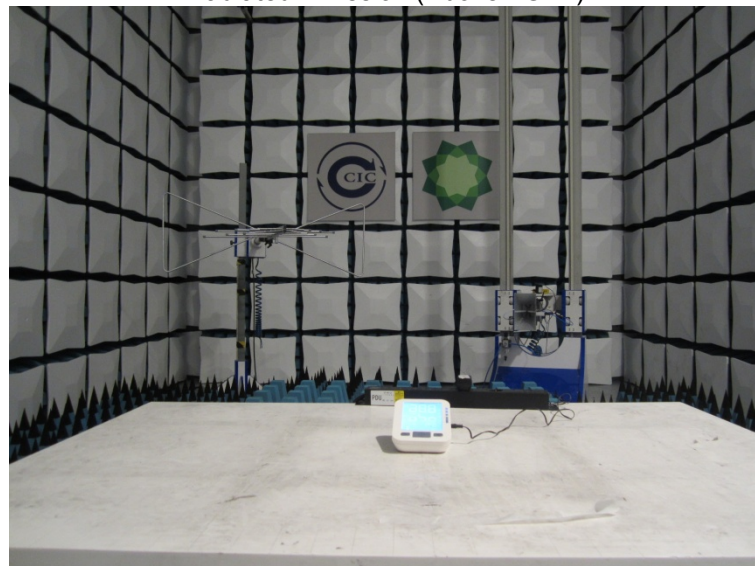


6. External and Internal Photos of the EUT

External photos of the EUT













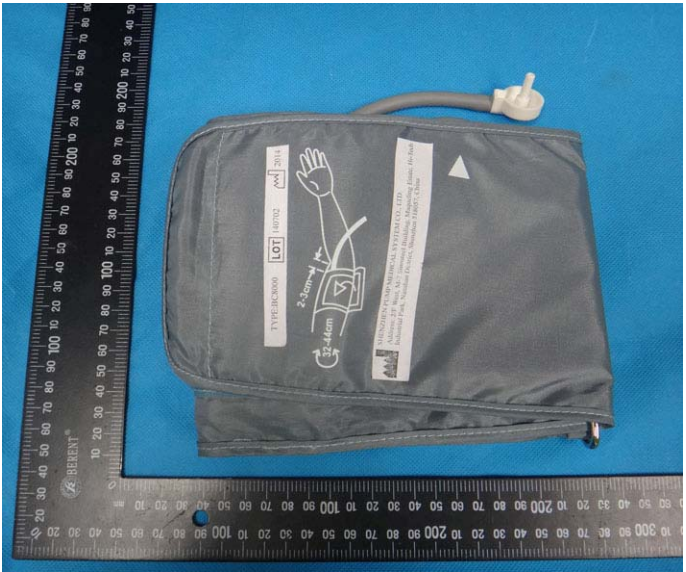


Internal photos of the EUT




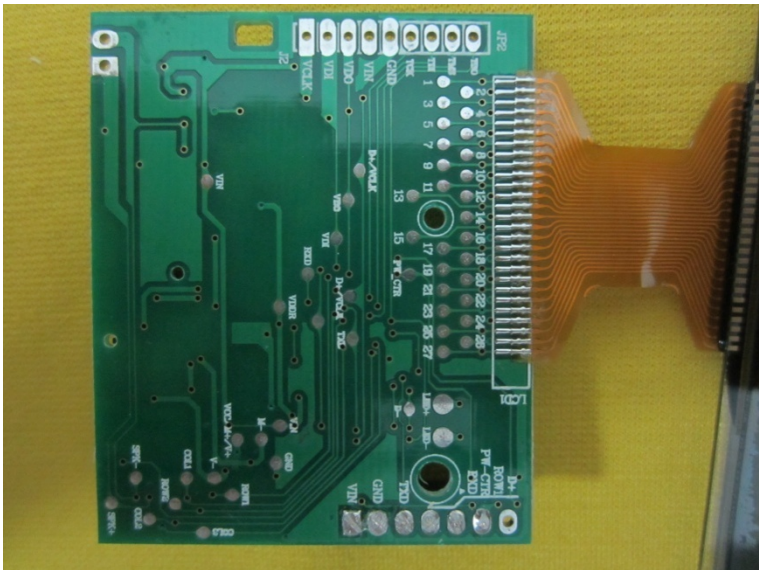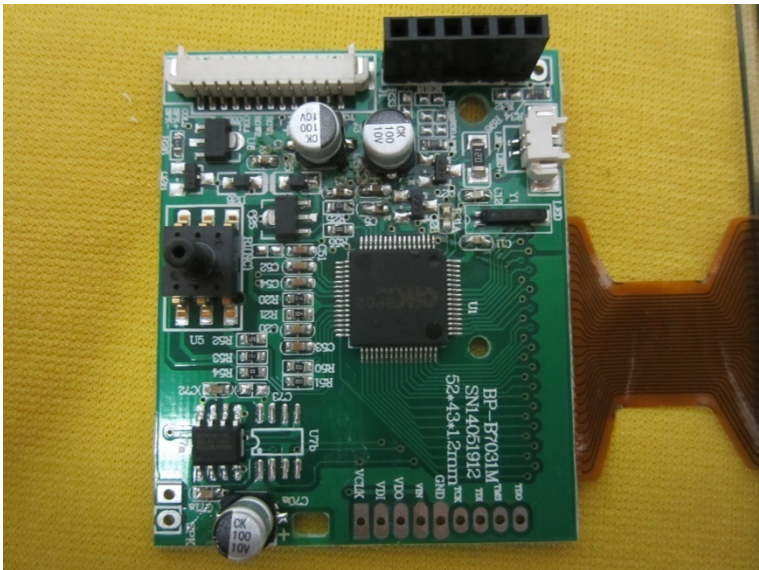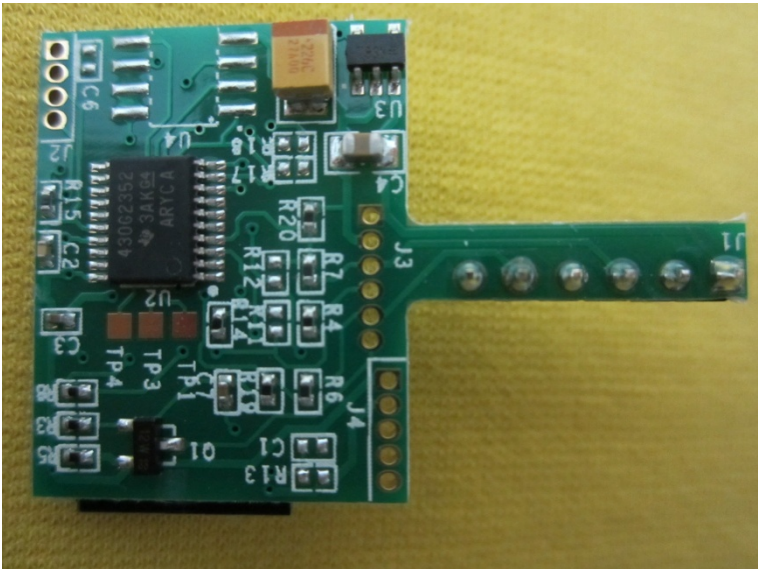

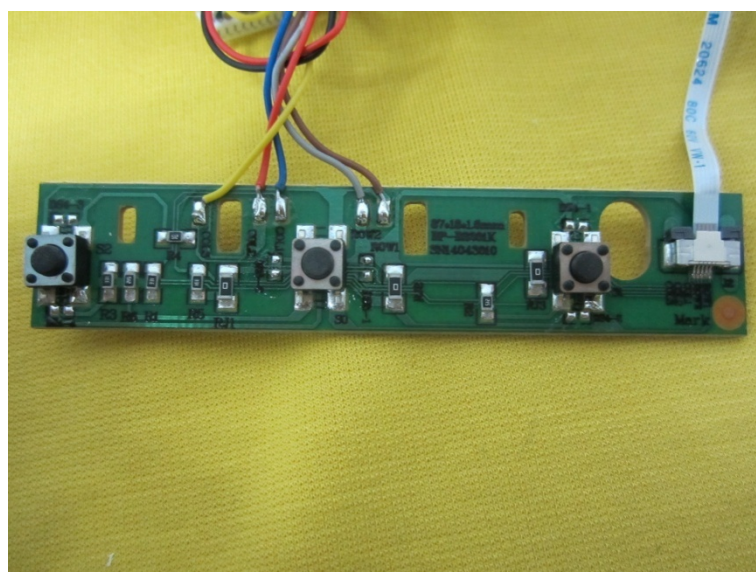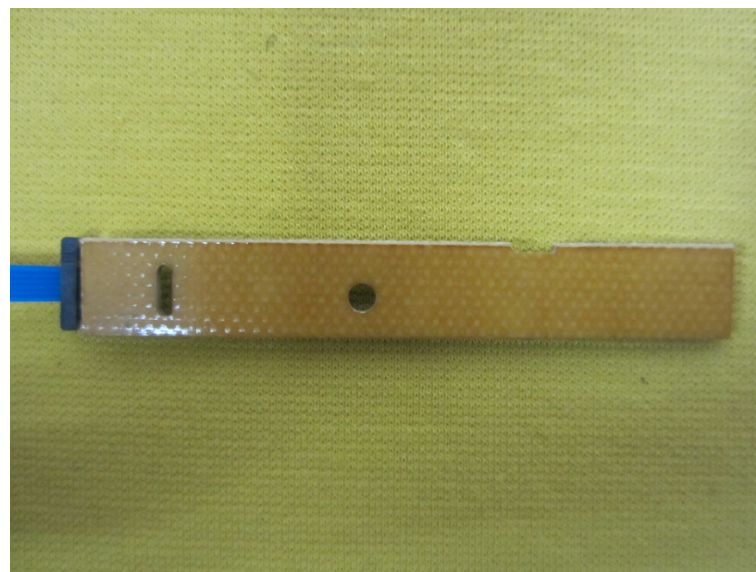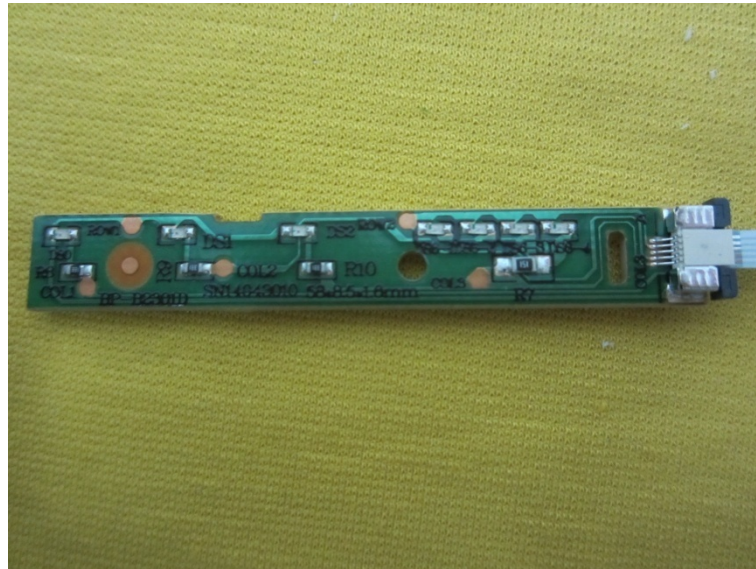

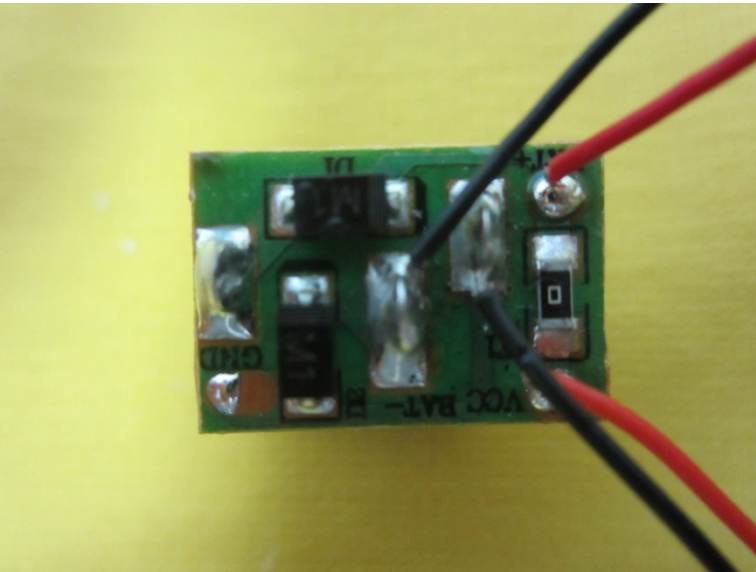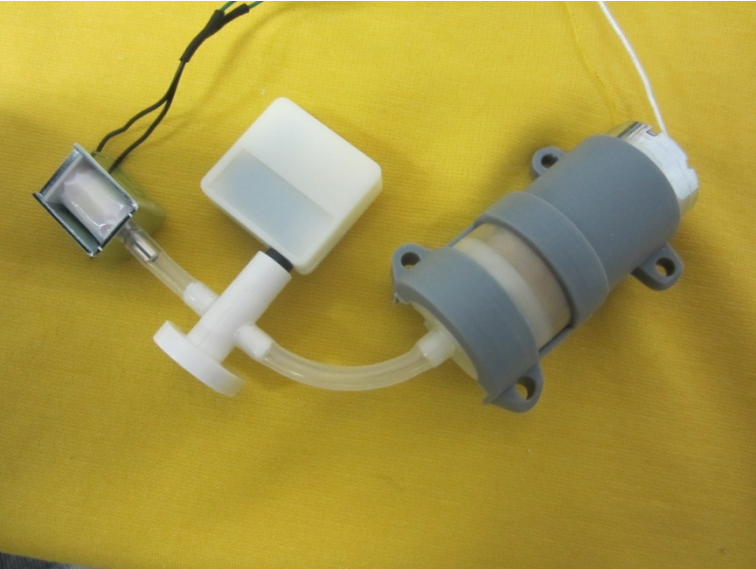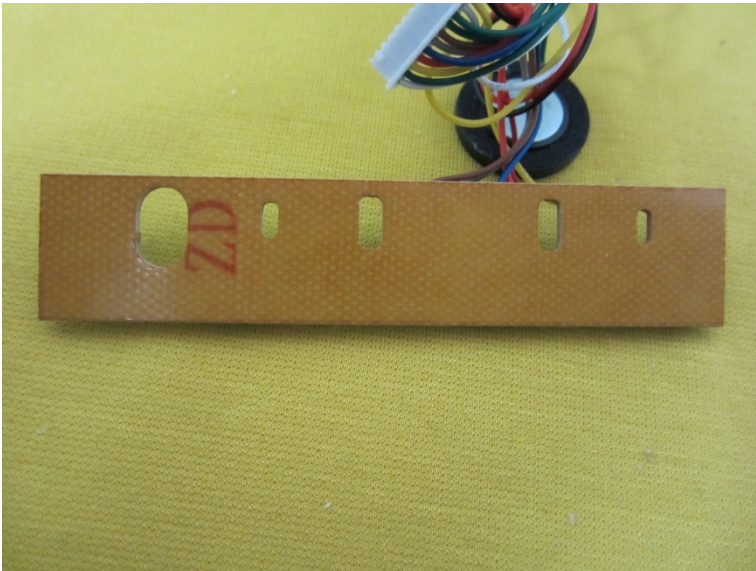

BT Antenna

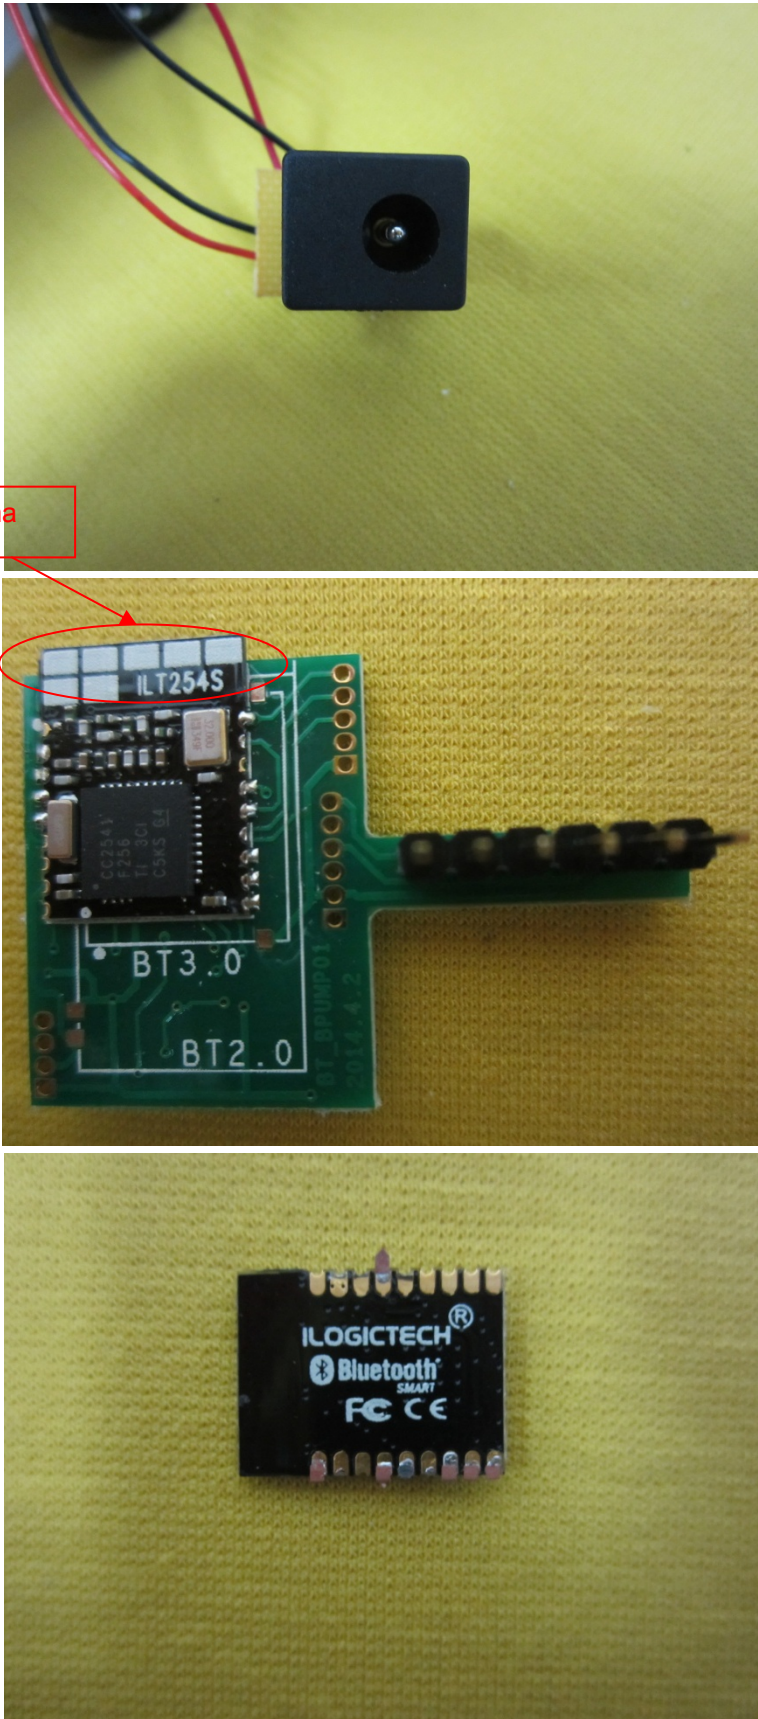

.....End of Report.....