



FCC RADIO TEST REPORT

Applicant : BROWAN Communications Inc.

Address : No.15-1, Zhonghua Rd., Hsinchu Industrial Park,
Hukou, Hsinchu, Taiwan, 30352.

Equipment : Pico Next Indoor Gateway

Model No. : L0007

Trade Name : BROWAN

FCC ID. : 2AAS9-L0007

I HEREBY CERTIFY THAT:

The sample was received on Aug. 11, 2022 and the testing was completed on Aug. 27, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software.....	7
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests	10
4. Antenna Requirements.....	12
4.1 Antenna Construction and Directional Gain.....	12
5. Test of AC Power Line Conducted Emission	13
5.1 Test Limit	13
5.2 Test Procedures	13
5.3 Typical Test Setup	14
5.4 Test Result and Data.....	15
5.5 Test Photographs	17
6. Test of Radiated Spurious Emission.....	18
6.1 Test Limit	18
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9KHz ~ 30MHz)	21
6.5 Test Result and Data (30MHz ~ 1GHz)	21
6.6 Test Result and Data (1GHz ~ 25GHz).....	23
6.7 Restricted Bands of Operation	41
6.8 Test Photographs (30MHz ~ 1GHz)	42
6.9 Test Photographs (1GHz ~ 25GHz)	43
7. Test of Conducted Spurious Emission	45
7.1 Test Limit	45
7.2 Test Procedure	45
7.3 Test Setup Layout	45
7.4 Test Result and Data.....	45
8. On Time, Duty Cycle and Measurement methods	52
8.1 Test Limit	52
8.2 Test Procedure	52
8.3 Test Setup Layout	52
8.4 Test Result and Data.....	52
9. 6dB Bandwidth Measurement Data.....	54
9.1 Test Limit	54
9.2 Test Procedures	54
9.3 Test Setup Layout	54



9.4	Test Result and Data.....	54
10.	Maximum Average Output Power	57
10.1	Test Limit	57
10.2	Test Procedures	57
10.3	Test Setup Layout	57
10.4	Test Result and Data.....	58
11.	Power Spectral Density	59
11.1	Test Limit	59
11.2	Test Procedures	59
11.3	Test Setup Layout	59
11.4	Test Result and Data.....	59
12.	Radio Frequency Exposure	62
12.1	Applicable Standards	62
12.2	EUT Specification.....	63
12.3	Result	63



History of this test report

Report No.	Issued Date	Description
22070015-TRFCC01	Sep. 02, 2022	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report (22070015-TEFV01).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment

Operation Frequency Range	802.11b/g/n: 2400-2483.5MHz
Center Frequency Range	802.11b/g/n: 2412MHz-2462MHz
Modulation Type	WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM
Modulation Technology	DSSS, OFDM
Data Rate	WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20
Antenna Type	Dipole Antenna
Antenna Gain	WLAN: 2400-2483.5MHz: 2.56dBi
Firmware Number	1.1.27
Serial Number	2201060000003
Adapter	Brand: Frecom Model: F18L16-120150SPAU
WIFI Antenna	Brand: TSKY Model: A8-A003-00163
LTE Antenna	Brand: TSKY Model: A8-A003-00163
LoRa Antenna	Brand: TSKY Model: A8-A003-00106
GPS Antenna	Brand: Honglianxing Model: GPS ANT01 Brand: INPAQ Model: GPSSGLONASS53D-S6-00

Note:

1. For more details, please refer to the User's manual of the EUT.
2. The difference between GPS Antennas are brand and model only.

2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- An executive program, "wl command" under Windows 10 system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

AC Power Line Conducted Emission	
Test Mode 1	802.11g (6Mbps) (120V/60 Hz), GPS: GPS ANT01, Power from Adapter
Test Mode 2	802.11g (6Mbps) (120V/60 Hz), GPS: GPS ANT01, Power from PoE
Test Mode 3	802.11g (6Mbps) (120V/60 Hz), GPS: GPSGLONASS53D-S6-00, Power from Adapter
Test Mode 4	802.11g (6Mbps) (240V/60 Hz), GPS: GPS ANT01, Power from Adapter
caused "Test Mode 4" generated the worst case, it was reported as the final data.	
Radiated Emissions (Below 1GHz)	
Test Mode 1	802.11g (6Mbps) (120V/60 Hz), Power from Adapter
Test Mode 2	802.11g (6Mbps) (120V/60 Hz), Power from PoE
Test Mode 3	802.11g (6Mbps) (120V/60 Hz), Power from CAR-Battery
Test Mode 4	802.11g (6Mbps) (240V/60 Hz), Power from Adapter
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiated Emissions (1GHz ~ 25GHz)	
Test Mode 1	802.11b (1Mbps)
Test Mode 2	802.11g (6Mbps)
Test Mode 3	802.11n HT20 (6.5Mbps)

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/ Length/Type
Notebook	Lenovo	S1GL2W	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
POE	ZIJIA	B01D9TE4RS	N/A	N/A
DC Connector	PHOENIX	1754465	0.2m / NS	N/A
CAR-Battery	YUASA	55B24R(S)- CMF II	N/A	N/A
RJ45 Cable*2	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
POE	ZIJIA	B01D9TE4RS	N/A	N/A
Notebook	Lenovo	S1GL2W	N/A	Adapter / 1.8m / NS
RJ45 Cable*2	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-12205 for Telecommunication test C-14663 for Conducted emission test R-14218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2022/08/22~ 2022/08/26	25.3~27.2 °C / 45~50%	Leon Huang
Radiated Emissions	3M02-NK	2022/08/25~ 2022/08/27	22~24 °C / 34~45%	Dian Chen
AC Power Line Conducted Emission	CON01-NK	2022/08/26	25 °C / 59%	Leon Huang

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.7dB
Radiated Spurious Emission(1GHz~25GHz)	±6.8dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2021/11/05	2022/11/04
Active Loop Antenna	EMCO	6507	40855	2022/05/25	2023/05/24
Horn Antenna	EMCO	3115	31601	2021/10/14	2022/10/13
Horn Antenna	EMCO	3116	31974	2021/10/04	2022/10/03
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2021/11/16	2022/11/15
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2022/07/20	2023/07/19
Preamplifier	Agilent	8449B	3008A01954	2022/03/17	2023/03/16
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2021/11/16	2022/11/15
Preamplifier	EM Electronics corp.	EM330	60658	2021/10/13	2022/10/12
Cable-6m(9k~300M)	NA	EMC5D-BM-B M-6	130605	2021/09/22	2022/09/21
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2022/03/21	2023/03/20
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY4569/2	2021/09/03	2022/09/02
Cable-1m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY5739/2	2021/09/03	2022/09/02
Cable-6m(1G-40G)	HUBER SUHNER	SUCOFLEX 102	MY5740/2	2021/09/03	2022/09/02
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2022/01/11	2023/01/10
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2022/01/11	2023/01/10
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA20 3SM	CCE1374	2022/04/25	2023/04/24
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2022/03/04	2023/03/03
Attenuator	KEYSIGHT	8491B	MY39250703	2022/04/12	2023/04/11
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2022/04/09	2023/04/08
Power Meter	Anritsu	ML2495A	1224005	2022/04/12	2023/04/11
Power Sensor	Anritsu	MA2411B	1207295	2022/04/12	2023/04/11
Switch Box	Theda	1-4	TW5451159	NA	NA



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2021/11/15	2022/11/14
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2021/10/05	2022/10/04
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2022/03/21	2023/03/20
Cable-6m(9k~300M)	NA	EMC5D-BM-B M-6	130606	2022/03/21	2023/03/20
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	2.56dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.





5.3 Typical Test Setup

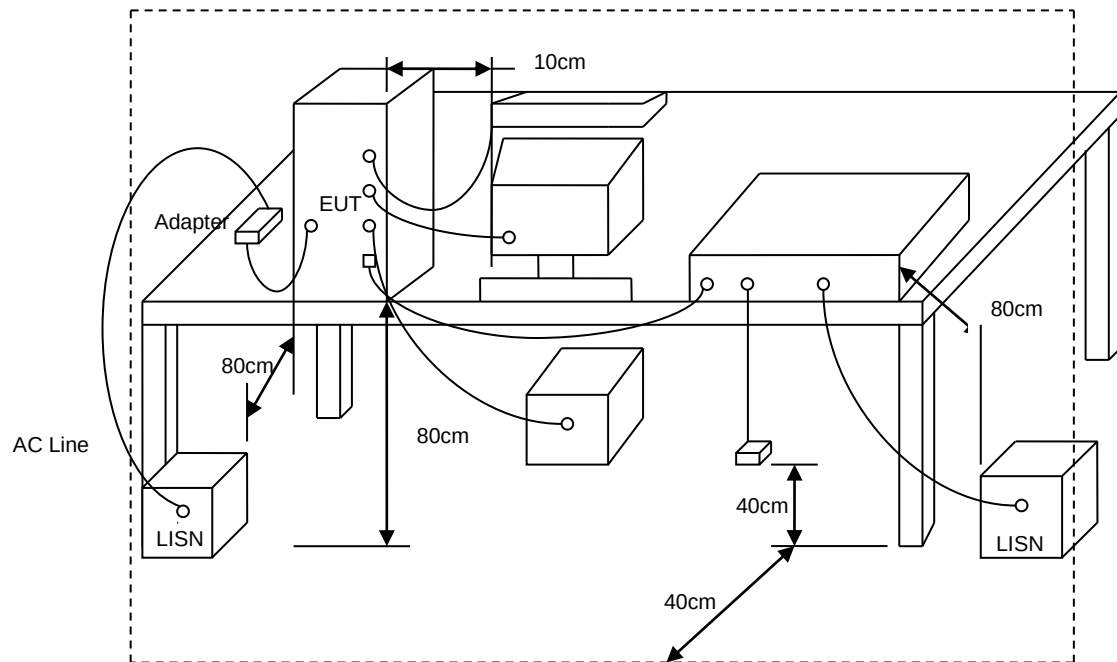



5.4 Test Result and Data

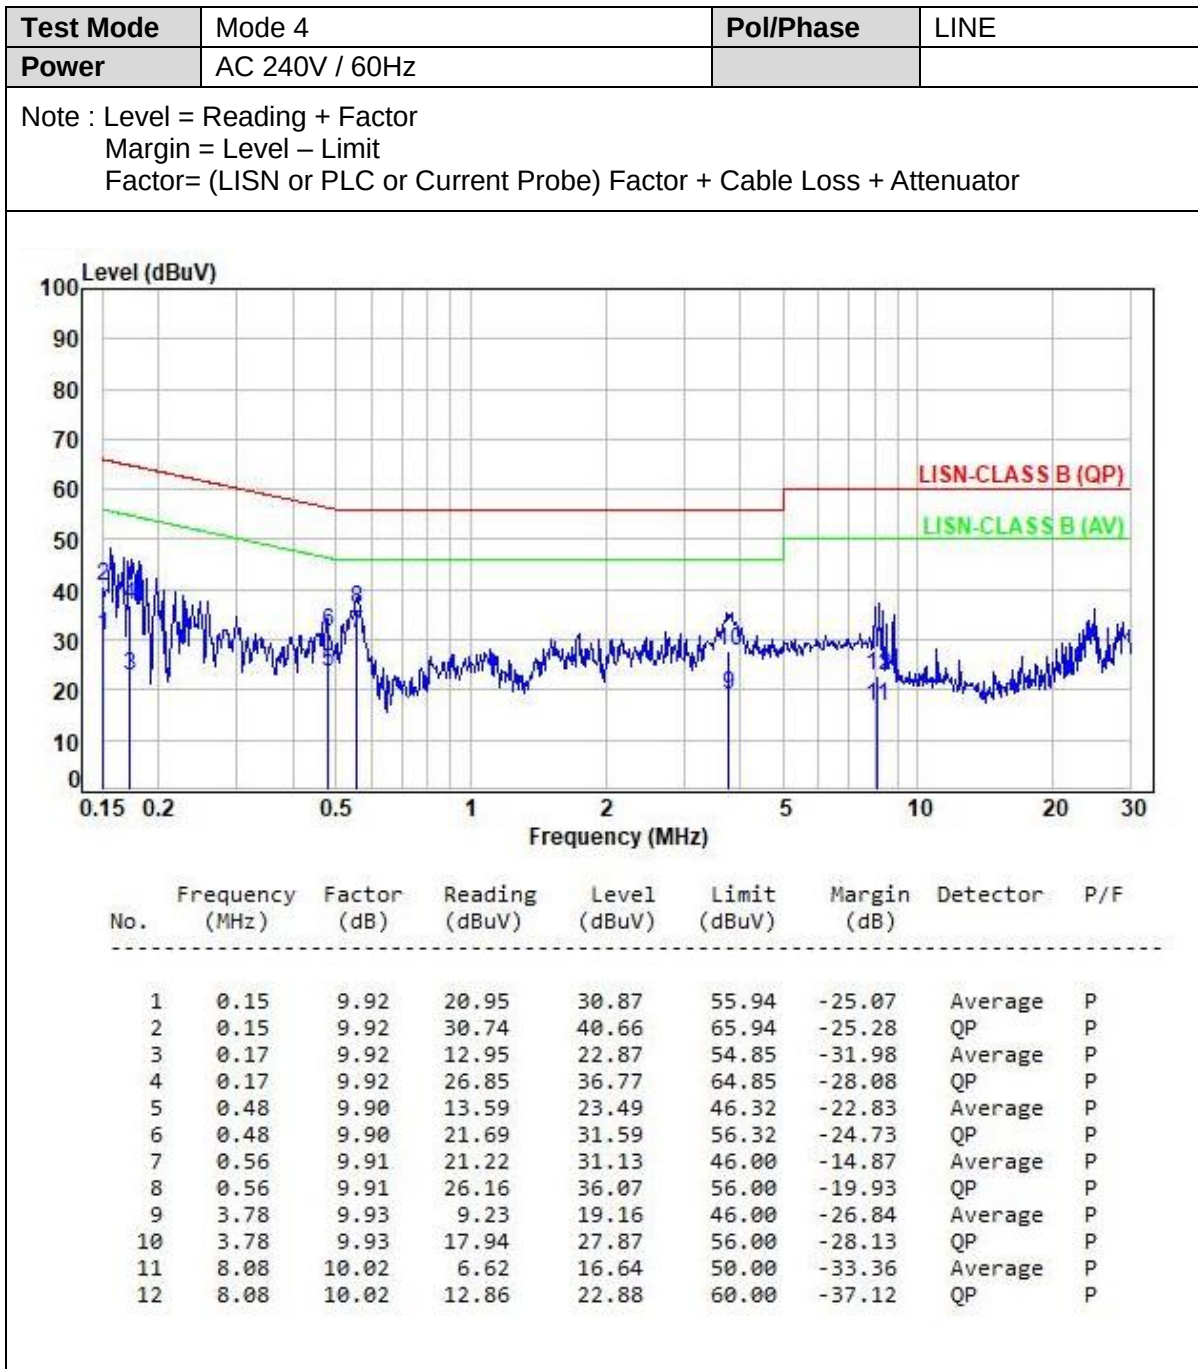

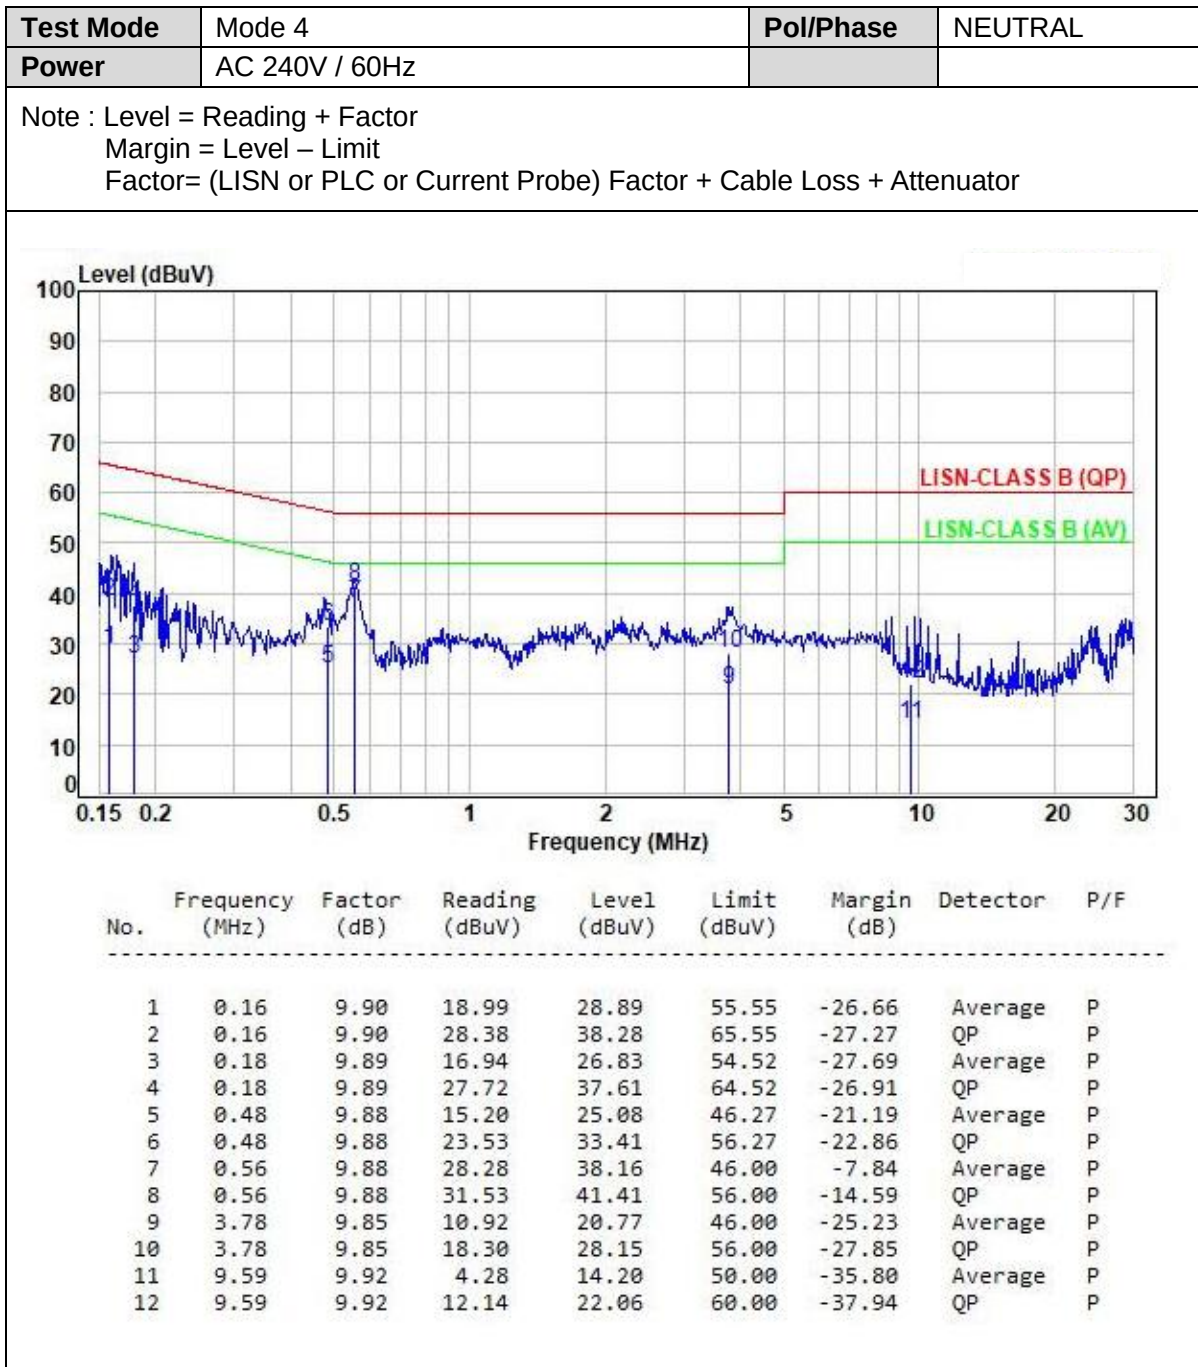



6. Test of Radiated Spurious Emission

6.1 Test Limit

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Distance Meters	Radiated ($\mu\text{V/m}$)	Radiated ($\text{dB}\mu\text{V/m}$)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Y-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

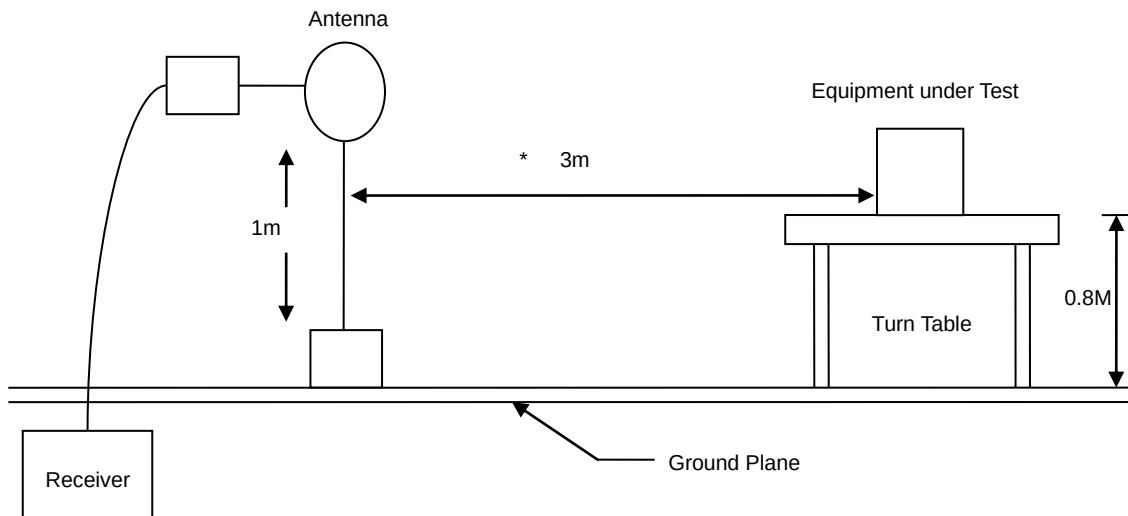

30MHz- 1GHz Test Setup

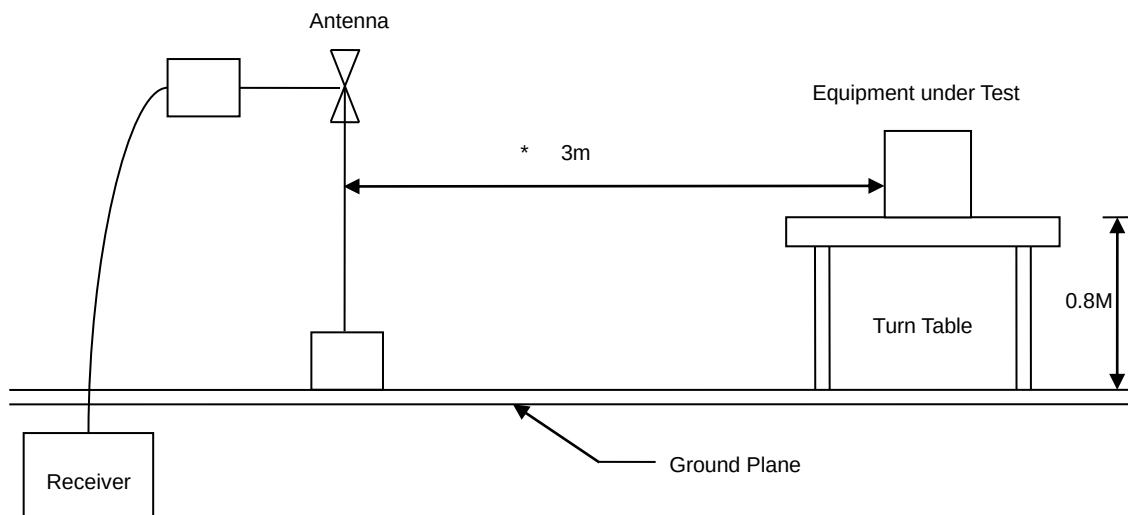

Above 1GHz Test Setup

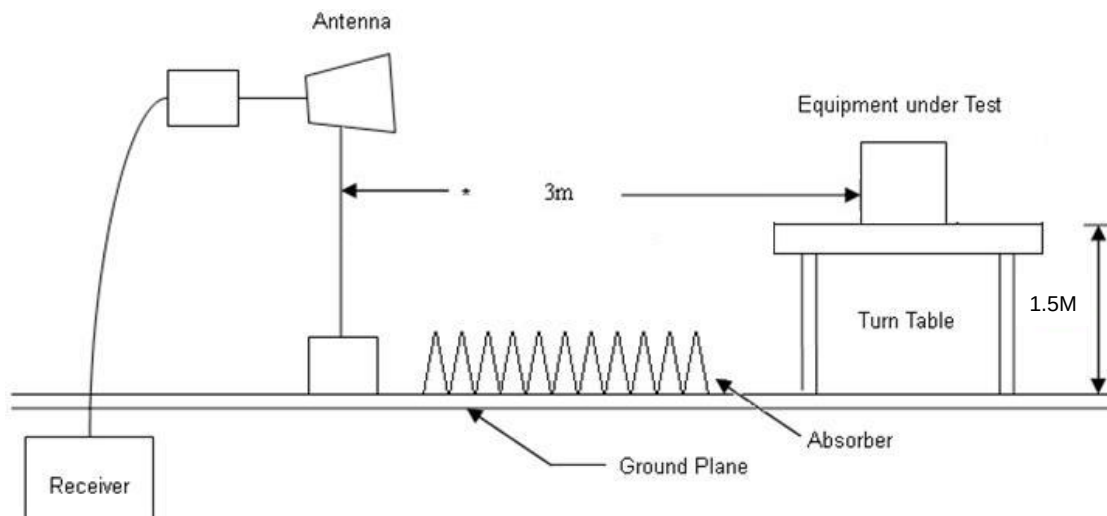





6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.


6.5 Test Result and Data (30MHz ~ 1GHz)

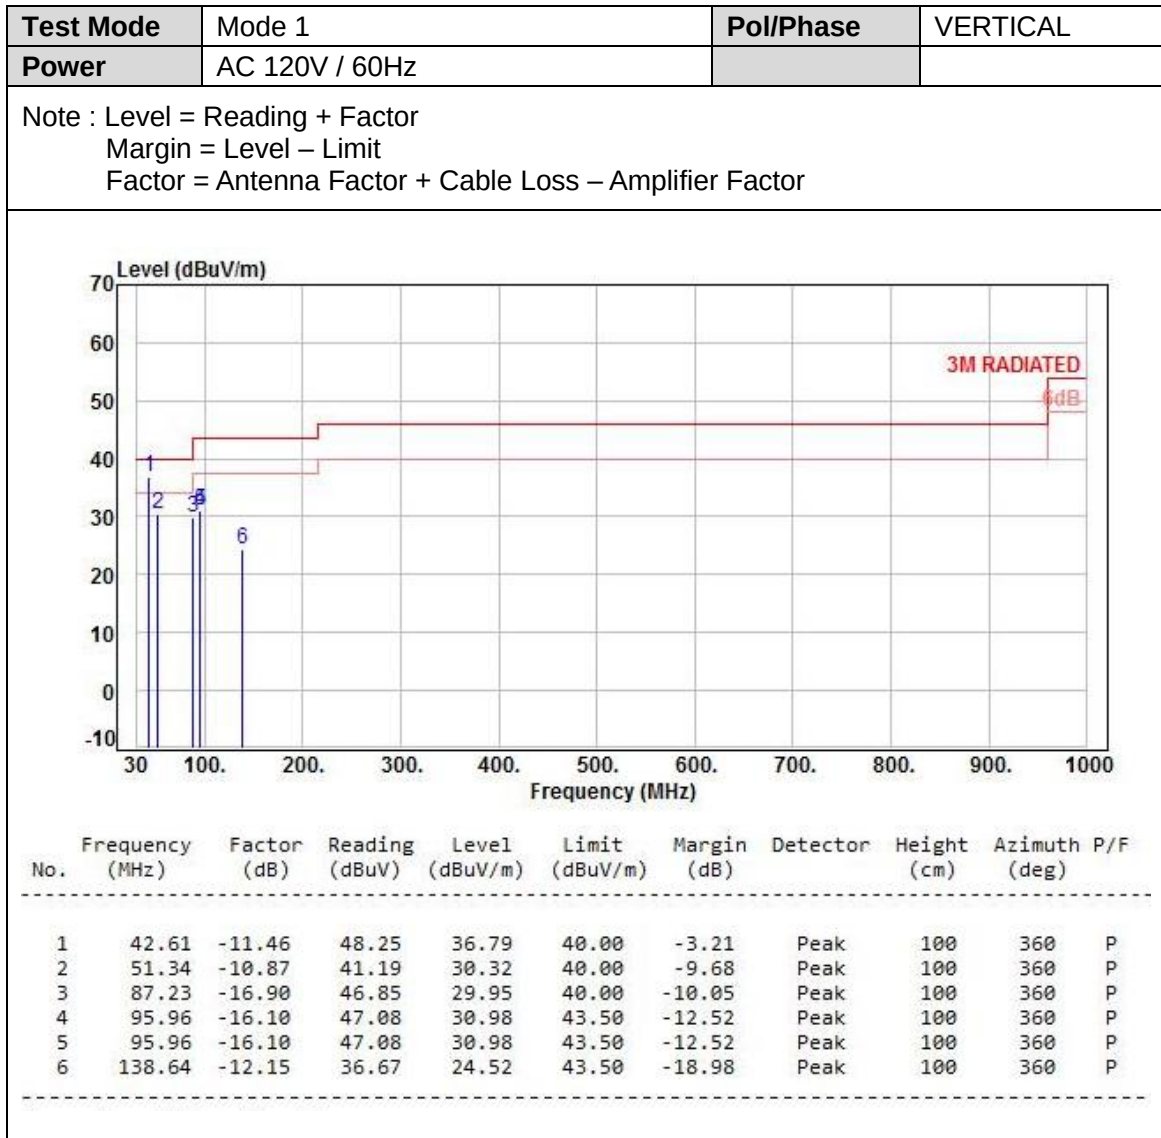


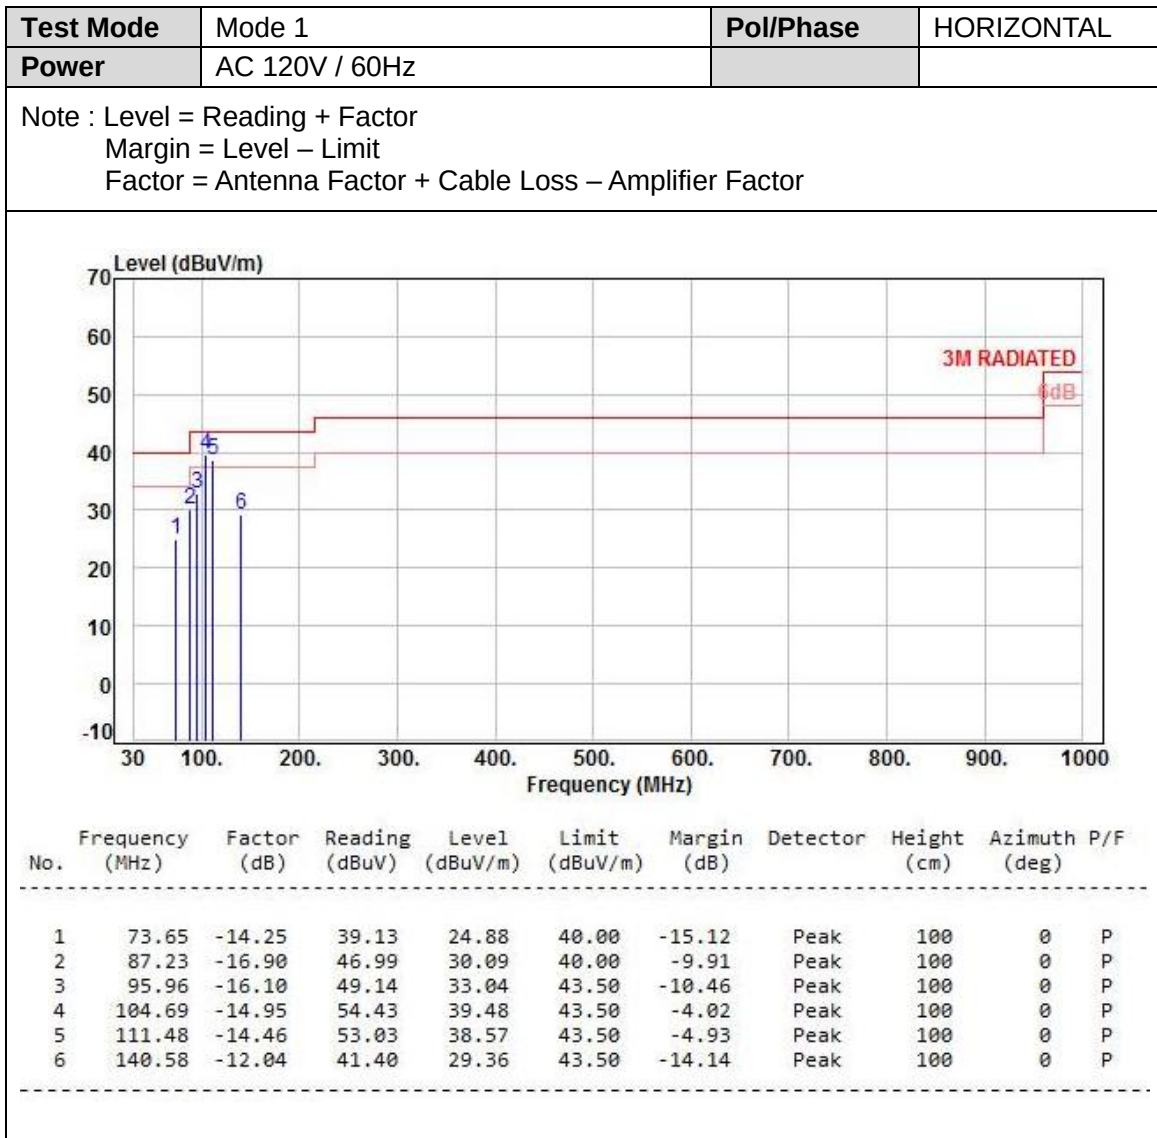






6.6 Test Result and Data (1GHz ~ 25GHz)

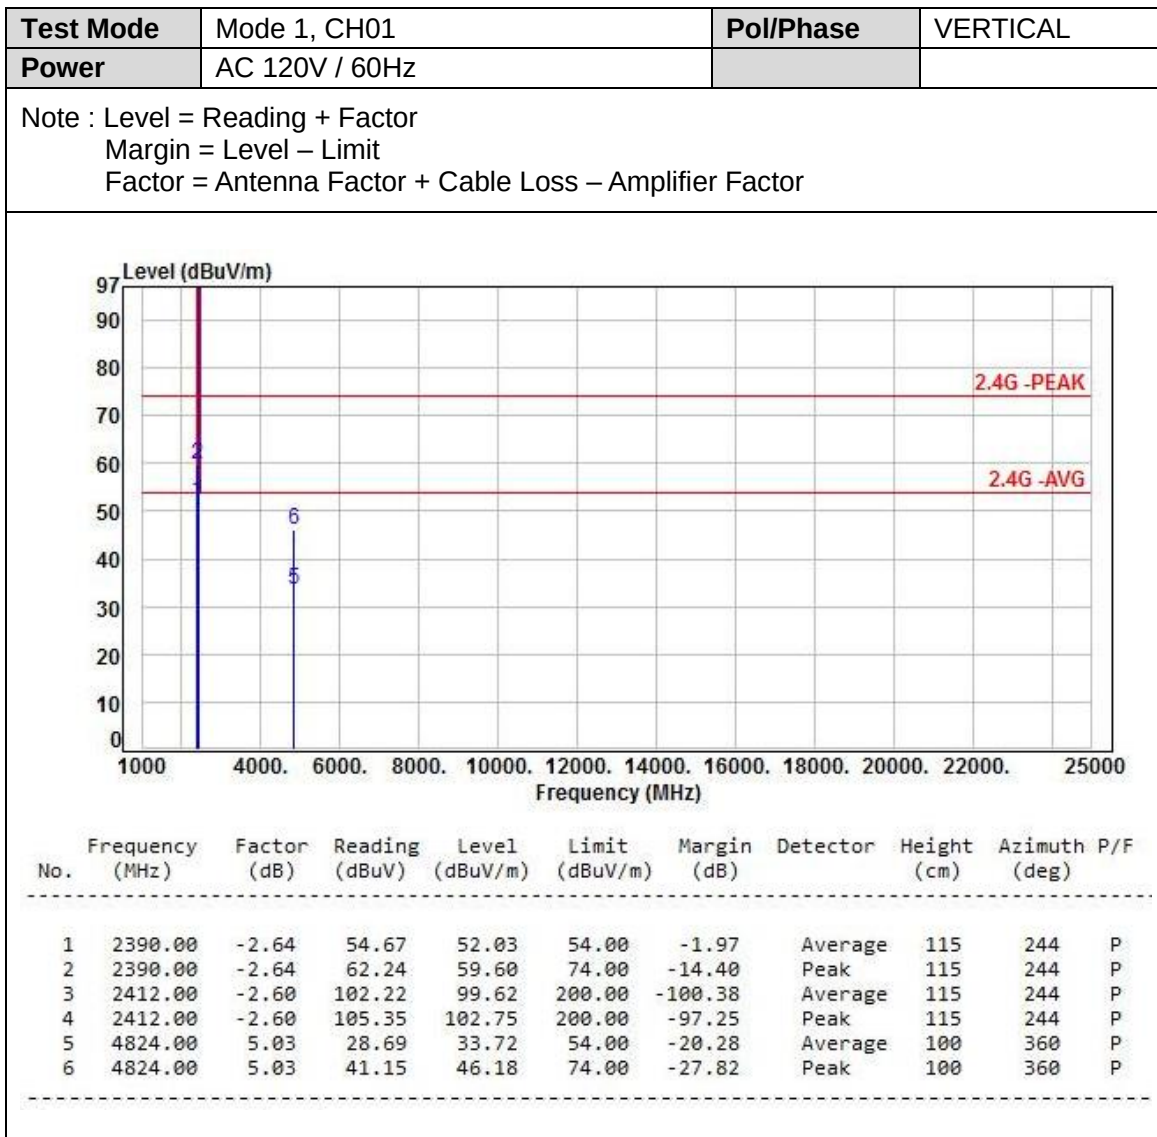


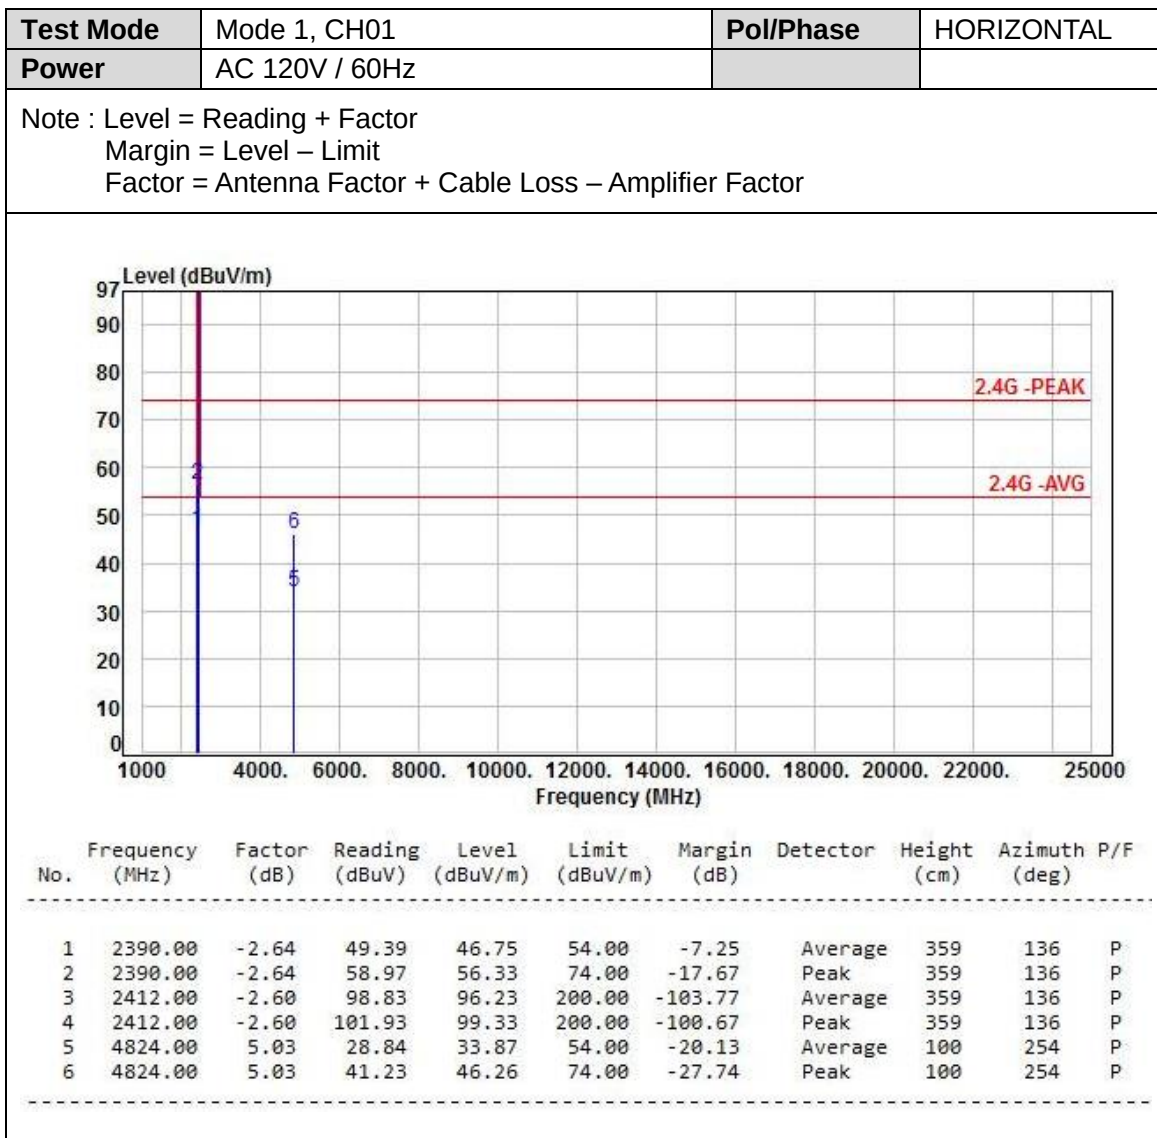


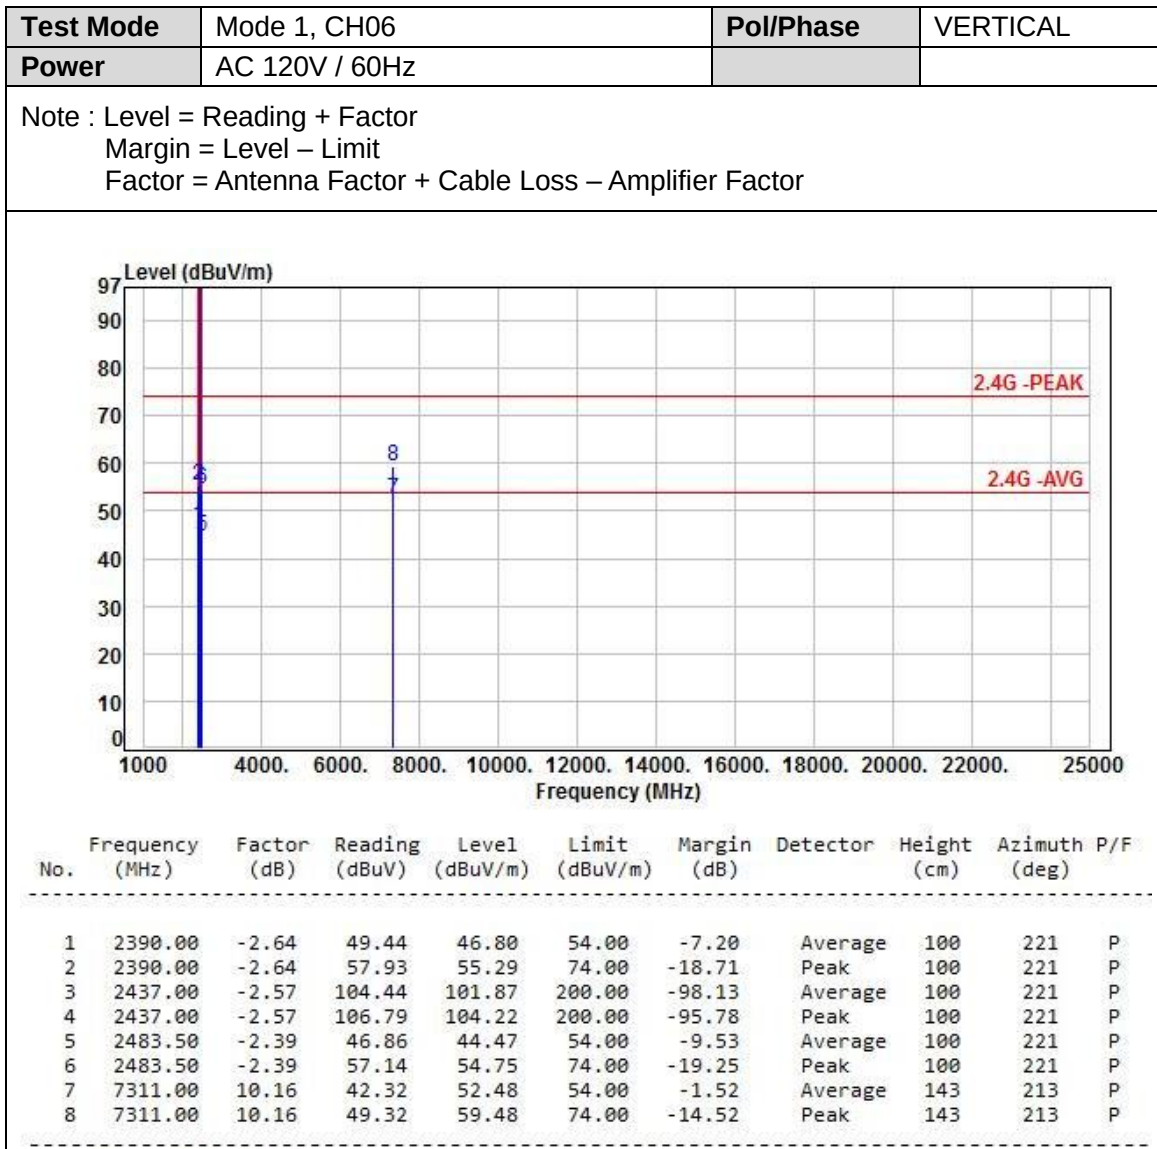


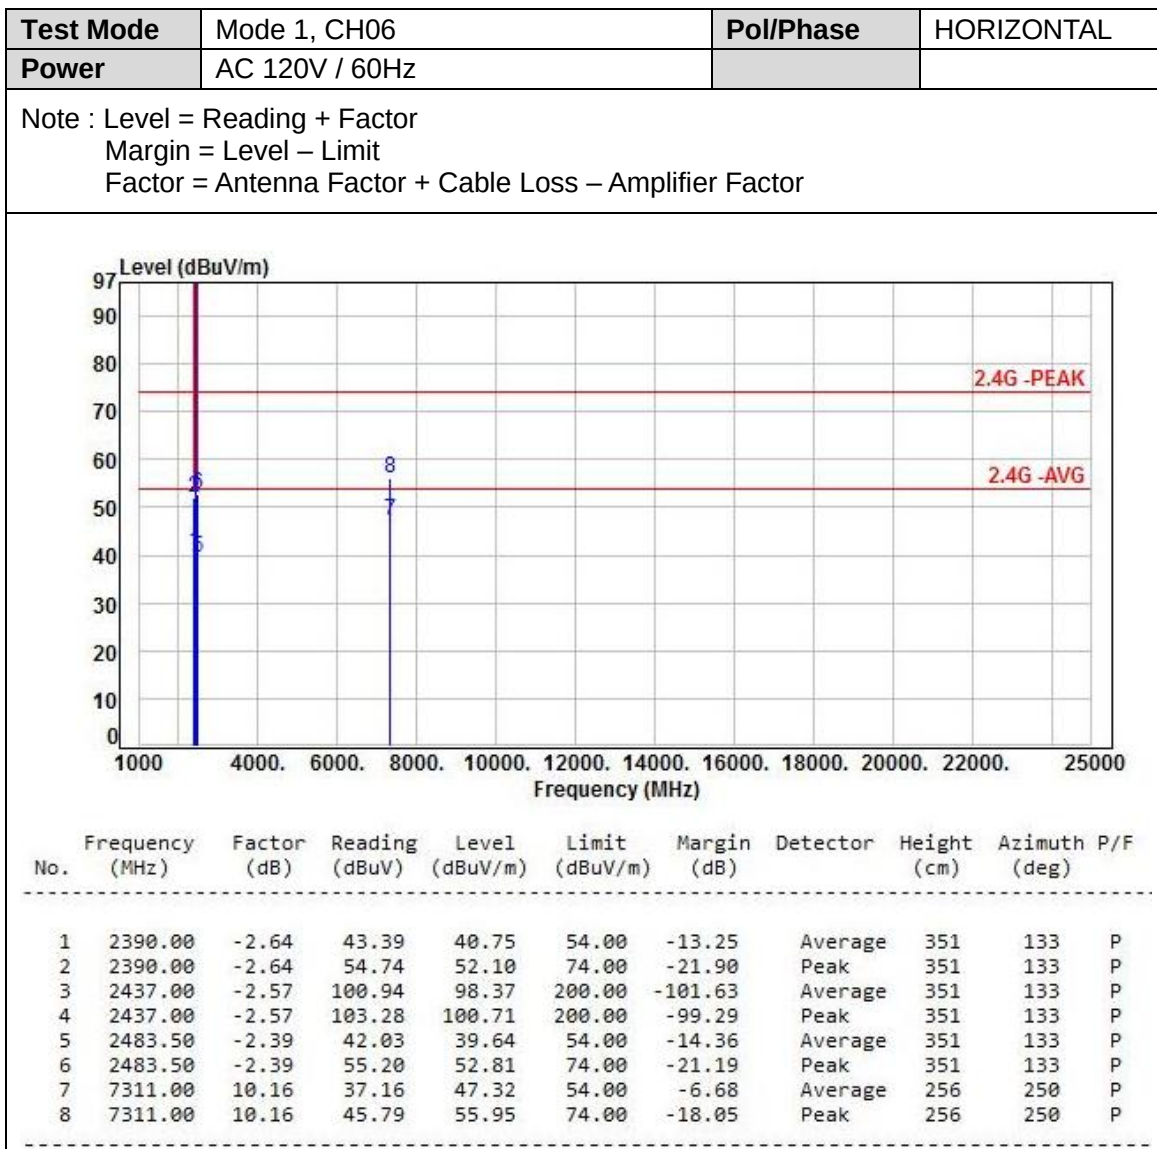


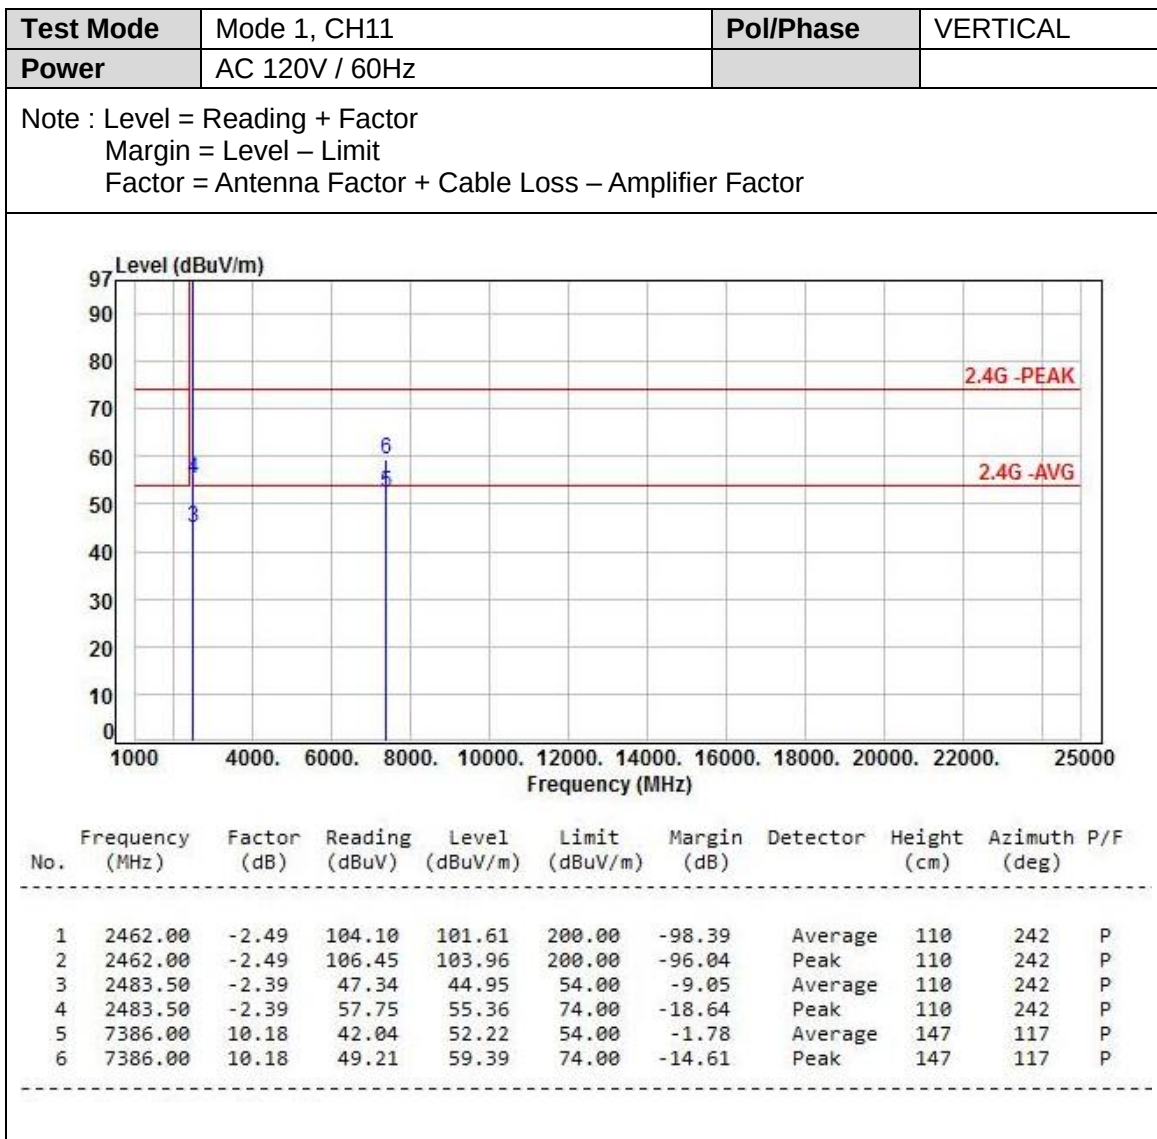


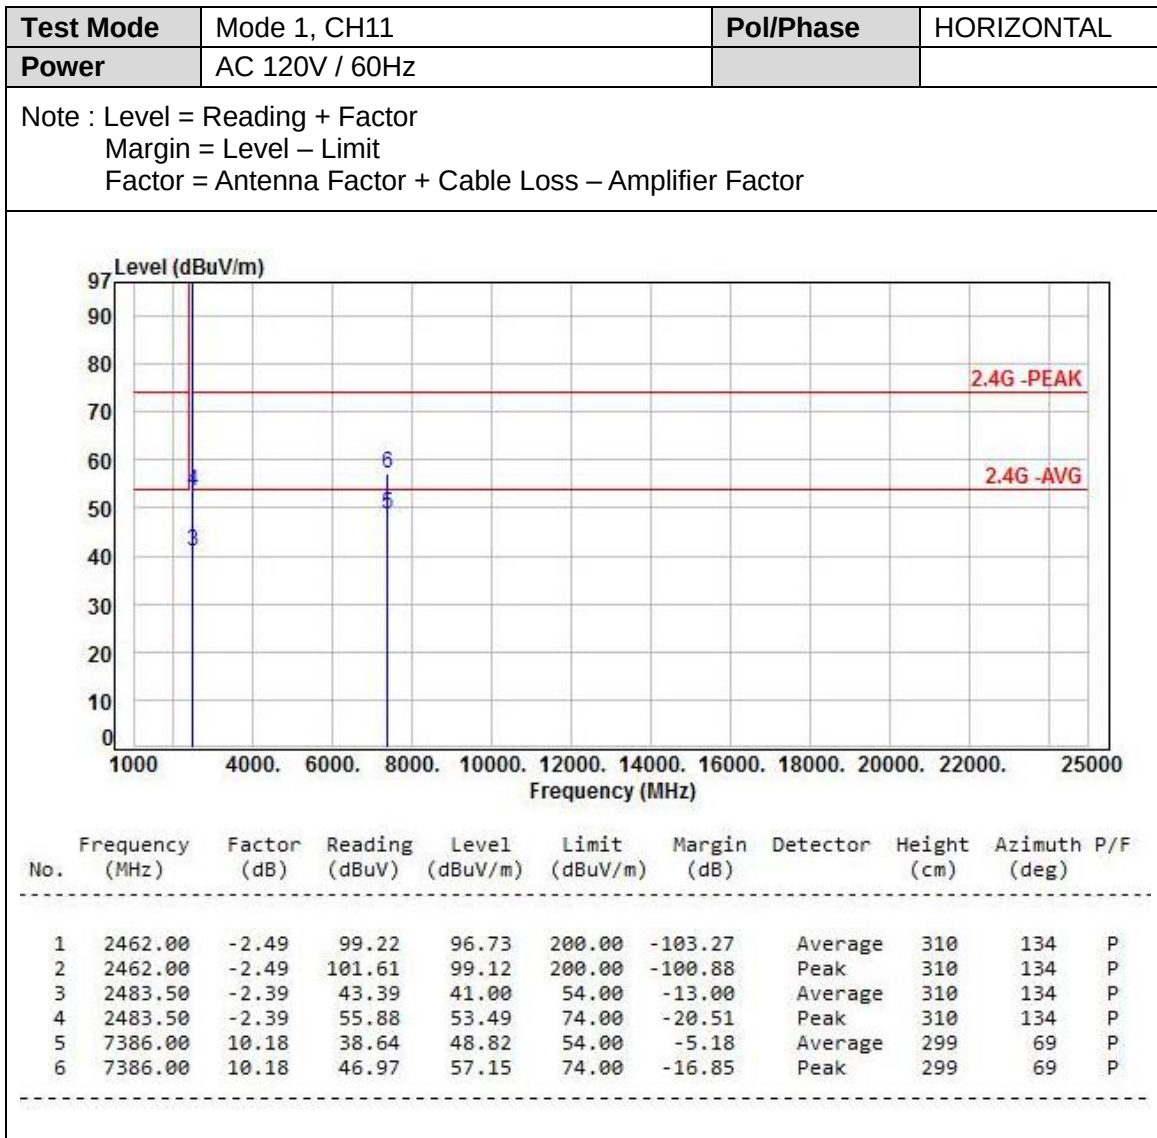


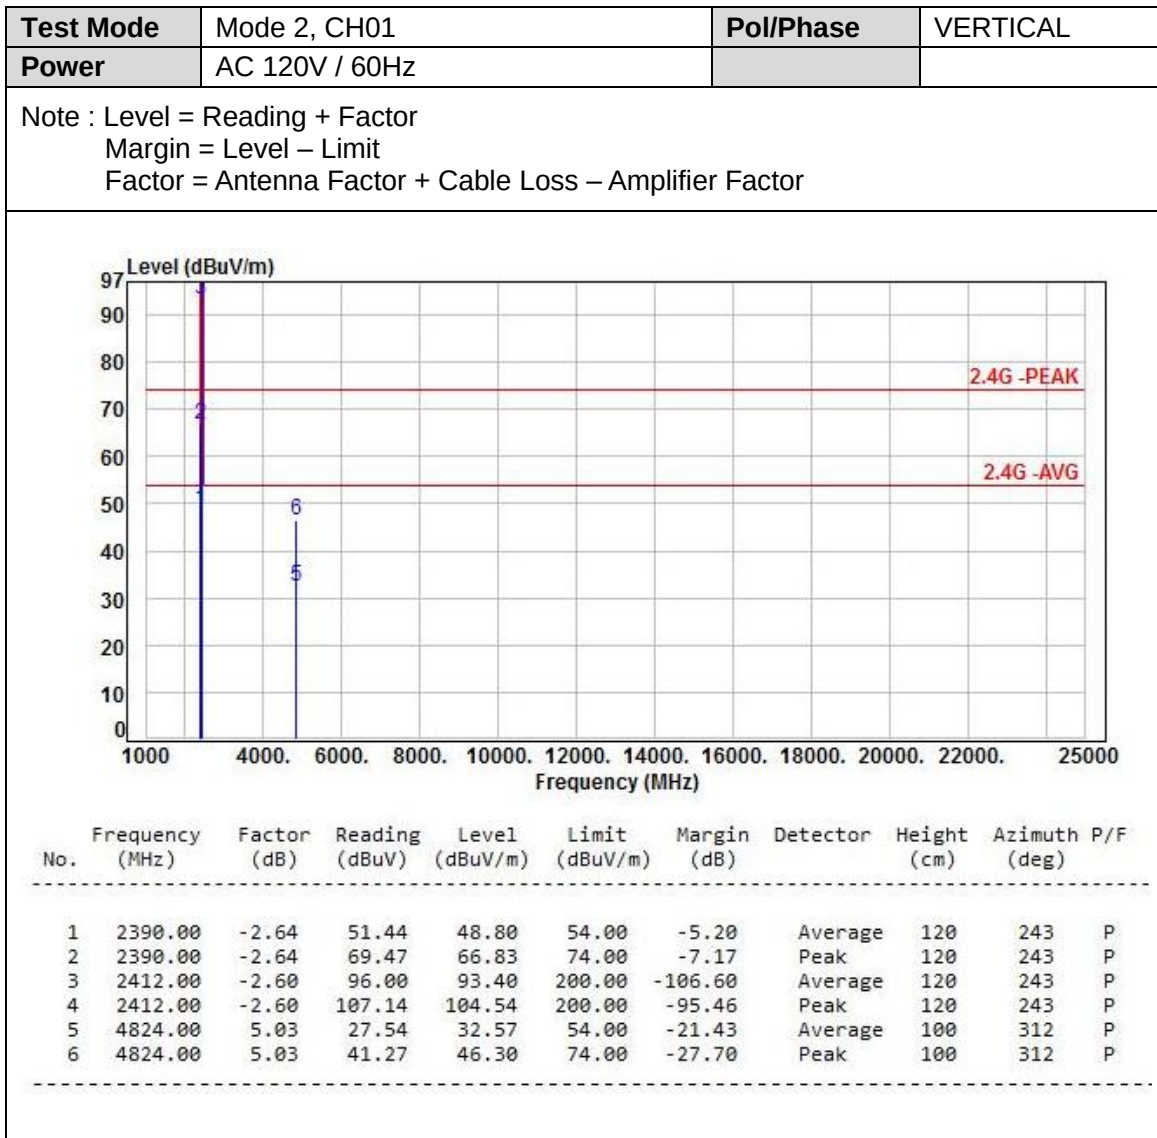


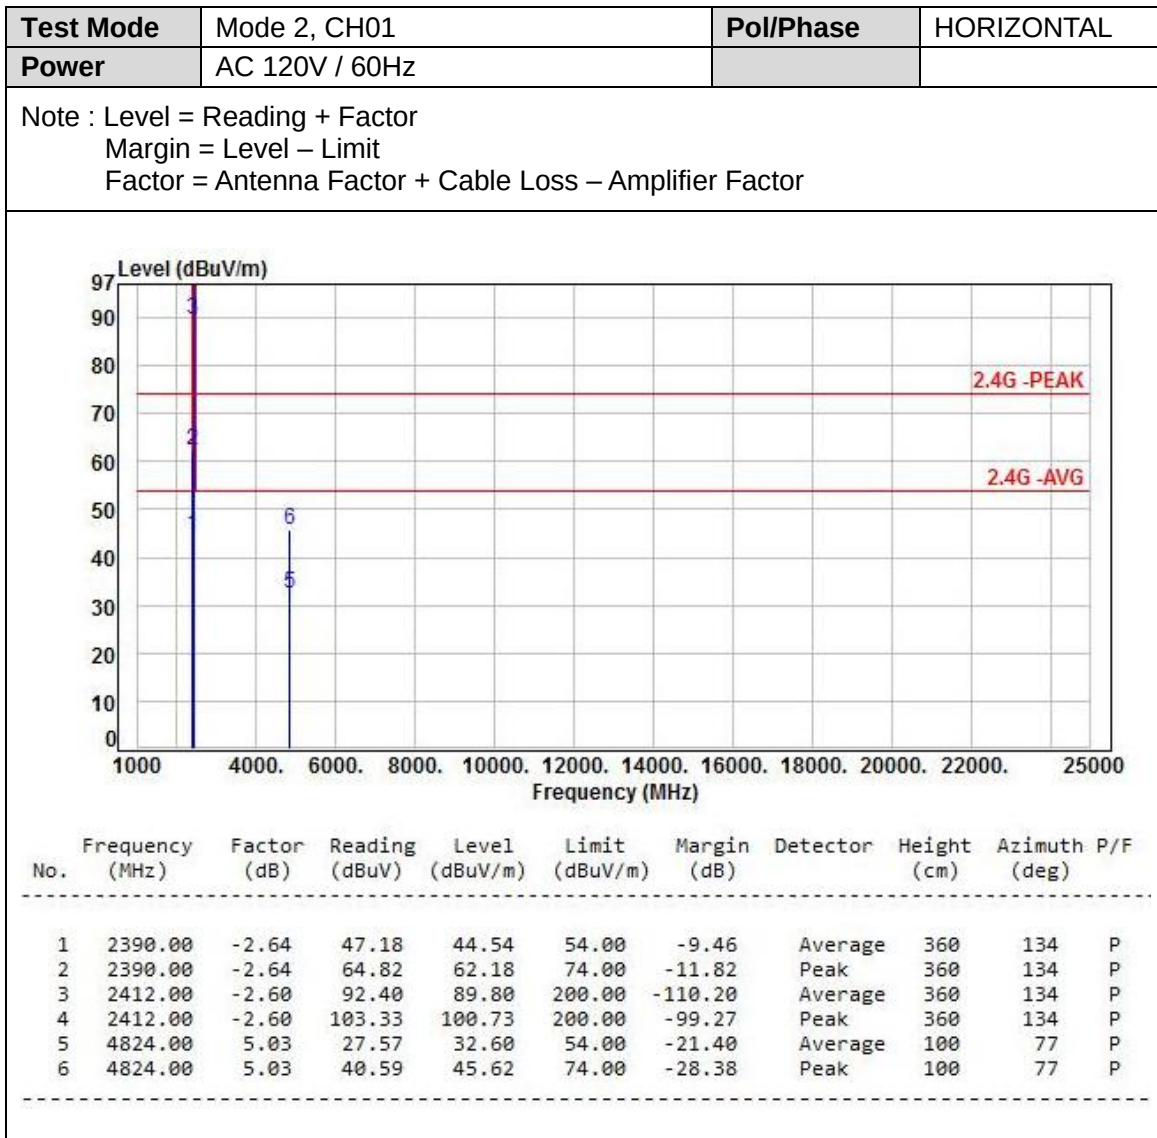


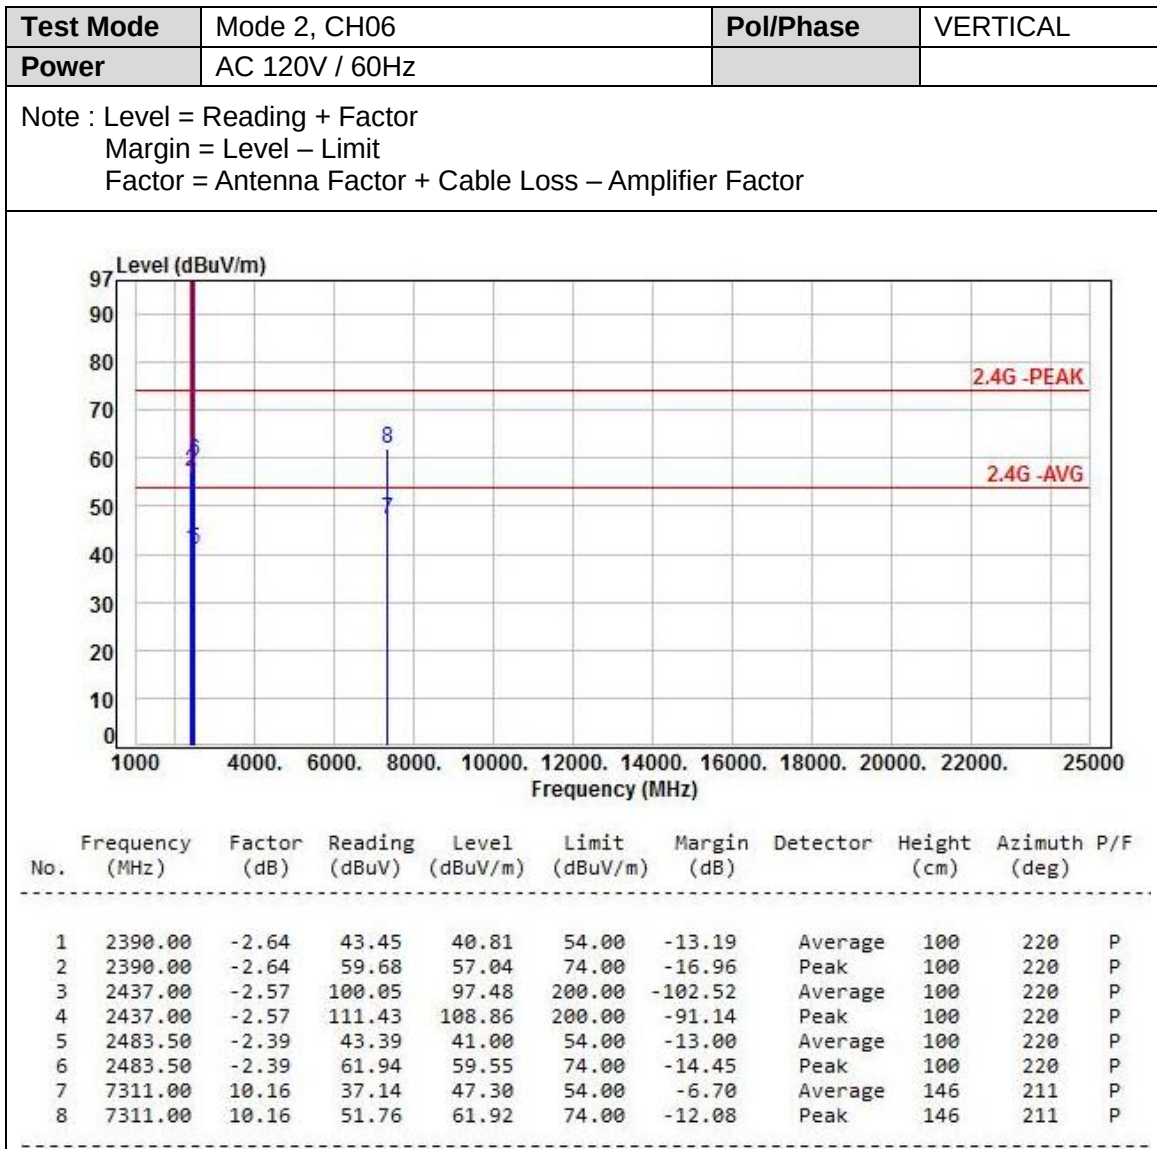


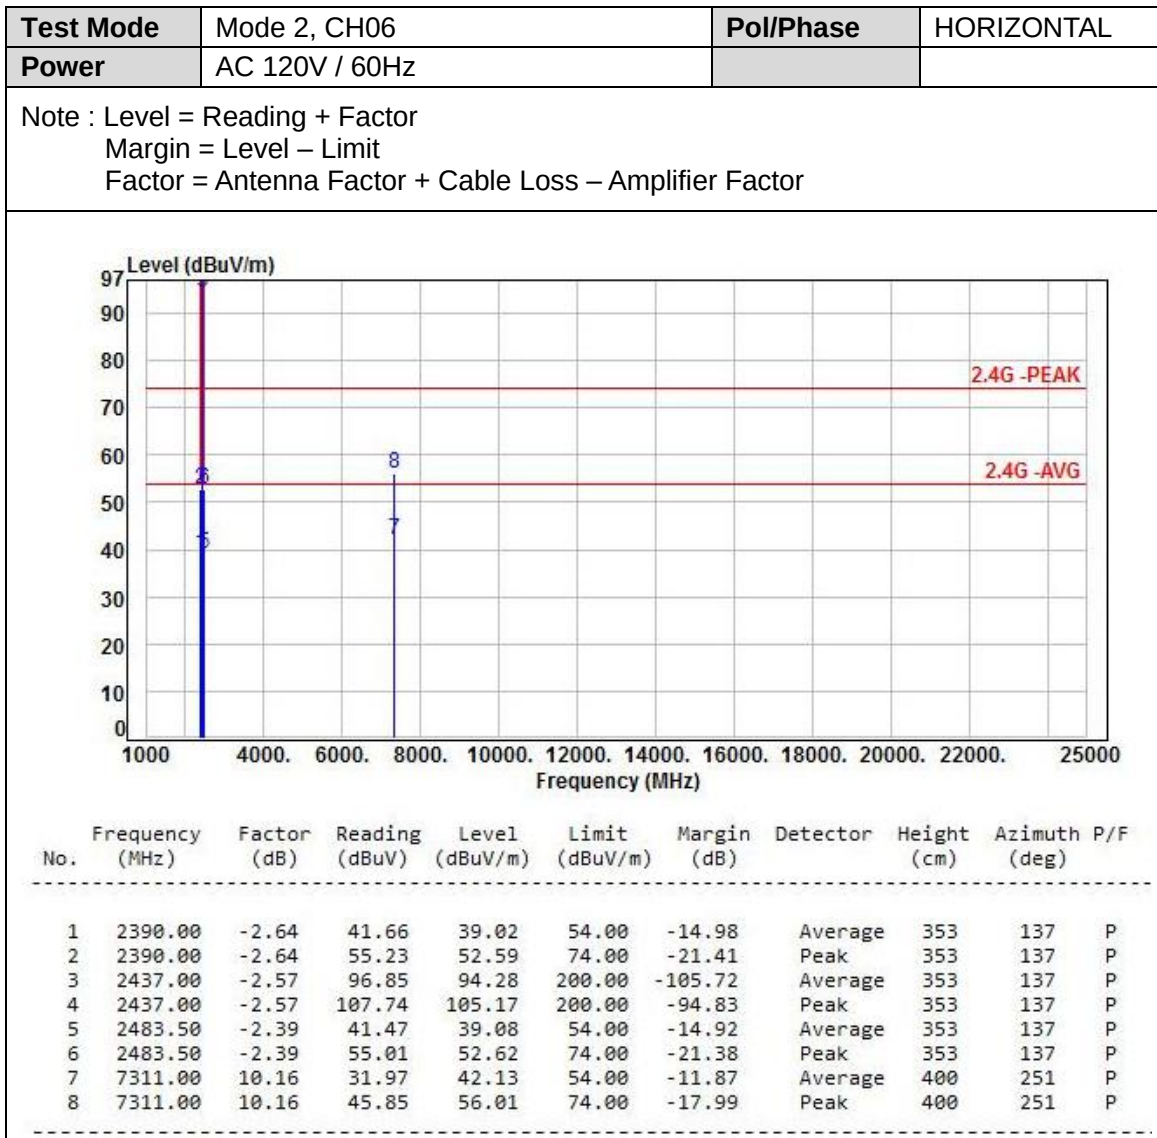


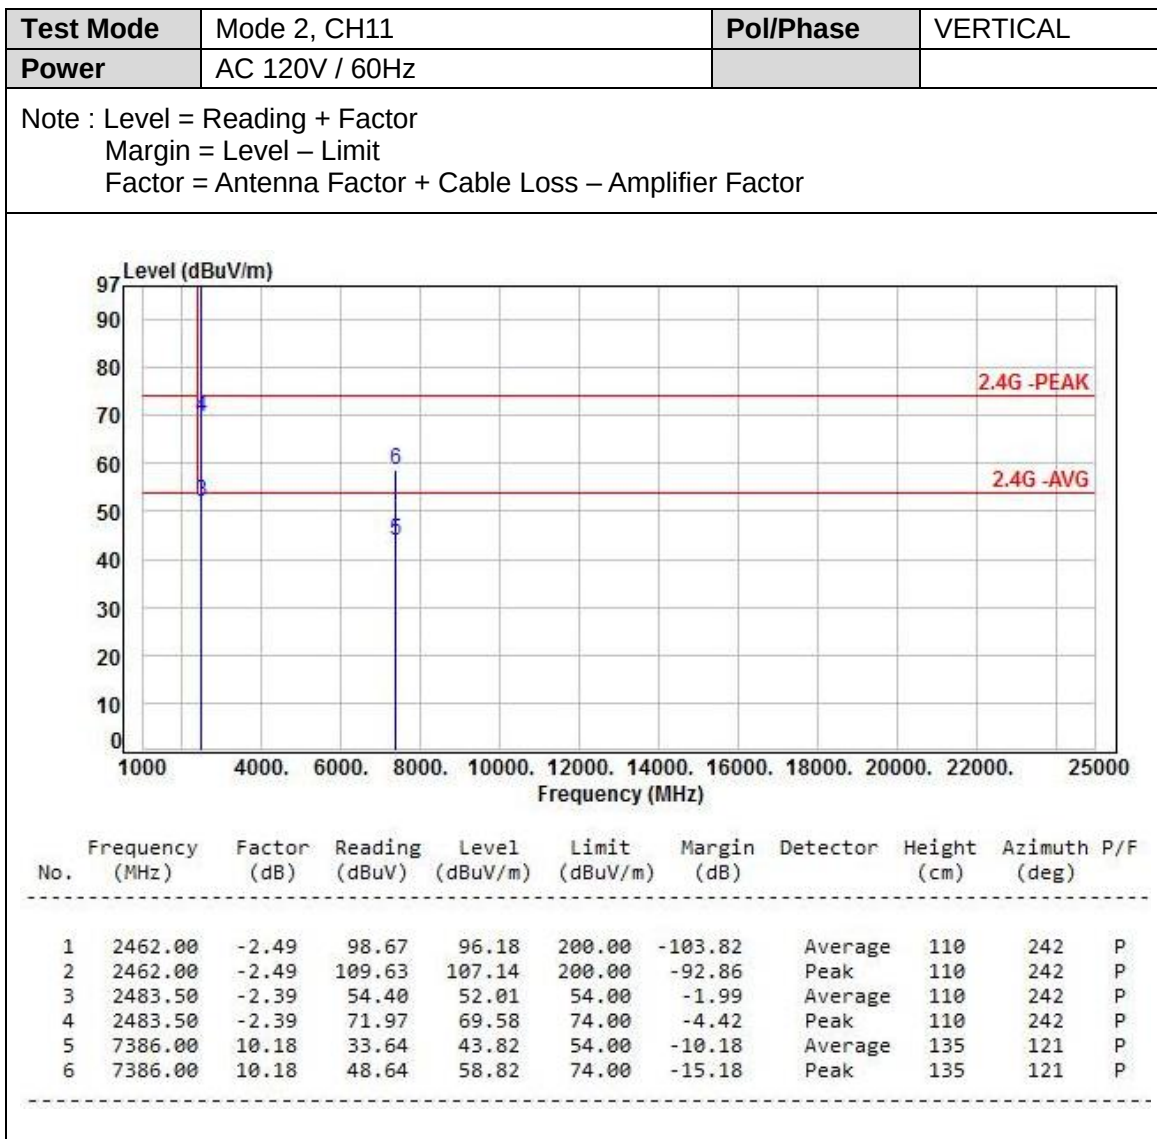


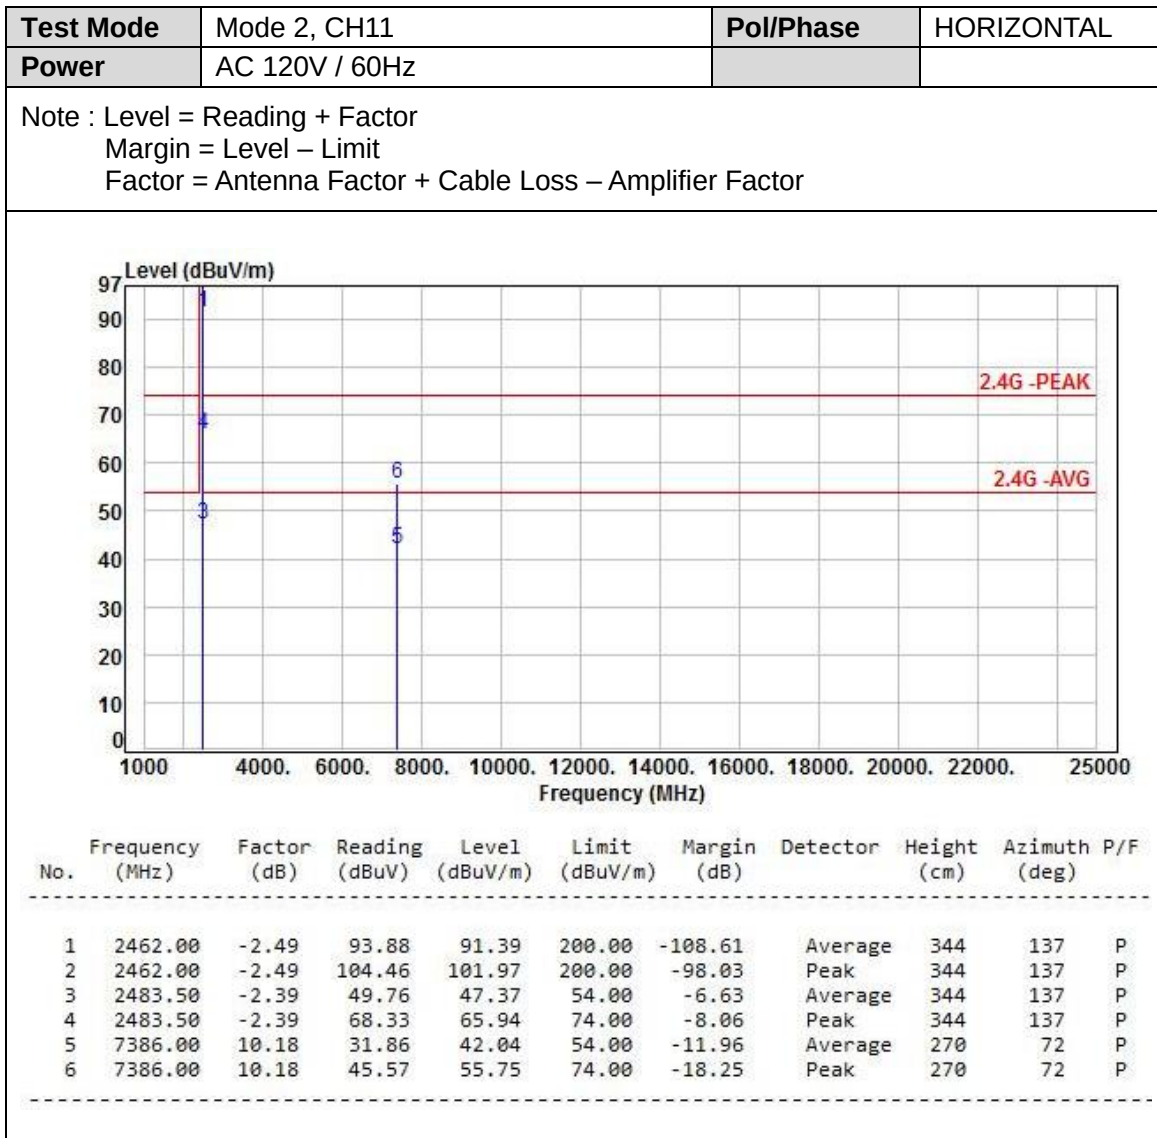


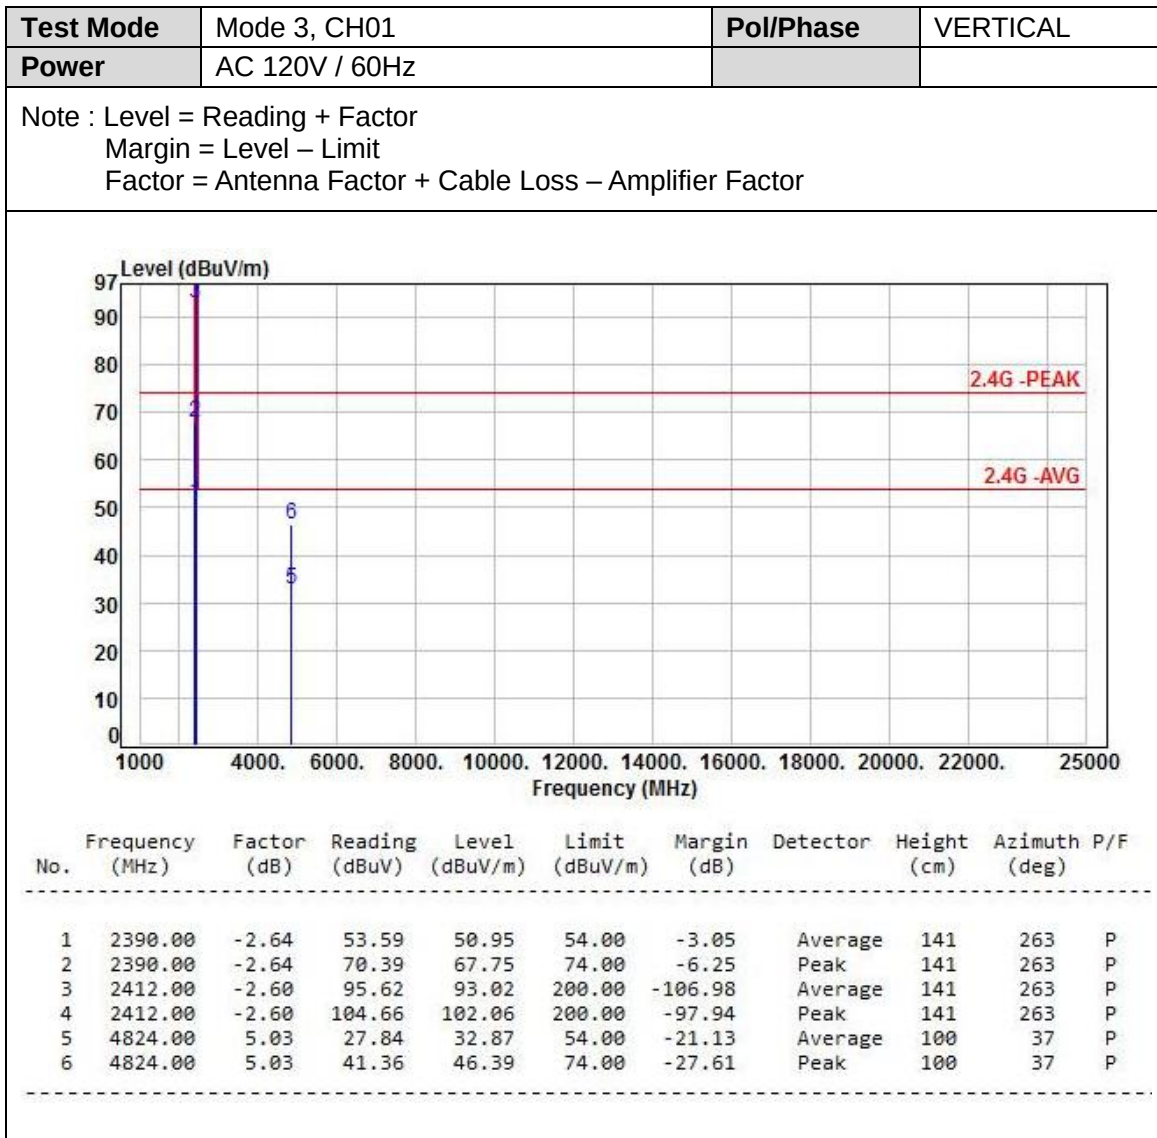


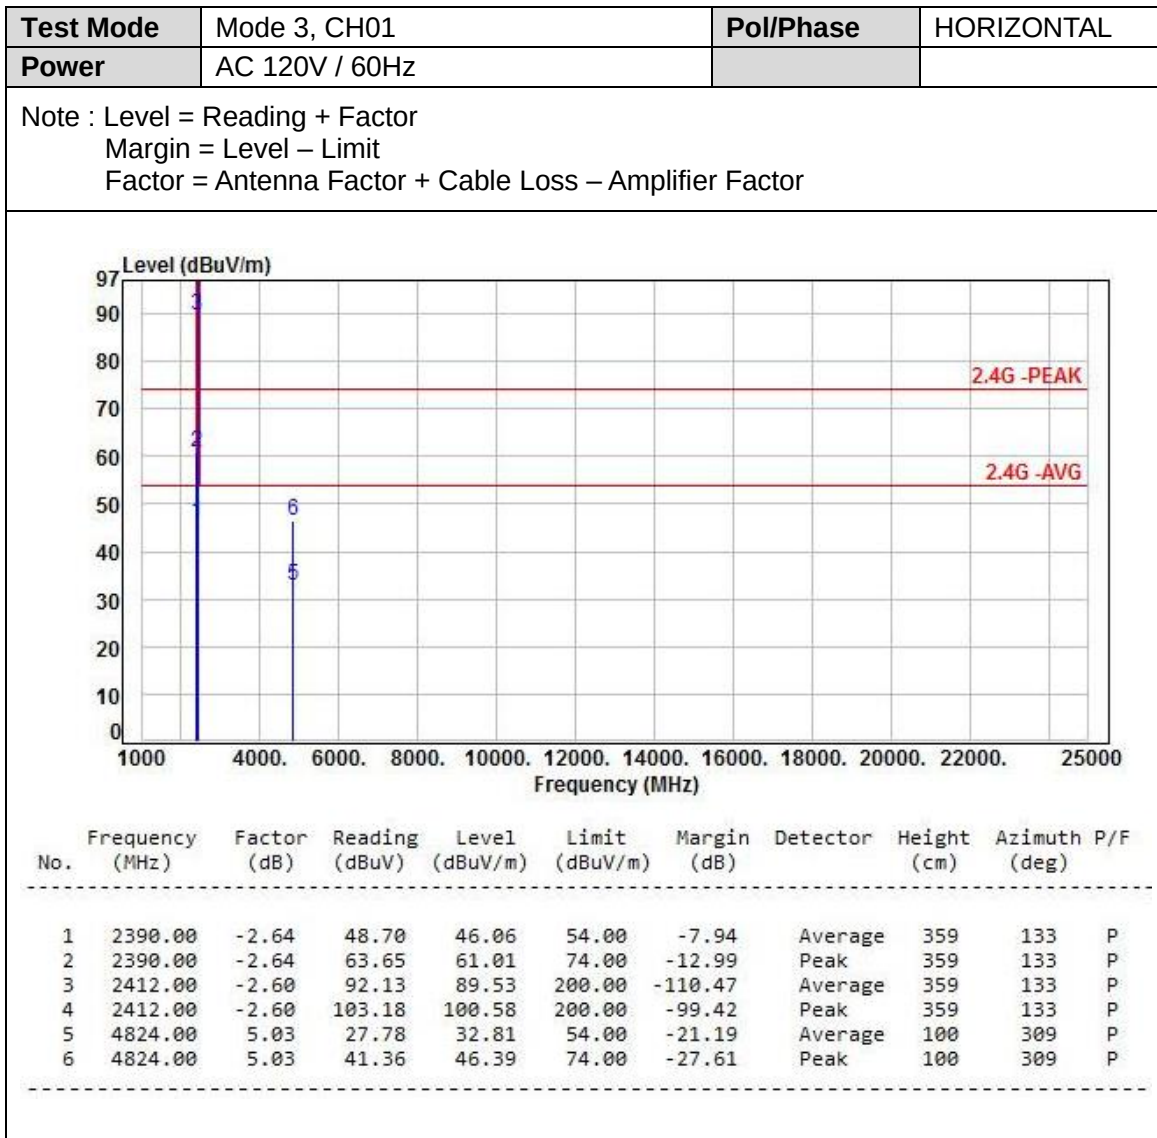

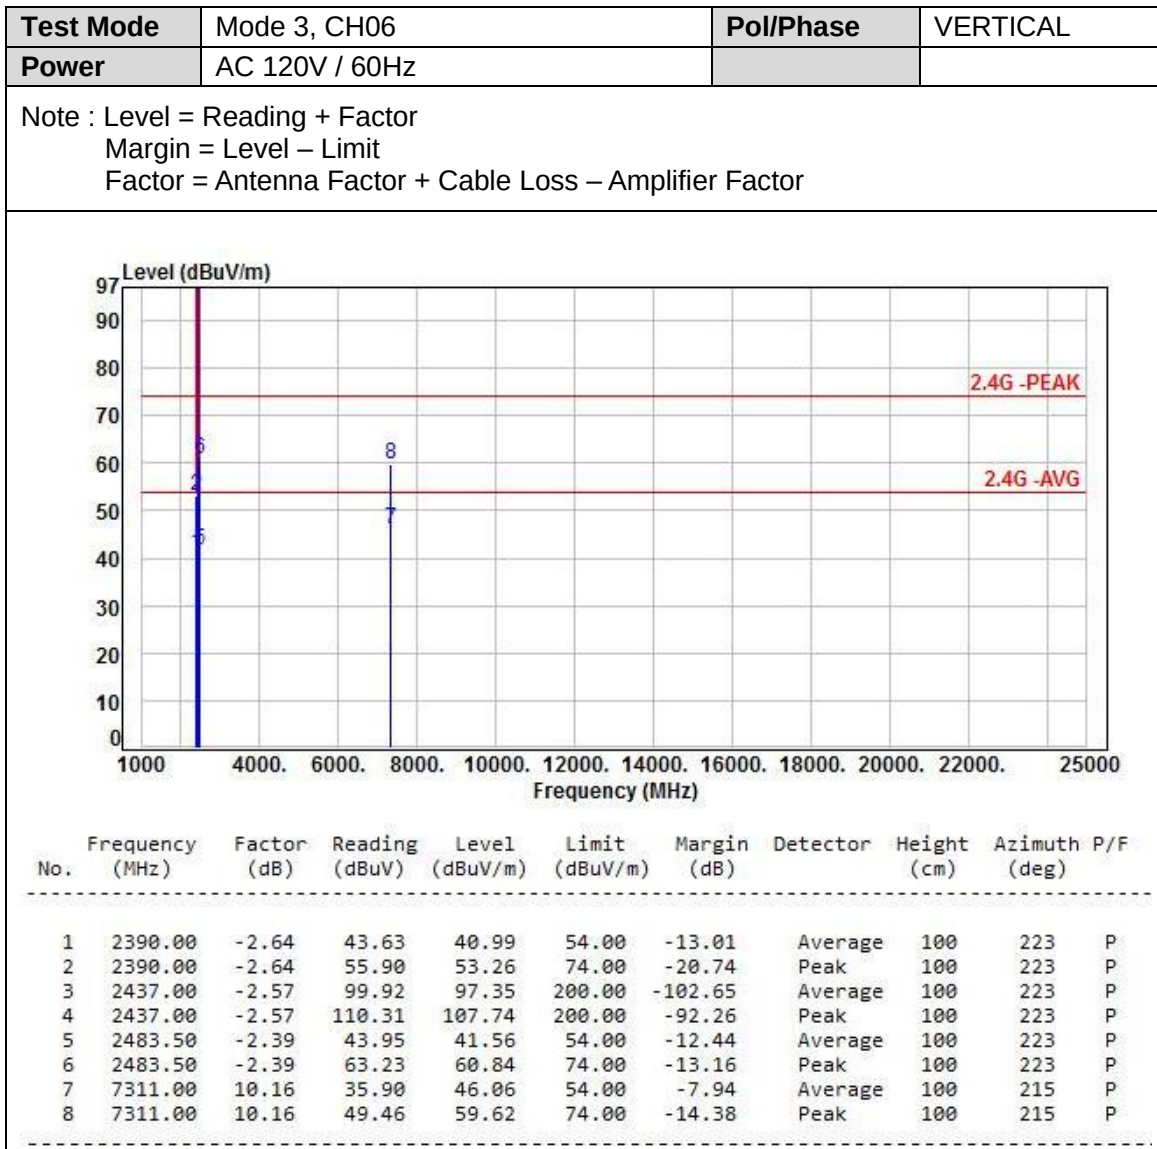

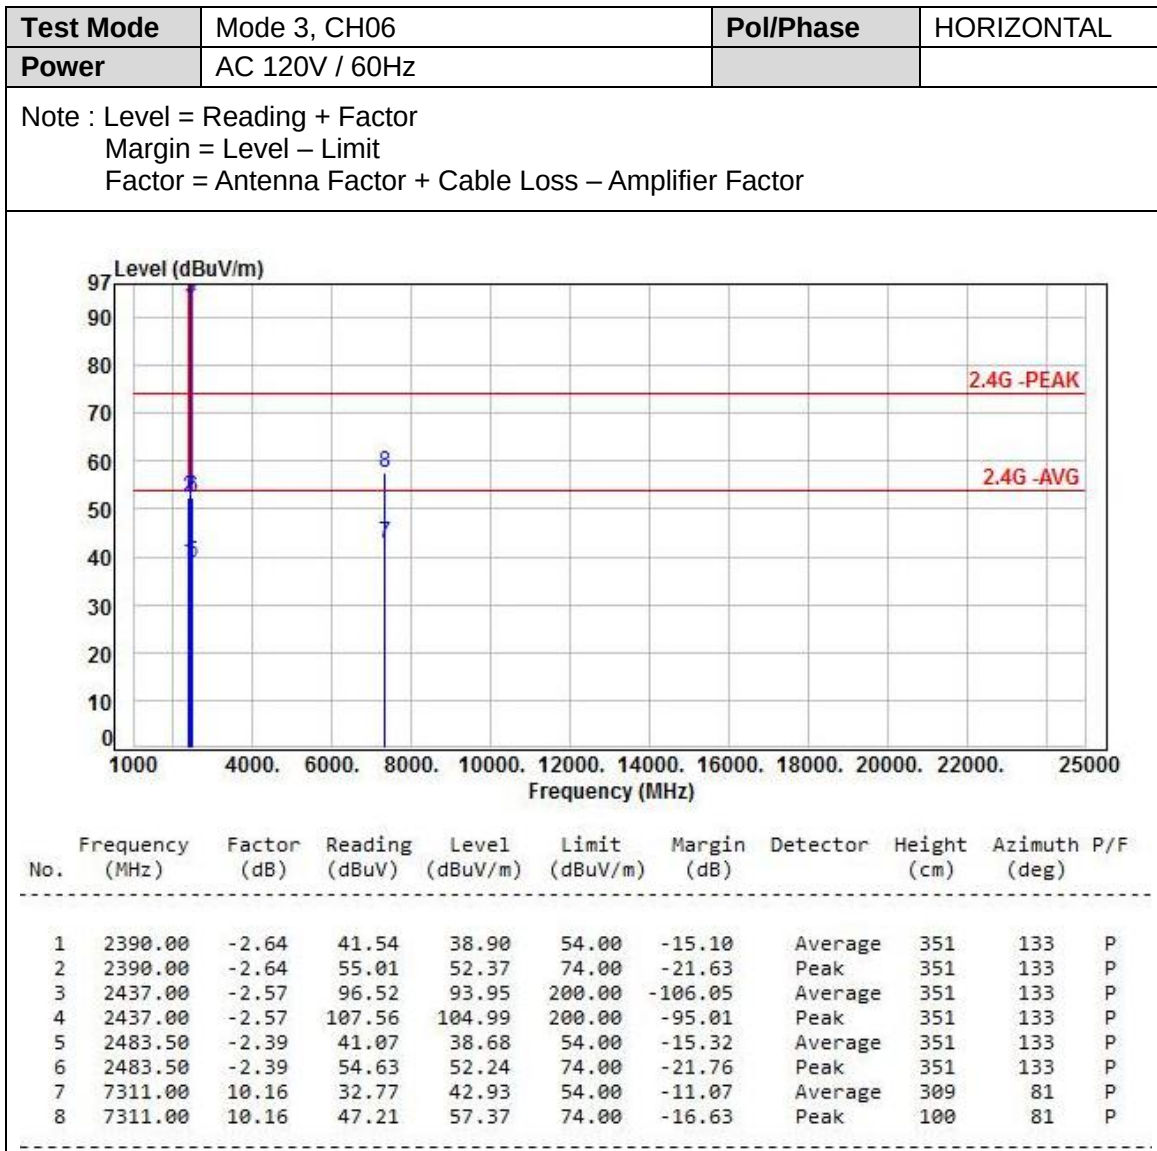

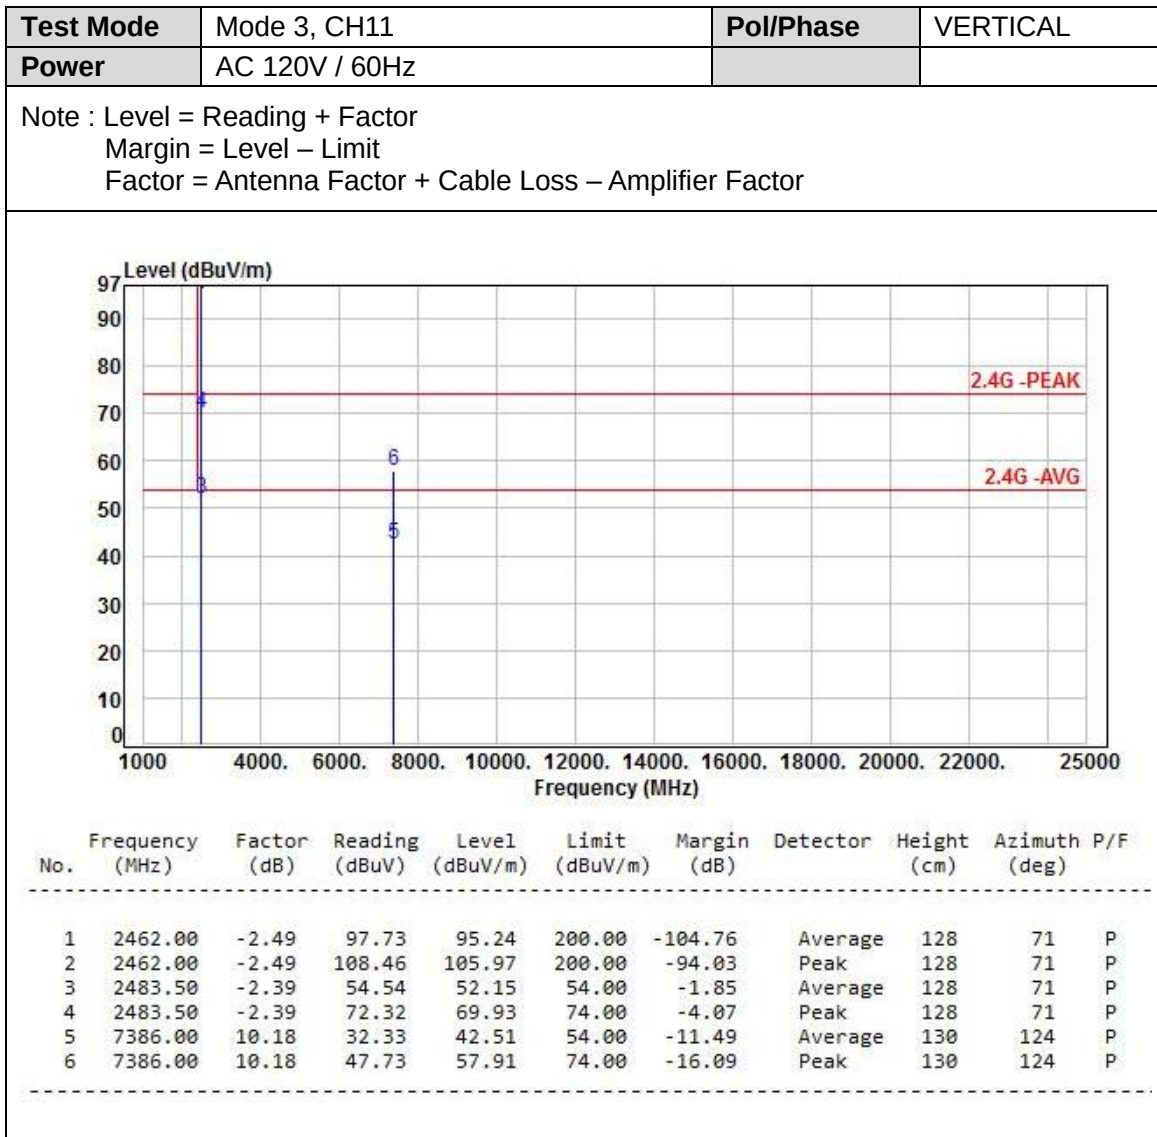

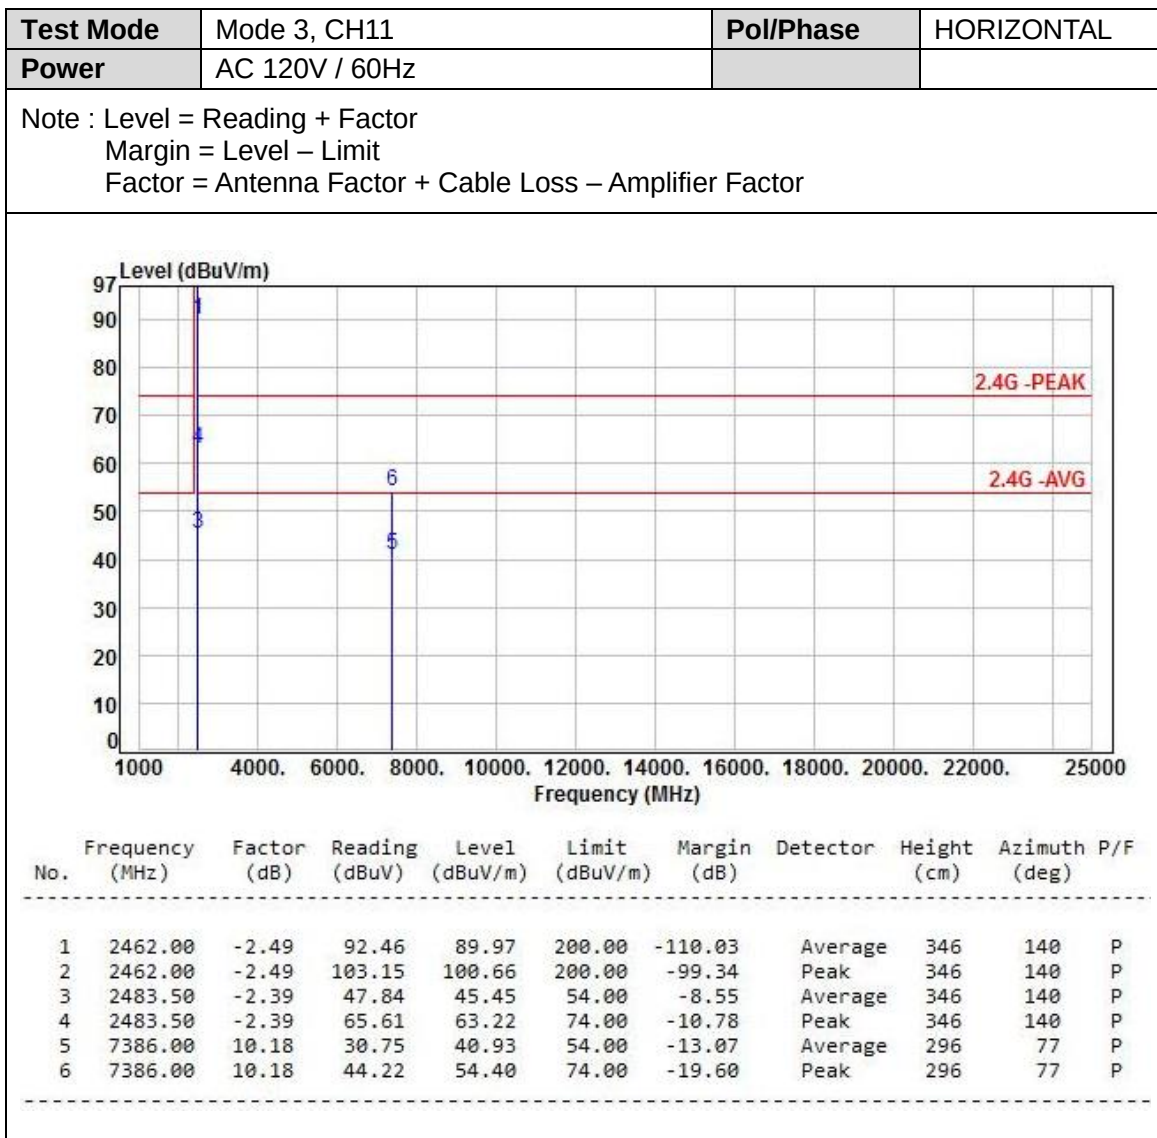



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz




6.8 Test Photographs (30MHz ~ 1GHz)

Front View

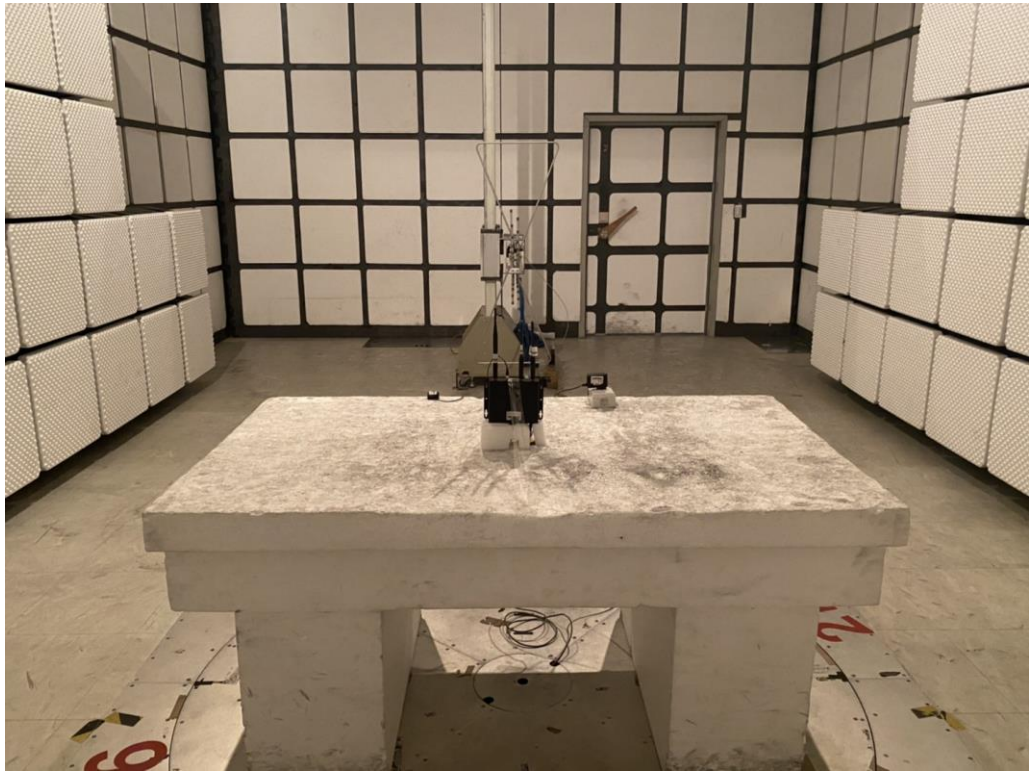

Rear View

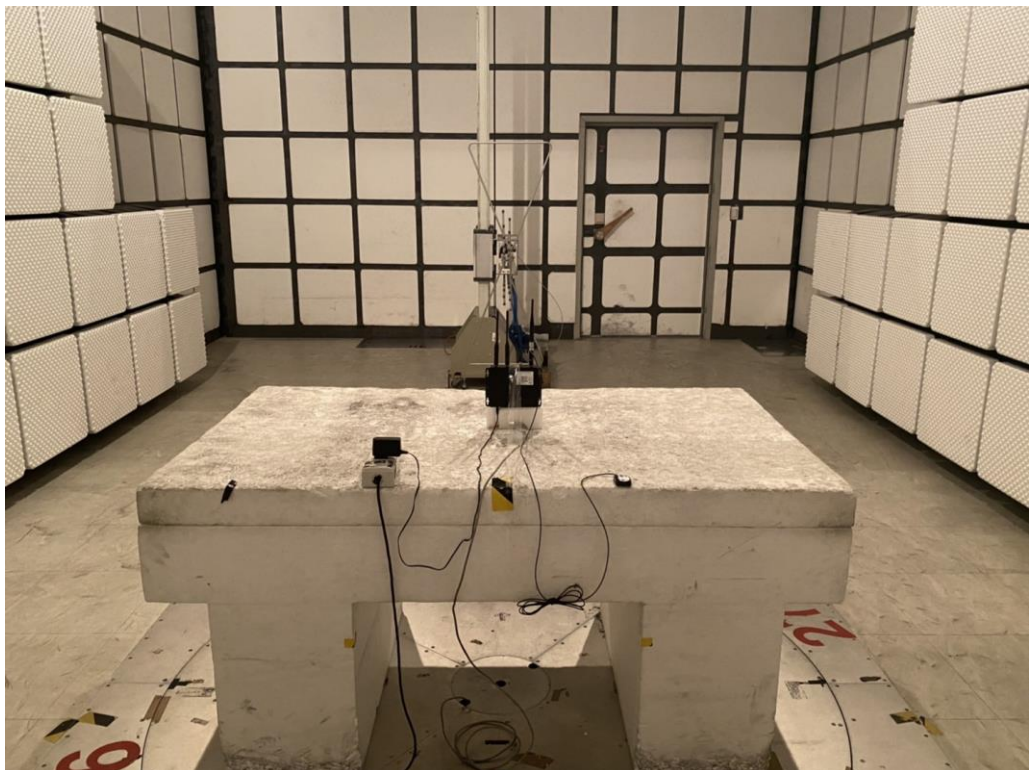




6.9 Test Photographs (1GHz ~ 25GHz)

Front View



Rear View

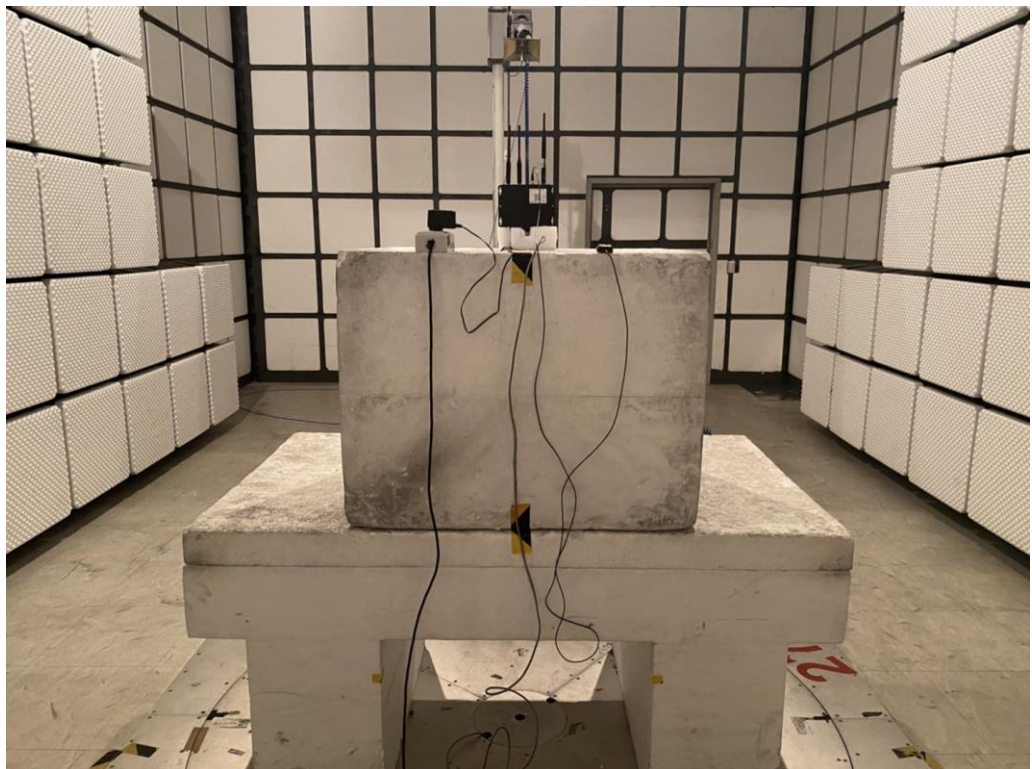



7. Test of Conducted Spurious Emission

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below -30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data






Note: Test plots refers to the following pages.



Modulation Type: 802.11b, CH 01



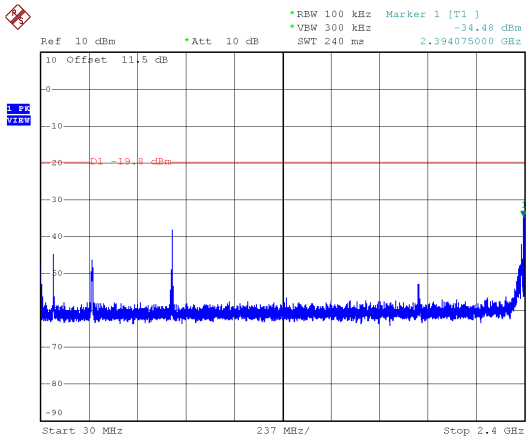


Modulation Type: 802.11b, CH 06

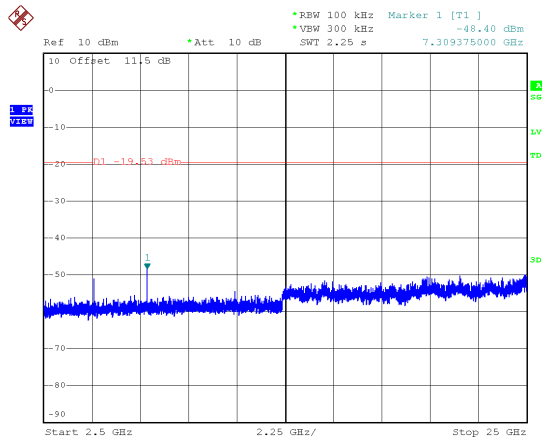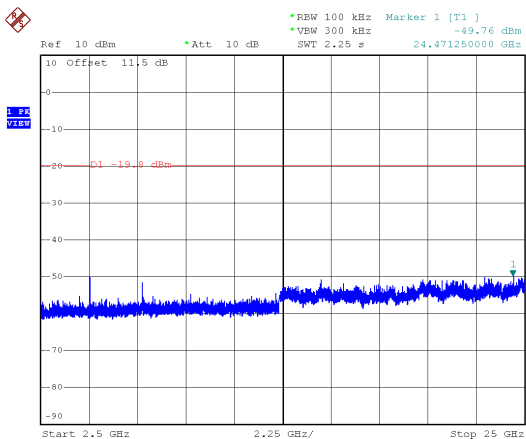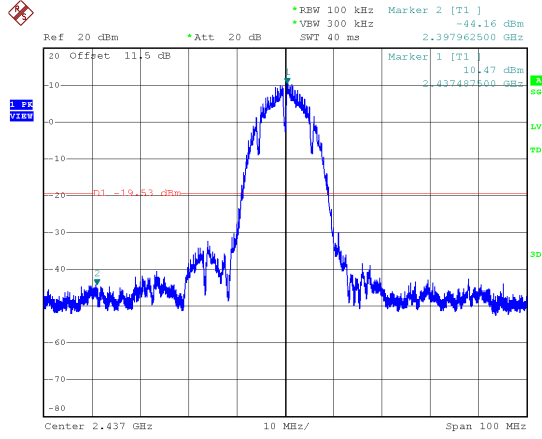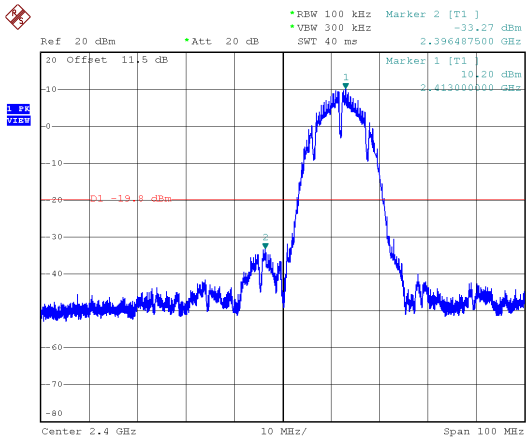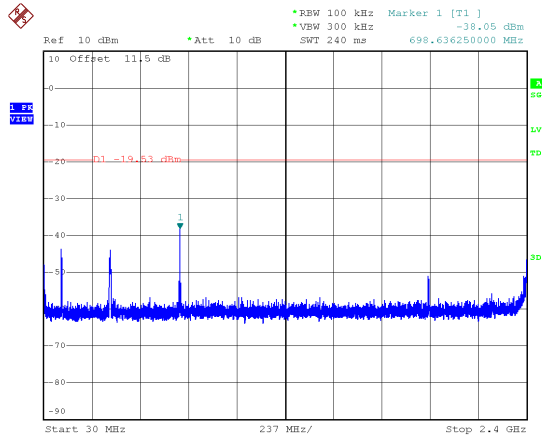




Modulation Type: 802.11b, CH 11



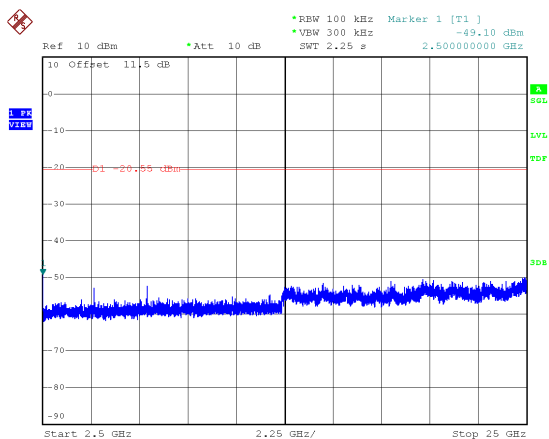
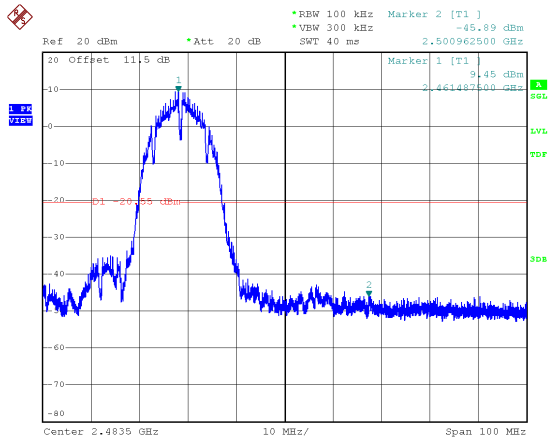
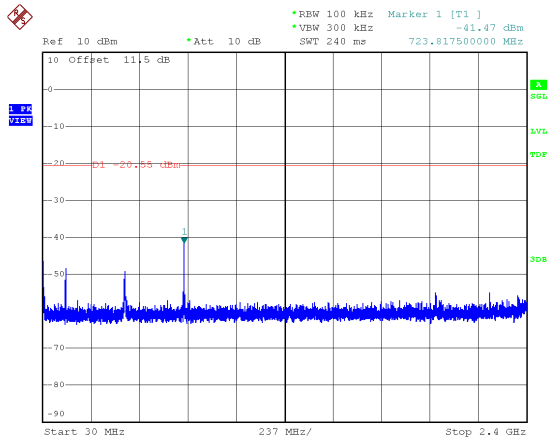




Modulation Type: 802.11g, CH01



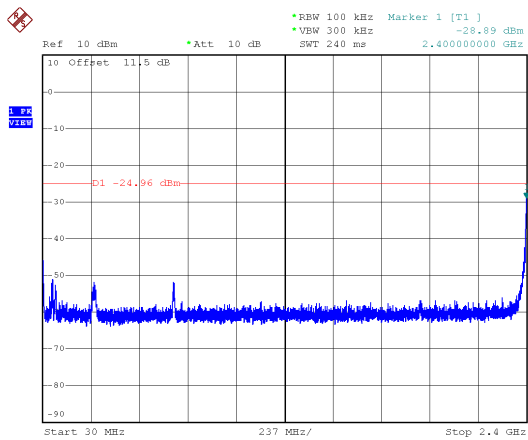


Modulation Type: 802.11g, CH06

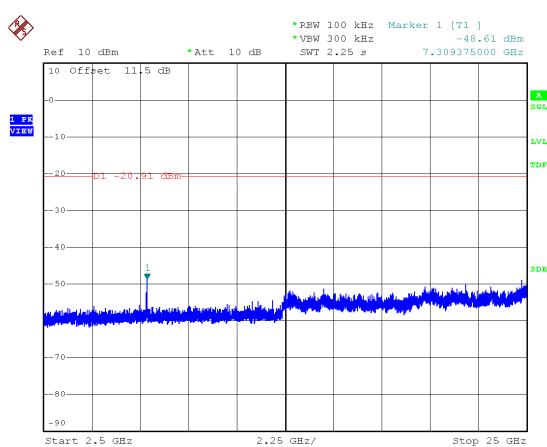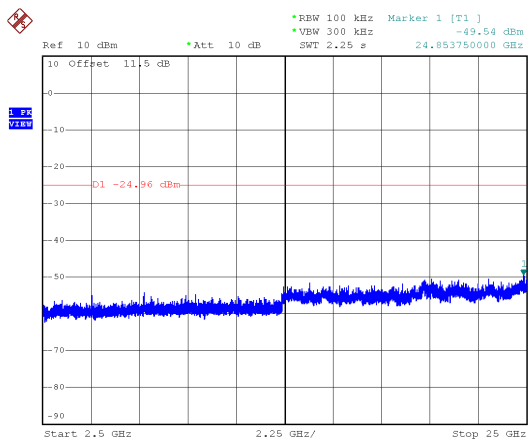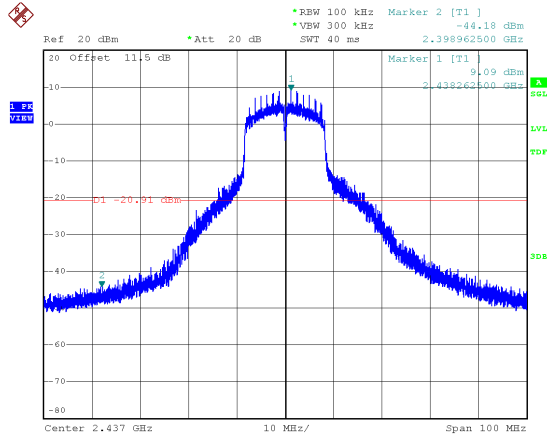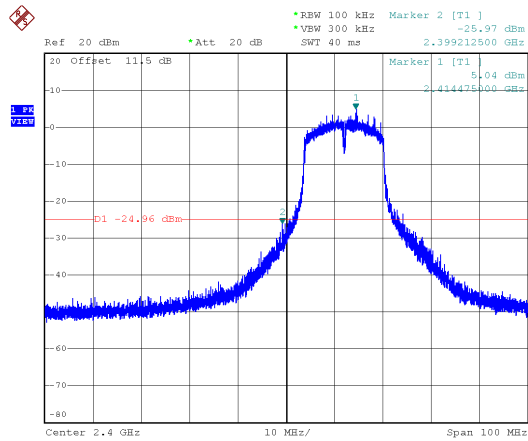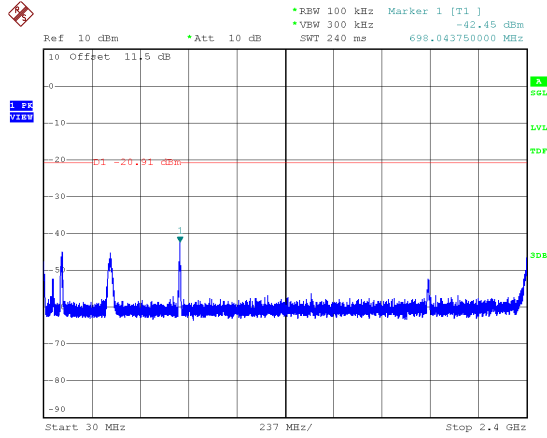




Modulation Type: 802.11g, CH11



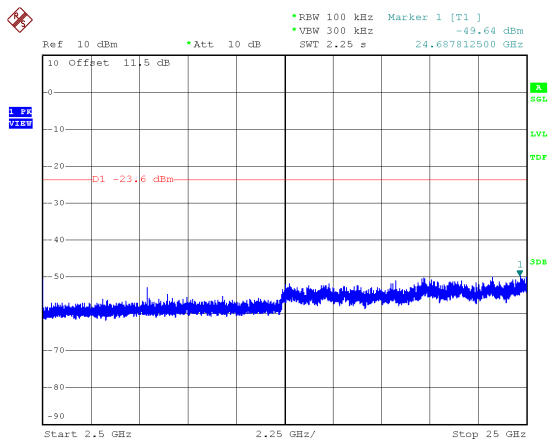
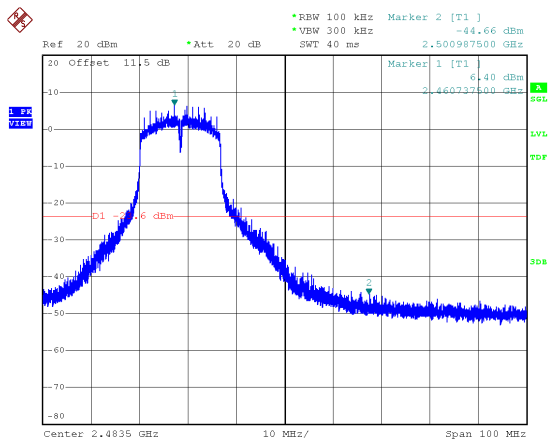
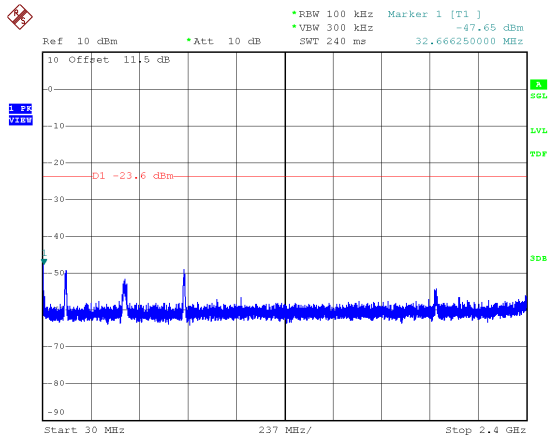




Modulation Type: 802.11n HT20, CH01



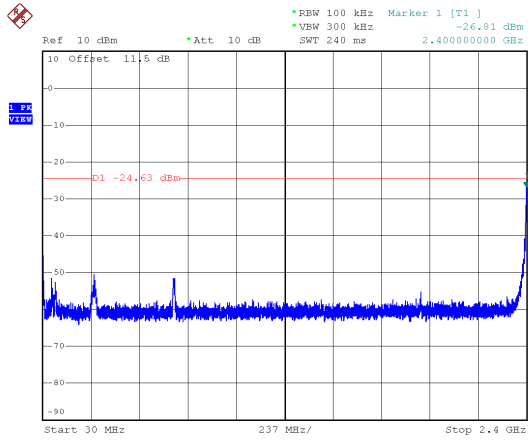


Modulation Type: 802.11n HT20, CH06

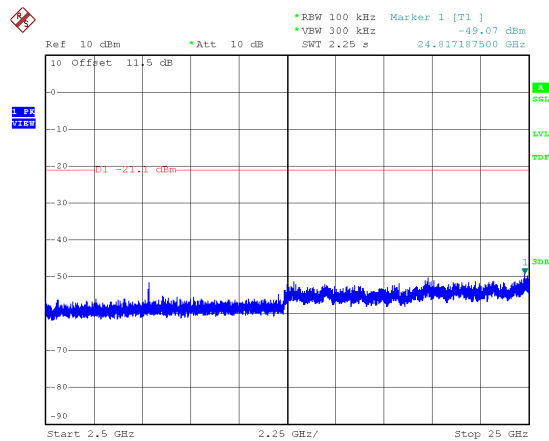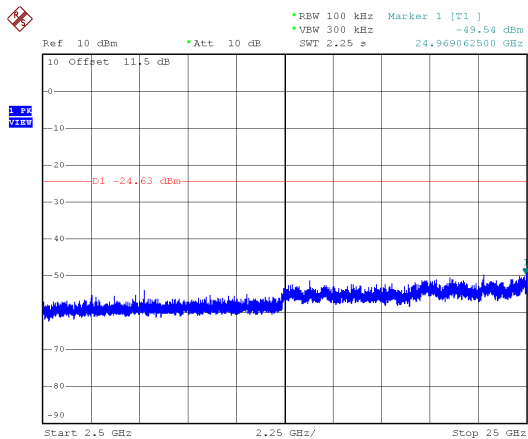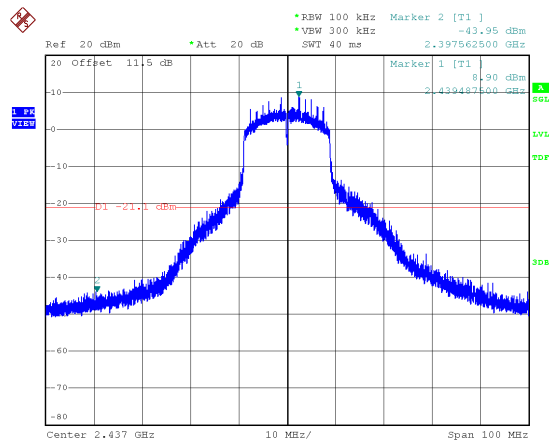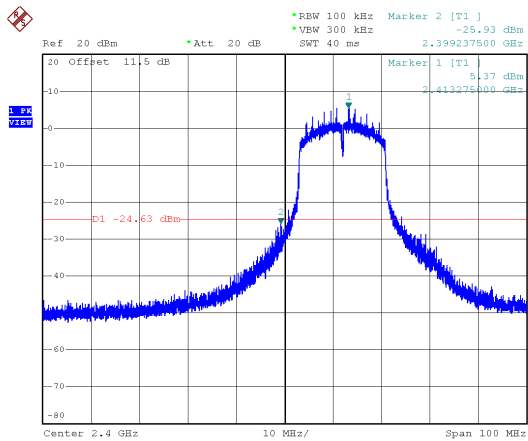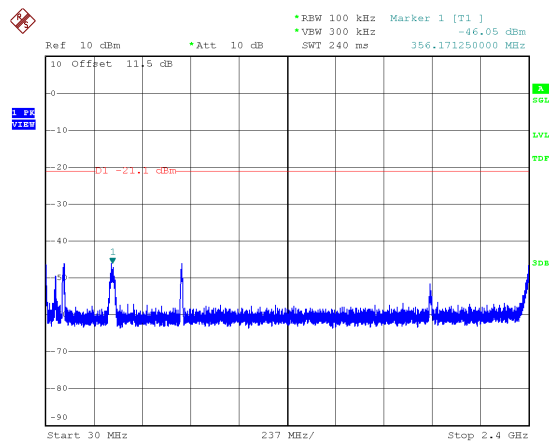



Modulation Type: 802.11n HT20, CH11

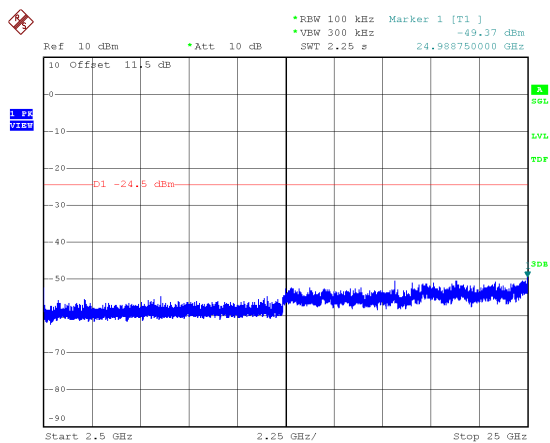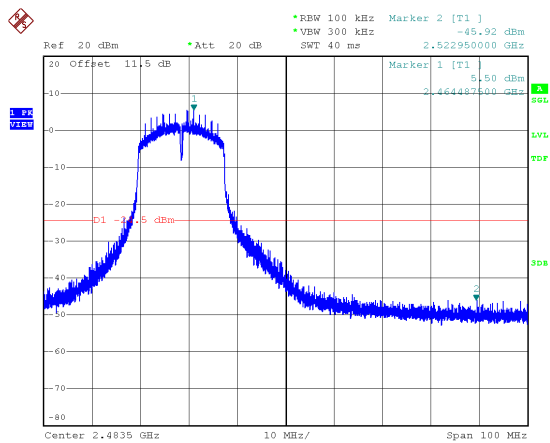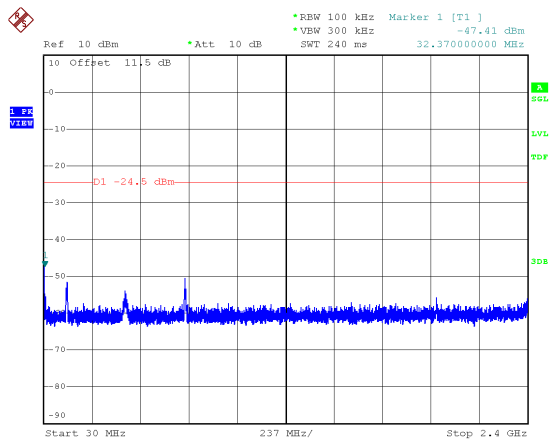



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
802.11b	8.40	8.52	98.59%
802.11g	1.40	1.51	93.04%
802.11n HT20	1.32	1.42	92.96%




Modulation Type: 802.11b(1Mbps)

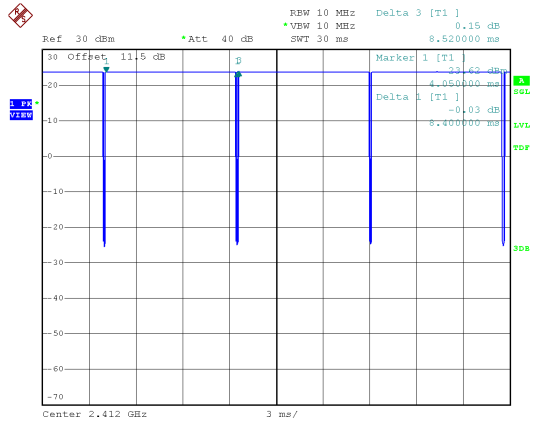

Modulation Type: 802.11g(6Mbps)

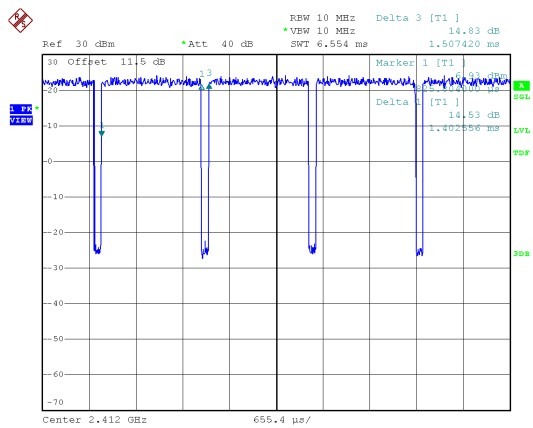

Modulation Type: 802.11n HT20(6.5Mbps)

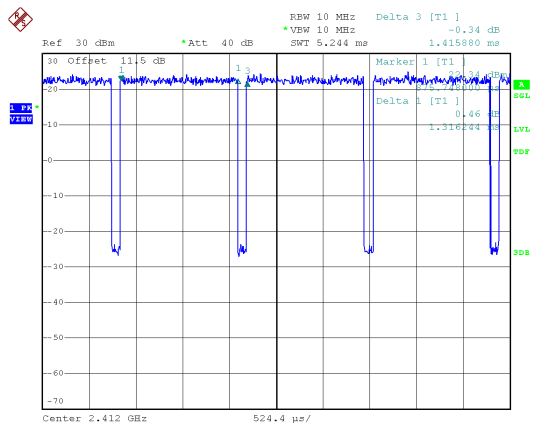



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8.1

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout




9.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
IEEE 802.11b (1Mbps)	01	2412	10.05	0.5
	06	2437	10.05	0.5
	11	2462	9.54	0.5
IEEE 802.11g (6Mbps)	01	2412	15.12	0.5
	06	2437	15.06	0.5
	11	2462	15.09	0.5
IEEE 802.11n HT20 (6.5Mbps)	01	2412	15.06	0.5
	06	2437	15.09	0.5
	11	2462	15.12	0.5




6dB Bandwidth
Modulation Type: 802.11b
CH01

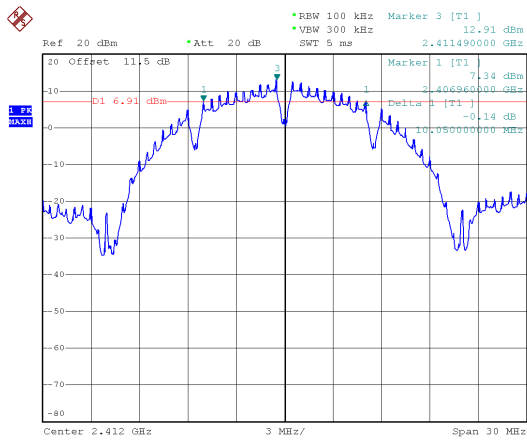


Modulation Type: 802.11g
CH01

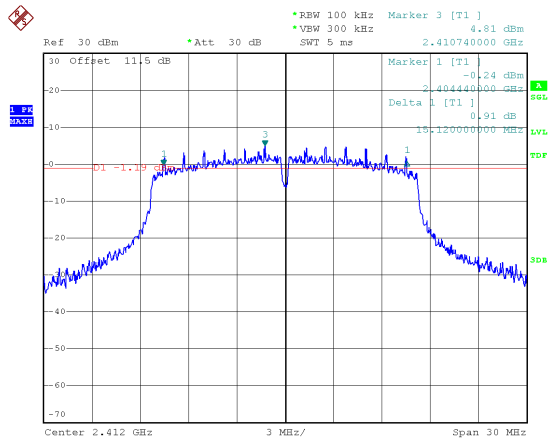


CH06

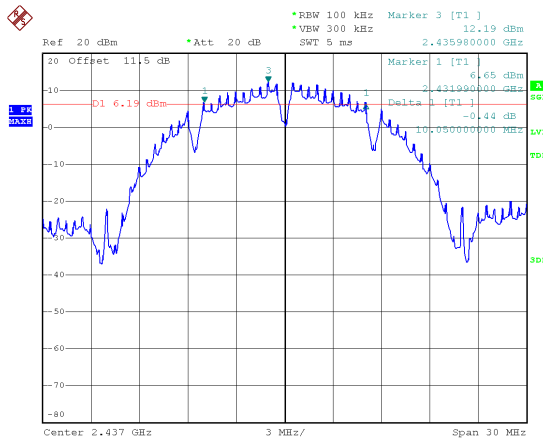


CH06

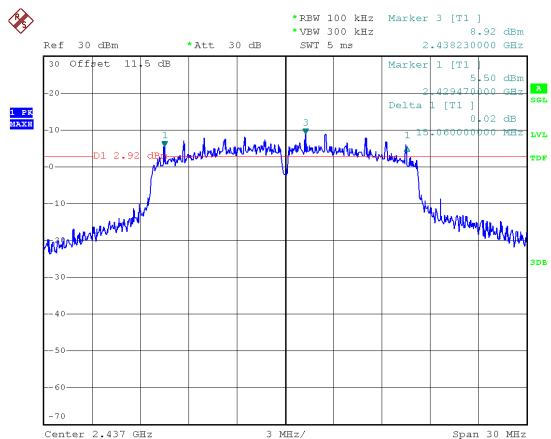

CH11

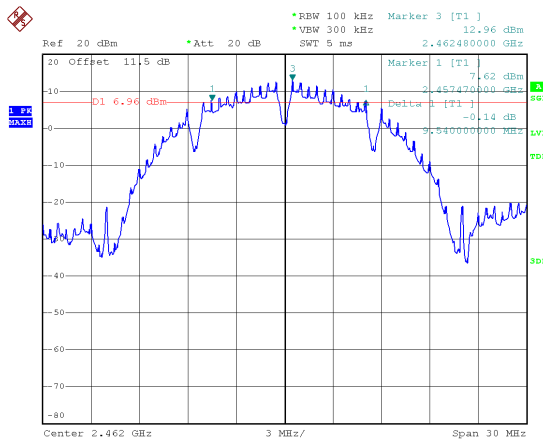


CH11

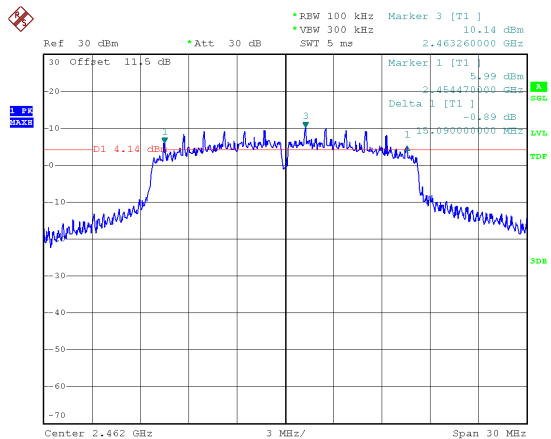





6dB Bandwidth
Modulation Type: 802.11n HT20
CH01

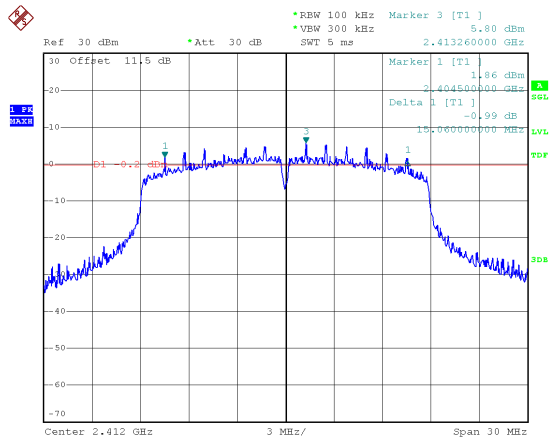

CH06

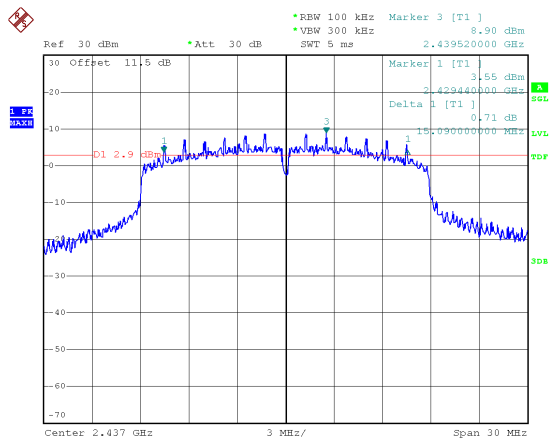

CH11

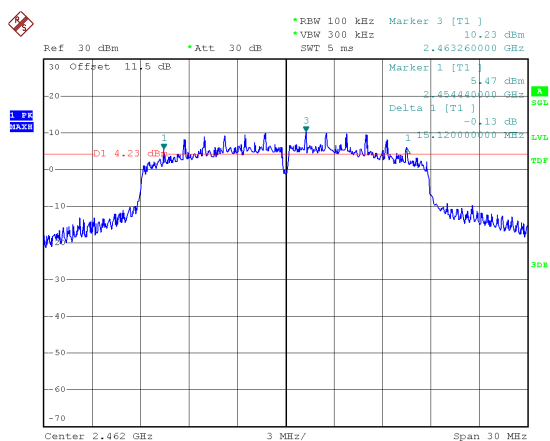



10. Maximum Average Output Power

10.1 Test Limit

The Maximum Average Output Power Measurement is 30dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the average output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout





10.4 Test Result and Data

Setting	Modulation Type	Channel	Frequency (MHz)	Avg. Power Output (dBm)	Total AV power (dBm)	Total AV power (mW)	Powe Limit (dBm)
19.5	IEEE 802.11b (1Mbps)	01	2412	18.91	18.91	77.804	30.00
19.5		06	2437	19.51	19.51	89.331	30.00
19		11	2462	17.73	17.73	59.293	30.00
17	IEEE 802.11g (6Mbps)	01	2412	16.41	16.41	43.752	30.00
20		06	2437	19.68	19.68	92.897	30.00
16		11	2462	17.46	17.46	55.719	30.00
16	IEEE 802.11n HT20 (6.5Mbps)	01	2412	16.31	16.31	42.756	30.00
20		06	2437	19.63	19.63	91.833	30.00
15.5		11	2462	16.02	16.02	39.994	30.00



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10

11.3 Test Setup Layout




11.4 Test Result and Data


Modulation Type	CH	Freq. (MHz)	Maximum Power Density of 100 kHz Bandwidth (dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
IEEE 802.11b (1Mbps)	01	2412	0.79	0.79	0.00	0.79	8.00
	06	2437	1.13	1.13	0.00	1.13	8.00
	11	2462	-0.34	-0.34	0.00	-0.34	8.00
IEEE 802.11g (6Mbps)	01	2412	-3.98	-3.98	0.31	-3.67	8.00
	06	2437	-0.48	-0.48	0.31	-0.17	8.00
	11	2462	-2.41	-2.41	0.31	-2.10	8.00
IEEE 802.11n HT20 (6.5Mbps)	01	2412	-3.97	-3.97	0.32	-3.65	8.00
	06	2437	-0.66	-0.66	0.32	-0.34	8.00
	11	2462	-3.77	-3.77	0.32	-3.45	8.00




Modulation Type: 802.11b
CH01

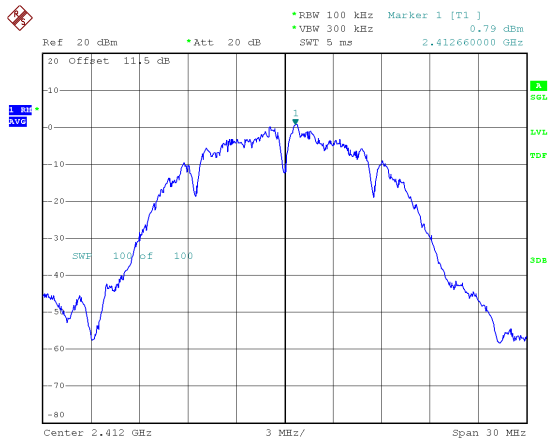


Modulation Type: 802.11g
CH01

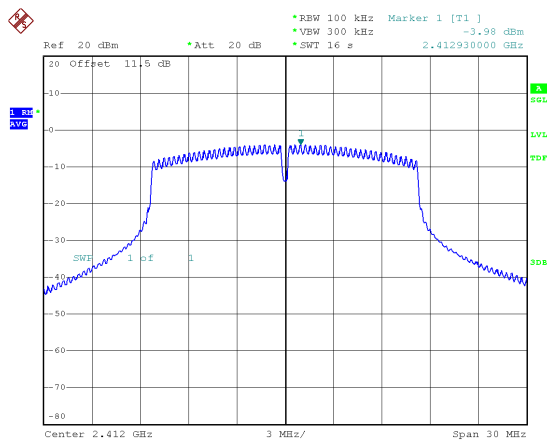


CH06

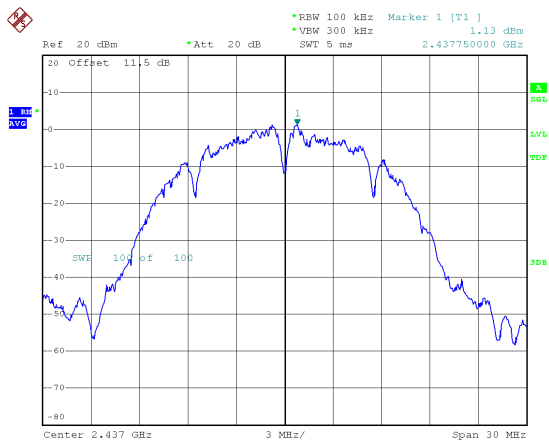


CH06

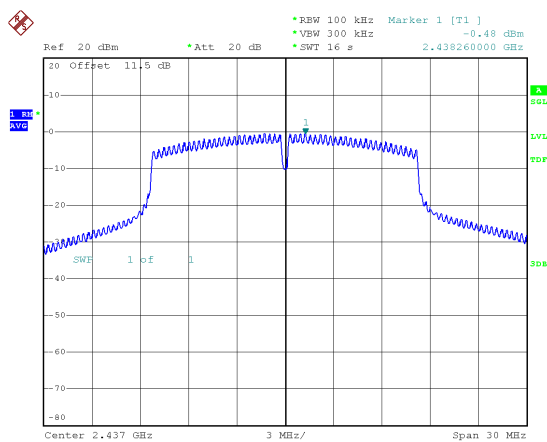

CH11

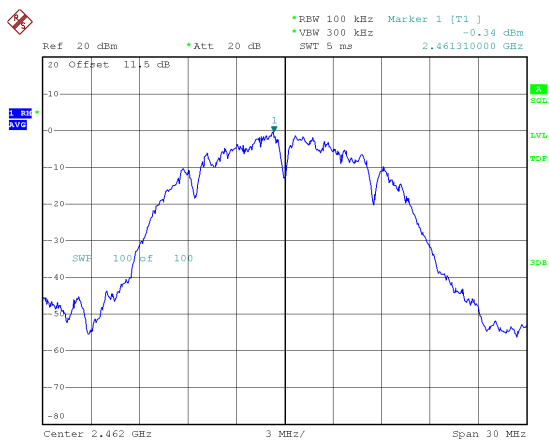


CH11

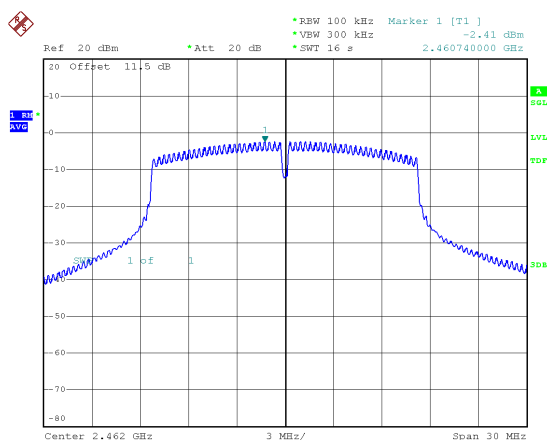





Modulation Type: 802.11n HT20
CH01

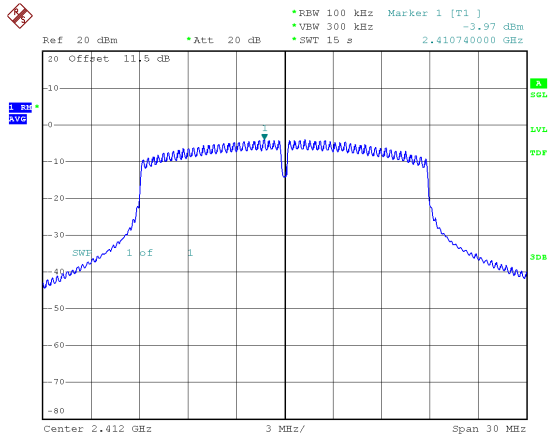

CH06

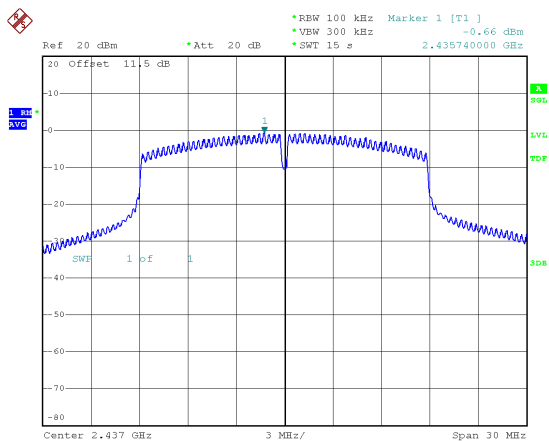

CH11

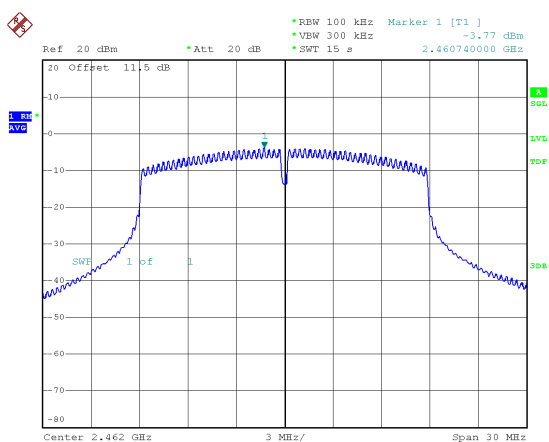



12. Radio Frequency Exposure

12.1 Applicable Standards

☐ §1.1307(b)(3)(i)(A)	The available maximum time-averaged power is no more than 1 mW, regardless of separation distance.																																																	
☒ §1.1307(b)(3)(i)(c)	ERP is below a threshold calculated based on the distance, R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$. TABLE B.1—THRESHOLDS FOR SINGLE RF SOURCES SUBJECT TO ROUTINE ENVIRONMENTAL EVALUATION <table><tr><th colspan="3">RF Source Frequency</th><th colspan="3">Minimum Distance</th><th>Threshold ERP</th></tr><tr><th>f_L MHz</th><th></th><th>f_H MHz</th><th>$\lambda_L / 2\pi$</th><th></th><th>$\lambda_H / 2\pi$</th><th>W</th></tr><tr><td>0.3</td><td>–</td><td>1.34</td><td>159 m</td><td>–</td><td>35.6 m</td><td>1,920 R²</td></tr><tr><td>1.34</td><td>–</td><td>30</td><td>35.6 m</td><td>–</td><td>1.6 m</td><td>3,450 R²/f^2</td></tr><tr><td>30</td><td>–</td><td>300</td><td>1.6 m</td><td>–</td><td>159 mm</td><td>3.83 R²</td></tr><tr><td>300</td><td>–</td><td>1,500</td><td>159 mm</td><td>–</td><td>31.8 mm</td><td>0.0128 R²f</td></tr><tr><td>1,500</td><td>–</td><td>100,000</td><td>31.8 mm</td><td>–</td><td>0.5 mm</td><td>19.2R²</td></tr></table> Subscripts L and H are low and high; λ is wavelength. From § 1.1307(b)(3)(i)(C), modified by adding Minimum Distance columns.	RF Source Frequency			Minimum Distance			Threshold ERP	f_L MHz		f_H MHz	$\lambda_L / 2\pi$		$\lambda_H / 2\pi$	W	0.3	–	1.34	159 m	–	35.6 m	1,920 R ²	1.34	–	30	35.6 m	–	1.6 m	3,450 R ² / f^2	30	–	300	1.6 m	–	159 mm	3.83 R ²	300	–	1,500	159 mm	–	31.8 mm	0.0128 R ² f	1,500	–	100,000	31.8 mm	–	0.5 mm	19.2R ²
RF Source Frequency			Minimum Distance			Threshold ERP																																												
f_L MHz		f_H MHz	$\lambda_L / 2\pi$		$\lambda_H / 2\pi$	W																																												
0.3	–	1.34	159 m	–	35.6 m	1,920 R ²																																												
1.34	–	30	35.6 m	–	1.6 m	3,450 R ² / f^2																																												
30	–	300	1.6 m	–	159 mm	3.83 R ²																																												
300	–	1,500	159 mm	–	31.8 mm	0.0128 R ² f																																												
1,500	–	100,000	31.8 mm	–	0.5 mm	19.2R ²																																												
☐ § 1.1307(b)(3)(i)(B).	Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, $\leq P_{th}$ $P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$ Where $x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$ and $ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$ d = the separation distance (cm);																																																	

**12.2 EUT Specification**

Frequency band (Operating)	☒ WLAN: 2412MHz ~ 2462MHz ☐ WLAN: 5150MHz ~ 5250MHz ☐ WLAN: 5250MHz ~ 5350MHz ☐ WLAN: 5470MHz ~ 5725MHz ☐ WLAN: 5725MHz ~ 5850MHz ☐ Bluetooth: 2402MHz ~ 2480MHz
Device category	☐ Portable (<20cm separation) ☒ Mobile (>20cm separation)
Antenna diversity	☒ Single antenna ☐ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity
Evaluation applied	☐ Blanket 1 mW Blanket Exemption ☒ MPE-based Exemption ☐ SAR-based Exemption
Remark: The maximum conducted output power is <u>19.68dBm (92.897mW)</u> at <u>2437MHz</u> (with <u>2.56dBi antenna gain.</u>)	

12.3 Result

For WLAN

Modulation Type	Channel Frequency (MHz)	Max. Conducted output power (dBm)	Max. Tune up power (dBm)	Antenna Gain(dBi)	Max.Tune up e.r.p. Power (dBm)	Max.Tune up e.r.p. Power (mW)	Limit (mW)
11g	2437	19.68	20.18	2.56	20.59	114.55	3060

Maximum Permissible Exposure (Co-location)

Modulation Type	Channel Frequency (MHz)	Max. Conducted output power (dBm)	Max. Tune up power (dBm)	Antenna Gain(dBi)	Distance (cm)	ERP (W)	Limit (W)	MPE Ratio
11g	2437	19.68	20.18	2.56	20	0.115	3.060	0.037
LTE	1905	23.87	24.37	1.64	20	0.243	3.060	0.079
LoRa	908.5	27.54	28.04	0.57	20	0.443	1.853	0.239
Co-location Total								0.356
Σ MPE ratios Limit								1.000

-----THE END OF REPORT-----