


NR n7 SCS 15 kHz, Channel Bandwidth: 20 MHz

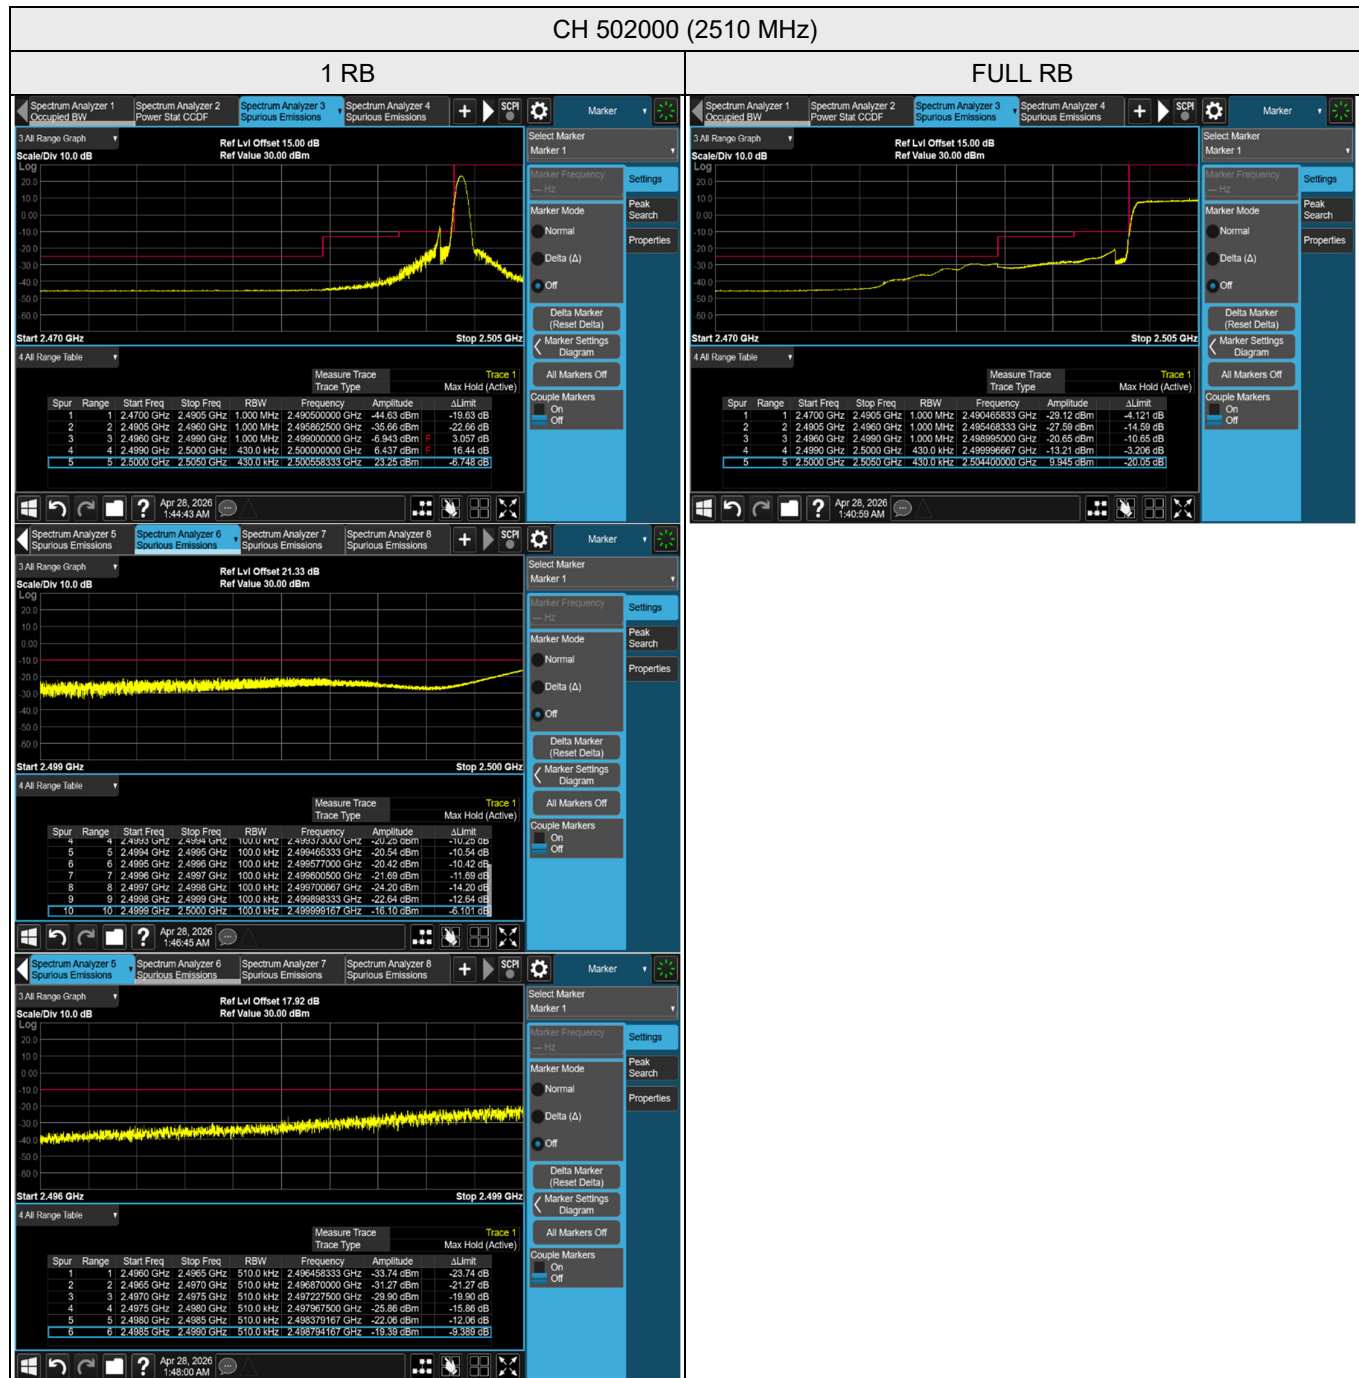

[RBW = 100 kHz / Reference RBW = 430 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(430/100)

To compensate for this integration before comparison to the limit, 6.33 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 6.33 dB integration compensation factor = 21.33 dB Ref Lvl Offset


[RBW = 510 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

CH 512000 (2560 MHz)

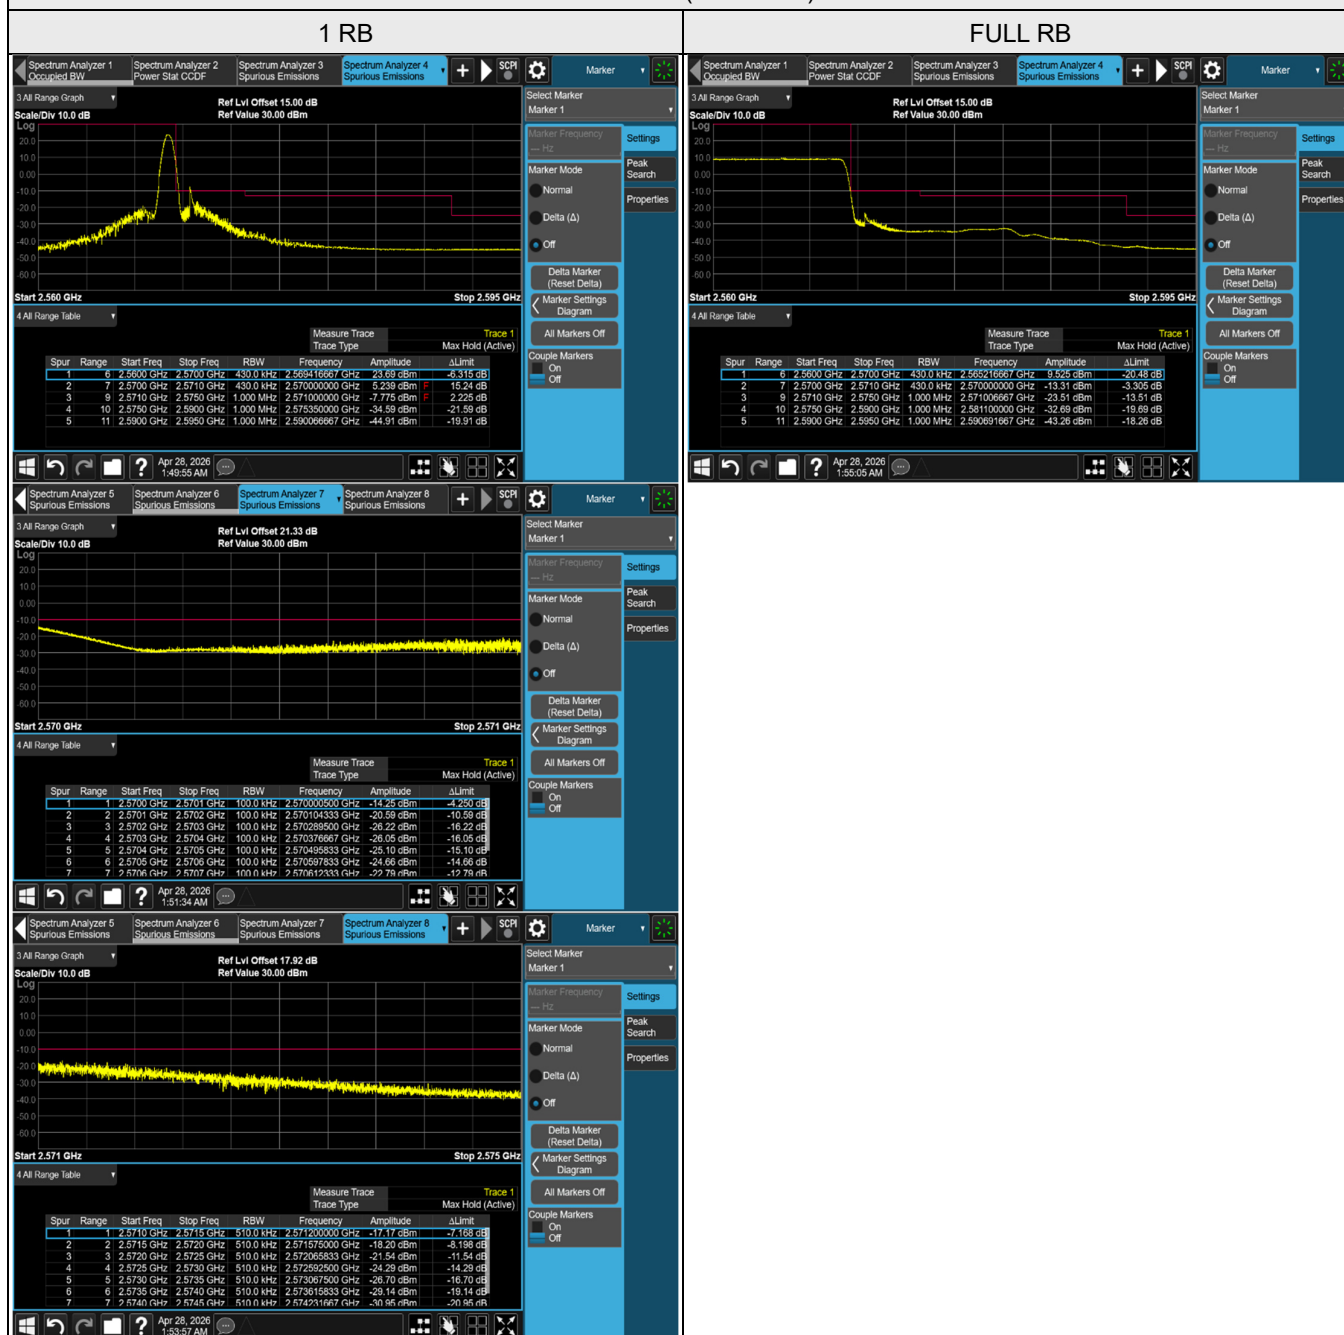

[RBW = 100 kHz / Reference RBW = 430 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(430/100)

To compensate for this integration before comparison to the limit, 6.33 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 6.33 dB integration compensation factor = 21.33 dB Ref Lvl Offset


[RBW = 510 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.


i.e. 15.00 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

NR n7 SCS 15 kHz, Channel Bandwidth: 25 MHz

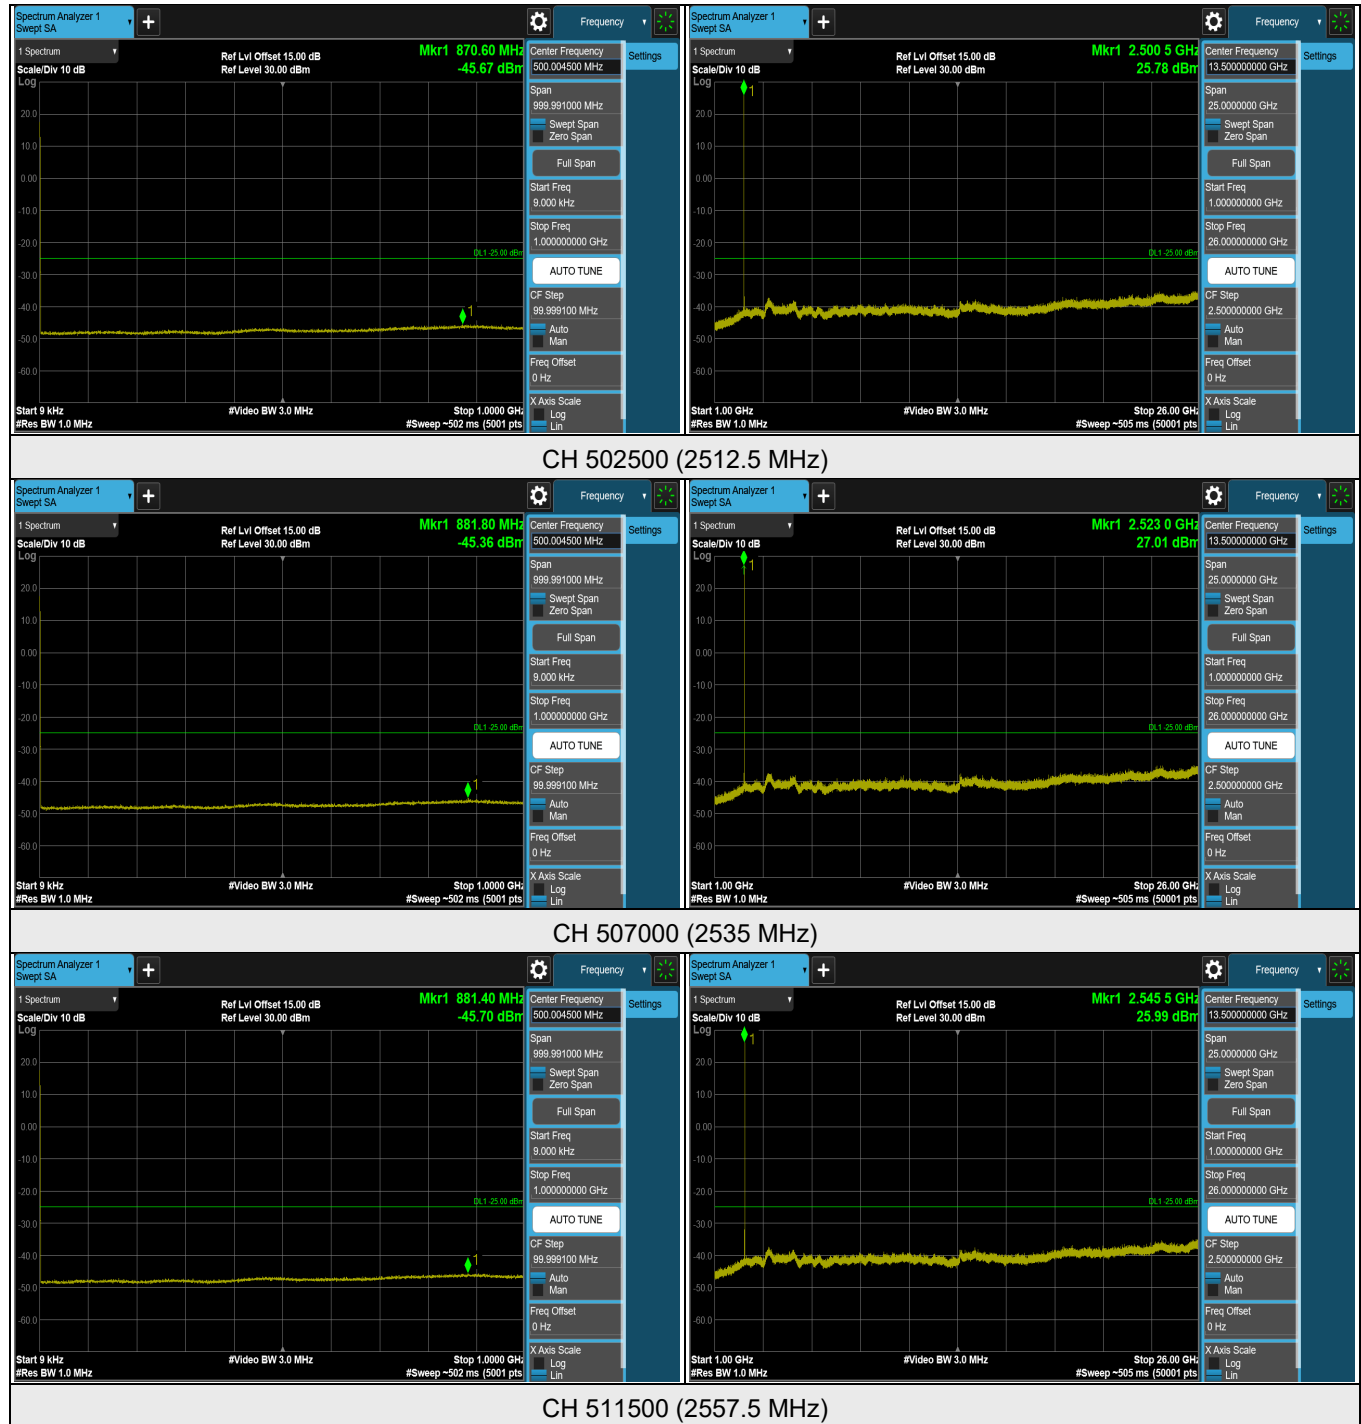

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n7 SCS 15 kHz, Channel Bandwidth: 25 MHz

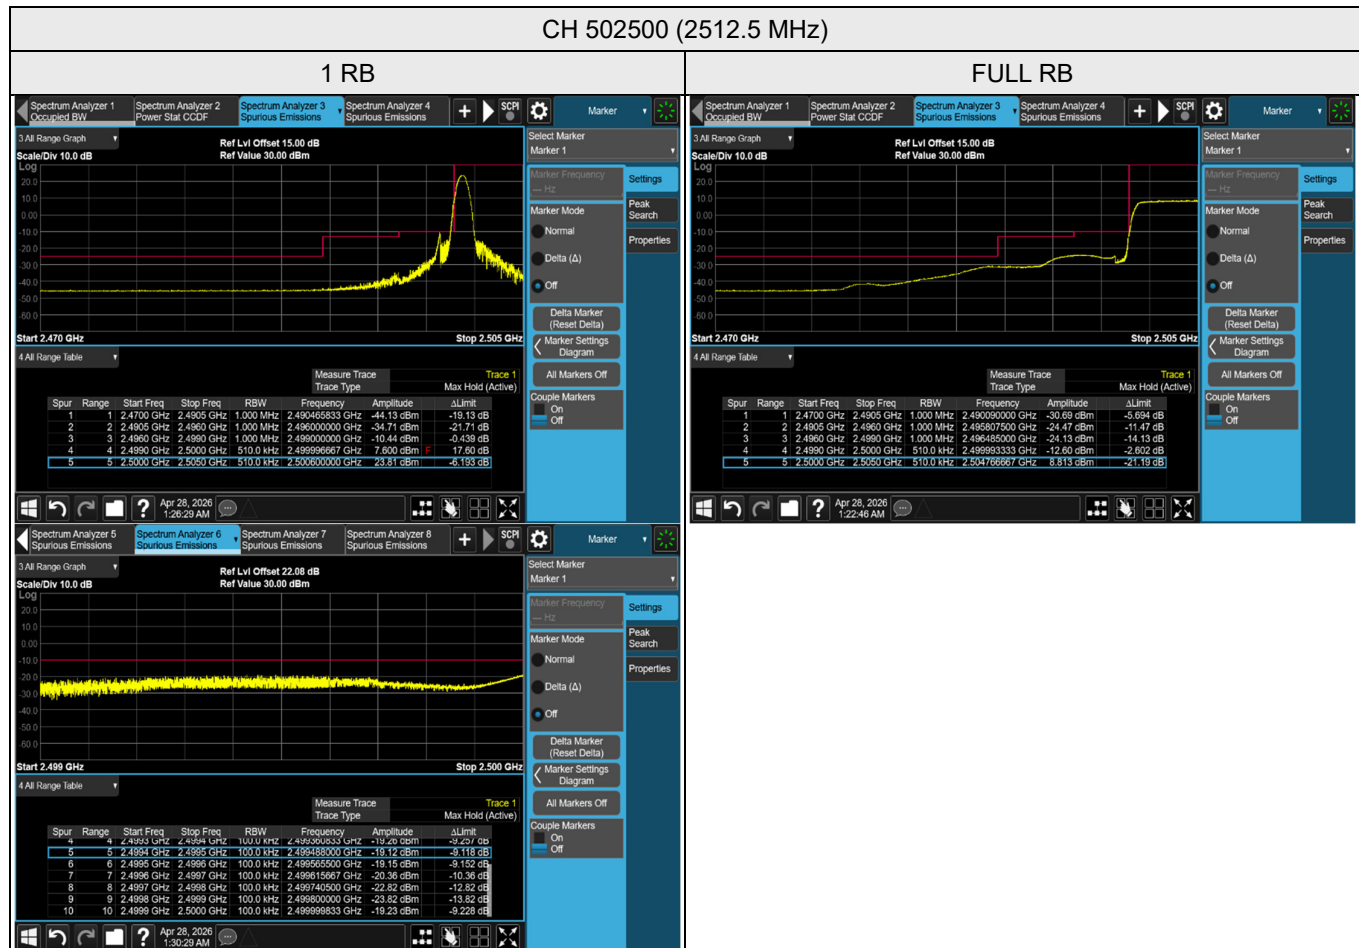


[RBW = 100 kHz / Reference RBW = 510 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(510/100)

To compensate for this integration before comparison to the limit, 7.08 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 7.08 dB integration compensation factor = 22.08 dB Ref Lvl Offset

CH 511500 (2557.5 MHz)

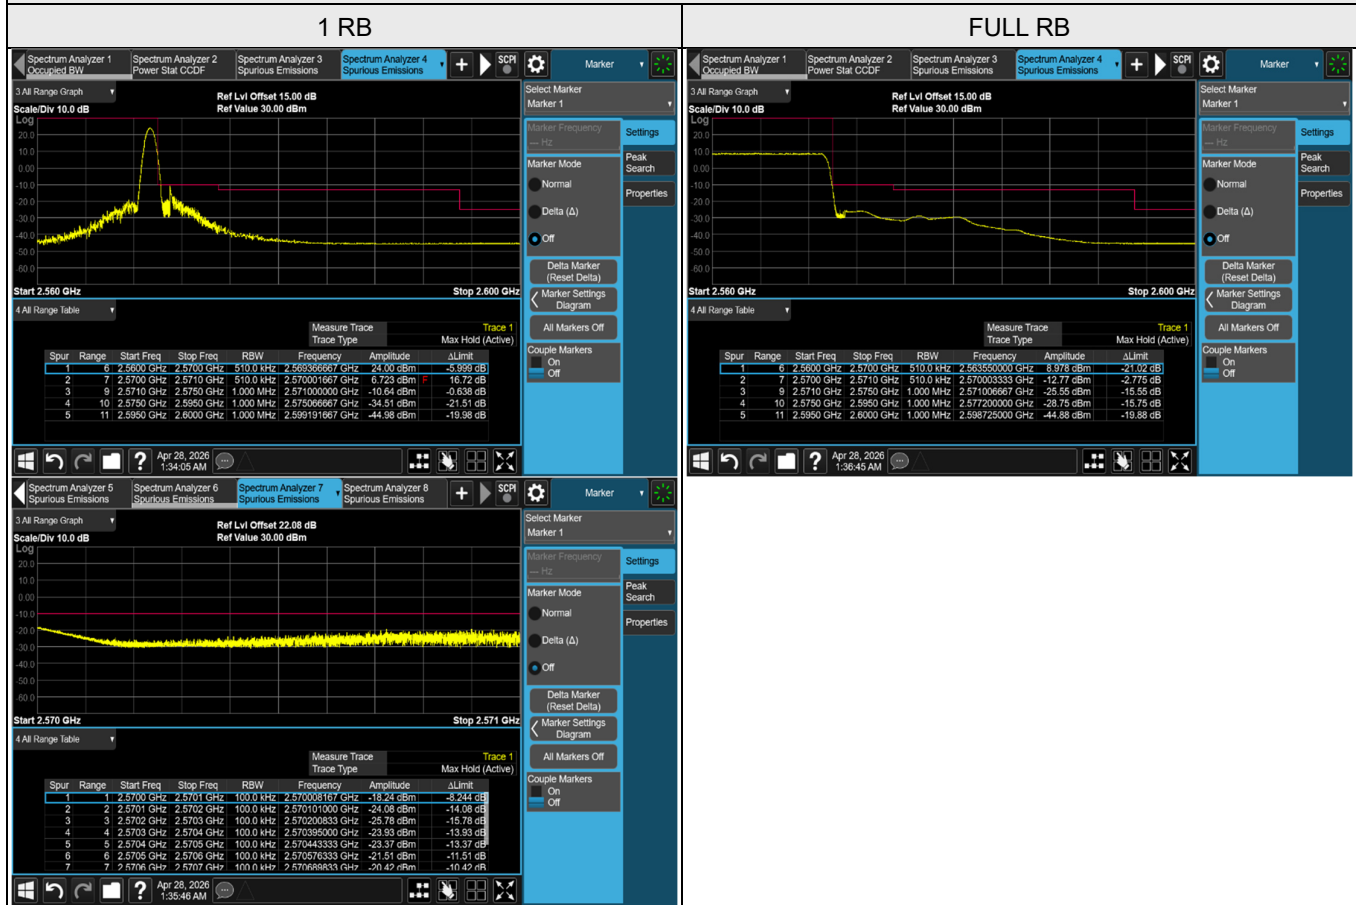


[RBW = 100 kHz / Reference RBW = 510 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(510/100)

To compensate for this integration before comparison to the limit, 7.08 dB was added to Ref Lvl Offset.


i.e. 15.00 dB CF + 7.08 dB integration compensation factor = 22.08 dB Ref Lvl Offset

NR n7 SCS 15 kHz, Channel Bandwidth: 30 MHz

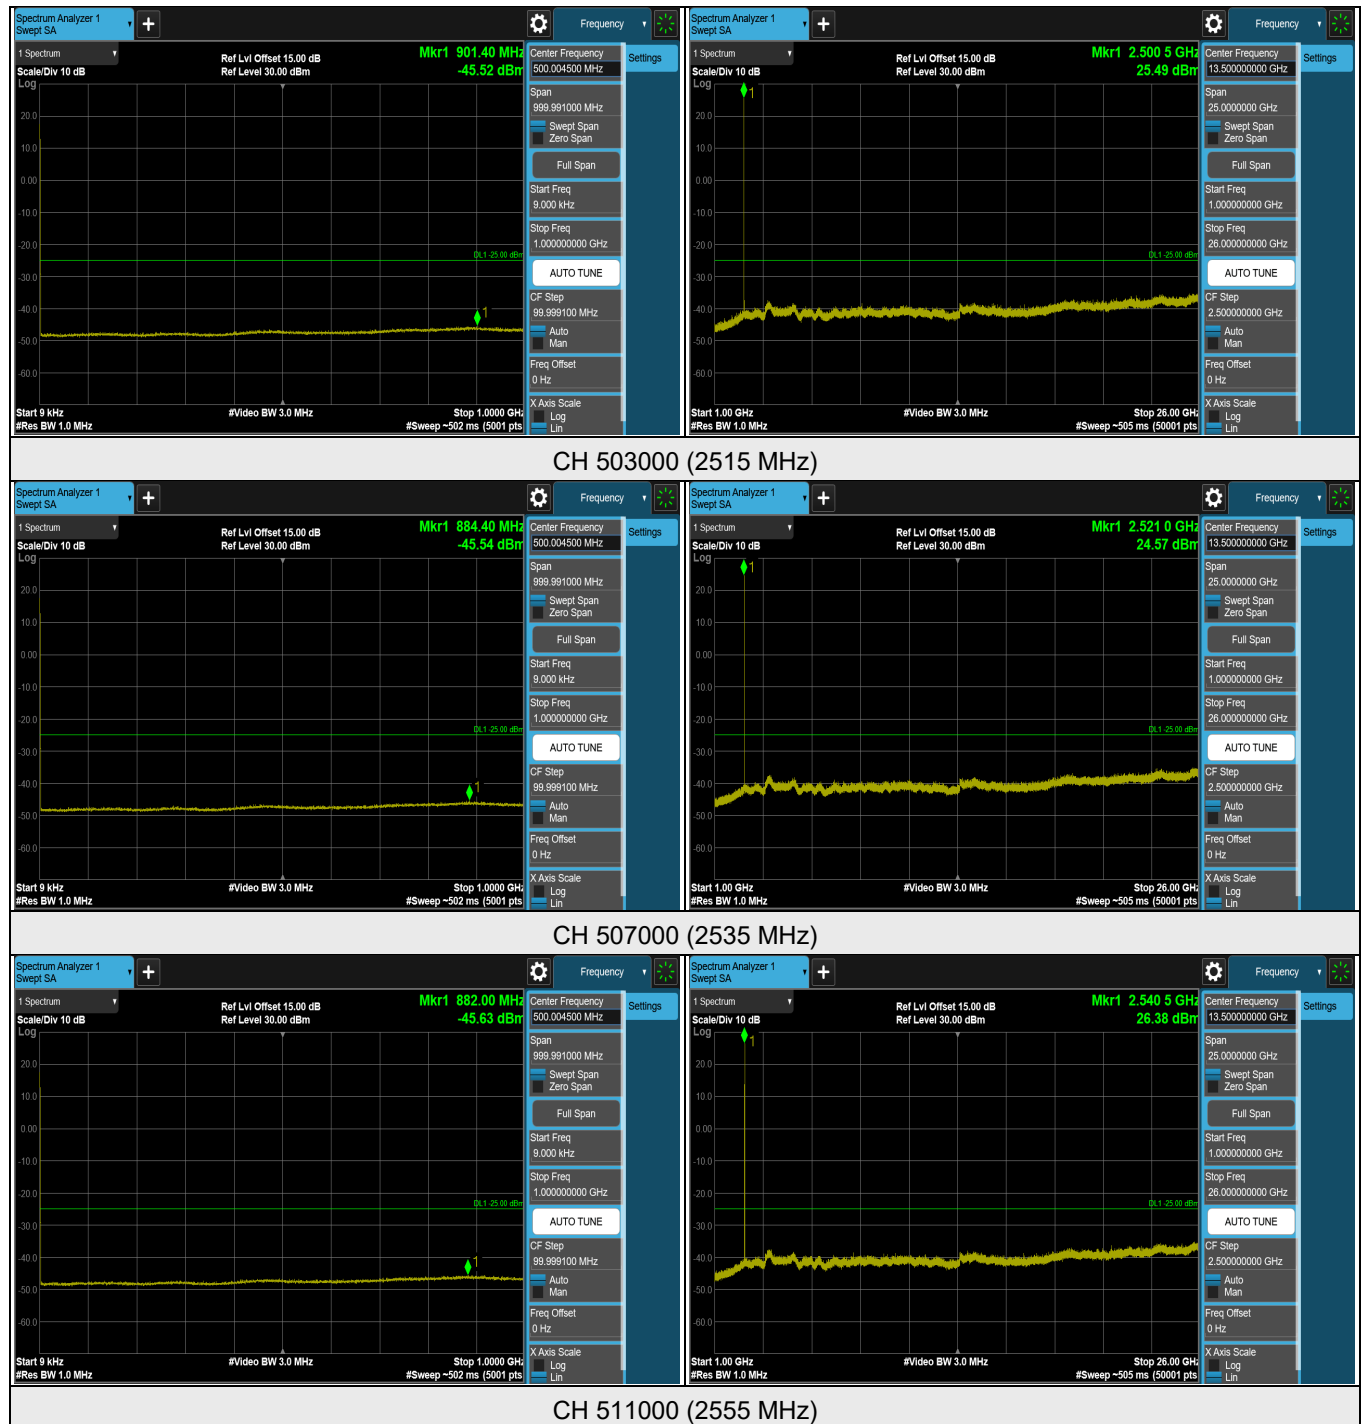

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n7 SCS 15 kHz, Channel Bandwidth: 30 MHz

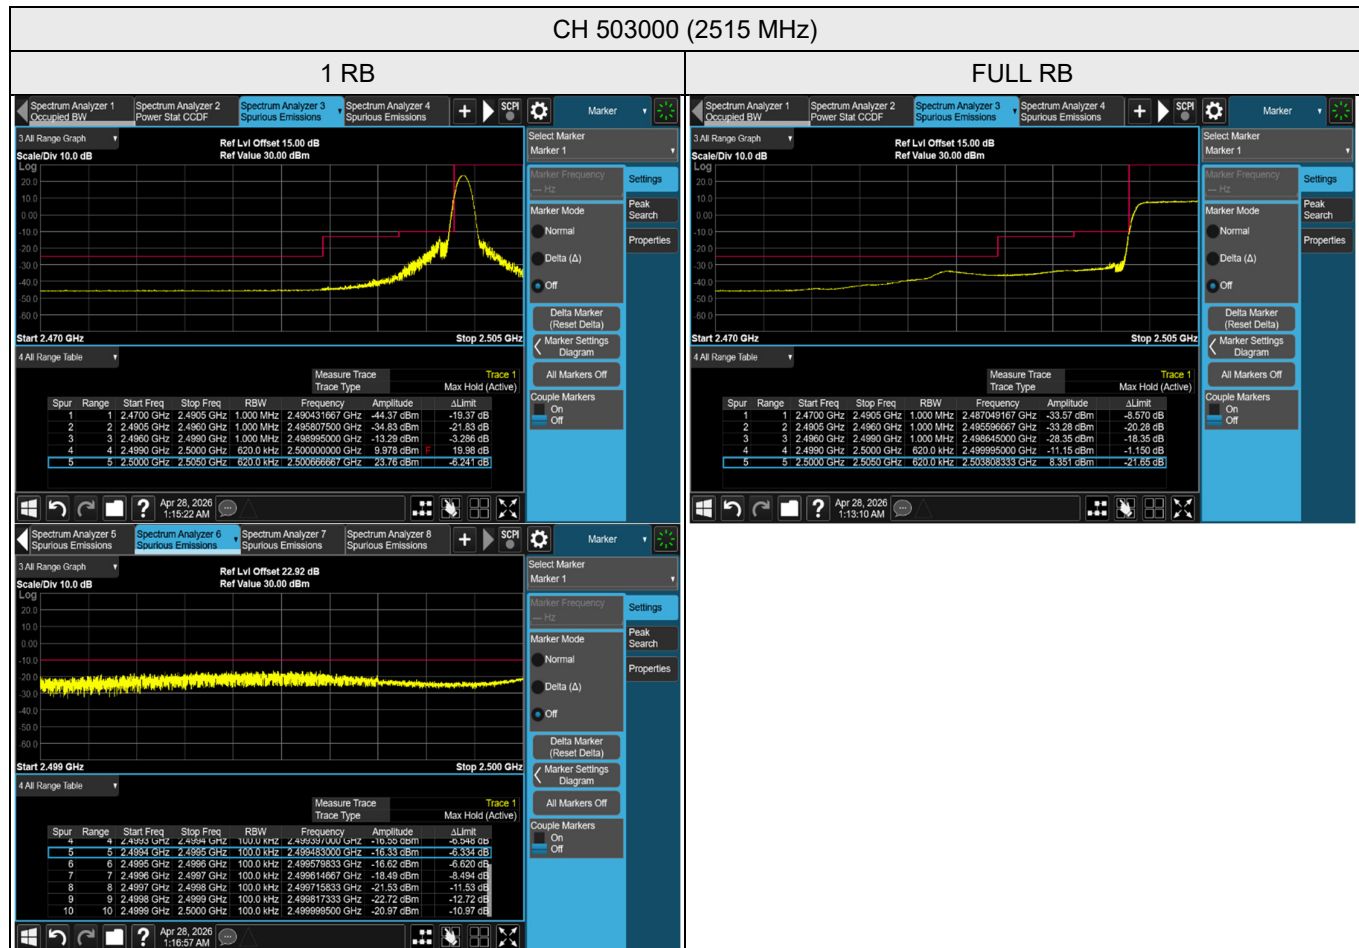

[RBW = 100 kHz / Reference RBW = 620 kHz]


Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(620/100)

To compensate for this integration before comparison to the limit, 7.92 dB was added to Ref Lvl Offset.


i.e. 15.00 dB CF + 7.92 dB integration compensation factor = 22.92 dB Ref Lvl Offset

CH 511000 (2555 MHz)

1 RB

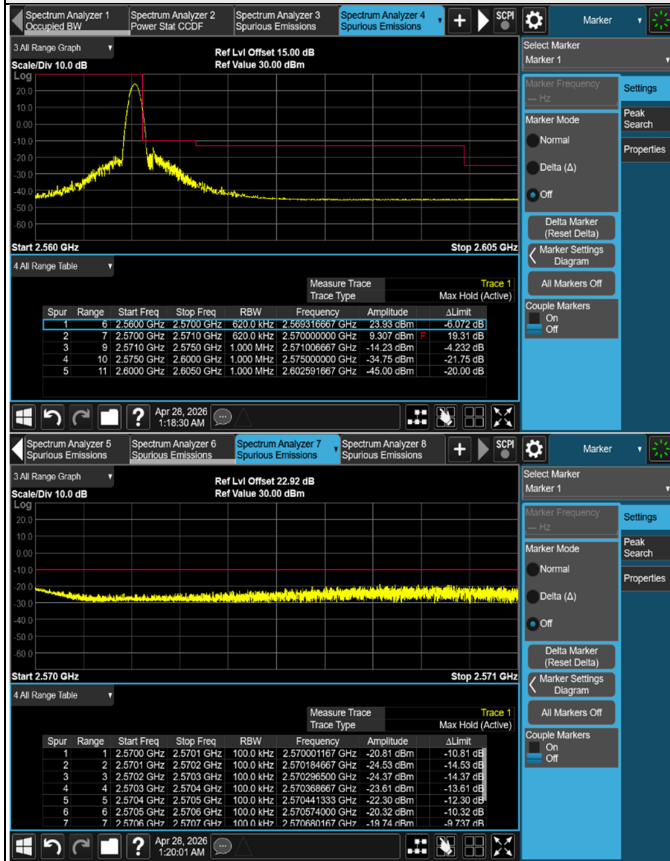

FULL RB

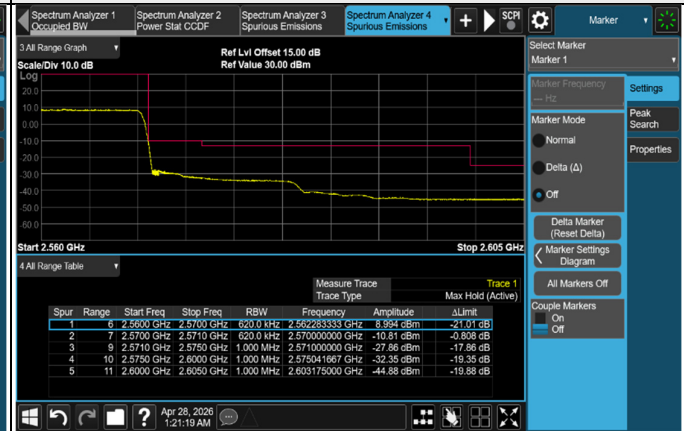

[RBW = 100 kHz / Reference RBW = 620 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(620/100)

To compensate for this integration before comparison to the limit, 7.92 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 7.92 dB integration compensation factor = 22.92 dB Ref Lvl Offset