



NR n7 SCS 15 kHz, Channel Bandwidth: 40 MHz

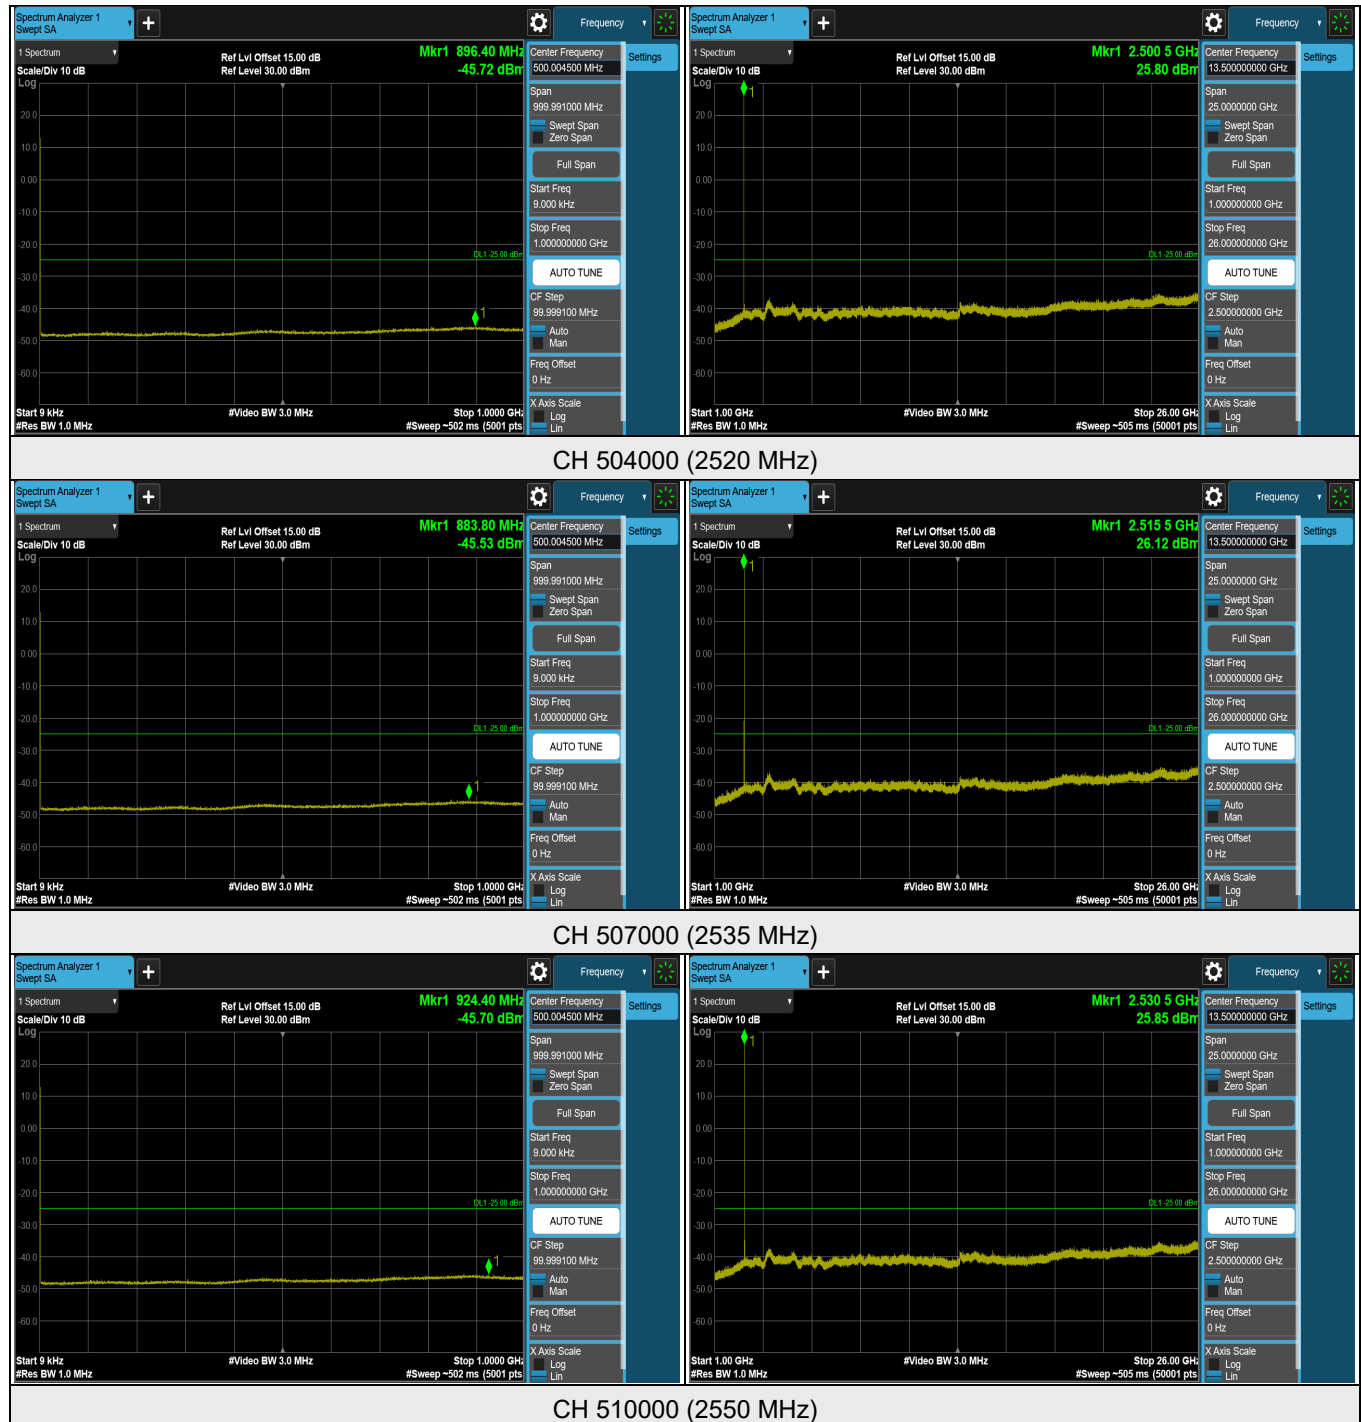

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n7 SCS 15 kHz, Channel Bandwidth: 40 MHz

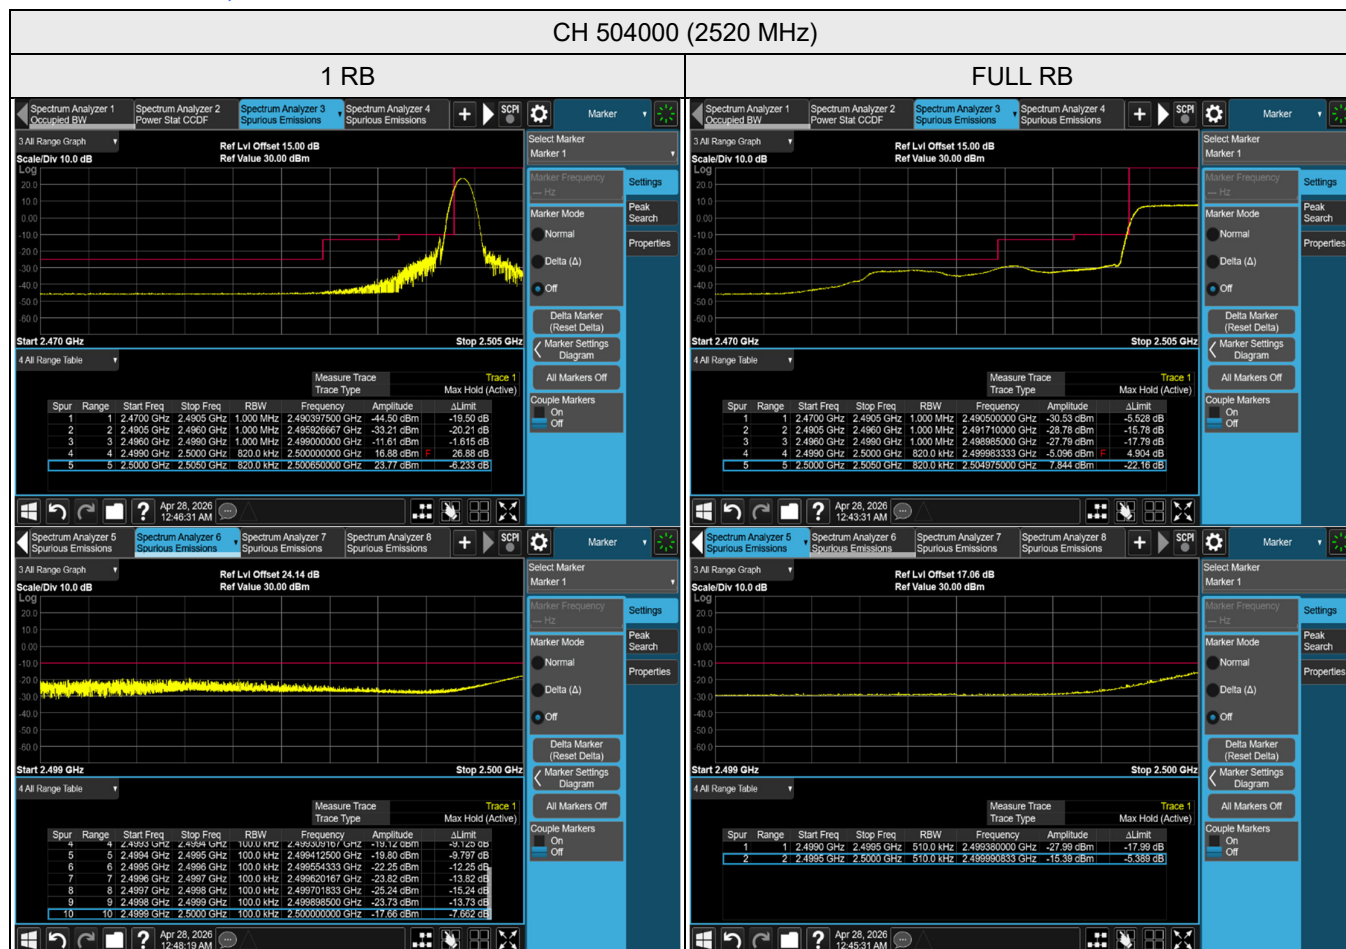


[RBW = 100 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(820/100)
 To compensate for this integration before comparison to the limit, 9.14 dB was added to Ref Lvl Offset.
 i.e. 15.00 dB CF + 9.14 dB integration compensation factor = 24.14 dB Ref Lvl Offset

[RBW = 510 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(820/510)
 To compensate for this integration before comparison to the limit, 2.06 dB was added to Ref Lvl Offset.
 i.e. 15.00 dB CF + 2.06 dB integration compensation factor = 17.06 dB Ref Lvl Offset

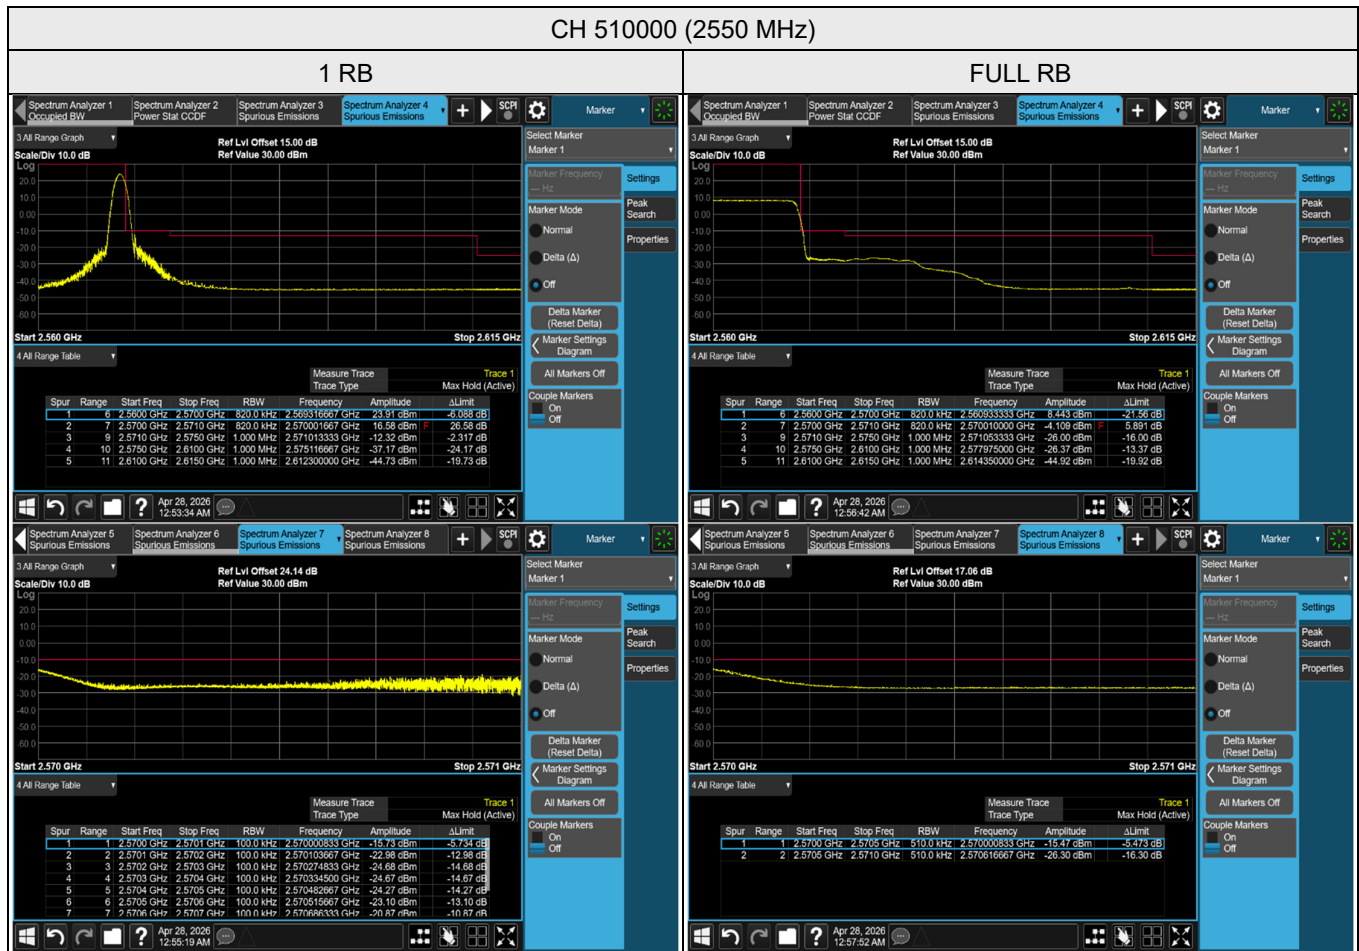

[RBW = 100 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(820/100)

To compensate for this integration before comparison to the limit, 9.14 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 9.14 dB integration compensation factor = 24.14 dB Ref Lvl Offset


[RBW = 510 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(820/510)


To compensate for this integration before comparison to the limit, 2.06 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 2.06 dB integration compensation factor = 17.06 dB Ref Lvl Offset

NR n7 SCS 15 kHz, Channel Bandwidth: 50 MHz

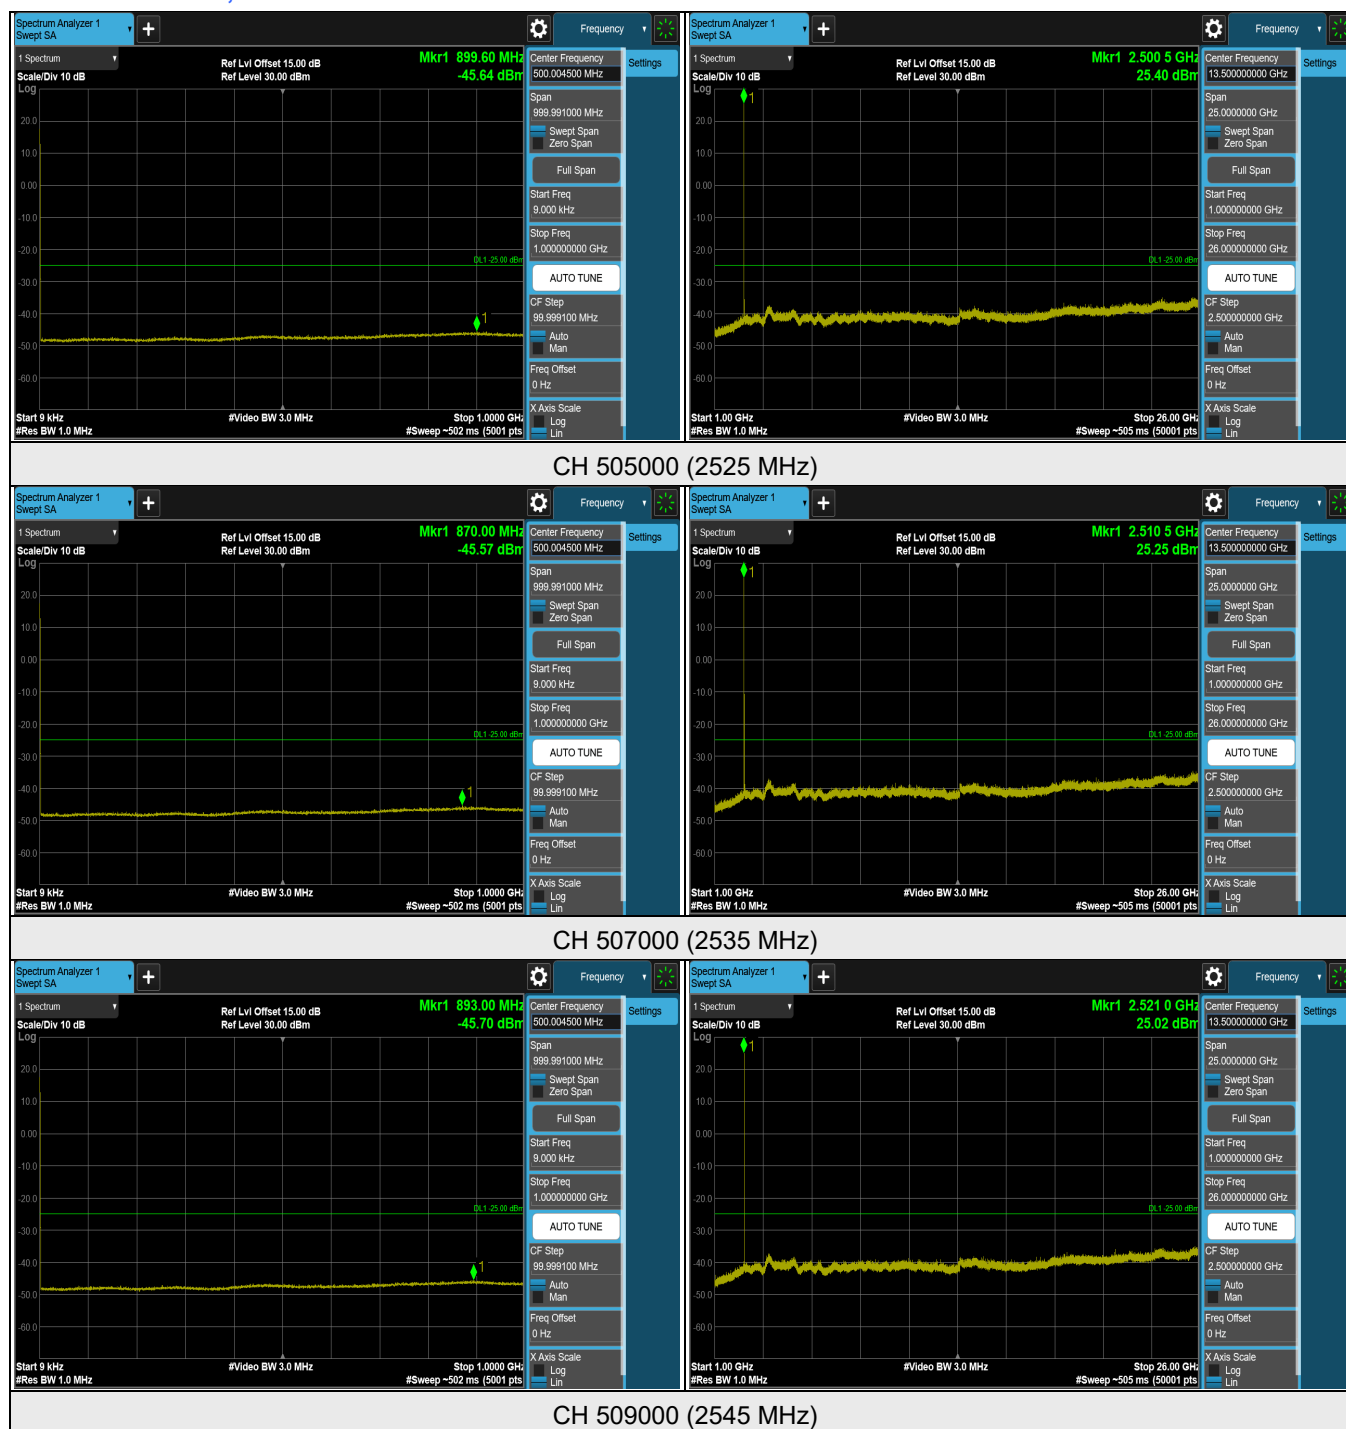

NR n7 SCS 15 kHz, Channel Bandwidth: 50 MHz

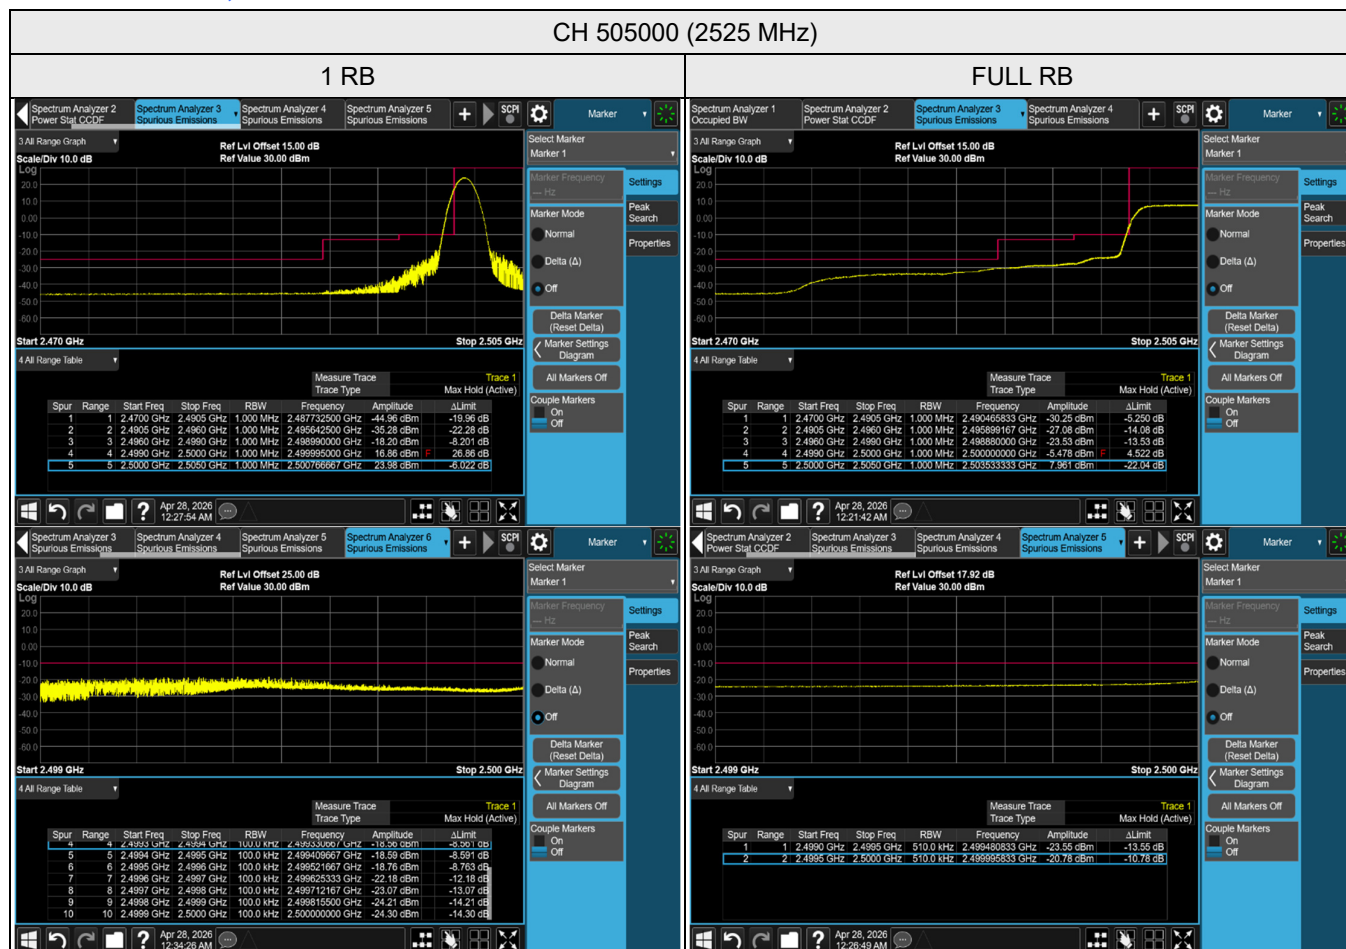

[RBW = 100 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(1000/100)

To compensate for this integration before comparison to the limit, 10 dB was added to Ref Lvl Offset.


i.e. 15 dB CF + 10 dB integration compensation factor = 25 dB Ref Lvl Offset

[RBW = 510 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

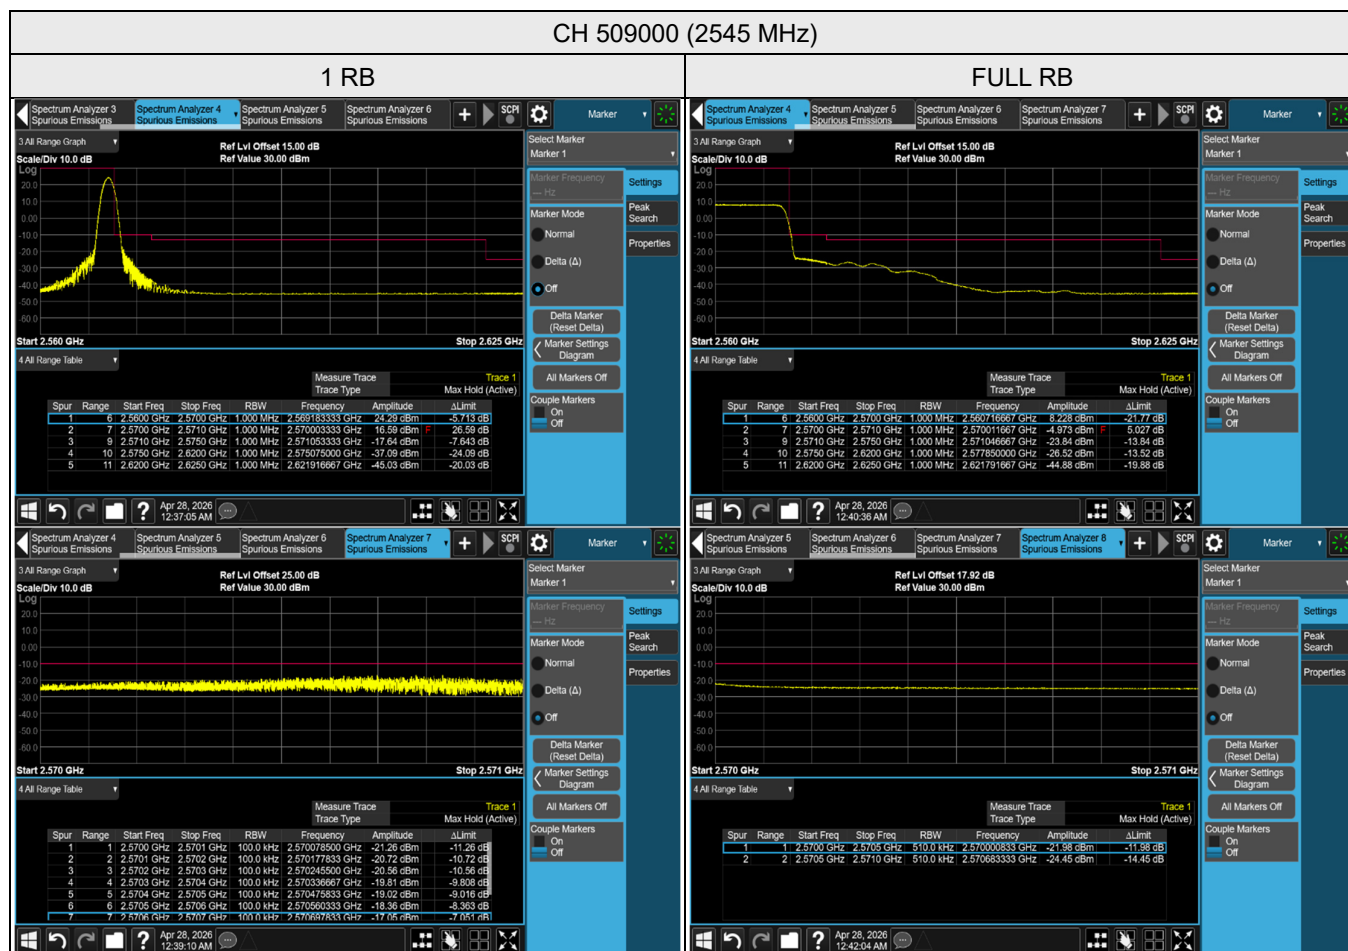

[RBW = 100 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=100kHz] + 10log(1000/100)

To compensate for this integration before comparison to the limit, 10 dB was added to Ref Lvl Offset.

i.e. 15 dB CF + 10 dB integration compensation factor = 25 dB Ref Lvl Offset

[RBW = 510 kHz / Reference RBW = 1 MHz]


Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=510kHz] + 10log(1000/510)

To compensate for this integration before comparison to the limit, 2.92 dB was added to Ref Lvl Offset.

i.e. 15 dB CF + 2.92 dB integration compensation factor = 17.92 dB Ref Lvl Offset

7.5.4 NR n12 SCS 15 kHz

NR n12 SCS 15 kHz, Channel Bandwidth: 5 MHz

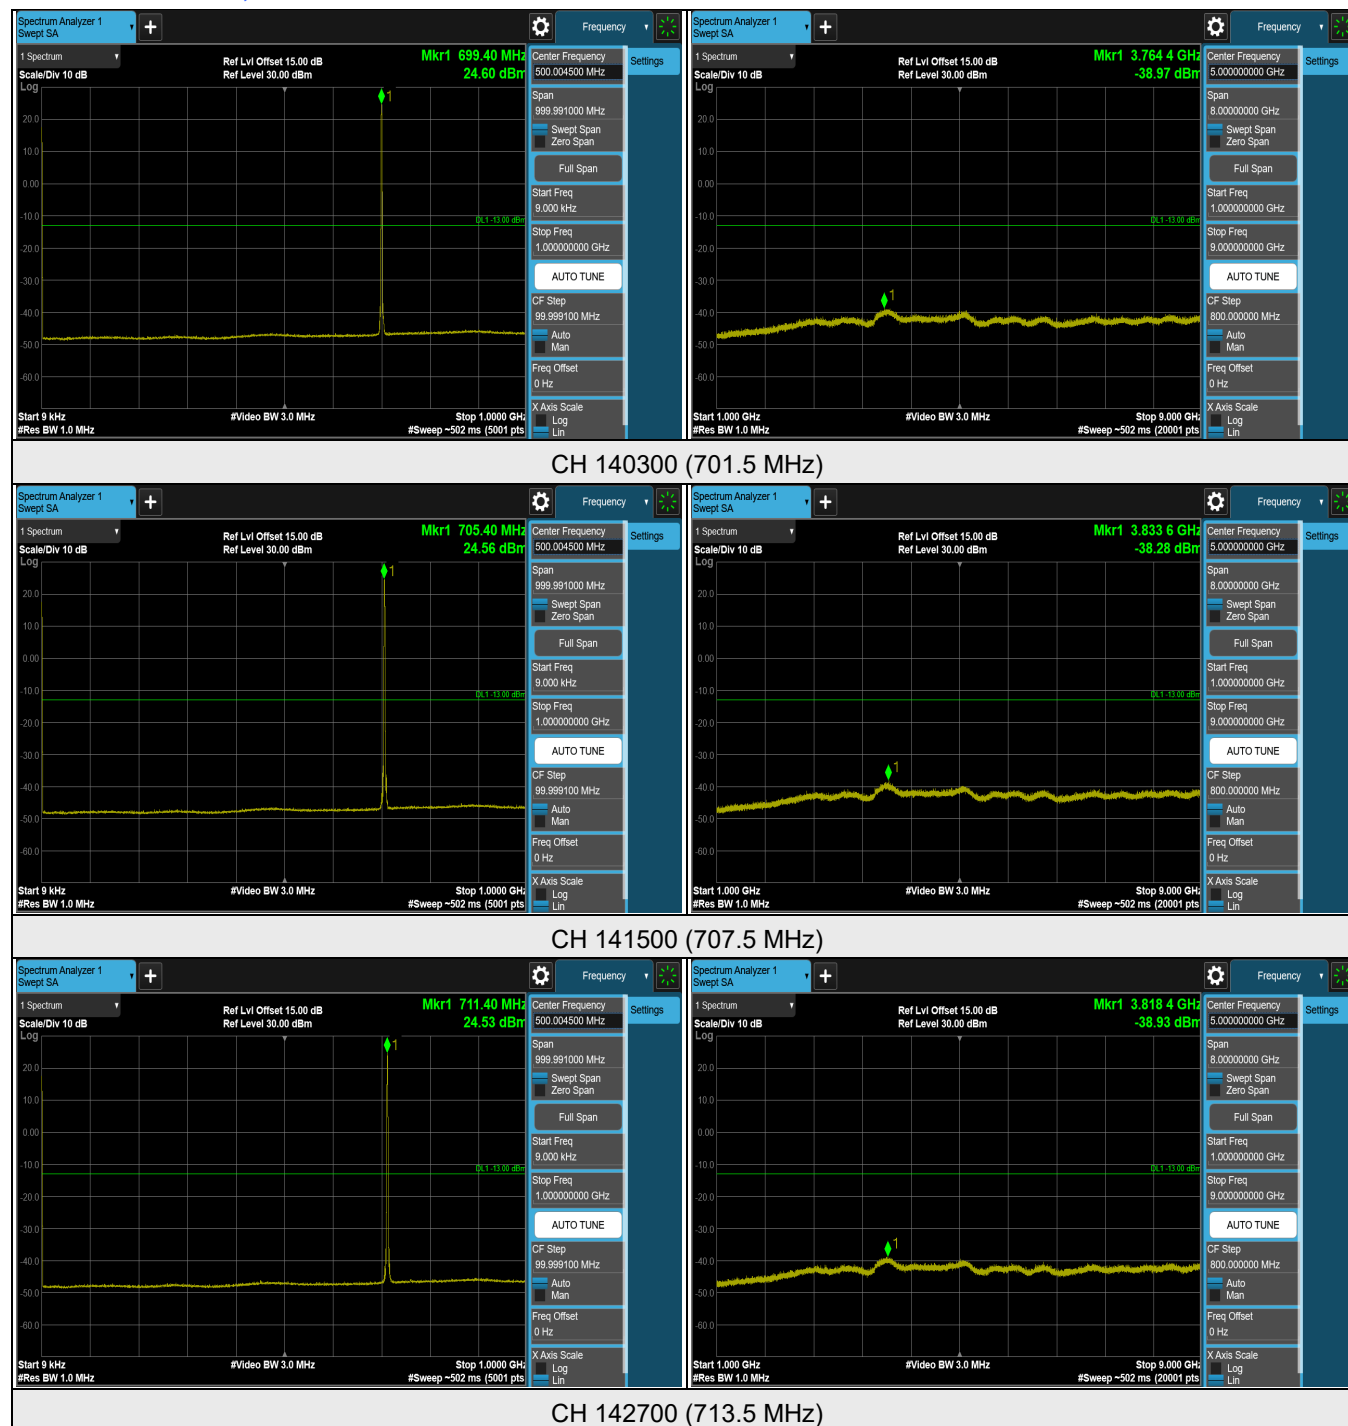

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n12 SCS 15 kHz, Channel Bandwidth: 5 MHz

