



NR n41 SCS 30 kHz, Channel Bandwidth: 30 MHz

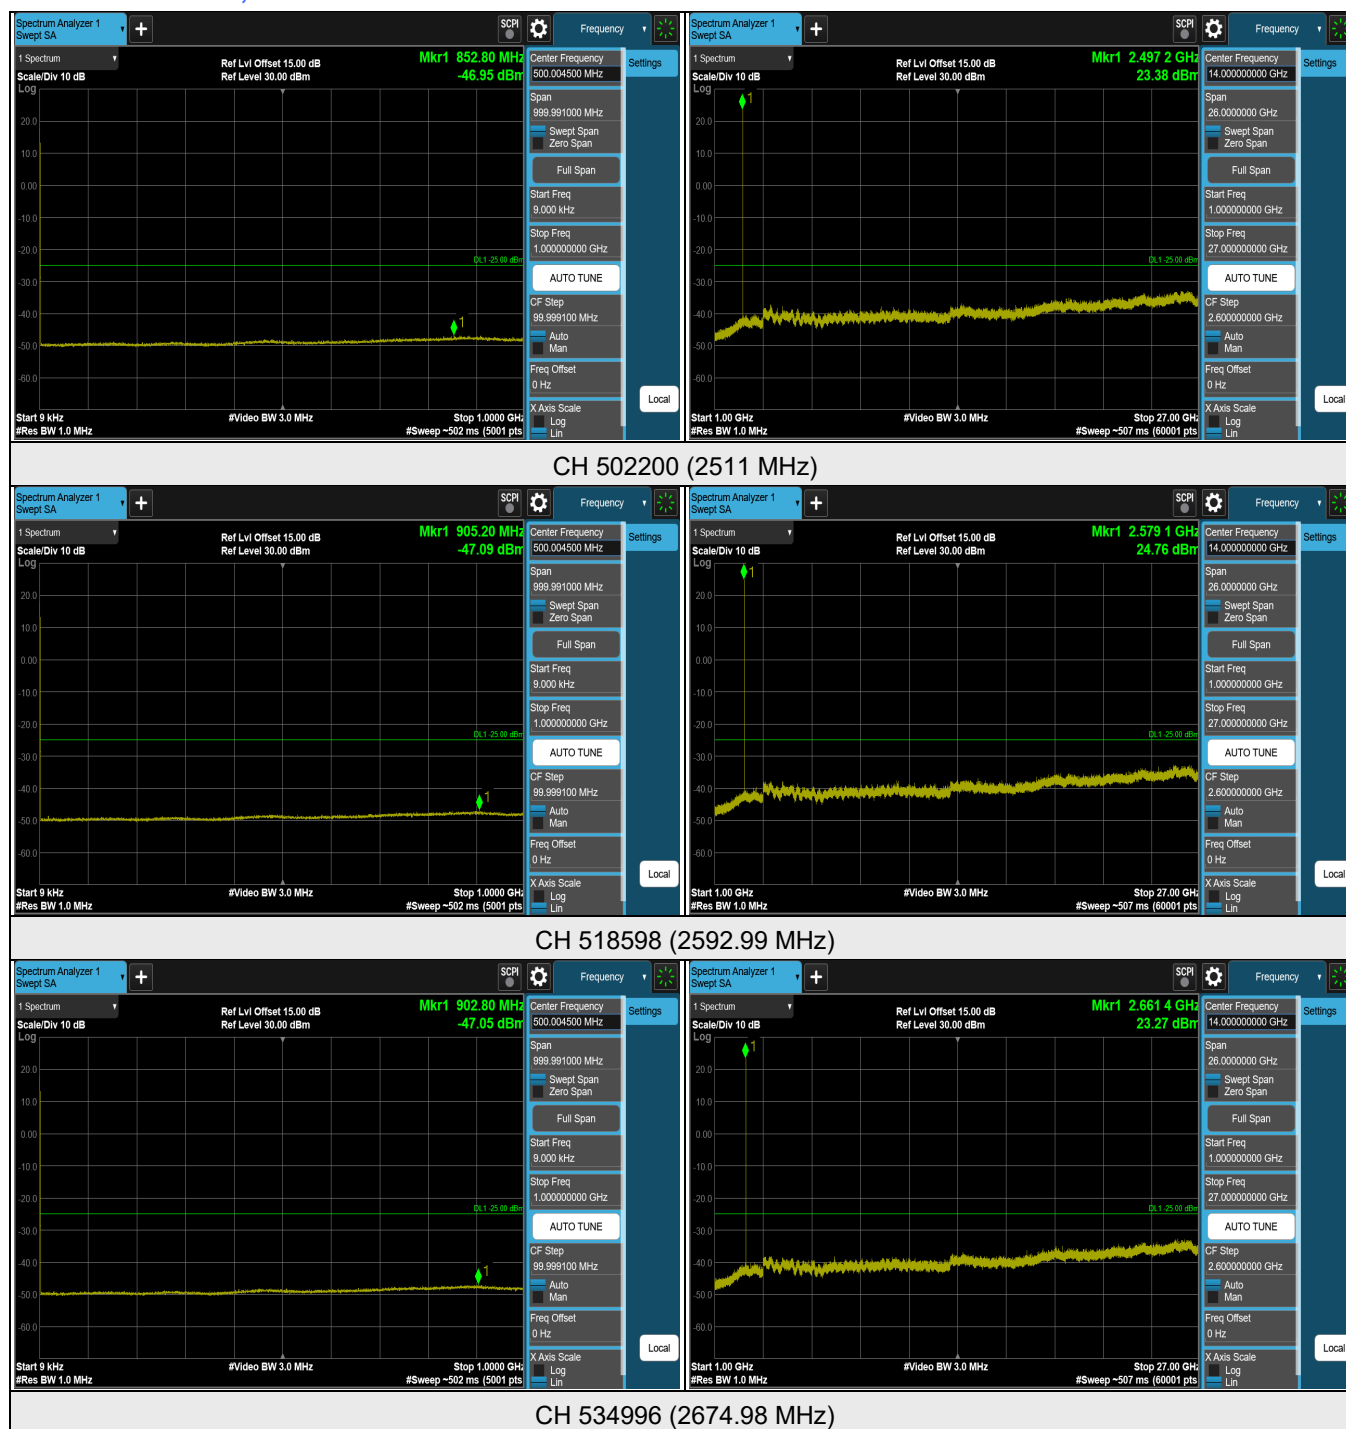


Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, Channel Bandwidth: 30 MHz

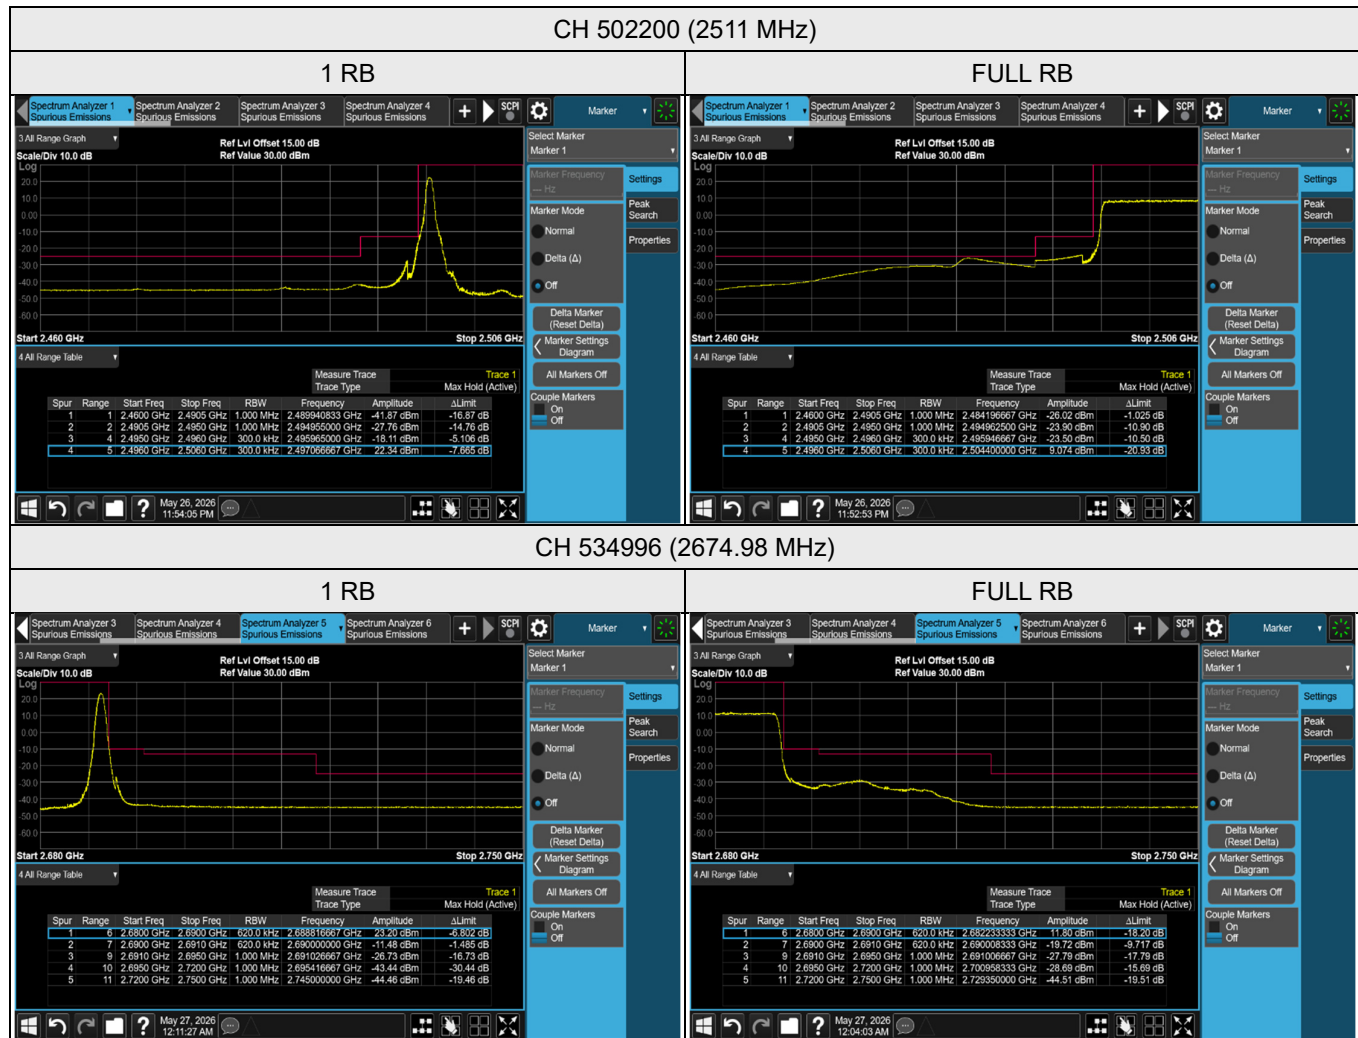

NR n41 SCS 30 kHz, Channel Bandwidth: 40 MHz

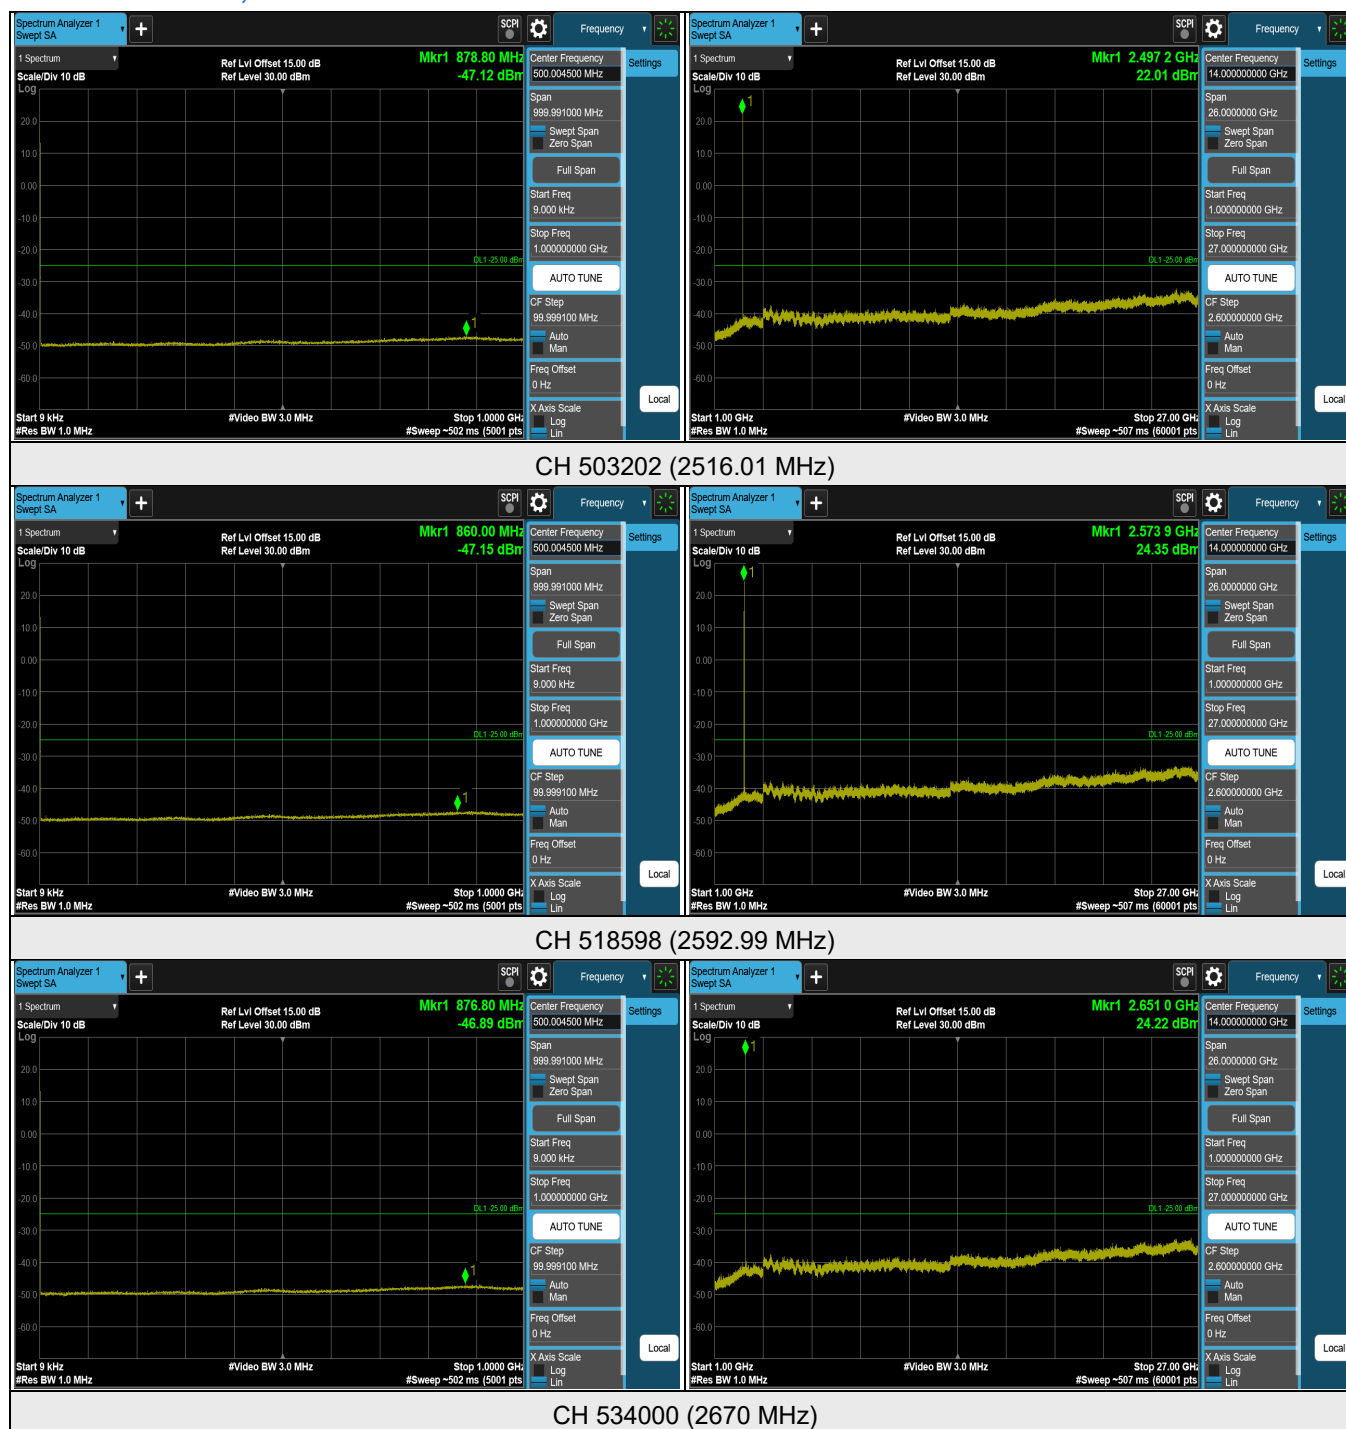

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, Channel Bandwidth: 40 MHz




[RBW = 200 kHz / Reference RBW = 820 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=200kHz] + 10log(820/200)

To compensate for this integration before comparison to the limit, 6.13 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 6.13 dB integration compensation factor = 21.13 dB Ref Lvl Offset

NR n41 SCS 30 kHz, Channel Bandwidth: 50 MHz

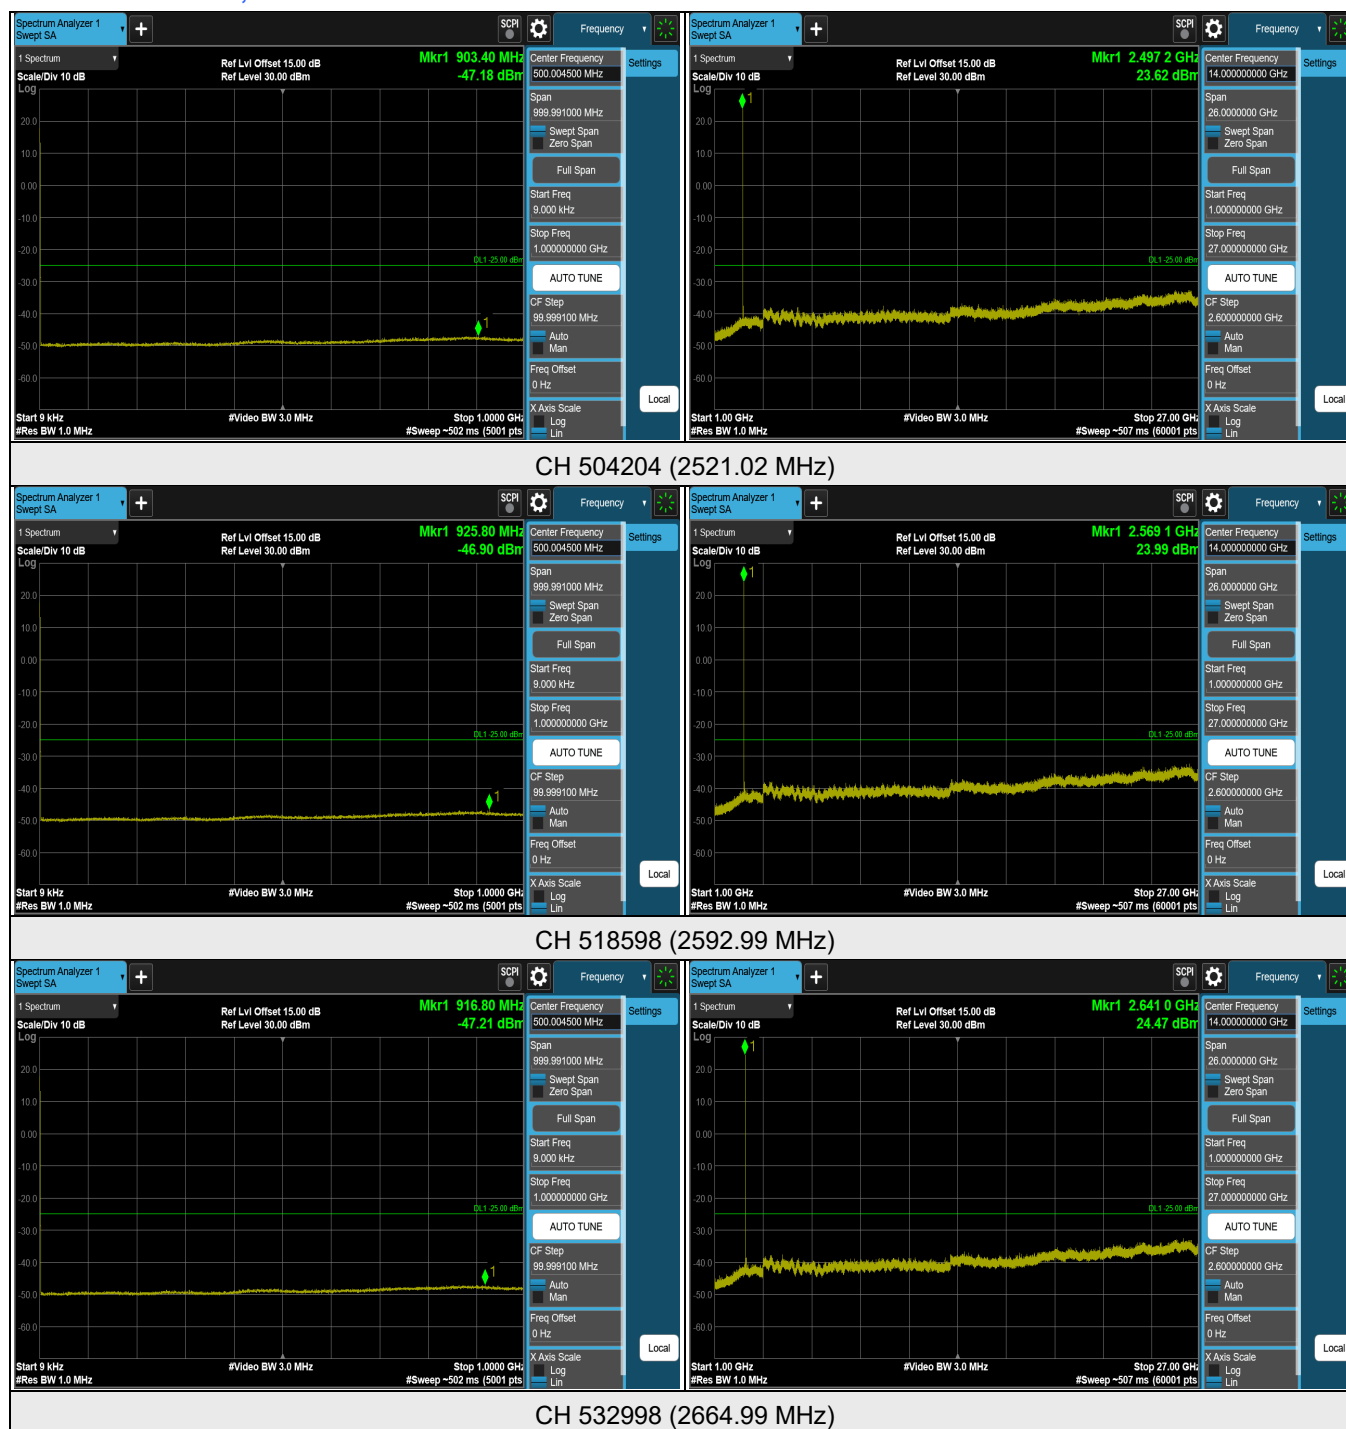

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, Channel Bandwidth: 50 MHz




[RBW = 200 kHz / Reference RBW = 1 MHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=200kHz] + 10log(1000/200)

To compensate for this integration before comparison to the limit, 6.99 dB was added to Ref Lvl Offset.


i.e. 15.00 dB CF + 6.99 dB integration compensation factor = 21.99 dB Ref Lvl Offset

NR n41 SCS 30 kHz, Channel Bandwidth: 60 MHz

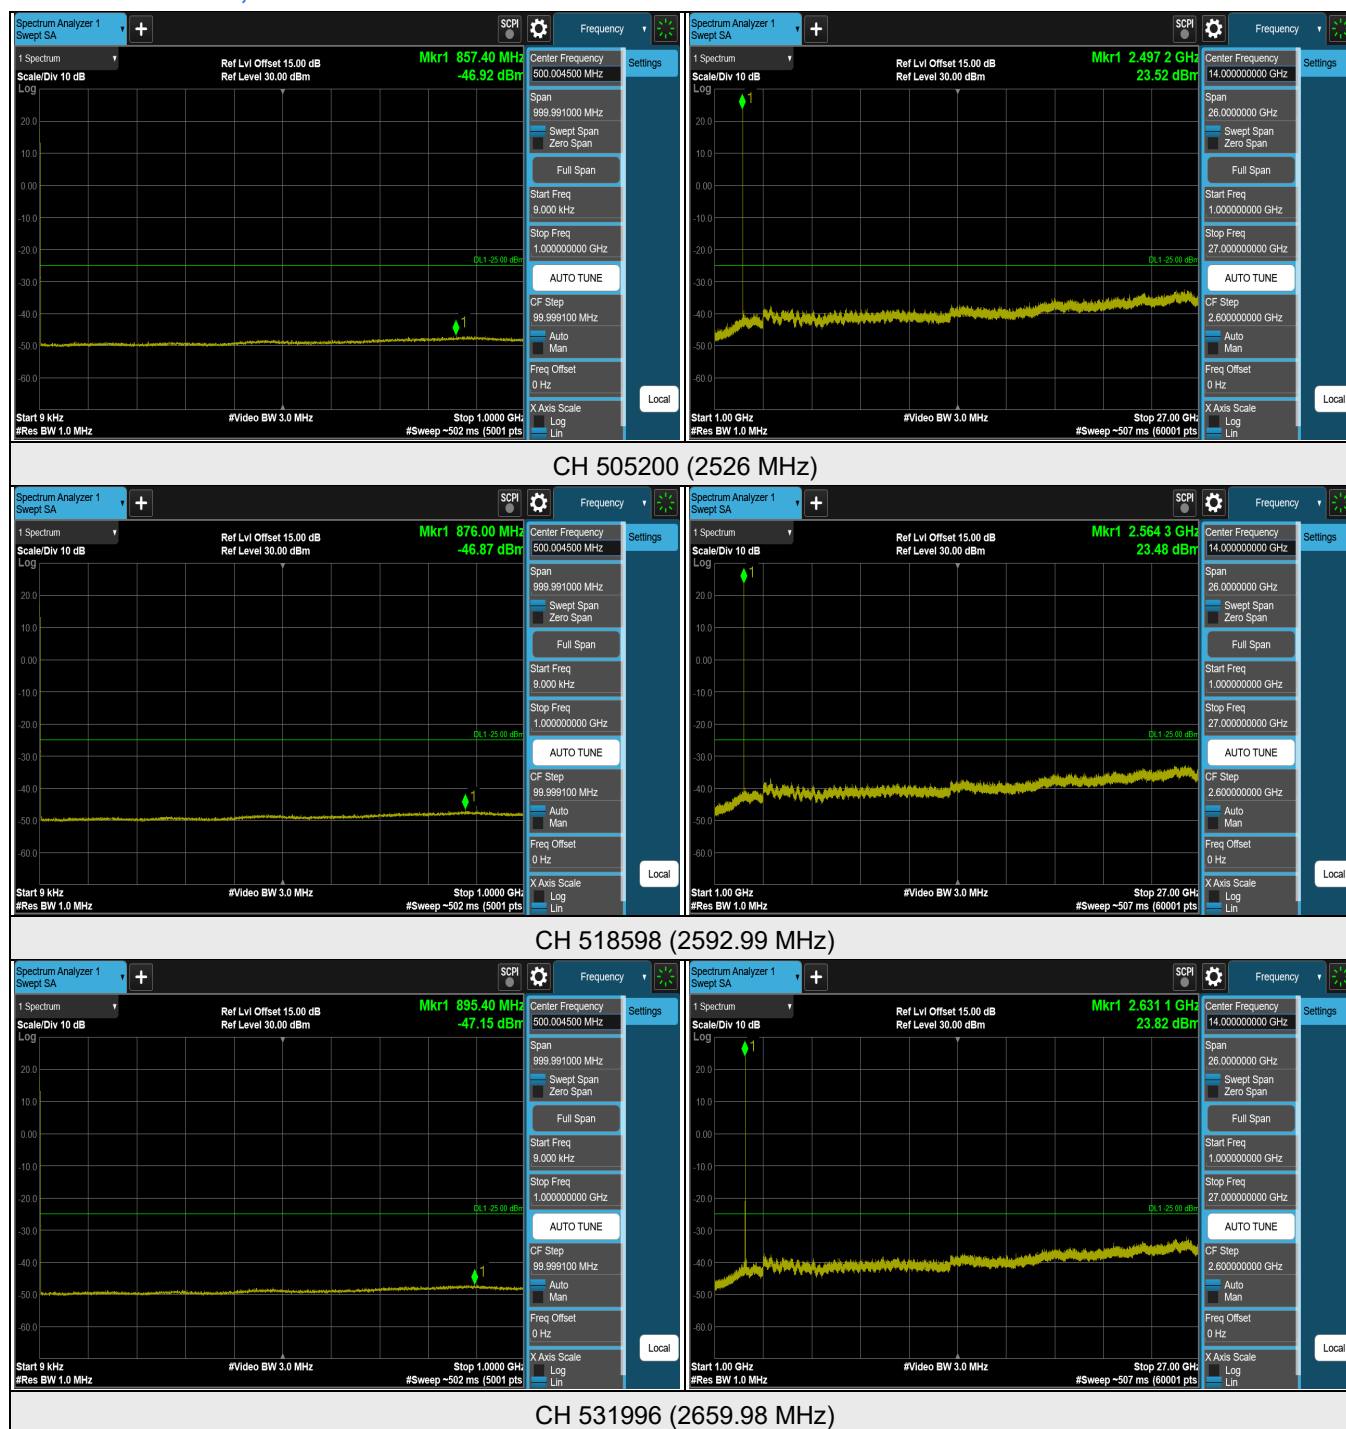

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

NR n41 SCS 30 kHz, Channel Bandwidth: 60 MHz

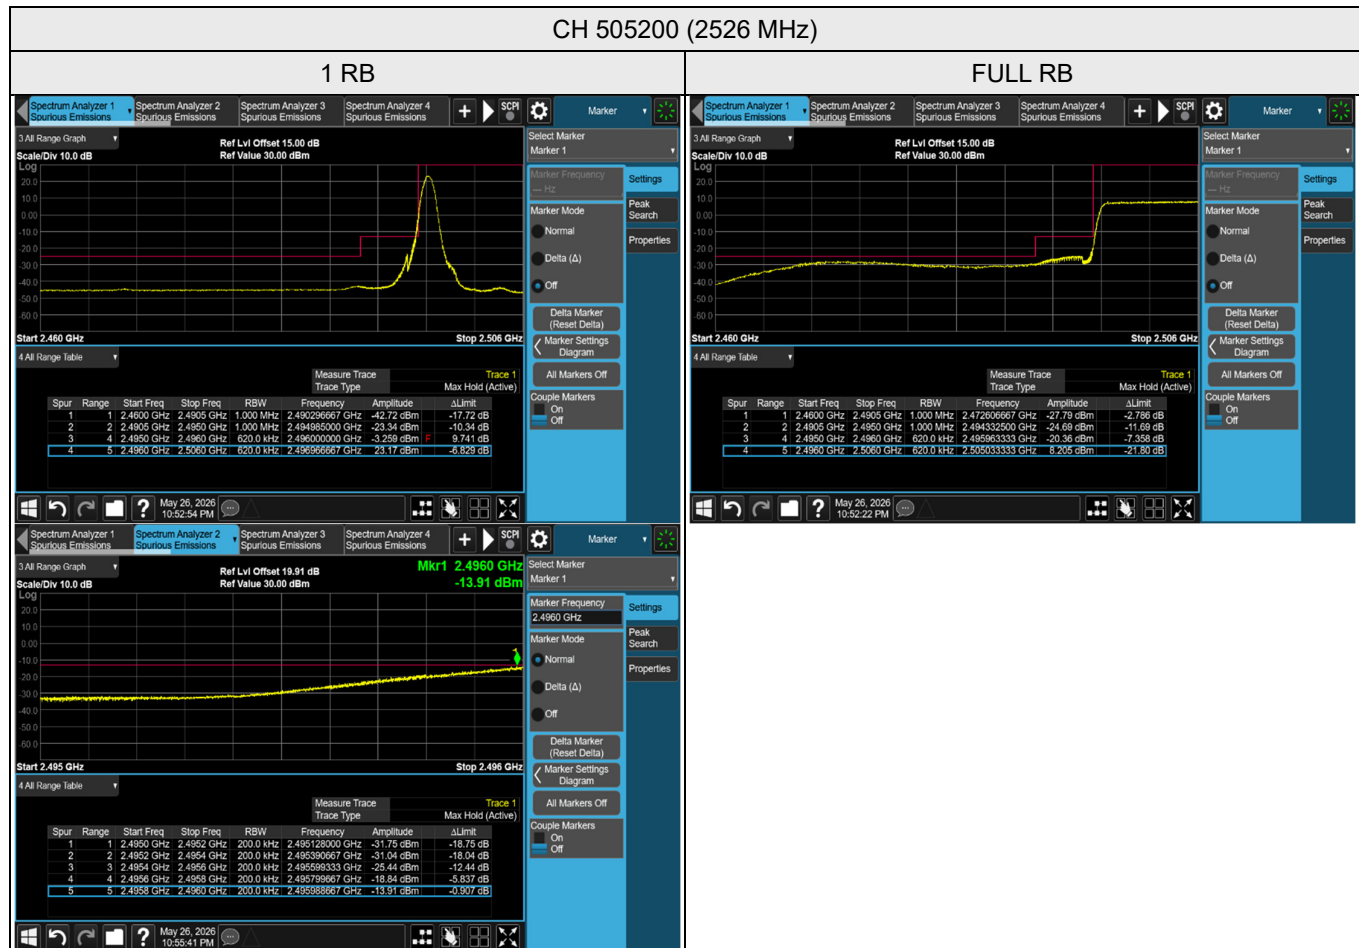

[RBW = 200 kHz / Reference RBW = 620 kHz]

Worst-case integrated BW power = [Max Measured Value (dBm) with RBW=200kHz] + 10log(620/200)

To compensate for this integration before comparison to the limit, 4.91 dB was added to Ref Lvl Offset.

i.e. 15.00 dB CF + 4.91 dB integration compensation factor = 19.91 dB Ref Lvl Offset