




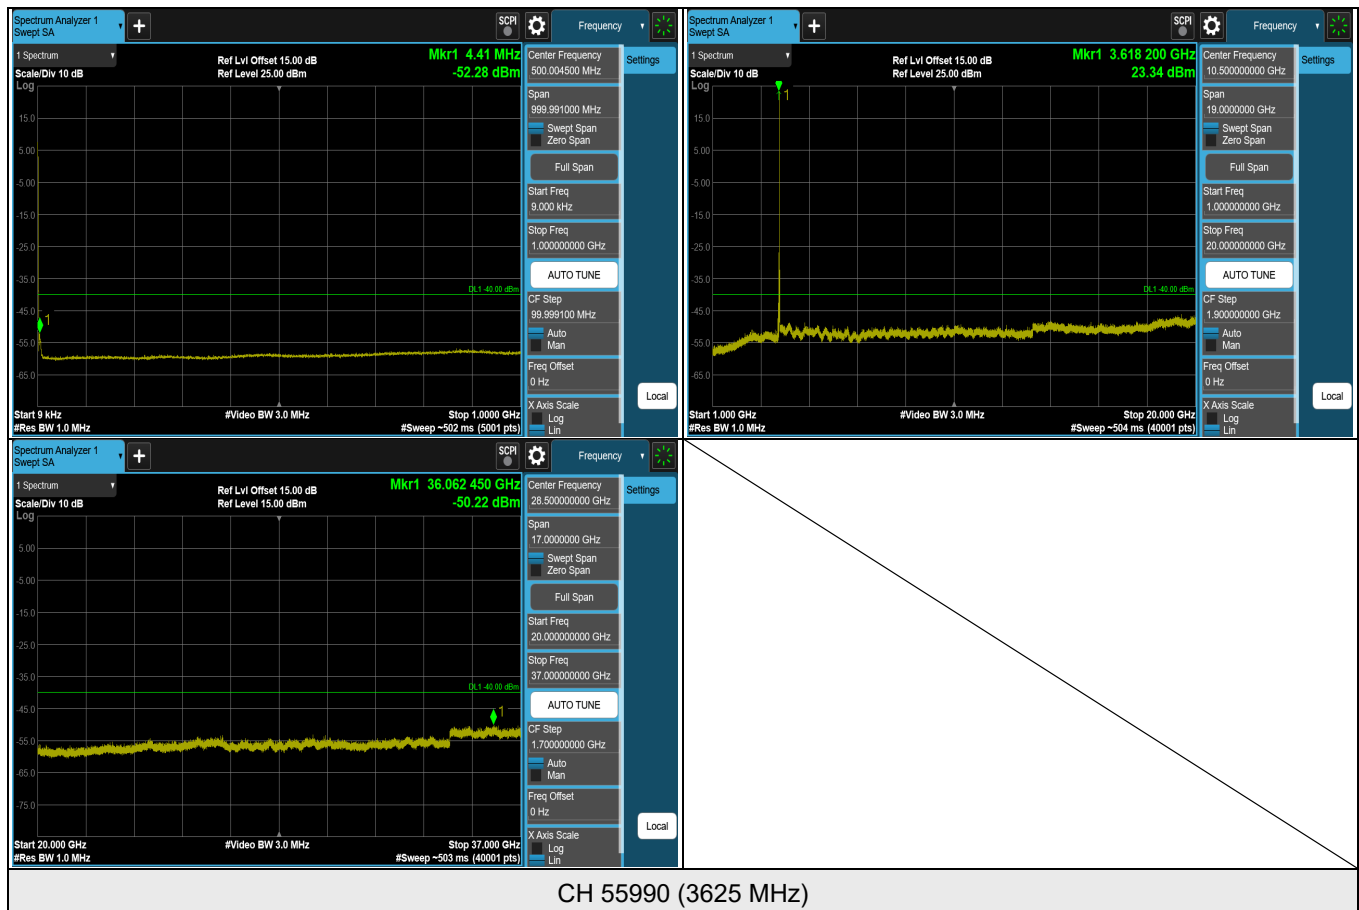


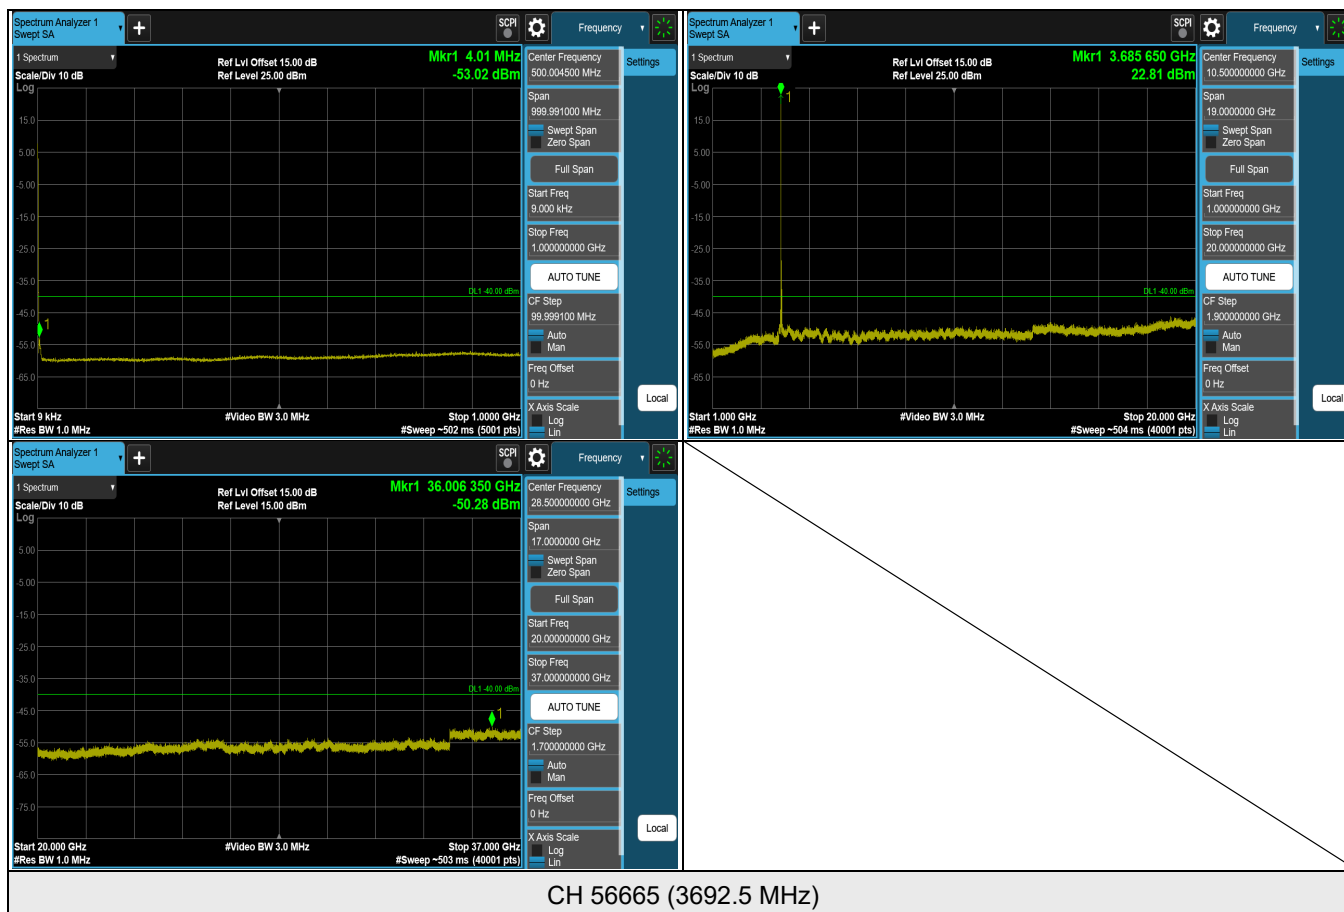


Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth: 15 MHz

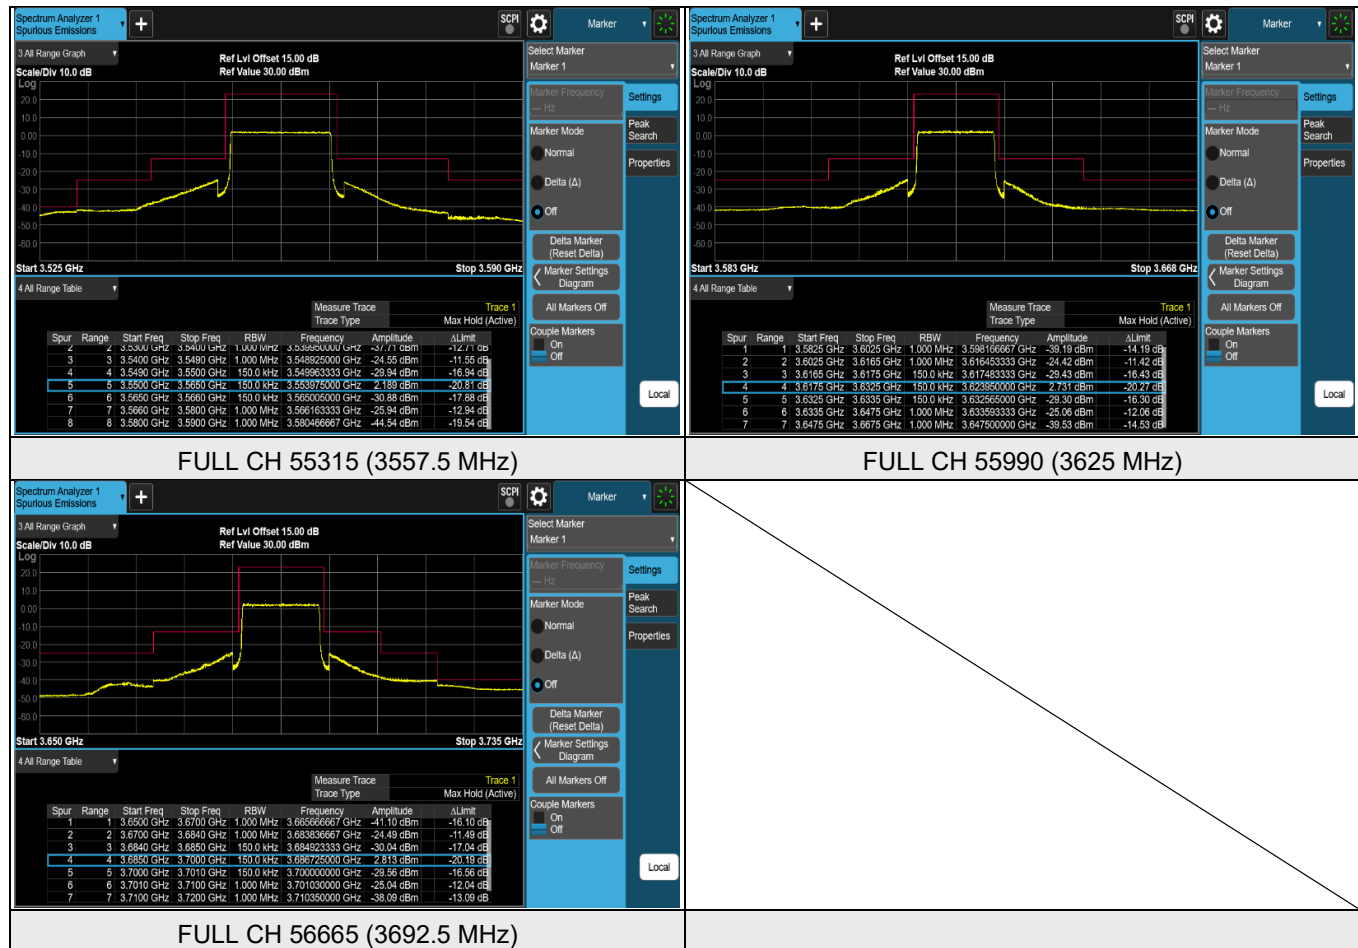


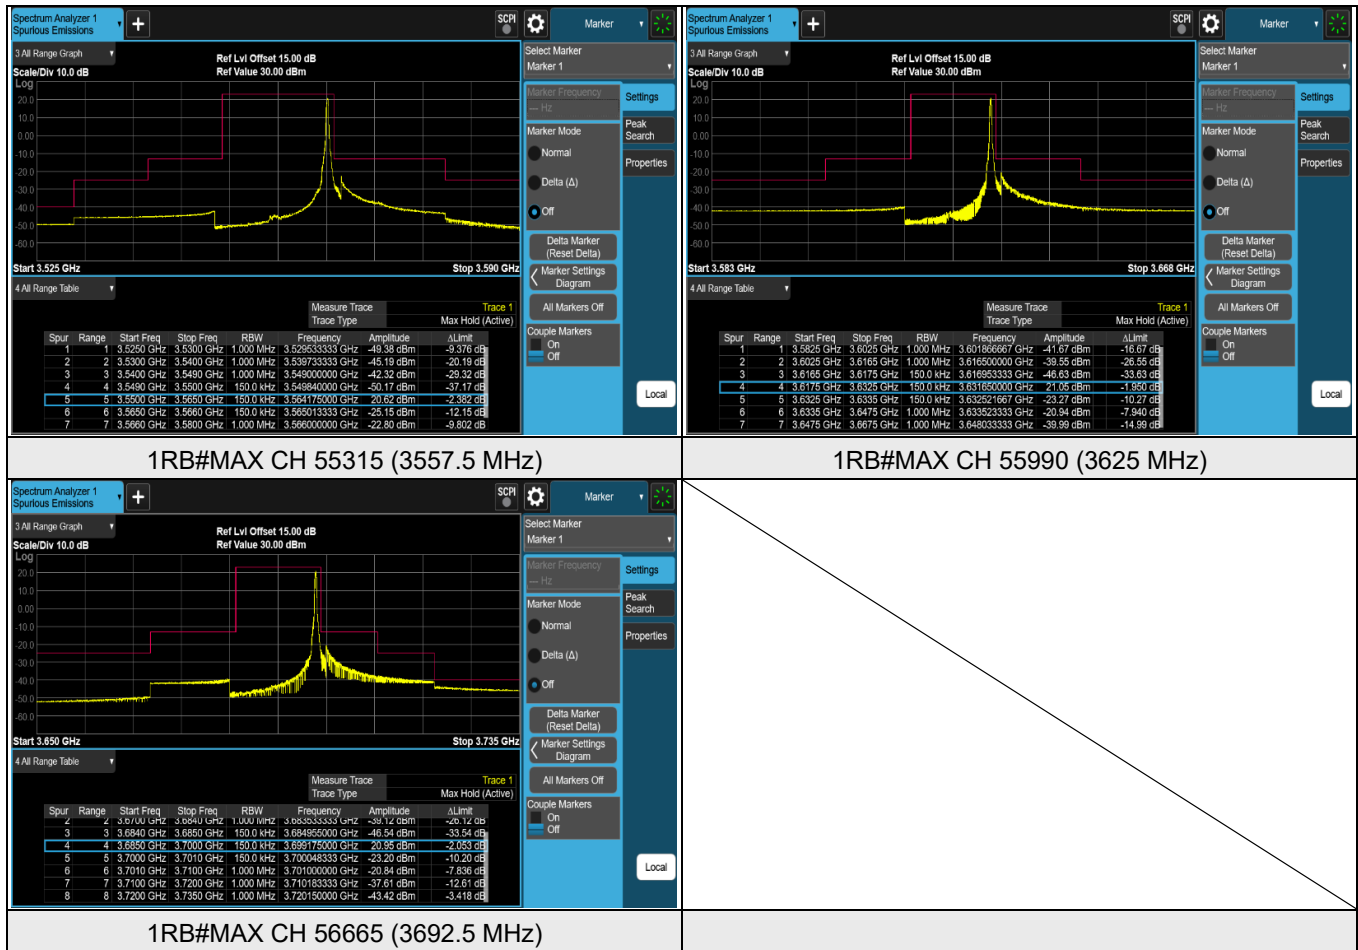


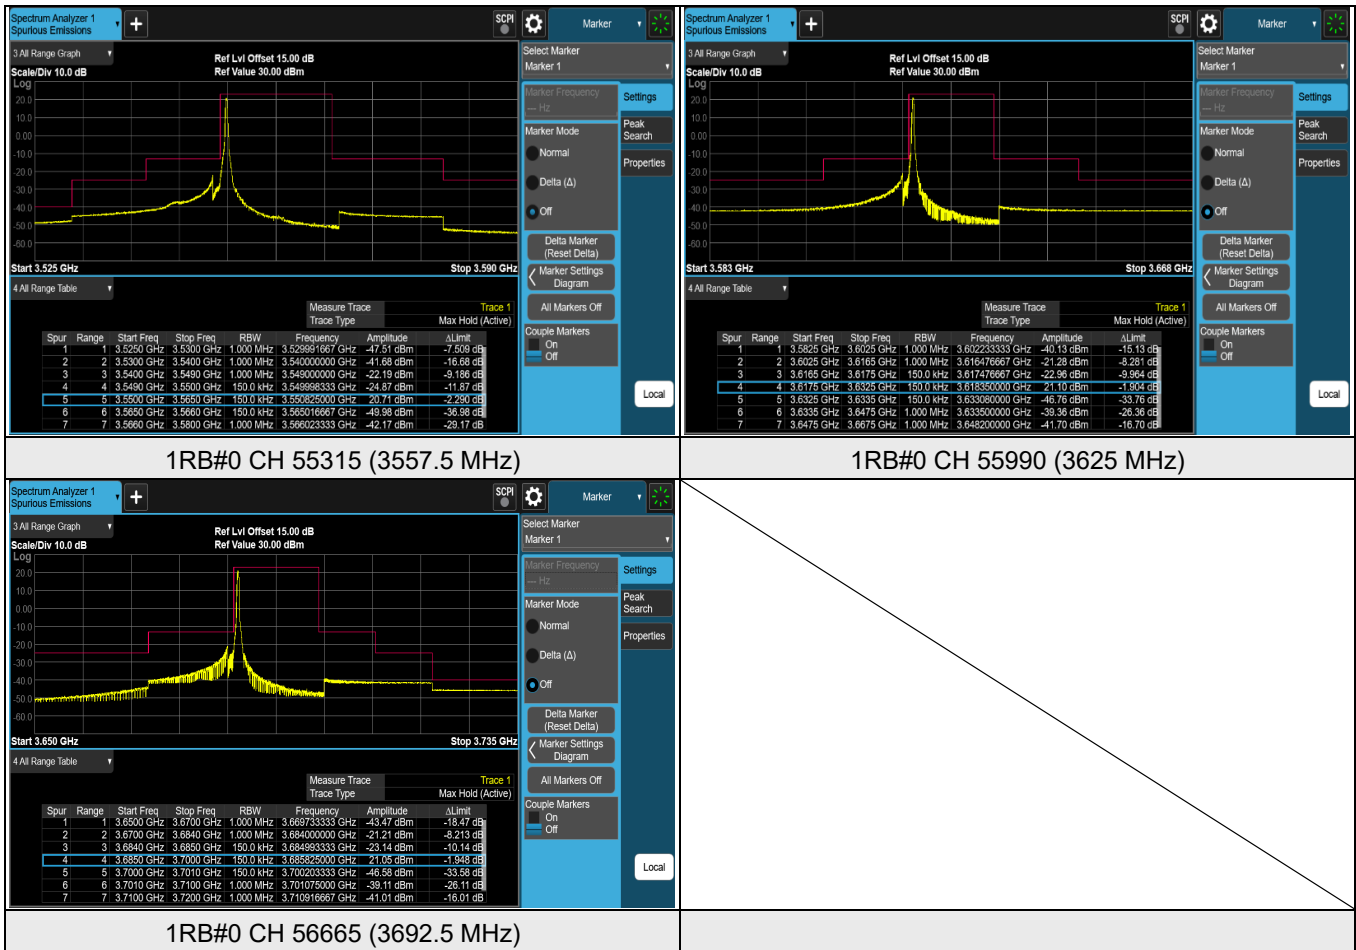

LTE Band 48, Channel Bandwidth: 20 MHz

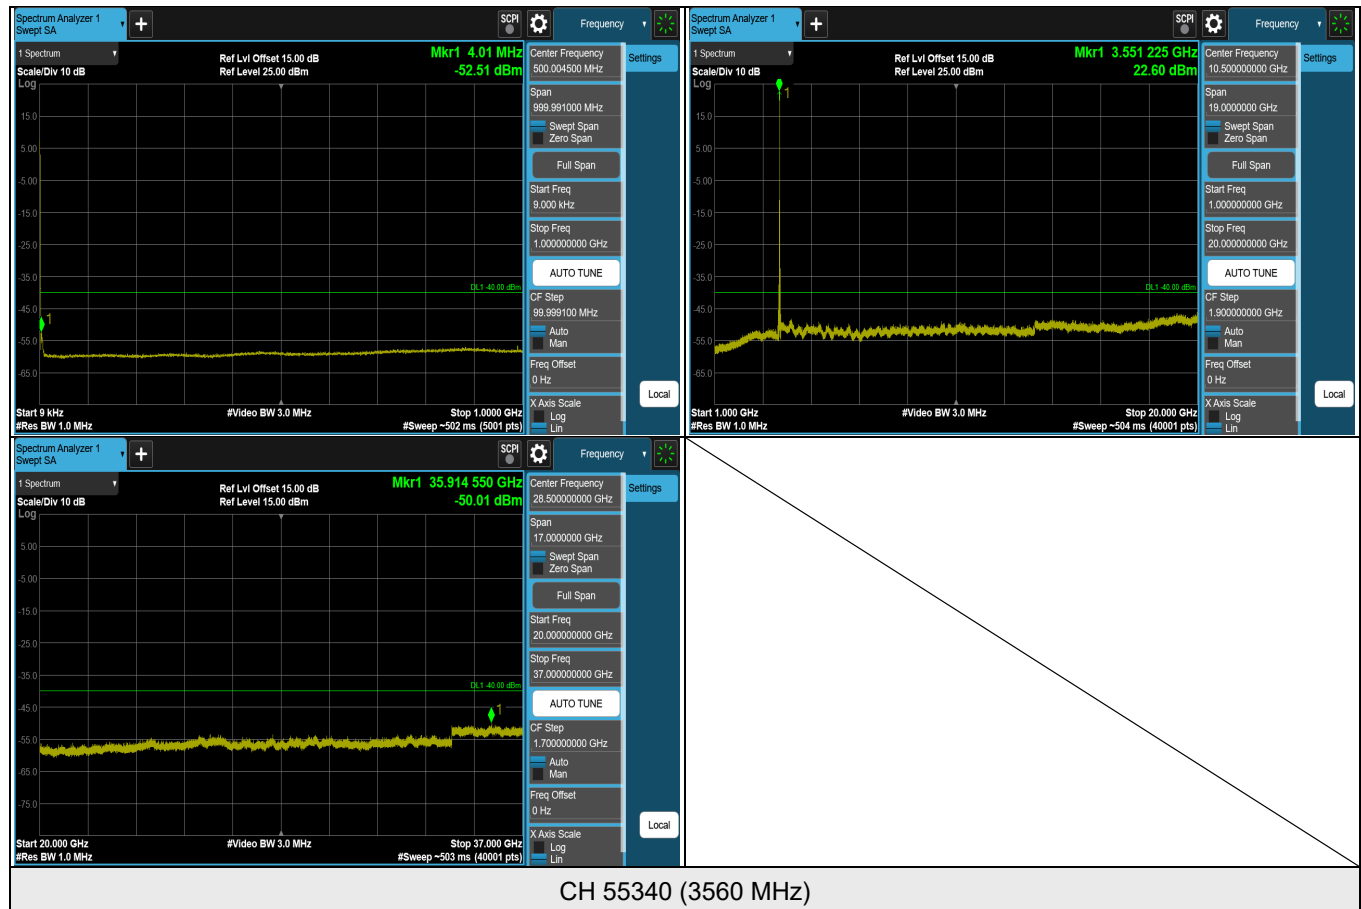


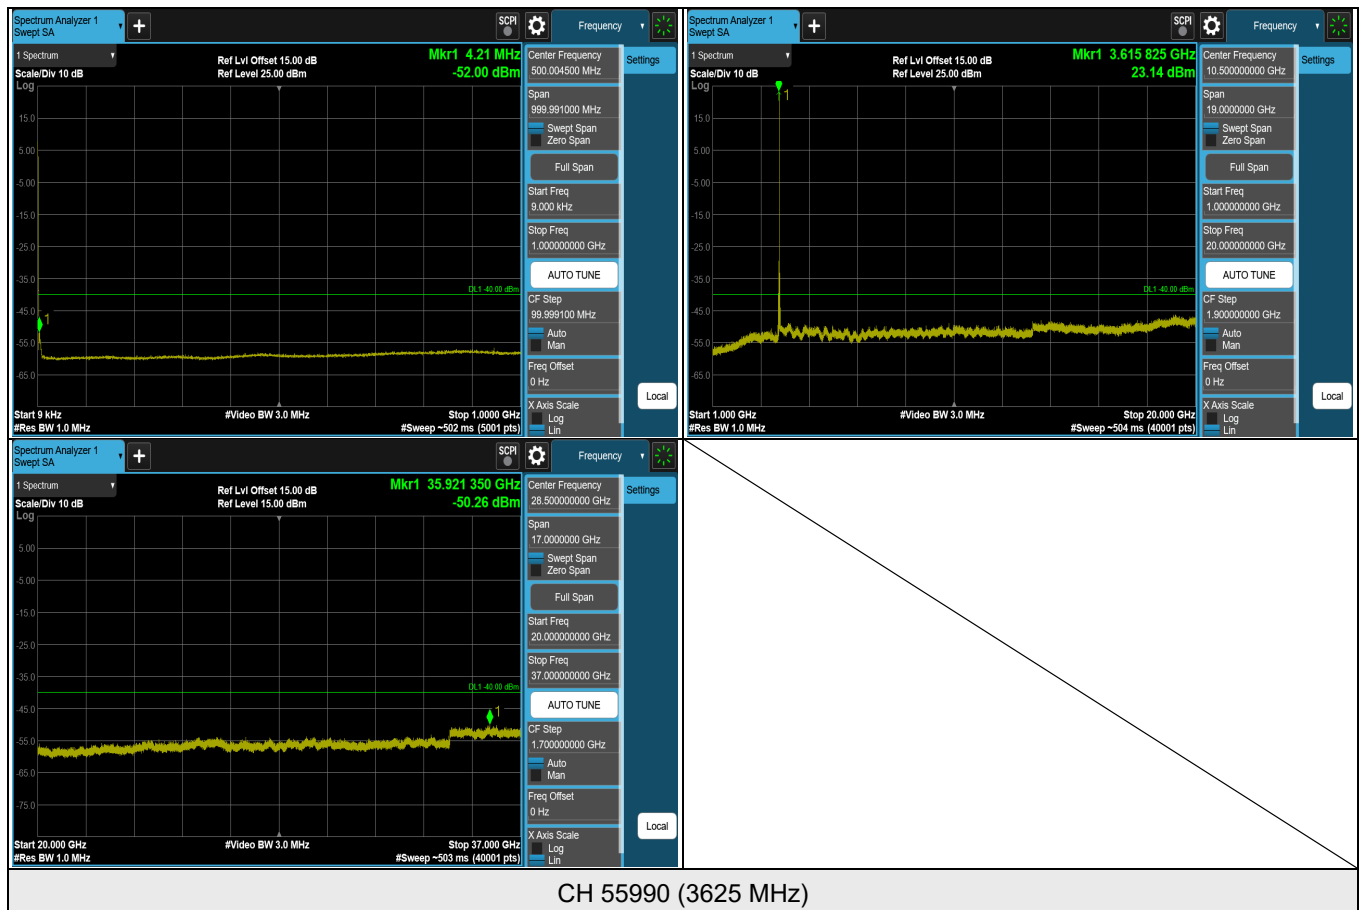


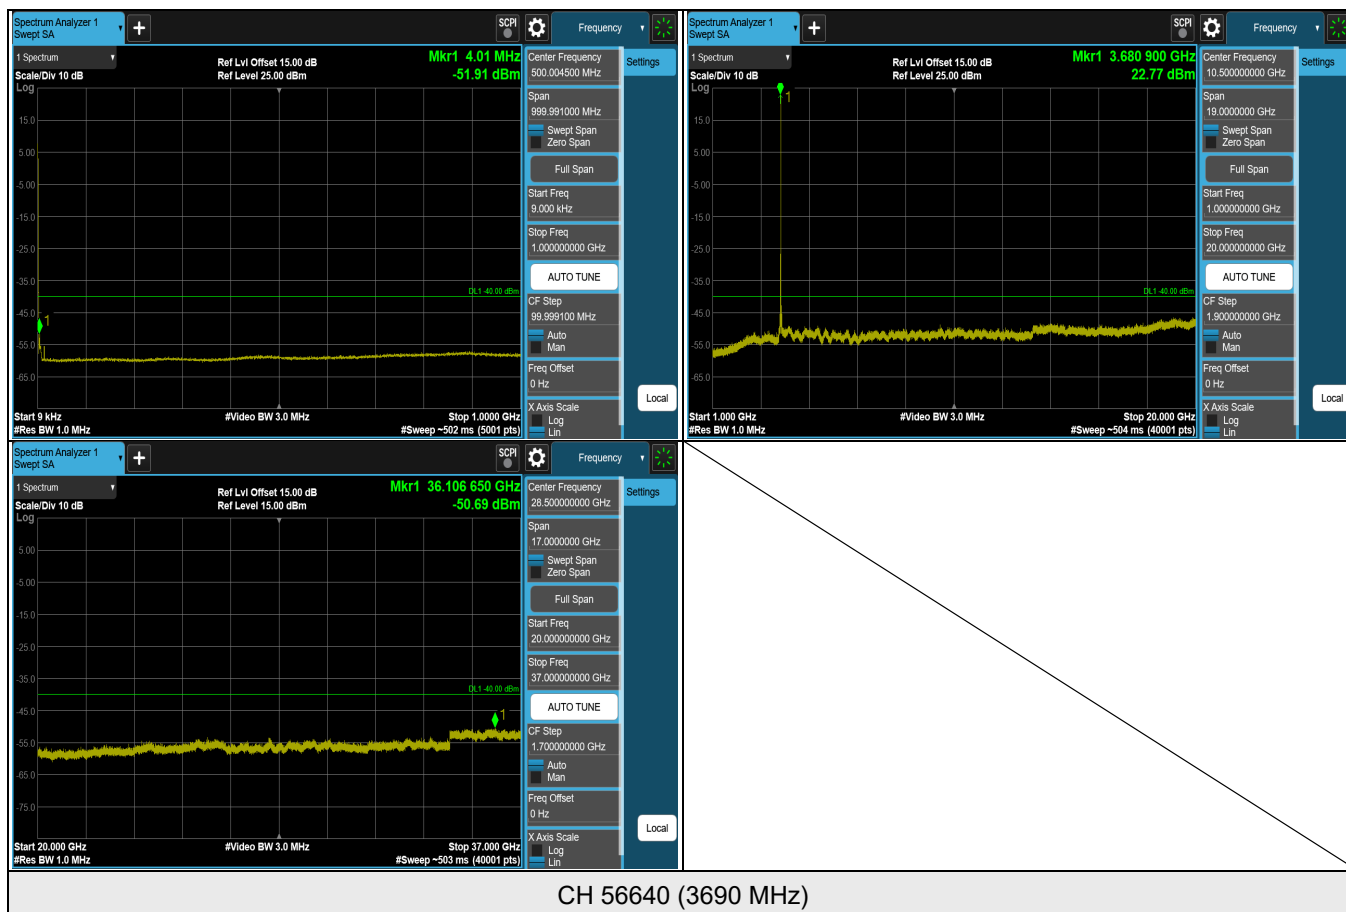


Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 48, Channel Bandwidth: 20 MHz

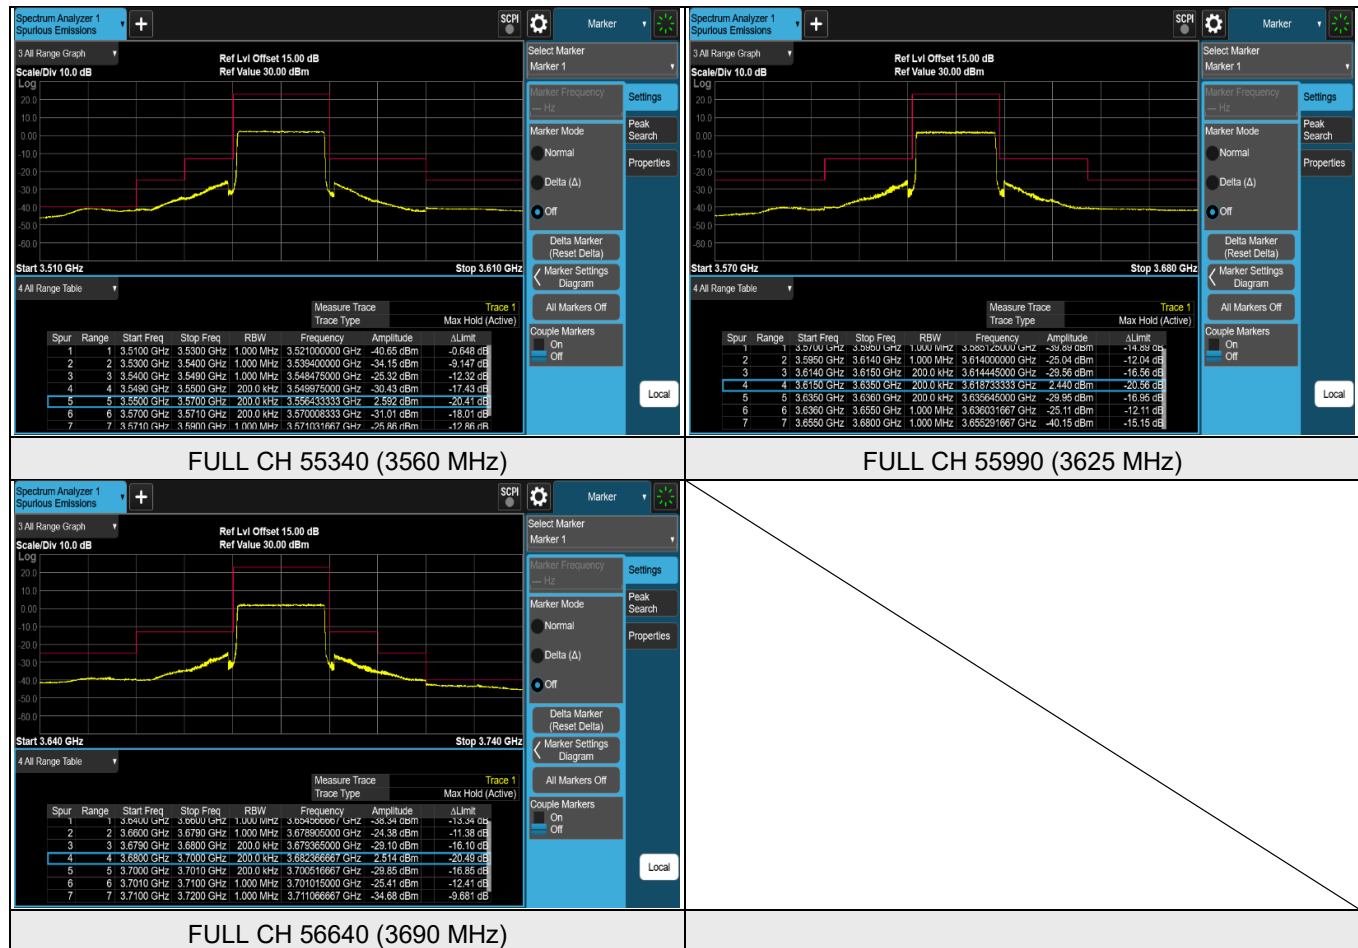

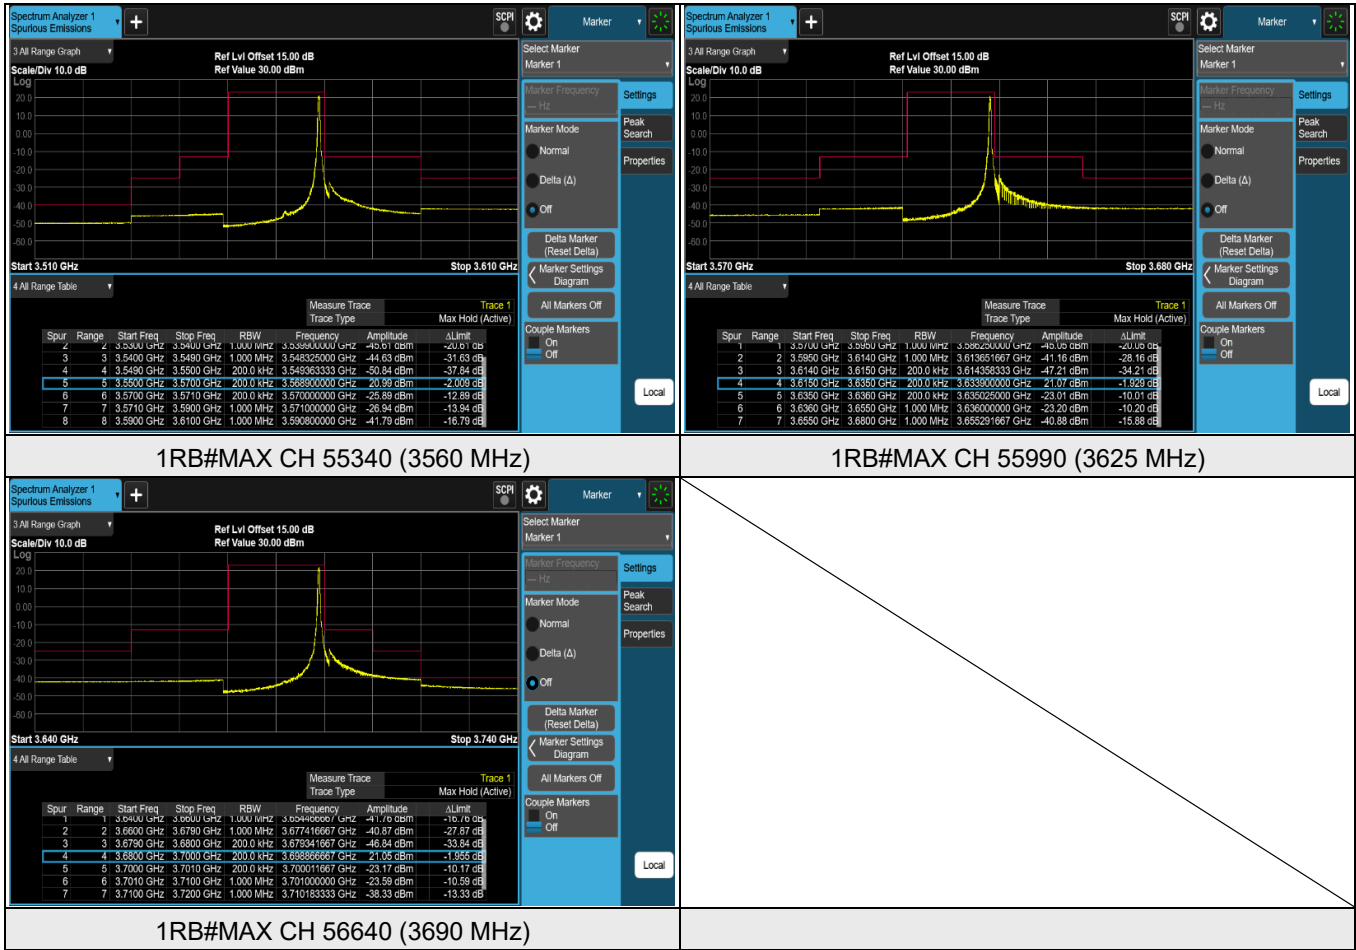

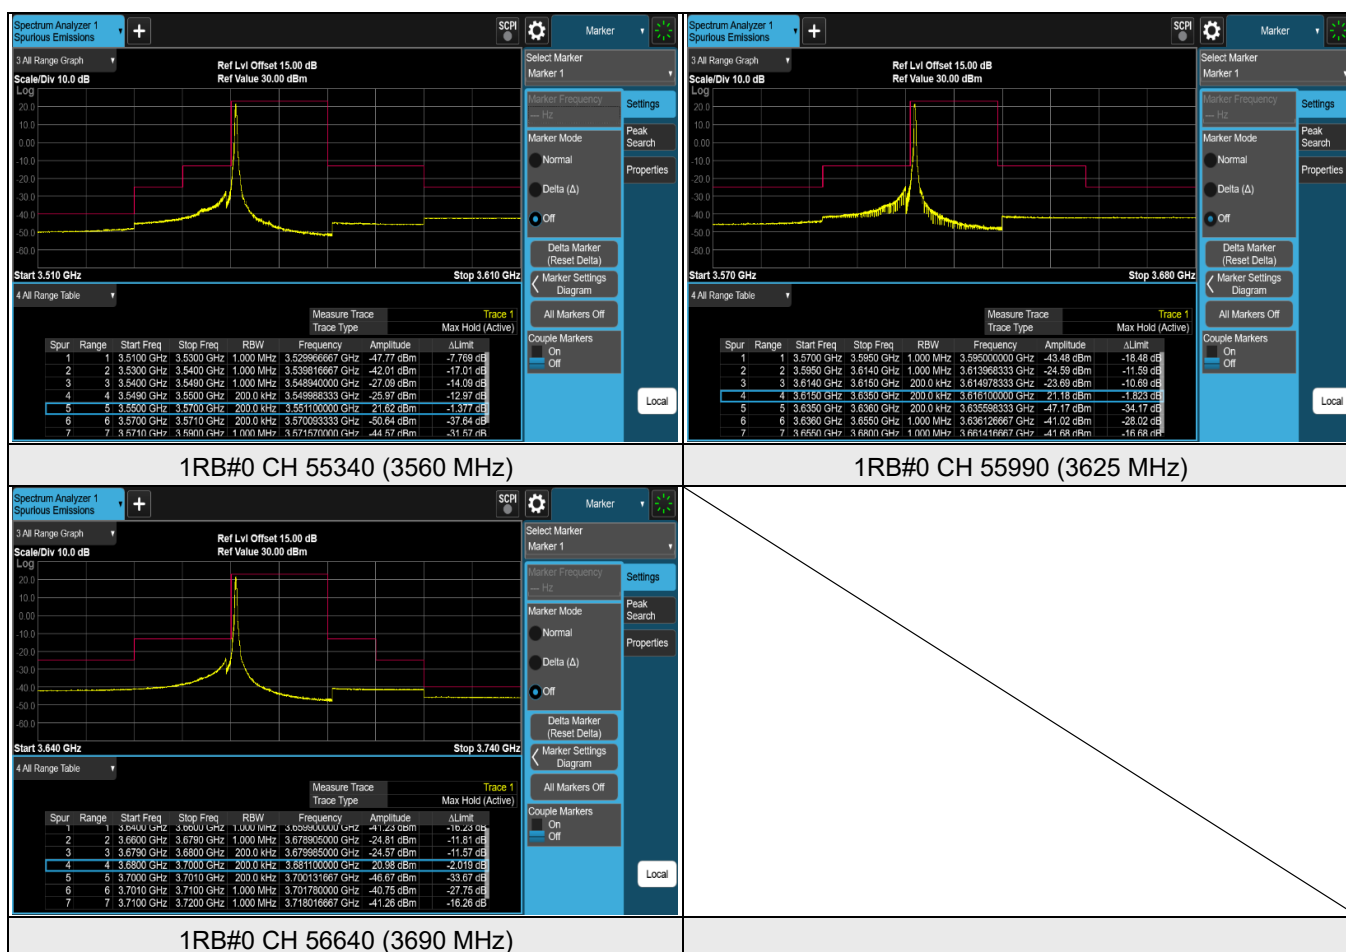

7.6 Radiated Spurious Emissions below 1GHz


7.6.1 LTE Band 48

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55990 : 3625 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	93.05	-50.01	-40.00	-10.01	2.00 H	139	63.11	-113.12
2	182.29	-43.69	-40.00	-3.69	1.00 H	76	65.78	-109.47
3	205.57	-42.89	-40.00	-2.89	2.50 H	144	67.89	-110.78
4	238.55	-43.72	-40.00	-3.72	1.00 H	73	65.46	-109.18
5	327.79	-49.30	-40.00	-9.30	1.00 H	124	56.75	-106.05
6	429.64	-54.85	-40.00	-14.85	2.00 H	84	48.56	-103.41

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

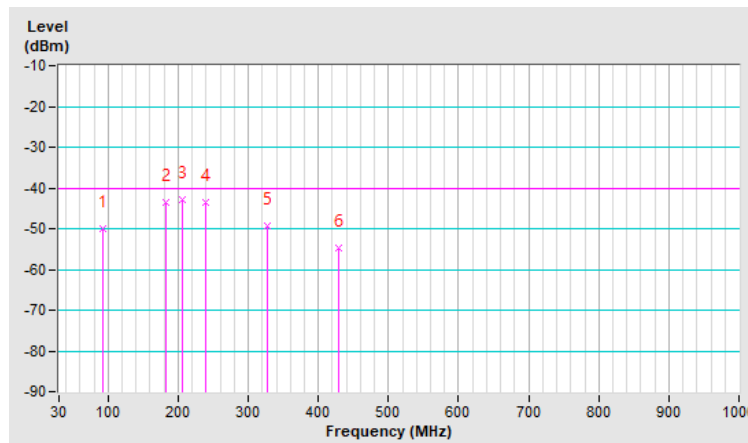


RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55990 : 3625 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.95	-48.00	-40.00	-8.00	1.00 V	103	60.53	-108.53
2	178.41	-41.59	-40.00	-1.59	1.00 V	123	67.36	-108.95
3	216.24	-42.83	-40.00	-2.83	1.50 V	143	67.86	-110.69
4	238.55	-41.97	-40.00	-1.97	1.00 V	130	67.21	-109.18
5	261.83	-44.23	-40.00	-4.23	1.00 V	110	64.04	-108.27
6	330.70	-52.42	-40.00	-12.42	1.50 V	100	53.59	-106.01

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

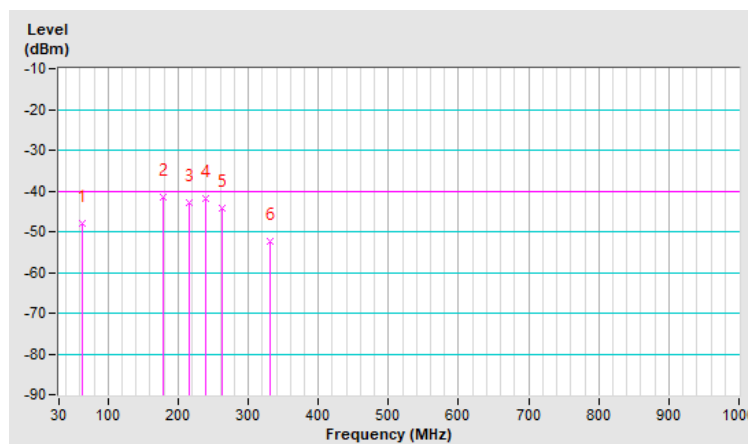

7.7 Radiated Spurious Emissions above 1GHz

7.7.1 LTE Band 48

RF Mode	LTE Band 48 Channel Bandwidth: 5MHz	Channel	CH 55265 : 3552.5 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7105.00	-42.55	-40.00	-2.55	2.50 H	231	42.40	-84.95
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7105.00	-41.68	-40.00	-1.68	2.34 V	6	43.27	-84.95

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 5MHz	Channel	CH 55990 : 3625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-41.99	-40.00	-1.99	1.21 H	65	42.88	-84.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-41.64	-40.00	-1.64	2.75 V	350	43.23	-84.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 5MHz	Channel	CH 56715 : 3697.5 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7395.00	-42.06	-40.00	-2.06	1.17 H	251	42.78	-84.84
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7395.00	-41.62	-40.00	-1.62	3.27 V	102	43.22	-84.84

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55340 : 3560 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7120.00	-42.18	-40.00	-2.18	3.73 H	27	42.75	-84.93
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7120.00	-41.56	-40.00	-1.56	3.06 V	35	43.37	-84.93

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55990 : 3625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-42.25	-40.00	-2.25	3.05 H	309	42.62	-84.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-41.54	-40.00	-1.54	1.34 V	44	43.33	-84.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 56640 : 3690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65% RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7380.00	-42.02	-40.00	-2.02	2.30 H	17	42.84	-84.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7380.00	-41.71	-40.00	-1.71	2.51 V	354	43.15	-84.86

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.8 Frequency Stability

Environmental Conditions:	25°C, 60% RH	Tested By:	Charles Hsiao
---------------------------	--------------	------------	---------------

7.8.1 LTE Band 48

LTE Band 48, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage					
Voltage (Vdc)	CH 55340 (3560 MHz)		CH 56640 (3690 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.23	3560.000009	0.0025	3690.00001	0.0028	Pass
3.80	3559.999998	-0.0006	3690.000001	0.0003	Pass
4.37	3560.000002	0.0006	3690.000001	0.0003	Pass

Note: The applicant defined the normal working voltage is from 3.23 to 4.37 Vdc.

Frequency Stability Versus Temperature					
Temperature (°C)	CH 55340 (3560 MHz)		CH 56640 (3690 MHz)		Test Result
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	3560.000004	0.0011	3690.000008	0.0022	Pass
-20	3560.000001	0.0003	3690.000002	0.0006	Pass
-10	3559.999996	-0.0011	3689.999992	-0.0022	Pass
0	3560.000001	0.0003	3689.999996	-0.0011	Pass
10	3559.999995	-0.0014	3689.999995	-0.0014	Pass
20	3559.999993	-0.002	3689.999993	-0.002	Pass
30	3559.999995	-0.0014	3689.999993	-0.002	Pass
40	3560.000006	0.0017	3690.000007	0.002	Pass
50	3559.999996	-0.0011	3689.999993	-0.002	Pass
60	3560.000001	0.0003	3690.000001	0.0003	Pass
70	3560.000009	0.0025	3690.000008	0.0022	Pass
80	3560.000007	0.002	3690.000005	0.0014	Pass
85	3559.999993	-0.002	3689.999992	-0.0022	Pass

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---