

TEST REPORT

Applicant Name: FN-LINK TECHNOLOGY LIMITED
Address: FCC:No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan, China
IC: No. 8, Litong Road, Liuyang Economic & AMP Technical Development Zone Changsha Hunan 410329 China (Peoples Republic Of)
Report Number: 2501A25853E-RFDA1
FCC ID: 2AATL-6252B-PR
IC: 12425A-6252BPR

Test Standard (s)

FCC PART 15.407; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247 ISSUE 4, JULY 2025

Sample Description

Product Type: WIFI BT module
Model No.: 6252B-PR
Multiple Model(s) No.: N/A
Trade Mark: FN-LINK
Date Received: 2026-01-19
Issue Date: 2026-07-16

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Allen Bai

Allen Bai
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked* is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
REQUIREMENTS AND TEST PROCEDURES	15
AC LINE CONDUCTED EMISSIONS	15
UNDESIRABLE EMISSION & RESTRICTED BANDS	18
EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	24
TRANSMITTER OUTPUT POWER	26
POWER SPECTRAL DENSITY	29
UNWANTED EMISSIONS INSIDE THE BAND 5150-5250 MHz	32
ADDITIONAL REQUIREMENTS	33
DUTY CYCLE	35
FREQUENCY STABILITY	36
ANTENNA REQUIREMENT	38
TEST DATA AND RESULTS	40
UNDESIRABLE EMISSION	40
26dB ATTENUATED BELOW THE CHANNEL POWER	573
EMISSION BANDWIDTH	581
MAXIMUM CONDUCTED OUTPUT POWER	591
UNWANTED EMISSIONS INSIDE THE BAND 5150-5250 MHz	599
DUTY CYCLE	607
RF EXPOSURE EVALUATION	610
EUT PHOTOGRAPHS	613
TEST SETUP PHOTOGRAPHS	614

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501A25853E-RFDA1	Original Report	2026-07-16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	6252B-PR
FVIN	v1.0
Frequency Range	5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz (5600-5650MHz is not used in Canada)
Mode	802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80
Maximum Conducted Average Output Power	5180-5240MHz: 20.99dBm [#] ; 5260-5320MHz: 20.85dBm [#] 5500-5700MHz: 20.29dBm [#] ; 5745-5825MHz: 21.23dBm [#] (from original)
Modulation Technique	OFDM, OFDMA
Antenna Specification[#]	5150-5250MHz: ANT0: 1.17dBi, ANT1: 2.40dBi 5250-5350MHz: ANT0: 1.22dBi, ANT1: 2.38dBi 5470-5725MHz: ANT0: 1.37dBi, ANT1: 2.53dBi 5725-5850MHz: ANT0: 1.43dBi, ANT1: 1.95dBi (provided by the applicant)
Voltage Range	DC 3.3V
Sample serial number	3FAN-1 for Radiated Emissions Test 3FAN-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 ISSUE 4, July 2025 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024[▼], RSS-Gen and RSS-247.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF Frequency		81.235Hz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Power Spectral Density		2.09dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
	18GHz - 40GHz	6.66dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/n20/ac20/ax20 mode: channel 36, 40, 48 were tested;

For 802.11n40/ac40/ax40 mode: channel 38, 46 were tested;

For 802.11ac80/ax80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a/n20/ac20/ax20 mode: channel 52, 60, 64 were tested;

For 802.11n40/ac40/ax40 mode: channel 54, 62 were tested;

For 802.11ac80/ax80 mode, channel 58 was tested.

For 5470-5725MHz Band, 18 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	120	5600
102	5510	122	5610
104	5520	124	5620
106	5530	126	5630
108	5540	128	5640
110	5550	132	5660
112	5560	134	5670
116	5580	136	5680
118	5590	140	5700

For 802.11a/n20/ac20/ax20 mode: channel 100, 120, 140 were tested;

For 802.11n40/ac40/ax40 mode: channel 102, 118, 134 were tested;

For 802.11ac80/ax80 mode, channel 106, 122 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/n20/ac20/ax20 mode: channel 149, 157, 165 were tested;

For 802.11n40/ac40/ax40 mode: channel 151, 159 were tested;

For 802.11ac80/ax80 mode, channel 155 was tested.

EUT Exercise Software

Exercise Software#	SecureCRT				
5150-5250 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level#	
				ANT 0	ANT 1
802.11a	Low	5180	6Mbps	20	20
	Middle	5200	6Mbps	20	20
	High	5240	6Mbps	20	20
802.11n ht20	Low	5180	MCS0	17	17
	Middle	5200	MCS0	17	17
	High	5240	MCS0	17	17
802.11n ht40	Low	5190	MCS0	17	17
	High	5230	MCS0	17	17
802.11ac VHT20	Low	5180	MCS0	17	17
	Middle	5200	MCS0	17	17
	High	5240	MCS0	17	17
802.11ac VHT40	Low	5190	MCS0	17	17
	High	5230	MCS0	17	17
802.11ac VHT80	Middle	5210	MCS0	17	17

5250-5350 MHz Band

Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level [#]	
				ANT 0	ANT 1
802.11a	Low	5260	6Mbps	20	20
	Middle	5300	6Mbps	20	20
	High	5320	6Mbps	20	20
802.11n ht20	Low	5260	MCS0	17	17
	Middle	5300	MCS0	17	17
	High	5320	MCS0	17	17
802.11n ht40	Low	5270	MCS0	17	17
	High	5310	MCS0	17	17
802.11ac VHT20	Low	5260	MCS0	17	17
	Middle	5300	MCS0	17	17
	High	5320	MCS0	17	17
802.11ac VHT40	Low	5270	MCS0	17	17
	High	5310	MCS0	17	17
802.11ax HE20	Middle	5290	MCS0	17	17

5470-5725 MHz Band

Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level [#]	
				ANT 0	ANT 1
802.11a	Low	5500	6Mbps	20	20
	Middle	5600	6Mbps	20	20
	High	5700	6Mbps	20	20
802.11n ht20	Low	5500	MCS0	20	20
	Middle	5600	MCS0	17	17
	High	5700	MCS0	17	17
802.11n ht40	Low	5510	MCS0	17	17
	Middle	5590	MCS0	17	17
	High	5670	MCS0	17	17
802.11ac VHT20	Low	5500	MCS0	17	17
	Middle	5600	MCS0	17	17
	High	5700	MCS0	17	17
802.11ac VHT40	Low	5510	MCS0	17	17
	Middle	5590	MCS0	17	17
	High	5670	MCS0	17	17
802.11ac VHT80	Low	5530	MCS0	17	17
	High	5610	MCS0	17	17

5725-5850 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level [#]	
				ANT 0	ANT 1
802.11a	Low	5745	6Mbps	20	20
	Middle	5785	6Mbps	20	20
	High	5825	6Mbps	20	20
802.11n ht20	Low	5745	MCS0	17	17
	Middle	5785	MCS0	17	17
	High	5825	MCS0	17	17
802.11n ht40	Low	5755	MCS0	17	17
	High	5795	MCS0	17	17
802.11ac VHT20	Low	5745	MCS0	17	17
	Middle	5785	MCS0	17	17
	High	5825	MCS0	17	17
802.11ac VHT40	Low	5755	MCS0	17	17
	High	5795	MCS0	17	17
802.11ac VHT80	Middle	5775	MCS0	17	17

Note: 1. The worst-case data rates are determined to be as above for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.

2. The device supports SISO for all modes and MIMO 2T2R in 802.11/n/ac/ax modes, per pretest, 2T2R mode was the worst mode and reported.

3. For 802.11 ax modes, the device not support partial RU mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OUPU	Receptacle	PDU-OP1606K	6971041358020
DELL	PC	Latitude E6410	HRYGPM1
OLEAD	Adapter	OLD120200ACN4DC	Unknown
Unknown	Test board	3702_RK3588_V1.1	Unknown
Unknown	Power adapter board	3702_IO_V1.1	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC cable	1.2	Receptacle	AC Mains
Unshielded Detachable type-C cable	1.0	Adapter	Power adapter board
Unshielded Un-detachable DC cable	0.2	Power adapter board	Test board
Unshielded Un-detachable DC cable	1.5	Adapter	Test board

Block Diagram of Test Setup

For Radiated Emissions below 1GHz:

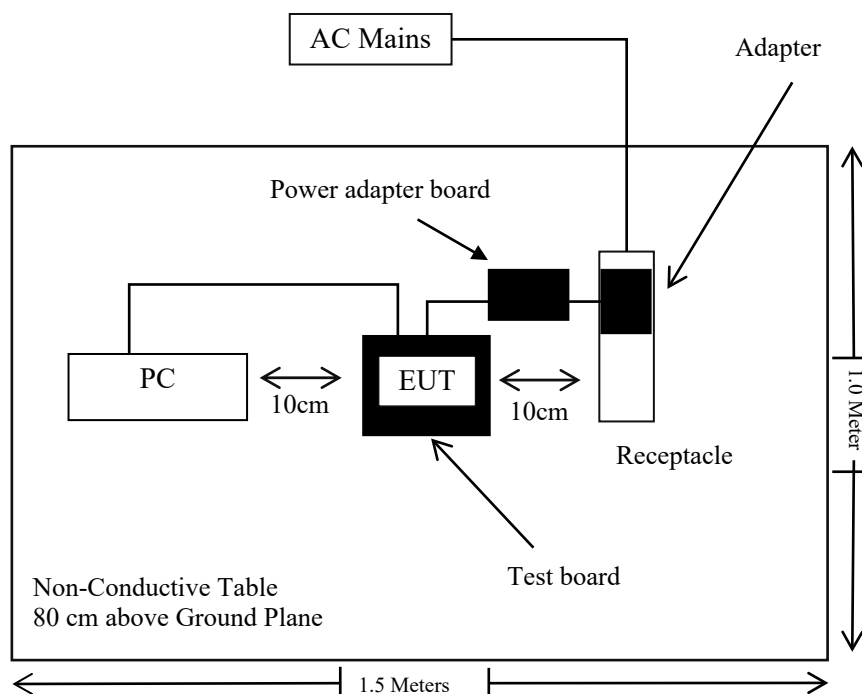

For Radiated Emissions above 1GHz:

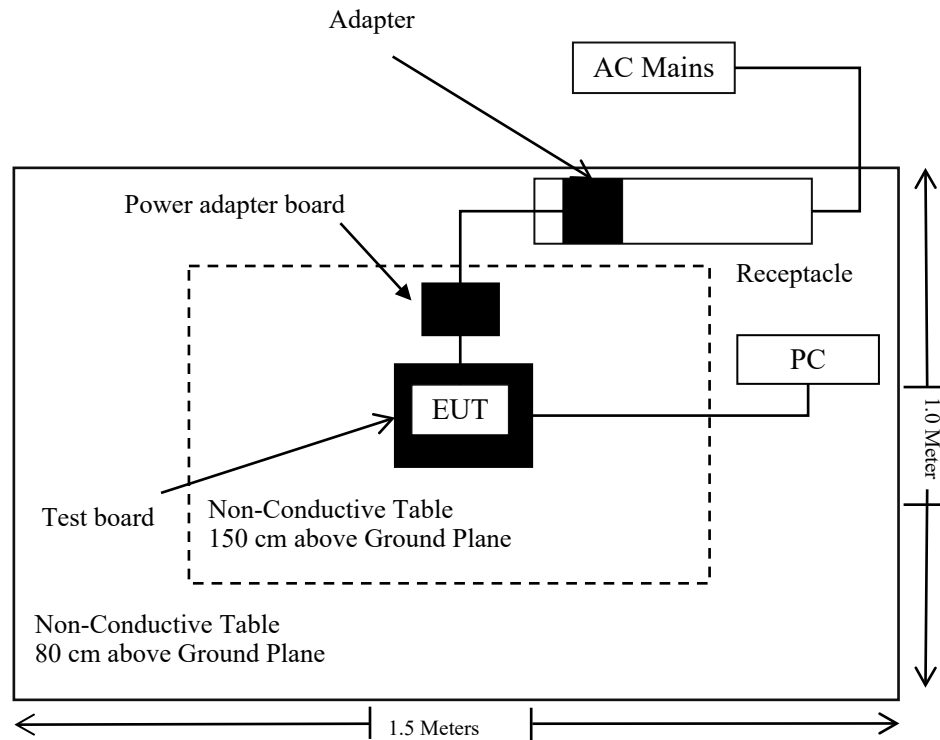

SUMMARY OF TEST RESULTS

Test Rules	Test Rules	Description of Test	Result	Remark
FCC §1.1310 & §2.1091	/	Maximum Permissible Exposure (MPE)	Compliant	-
/	RSS-102 § 6.6	Field reference level exposure exemption limits	Compliant	-
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant	-
FCC §15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	-	See Note
FCC §15.205& §15.209 & §15.407(b)	RSS-Gen §8.10& RSS-247§7.3	Undesirable Emission& Restricted Bands	Compliant	-
FCC §15.407(a) (e)	RSS- Gen§6.7, RSS-247 §7.3	Emission Bandwidth	Only Reporting	-
		99% Occupied Bandwidth	-	See Note
FCC §15.407(a)	RSS-247 §7.3	Conducted Transmitter Output Power	Only Reporting	-
FCC §15.407 (a)	RSS-247 §7.3	Power Spectral Density	-	See Note
FCC §15.407 (h)	RSS-247 §7.3	Transmit Power Control (TPC)	Not Applicable	-
FCC §15.407 (h)	RSS-247 §7.3.6	Dynamic Frequency Selection (DFS)	Compliant	See Note
/	RSS-247 §7.3.7	Additional requirement	Compliant	-
/	RSS-247 §§7.3.2.3.b	Unwanted emissions inside the band 5150-5250 MHz	Compliant	-
C63.10 §12.2	C63.10 §12.2	Duty Cycle	Only Reporting	-
/	RSS-Gen clause 6.11	Frequency Stability	-	See Note

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 23.23 dBm ≤ 27dBm (500mW).

Note:

1. This is a CIIPC application for FCC ID: 2AATL-6252B-PR granted on 05/24/2023 and IC: 12425A-6252BPR granted on 05/31/2023, the below changes was provided by the manufacturer:

(1) Changing the antenna.

(2) Upgrading the standard version to “RSS-247 ISSUE 4, JULY 2025”.

Based on the above difference, it will affected test data” Radiated Emissions” and add “26dB attenuated below the channel power” test, so the changed items were performed. We also updated related EUT photos in the report.

2. For a 5.2G EIRP PSD, according to the original report, the maximum PSD is -20.15dBm/MHz. The maximum EIRP PSD = -20.15 + 2.40 = -17.75 < 10dBm/MHz, so it can meets the ISED EIRP limit. The other test data and photos please refer to the report: E01A23040641F00101.

3. The BACL (SZ) is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2025/09/01	2026/08/31
JD	JD Auto Test software	NA	1.0.0.3769	NCR	NCR
ANRITSU	Microwave peak power sensor	MA24418A	12622	2025/09/01	2026/08/31
Unknown	10dB Attenuator	Unknown	F-03-EM224	2025/06/26	2026/06/25
Unknown	10dB Attenuator	Unknown	F-03-EM224	2026/06/24	2027/06/23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC §15.207 & RSS-Gen §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

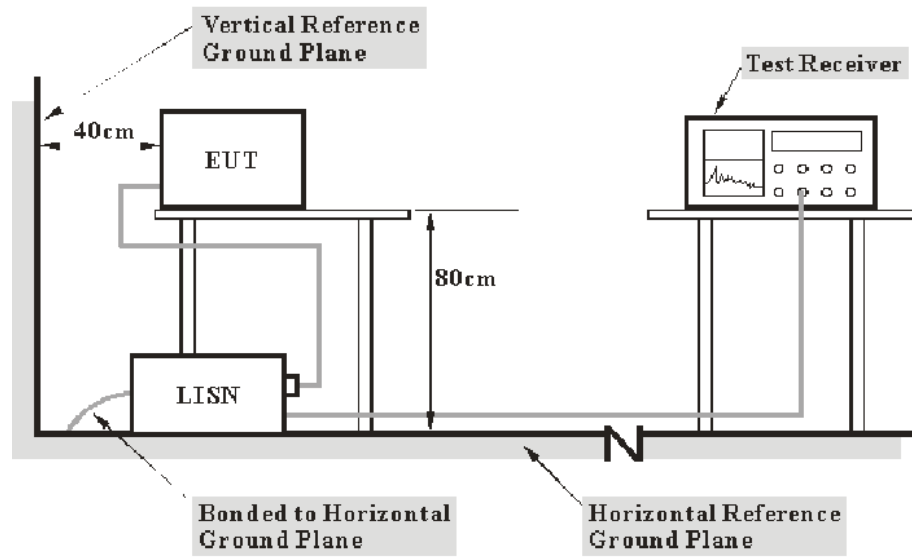

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN; the other related equipments were connected to the other LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission & Restricted Bands

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to RSS-247§7.3

Frequency band 5150-5250 MHz

7.3.1.3 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz:

- a. all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density;
- b. any unwanted emissions that falls between the upper edge of the 26 dB bandwidth and 5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth.
- c. if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing DFS (see section 7.3.6) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

7.3.2.3 Unwanted emission limits

Devices shall comply with the following:

- a. all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz peak e.i.r.p spectral density.
- b. all emissions inside the band 5150-5250 MHz shall either:
 - i. not exceed -27 dBm/MHz peak e.i.r.p spectral density, or
 - ii. comply with the power spectral density for operation in section 7.3.1.2.

Frequency band 5470-5725 MHz

7.3.3.3 Unwanted emission limits

Equipment operating in the bands 5470-5725 MHz shall comply with the following unwanted emission limits:

- for devices with fundamental emissions fully contained within the 5470-5725 MHz band, all unwanted emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density.
- for devices with bandwidth overlapping the band edge of 5725 MHz, all unwanted emissions shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

7.3.4.4 Unwanted emission limits

Equipment operating in the band 5725-5850 MHz shall comply with the following peak e.i.r.p. spectral density limits:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

According to RSS-Gen §8.10

Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- The transmit frequency, including fundamental components of modulation, of license-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287.
- Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.


Table 5 – General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength (µV/m at 3 m)	
30 – 88	100	
88 – 216	150	
216 – 960	200	
Above 960	500	

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.


EUT Setup

9 kHz-30MHz:

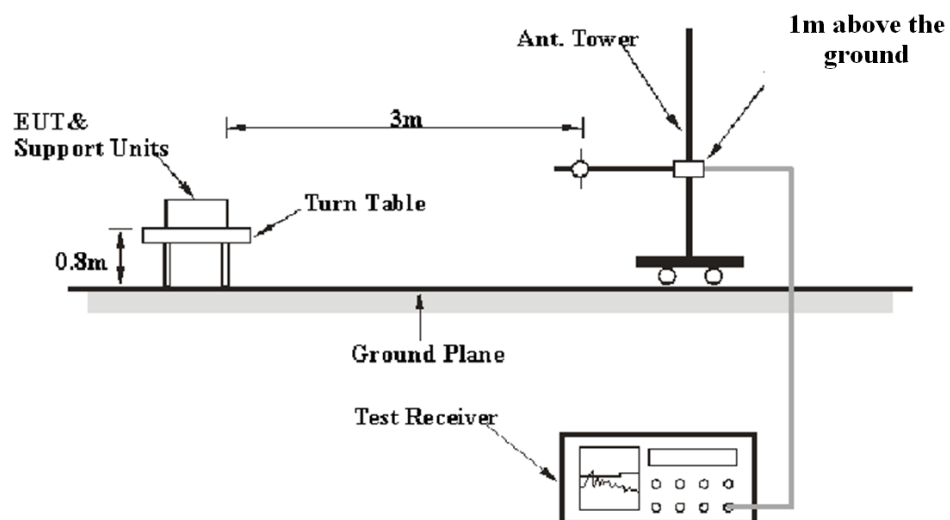


30MHz-1GHz:

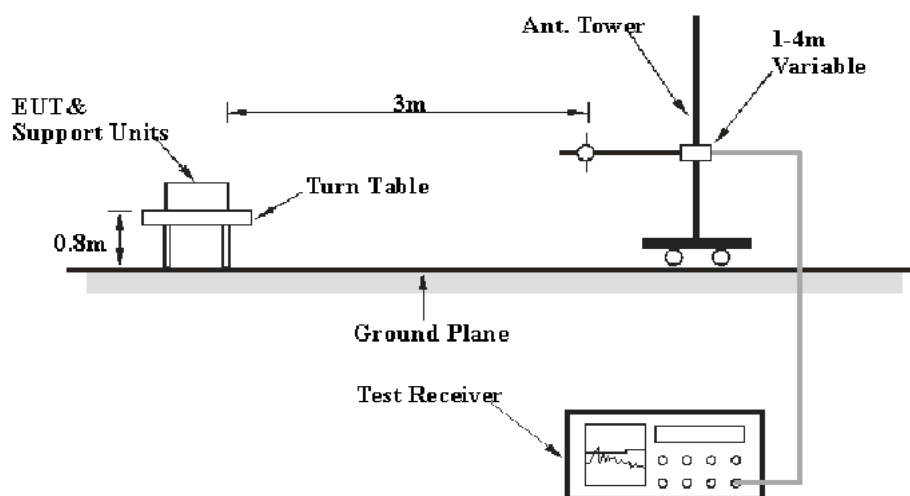

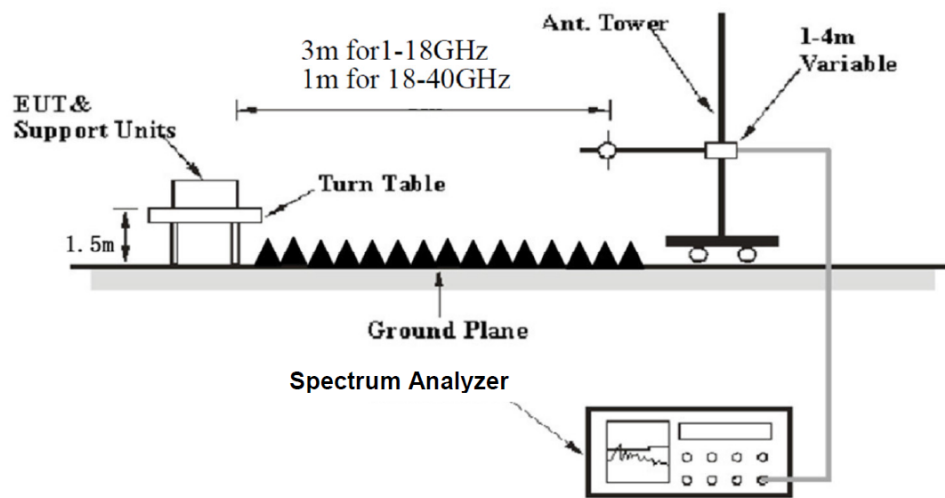Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209, FCC 15.407, RSS-247 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

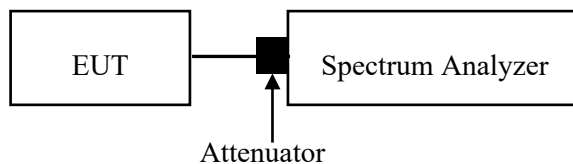Unwanted emissions fall into the band 5250-5350 MHz:**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	120 kHz	500 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	>1/Ton, not less than 1kHz	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	$\geq 1/\text{Ton}$	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Unwanted emissions fall into the band 5250-5350 MHz:

Frequency Range	RBW	Video B/W	Measurement
5250-5350 MHz	(1%-5%)* 99% Bandwidth	$\geq 3 \cdot \text{RBW}$	Average

Note: The limit was calculated by attenuated below the channel power by at least 26 dB per RSS-247 §7.3.1.3

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

According to FCC §15.407(a) (13), the maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

According to FCC §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

According to RSS-GEN § 6.7 & RSS-247 §7.3.

7.3.4.2 For equipment operating in the band 5725-5850 MHz, the 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

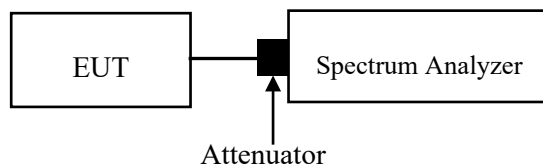

Transmitter Output Power

Applicable Standard

According to FCC §15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §7.3:

Frequency band 5150-5250 MHz

7.3.1.2 For all other devices the maximum e.i.r.p. spectral density shall not exceed 10 dBm/MHz. The maximum e.i.r.p. shall not exceed the lesser of:

- a. 200 mW; or
- b. $10 + 10 \log_{10} B$, dBm.

Frequency band 5250-5350 MHz

7.3.2.2 All other devices shall comply with the following:

- a. the maximum power spectral density shall not exceed 11 dBm/MHz and the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- c. Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W

Frequency band 5470-5725MHz

7.3.3.2 Equipment operating in the band 5470-5725 MHz shall comply with the following power limits:

- a. the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum power spectral density shall not exceed 11 dBm/MHz.
- c. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- d. equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

7.3.4.3 Equipment operating in the band 5725-5850 MHz shall comply with the following power limits:

- a. the maximum conducted output power shall not exceed 1 W; and
- b. the maximum output power spectral density shall not exceed 30 dBm/500 kHz.


When using transmitting antennas with a directional gain exceeding 6 dBi, the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, FFTP devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter maximum conducted output power and the power spectral density. FFTP operations exclude the use of PTMP systems, omnidirectional applications and multiple collocated transmitters transmitting the same information. However, remote stations of PTMP systems shall be permitted to operate at e.i.r.p. greater than 4 W under the same conditions as for FFTP systems.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

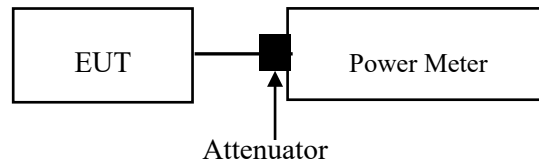

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Power Spectral Density

According to FCC §15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §7.3:

Frequency band 5150-5250 MHz

7.3.1.2 For all other devices the maximum e.i.r.p. spectral density shall not exceed 10 dBm/MHz. The maximum e.i.r.p. shall not exceed the lesser of:

- a. 200 mW; or
- b. $10 + 10 \log_{10} B$, dBm.

Frequency band 5250-5350 MHz

7.3.2.2 All other devices shall comply with the following:

- a. the maximum power spectral density shall not exceed 11 dBm/MHz and the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- c. Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W

Frequency band 5470-5725MHz

7.3.3.2 Equipment operating in the band 5470-5725 MHz shall comply with the following power limits:

- a. the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum power spectral density shall not exceed 11 dBm/MHz.
- c. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- d. equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

7.3.4.3 Equipment operating in the band 5725-5850 MHz shall comply with the following power limits:


- a. the maximum conducted output power shall not exceed 1 W; and
- b. the maximum output power spectral density shall not exceed 30 dBm/500 kHz.

When using transmitting antennas with a directional gain exceeding 6 dBi, the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, FFTP devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter maximum conducted output power and the power spectral density. FFTP operations exclude the use of PTMP systems, omnidirectional applications and multiple collocated transmitters transmitting the same information. However, remote stations of PTMP systems shall be permitted to operate at e.i.r.p. greater than 4 W under the same conditions as for FFTP systems.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

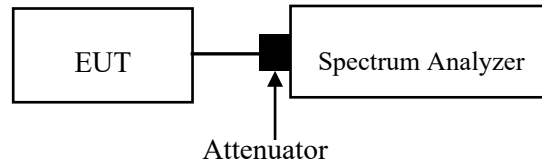

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Unwanted emissions inside the band 5150-5250 MHz**Applicable Standard****Frequency band 5250-5350 MHz**


RSS-247 §7.3.2.3.b, devices shall comply with the following:

All emissions inside the band 5150-5250 MHz shall either:

- i. not exceed -27 dBm/MHz peak e.i.r.p spectral density, or
- ii. comply with the power spectral density for operation in section 7.3.1.2.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

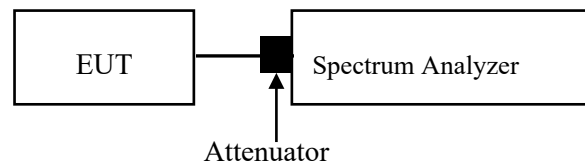

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset = Attenuator (10dB) + Cable loss (0.5dB) + Antenna Gain + Duty Cycle factor

Additional Requirements

Applicable Standard

According to RSS-247 Clause 7.3.7 Additional requirement

The following requirements shall apply:

- a. the device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b. all LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c. the user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i. any devices capable of operating in the band 5150–5250 MHz shall only be used indoors to reduce the potential for harmful interference to co-channel mobile satellite systems (this requirement does not apply to OEM devices installed in vehicles by vehicle manufacturers);
 - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 7.3.2.4 or 7.3.5.3 shall be clearly indicated.

Result**Pass**

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operation failure. In addition, when the device recognizes that it is in an outdoor environment, it must automatically terminate transmission in the 5150-5250 MHz frequency band. Please refer to declaration.

RSS-247 Clause 7.3.7 b):

The device must contain security features to protect against modification of software by unauthorized parties. Please refer to declaration.

RSS-247 Clause 7.3.7 c):

1. Compliant, please refer to the User Manual.
2. Compliant. The maximum antenna gain allowed by the equipment in the frequency bands 5250-5350 MHz and 5470-5725 MHz still complies with the e.i.r.p. limit.
3. Compliant. The maximum antenna gain allowed by the equipment in the frequency bands 5725-5850 MHz still complies with the e.i.r.p. limit.
4. Compliant, please refer to the antenna information and output power section.


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

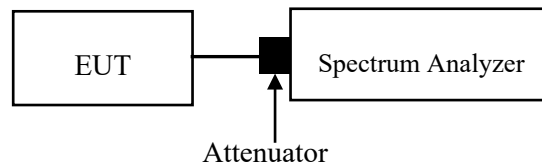

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Frequency Stability

Applicable Standard

According to RSS-GEN Clause 6.11

Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

When the measurement method of transmitter frequency stability is not stated in the applicable RSS or reference standards, the following conditions apply:

- a. The reference temperature for radio transmitters is +20°C (+68°F).
- b. A hand-held device that is only capable of operating using internal batteries shall be tested at the battery's nominal voltage, and again at the battery's operating end-point voltage, which shall be specified by the equipment manufacturer. For this test, either a battery or an external power supply can be used.
- c. The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environmental test chamber, the unmodulated carrier frequency and frequency stability shall be measured under the conditions specified below for licensed and licence-exempt devices, unless specified otherwise in the applicable RSS. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement.

For licensed devices, the following measurement conditions apply:

- a. at the temperatures of -30°C (-22°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

For licence-exempt devices, the following conditions apply:


- a. at the temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

If the frequency stability limits are only met within a temperature range that is smaller than the range specified in (a) for licensed or licence-exempt devices, the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

If the device contains both licence and licence-exempt transmitter modules, the device's frequency stability shall be measured under the most stringent condition specified in the applicable RSS of the transmitter module.

In addition, if an unmodulated carrier is not available, the method used to measure frequency stability shall be described in the test report.

Test Procedure

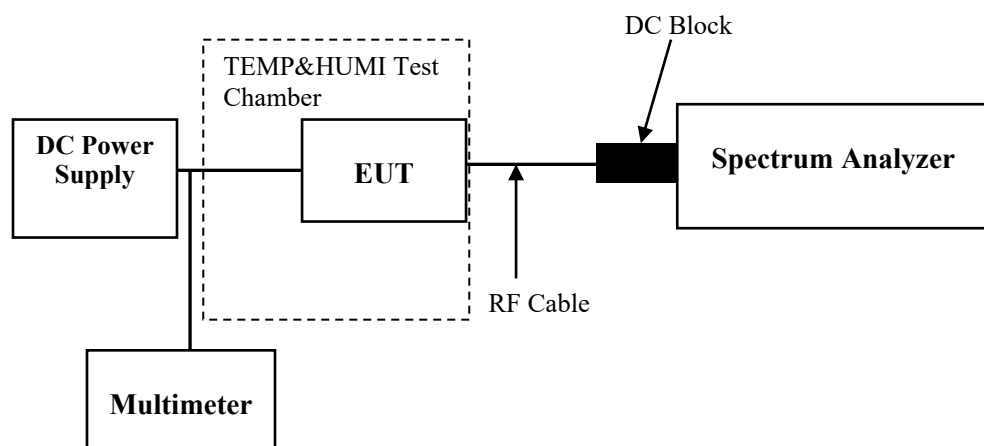

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antenna arrangements for 5G Wi-Fi which were permanently attached. Please refer to the EUT photos.

Antenna	Type	Antenna Gain [#]	Impedance	Frequency Range
ANT 0	FPC	1.17dBi	50Ω	5150-5250MHz
ANT 1	FPC	2.40dBi	50Ω	
ANT 0	FPC	1.22dBi	50Ω	5250-5350MHz
ANT 1	FPC	2.38dBi	50Ω	
ANT 0	FPC	1.37dBi	50Ω	5470-5725MHz
ANT 1	FPC	2.53dBi	50Ω	
ANT 0	FPC	1.43dBi	50Ω	5725-5850MHz
ANT 1	FPC	1.95dBi	50Ω	

Result: Compliant


TEST DATA AND RESULTS

Undesirable Emission

Temperature (°C)	23.3-24.3	Relative Humidity (%)	44-50
ATM Pressure (kPa):	101.2-101.5	Test engineer:	Nico Wu & Zenos Qiao
Test date:	2026.02.04-2026.04.23		
EUT operation mode:	Below 1GHz: Transmitting Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, after pre-scan in the ground-parallel, perpendicular and parallel of orientation, the worst case parallel of orientation were recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded. 4. The spurious emission from 9 kHz-30MHz of IC RSS-GEN standard, the unit of final result on the test plots are dBμV/m, so the limit should be added by 51,5 dB from dBμA/m to dBμV/m.		

Below 1GHz:**5150-5250 MHz** (Maximum output power mode, 802.11ax40 5190MHz)


9kHz-150kHz

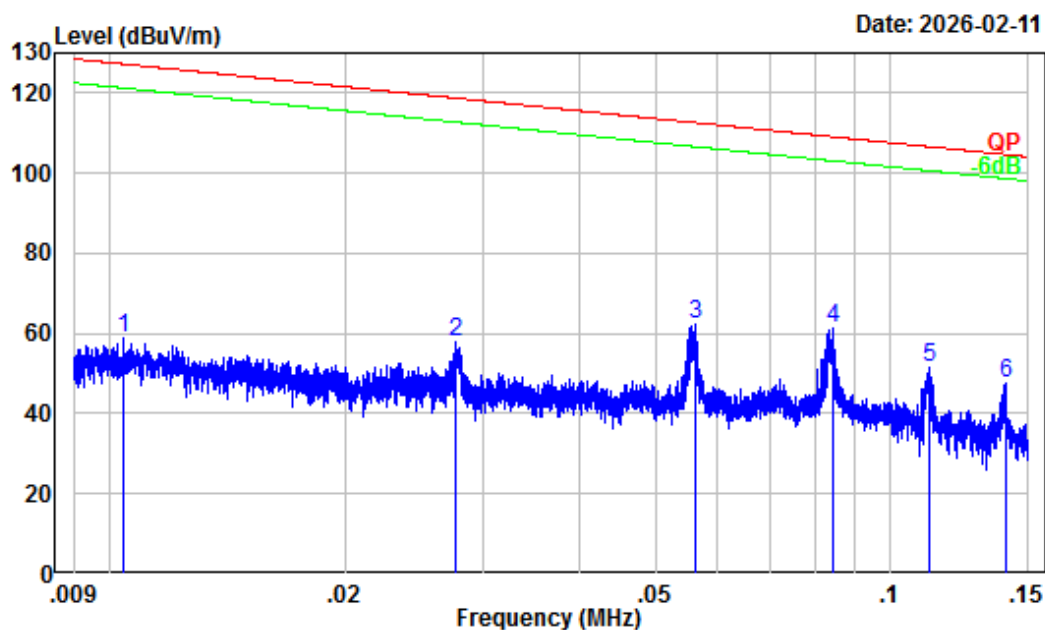

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.22	26.87	59.09	127.25	-68.16	Peak
2	0.028	28.92	28.84	57.76	118.73	-60.97	Peak
3	0.056	25.78	36.64	62.42	112.61	-50.19	Peak
4	0.084	23.10	38.38	61.48	109.09	-47.61	Peak
5	0.112	21.29	30.30	51.59	106.61	-55.02	Peak
6	0.141	19.60	27.76	47.36	104.64	-57.28	Peak


150kHz-30MHz

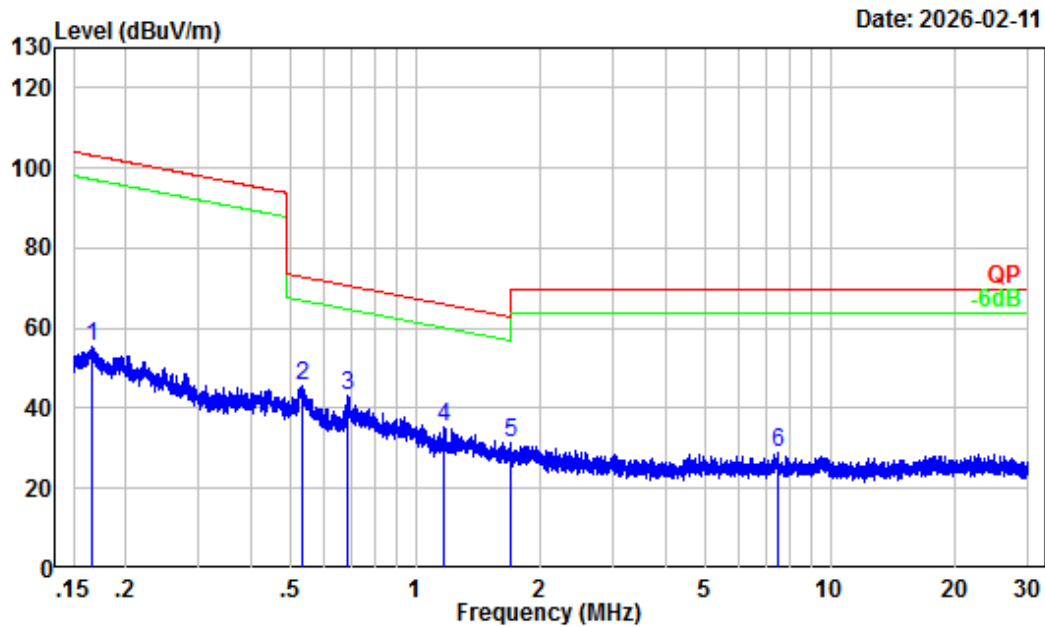

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.165	18.14	37.08	55.22	103.23	-48.01	Peak
2	0.533	5.99	39.51	45.50	73.06	-27.56	Peak
3	0.689	4.06	38.89	42.95	70.77	-27.82	Peak
4	1.173	0.71	34.47	35.18	66.05	-30.87	Peak
5	1.703	-0.77	32.21	31.44	62.75	-31.31	Peak
6	7.446	-2.97	31.70	28.73	69.54	-40.81	Peak


30MHz-1GHz_Horizontal

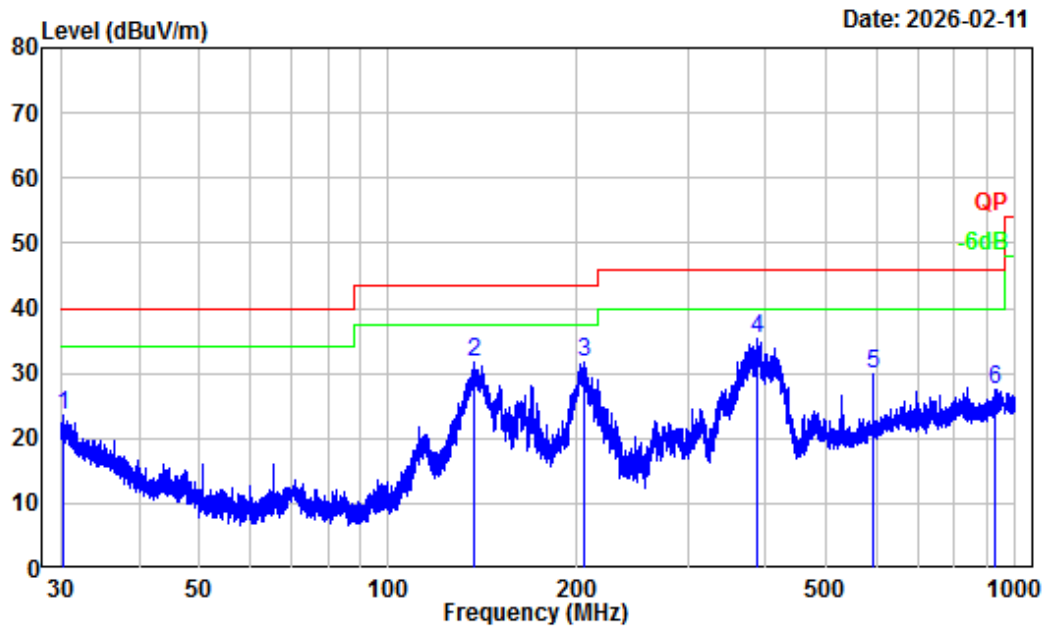

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.30	-6.02	29.68	23.66	40.00	-16.34	Peak
2	137.42	-11.99	43.79	31.80	43.50	-11.70	Peak
3	204.69	-13.72	45.55	31.83	43.50	-11.67	Peak
4	387.48	-9.46	44.69	35.23	46.00	-10.77	Peak
5	594.09	-5.80	35.54	29.74	46.00	-16.26	Peak
6	925.35	-1.62	29.16	27.54	46.00	-18.46	Peak

30MHz-1GHz_Vertical

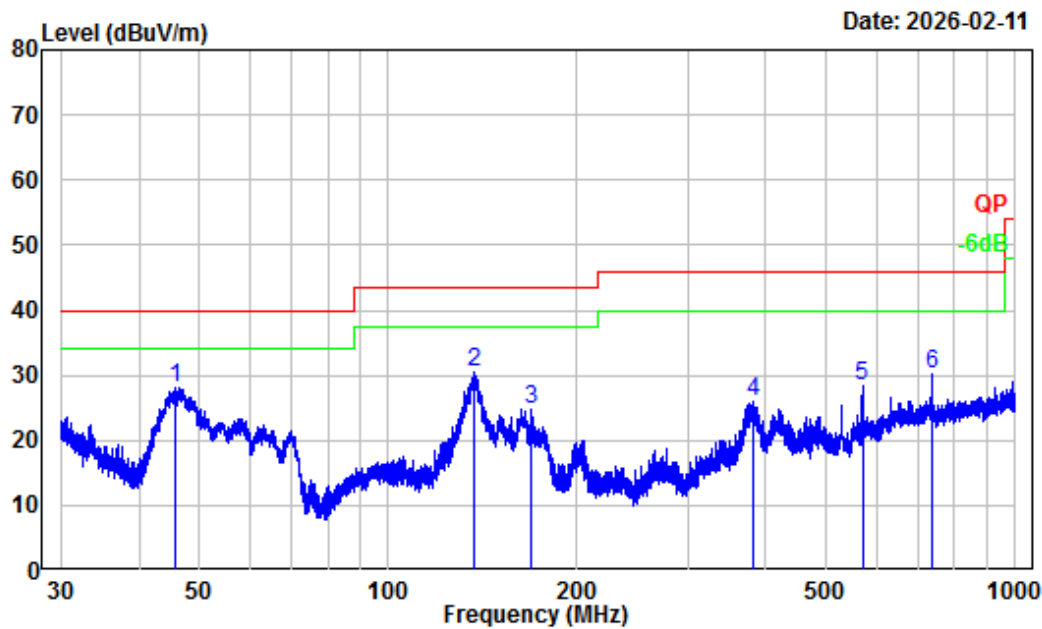


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.86	-16.40	44.40	28.00	40.00	-12.00 Peak
2	137.00	-11.96	42.49	30.53	43.50	-12.97 Peak
3	169.45	-13.40	38.17	24.77	43.50	-18.73 Peak
4	381.92	-9.59	35.47	25.88	46.00	-20.12 Peak
5	570.36	-5.78	34.02	28.24	46.00	-17.76 Peak
6	736.75	-3.47	33.81	30.34	46.00	-15.66 Peak

5250-5350 MHz(Maximum output power mode, 802.11n20 5260MHz)


9kHz-150kHz

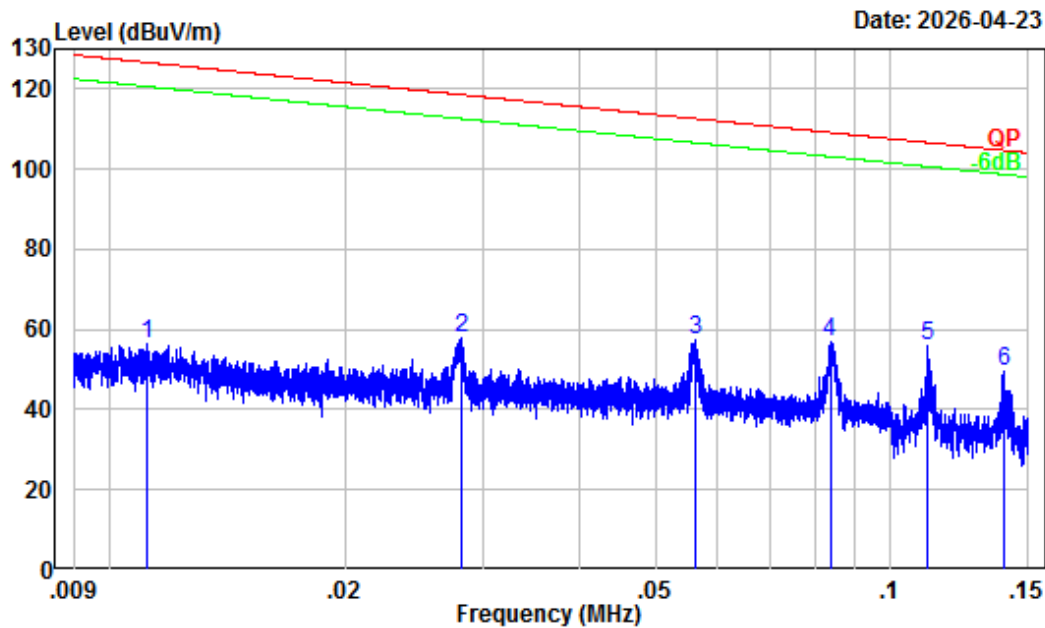

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.08	24.16	56.24	126.66	-70.42	Peak
2	0.028	28.84	28.96	57.80	118.60	-60.80	Peak
3	0.056	25.78	31.86	57.64	112.60	-54.96	Peak
4	0.084	23.14	33.67	56.81	109.15	-52.34	Peak
5	0.112	21.31	34.78	56.09	106.65	-50.56	Peak
6	0.139	19.68	29.67	49.35	104.72	-55.37	Peak


150kHz-30MHz

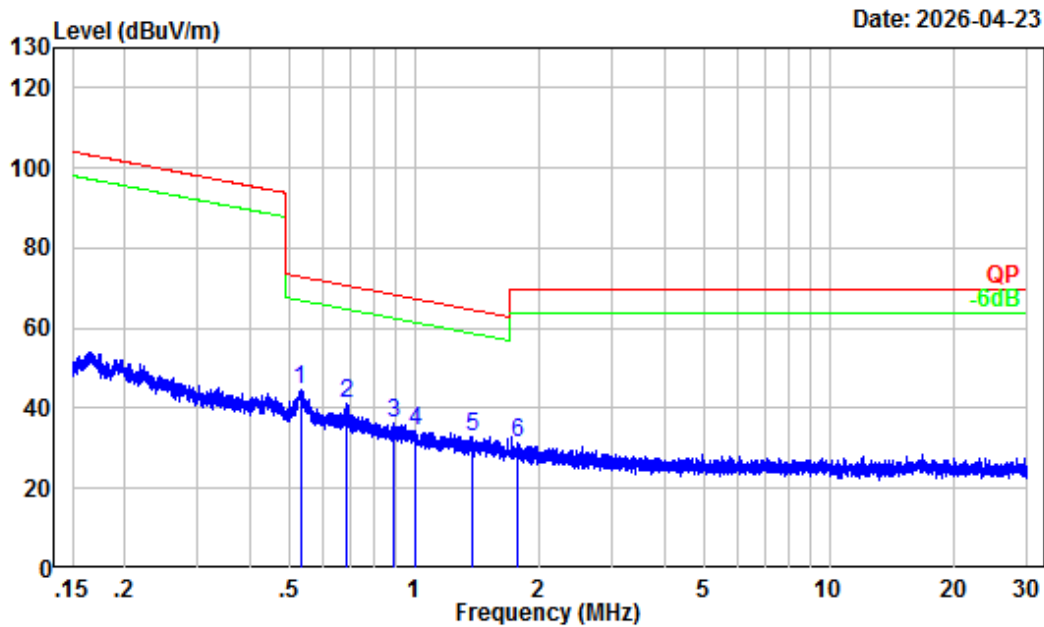

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.531	6.02	38.50	44.52	73.09	-28.57	Peak
2	0.688	4.08	36.91	40.99	70.79	-29.80	Peak
3	0.888	2.04	34.16	36.20	68.53	-32.33	Peak
4	1.004	1.19	33.10	34.29	67.43	-33.14	Peak
5	1.385	0.12	32.79	32.91	64.59	-31.68	Peak
6	1.779	-0.98	32.23	31.25	69.54	-38.29	Peak


30MHz-1GHz_Horizontal

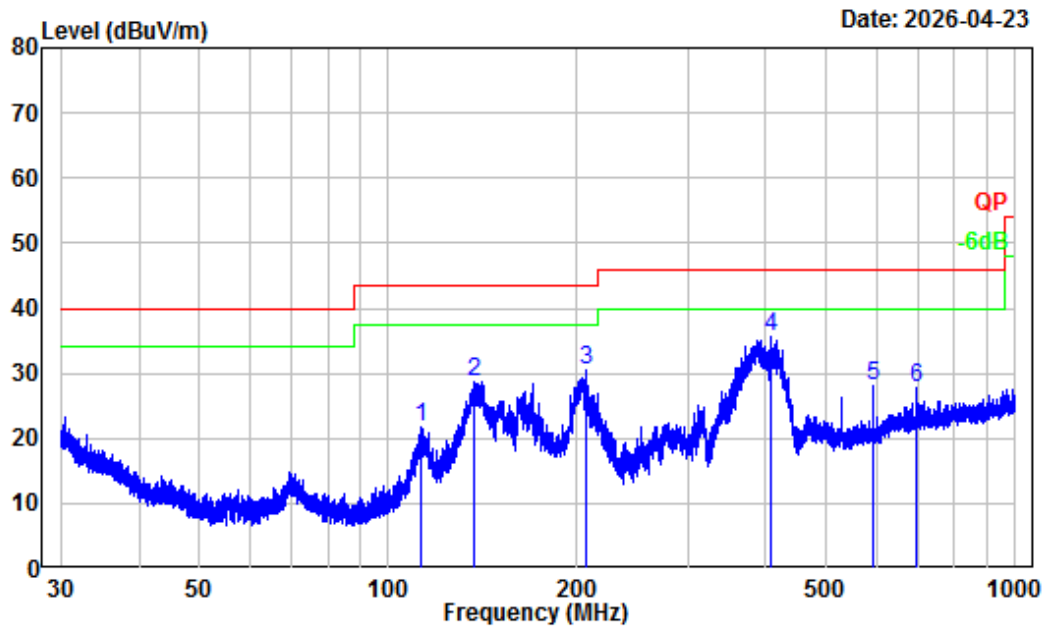

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	113.07	-12.86	34.74	21.88	43.50	-21.62	Peak
2	137.18	-11.97	40.65	28.68	43.50	-14.82	Peak
3	206.49	-13.94	44.54	30.60	43.50	-12.90	Peak
4	406.80	-8.76	44.25	35.49	46.00	-10.51	Peak
5	594.09	-5.80	33.87	28.07	46.00	-17.93	Peak
6	697.16	-3.90	31.77	27.87	46.00	-18.13	Peak

30MHz-1GHz_Vertical

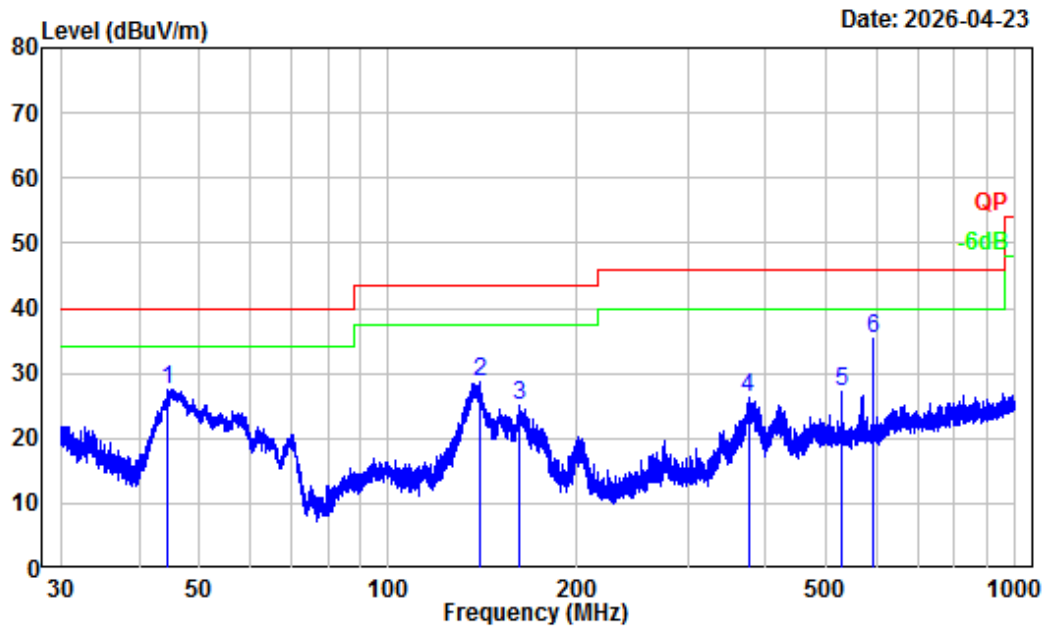


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.39	-15.47	42.94	27.47	40.00	-12.53	Peak
2	139.61	-12.20	40.87	28.67	43.50	-14.83	Peak
3	161.33	-13.03	37.95	24.92	43.50	-18.58	Peak
4	375.12	-9.75	35.91	26.16	46.00	-19.84	Peak
5	528.48	-6.36	33.62	27.26	46.00	-18.74	Peak
6	594.09	-5.80	41.17	35.37	46.00	-10.63	Peak

5470-5725 MHz(Maximum output power mode, 802.11ac40 5670MHz)


9kHz-150kHz

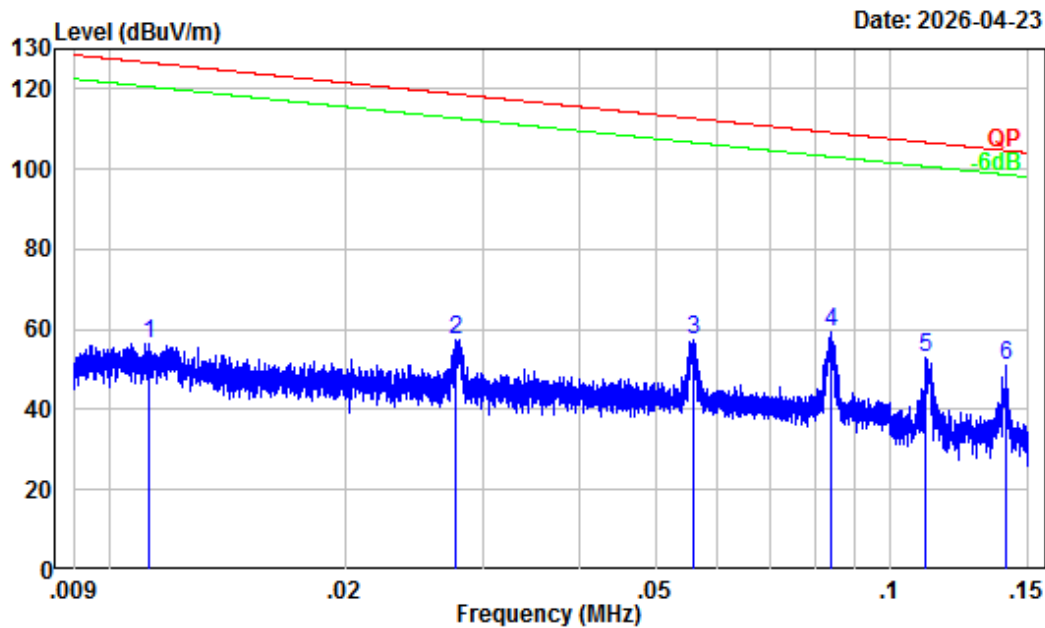

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.06	24.43	56.49	126.59	-70.10	Peak
2	0.028	28.92	28.70	57.62	118.72	-61.10	Peak
3	0.056	25.81	31.77	57.58	112.65	-55.07	Peak
4	0.084	23.12	36.14	59.26	109.11	-49.85	Peak
5	0.111	21.35	31.87	53.22	106.70	-53.48	Peak
6	0.140	19.62	31.62	51.24	104.67	-53.43	Peak


150kHz-30MHz

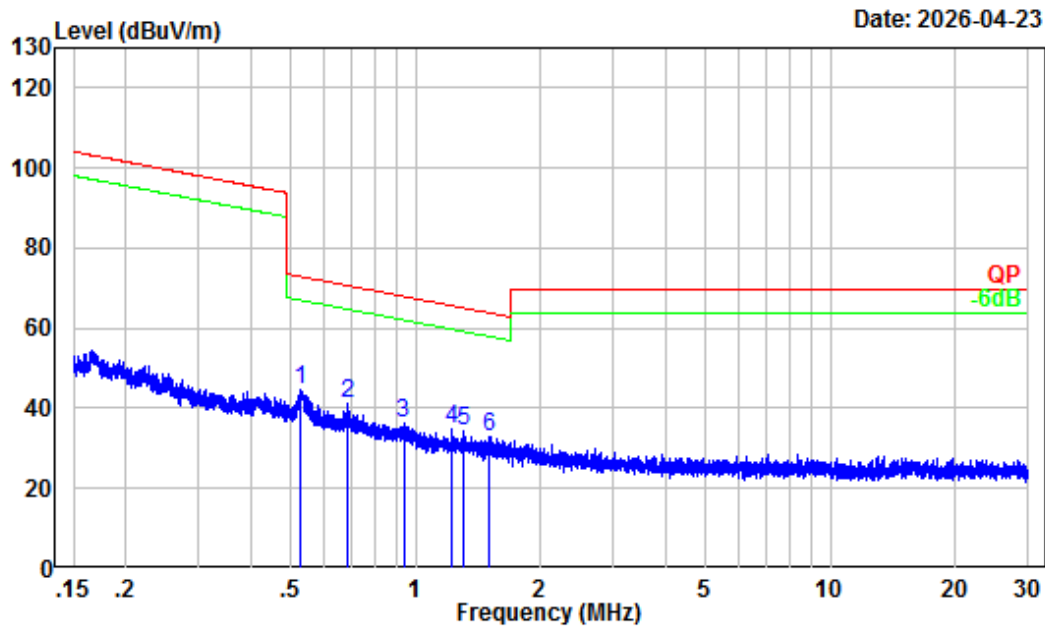

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.528	6.05	38.45	44.50	73.13	-28.63	Peak
2	0.689	4.07	37.37	41.44	70.78	-29.34	Peak
3	0.936	1.68	34.46	36.14	68.06	-31.92	Peak
4	1.219	0.59	34.19	34.78	65.71	-30.93	Peak
5	1.312	0.33	33.80	34.13	65.07	-30.94	Peak
6	1.512	-0.23	32.95	32.72	63.80	-31.08	Peak


30MHz-1GHz_Horizontal

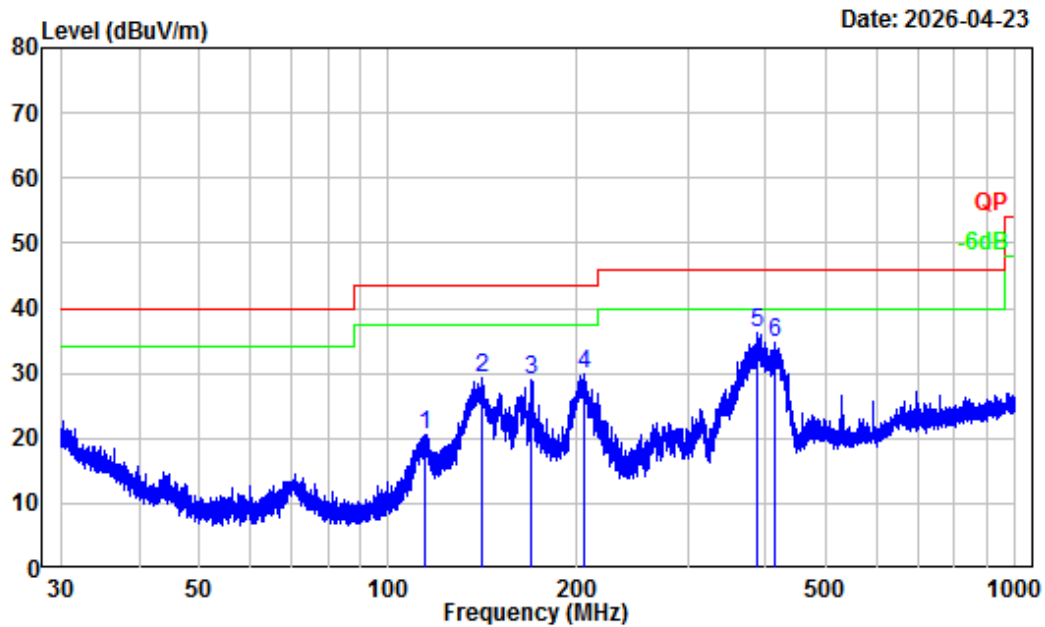

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	114.72	-12.53	33.08	20.55	43.50	-22.95	Peak
2	141.45	-12.28	41.48	29.20	43.50	-14.30	Peak
3	169.38	-13.40	42.39	28.99	43.50	-14.51	Peak
4	204.69	-13.72	43.55	29.83	43.50	-13.67	Peak
5	387.48	-9.46	45.69	36.23	46.00	-9.77	Peak
6	412.37	-8.64	43.42	34.78	46.00	-11.22	Peak

30MHz-1GHz_Vertical

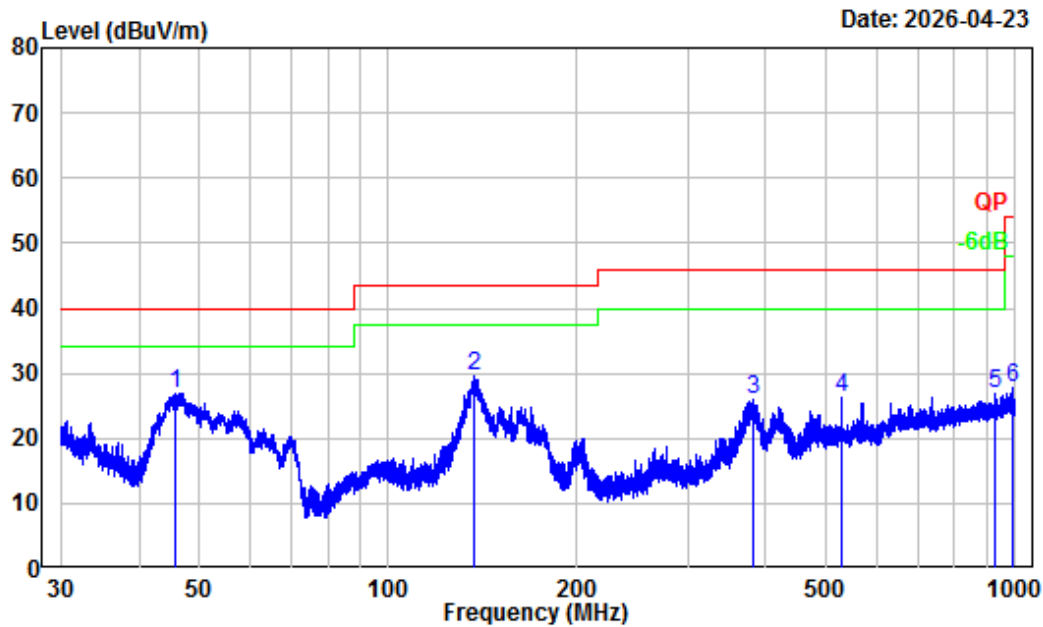


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.86	-16.40	43.40	27.00	40.00	-13.00	Peak
2	137.00	-11.96	41.49	29.53	43.50	-13.97	Peak
3	381.92	-9.59	35.47	25.88	46.00	-20.12	Peak
4	527.78	-6.36	32.57	26.21	46.00	-19.79	Peak
5	931.05	-1.55	28.55	27.00	46.00	-19.00	Peak
6	993.45	-1.01	28.91	27.90	54.00	-26.10	Peak

5725-5850 MHz(Maximum output power mode, 802.11n40 5755MHz)


9kHz-150kHz

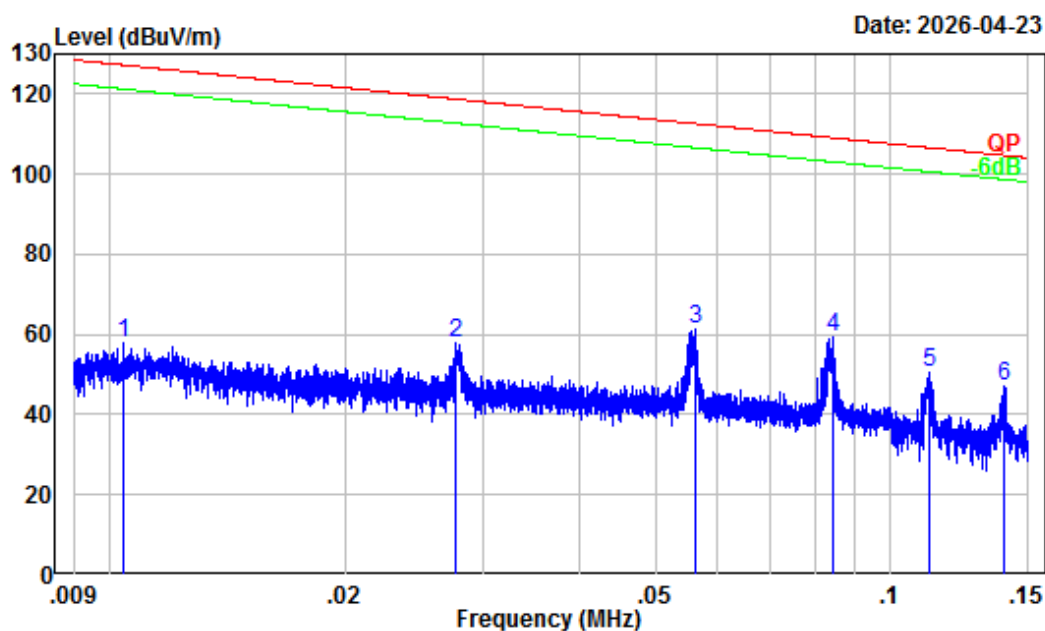

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Read Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.22	25.87	58.09	127.25	-69.16	Peak
2	0.028	28.92	28.84	57.76	118.73	-60.97	Peak
3	0.056	25.78	35.64	61.42	112.61	-51.19	Peak
4	0.084	23.10	36.38	59.48	109.09	-49.61	Peak
5	0.112	21.29	29.30	50.59	106.61	-56.02	Peak
6	0.140	19.64	27.63	47.27	104.68	-57.41	Peak


150kHz-30MHz

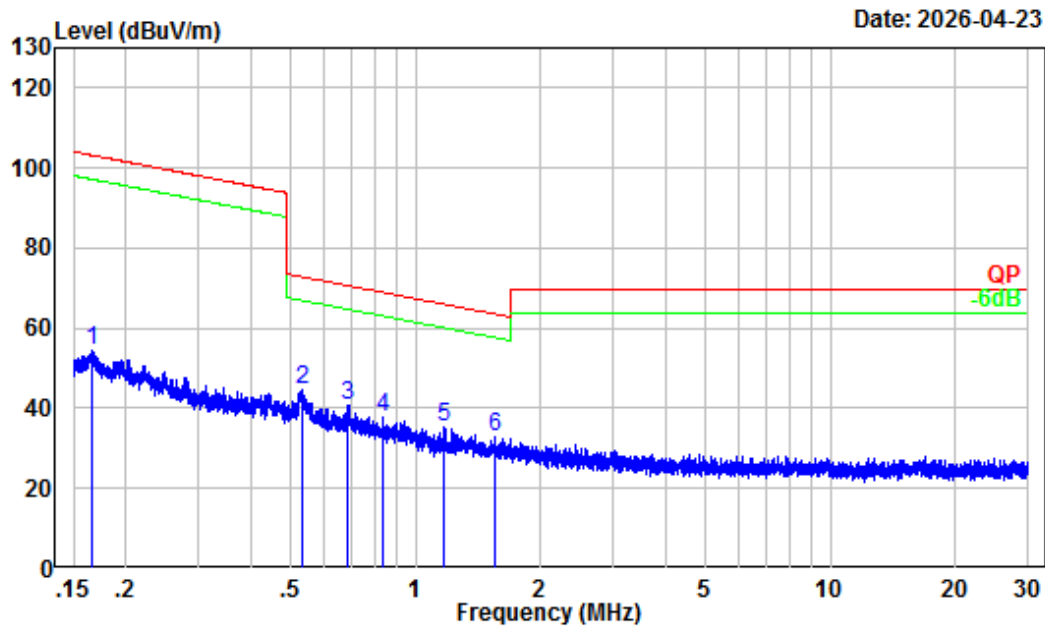

Site : Chamber A
Condition : 3m
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.165	18.14	36.08	54.22	103.23	-49.01	Peak
2	0.533	5.99	38.51	44.50	73.06	-28.56	Peak
3	0.689	4.06	36.89	40.95	70.77	-29.82	Peak
4	0.832	2.46	35.11	37.57	69.10	-31.53	Peak
5	1.173	0.71	34.47	35.18	66.05	-30.87	Peak
6	1.548	-0.33	33.12	32.79	63.60	-30.81	Peak


30MHz-1GHz_Horizontal

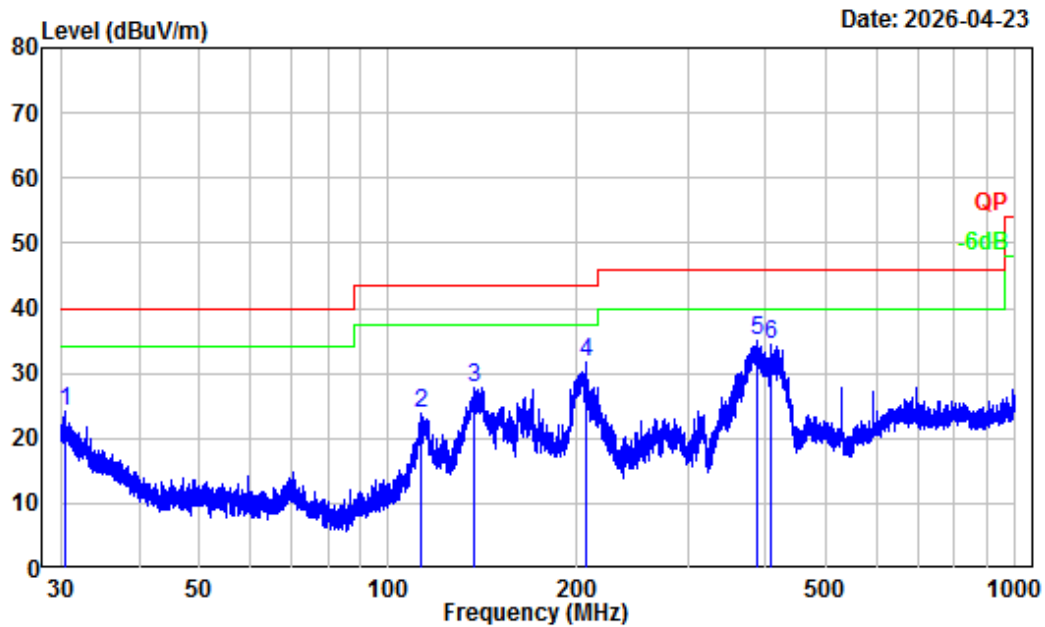

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.54	-6.15	30.45	24.30	40.00	-15.70	Peak
2	113.07	-12.86	36.74	23.88	43.50	-19.62	Peak
3	137.18	-11.97	39.65	27.68	43.50	-15.82	Peak
4	206.49	-13.94	45.54	31.60	43.50	-11.90	Peak
5	386.97	-9.47	44.60	35.13	46.00	-10.87	Peak
6	406.80	-8.76	43.25	34.49	46.00	-11.51	Peak

30MHz-1GHz_Vertical

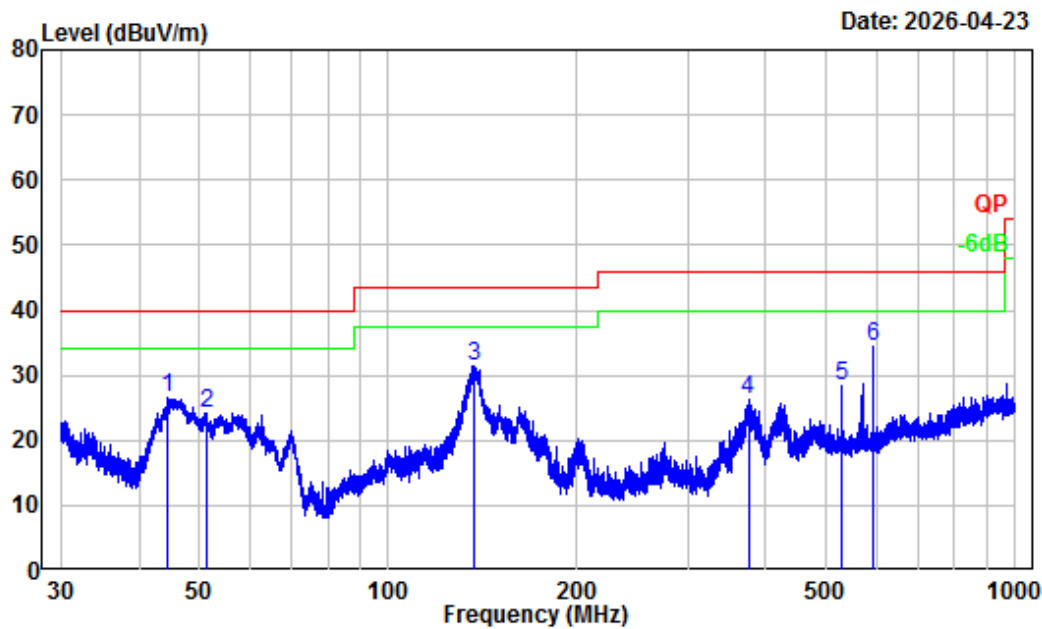

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A25853E-RFA1
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Nico Wu

	Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.39		-15.47	41.94	26.47	40.00	-13.53	Peak
2	51.44		-18.22	42.39	24.17	40.00	-15.83	Peak
3	137.30		-11.98	43.31	31.33	43.50	-12.17	Peak
4	375.12		-9.75	35.91	26.16	46.00	-19.84	Peak
5	528.48		-6.36	34.62	28.26	46.00	-17.74	Peak
6	594.09		-5.80	40.17	34.37	46.00	-11.63	Peak

Above 1GHz:							
5150-5250 MHz							
Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Ant0							
Low Channel							
10360	52.73	PK	H	2.48	55.21	68.2	-12.99
10360	53.06	PK	V	2.48	55.54	68.2	-12.66
Middle Channel							
10400	53.14	PK	H	2.47	55.61	68.2	-12.59
10400	53.48	PK	V	2.47	55.95	68.2	-12.25
High Channel							
10480	53.57	PK	H	2.19	55.76	68.2	-12.44
10480	53.91	PK	V	2.19	56.1	68.2	-12.1
Ant1							
Low Channel							
10360	57.16	PK	H	2.48	59.64	68.2	-8.56
10360	57.89	PK	V	2.48	60.37	68.2	-7.83
Middle Channel							
10400	55.65	PK	H	2.47	58.12	68.2	-10.08
10400	56.37	PK	V	2.47	58.84	68.2	-9.36
High Channel							
10480	54.23	PK	H	2.19	56.42	68.2	-11.78
10480	54.98	PK	V	2.19	57.17	68.2	-11.03
802.11n20							
Low Channel							
10360	57.94	PK	H	2.48	60.42	68.2	-7.78
10360	58.75	PK	V	2.48	61.23	68.2	-6.97
Middle Channel							
10400	57.11	PK	H	2.47	59.58	68.2	-8.62
10400	57.89	PK	V	2.47	60.36	68.2	-7.84
High Channel							
10480	56.27	PK	H	2.19	58.46	68.2	-9.74
10480	57.08	PK	V	2.19	59.27	68.2	-8.93
802.11n40							
Low Channel							
10380	54.21	PK	V	2.48	56.69	68.2	-11.51
10380	55.04	PK	V	2.48	57.52	68.2	-10.68
High Channel							
10460	53.55	PK	H	2.26	55.81	68.2	-12.39
10460	54.38	PK	V	2.26	56.64	68.2	-11.56

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
10360	58.69	PK	H	2.48	61.17	68.2	-7.03
10360	59.54	PK	V	2.48	62.02	68.2	-6.18
Middle Channel							
10400	57.58	PK	H	2.47	60.05	68.2	-8.15
10400	58.41	PK	V	2.47	60.88	68.2	-7.32
High Channel							
10480	56.75	PK	H	2.19	58.94	68.2	-9.26
10480	57.68	PK	V	2.19	59.87	68.2	-8.33
802.11ac40							
Low Channel							
10380	54.5	PK	H	2.48	56.98	68.2	-11.22
10380	55.38	PK	V	2.48	57.86	68.2	-10.34
High Channel							
10460	53.94	PK	H	2.26	56.2	68.2	-12
10460	54.79	PK	V	2.26	57.05	68.2	-11.15
802.11ac80							
Middle Channel							
10420	52.65	PK	H	2.4	55.05	68.2	-13.15
10420	53.32	PK	V	2.4	55.72	68.2	-12.48
802.11ax20							
Low Channel							
10360	57.52	PK	H	2.48	60	68.2	-8.2
10360	58.39	PK	V	2.48	60.87	68.2	-7.33
Middle Channel							
10400	55.69	PK	H	2.47	58.16	68.2	-10.04
10400	56.57	PK	V	2.47	59.04	68.2	-9.16
High Channel							
10480	54.88	PK	H	2.19	57.07	68.2	-11.13
10480	55.73	PK	V	2.19	57.92	68.2	-10.28
802.11ax40							
Low Channel							
10380	55.08	PK	H	2.48	57.56	68.2	-10.64
10380	55.94	PK	V	2.48	58.42	68.2	-9.78
High Channel							
10460	54.39	PK	H	2.26	56.65	68.2	-11.55
10460	55.16	PK	V	2.26	57.42	68.2	-10.78
802.11ax80							
Middle Channel							
10420	53.07	PK	H	2.4	55.47	68.2	-12.73
10420	53.68	PK	V	2.4	56.08	68.2	-12.12

5250-5350MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Ant0							
Low Channel							
10520	52.49	PK	H	2.13	54.62	68.2	-13.58
10520	52.74	PK	V	2.13	54.87	68.2	-13.33
Middle Channel							
10600	52.52	PK	H	2.2	54.72	68.2	-13.48
10600	40.12	AV	H	2.2	42.32	54	-11.68
10600	53.07	PK	V	2.2	55.27	68.2	-12.93
10600	40.25	AV	V	2.2	42.45	54	-11.55
High Channel							
10640	52.83	PK	H	2.57	55.4	74	-18.6
10640	40.28	AV	H	2.57	42.85	54	-11.15
10640	53.39	PK	V	2.57	55.96	74	-18.04
10640	40.61	AV	V	2.57	43.18	54	-10.82
Ant1							
Low Channel							
10520	53.12	PK	H	2.13	55.25	68.2	-12.95
10520	53.87	PK	V	2.13	56	68.2	-12.2
Middle Channel							
10600	53.63	PK	H	2.2	55.8	68.2	-12.4
10600	42.35	AV	H	2.2	44.55	54	-9.45
10600	54.41	PK	V	2.2	56.58	68.2	-11.62
10600	42.46	AV	V	2.2	44.66	54	-9.34
High Channel							
10640	54.84	PK	H	2.57	57.41	74	-16.59
10640	42.96	AV	H	2.57	45.53	54	-8.47
10640	55.65	PK	V	2.57	58.22	74	-15.78
10640	43.42	AV	V	2.57	45.99	54	-8.01
802.11n20							
Low Channel							
10520	54.75	PK	H	2.13	56.88	68.2	-11.32
10520	55.93	PK	V	2.13	58.06	68.2	-10.14
Middle Channel							
10600	53.92	PK	H	2.2	56.09	68.2	-12.11
10600	43.58	AV	H	2.2	45.78	54	-8.22
10600	55.06	PK	V	2.2	57.23	68.2	-10.97
10600	44.69	AV	V	2.2	46.89	54	-7.11

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
High Channel							
10640	55.29	PK	H	2.57	57.86	74	-16.14
10640	43.81	AV	H	2.57	46.38	54	-7.62
10640	56.45	PK	V	2.57	59.02	74	-14.98
10640	44.68	AV	V	2.57	47.25	54	-6.75
802.11n40							
Low Channel							
10540	52.81	PK	H	2.15	54.96	68.2	-13.24
10540	53.64	PK	V	2.15	55.79	68.2	-12.41
High Channel							
10620	53.73	PK	H	2.39	56.12	74	-17.88
10620	42.45	AV	H	2.39	44.84	54	-9.16
10620	54.57	PK	V	2.39	56.96	74	-17.04
10620	43.28	AV	V	2.39	45.67	54	-8.33
802.11ac20							
Low Channel							
10520	55.19	PK	H	2.13	57.32	68.2	-10.88
10520	56.36	PK	V	2.13	58.49	68.2	-9.71
Middle Channel							
10600	54.25	PK	H	2.2	56.42	68.2	-11.78
10600	43.98	AV	H	2.2	46.18	54	-7.82
10600	55.53	PK	V	2.2	57.7	68.2	-10.5
10600	45.03	AV	V	2.2	47.23	54	-6.77
High Channel							
10640	55.78	PK	H	2.57	58.35	74	-15.65
10640	44.27	AV	H	2.57	46.84	54	-7.16
10640	57.01	PK	V	2.57	59.58	74	-14.42
10640	45.14	AV	V	2.57	47.71	54	-6.29
802.11ac40							
Low Channel							
10540	52.89	PK	H	2.15	55.04	68.2	-13.16
10540	53.76	PK	V	2.15	55.91	68.2	-12.29
High Channel							
10620	53.92	PK	H	2.39	56.31	74	-17.69
10620	42.78	AV	H	2.39	45.17	54	-8.83
10620	54.85	PK	V	2.39	57.24	74	-16.76
10620	43.53	AV	V	2.39	45.92	54	-8.08
802.11ac80							
Middle Channel							
10580	52.85	PK	H	2.18	55.03	68.2	-13.17
10580	53.56	PK	V	2.18	55.74	68.2	-12.46

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ax20							
Low Channel							
10520	54.57	PK	H	2.13	56.7	68.2	-11.5
10520	55.72	PK	V	2.13	57.85	68.2	-10.35
Middle Channel							
10600	53.86	PK	H	2.2	56.03	68.2	-12.17
10600	44.63	AV	H	2.2	46.83	54	-7.17
10600	55.04	PK	V	2.2	57.21	68.2	-10.99
10600	45.11	AV	V	2.2	47.31	54	-6.69
High Channel							
10640	55.49	PK	H	2.57	58.06	74	-15.94
10640	44.93	AV	H	2.57	47.5	54	-6.5
10640	56.67	PK	V	2.57	59.24	74	-14.76
10640	45.88	AV	V	2.57	48.45	54	-5.55
802.11ax40							
Low Channel							
10540	53.05	PK	H	2.15	55.2	68.2	-13
10540	53.9	PK	V	2.15	56.05	68.2	-12.15
High Channel							
10620	54.17	PK	H	2.39	56.56	74	-17.44
10620	42.89	AV	H	2.39	45.28	54	-8.72
10620	55.04	PK	V	2.39	57.43	74	-16.57
10620	43.66	AV	V	2.39	46.05	54	-7.95
802.11ax80							
Middle Channel							
10580	53.19	PK	H	2.18	55.37	68.2	-12.83
10580	53.94	PK	V	2.18	56.12	68.2	-12.08

5470-5725MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Ant0							
Low Channel							
11000	53.69	PK	H	4.26	57.95	74	-16.05
11000	42.47	AV	H	4.26	46.73	54	-7.27
11000	54.78	PK	V	4.26	59.04	74	-14.96
11000	43.24	AV	V	4.26	47.5	54	-6.5
Middle Channel							
11200	56.57	PK	H	3.61	60.18	74	-13.82
11200	44.64	AV	H	3.61	48.25	54	-5.75
11200	57.85	PK	V	3.61	61.46	74	-12.54
11200	45.49	AV	V	3.61	49.1	54	-4.9
High Channel							
11400	57.08	PK	H	3.31	60.39	74	-13.61
11400	45.12	AV	H	3.31	48.43	54	-5.57
11400	58.31	PK	V	3.31	61.62	74	-12.38
11400	45.95	AV	V	3.31	49.26	54	-4.74
Ant1							
Low Channel							
11000	57.54	PK	H	4.26	61.8	74	-12.2
11000	45.31	AV	H	4.26	49.57	54	-4.43
11000	58.72	PK	V	4.26	62.98	74	-11.02
11000	46.19	AV	V	4.26	50.45	54	-3.55
Middle Channel							
11200	55.13	PK	H	3.61	58.74	74	-15.26
11200	43.24	AV	H	3.61	46.85	54	-7.15
11200	56.36	PK	V	3.61	59.97	74	-14.03
11200	44.05	AV	V	3.61	47.66	54	-6.34
High Channel							
11400	53.76	PK	H	3.31	57.07	74	-16.93
11400	41.37	AV	H	3.31	44.68	54	-9.32
11400	54.54	PK	V	3.31	57.85	74	-16.15
11400	42.02	AV	V	3.31	45.33	54	-8.67

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11n20							
Low Channel							
11000	57.32	PK	H	4.26	61.58	74	-12.42
11000	44.8	AV	H	4.26	49.06	54	-4.94
11000	58.56	PK	V	4.26	62.82	74	-11.18
11000	45.63	AV	V	4.26	49.89	54	-4.11
Middle Channel							
11200	56.71	PK	H	3.61	60.32	74	-13.68
11200	43.93	AV	H	3.61	47.54	54	-6.46
11200	57.87	PK	V	3.61	61.48	74	-12.52
11200	44.66	AV	V	3.61	48.27	54	-5.73
High Channel							
11400	55.29	PK	H	3.31	58.6	74	-15.4
11400	43.57	AV	H	3.31	46.88	54	-7.12
11400	56.46	PK	V	3.31	59.77	74	-14.23
11400	44.32	AV	V	3.31	47.63	54	-6.37
802.11n40							
Low Channel							
11020	56.63	PK	H	4.08	60.71	74	-13.29
11020	45.44	AV	H	4.08	49.52	54	-4.48
11020	57.75	PK	V	4.08	61.83	74	-12.17
11020	46.27	AV	V	4.08	50.35	54	-3.65
Middle Channel							
11180	55.85	PK	H	3.51	59.36	74	-14.64
11180	45.13	AV	H	3.51	48.64	54	-5.36
11180	57.02	PK	V	3.51	60.53	74	-13.47
11180	45.91	AV	V	3.51	49.42	54	-4.58
High Channel							
11340	54.06	PK	H	3.47	57.53	74	-16.47
11340	44.07	AV	H	3.47	47.54	54	-6.46
11340	55.18	PK	V	3.47	58.65	74	-15.35
11340	44.89	AV	V	3.47	48.36	54	-5.64

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac20							
Low Channel							
11000	57.73	PK	H	4.26	61.99	74	-12.01
11000	45.25	AV	H	4.26	49.51	54	-4.49
11000	58.91	PK	V	4.26	63.17	74	-10.83
11000	46.04	AV	V	4.26	50.3	54	-3.7
Middle Channel							
11200	56.71	PK	H	60.32	74	-13.68	60.32
11200	43.93	AV	H	47.54	54	-6.46	47.54
11200	57.87	PK	V	61.48	74	-12.52	61.48
11200	44.66	AV	V	48.27	54	-5.73	48.27
High Channel							
11400	55.29	PK	H	3.31	58.6	74	-15.4
11400	43.57	AV	H	3.31	46.88	54	-7.12
11400	56.46	PK	V	3.31	59.77	74	-14.23
11400	44.32	AV	V	3.31	47.63	54	-6.37
802.11ac40							
Low Channel							
11020	57.05	PK	H	4.08	61.13	74	-12.87
11020	45.94	AV	H	4.08	50.02	54	-3.98
11020	58.26	PK	V	4.08	62.34	74	-11.66
11020	46.72	AV	V	4.08	50.8	54	-3.2
Middle Channel							
11180	56.21	PK	H	3.56	59.77	74	-14.23
11180	45.42	AV	H	3.56	48.98	54	-5.02
11180	57.34	PK	V	3.56	60.9	74	-13.1
11180	46.19	AV	V	3.56	49.75	54	-4.25
High Channel							
11340	54.55	PK	H	3.47	58.02	74	-15.98
11340	44.72	AV	H	3.47	48.19	54	-5.81
11340	55.68	PK	V	3.47	59.15	74	-14.85
11340	45.37	AV	V	3.47	48.84	54	-5.16

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac80							
Low Channel							
11060	57.01	PK	H	3.72	60.73	74	-13.27
11060	45.96	AV	H	3.72	49.68	54	-4.32
11060	58.15	PK	V	3.72	61.87	74	-12.13
11060	46.78	AV	V	3.72	50.5	54	-3.5
High Channel							
11220	55.39	PK	H	3.6	58.99	74	-15.01
11220	44.97	AV	H	3.6	48.57	54	-5.43
11220	56.56	PK	V	3.6	60.16	74	-13.84
11220	45.81	AV	V	3.6	49.41	54	-4.59
802.11ax20							
Low Channel							
11000	57.14	PK	H	4.26	61.4	74	-12.6
11000	45.09	AV	H	4.26	49.35	54	-4.65
11000	58.33	PK	V	4.26	62.59	74	-11.41
11000	45.92	AV	V	4.26	50.18	54	-3.82
Middle Channel							
11200	56.18	PK	H	3.61	59.79	74	-14.21
11200	44.05	AV	H	3.61	47.66	54	-6.34
11200	57.44	PK	V	3.61	61.05	74	-12.95
11200	44.87	AV	V	3.61	48.48	54	-5.52
High Channel							
11400	55.07	PK	H	3.31	58.38	74	-15.62
11400	43.34	AV	H	3.31	46.65	54	-7.35
11400	56.28	PK	V	3.31	59.59	74	-14.41
11400	44.16	AV	V	3.31	47.47	54	-6.53

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ax40							
Low Channel							
11020	57.36	PK	H	4.08	61.44	74	-12.56
11020	46.05	AV	H	4.08	50.13	54	-3.87
11020	58.52	PK	V	4.08	62.6	74	-11.4
11020	46.89	AV	V	4.08	50.97	54	-3.03
Middle Channel							
11180	56.48	PK	H	3.56	60.04	74	-13.96
11180	45.54	AV	H	3.56	49.1	54	-4.9
11180	57.69	PK	V	3.56	61.25	74	-12.75
11180	46.35	AV	V	3.56	49.91	54	-4.09
High Channel							
11340	54.69	PK	H	3.47	58.16	74	-15.84
11340	44.76	AV	H	3.47	48.23	54	-5.77
11340	55.85	PK	V	3.47	59.32	74	-14.68
11340	45.57	AV	V	3.47	49.04	54	-4.96
802.11ax80							
Low Channel							
11060	56.52	PK	H	3.72	60.24	74	-13.76
11060	45.73	AV	H	3.72	49.45	54	-4.55
11060	57.68	PK	V	3.72	61.4	74	-12.6
11060	46.41	AV	V	3.72	50.13	54	-3.87
High Channel							
11220	54.26	PK	H	3.6	57.86	74	-16.14
11220	44.64	AV	H	3.6	48.24	54	-5.76
11220	55.37	PK	V	3.6	58.97	74	-15.03
11220	45.49	AV	V	3.6	49.09	54	-4.91

5725-5850MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Ant0							
Low Channel							
11490	55.18	PK	H	3.64	58.82	74	-15.18
11490	42.72	AV	H	3.64	46.36	54	-7.64
11490	56.39	PK	V	3.64	60.03	74	-13.97
11490	43.51	AV	V	3.64	47.15	54	-6.85
Middle Channel							
11570	54.53	PK	H	3.34	57.87	74	-16.13
11570	42.38	AV	H	3.34	45.72	54	-8.28
11570	55.64	PK	V	3.34	58.98	74	-15.02
11570	43.19	AV	V	3.34	46.53	54	-7.47
High Channel							
11650	55.89	PK	H	3.46	59.35	74	-14.65
11650	43.96	AV	H	3.46	47.42	54	-6.58
11650	57.05	PK	V	3.46	60.51	74	-13.49
11650	44.72	AV	V	3.46	48.18	54	-5.82
Ant1							
Low Channel							
11490	55.39	PK	H	3.64	59.03	74	-14.97
11490	42.84	AV	H	3.64	46.48	54	-7.52
11490	56.57	PK	V	3.64	60.21	74	-13.79
11490	43.63	AV	V	3.64	47.27	54	-6.73
Middle Channel							
11570	55.88	PK	H	3.34	59.22	74	-14.78
11570	43.52	AV	H	3.34	46.86	54	-7.14
11570	57.06	PK	V	3.34	60.4	74	-13.6
11570	44.34	AV	V	3.34	47.68	54	-6.32
High Channel							
11650	58.31	PK	H	3.46	61.77	74	-12.23
11650	44.87	AV	H	3.46	48.33	54	-5.67
11650	59.53	PK	V	3.46	62.99	74	-11.01
11650	45.66	AV	V	3.46	49.12	54	-4.88


Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11n20							
Low Channel							
11490	57.24	PK	H	3.64	60.88	74	-13.12
11490	44.75	AV	H	3.64	48.39	54	-5.61
11490	58.41	PK	V	3.64	62.05	74	-11.95
11490	45.52	AV	V	3.64	49.16	54	-4.84
Middle Channel							
11570	57.66	PK	H	3.34	61	74	-13
11570	45.08	AV	H	3.34	48.42	54	-5.58
11570	58.87	PK	V	3.34	62.21	74	-11.79
11570	45.9	AV	V	3.34	49.24	54	-4.76
High Channel							
11650	58.15	PK	H	3.46	61.61	74	-12.39
11650	46.07	AV	H	3.46	49.53	54	-4.47
11650	59.32	PK	V	3.46	62.78	74	-11.22
11650	46.89	AV	V	3.46	50.35	54	-3.65
802.11n40							
Low Channel							
11510	56.49	PK	H	3.63	60.12	74	-13.88
11510	44.73	AV	H	3.63	48.36	54	-5.64
11510	57.68	PK	V	3.63	61.31	74	-12.69
11510	45.07	AV	V	3.63	48.7	54	-5.30
High Channel							
11590	55.86	PK	H	3.24	59.1	74	-14.9
11590	45.12	AV	H	3.24	48.36	54	-5.64
11590	57.04	PK	V	3.24	60.28	74	-13.72
11590	45.91	AV	V	3.24	49.15	54	-4.85

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
11490	57.73	PK	H	3.64	61.37	74	-12.63
11490	45.18	AV	H	3.64	48.82	54	-5.18
11490	58.95	PK	V	3.64	62.59	74	-11.41
11490	46.01	AV	V	3.64	49.65	54	-4.35
Middle Channel							
11570	58.25	PK	H	3.34	61.59	74	-12.41
11570	45.53	AV	H	3.34	48.87	54	-5.13
11570	59.42	PK	V	3.34	62.76	74	-11.24
11570	46.36	AV	V	3.34	49.7	54	-4.3
High Channel							
11650	58.62	PK	H	3.46	62.08	74	-11.92
11650	46.54	AV	H	3.46	50	54	-4
11650	59.81	PK	V	3.46	63.27	74	-10.73
11650	47.33	AV	V	3.46	50.79	54	-3.21
802.11ac40							
Low Channel							
11510	56.96	PK	H	3.63	60.59	74	-13.41
11510	46.25	AV	H	3.63	49.88	54	-4.12
11510	58.11	PK	V	3.63	61.74	74	-12.26
11510	47.09	AV	V	3.63	50.72	54	-3.28
High Channel							
11590	56.27	PK	H	3.24	59.51	74	-14.49
11590	45.54	AV	H	3.24	48.78	54	-5.22
11590	57.42	PK	V	3.24	60.66	74	-13.34
11590	46.35	AV	V	3.24	49.59	54	-4.41
802.11ac80							
Middle Channel							
11550	54.48	PK	H	3.44	57.92	74	-16.08
11550	43.82	AV	H	3.44	47.26	54	-6.74
11550	55.61	PK	V	3.44	59.05	74	-14.95
11550	44.53	AV	V	3.44	47.97	54	-6.03

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
11490	56.24	PK	H	3.64	59.88	74	-14.12
11490	45.08	AV	H	3.64	48.72	54	-5.28
11490	57.46	PK	V	3.64	61.1	74	-12.9
11490	45.91	AV	V	3.64	49.55	54	-4.45
Middle Channel							
11570	56.81	PK	H	3.34	60.15	74	-13.85
11570	45.12	AV	H	3.34	48.46	54	-5.54
11570	57.99	PK	V	3.34	61.33	74	-12.67
11570	46.06	AV	V	3.34	49.4	54	-4.6
High Channel							
11650	58.07	PK	H	3.46	61.53	74	-12.47
11650	46.34	AV	H	3.46	49.8	54	-4.2
11650	59.25	PK	V	3.46	62.71	74	-11.29
11650	47.18	AV	V	3.46	50.64	54	-3.36
802.11ax40							
Low Channel							
11510	56.71	PK	H	3.63	60.34	74	-13.66
11510	46.29	AV	H	3.63	49.92	54	-4.08
11510	57.94	PK	V	3.63	61.57	74	-12.43
11510	47.12	AV	V	3.63	50.75	54	-3.25
High Channel							
11590	55.64	PK	H	3.24	58.88	74	-15.12
11590	45.57	AV	H	3.24	48.81	54	-5.19
11590	56.85	PK	V	3.24	60.09	74	-13.91
11590	46.36	AV	V	3.24	49.6	54	-4.4
802.11ax80							
Middle Channel							
11550	53.87	PK	H	3.44	57.31	74	-16.69
11550	43.73	AV	H	3.44	47.17	54	-6.83
11550	55.04	PK	V	3.44	58.48	74	-15.52
11550	44.41	AV	V	3.44	47.85	54	-6.15
Note: Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Factor + Reading Margin = Corrected. Amplitude - Limit The other spurious emission which is in the noise floor level was not recorded.							

Test plots:**Band Edge**


Left Band edge_Horizontal_Peak_802.11a_5180MHz_ANT0

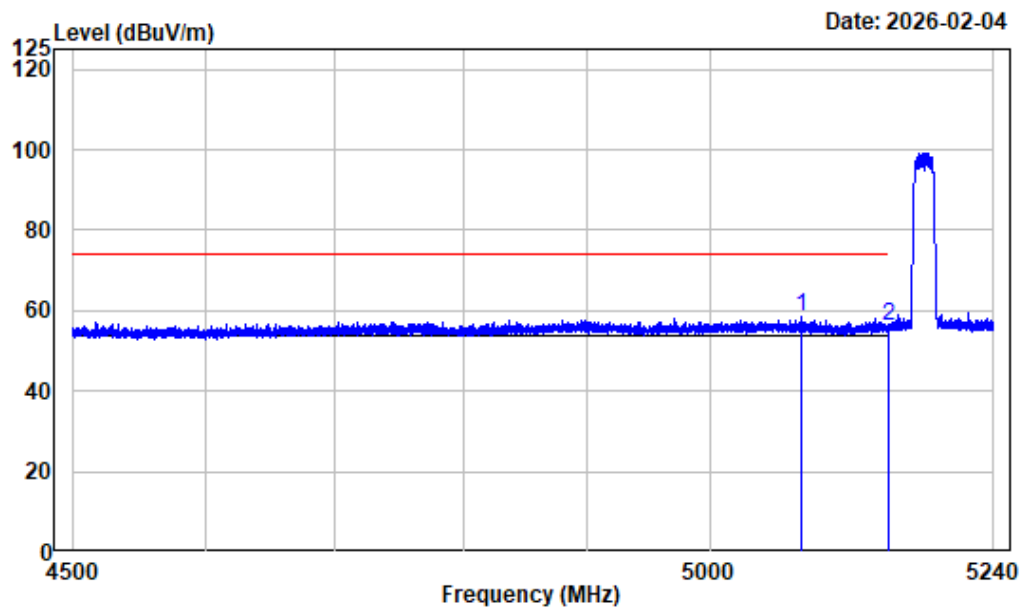

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5076.275	-7.39	66.00	58.61	74.00	-15.39 Peak
2	5150.000	-7.45	63.59	56.14	74.00	-17.86 Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz_ANT0

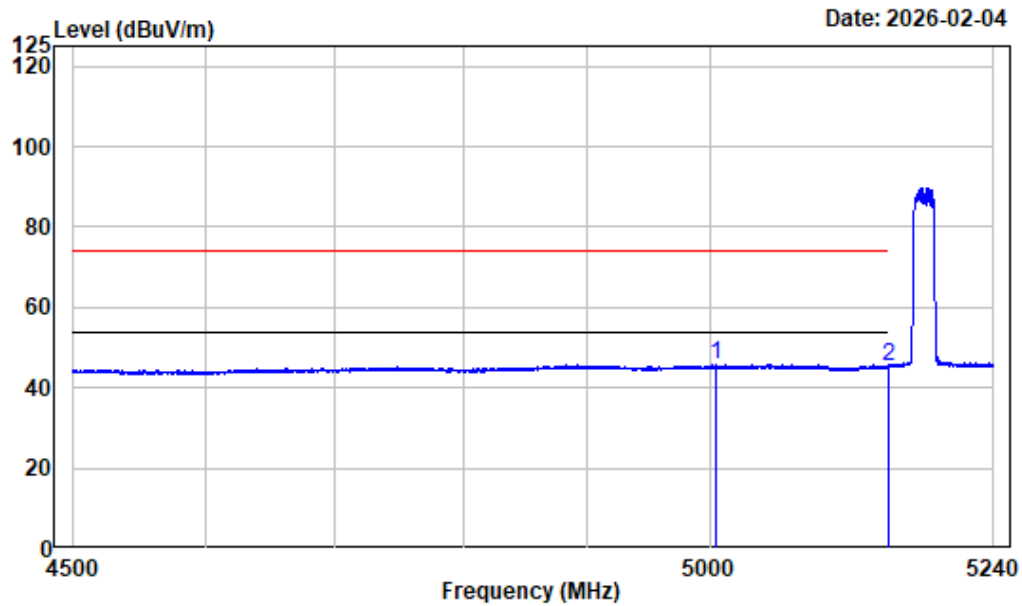

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5004.587	-7.29	53.08	45.79	54.00	-8.21	Average
2 5150.000	-7.45	52.64	45.19	54.00	-8.81	Average


Left Band edge_Vertical_Peak_802.11a_5180MHz_ANT0

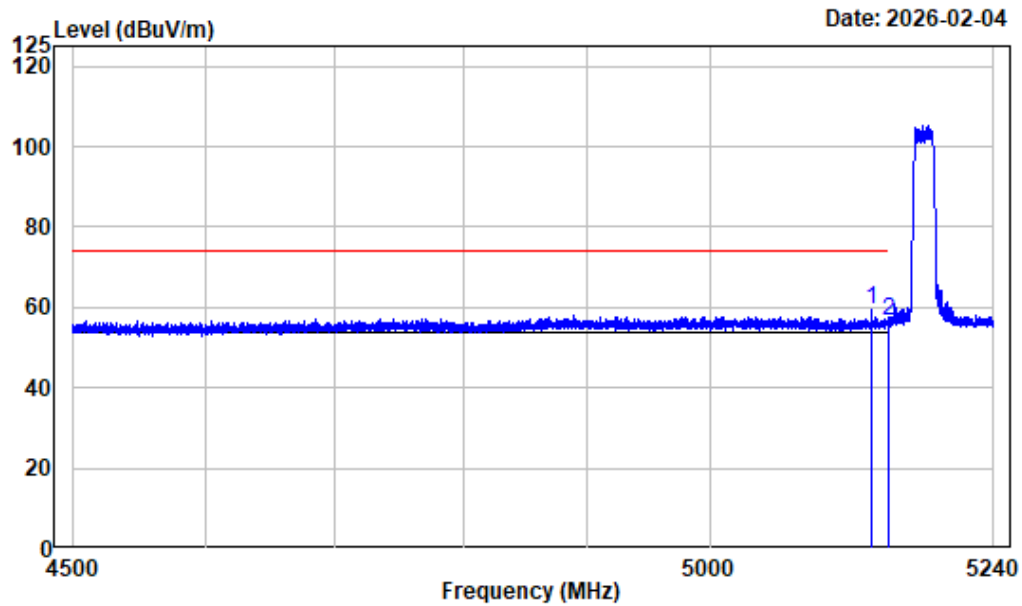

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5135.475	-7.46	66.75	59.29	74.00	-14.71 Peak
2	5150.000	-7.45	63.89	56.44	74.00	-17.56 Peak


Left Band edge_Vertical_Average_802.11a_5180MHz_ANT0

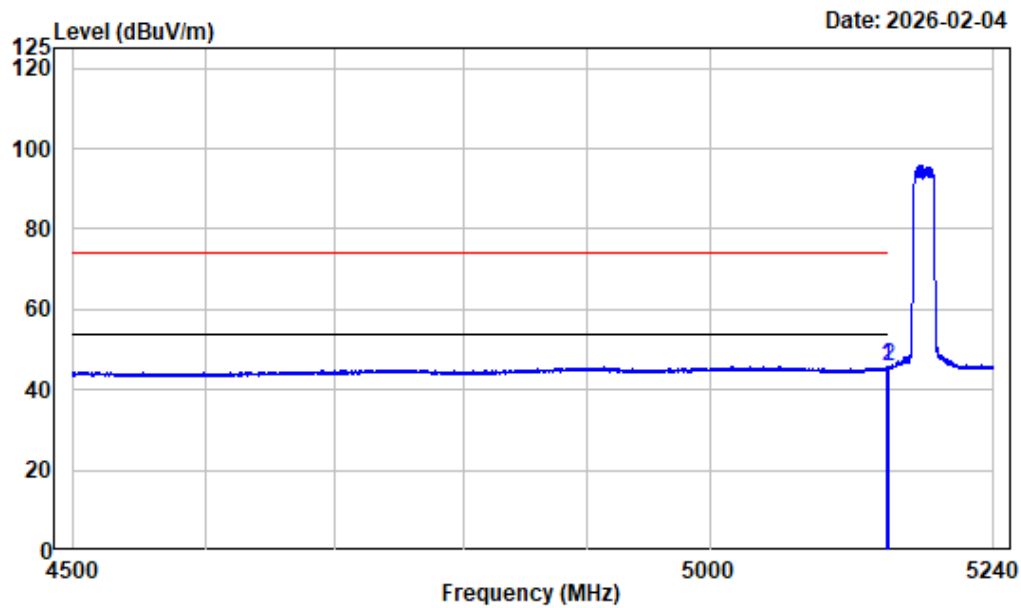

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.518	-7.45	53.19	45.74	54.00	-8.26	Average
2 5150.000	-7.45	53.06	45.61	54.00	-8.39	Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz_ANT0

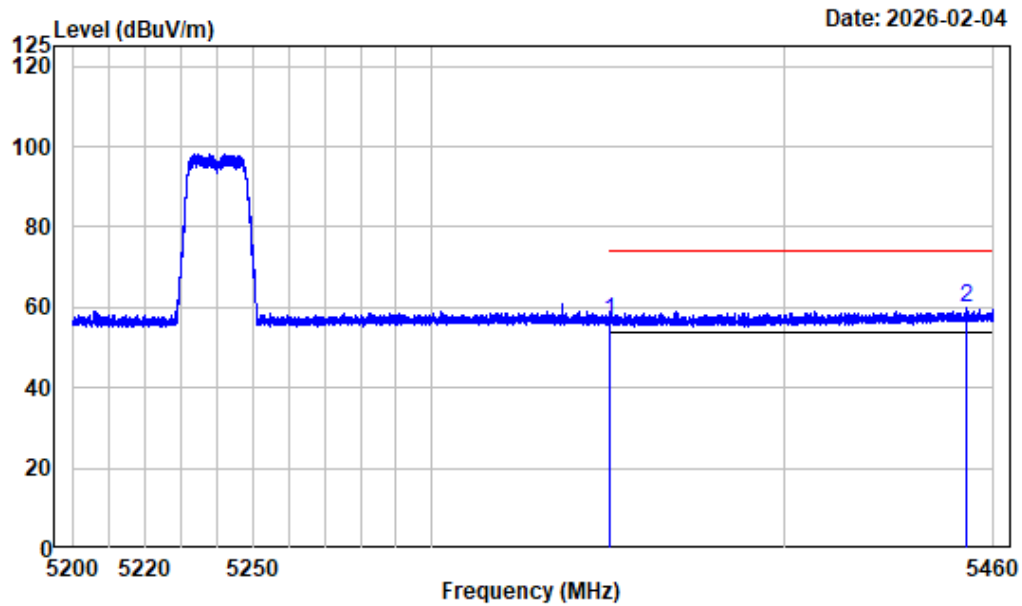

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.37	56.61	74.00	-17.39	Peak
2 5452.395	-6.29	66.11	59.82	74.00	-14.18	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz_ANT0

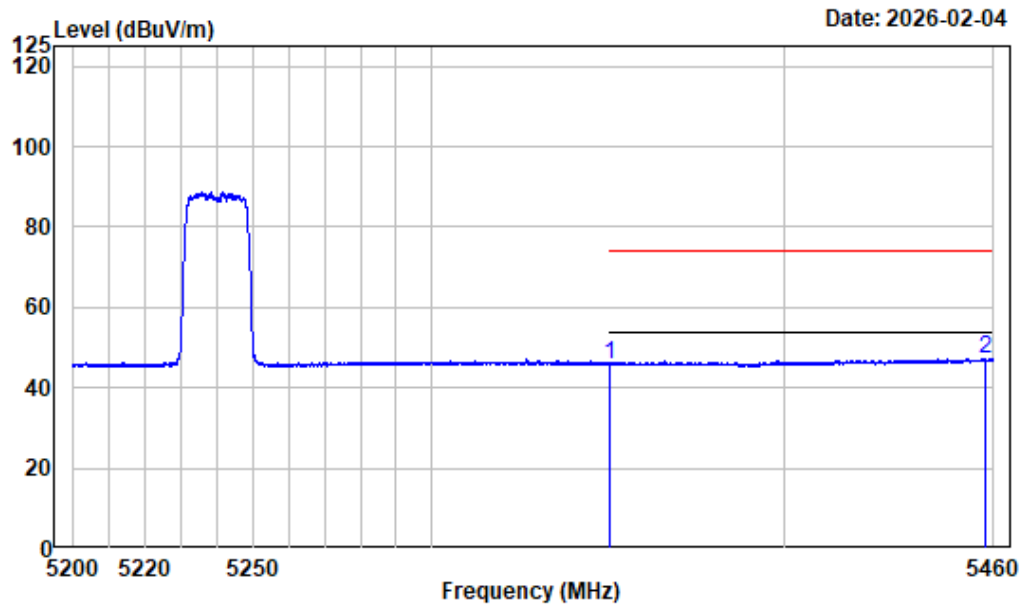

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.62	45.86	54.00	-8.14 Average
2	5457.757	-6.28	53.44	47.16	54.00	-6.84 Average


Right Band edge_Vertical_Peak_802.11a_5240MHz_ANT0

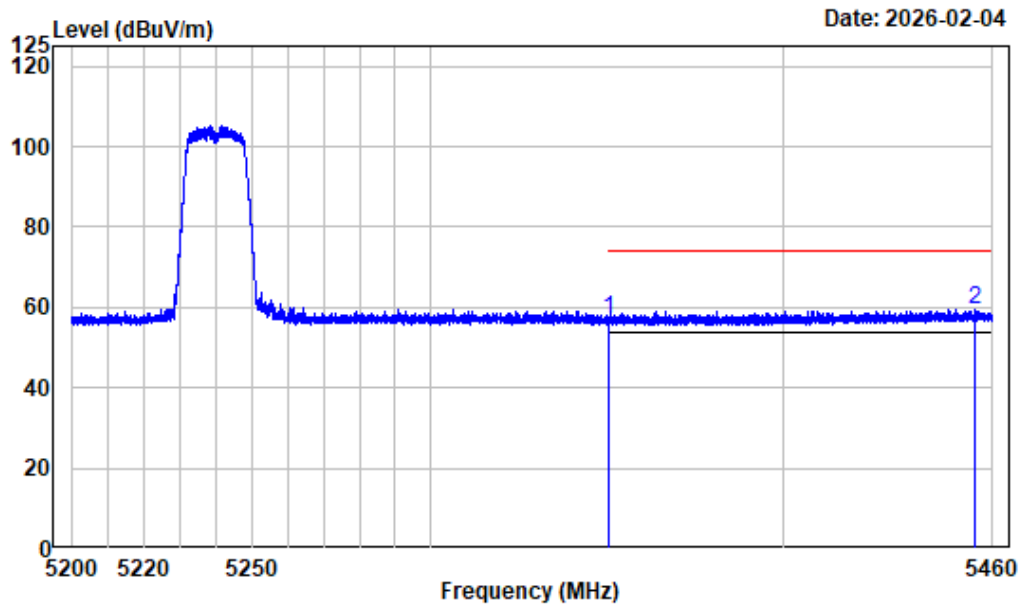

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.81	57.05	74.00	-16.95 Peak
2	5454.995	-6.29	65.93	59.64	74.00	-14.36 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz_ANT0

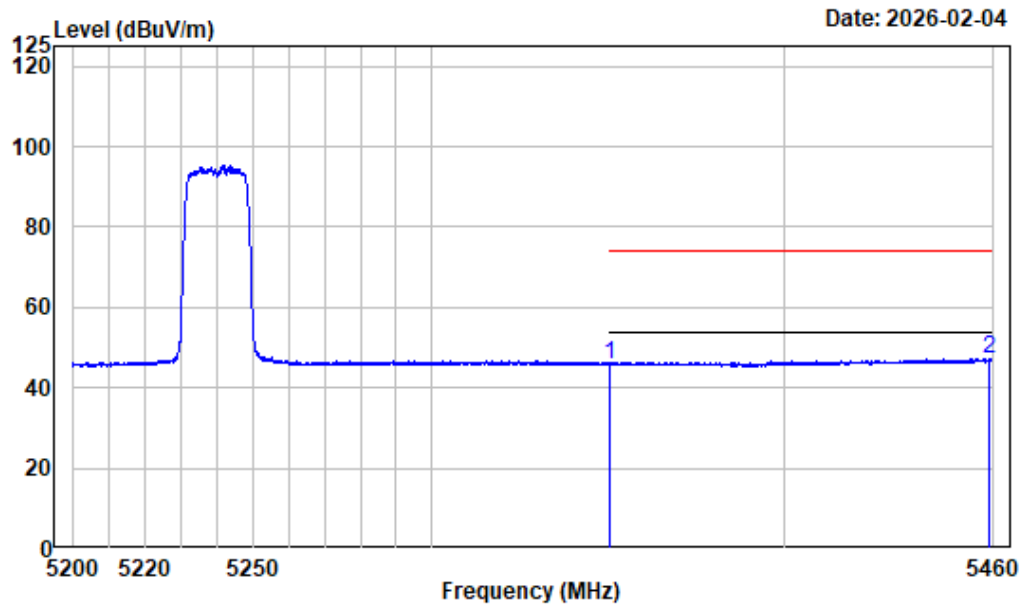

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.49	45.73	54.00	-8.27 Average
2	5458.928	-6.28	53.38	47.10	54.00	-6.90 Average


Left Band edge_Horizontal_Peak_802.11a_5180MHz_ANT1

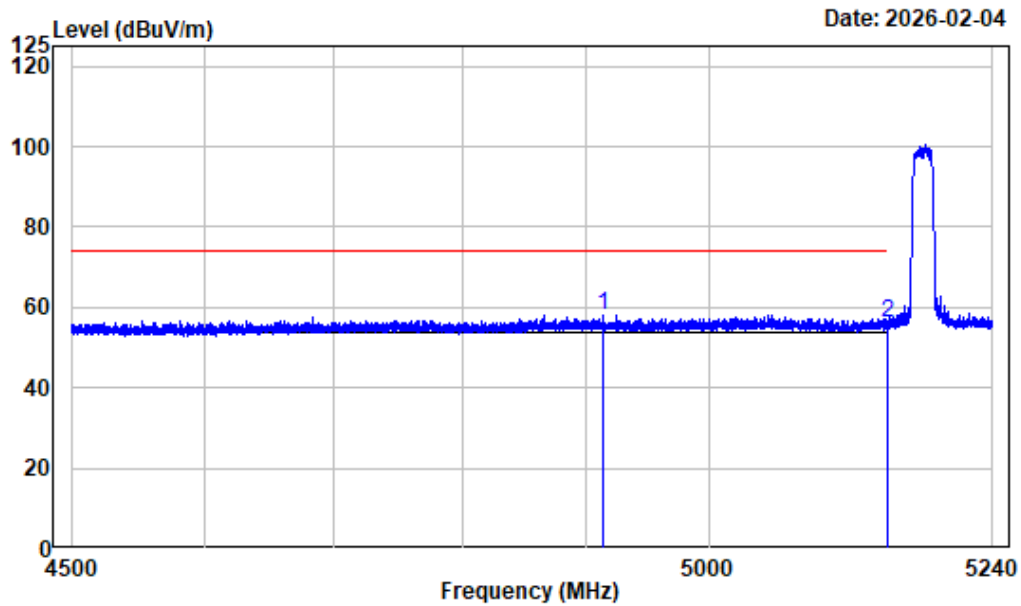

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4913.660	-7.61	65.82	58.21	74.00	-15.79	Peak
2 5150.000	-7.45	63.37	55.92	74.00	-18.08	Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz_ANT1

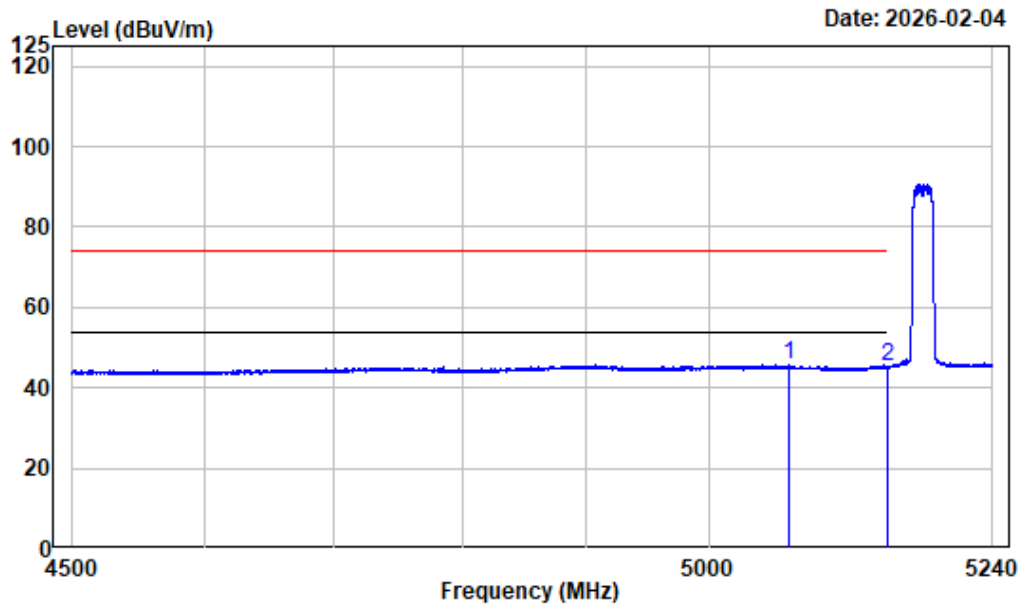

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5066.563	-7.35	52.99	45.64	54.00	-8.36 Average
2	5150.000	-7.45	52.74	45.29	54.00	-8.71 Average


Left Band edge_Vertical_Peak_802.11a_5180MHz_ANT1

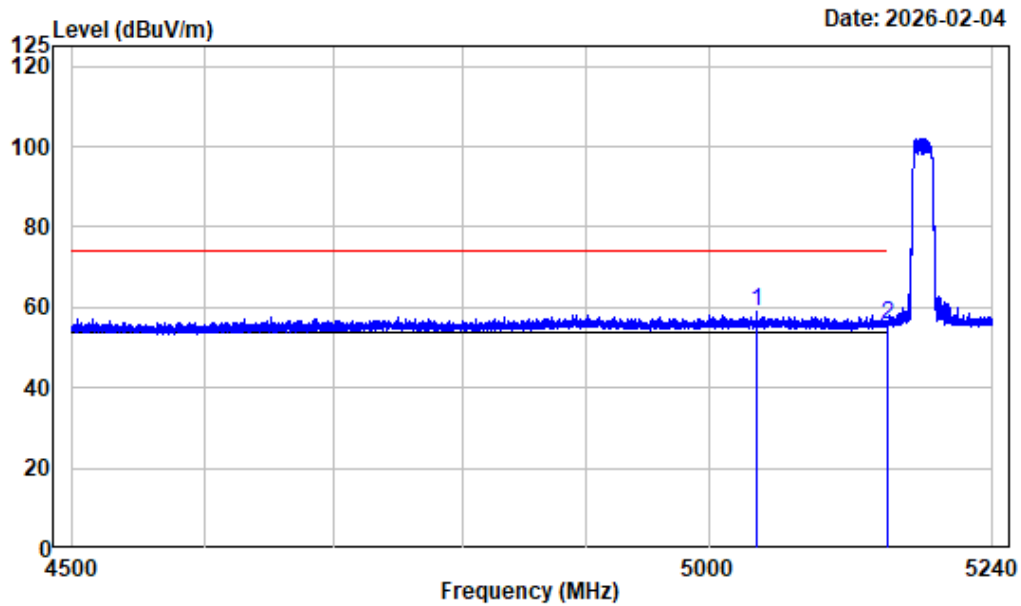

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5039.275	-7.29	66.22	58.93	74.00	-15.07 Peak
2	5150.000	-7.45	63.10	55.65	74.00	-18.35 Peak


Left Band edge_Vertical_Average_802.11a_5180MHz_ANT1

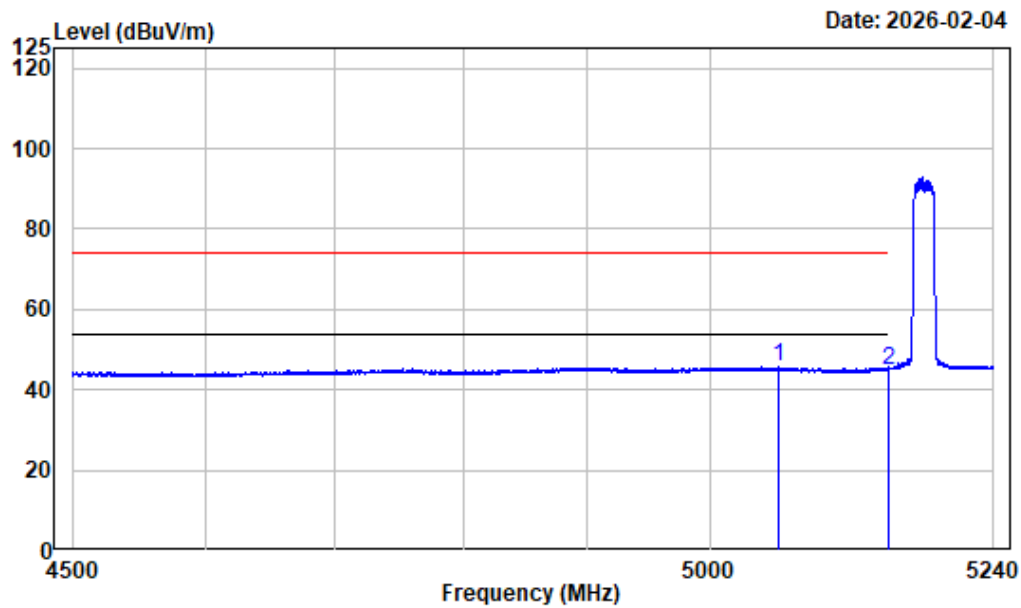

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5056.942	-7.31	52.96	45.65	54.00	-8.35 Average
2	5150.000	-7.45	52.46	45.01	54.00	-8.99 Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz_ANT1

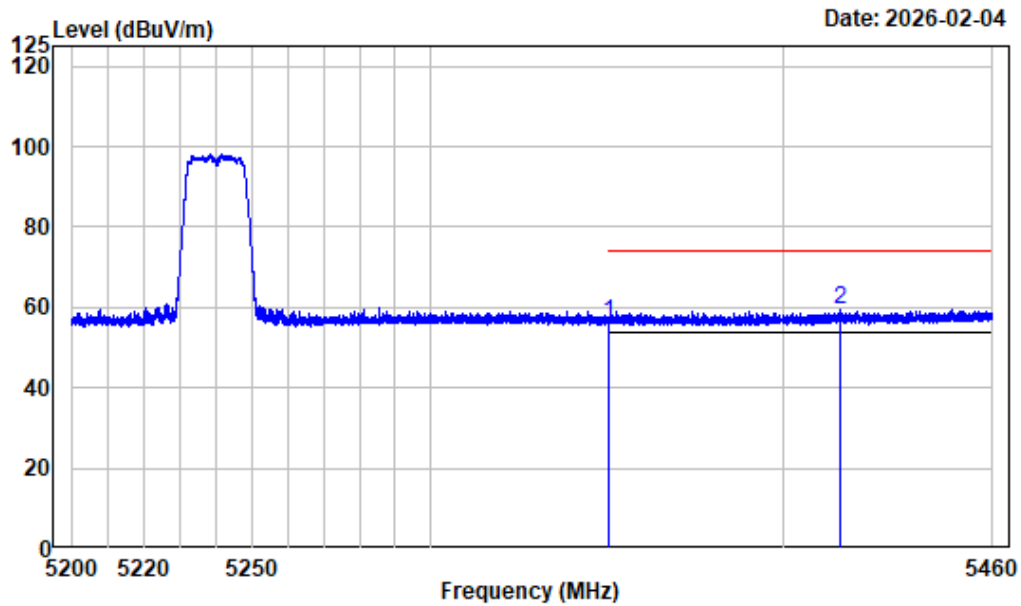

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	62.77	56.01	74.00	-17.99	Peak
2 5415.930	-6.52	65.86	59.34	74.00	-14.66	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz_ANT1

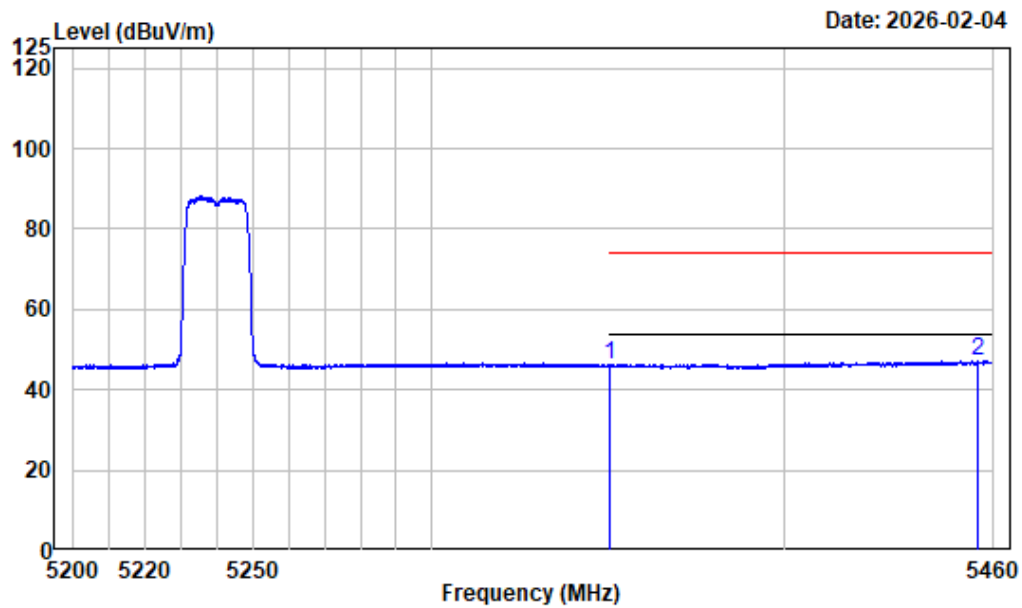

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.89	46.13	54.00	-7.87 Average
2	5455.385	-6.28	53.41	47.13	54.00	-6.87 Average


Right Band edge_Vertical_Peak_802.11a_5240MHz_ANT1

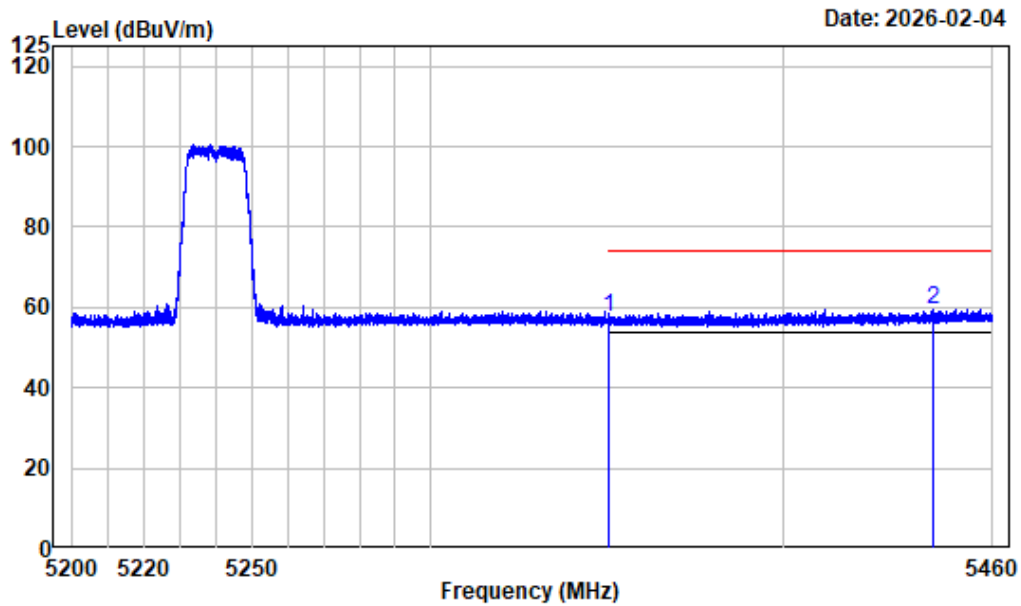

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	64.19	57.43	74.00	-16.57 Peak
2	5442.645	-6.35	65.79	59.44	74.00	-14.56 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz_ANT1

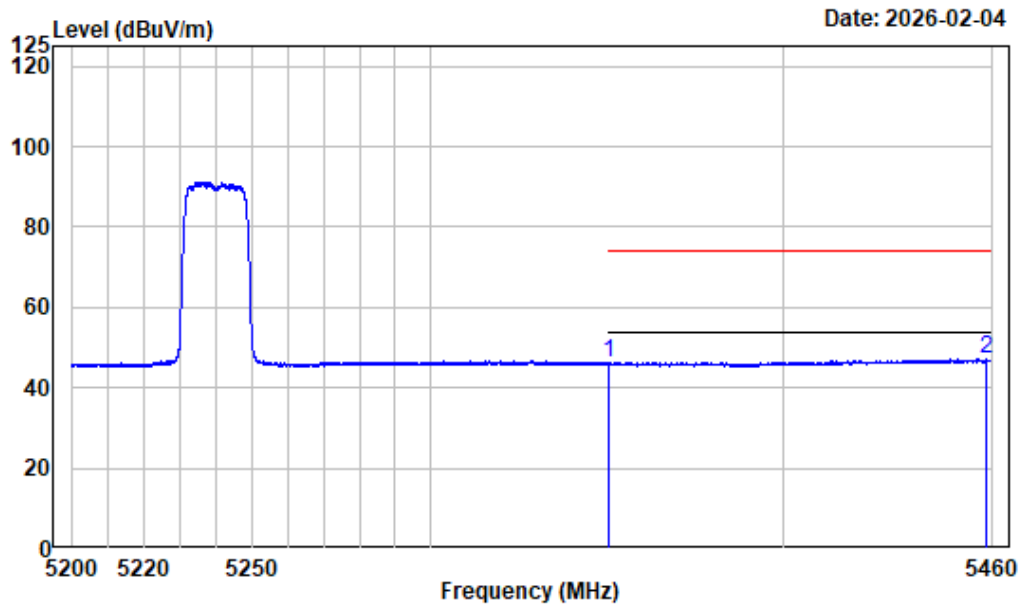

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.81	46.05	54.00	-7.95 Average
2	5458.277	-6.28	53.30	47.02	54.00	-6.98 Average


Left Band edge_Horizontal_Peak_802.11n-HT20

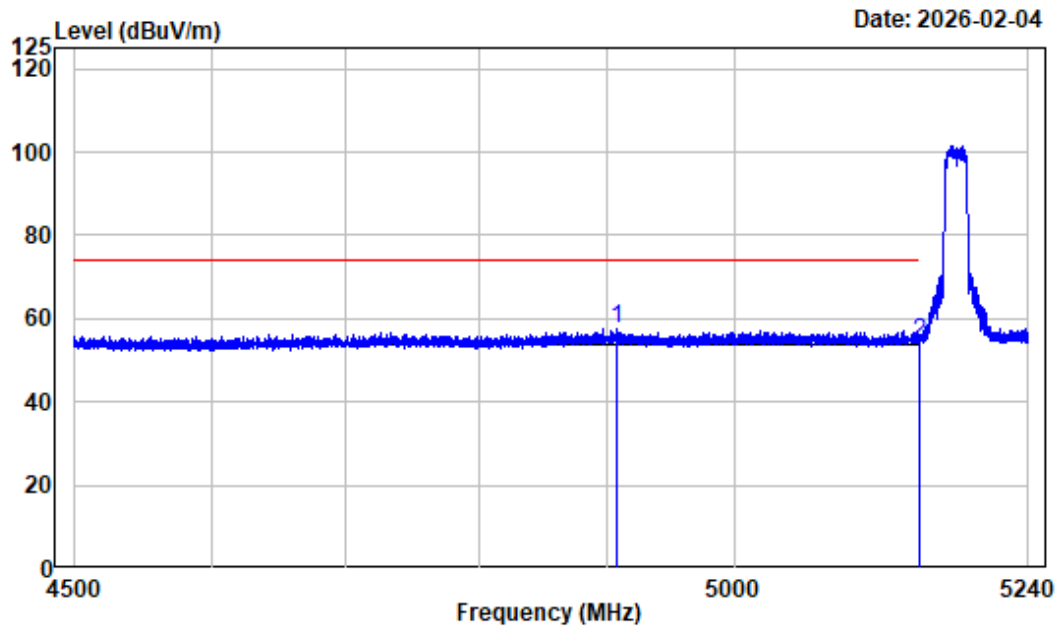

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4907.833	-7.61	65.32	57.71	74.00	-16.29	Peak
2	5150.000	-7.45	61.87	54.42	74.00	-19.58	Peak


Left Band edge_Horizontal_Average_802.11n-HT20

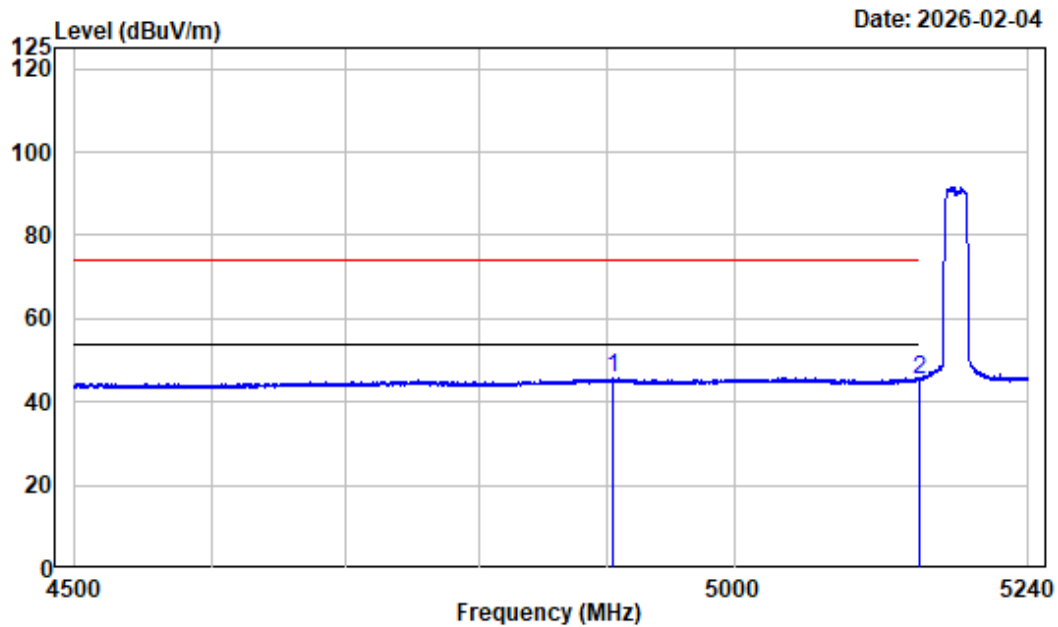

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.317	-7.60	53.49	45.89	54.00	-8.11	Average
2	5150.000	-7.45	52.79	45.34	54.00	-8.66	Average


Left Band edge_Vertical_Peak_802.11n-HT20

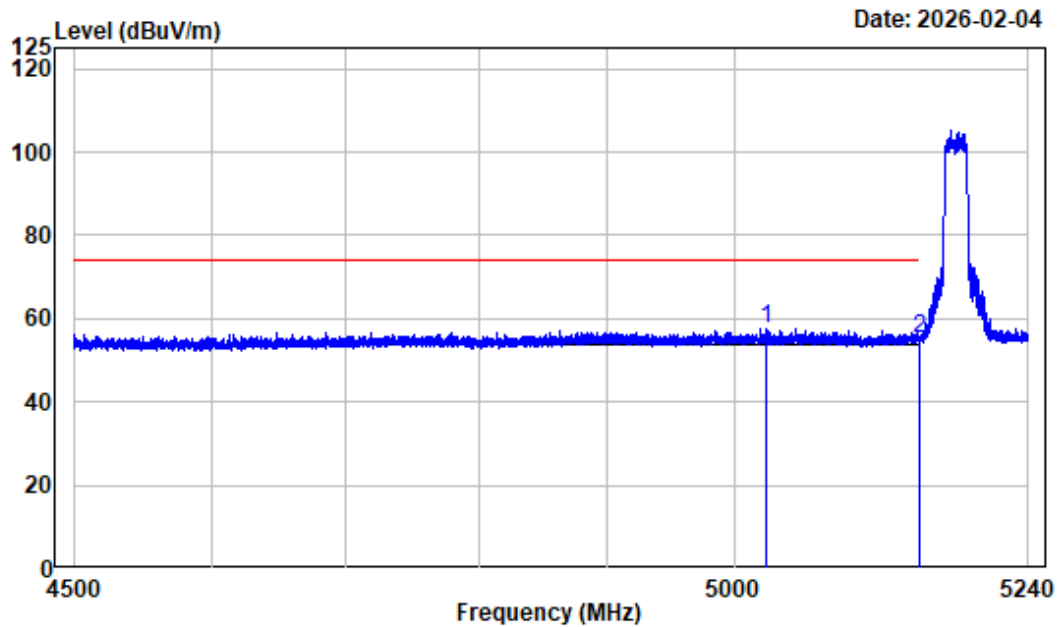

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5024.845	-7.29	65.05	57.76	74.00	-16.24	Peak
2	5150.000	-7.45	62.66	55.21	74.00	-18.79	Peak


Left Band edge_Vertical_Average_802.11n-HT20

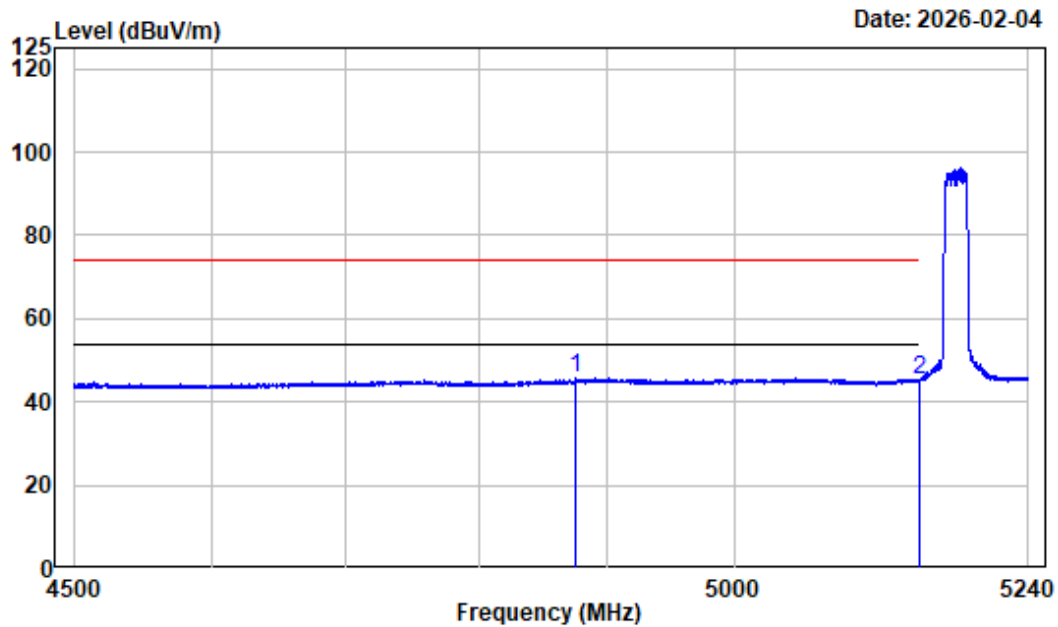

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.810	-7.68	53.29	45.61	54.00	-8.39	Average
2	5150.000	-7.45	52.74	45.29	54.00	-8.71	Average


Right Band edge_Horizontal_Peak_802.11n-HT20

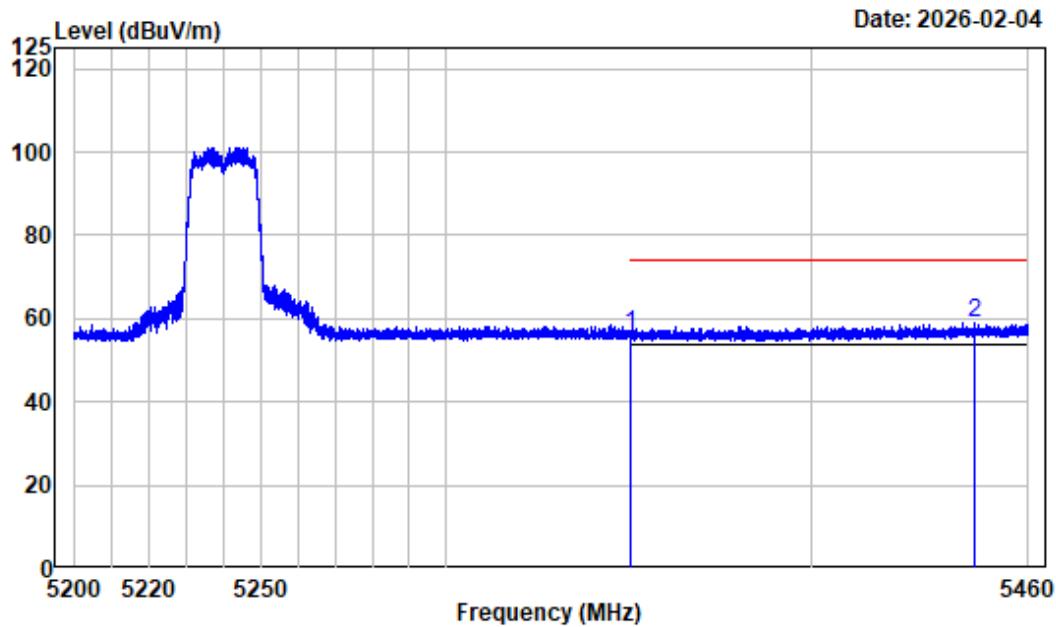

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.88	56.12	74.00	-17.88	Peak
2	5444.920	-6.33	65.13	58.80	74.00	-15.20	Peak


Right Band edge_Horizontal_Average_802.11n-HT20

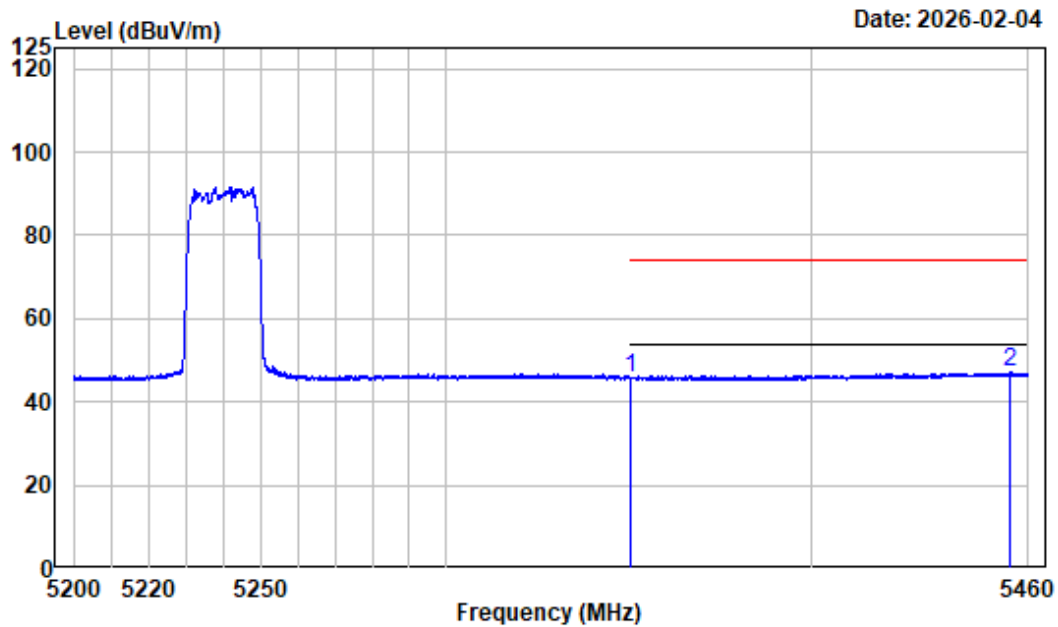

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.49	45.73	54.00	-8.27	Average
2	5454.995	-6.29	53.33	47.04	54.00	-6.96	Average


Right Band edge_Vertical_Peak_802.11n-HT20

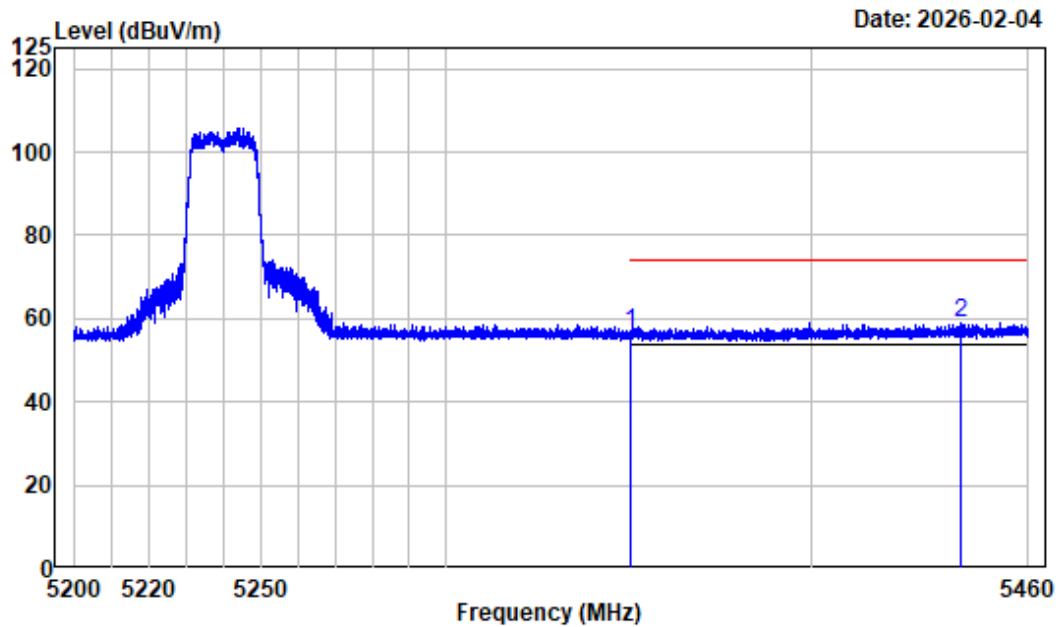

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.33	56.57	74.00	-17.43	Peak
2	5441.150	-6.36	65.48	59.12	74.00	-14.88	Peak


Right Band edge_Vertical_Average_802.11n-HT20

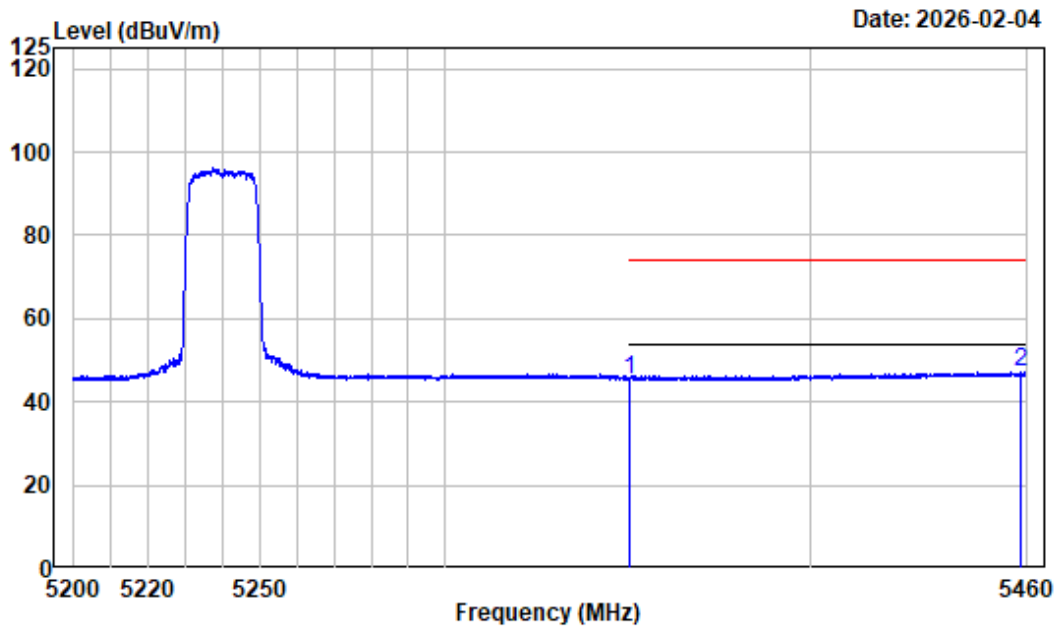

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.26	45.50	54.00	-8.50	Average
2	5458.245	-6.28	53.36	47.08	54.00	-6.92	Average


Left Band edge_Horizontal_Peak_802.11n-HT40

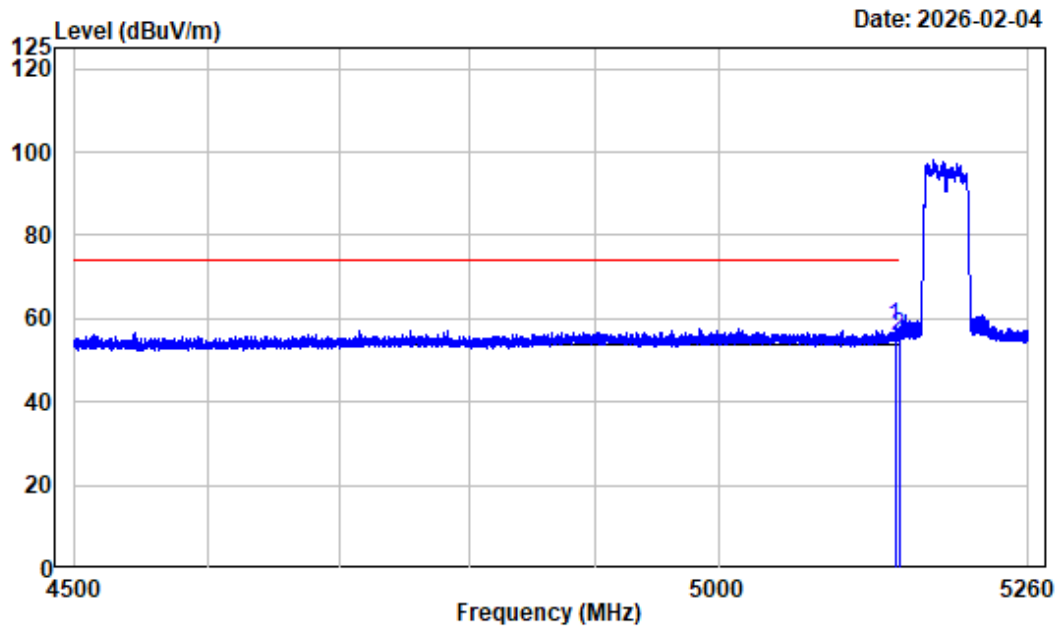

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.665	-7.45	65.30	57.85	74.00	-16.15	Peak
2	5150.000	-7.45	63.03	55.58	74.00	-18.42	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

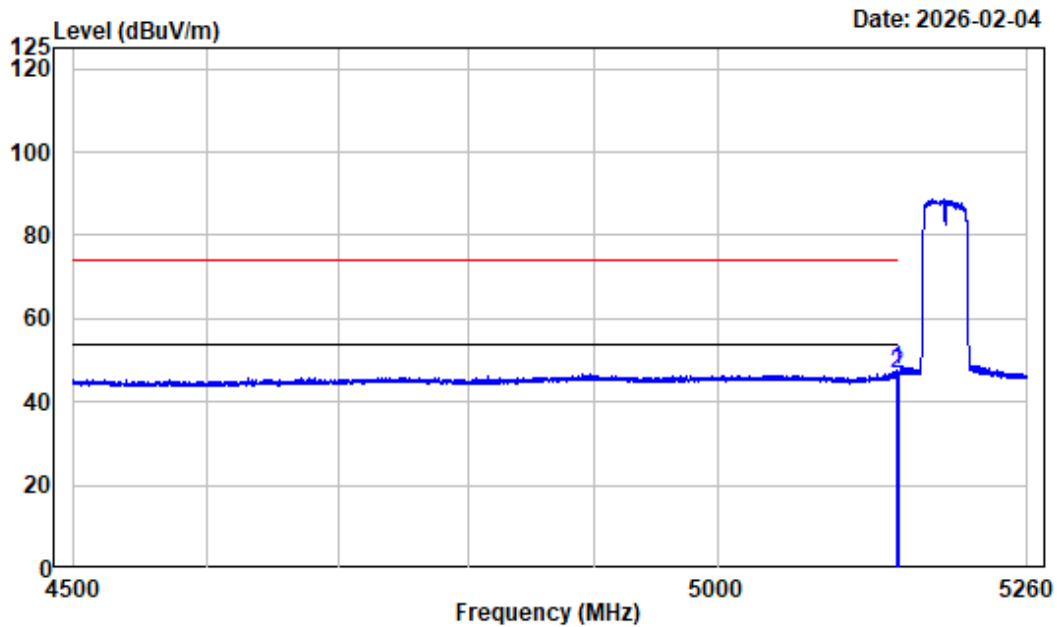

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.040	-7.45	55.28	47.83	54.00	-6.17	Average
2	5150.000	-7.45	54.11	46.66	54.00	-7.34	Average


Left Band edge_Vertical_Peak_802.11n-HT40

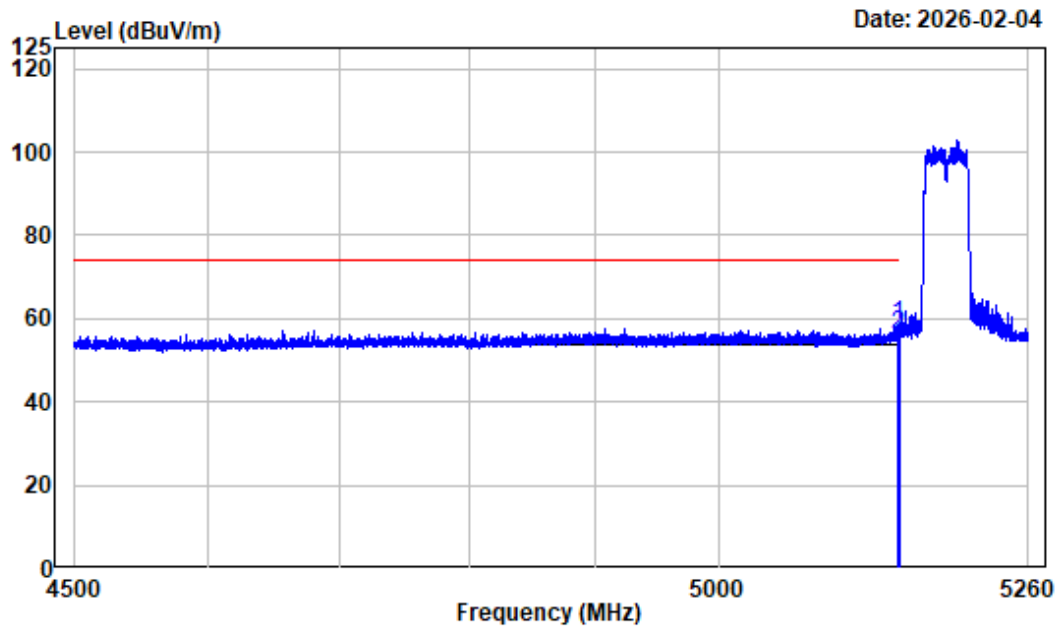

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.850	-7.45	66.16	58.71	74.00	-15.29	Peak
2	5150.000	-7.45	63.53	56.08	74.00	-17.92	Peak


Left Band edge_Vertical_Average_802.11n-HT40

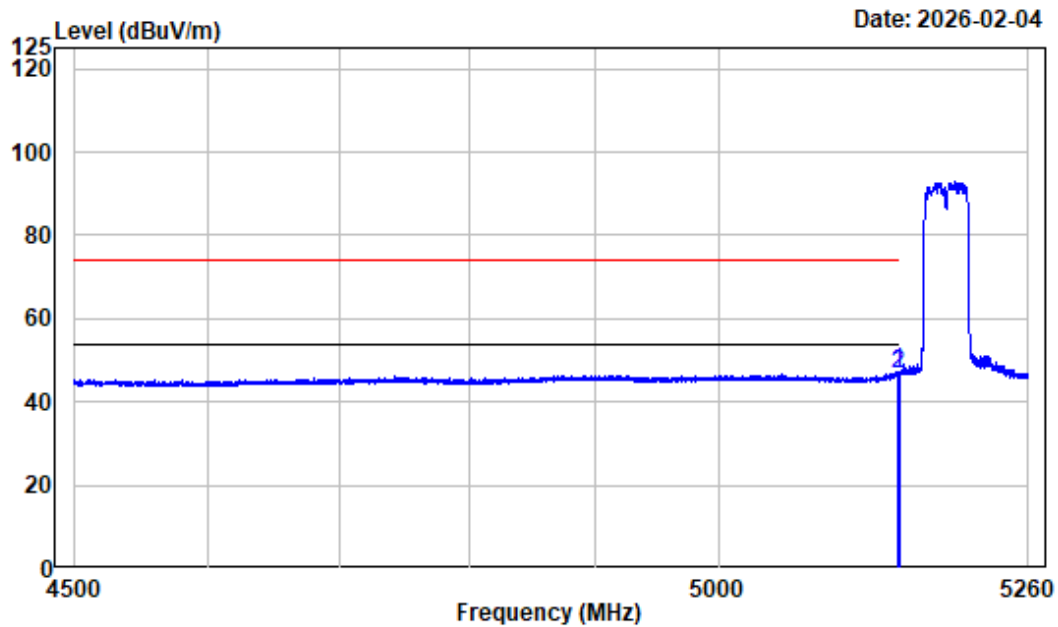

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.610	-7.45	54.65	47.20	54.00	-6.80	Average
2	5150.000	-7.45	54.10	46.65	54.00	-7.35	Average


Right Band edge_Horizontal_Peak_802.11n-HT40

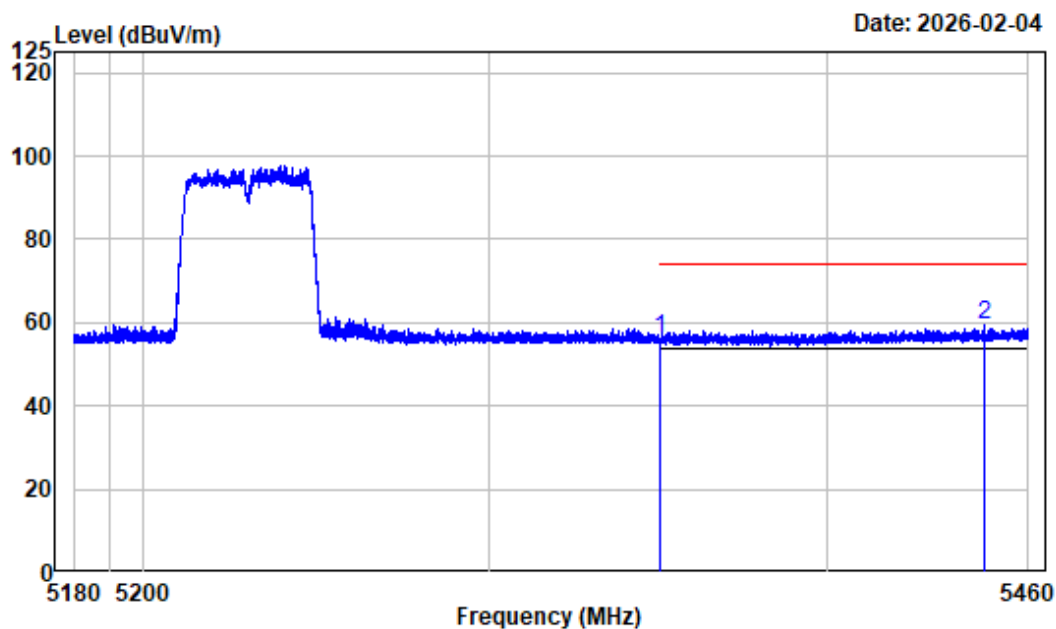

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.87	56.11	74.00	-17.89	Peak
2	5446.875	-6.33	65.64	59.31	74.00	-14.69	Peak


Right Band edge_Horizontal_Average_802.11n-HT40

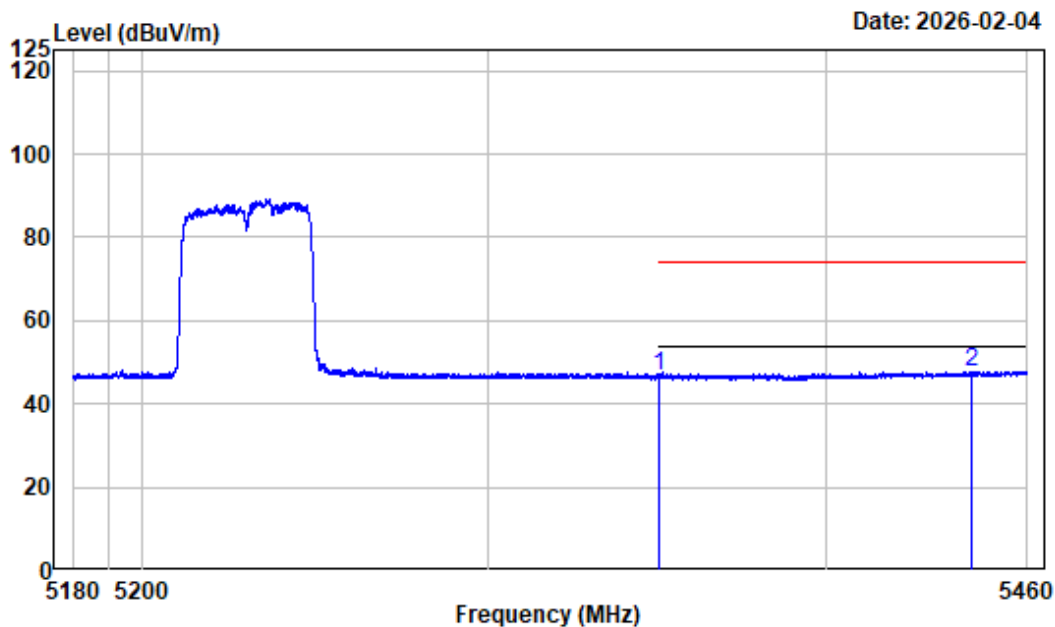

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.37	46.61	54.00	-7.39	Average
2	5443.305	-6.35	54.12	47.77	54.00	-6.23	Average


Right Band edge_Vertical_Peak_802.11n-HT40

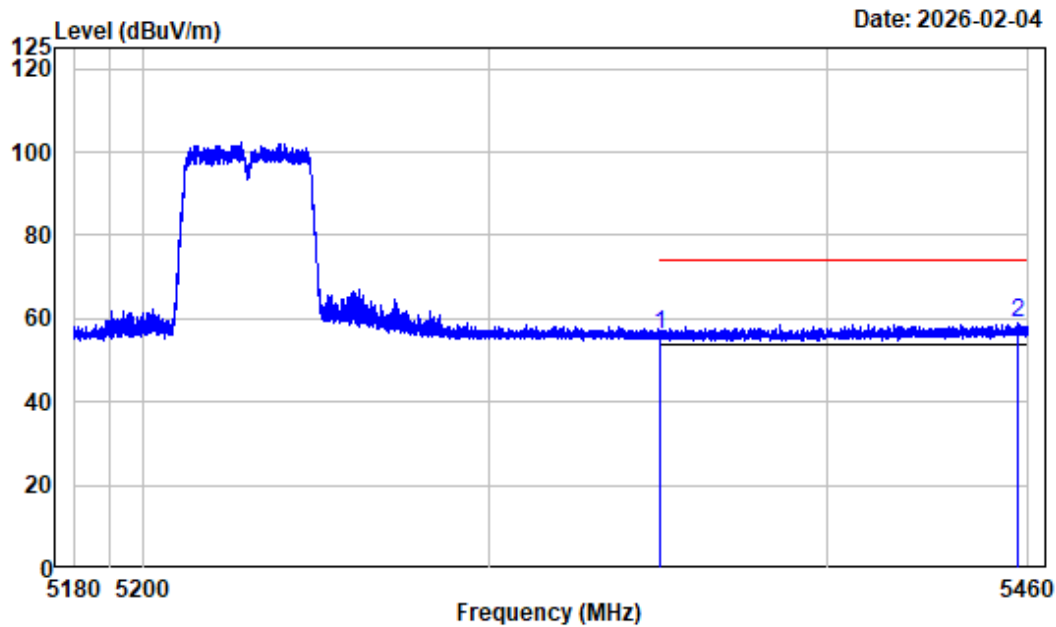

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.90	56.14	74.00	-17.86	Peak
2	5456.675	-6.28	65.13	58.85	74.00	-15.15	Peak


Right Band edge_Vertical_Average_802.11n-HT40

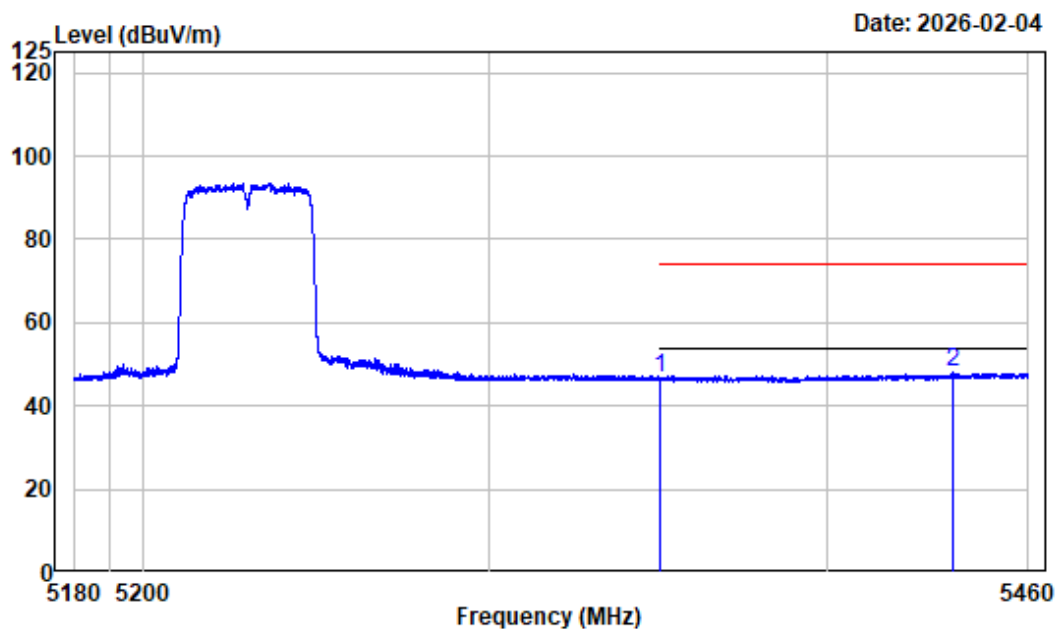

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.44	46.68	54.00	-7.32	Average
2	5437.600	-6.37	54.48	48.11	54.00	-5.89	Average


Left Band edge_Horizontal_Peak_802.11ac-vht20_5180MHz

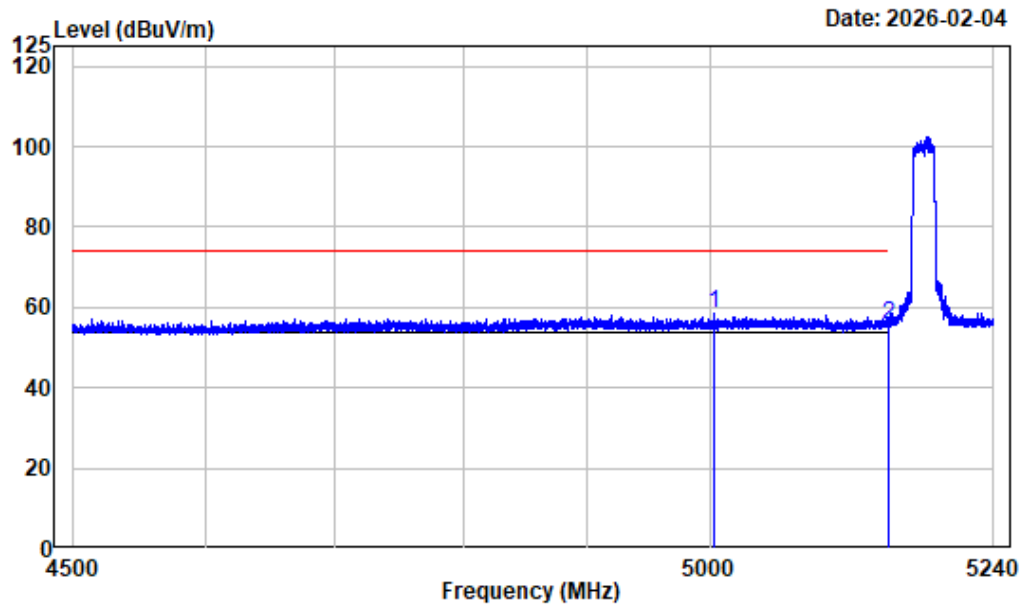

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5003.385	-7.29	65.61	58.32	74.00	-15.68 Peak
2	5150.000	-7.45	62.93	55.48	74.00	-18.52 Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5180MHz

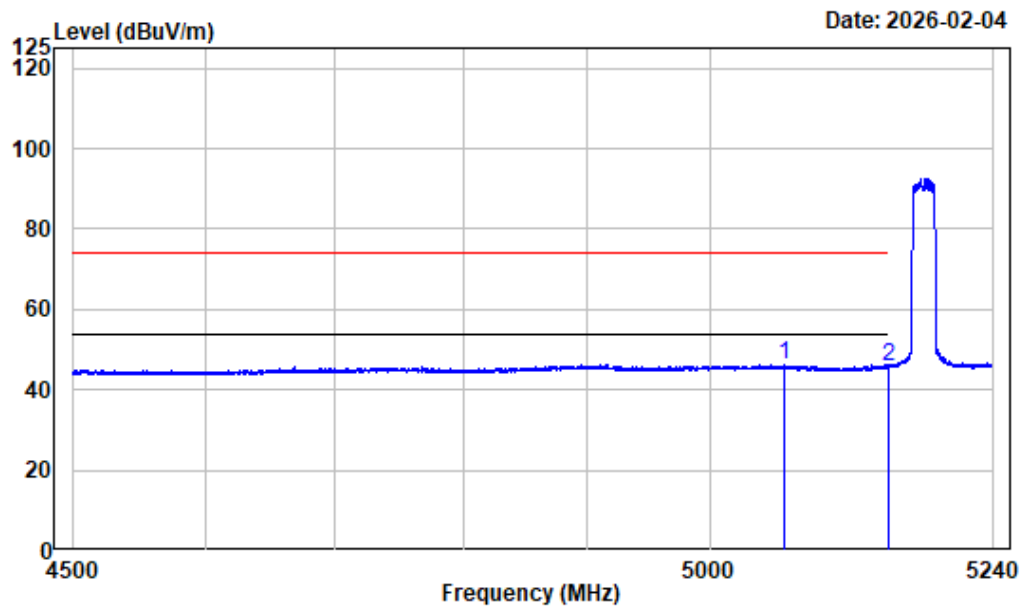

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5061.567	-7.33	53.63	46.30	54.00	-7.70 Average
2	5150.000	-7.45	53.12	45.67	54.00	-8.33 Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5180MHz

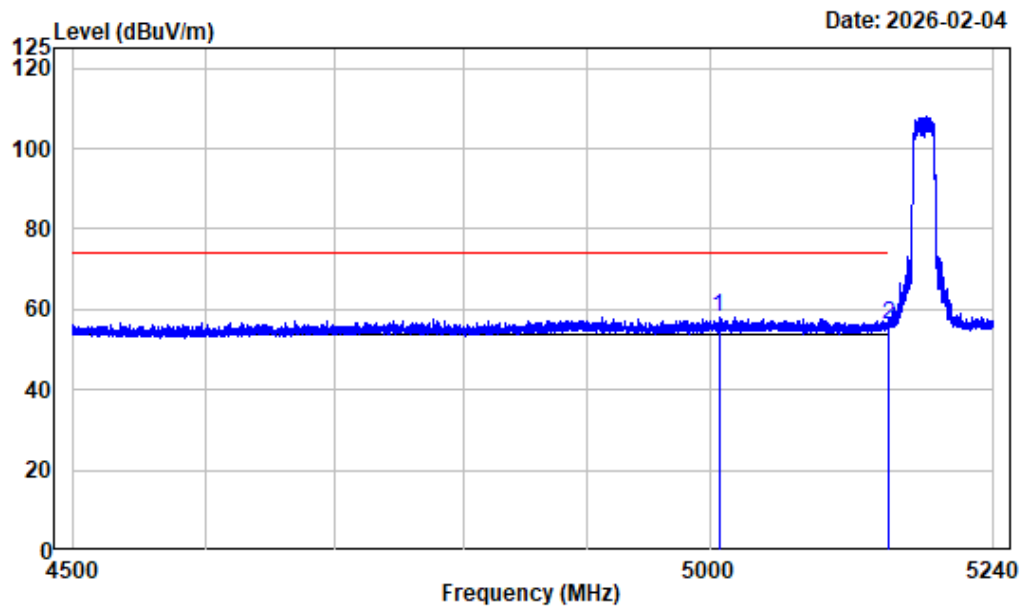

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5007.455	-7.29	65.46	58.17	74.00	-15.83	Peak
2 5150.000	-7.45	63.51	56.06	74.00	-17.94	Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5180MHz

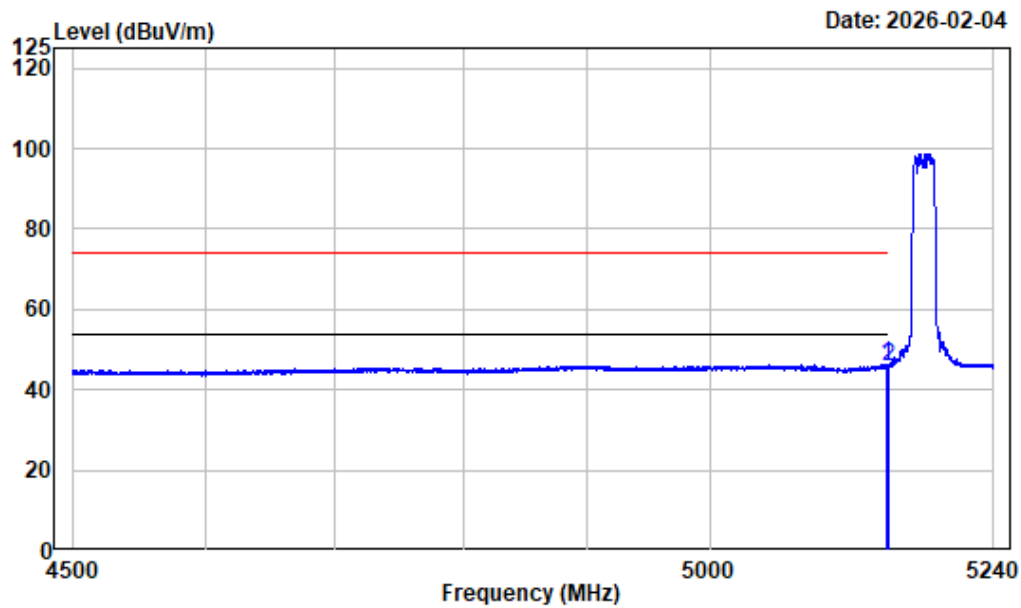

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.870	-7.45	53.86	46.41	54.00	-7.59 Average
2	5150.000	-7.45	53.27	45.82	54.00	-8.18 Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5240MHz

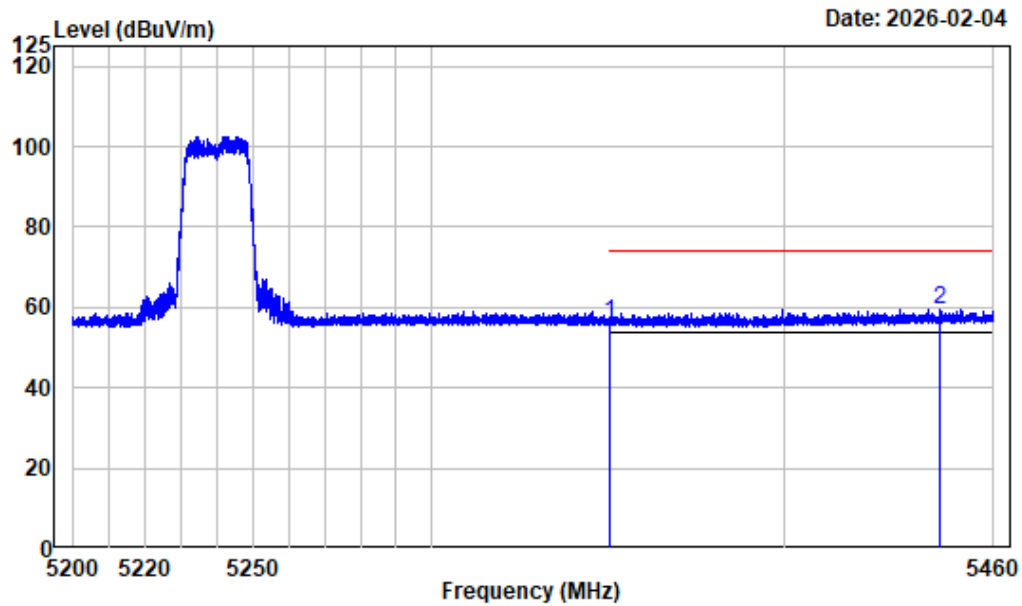

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.79	56.03	74.00	-17.97 Peak
2	5444.530	-6.34	65.90	59.56	74.00	-14.44 Peak


Right Band edge_Horizontal_Average_802.11ac-vht20_5240MHz

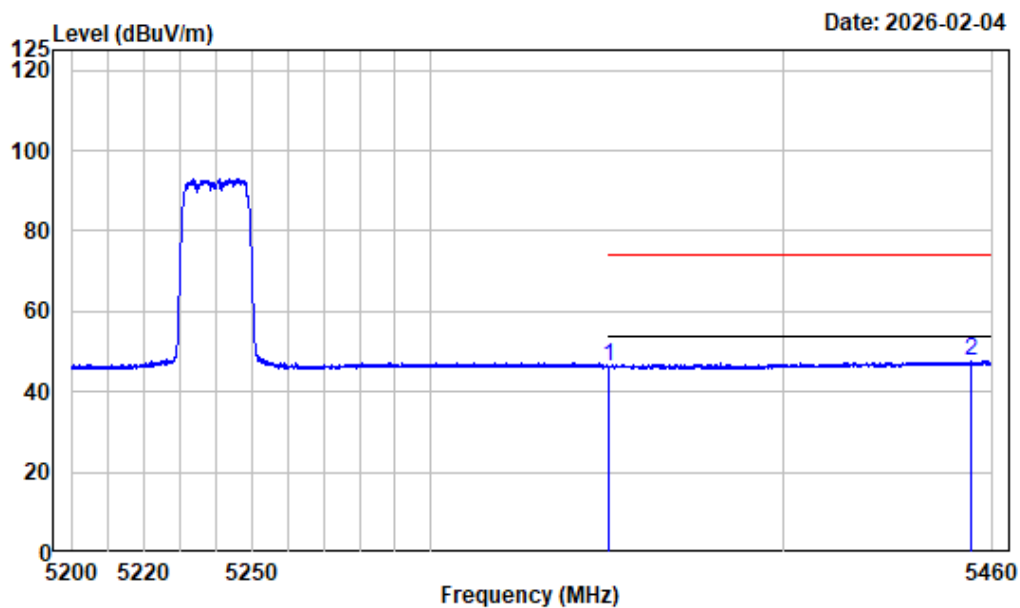

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.86	46.10	54.00	-7.90 Average
2	5453.987	-6.29	54.00	47.71	54.00	-6.29 Average


Right Band edge_Vertical_Peak_802.11ac-vht20_5240MHz

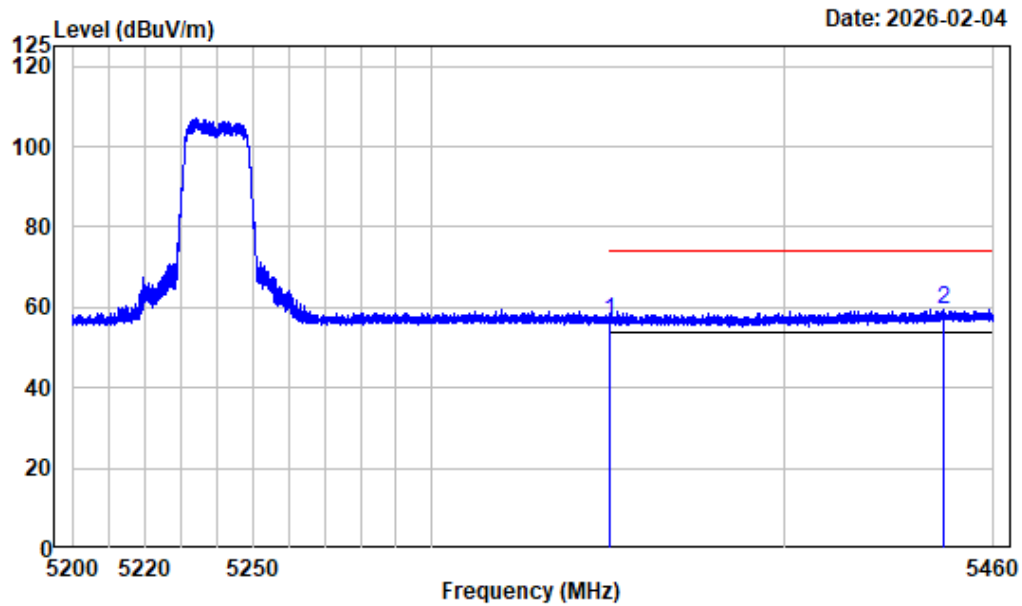

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.53	56.77	74.00	-17.23 Peak
2	5445.667	-6.33	65.84	59.51	74.00	-14.49 Peak


Right Band edge_Vertical_Average_802.11ac-vht20_5240MHz

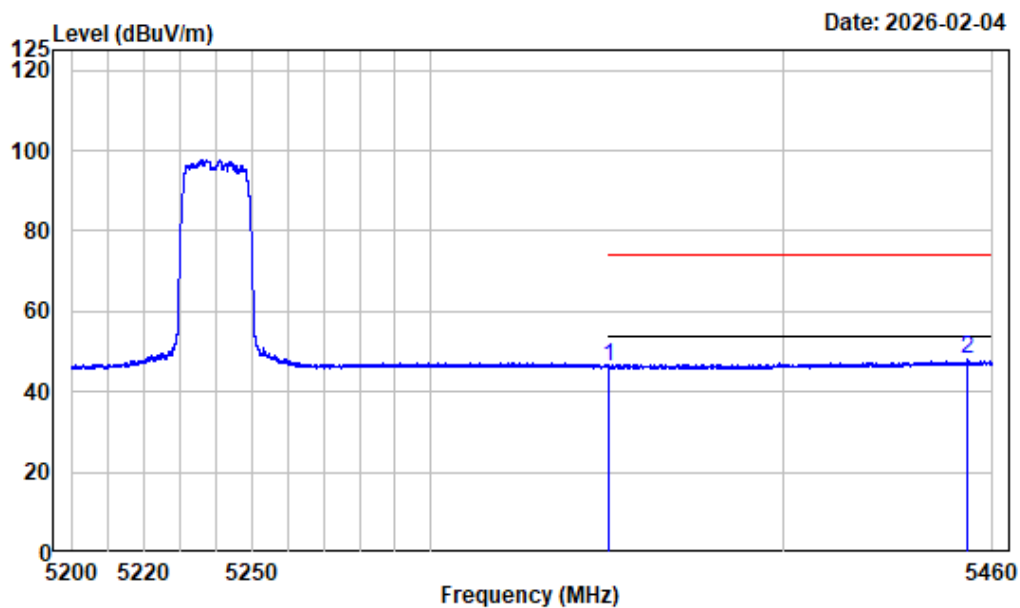

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.18	46.42	54.00	-7.58 Average
2	5452.980	-6.29	54.27	47.98	54.00	-6.02 Average


Left Band edge_Horizontal_Peak_802.11ac-vht40_5190MHz

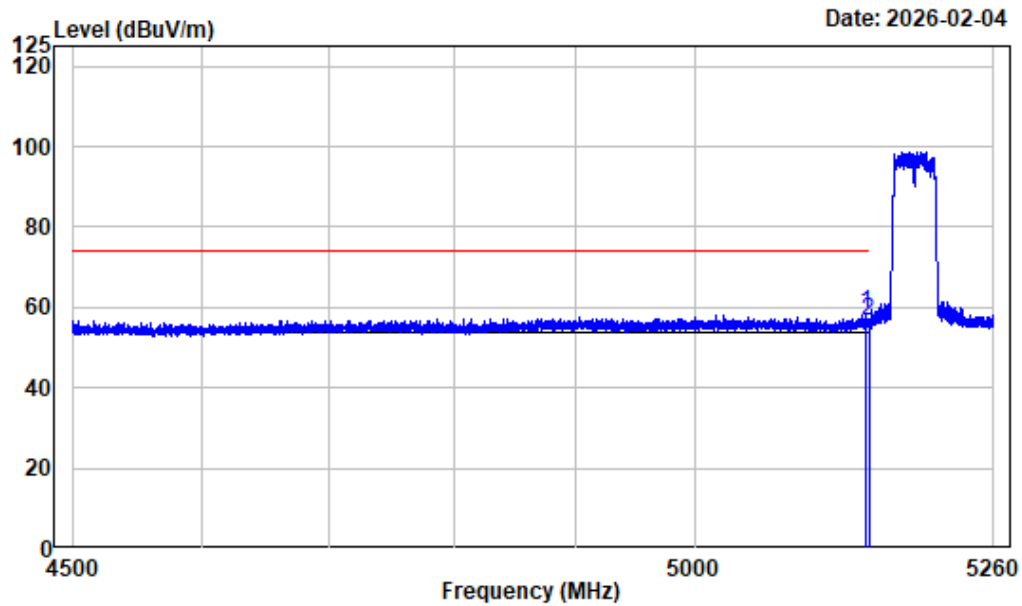

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.045	-7.45	65.72	58.27	74.00	-15.73	Peak
2 5150.000	-7.45	64.10	56.65	74.00	-17.35	Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5190MHz

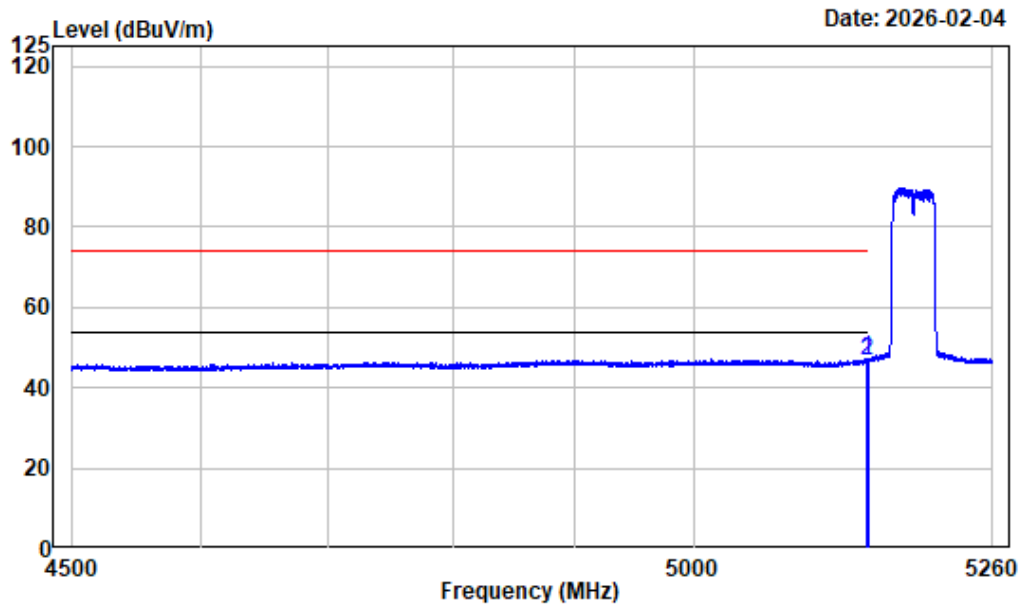

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.895	-7.45	54.72	47.27	54.00	-6.73 Average
2	5150.000	-7.45	54.02	46.57	54.00	-7.43 Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5190MHz

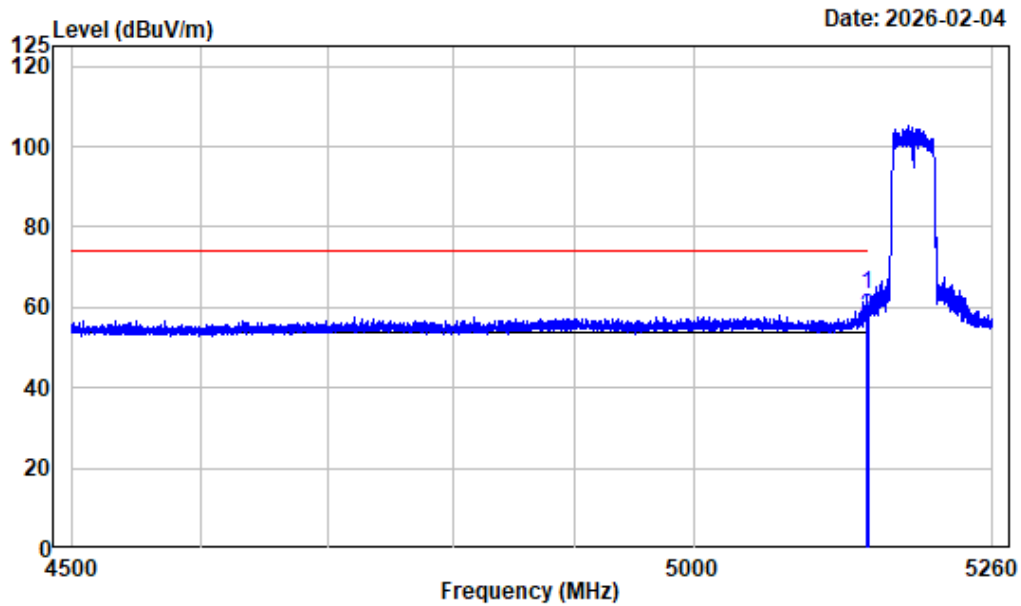

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.705	-7.45	70.64	63.19	74.00	-10.81	Peak
2 5150.000	-7.45	65.04	57.59	74.00	-16.41	Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5190MHz

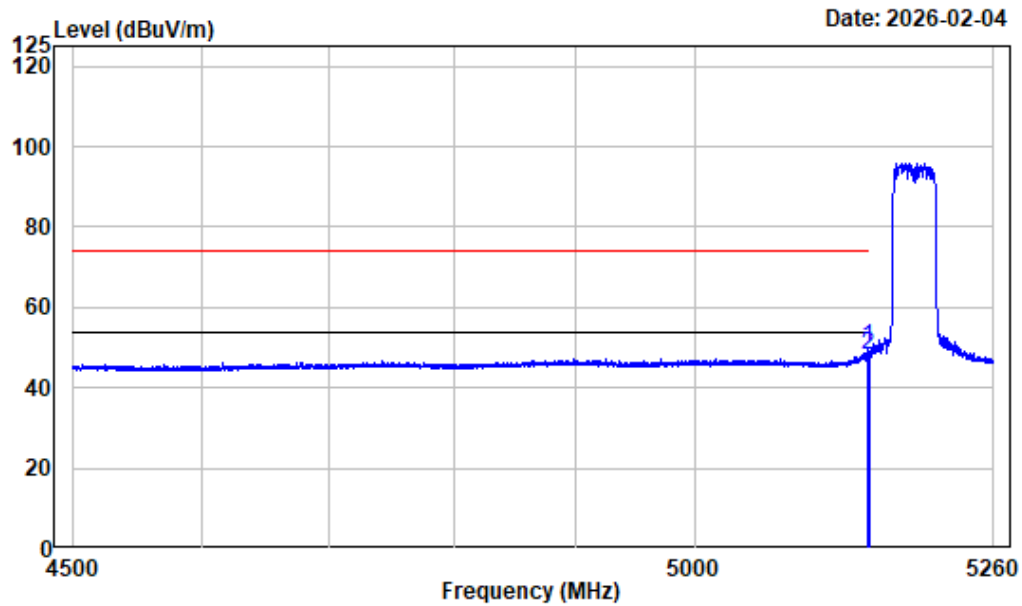

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.660	-7.45	57.40	49.95	54.00	-4.05 Average
2	5150.000	-7.45	55.54	48.09	54.00	-5.91 Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5230MHz

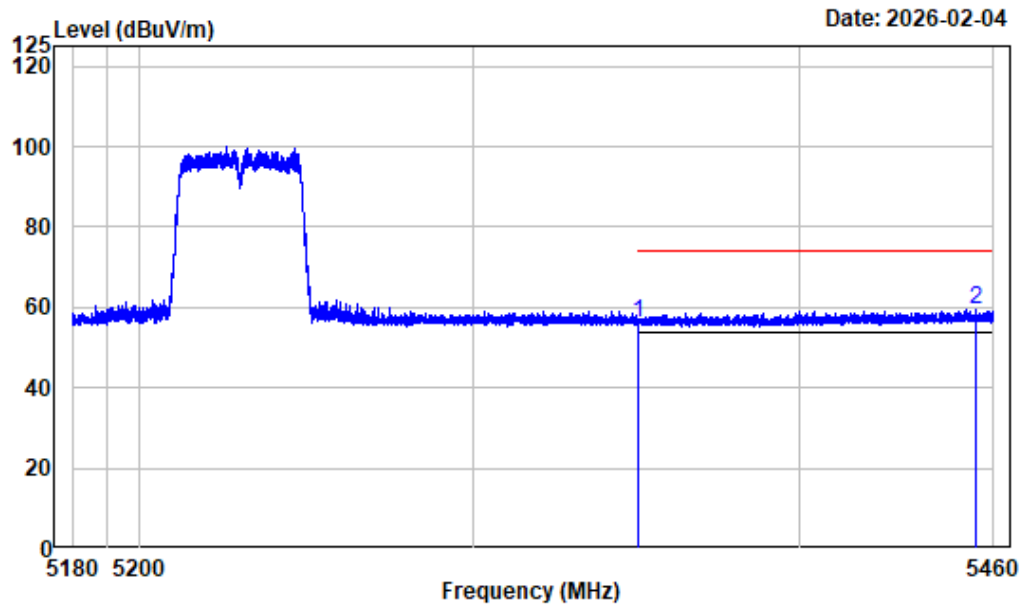

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.00	56.24	74.00	-17.76 Peak
2	5454.575	-6.29	65.72	59.43	74.00	-14.57 Peak


Right Band edge_Horizontal_Average_802.11ac-vht40_5230MHz

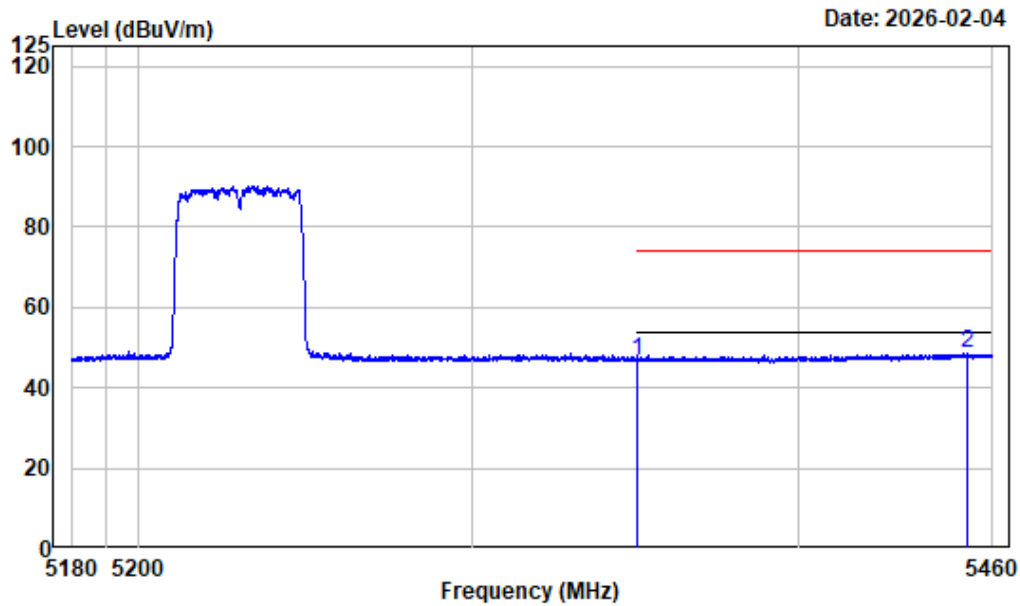

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	53.59	46.83	54.00	-7.17 Average
2	5452.300	-6.29	54.74	48.45	54.00	-5.55 Average


Right Band edge_Vertical_Peak_802.11ac-vht40_5230MHz

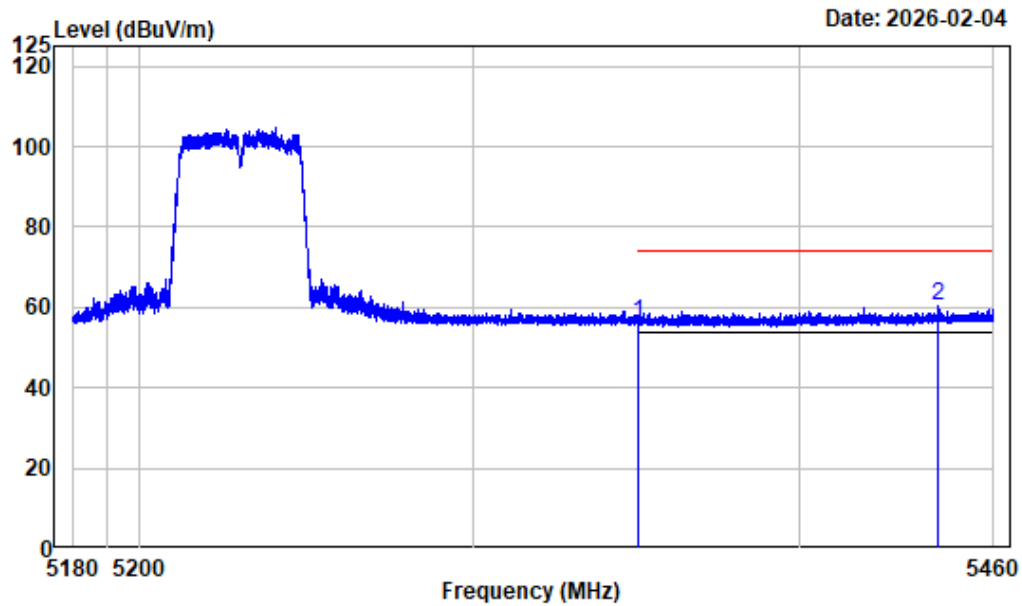

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.67	55.91	74.00	-18.09 Peak
2	5442.885	-6.35	66.60	60.25	74.00	-13.75 Peak


Right Band edge_Vertical_Average_802.11ac-vht40_5230MHz

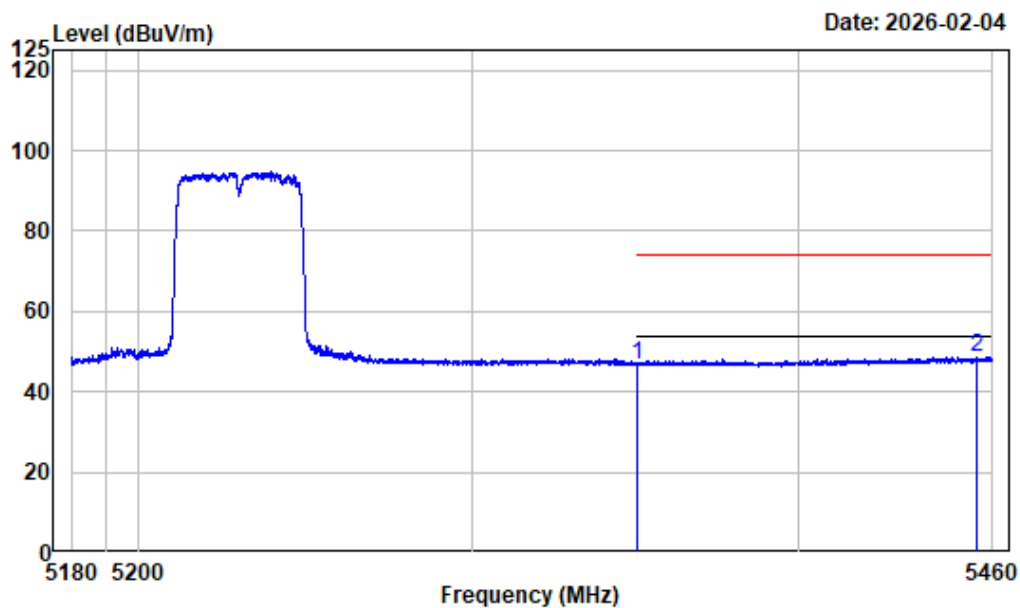

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.66	46.90	54.00	-7.10 Average
2	5455.380	-6.28	54.75	48.47	54.00	-5.53 Average


Left Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

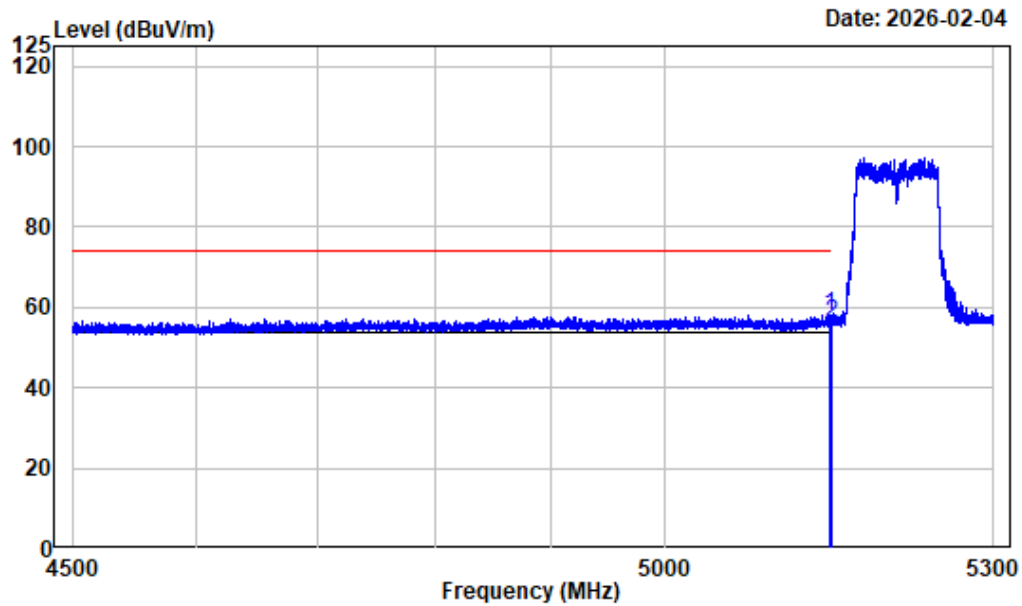

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.600	-7.45	65.50	58.05	74.00	-15.95	Peak
2 5150.000	-7.45	63.76	56.31	74.00	-17.69	Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

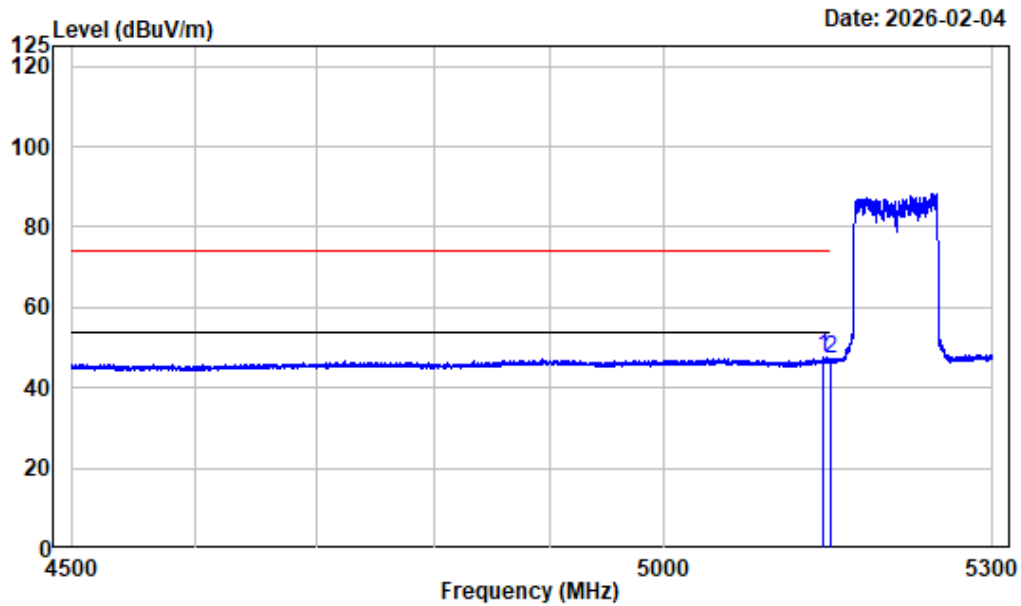

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5142.600	-7.46	55.06	47.60	54.00	-6.40 Average
2	5150.000	-7.45	54.61	47.16	54.00	-6.84 Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

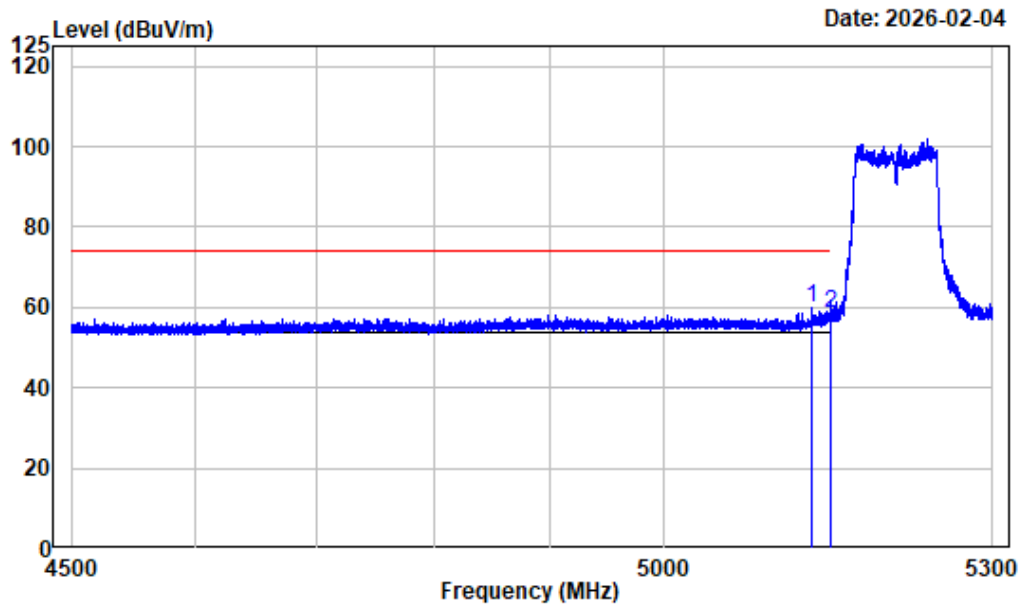

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5132.800	-7.46	67.21	59.75	74.00	-14.25	Peak
2 5150.000	-7.45	65.98	58.53	74.00	-15.47	Peak


Left Band edge_Vertical_Average_802.11ac-vht80_5210MHz

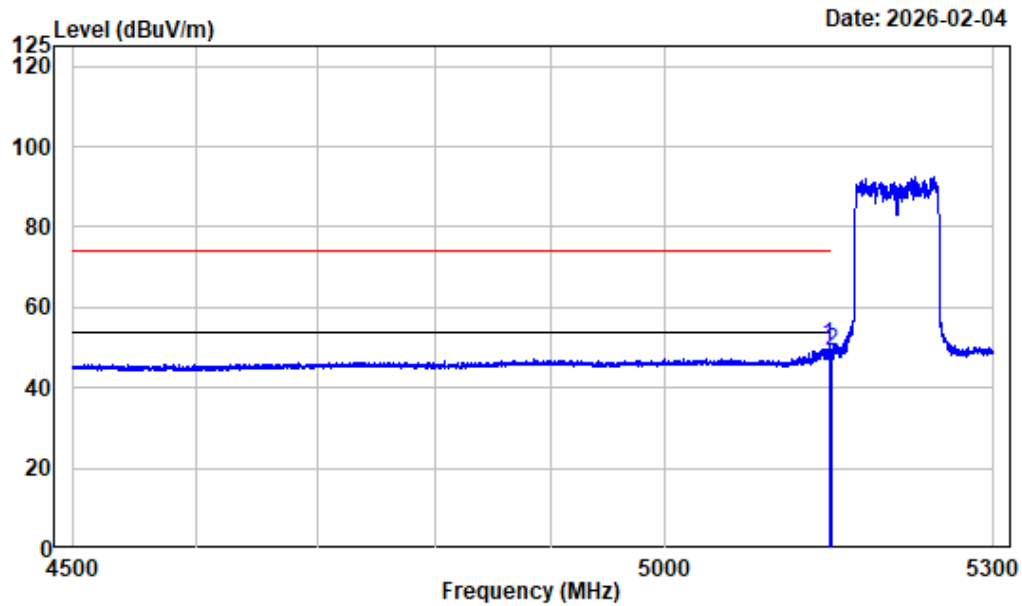

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5147.300	-7.45	58.02	50.57	54.00	-3.43 Average
2	5150.000	-7.45	56.61	49.16	54.00	-4.84 Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

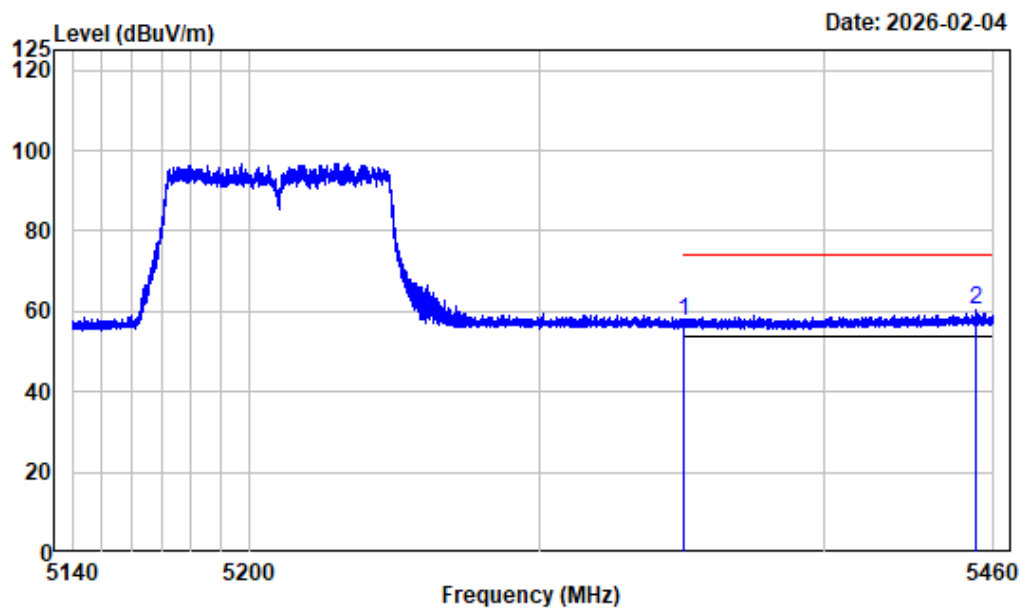

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	64.10	57.34	74.00	-16.66	Peak
2	5453.880	-6.29	66.48	60.19	74.00	-13.81	Peak


Right Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

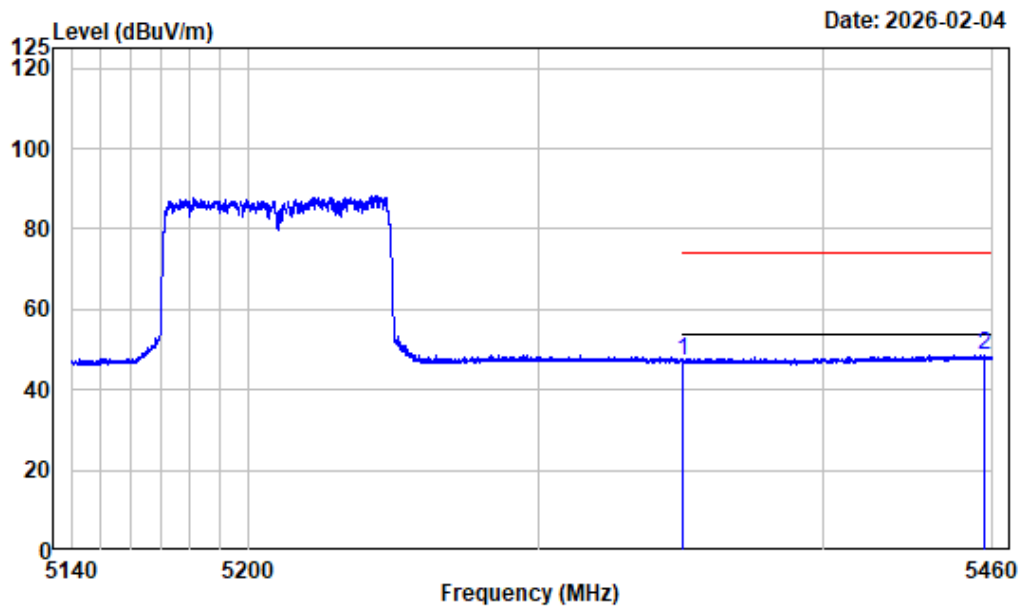

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	54.14	47.38	54.00	-6.62 Average
2	5456.840	-6.28	54.91	48.63	54.00	-5.37 Average


Right Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

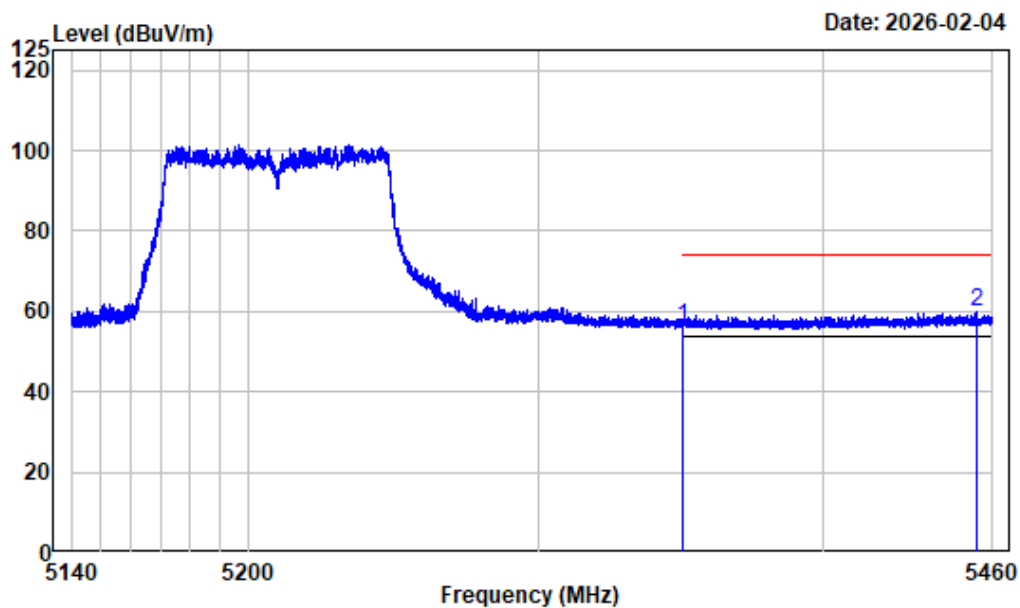

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.10	56.34	74.00	-17.66 Peak
2	5454.080	-6.29	66.24	59.95	74.00	-14.05 Peak


Right Band edge_Vertical_Average_802.11ac-vht80_5210MHz

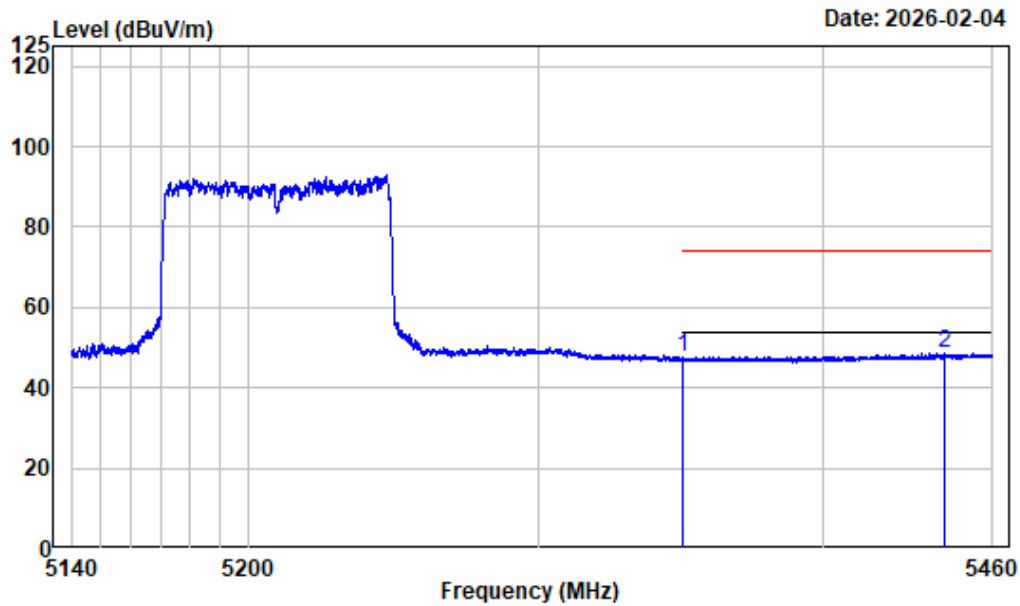

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	54.34	47.58	54.00	-6.42 Average
2	5443.040	-6.35	55.01	48.66	54.00	-5.34 Average


Left Band edge_Horizontal_Peak_802.11ax20_5180MHz

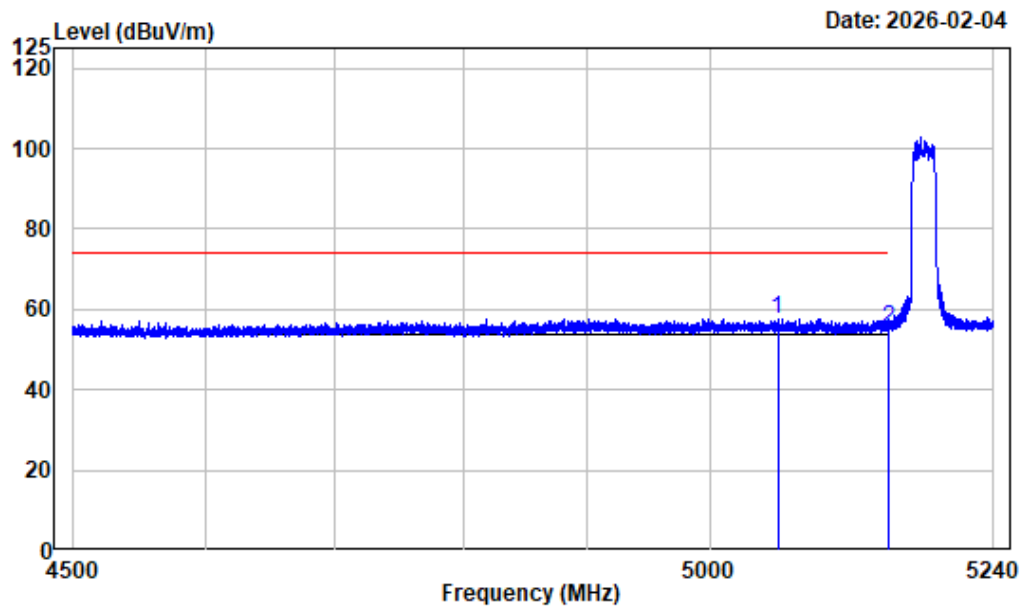

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5056.388	-7.31	65.02	57.71	74.00	-16.29 Peak
2	5150.000	-7.45	62.64	55.19	74.00	-18.81 Peak


Left Band edge_Horizontal_Average_802.11a20_5180MHz

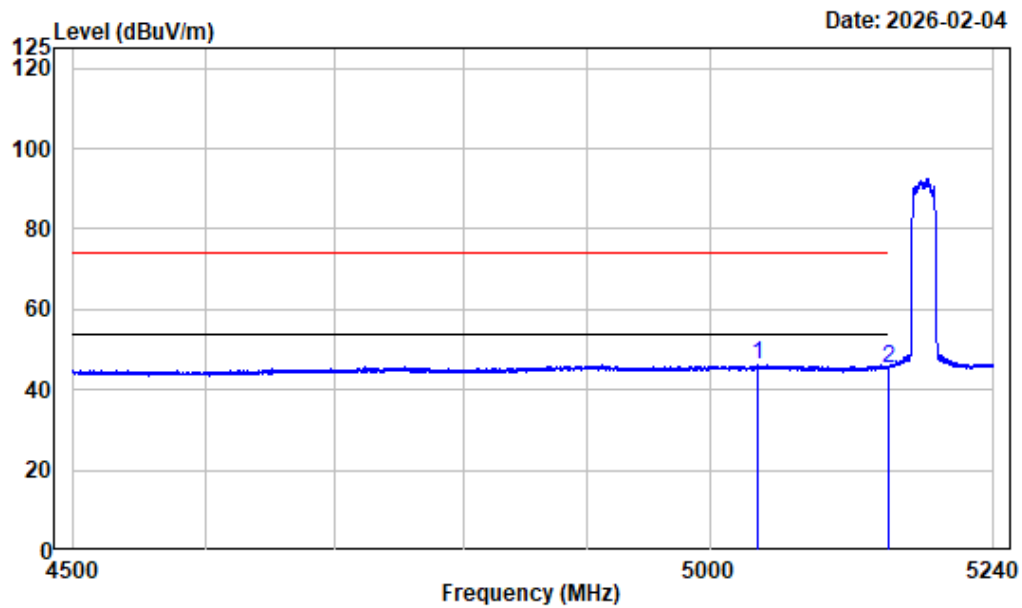

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5039.737	-7.29	53.39	46.10	54.00	-7.90	Average
2 5150.000	-7.45	52.72	45.27	54.00	-8.73	Average


Left Band edge_Vertical_Peak_802.11ax20_5180MHz

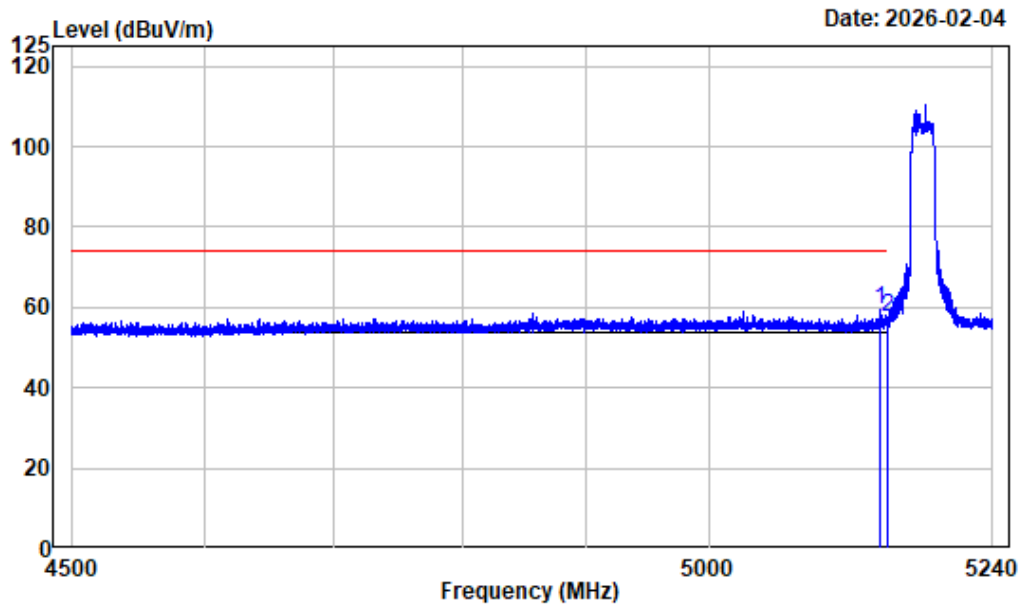

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5144.263	-7.46	66.76	59.30	74.00	-14.70 Peak
2	5150.000	-7.45	65.10	57.65	74.00	-16.35 Peak


Left Band edge_Vertical_Average_802.11ax20_5180MHz

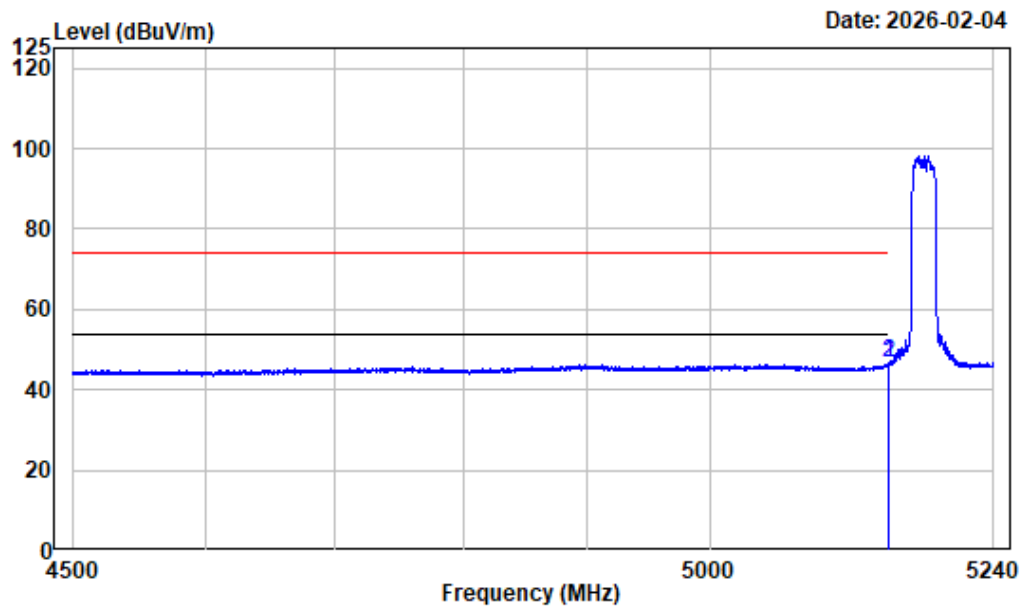

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5149.905	-7.45	54.30	46.85	54.00	-7.15 Average
2	5150.000	-7.45	54.24	46.79	54.00	-7.21 Average


Right Band edge_Horizontal_Peak_802.11ax20_5240MHz

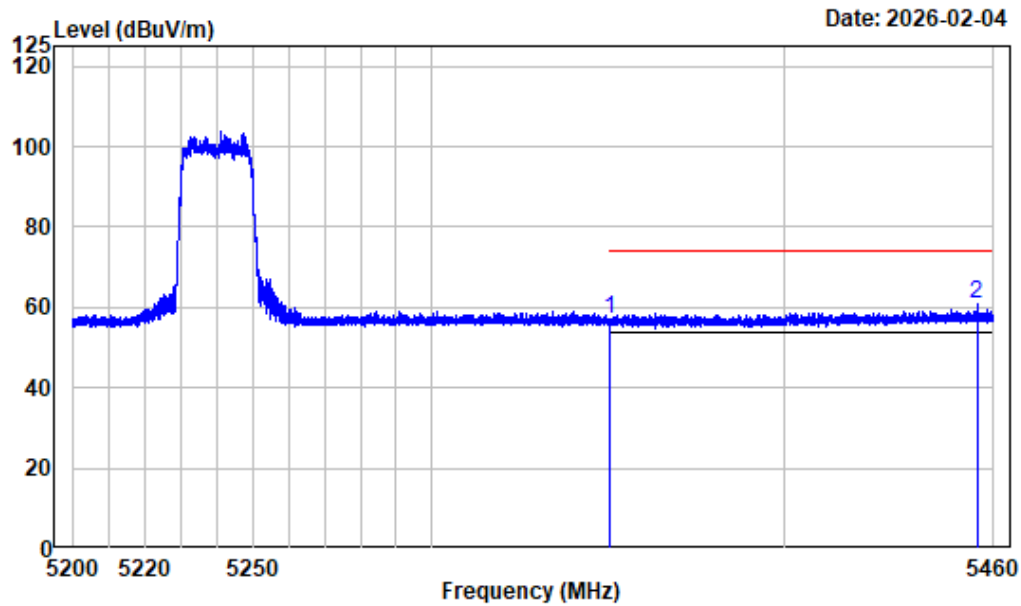

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.88	57.12	74.00	-16.88	Peak
2	5455.190	-6.29	66.91	60.62	74.00	-13.38	Peak


Right Band edge_Horizontal_Average_802.11ax20_5240MHz

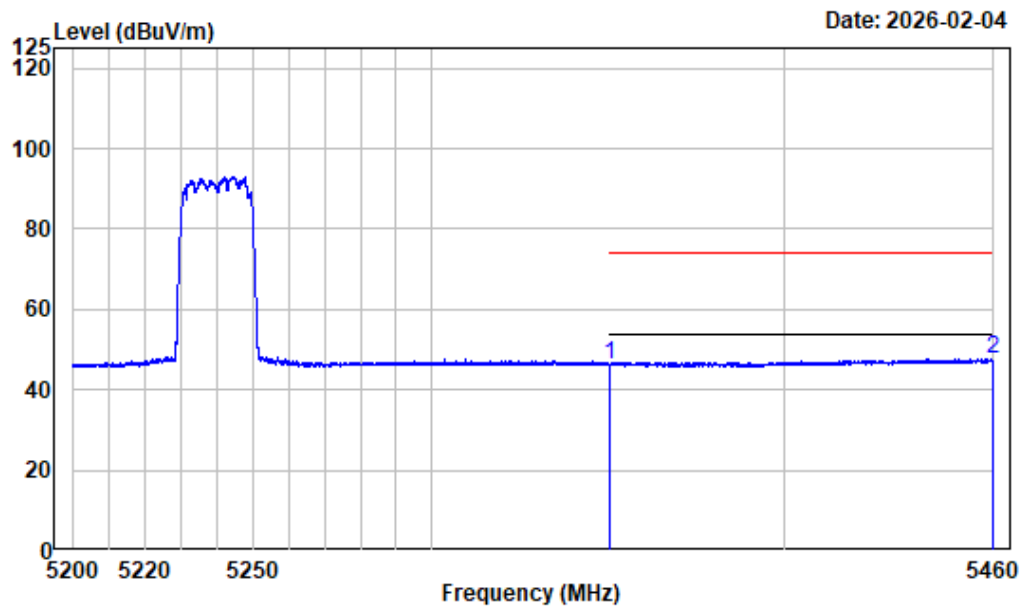

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.06	46.30	54.00	-7.70 Average
2	5460.000	-6.26	53.96	47.70	54.00	-6.30 Average


Right Band edge_Vertical_Peak_802.11ax20_5240MHz

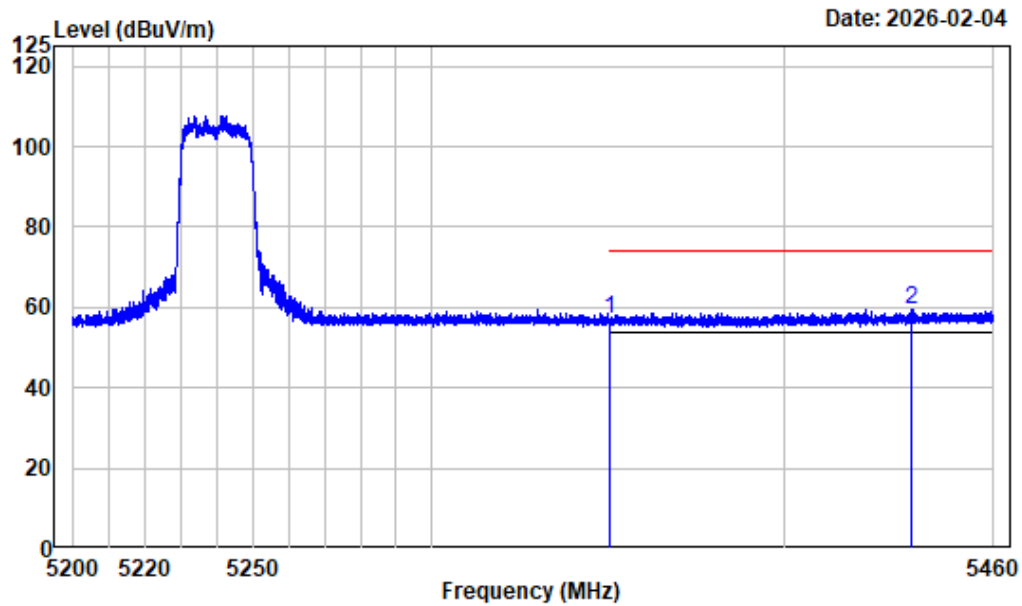

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.94	57.18	74.00	-16.82 Peak
2	5436.178	-6.40	66.05	59.65	74.00	-14.35 Peak


Right Band edge_Vertical_Average_802.11ax20_5240MHz

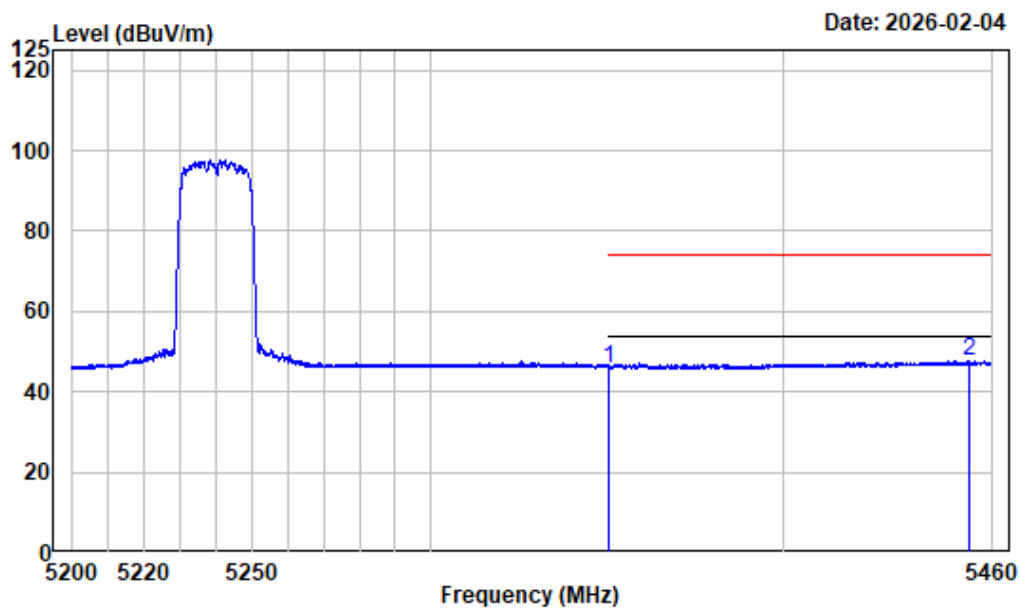

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.65	45.89	54.00	-8.11 Average
2	5453.402	-6.29	53.86	47.57	54.00	-6.43 Average


Left Band edge_Horizontal_Peak_802.11ax40_5190MHz

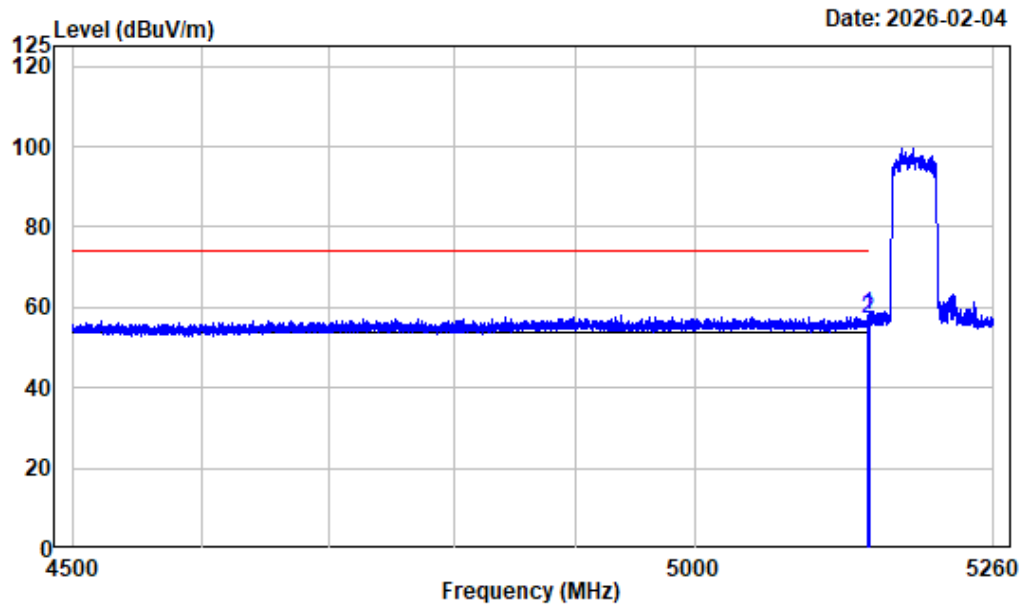

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.565	-7.45	65.40	57.95	74.00	-16.05 Peak
2	5150.000	-7.45	64.33	56.88	74.00	-17.12 Peak


Left Band edge_Horizontal_Average_802.11ax40_5190MHz

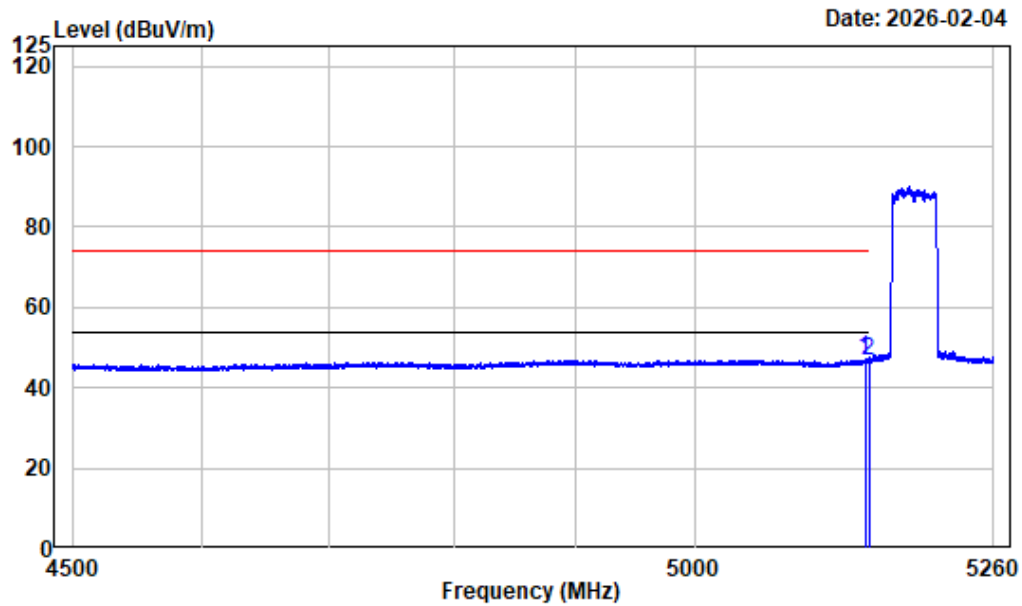

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5146.665	-7.45	54.52	47.07	54.00	-6.93 Average
2	5150.000	-7.45	54.30	46.85	54.00	-7.15 Average


Left Band edge_Vertical_Peak_802.11ax40_5190MHz

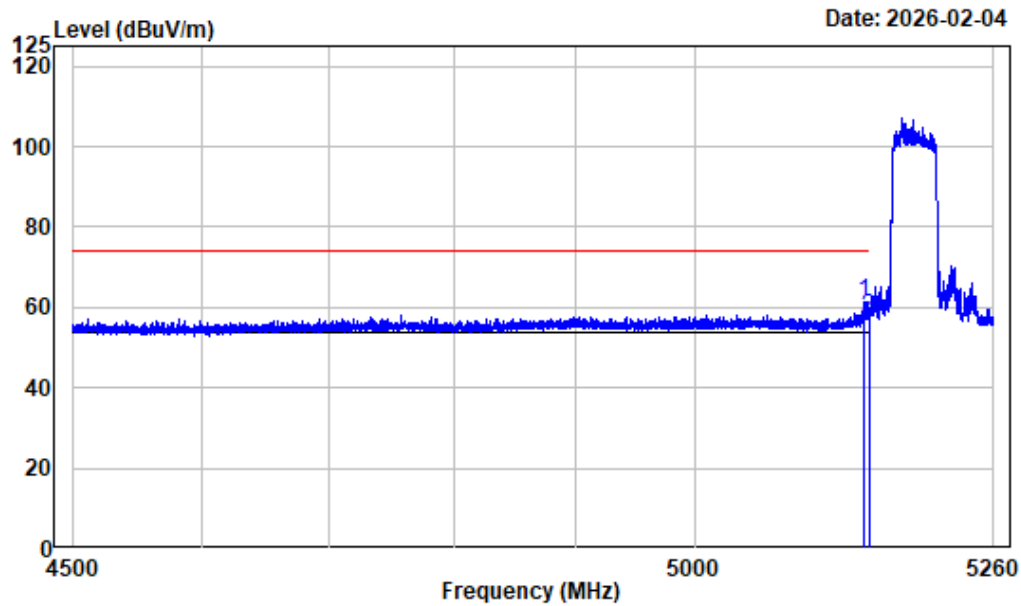

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5146.570	-7.45	68.96	61.51	74.00	-12.49 Peak
2	5150.000	-7.45	65.00	57.55	74.00	-16.45 Peak


Left Band edge_Vertical_Average_802.11ax40_5190MHz

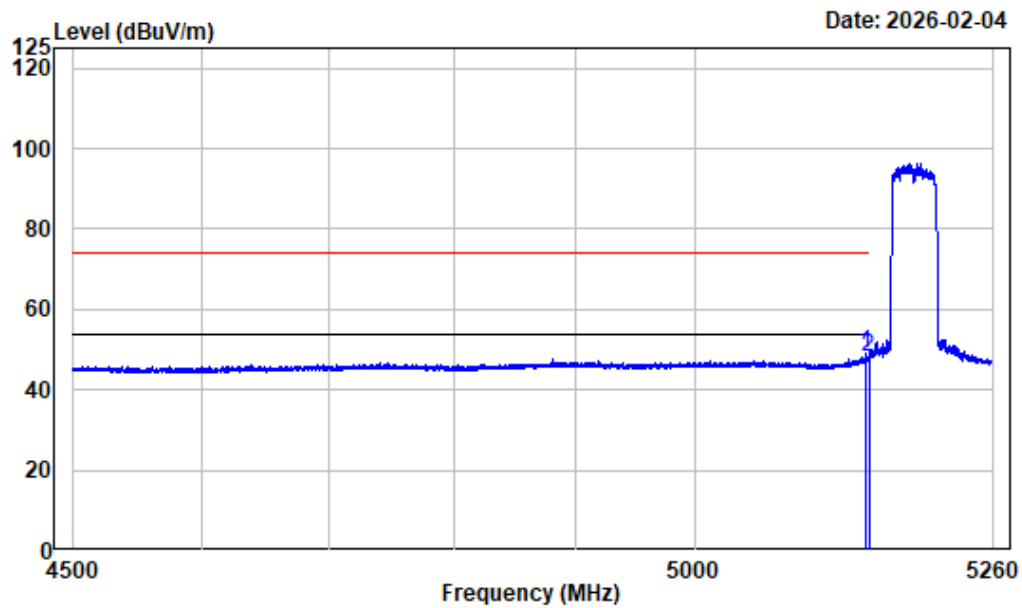

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5190

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.995	-7.45	56.28	48.83	54.00	-5.17 Average
2	5150.000	-7.45	55.42	47.97	54.00	-6.03 Average


Right Band edge_Horizontal_Peak_802.11ax40_5230MHz

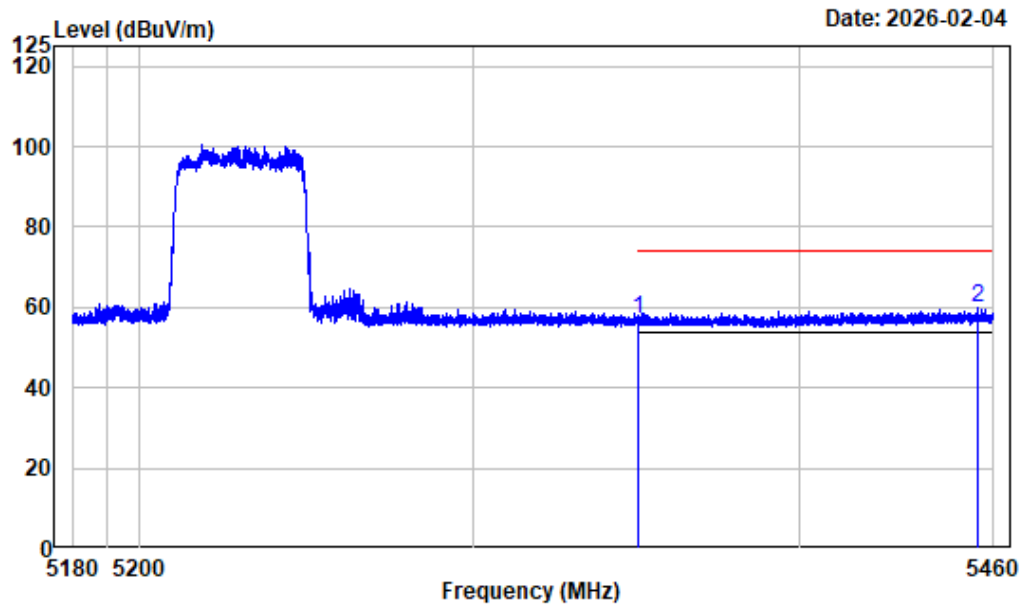

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.61	56.85	74.00	-17.15	Peak
2	5455.240	-6.29	65.97	59.68	74.00	-14.32	Peak


Right Band edge_Horizontal_Average_802.11ax40_5230MHz

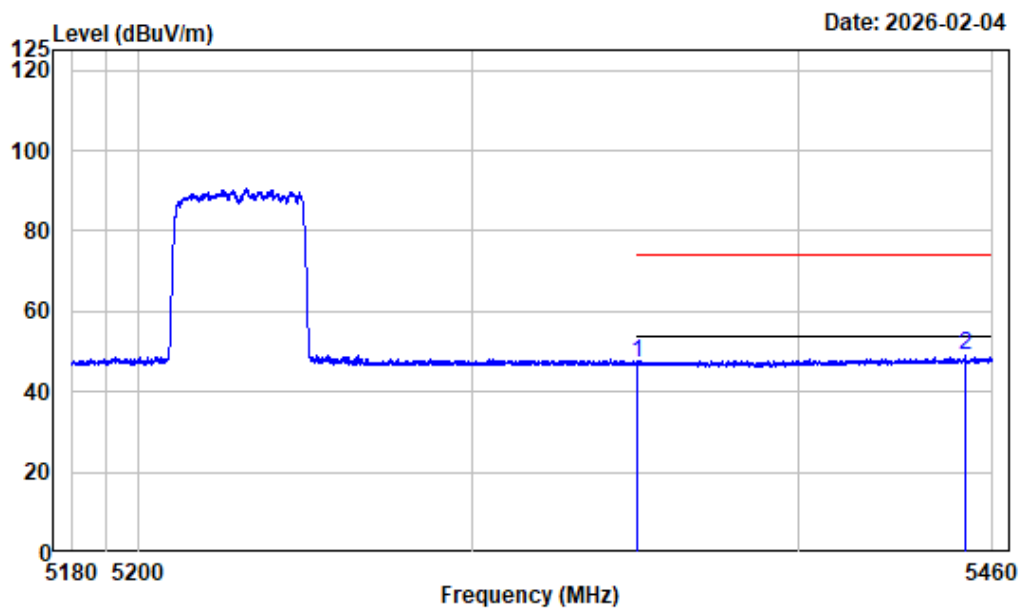

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	53.83	47.07	54.00	-6.93 Average
2	5451.390	-6.31	55.17	48.86	54.00	-5.14 Average


Right Band edge_Vertical_Peak_802.11ax40_5230MHz

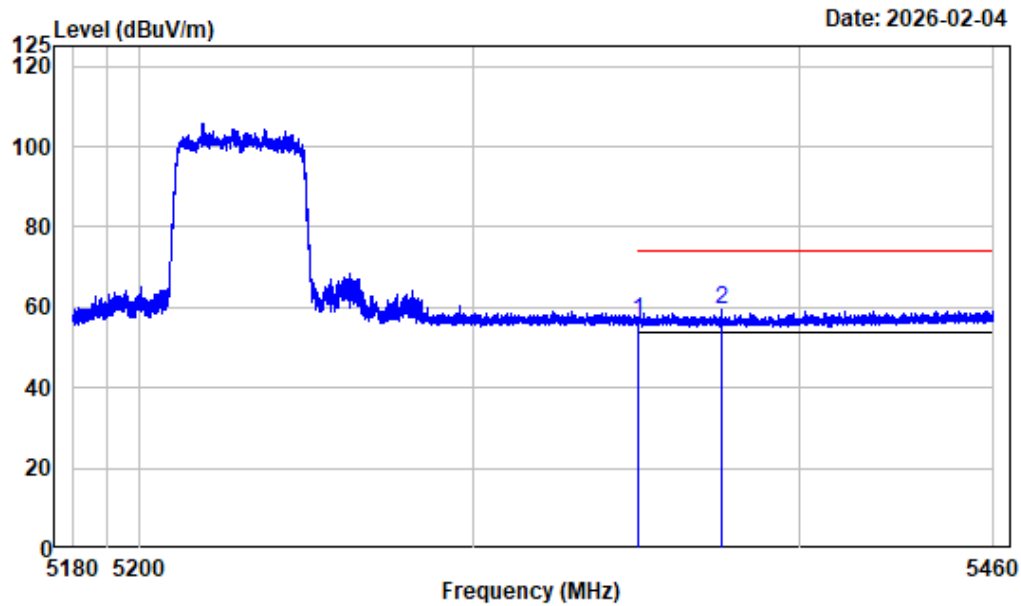

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.40	56.64	74.00	-17.36	Peak
2 5375.580	-6.69	66.12	59.43	74.00	-14.57	Peak


Right Band edge_Vertical_Average_802.11ax40_5230MHz

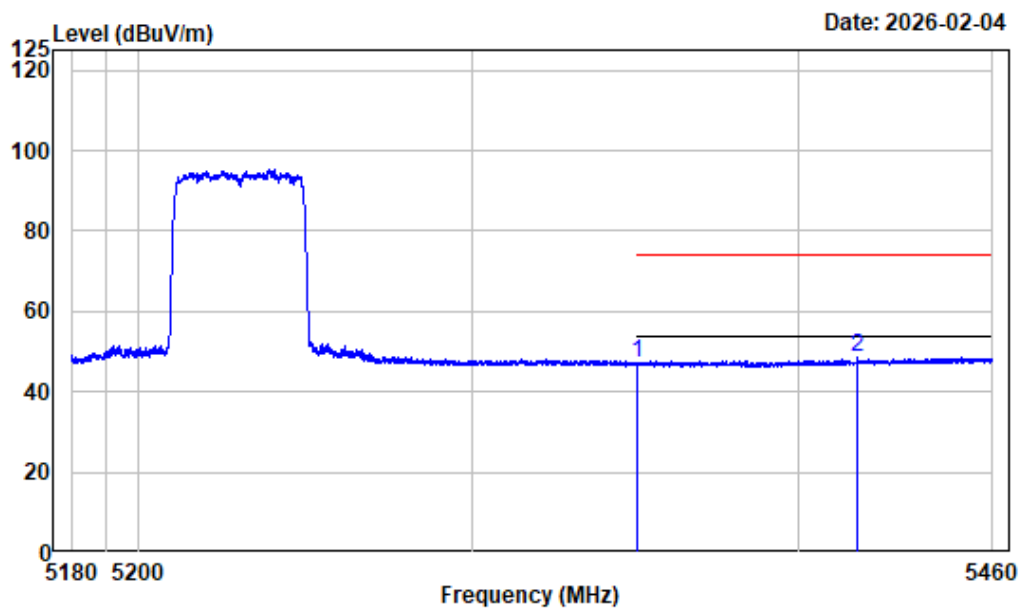

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	53.71	46.95	54.00	-7.05 Average
2	5417.755	-6.50	54.93	48.43	54.00	-5.57 Average


Left Band edge_Horizontal_Peak_802.11ax80_5210MHz

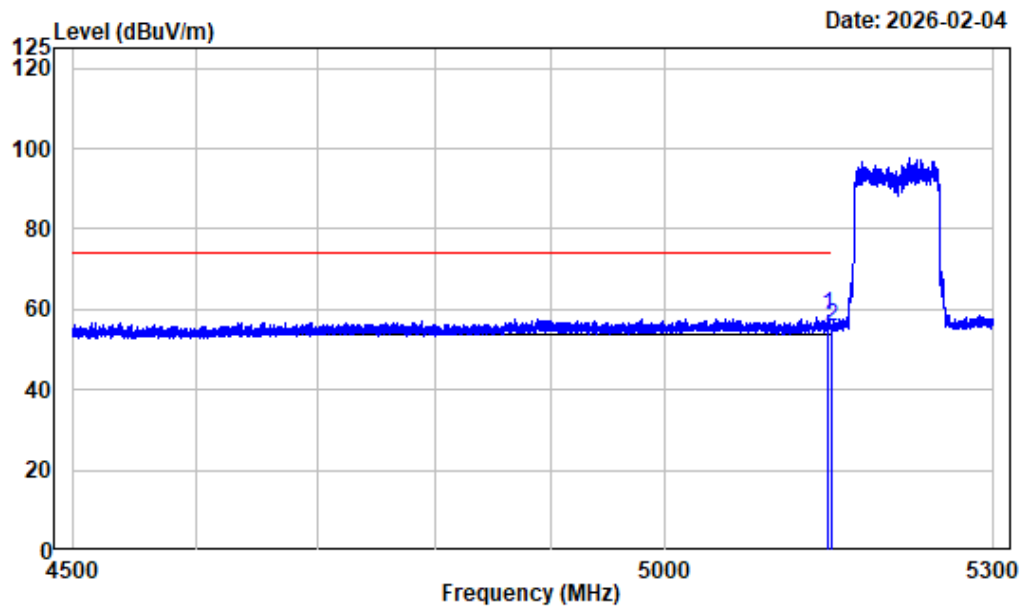

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.300	-7.45	66.08	58.63	74.00	-15.37 Peak
2	5150.000	-7.45	62.95	55.50	74.00	-18.50 Peak

Left Band edge_Horizontal_Average_802.11ax80_5210MHz

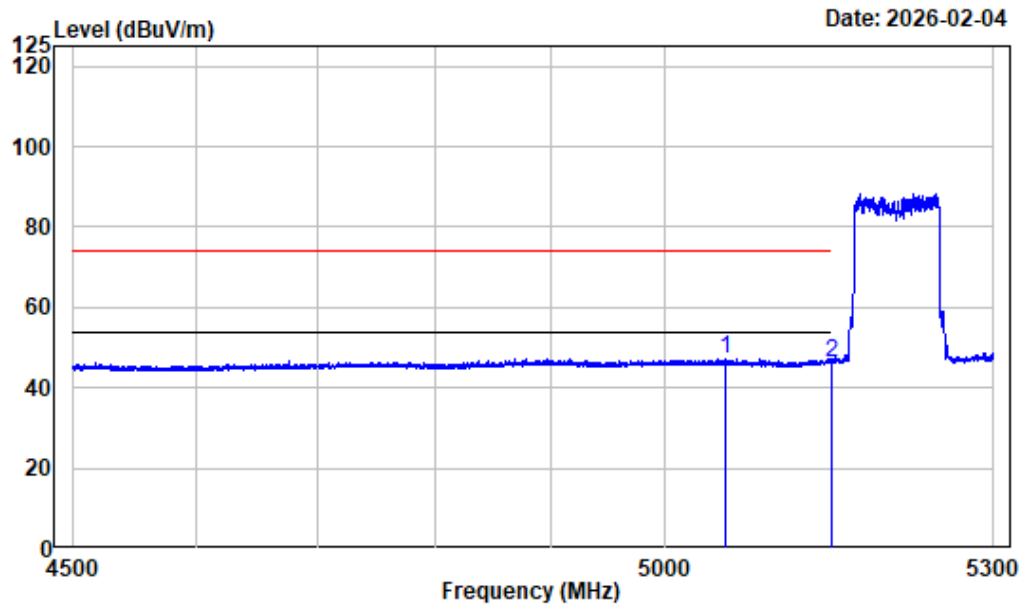

Condition : Horizontal

Project No. : 2501A25853E-RFA1


Tester : Zenos Qiao

Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak

Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5053.700	-7.29	54.59	47.30	54.00	-6.70 Average
2	5150.000	-7.45	53.62	46.17	54.00	-7.83 Average


Left Band edge_Vertical_Peak_802.11ax80_5210MHz

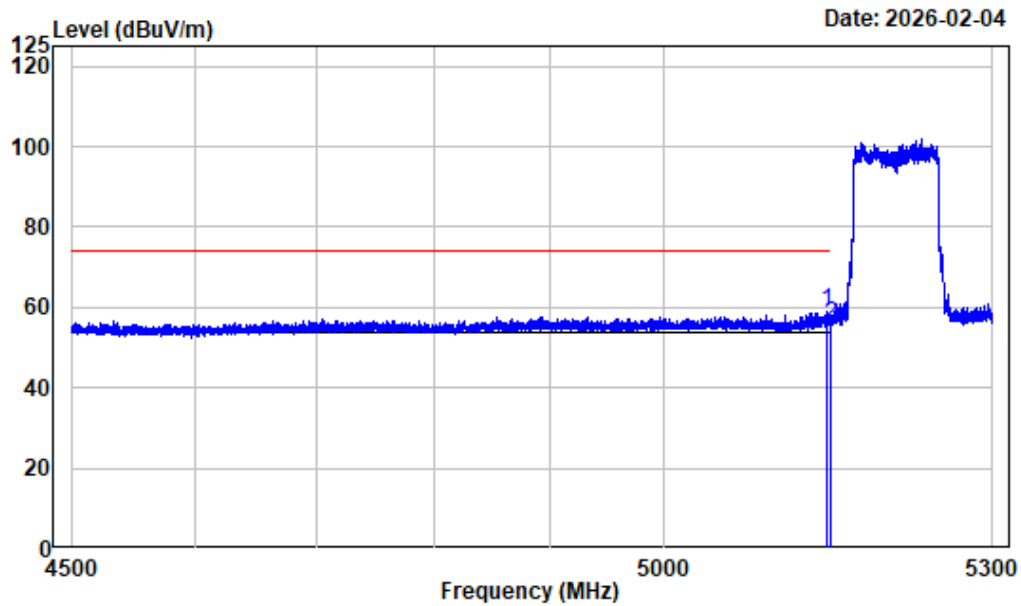

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5145.800	-7.45	66.53	59.08	74.00	-14.92	Peak
2 5150.000	-7.45	63.10	55.65	74.00	-18.35	Peak


Left Band edge_Vertical_Average_802.11ax80_5210MHz

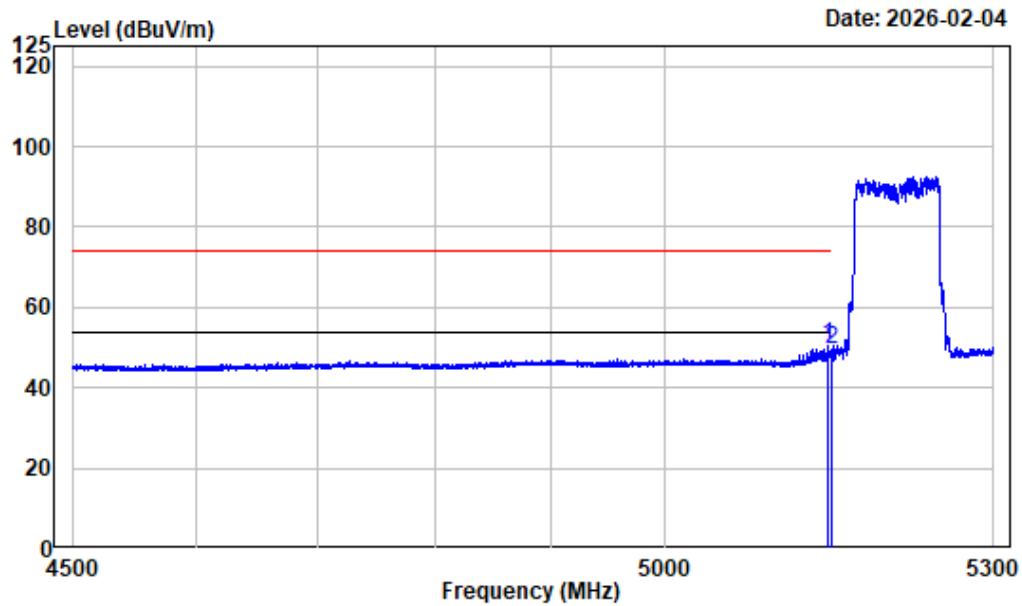

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5146.800	-7.45	57.72	50.27	54.00	-3.73	Average
2 5150.000	-7.45	56.80	49.35	54.00	-4.65	Average


Right Band edge_Horizontal_Peak_802.11ax80_5210MHz

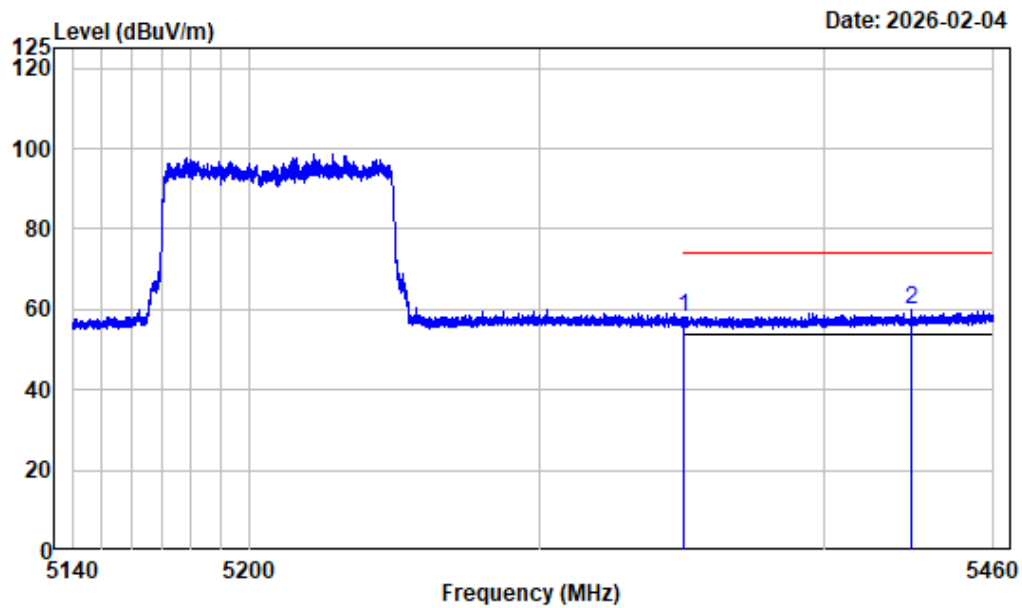

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	64.54	57.78	74.00	-16.22 Peak
2	5430.880	-6.42	66.27	59.85	74.00	-14.15 Peak


Right Band edge_Horizontal_Average_802.11ax80_5210MHz

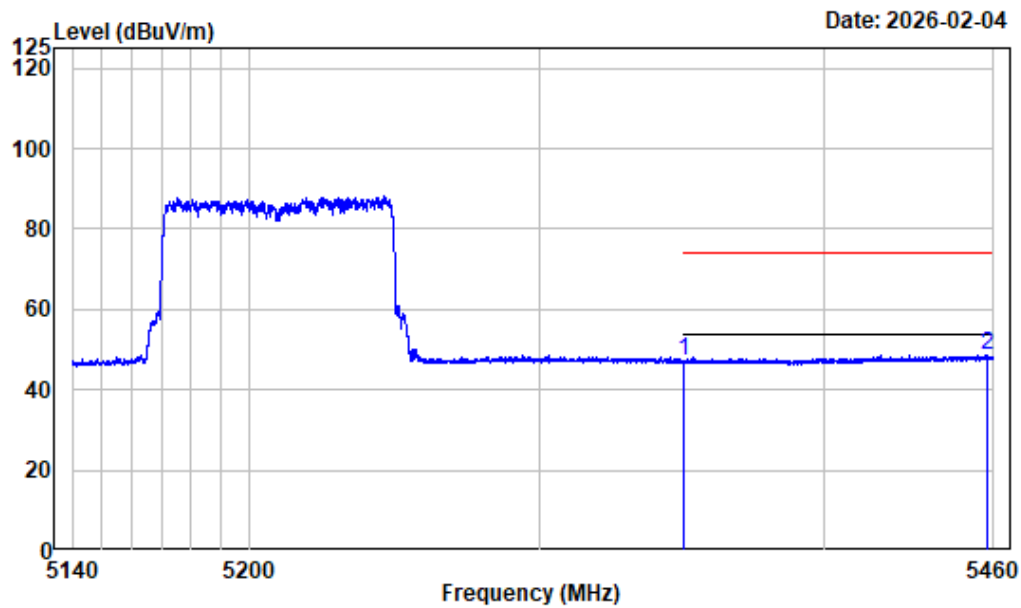

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.97	47.21	54.00	-6.79 Average
2	5457.560	-6.28	54.76	48.48	54.00	-5.52 Average


Right Band edge_Vertical_Peak_802.11ax80_5210MHz

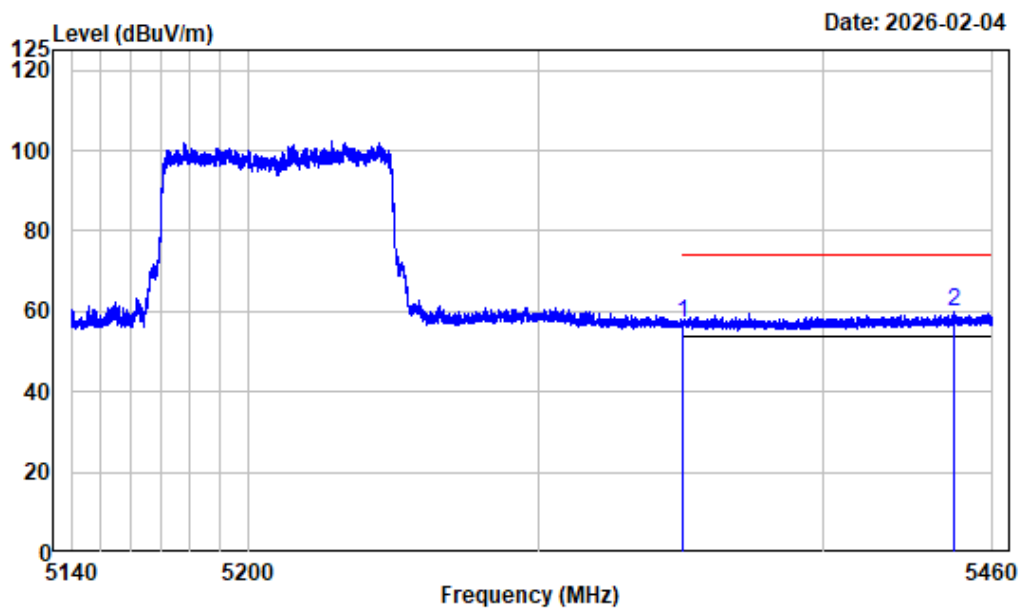

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.90	57.14	74.00	-16.86 Peak
2	5446.080	-6.33	66.26	59.93	74.00	-14.07 Peak


Right Band edge_Vertical_Average_802.11ax80_5210MHz

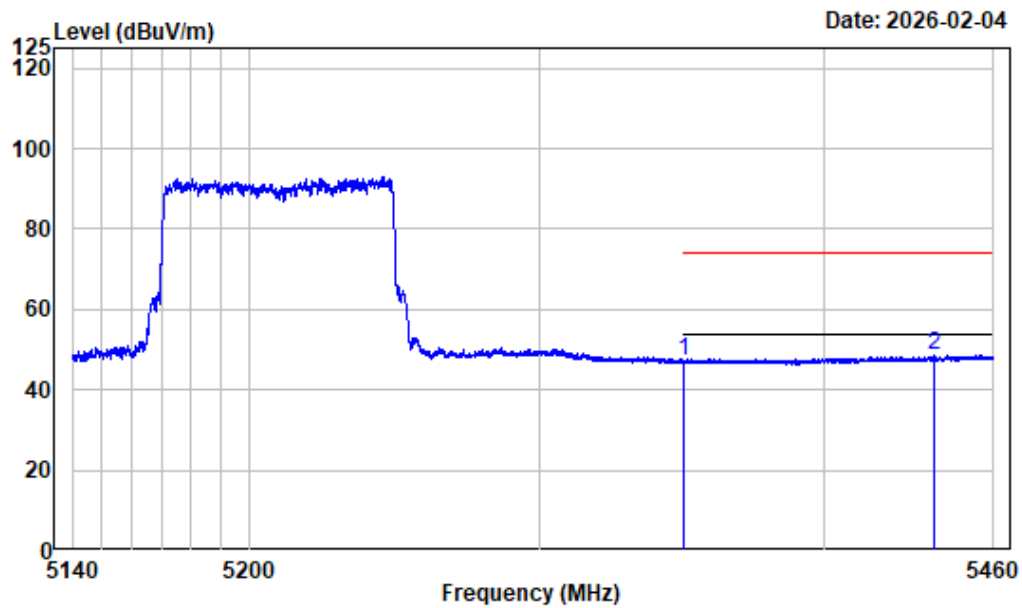

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band1-AX80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.85	47.09	54.00	-6.91 Average
2	5438.800	-6.37	55.06	48.69	54.00	-5.31 Average


Left Band edge_Horizontal_Peak_802.11a_5260MHz_ANT0

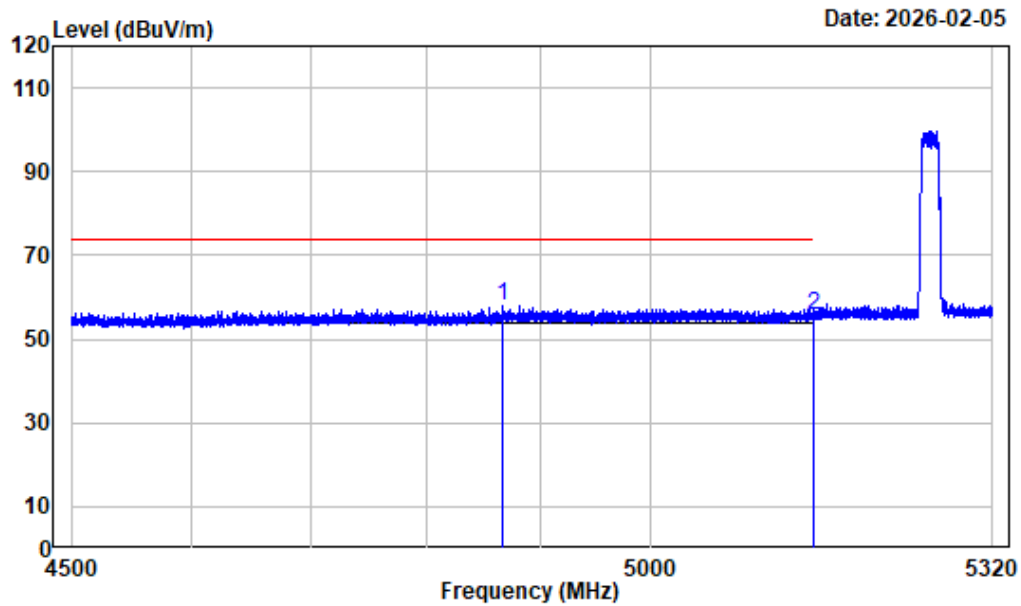

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4866.848	-7.72	65.75	58.03	74.00	-15.97	Peak
2 5150.000	-7.45	63.02	55.57	74.00	-18.43	Peak


Left Band edge_Horizontal_Average_802.11a_5260MHz_ANT0

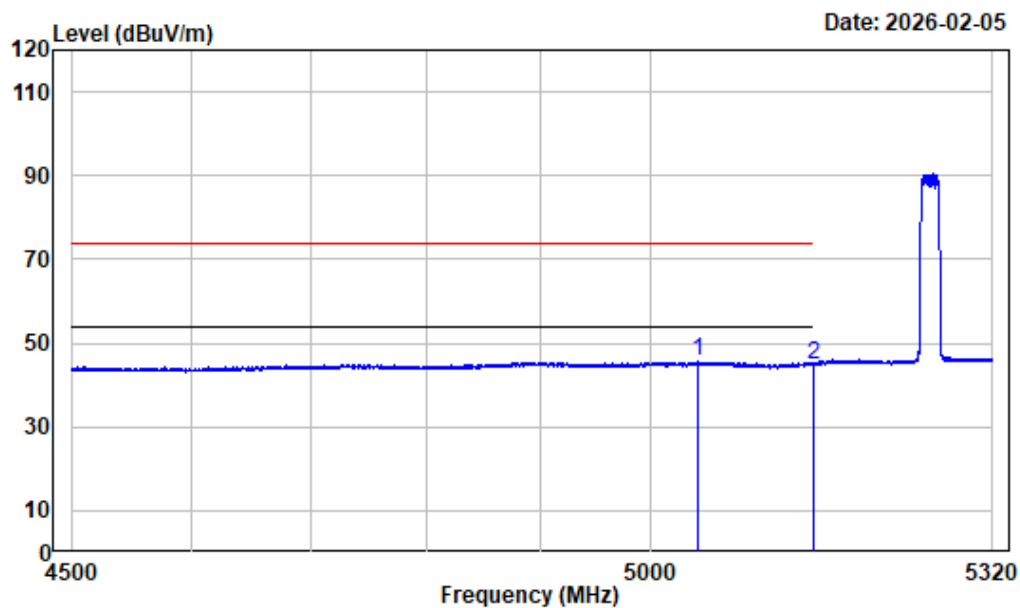

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5042.737	-7.28	52.80	45.52	54.00	-8.48 Average
2	5150.000	-7.45	52.44	44.99	54.00	-9.01 Average


Left Band edge_Vertical_Peak_802.11a_5260MHz_ANT0

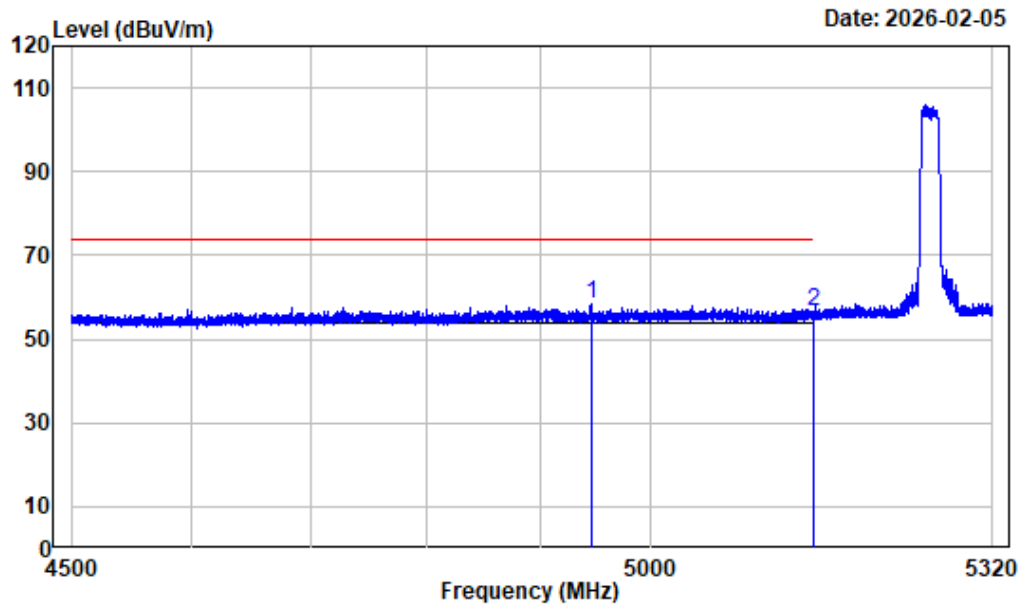

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4946.080	-7.64	65.94	58.30	74.00	-15.70	Peak
2 5150.000	-7.45	64.27	56.82	74.00	-17.18	Peak


Left Band edge_Vertical_Average_802.11a_5260MHz_ANT0

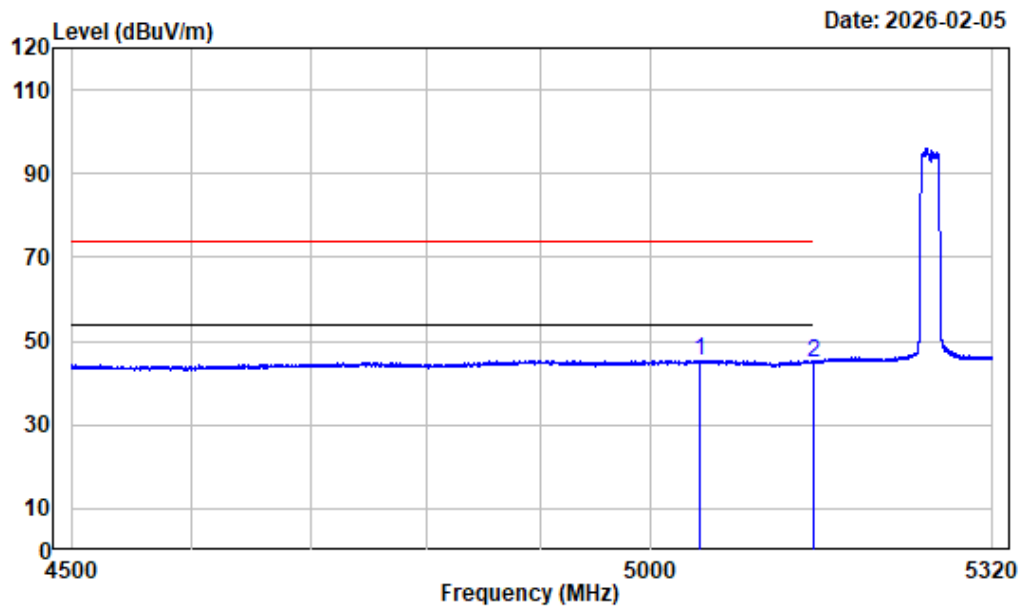

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5044.172	-7.28	52.62	45.34	54.00	-8.66 Average
2	5150.000	-7.45	52.19	44.74	54.00	-9.26 Average


Right Band edge_Horizontal_Peak_802.11a_5320MHz_ANT0

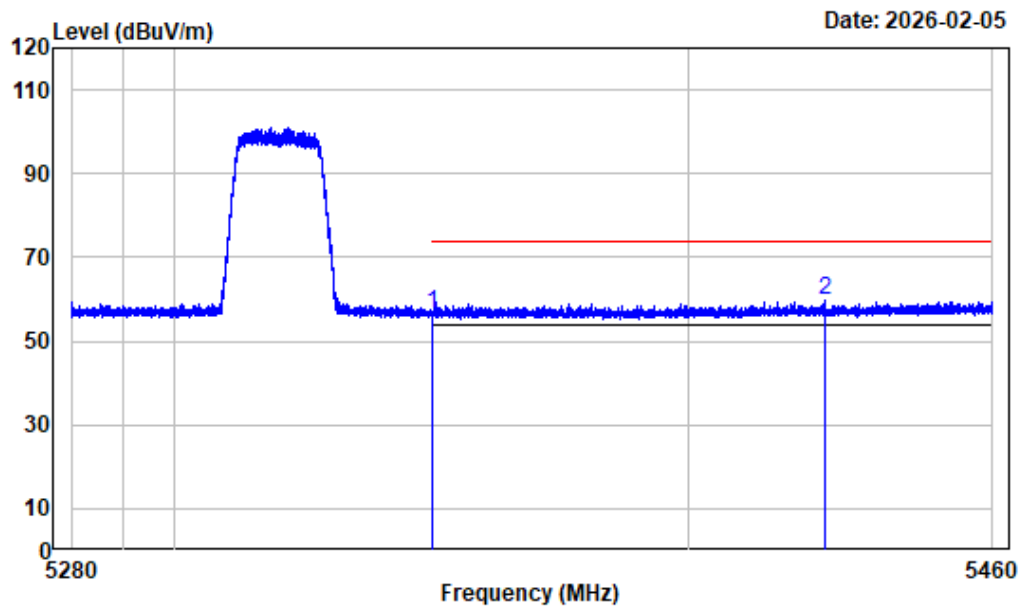

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.19	56.43	74.00	-17.57	Peak
2 5426.880	-6.45	66.25	59.80	74.00	-14.20	Peak


Right Band edge_Horizontal_Average_802.11a_5320MHz_ANT0

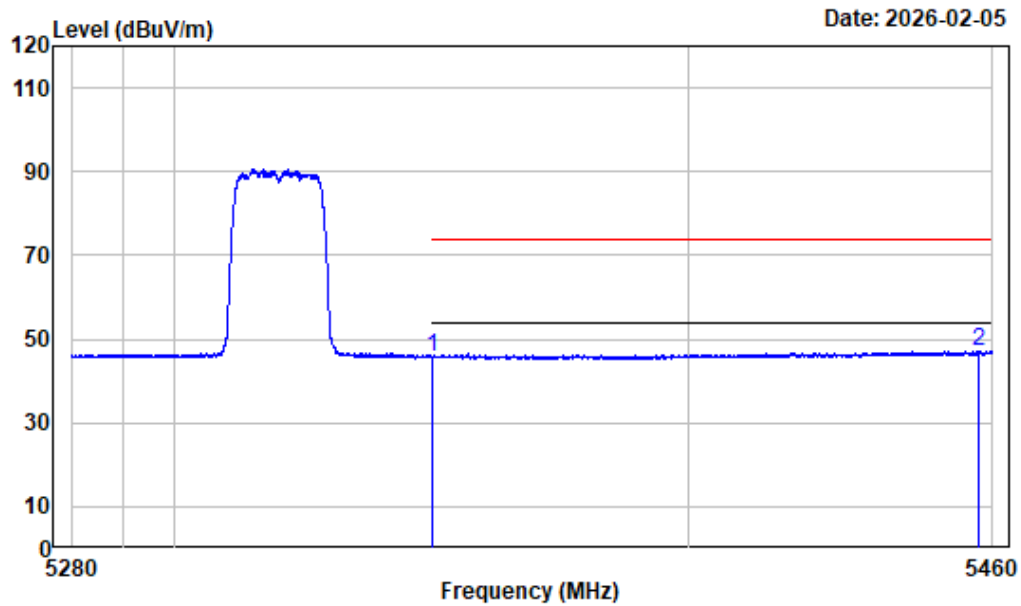

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.58	45.82	54.00	-8.18 Average
2	5457.390	-6.28	53.56	47.28	54.00	-6.72 Average


Right Band edge_Vertical_Peak_802.11a_5320MHz_ANT0

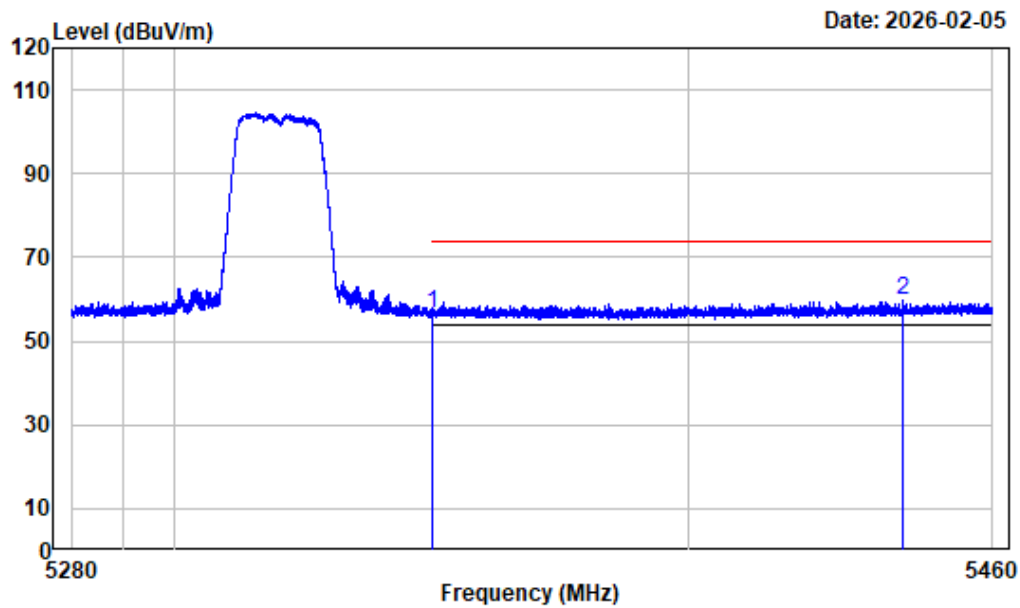

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.45	56.69	74.00	-17.31 Peak
2	5442.360	-6.36	66.02	59.66	74.00	-14.34 Peak


Right Band edge_Vertical_Average_802.11a_5320MHz_ANT0

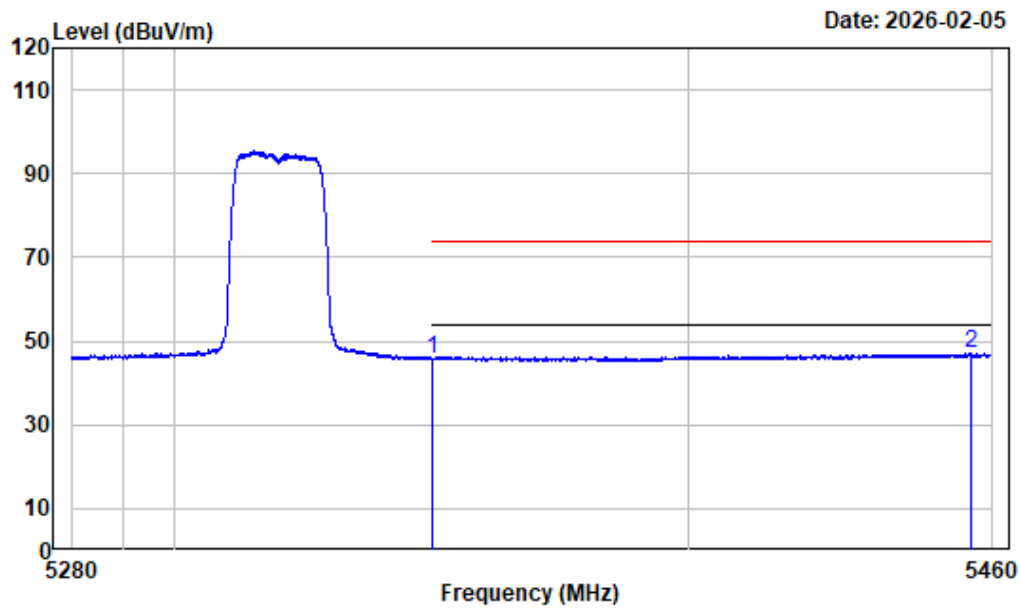

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.47	45.71	54.00	-8.29 Average
2	5455.635	-6.28	53.35	47.07	54.00	-6.93 Average


Left Band edge_Horizontal_Peak_802.11a_5260MHz_ANT1

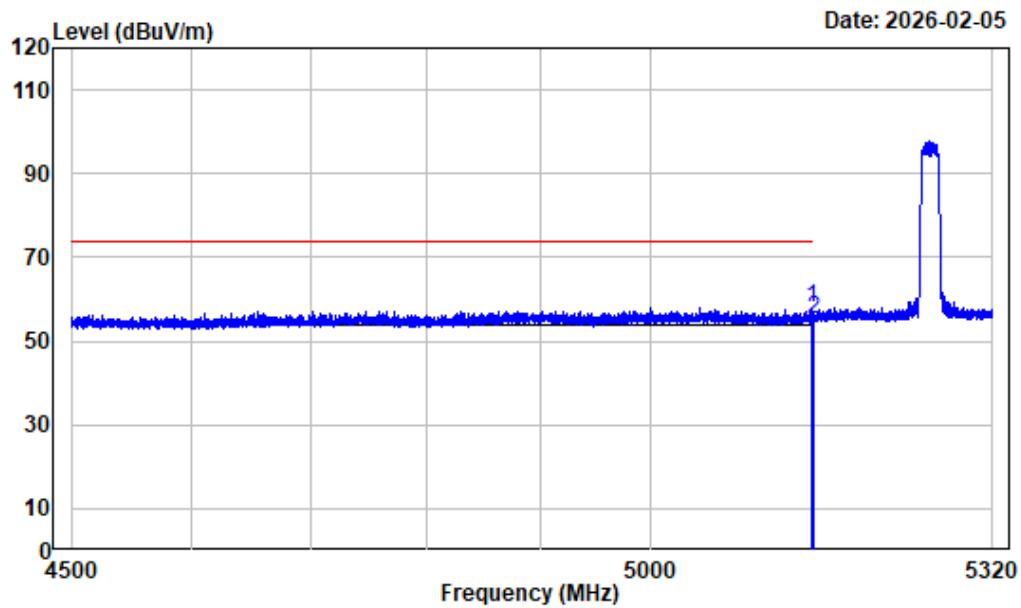

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.390	-7.45	65.48	58.03	74.00	-15.97	Peak
2 5150.000	-7.45	62.69	55.24	74.00	-18.76	Peak


Left Band edge_Horizontal_Average_802.11a_5260MHz_ANT1

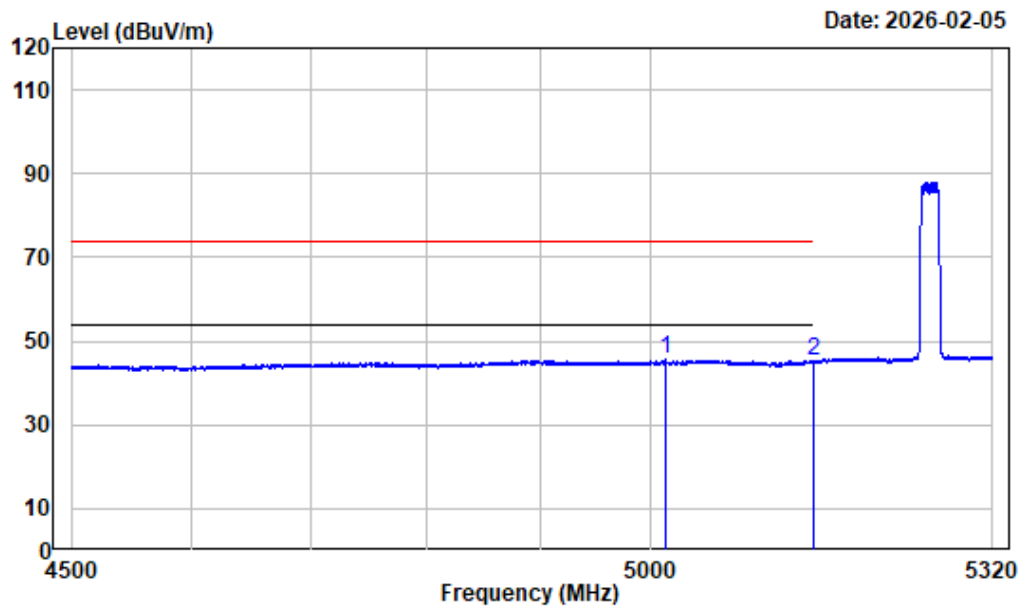

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5012.500	-7.28	52.83	45.55	54.00	-8.45 Average
2	5150.000	-7.45	52.53	45.08	54.00	-8.92 Average


Left Band edge_Vertical_Peak_802.11a_5260MHz_ANT1

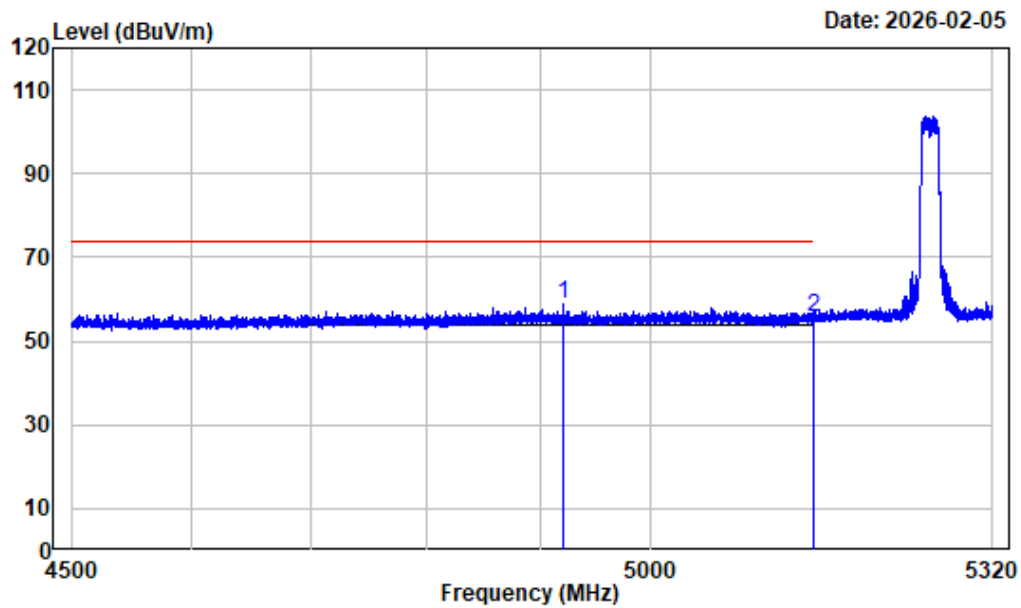

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4921.070	-7.62	66.31	58.69	74.00	-15.31	Peak
2 5150.000	-7.45	63.20	55.75	74.00	-18.25	Peak


Left Band edge_Vertical_Average_802.11a_5260MHz_ANT1

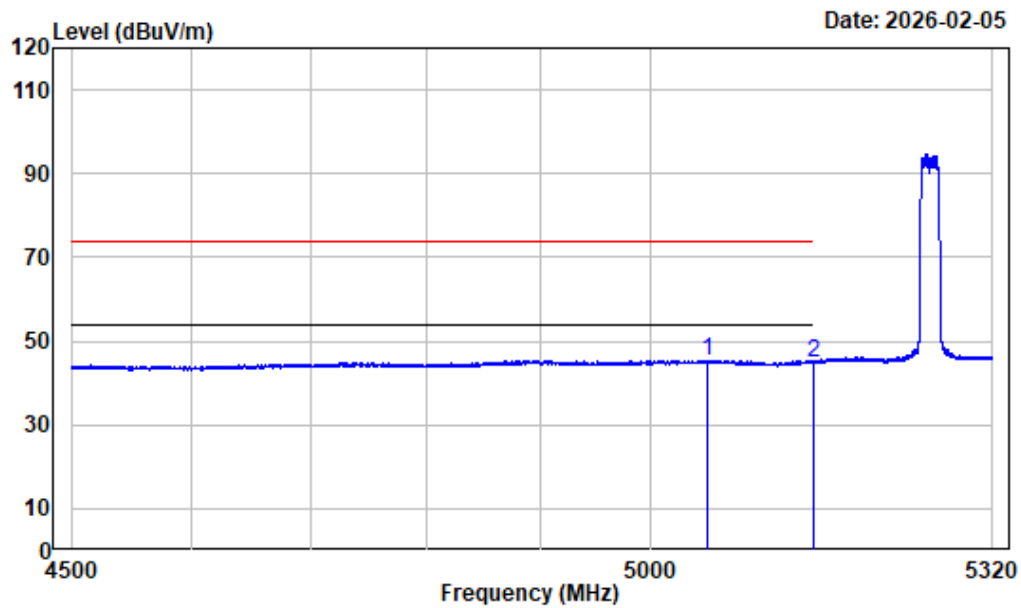

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5051.860	-7.29	52.77	45.48	54.00	-8.52 Average
2	5150.000	-7.45	52.40	44.95	54.00	-9.05 Average


Right Band edge_Horizontal_Peak_802.11a_5320MHz_ANT1

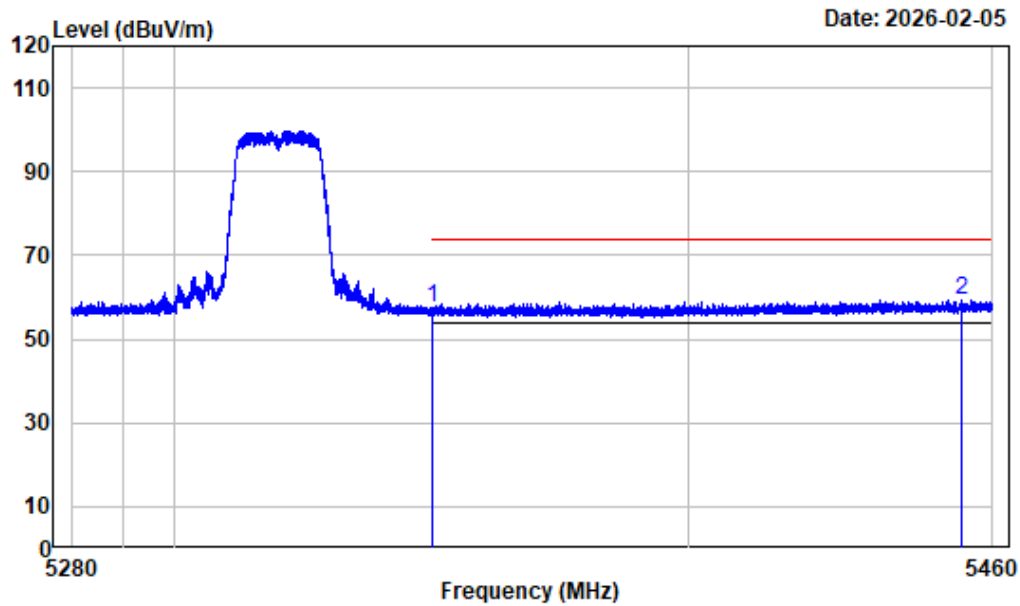

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	64.23	57.47	74.00	-16.53 Peak
2	5453.813	-6.29	65.57	59.28	74.00	-14.72 Peak


Right Band edge_Horizontal_Average_802.11a_5320MHz_ANT1

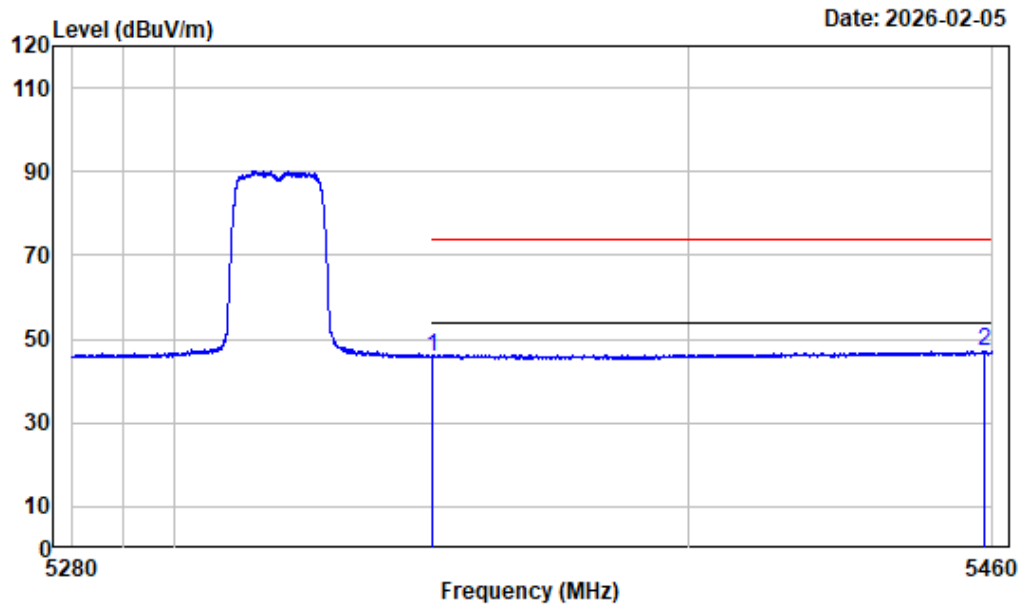

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	52.56	45.80	54.00	-8.20	Average
2 5458.357	-6.28	53.31	47.03	54.00	-6.97	Average


Right Band edge_Vertical_Peak_802.11a_5320MHz_ANT1

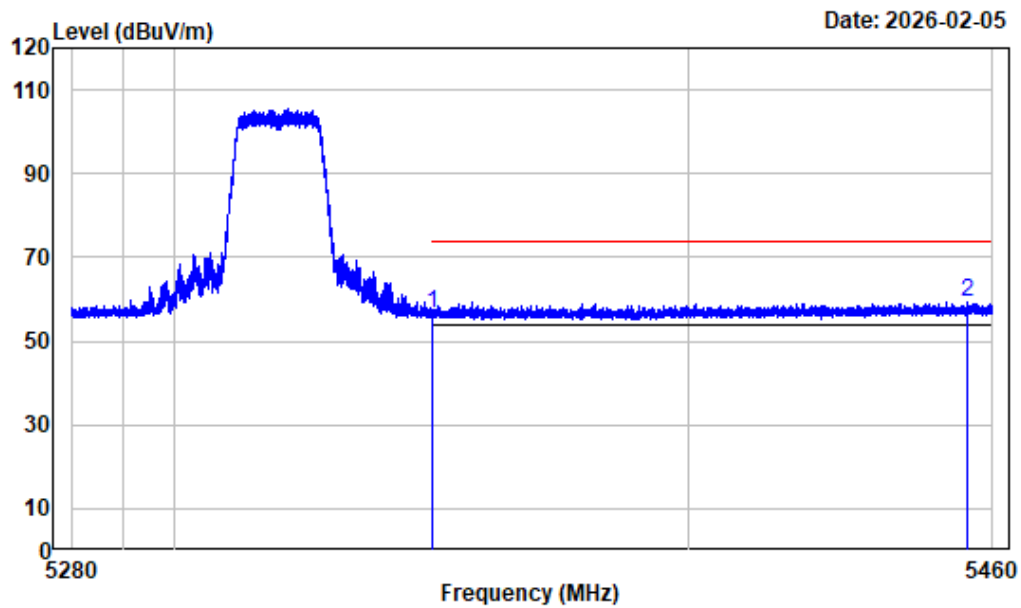

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.38	56.62	74.00	-17.38 Peak
2	5454.938	-6.29	65.80	59.51	74.00	-14.49 Peak


Right Band edge_Vertical_Average_802.11a_5320MHz_ANT1

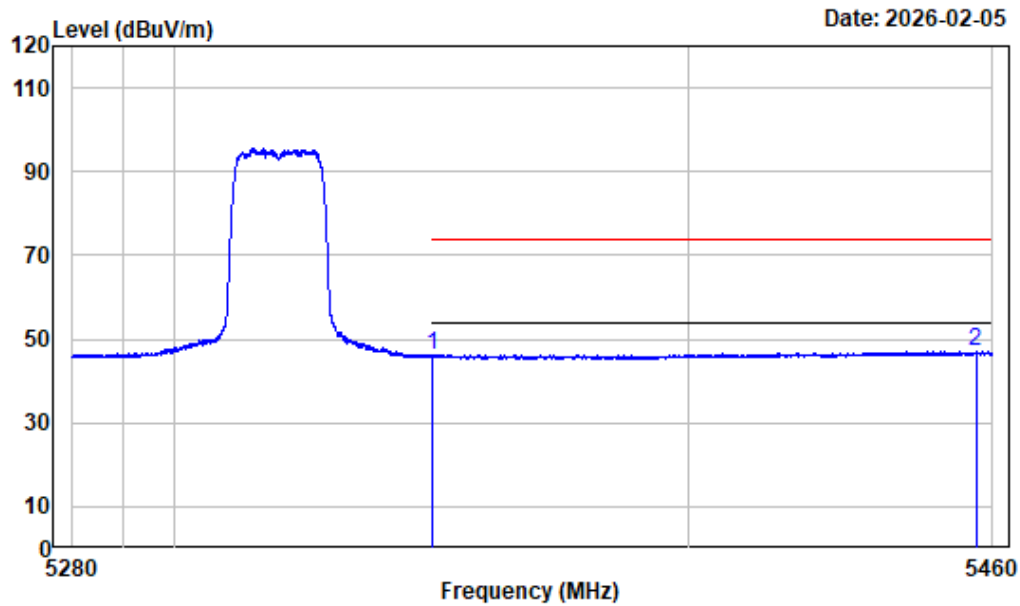

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.94	46.18	54.00	-7.82	Average
2	5456.692	-6.28	53.24	46.96	54.00	-7.04	Average


Left Band edge_Horizontal_Peak_802.11n-HT20

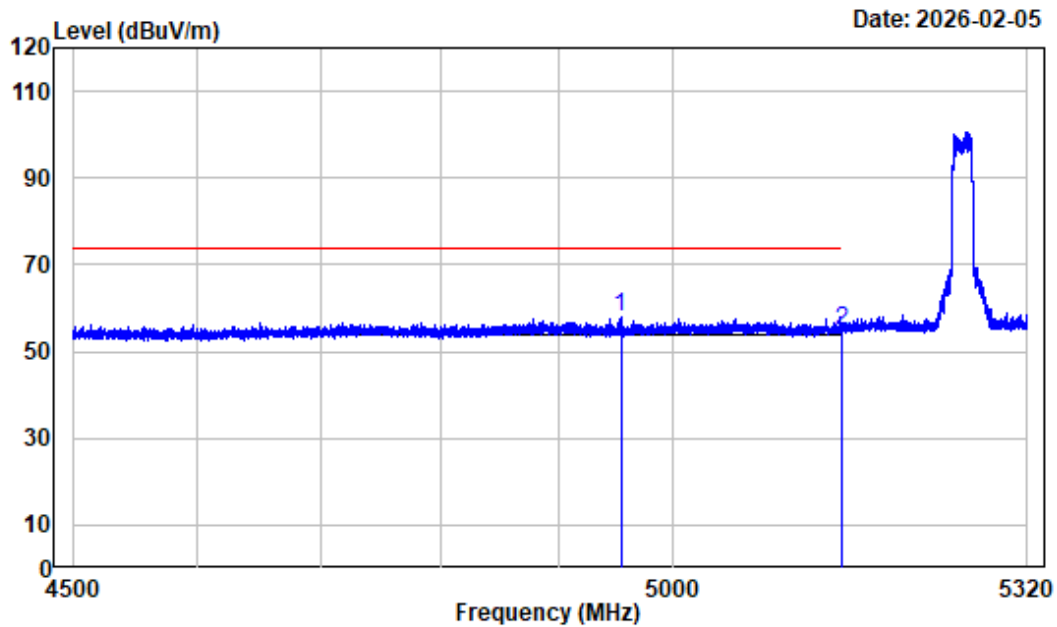

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4953.973	-7.62	65.60	57.98	74.00	-16.02	Peak
2	5150.000	-7.45	62.28	54.83	74.00	-19.17	Peak


Left Band edge_Horizontal_Average_802.11n-HT20

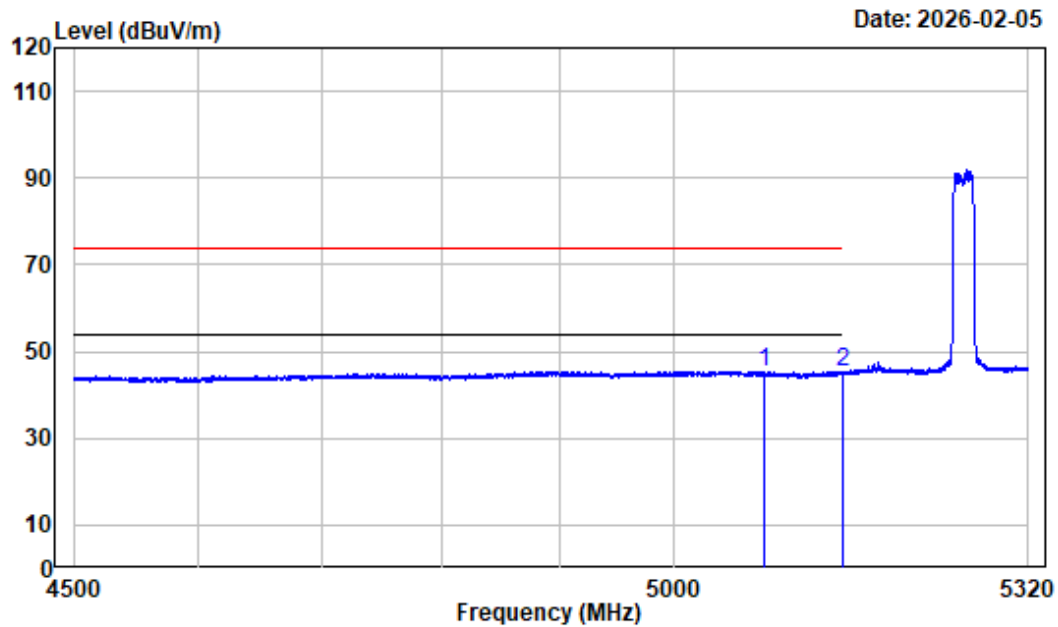

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5079.842	-7.40	52.88	45.48	54.00	-8.52	Average
2	5150.000	-7.45	52.57	45.12	54.00	-8.88	Average


Left Band edge_Vertical_Peak_802.11n-HT20

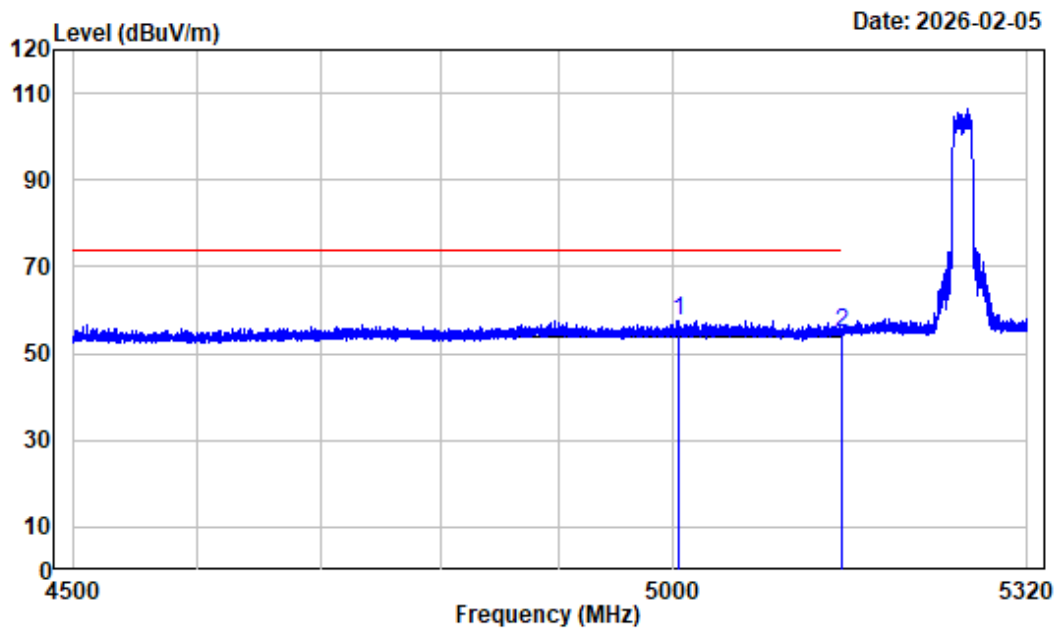

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5003.993	-7.28	64.87	57.59	74.00	-16.41	Peak
2	5150.000	-7.45	62.18	54.73	74.00	-19.27	Peak


Left Band edge_Vertical_Average_802.11n-HT20

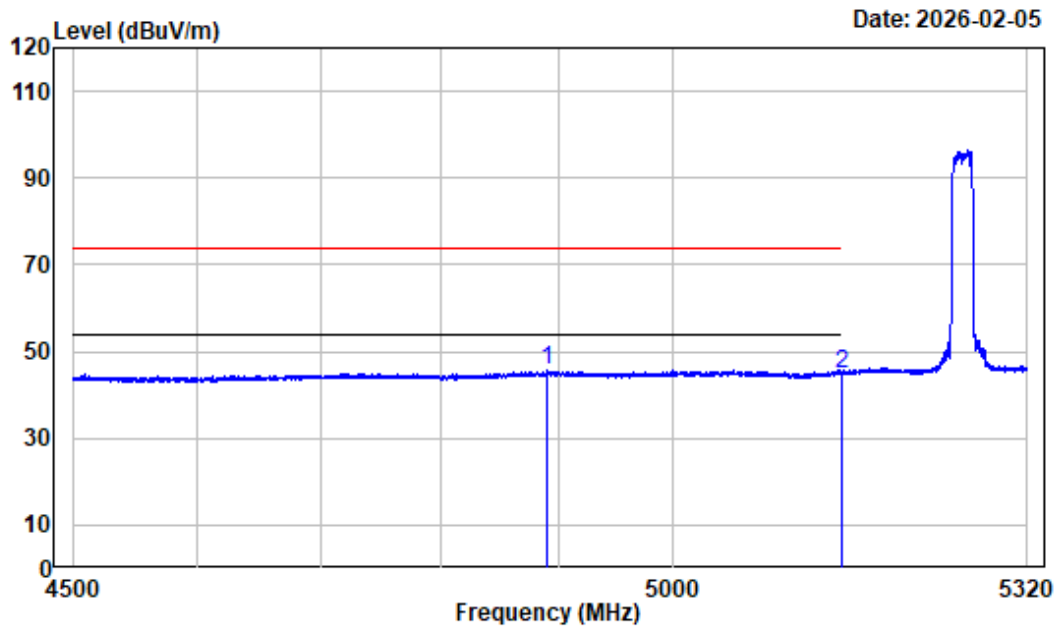

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4891.140	-7.63	53.35	45.72	54.00	-8.28	Average
2	5150.000	-7.45	52.34	44.89	54.00	-9.11	Average


Right Band edge_Horizontal_Peak_802.11n-HT20

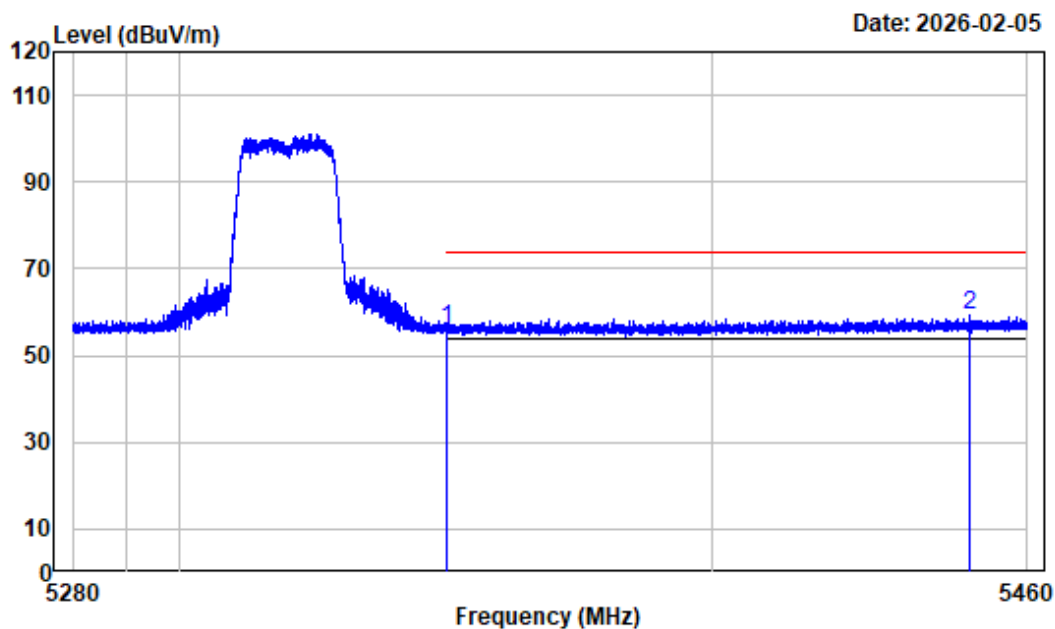

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.72	55.96	74.00	-18.04	Peak
2	5448.998	-6.31	65.54	59.23	74.00	-14.77	Peak


Right Band edge_Horizontal_Average_802.11n-HT20

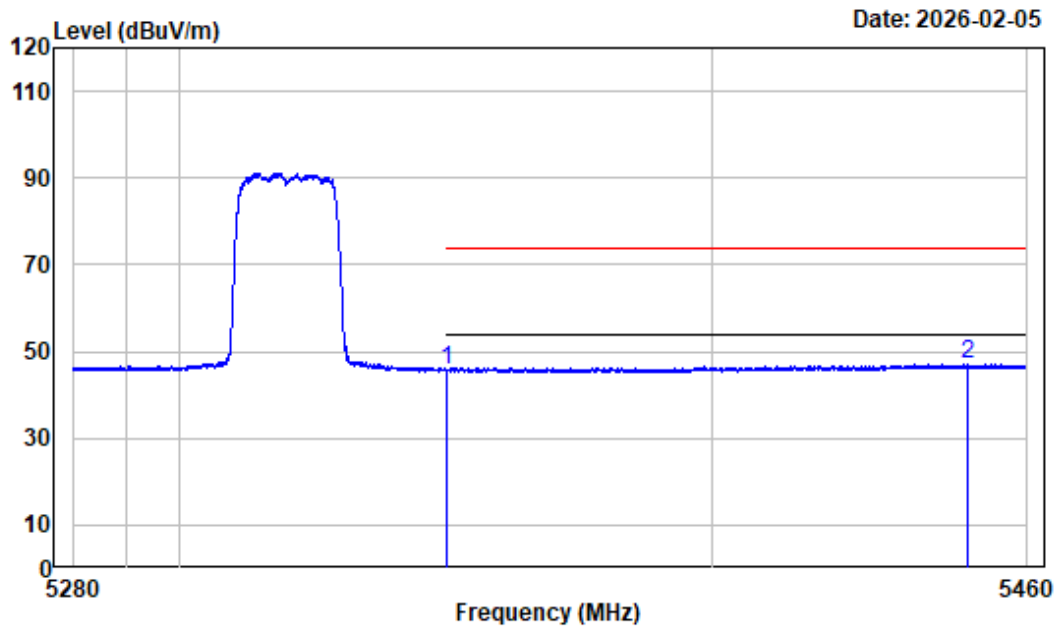

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.54	45.78	54.00	-8.22	Average
2	5448.750	-6.31	53.50	47.19	54.00	-6.81	Average


Right Band edge_Vertical_Peak_802.11n-HT20

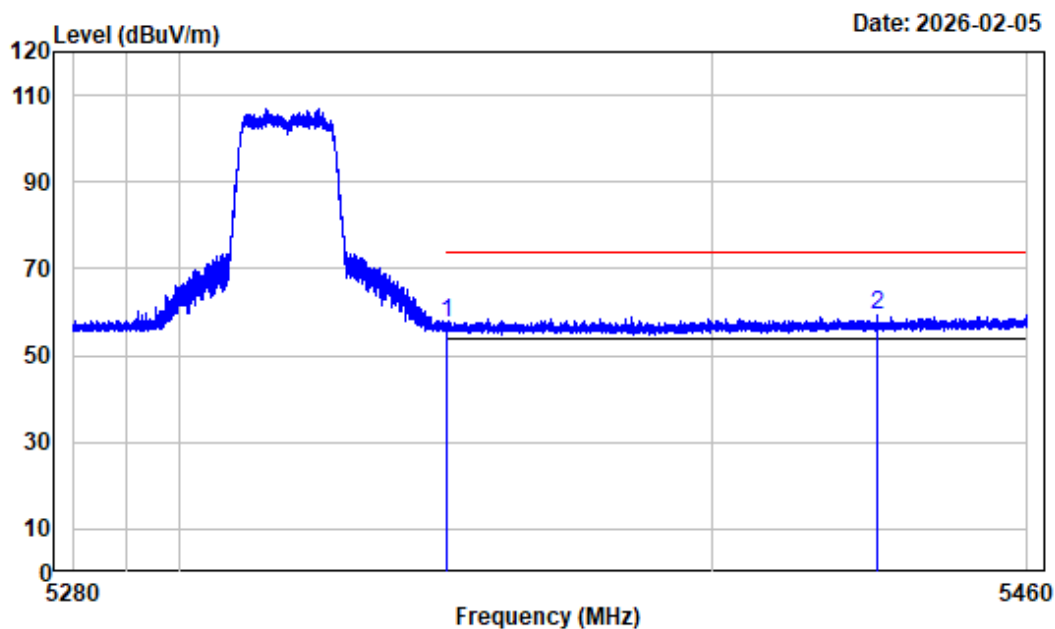

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	64.05	57.29	74.00	-16.71	Peak
2	5431.178	-6.42	65.92	59.50	74.00	-14.50	Peak


Right Band edge_Vertical_Average_802.11n-HT20

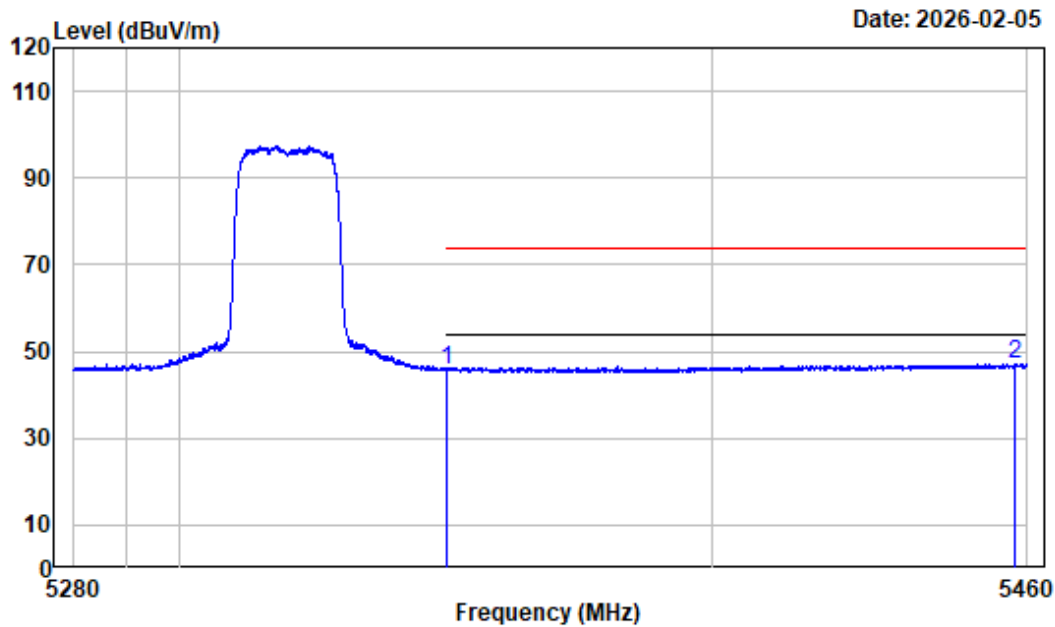

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.59	45.83	54.00	-8.17	Average
2	5457.638	-6.28	53.37	47.09	54.00	-6.91	Average


Left Band edge_Horizontal_Peak_802.11n-HT40

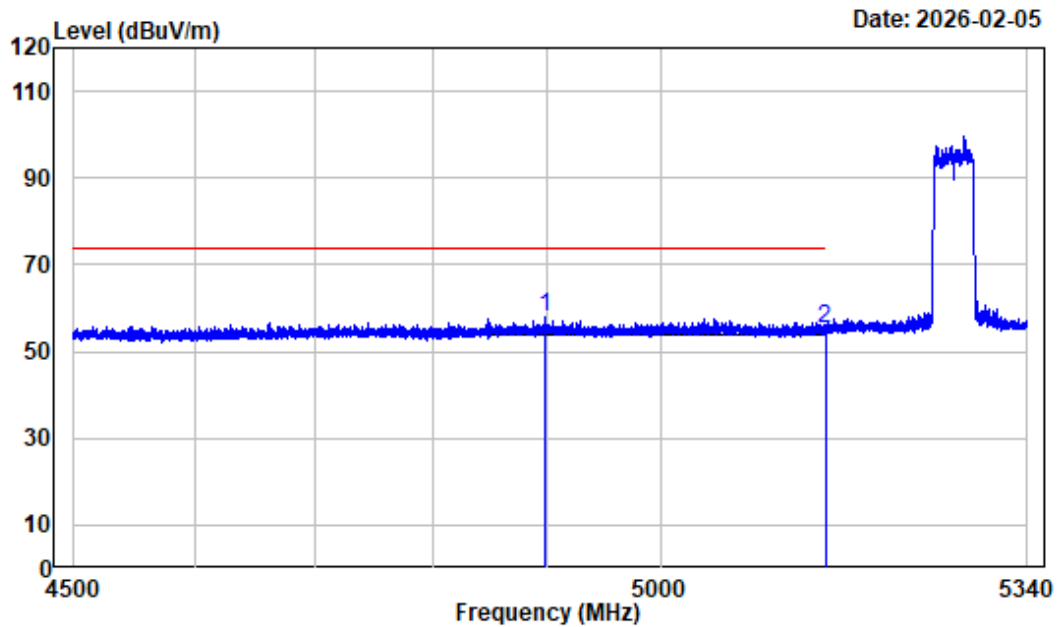

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4898.160	-7.60	65.58	57.98	74.00	-16.02	Peak
2	5150.000	-7.45	62.52	55.07	74.00	-18.93	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

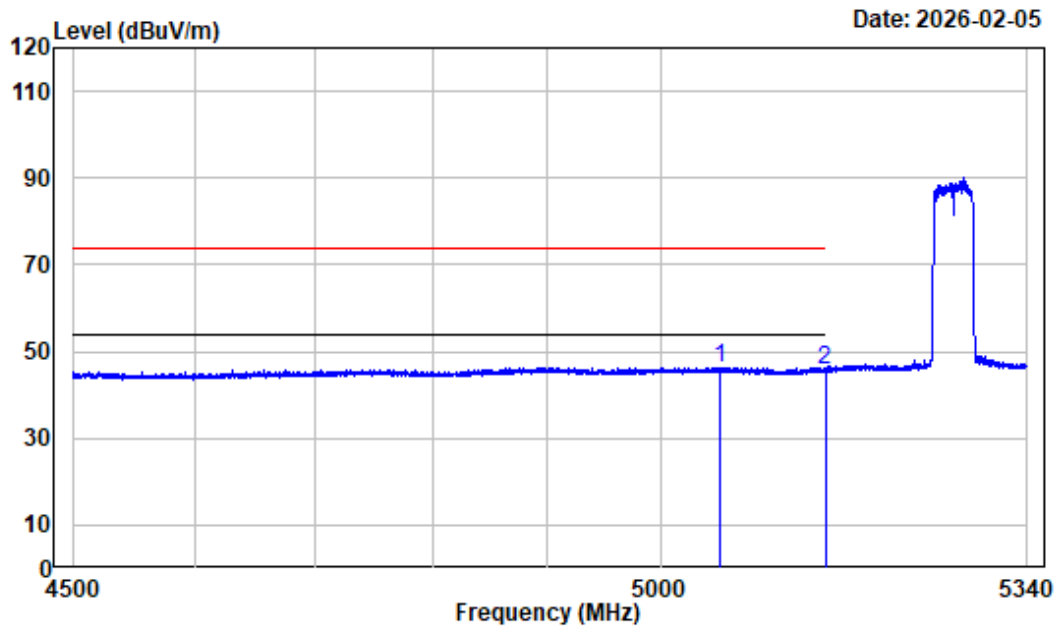

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5054.295	-7.31	53.72	46.41	54.00	-7.59	Average
2	5150.000	-7.45	53.11	45.66	54.00	-8.34	Average


Left Band edge_Vertical_Peak_802.11n-HT40

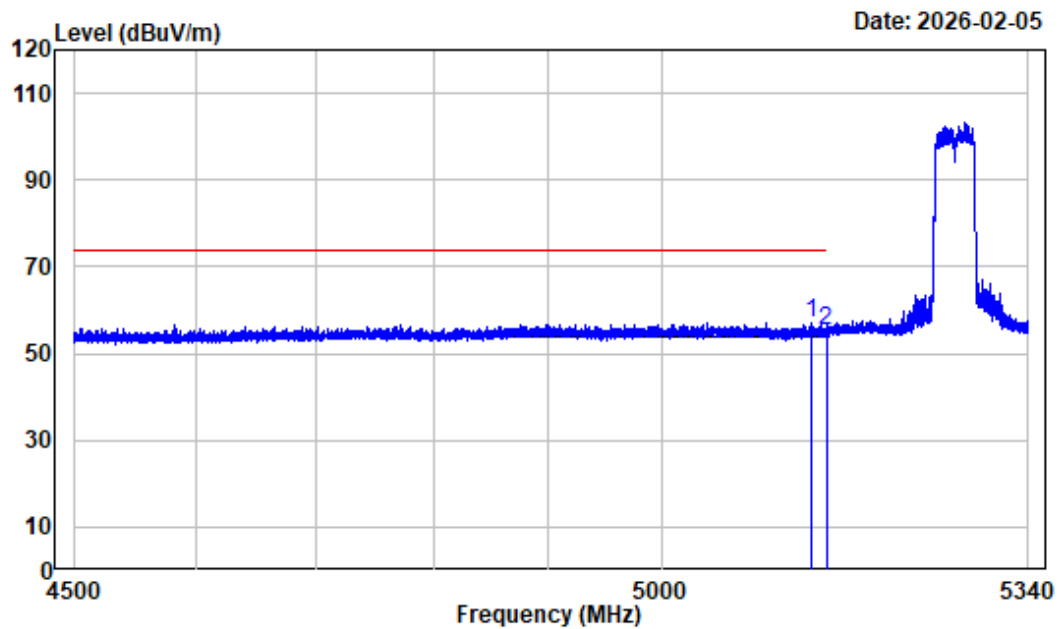

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5136.720	-7.46	64.66	57.20	74.00	-16.80	Peak
2	5150.000	-7.45	62.48	55.03	74.00	-18.97	Peak


Left Band edge_Vertical_Average_802.11n-HT40

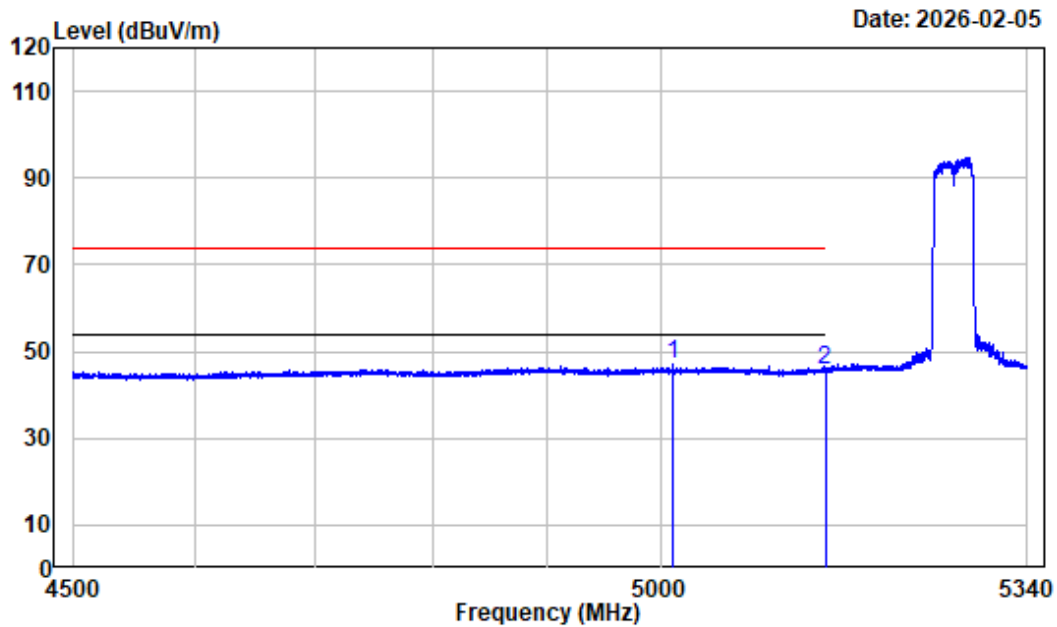

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5010.615	-7.29	54.21	46.92	54.00	-7.08	Average
2	5150.000	-7.45	53.29	45.84	54.00	-8.16	Average


Right Band edge_Horizontal_Peak_802.11n-HT40

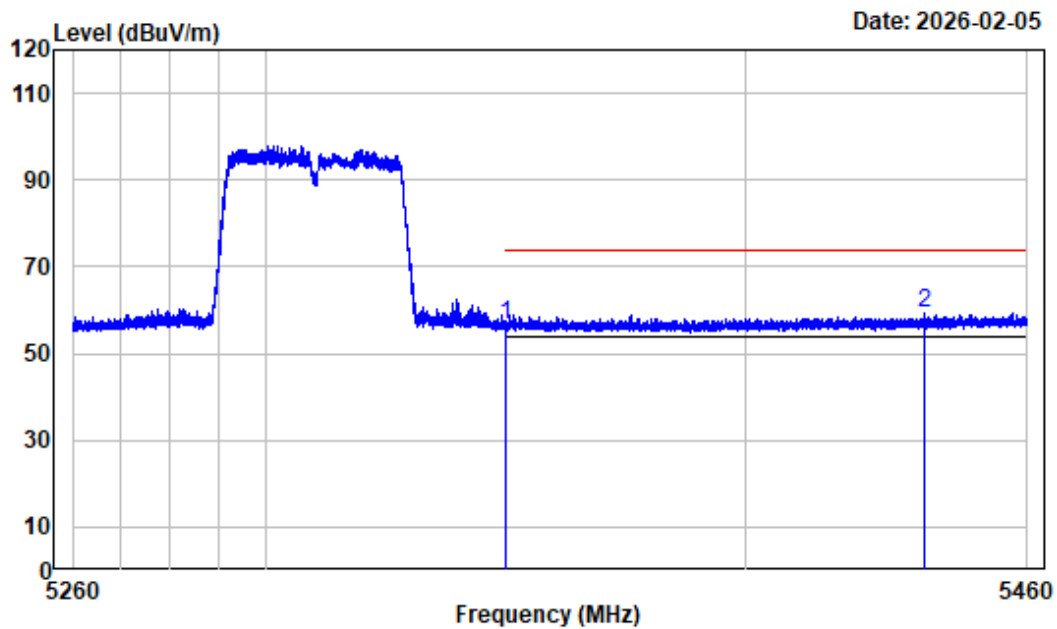

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.38	56.62	74.00	-17.38	Peak
2	5438.150	-6.37	65.76	59.39	74.00	-14.61	Peak


Right Band edge_Horizontal_Average_802.11n-HT40

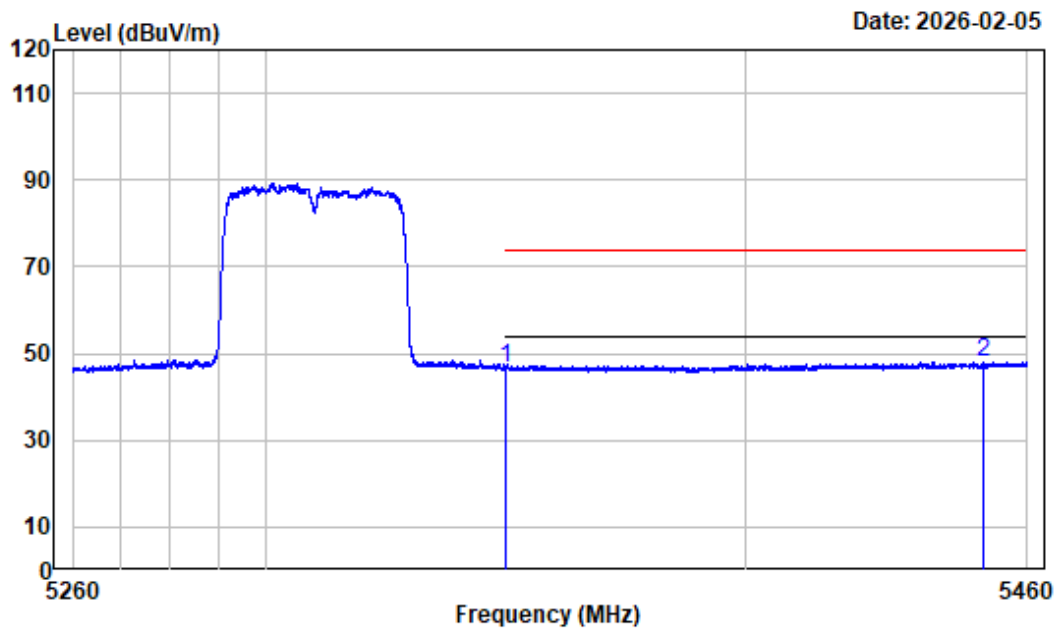

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	53.34	46.58	54.00	-7.42	Average
2	5450.575	-6.31	54.27	47.96	54.00	-6.04	Average


Right Band edge_Vertical_Peak_802.11n-HT40

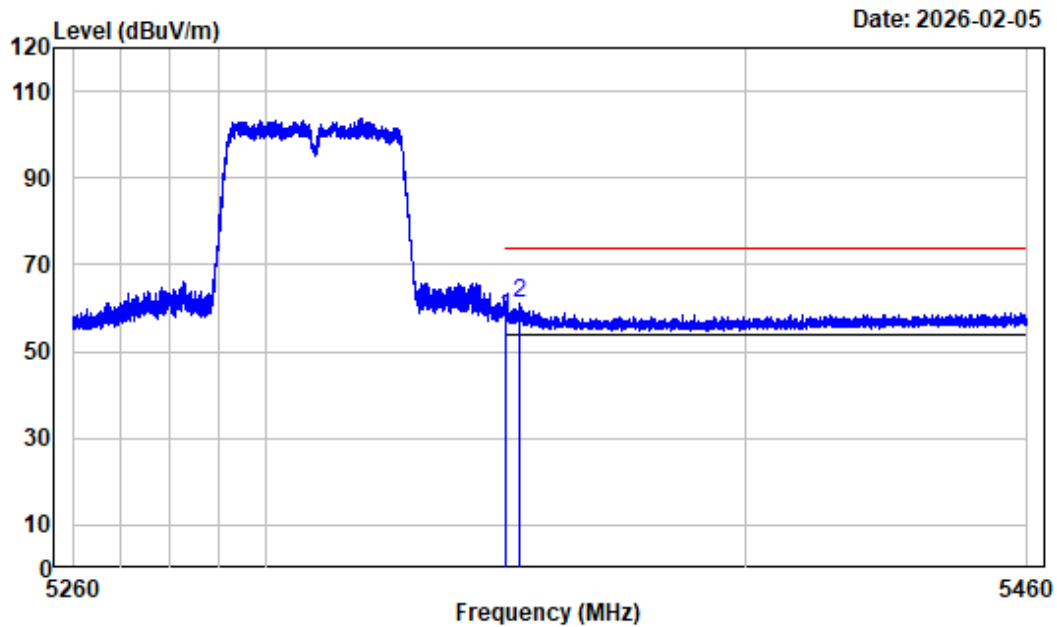

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	64.53	57.77	74.00	-16.23	Peak
2	5352.825	-6.75	67.89	61.14	74.00	-12.86	Peak


Right Band edge_Vertical_Average_802.11n-HT40

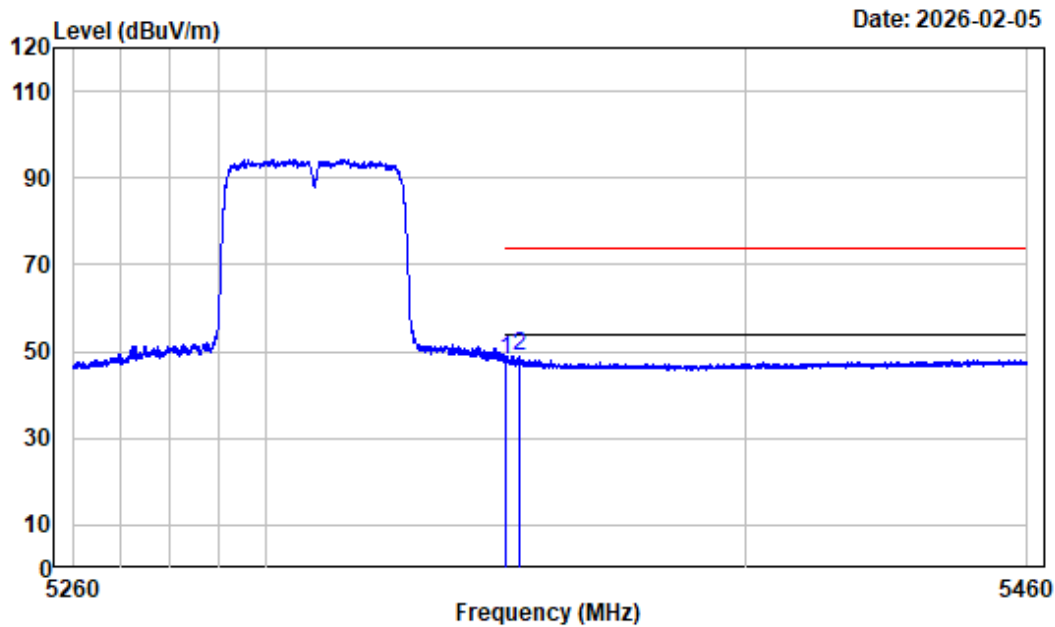

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	54.78	48.02	54.00	-5.98	Average
2	5352.600	-6.75	55.72	48.97	54.00	-5.03	Average


Left Band edge_Horizontal_Peak_802.11ac-vht20_5260MHz

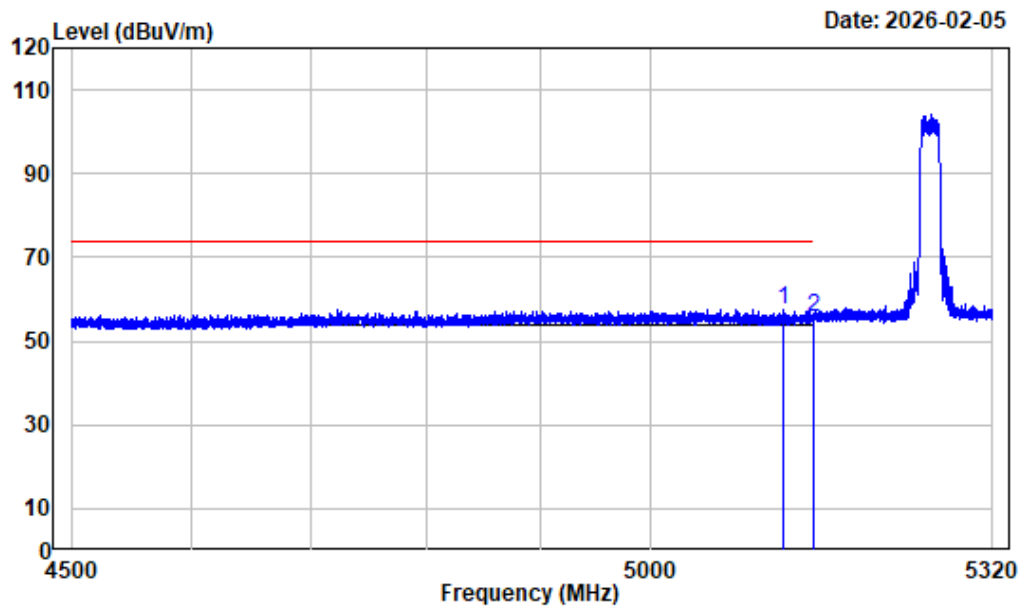

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5120.945	-7.47	65.14	57.67	74.00	-16.33	Peak
2 5150.000	-7.45	63.04	55.59	74.00	-18.41	Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5260MHz

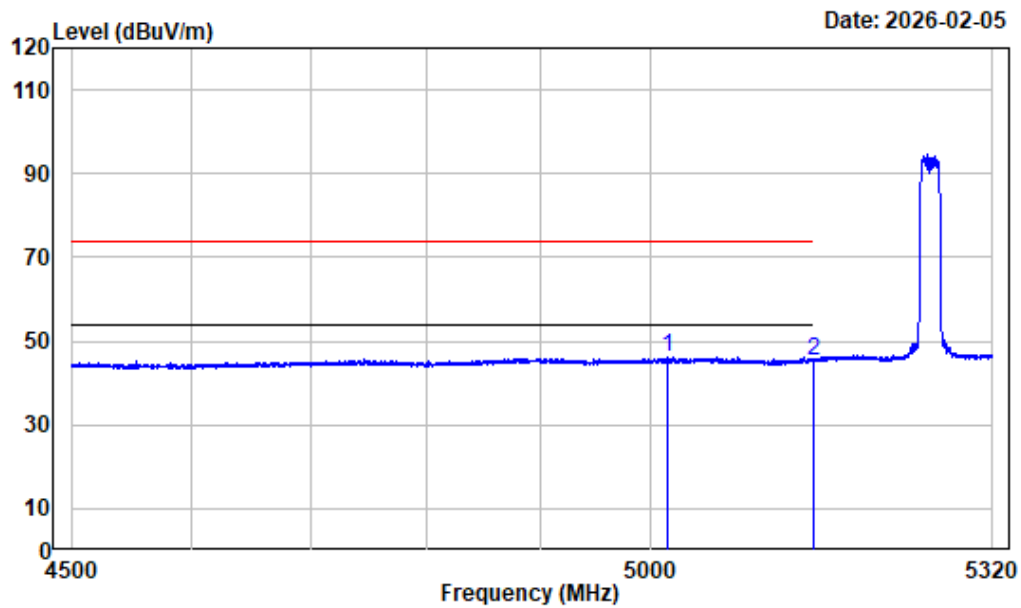

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5014.755	-7.29	53.33	46.04	54.00	-7.96	Average
2 5150.000	-7.45	52.83	45.38	54.00	-8.62	Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5260MHz

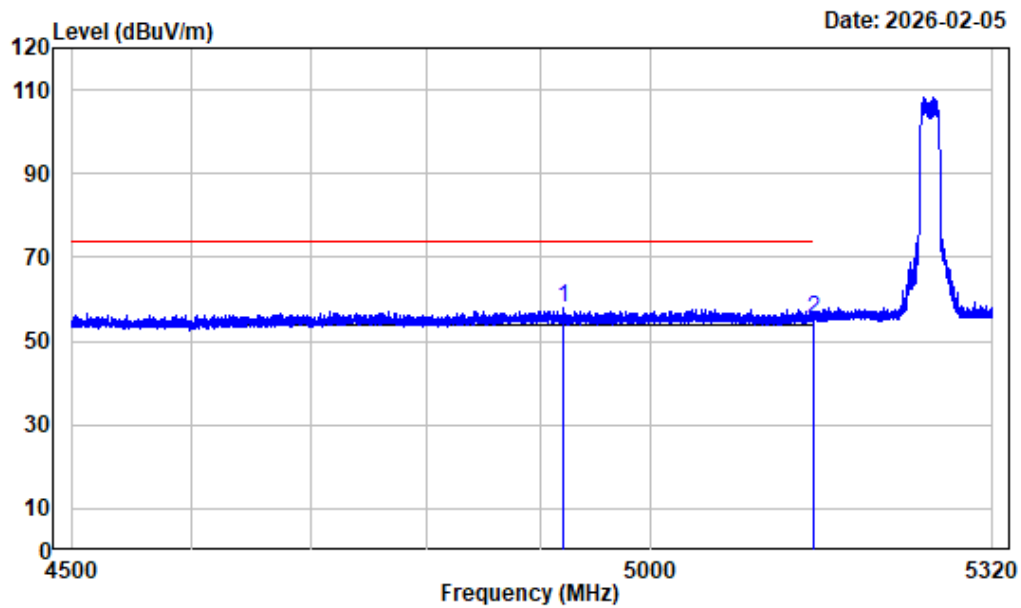

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4921.172	-7.62	65.37	57.75	74.00	-16.25	Peak
2 5150.000	-7.45	62.89	55.44	74.00	-18.56	Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5260MHz

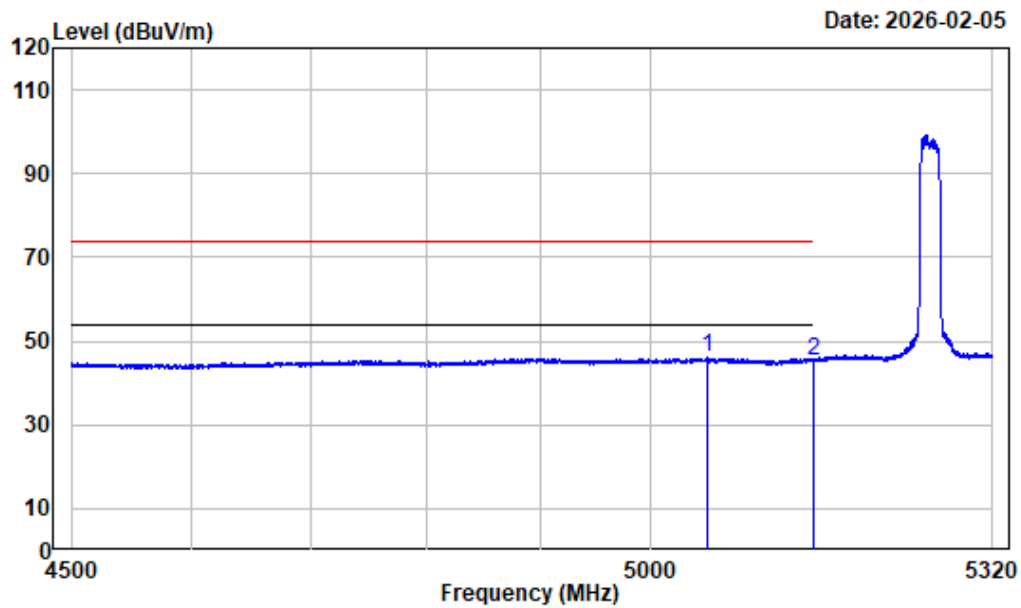

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5051.962	-7.29	53.26	45.97	54.00	-8.03	Average
2	5150.000	-7.45	52.69	45.24	54.00	-8.76	Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5320MHz

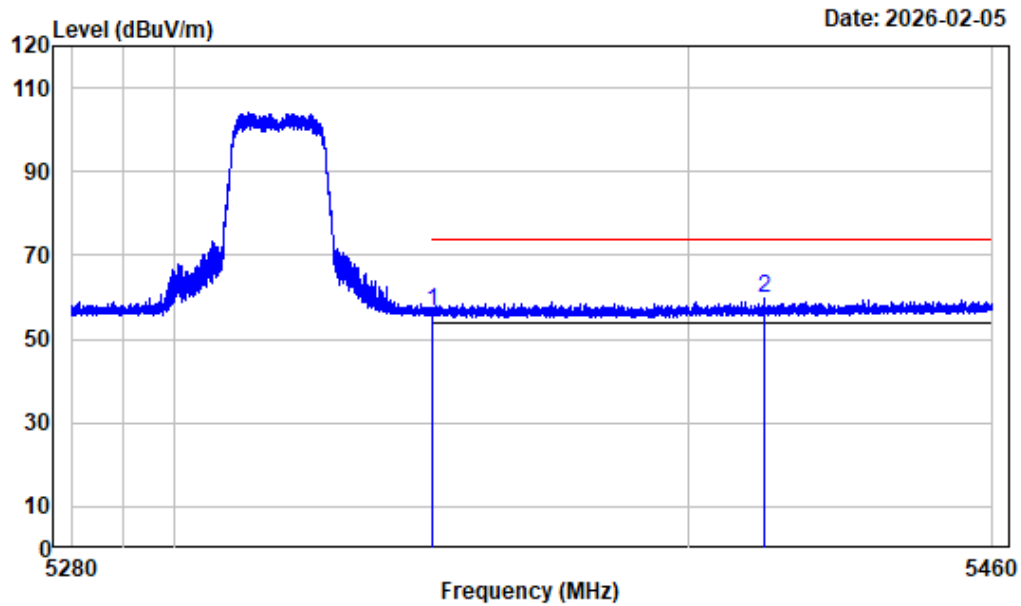

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.25	56.49	74.00	-17.51	Peak
2 5414.797	-6.52	66.31	59.79	74.00	-14.21	Peak


Right Band edge_Horizontal_Average_802.11ac-vht20_5320MHz

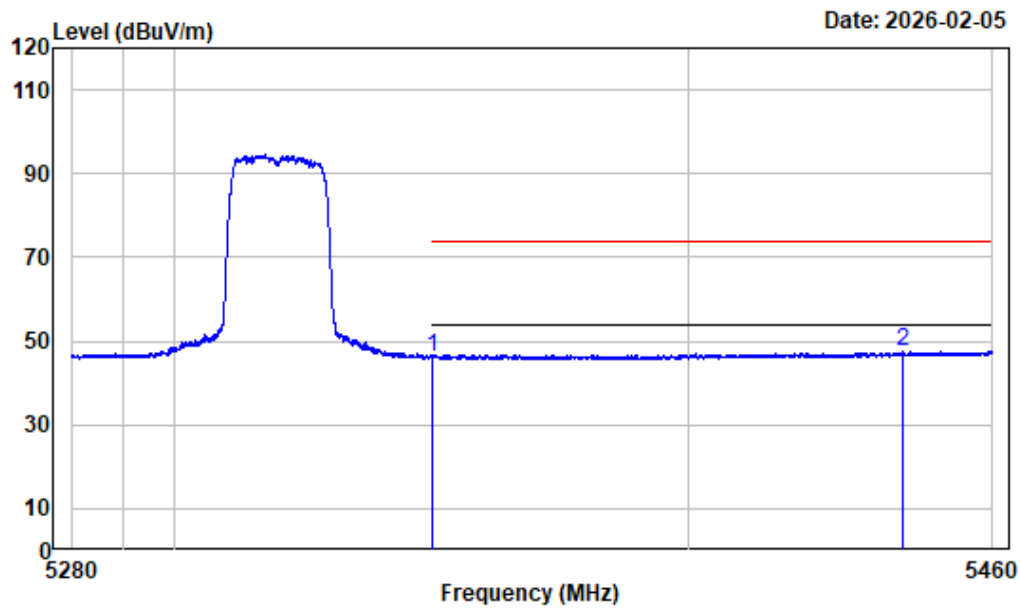

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.95	46.19	54.00	-7.81	Average
2	5442.112	-6.36	53.90	47.54	54.00	-6.46	Average


Right Band edge_Vertical_Peak_802.11ac-vht20_5320MHz

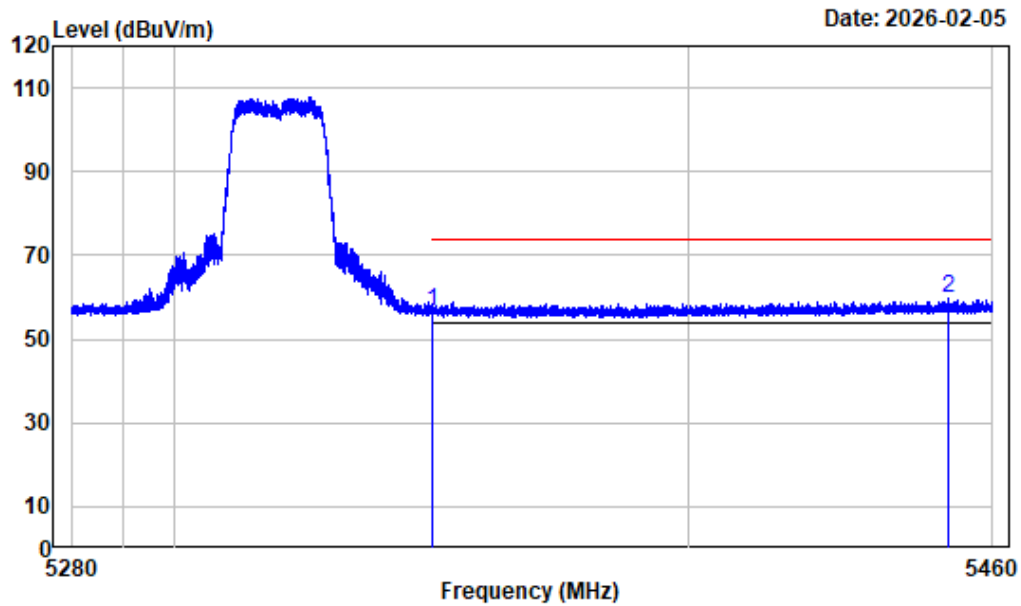

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.51	56.75	74.00	-17.25 Peak
2	5451.292	-6.31	66.16	59.85	74.00	-14.15 Peak


Right Band edge_Vertical_Average_802.11ac-vht20_5320MHz

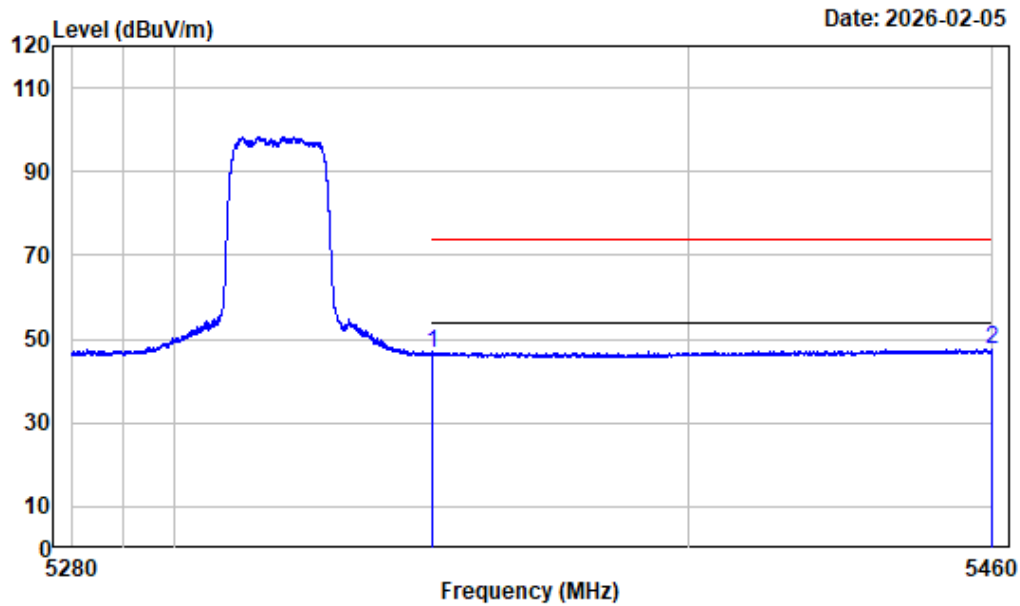

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	53.38	46.62	54.00	-7.38 Average
2	5459.978	-6.26	53.87	47.61	54.00	-6.39 Average


Left Band edge_Horizontal_Peak_802.11ac-vht40_5270MHz

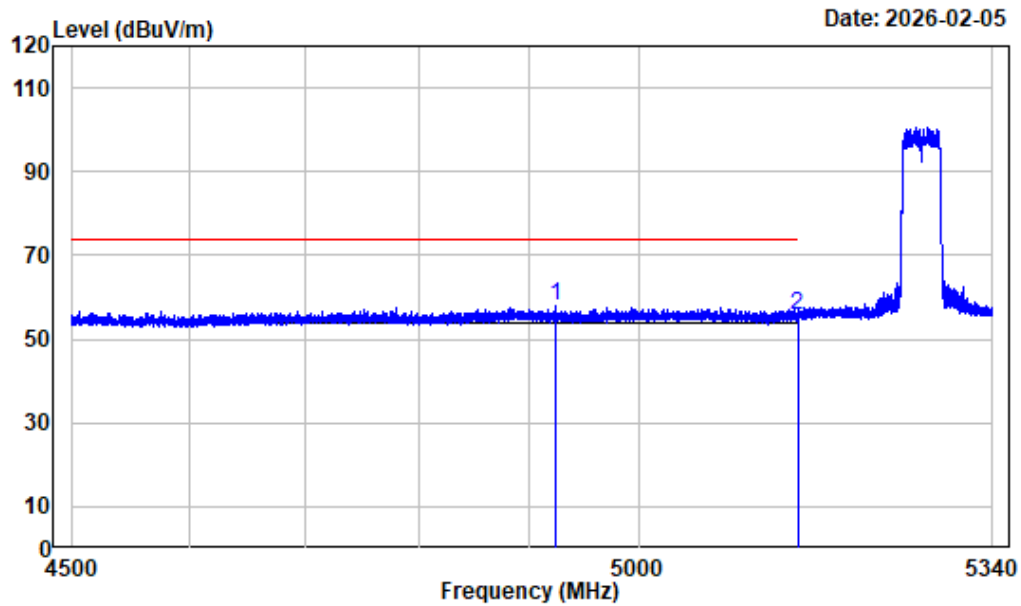

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4923.150	-7.62	65.49	57.87	74.00	-16.13	Peak
2 5150.000	-7.45	63.03	55.58	74.00	-18.42	Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5270MHz

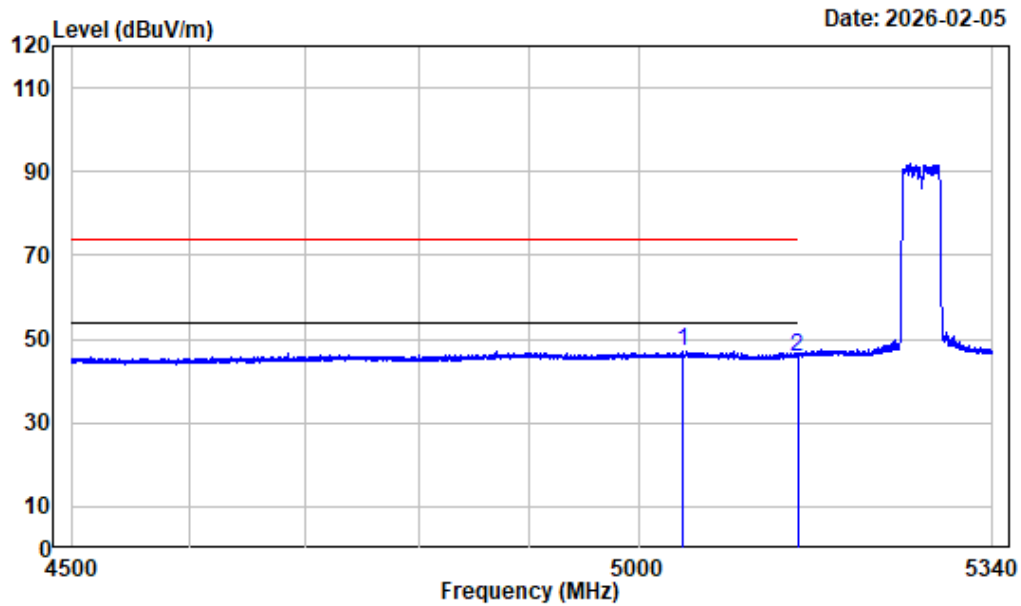

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5041.695	-7.28	54.30	47.02	54.00	-6.98	Average
2 5150.000	-7.45	53.31	45.86	54.00	-8.14	Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5270MHz

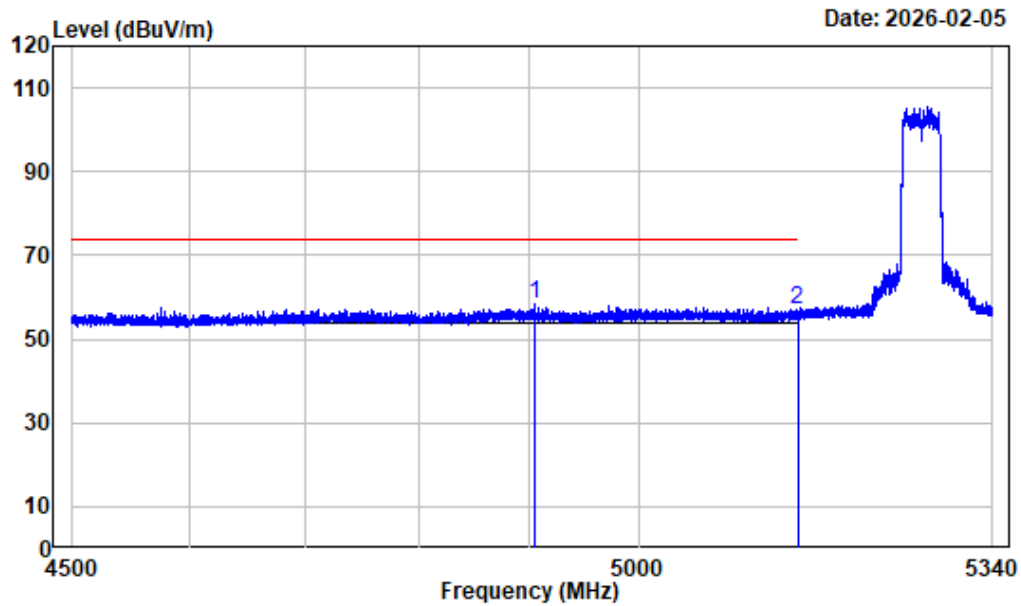

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4904.145	-7.60	66.09	58.49	74.00	-15.51	Peak
2 5150.000	-7.45	64.45	57.00	74.00	-17.00	Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5270MHz

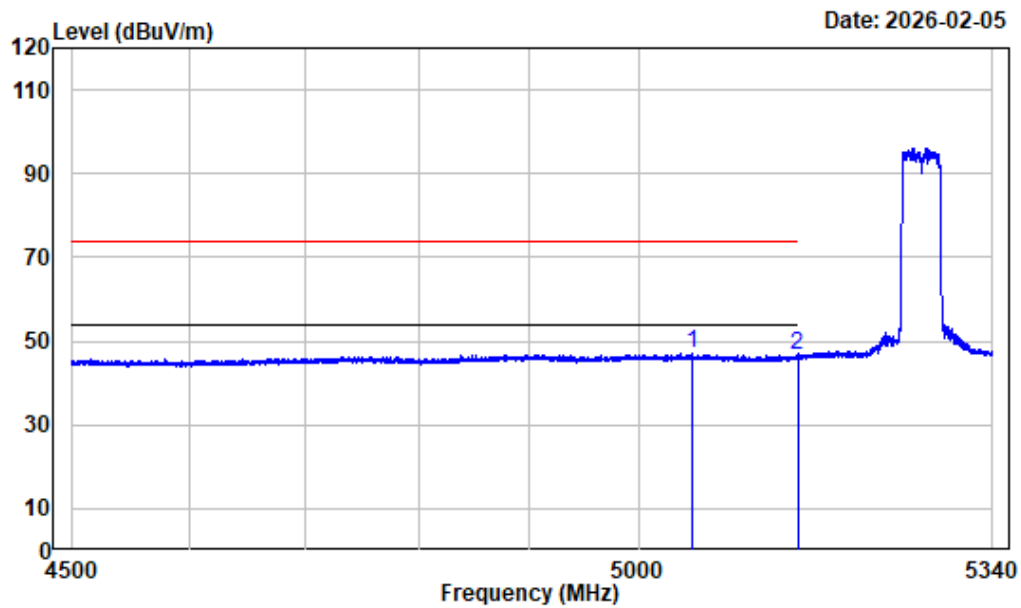

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5049.570	-7.28	54.24	46.96	54.00	-7.04	Average
2 5150.000	-7.45	54.25	46.80	54.00	-7.20	Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5310MHz

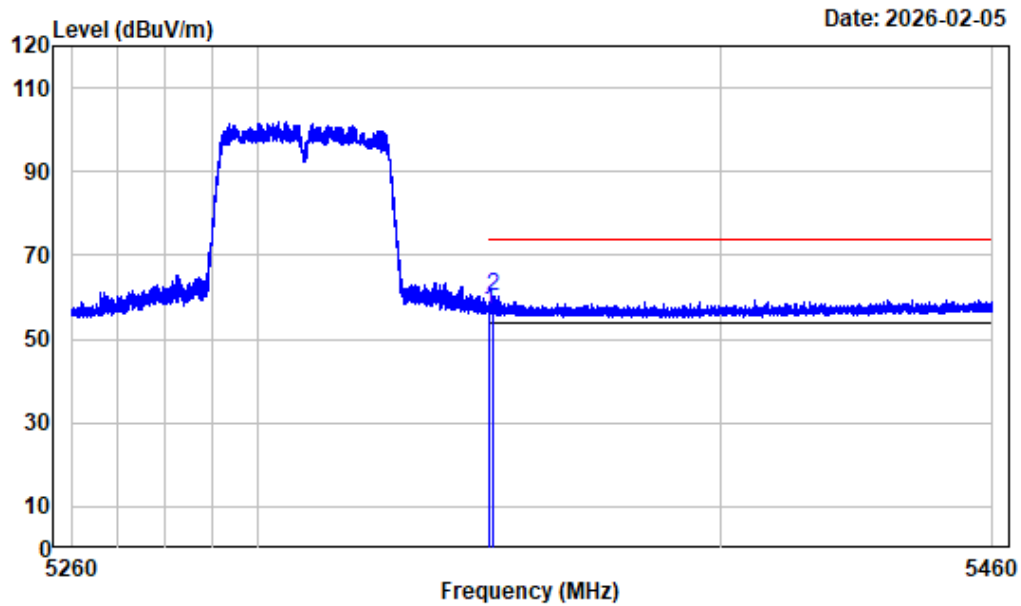

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.27	56.51	74.00	-17.49 Peak
2	5350.650	-6.76	67.13	60.37	74.00	-13.63 Peak


Right Band edge_Horizontal_Average_802.11ac-vht40_5310MHz

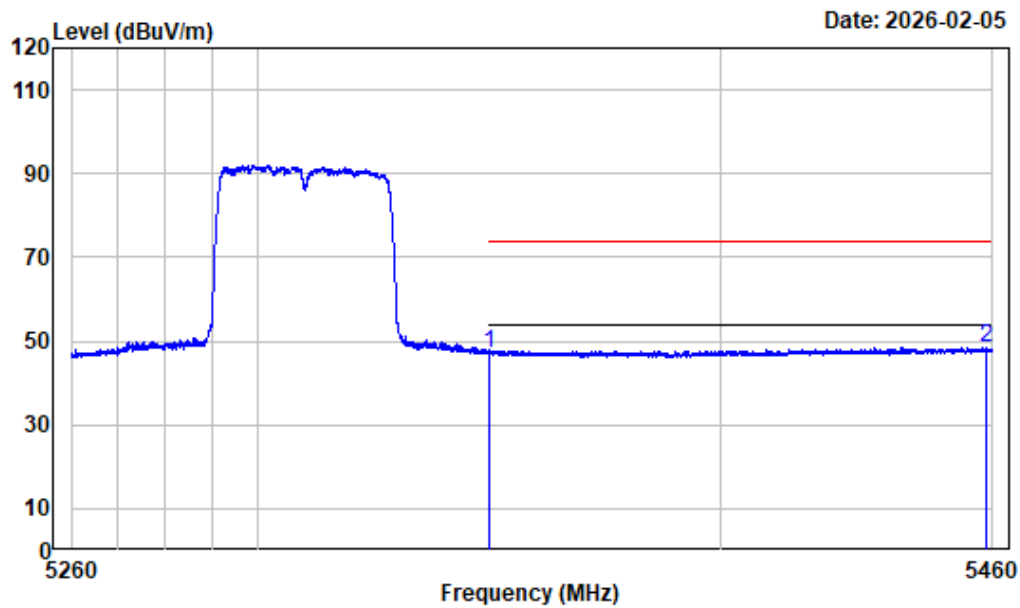

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	53.97	47.21	54.00	-6.79	Average
2 5458.550	-6.28	54.79	48.51	54.00	-5.49	Average


Right Band edge_Vertical_Peak_802.11ac-vht40_5310MHz

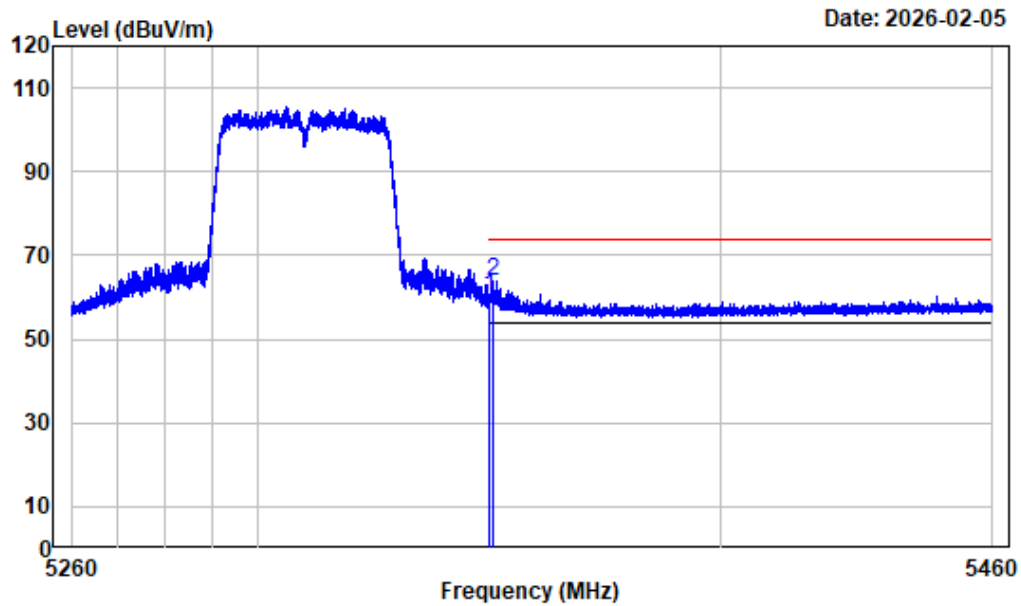

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	66.88	60.12	74.00	-13.88 Peak
2	5350.725	-6.76	70.63	63.87	74.00	-10.13 Peak


Right Band edge_Vertical_Average_802.11ac-vht40_5310MHz

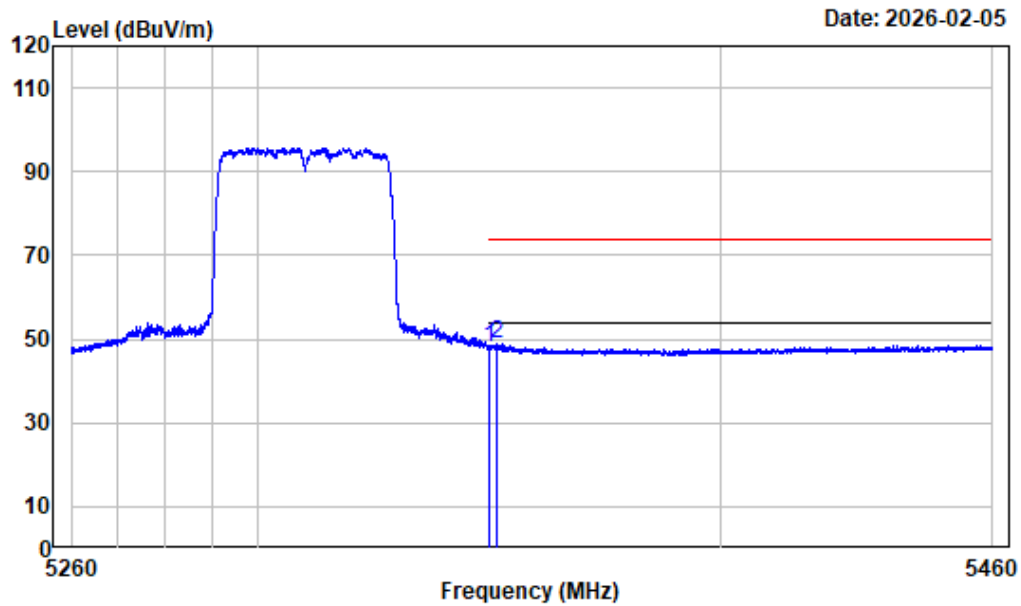

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	54.59	47.83	54.00	-6.17 Average
2	5351.300	-6.76	55.64	48.88	54.00	-5.12 Average


Left Band edge_Horizontal_Peak_802.11ac-vht80_5290MHz

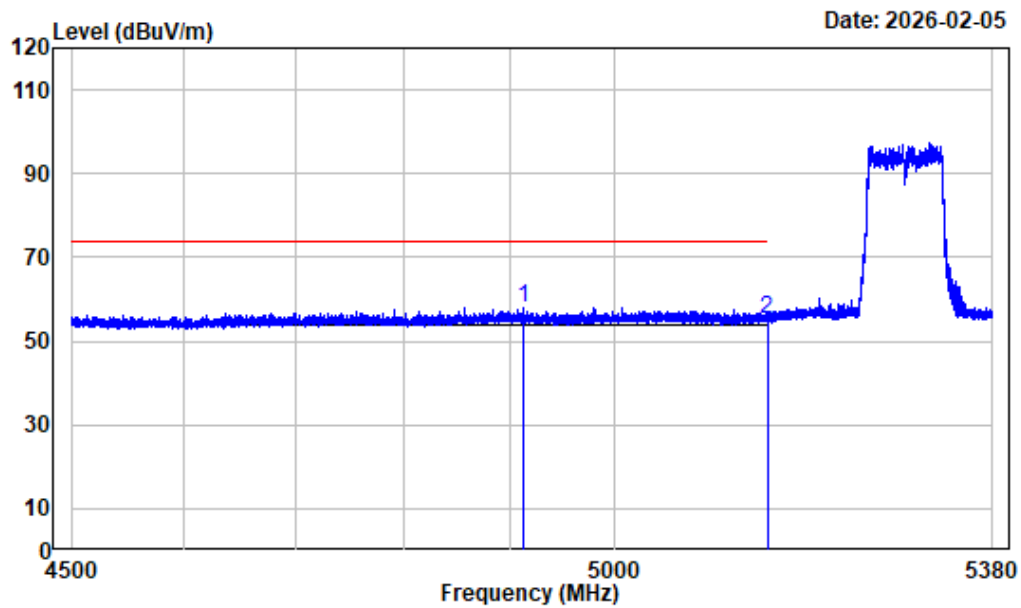

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4912.390	-7.61	65.43	57.82	74.00	-16.18	Peak
2 5150.000	-7.45	62.66	55.21	74.00	-18.79	Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5290MHz

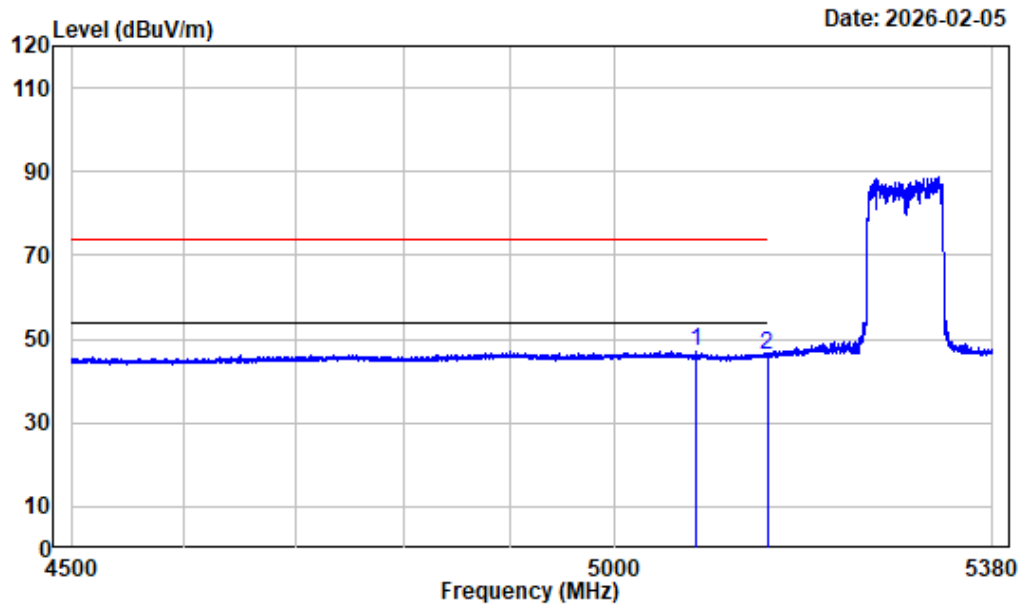

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5079.920	-7.40	54.54	47.14	54.00	-6.86 Average
2	5150.000	-7.45	53.81	46.36	54.00	-7.64 Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5290MHz

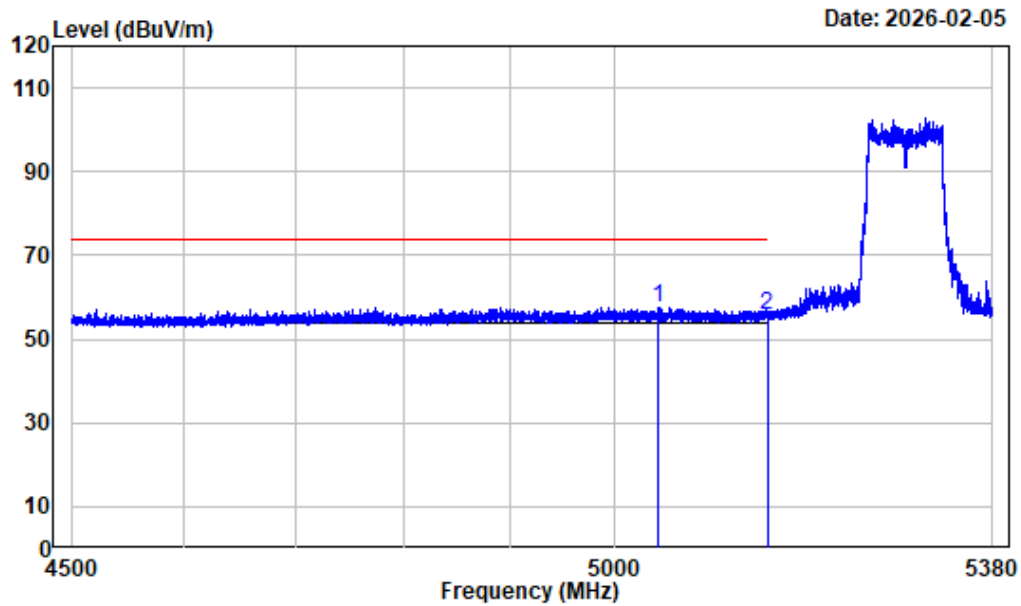

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5041.970	-7.28	64.92	57.64	74.00	-16.36	Peak
2	5150.000	-7.45	63.13	55.68	74.00	-18.32	Peak


Left Band edge_Vertical_Average_802.11ac-vht80_5290MHz

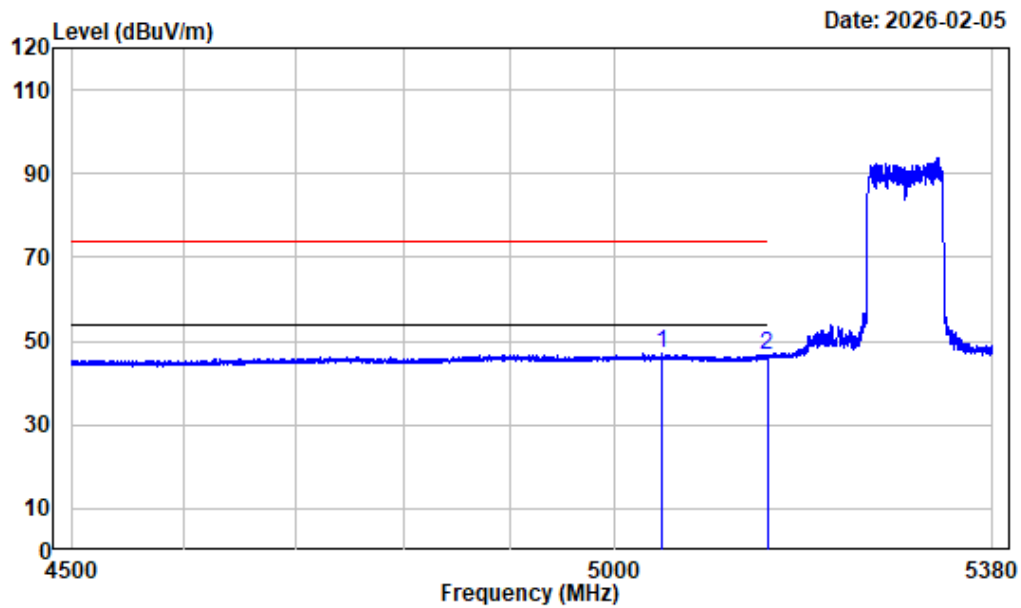

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5046.150	-7.29	54.28	46.99	54.00	-7.01 Average
2	5150.000	-7.45	54.01	46.56	54.00	-7.44 Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5290MHz

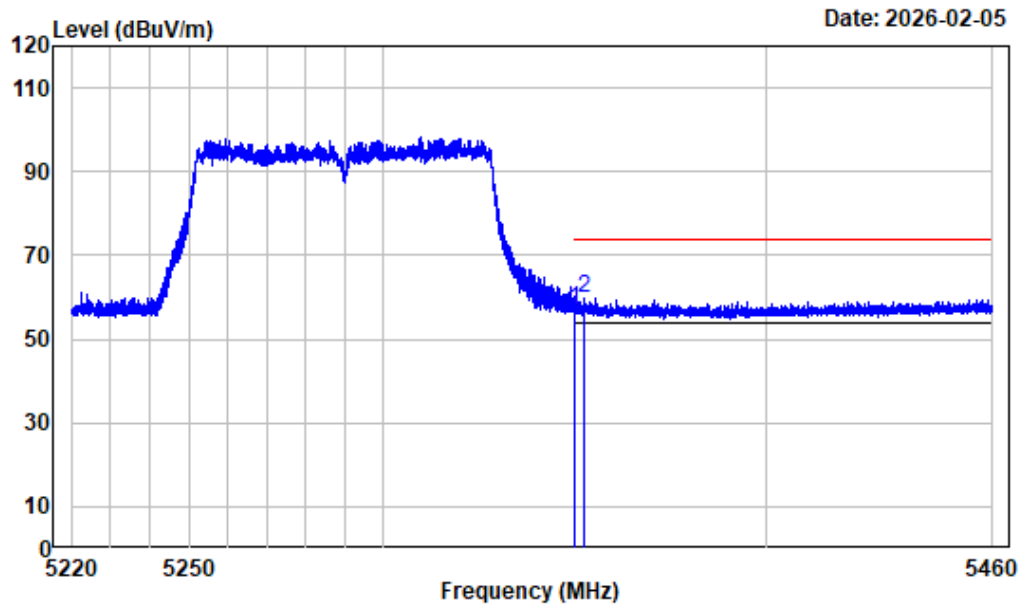

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.71	56.95	74.00	-17.05 Peak
2	5352.090	-6.76	66.76	60.00	74.00	-14.00 Peak


Right Band edge_Horizontal_Average_802.11ac-vht80_5290MHz

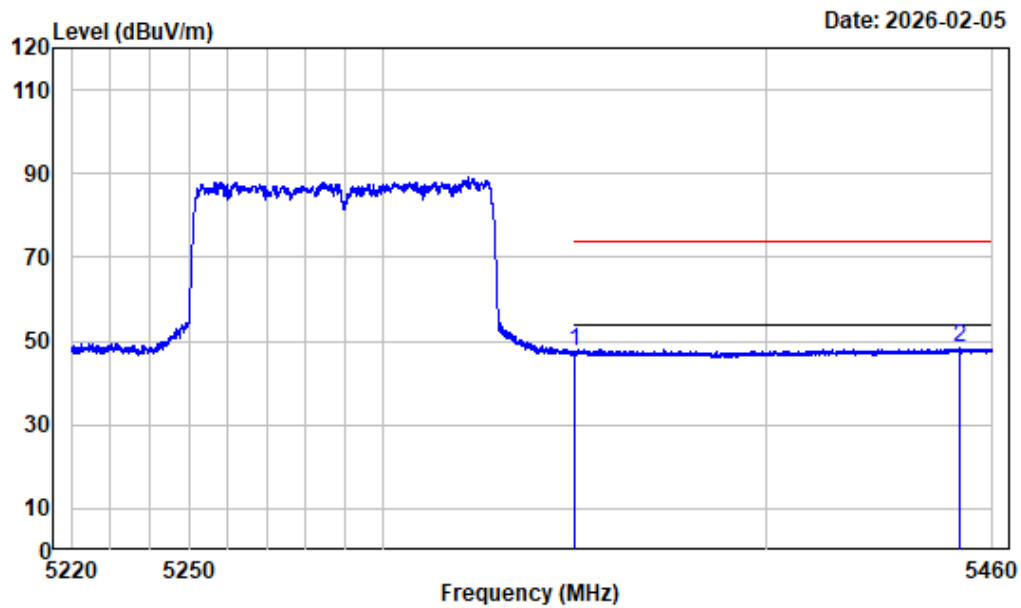

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	54.22	47.46	54.00	-6.54 Average
2	5451.240	-6.31	54.63	48.32	54.00	-5.68 Average


Right Band edge_Vertical_Peak_802.11ac-vht80_5290MHz

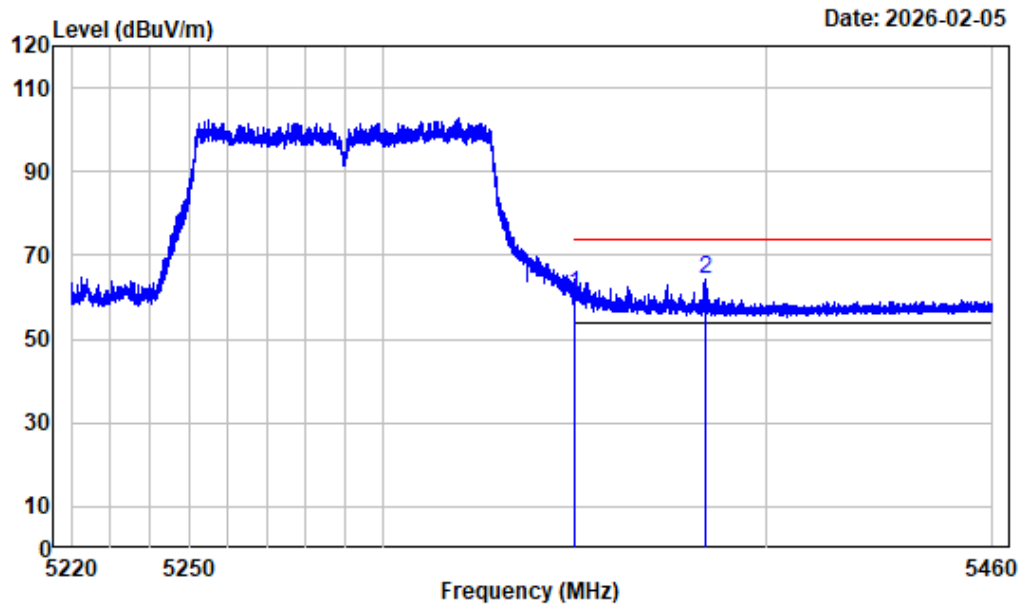

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	67.53	60.77	74.00	-13.23 Peak
2	5384.310	-6.66	70.75	64.09	74.00	-9.91 Peak


Right Band edge_Vertical_Average_802.11ac-vht80_5290MHz

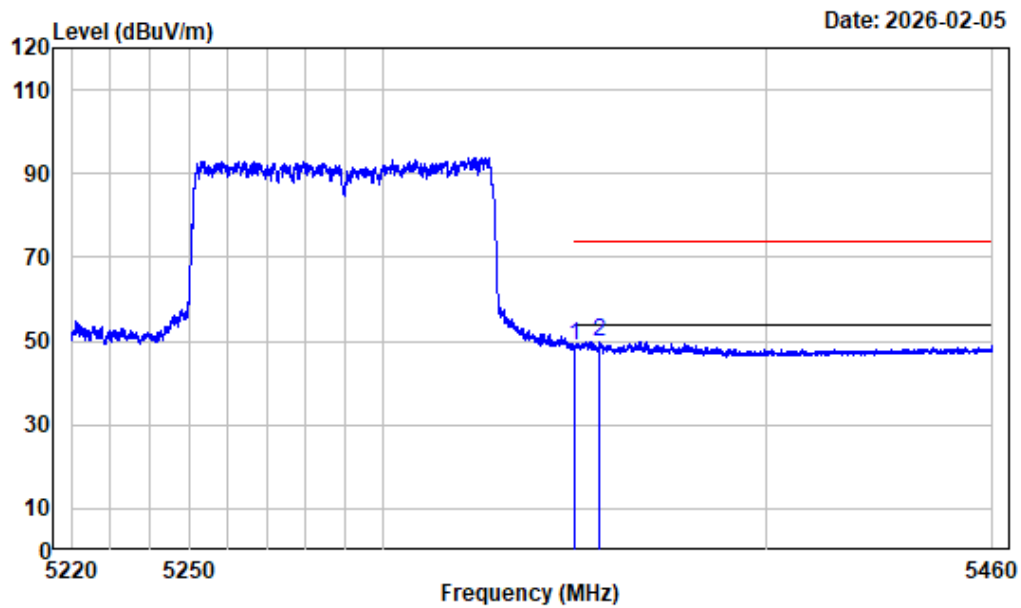

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	55.71	48.95	54.00	-5.05	Average
2 5356.260	-6.74	56.72	49.98	54.00	-4.02	Average


Left Band edge_Horizontal_Peak_802.11ax20_5260MHz

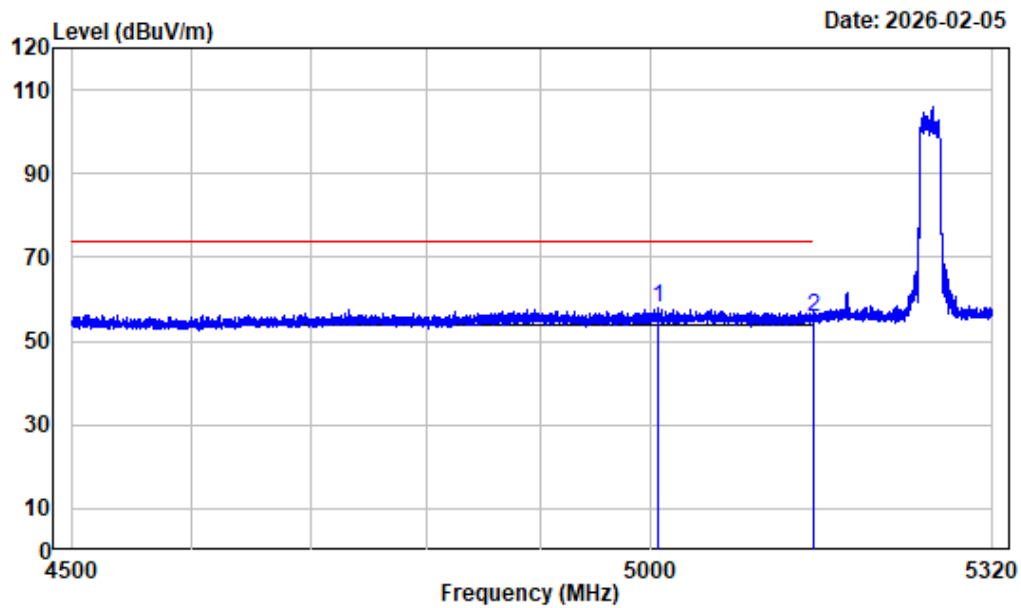

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5006.658	-7.29	65.27	57.98	74.00	-16.02	Peak
2 5150.000	-7.45	63.06	55.61	74.00	-18.39	Peak


Left Band edge_Horizontal_Average_802.11ax20_5260MHz

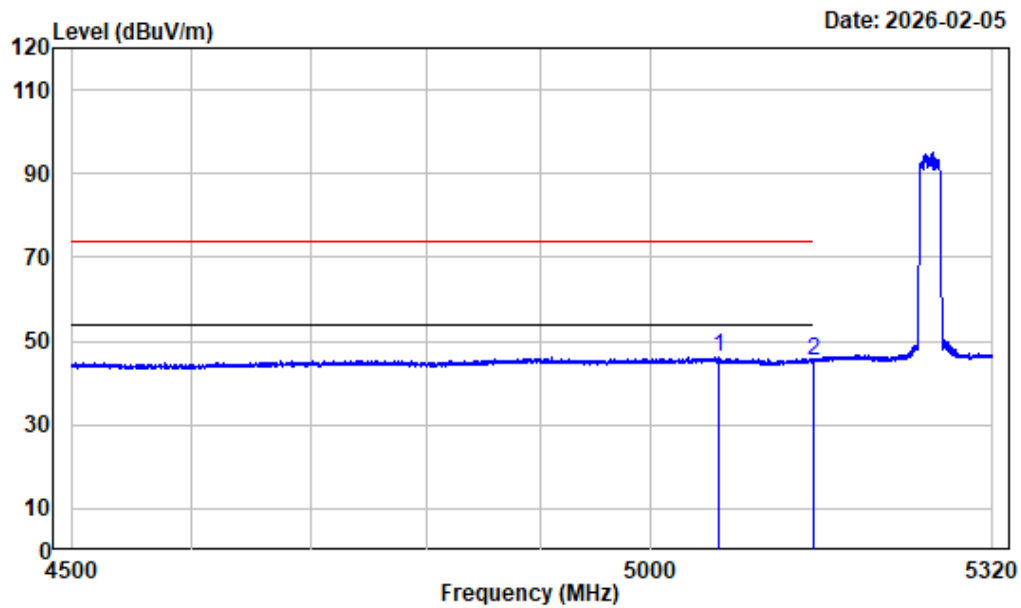

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5061.495	-7.33	53.57	46.24	54.00	-7.76 Average
2	5150.000	-7.45	52.95	45.50	54.00	-8.50 Average


Left Band edge_Vertical_Peak_802.11ax20_5260MHz

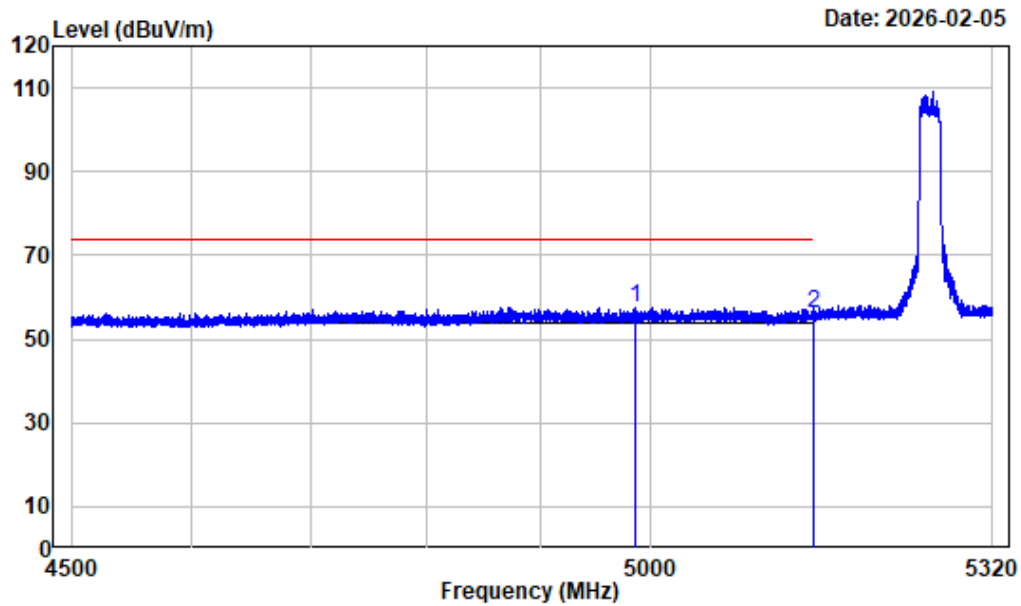

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4985.645	-7.40	65.07	57.67	74.00	-16.33	Peak
2	5150.000	-7.45	63.42	55.97	74.00	-18.03	Peak


Left Band edge_Vertical_Average_802.11ax20_5260MHz

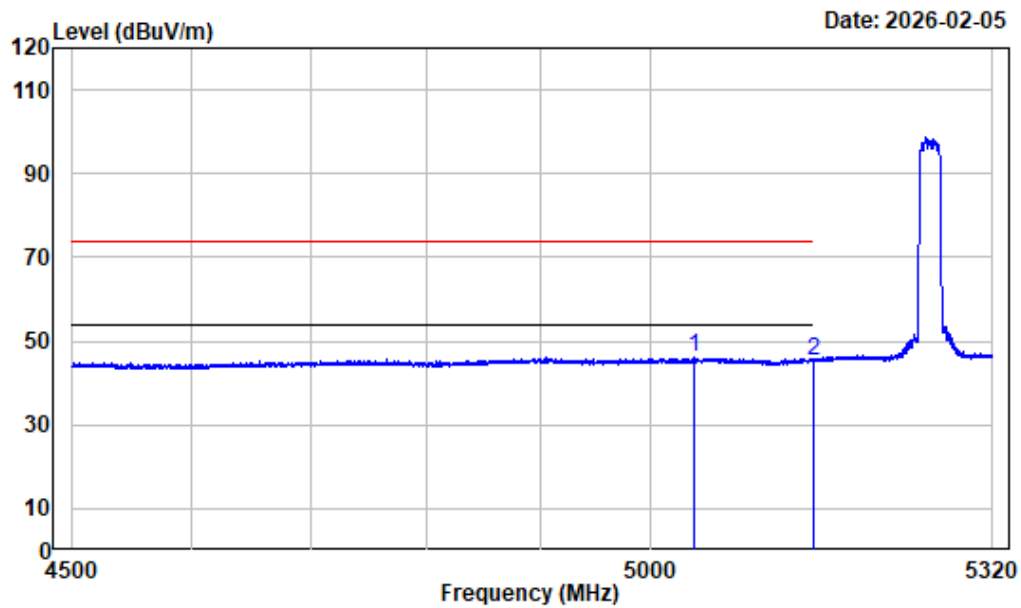

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5039.252	-7.29	53.40	46.11	54.00	-7.89	Average
2 5150.000	-7.45	52.64	45.19	54.00	-8.81	Average


Right Band edge_Horizontal_Peak_802.11ax20_5320MHz

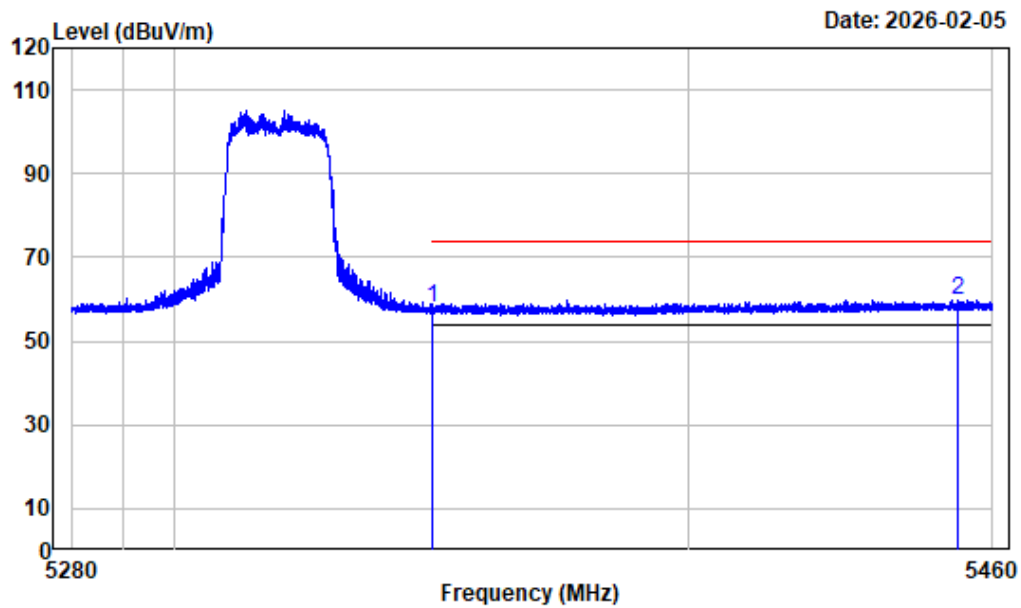

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	64.53	57.77	74.00	-16.23	Peak
2 5453.272	-6.29	66.18	59.89	74.00	-14.11	Peak


Right Band edge_Horizontal_Average_802.11ax20_5320MHz

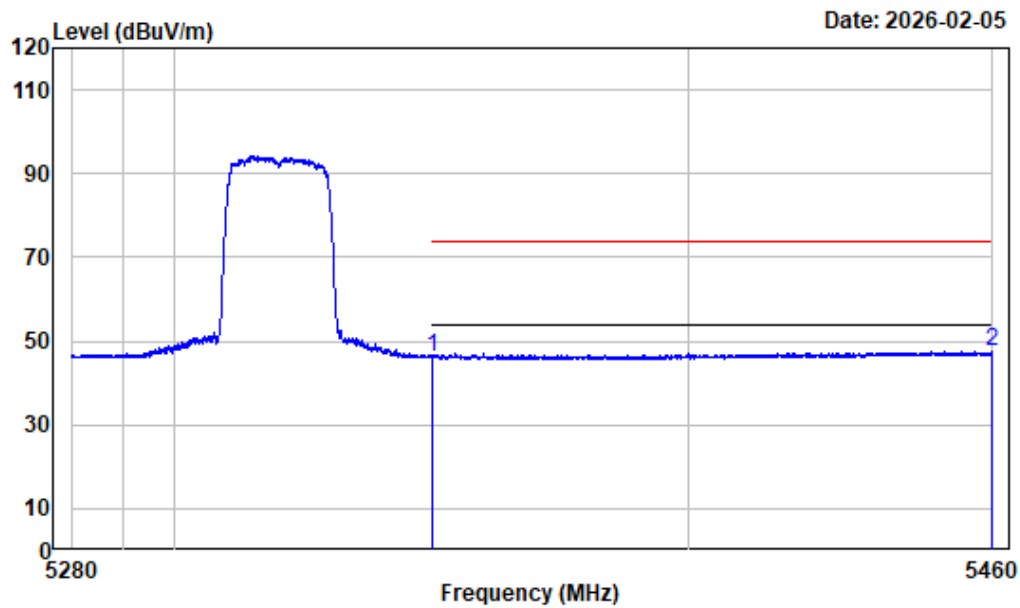

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.95	46.19	54.00	-7.81 Average
2	5459.978	-6.26	53.75	47.49	54.00	-6.51 Average


Right Band edge_Vertical_Peak_802.11ax20_5320MHz

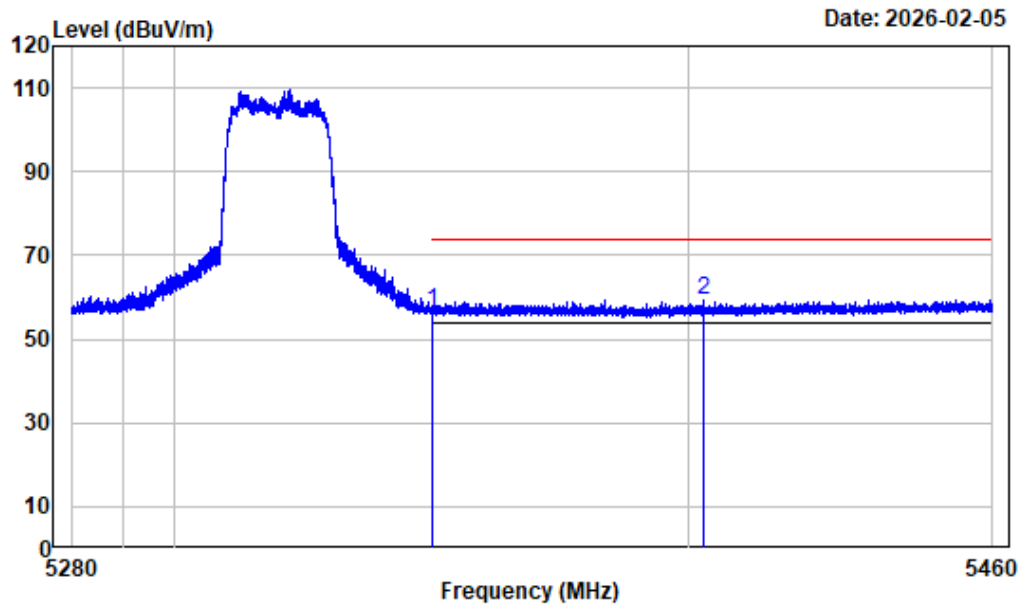

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.33	56.57	74.00	-17.43 Peak
2	5403.075	-6.59	65.94	59.35	74.00	-14.65 Peak


Right Band edge_Vertical_Average_802.11ax20_5320MHz

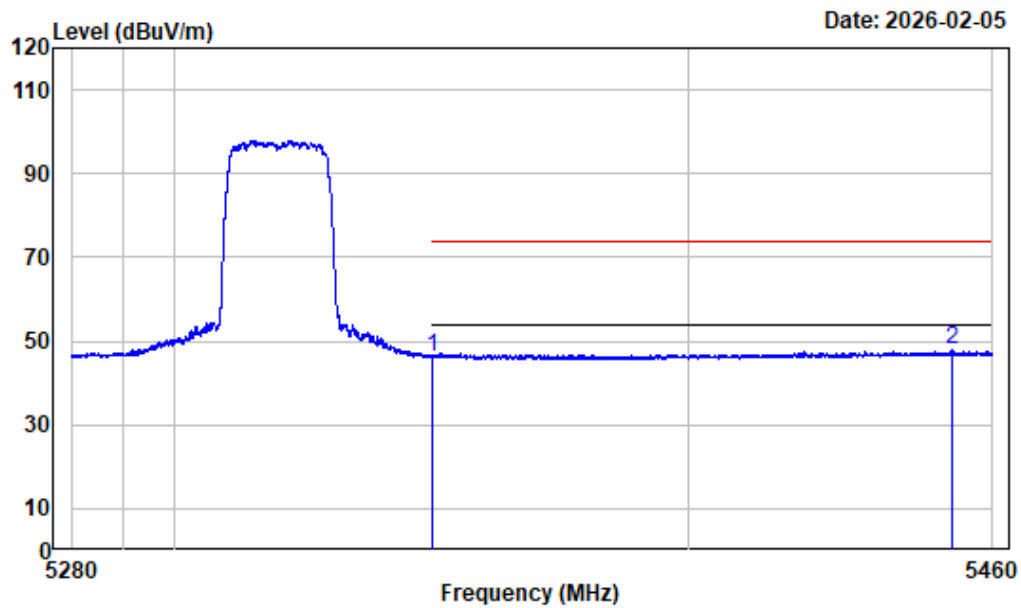

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	53.15	46.39	54.00	-7.61 Average
2	5452.125	-6.29	54.11	47.82	54.00	-6.18 Average


Left Band edge_Horizontal_Peak_802.11ax40_5270MHz

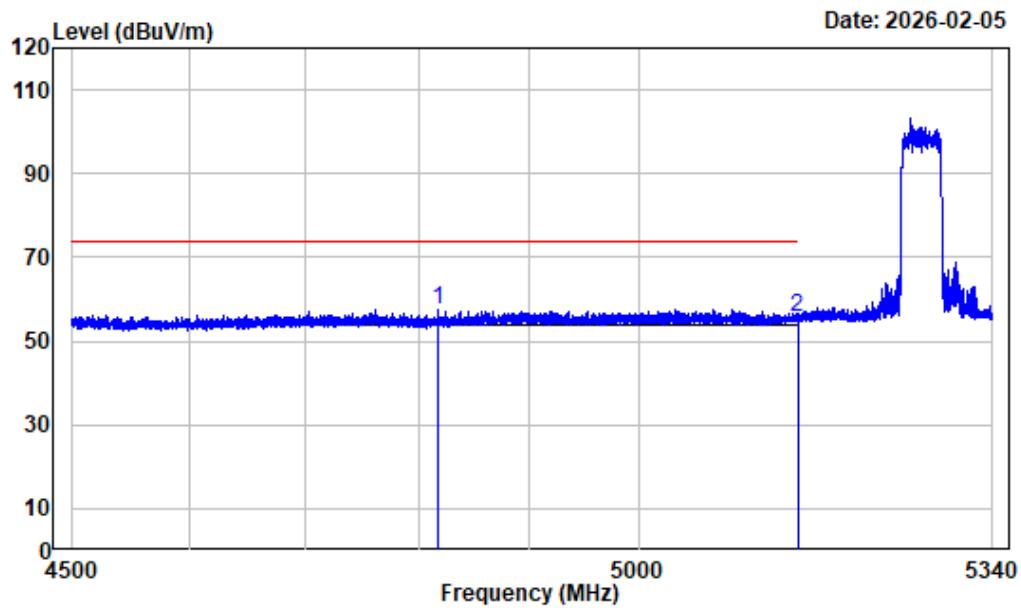

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4817.730	-7.81	65.24	57.43	74.00	-16.57	Peak
2 5150.000	-7.45	63.01	55.56	74.00	-18.44	Peak


Left Band edge_Horizontal_Average_802.11ax40_5270MHz

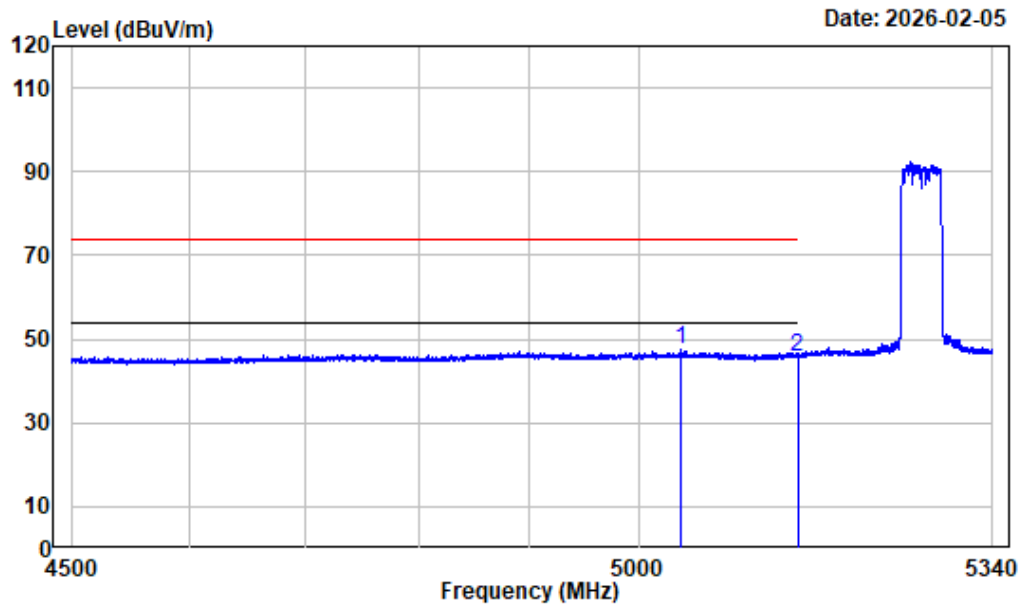

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5039.385	-7.29	54.73	47.44	54.00	-6.56 Average
2	5150.000	-7.45	53.19	45.74	54.00	-8.26 Average


Left Band edge_Vertical_Peak_802.11ax40_5270MHz

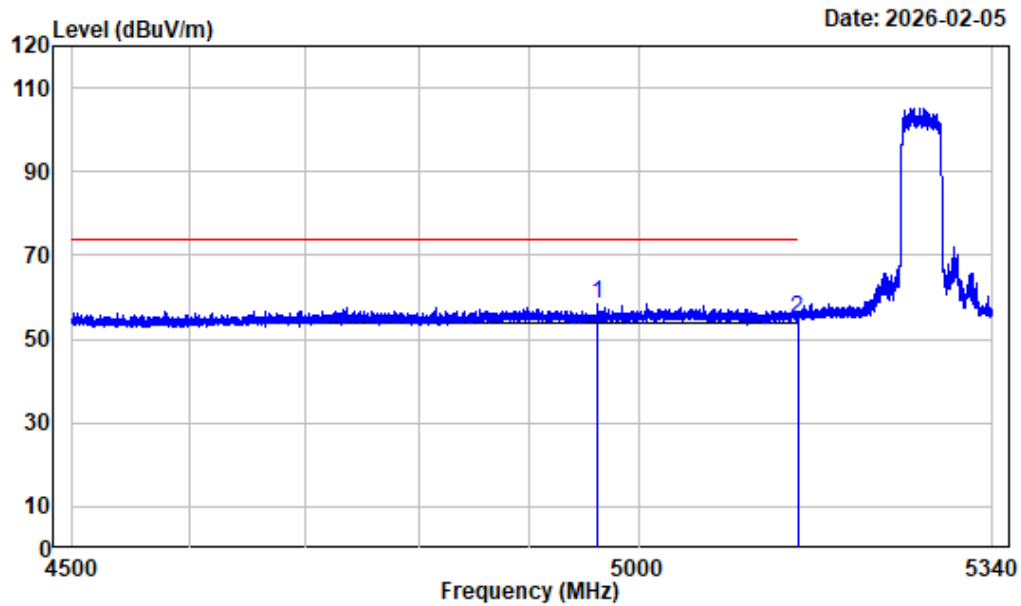

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4962.315	-7.57	65.92	58.35	74.00	-15.65 Peak
2	5150.000	-7.45	62.14	54.69	74.00	-19.31 Peak


Left Band edge_Vertical_Average_802.11ax40_5270MHz

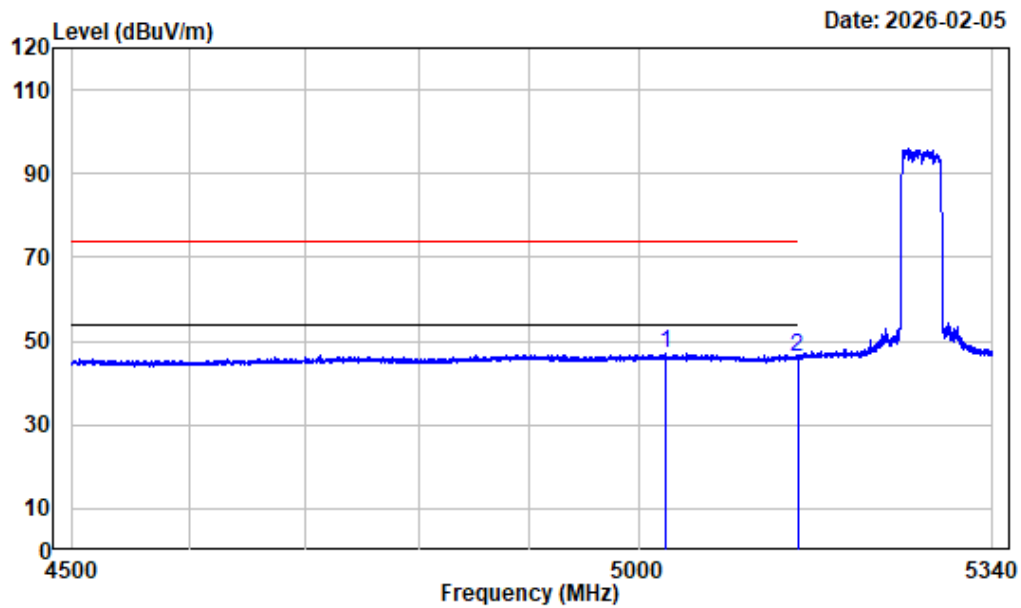

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5025.420	-7.29	54.30	47.01	54.00	-6.99 Average
2	5150.000	-7.45	53.78	46.33	54.00	-7.67 Average


Right Band edge_Horizontal_Peak_802.11ax40_5310MHz

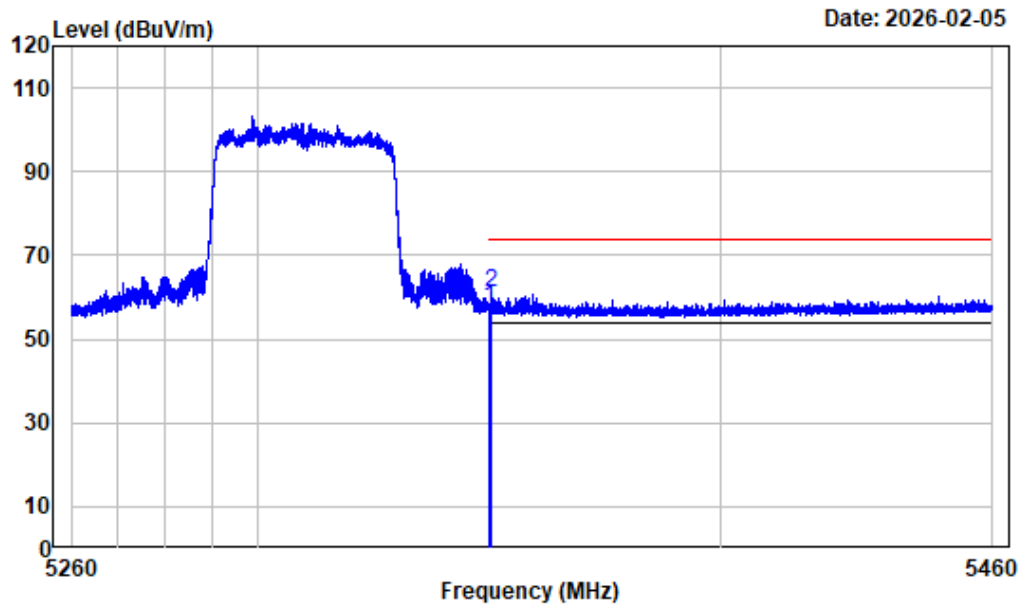

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	64.45	57.69	74.00	-16.31	Peak
2 5350.150	-6.76	67.97	61.21	74.00	-12.79	Peak


Right Band edge_Horizontal_Average_802.11ax40_5310MHz

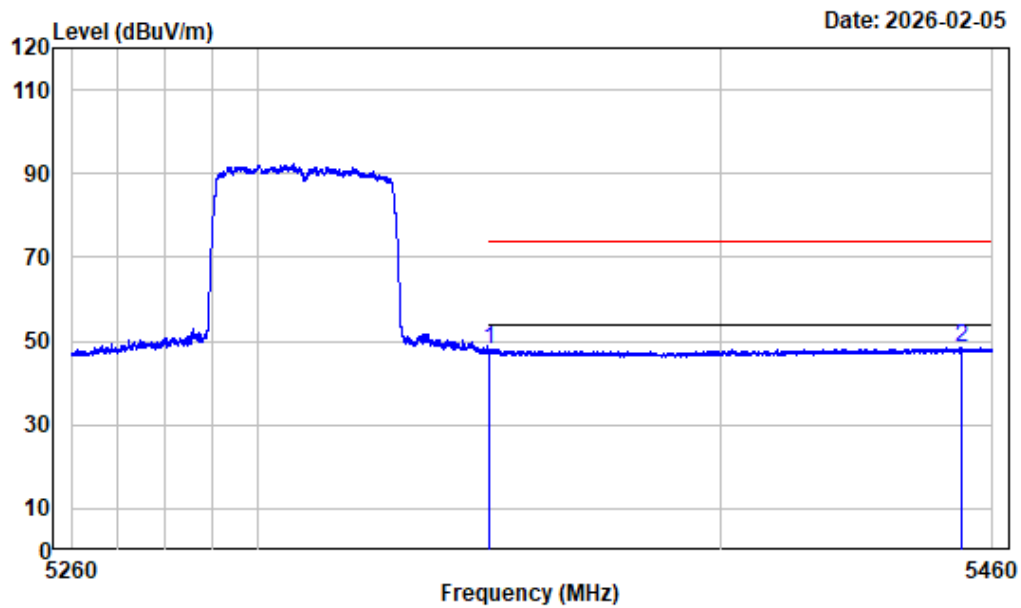

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	54.61	47.85	54.00	-6.15 Average
2	5453.000	-6.29	54.83	48.54	54.00	-5.46 Average


Right Band edge_Vertical_Peak_802.11ax40_5310MHz

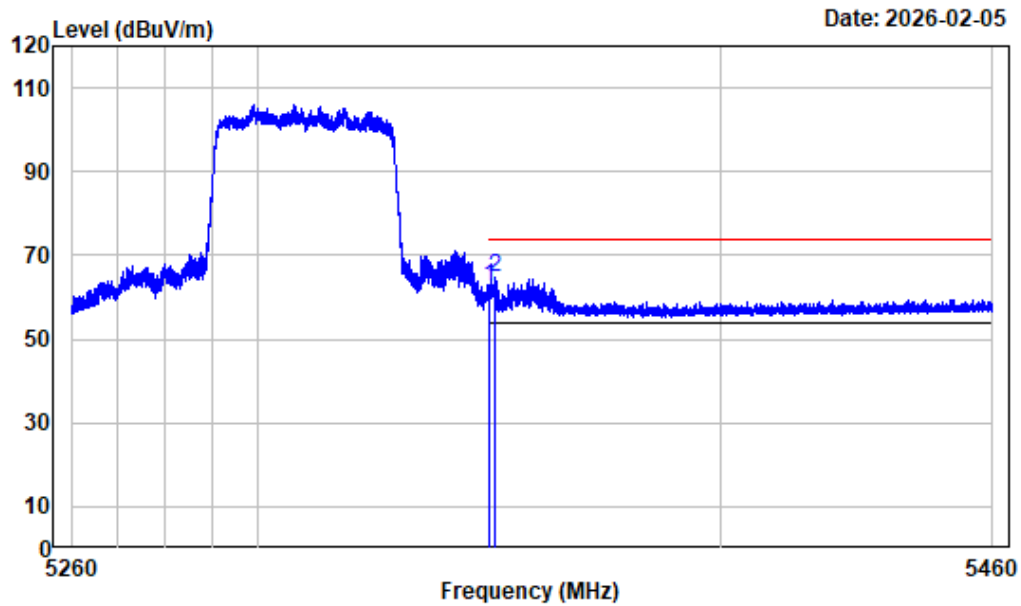

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	69.23	62.47	74.00	-11.53	Peak
2 5351.225	-6.76	71.34	64.58	74.00	-9.42	Peak


Right Band edge_Vertical_Average_802.11ax40_5310MHz

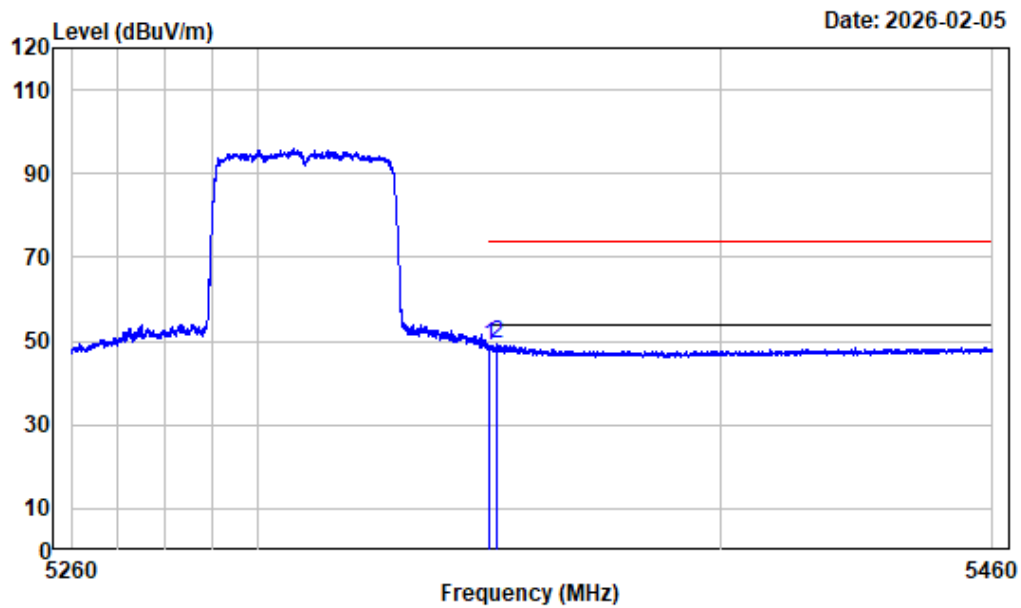

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	55.70	48.94	54.00	-5.06 Average
2	5351.350	-6.76	56.10	49.34	54.00	-4.66 Average


Left Band edge_Horizontal_Peak_802.11ax80_5290MHz

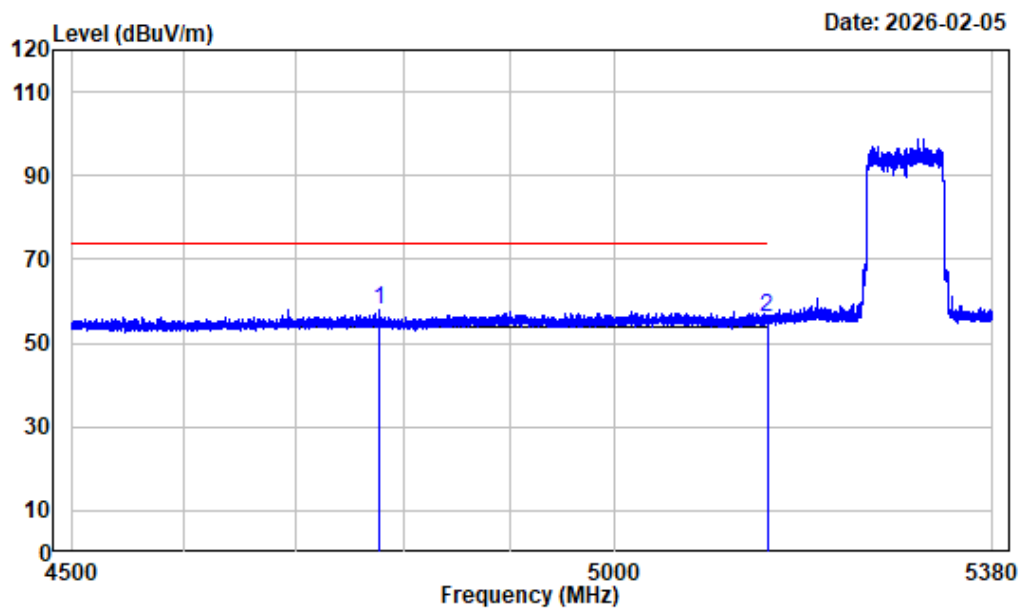

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4776.760	-7.73	65.55	57.82	74.00	-16.18	Peak
2 5150.000	-7.45	63.69	56.24	74.00	-17.76	Peak


Left Band edge_Horizontal_Average_802.11ax80_5290MHz

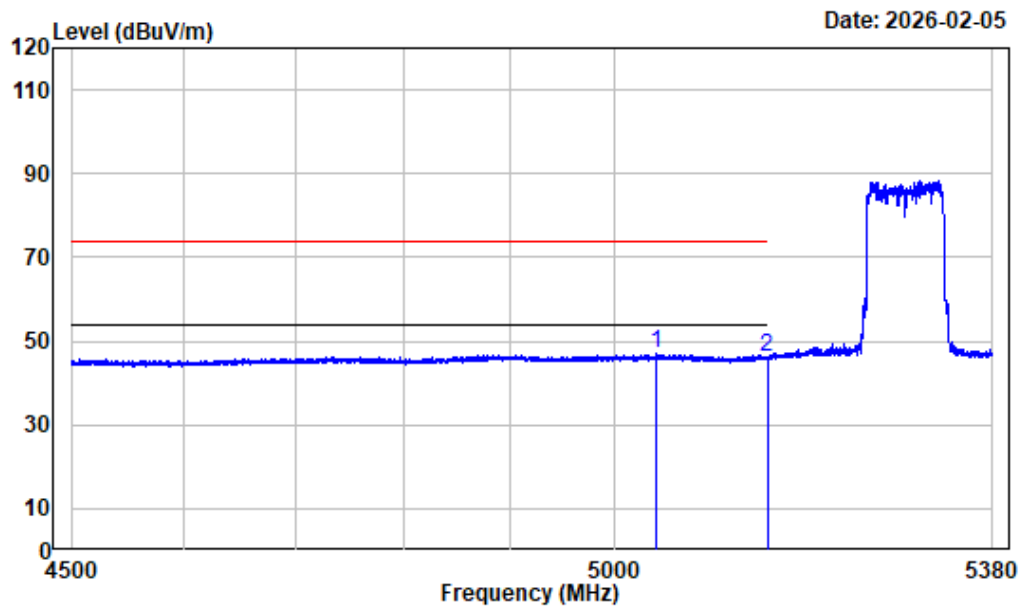

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5040.650	-7.29	54.18	46.89	54.00	-7.11	Average
2 5150.000	-7.45	53.45	46.00	54.00	-8.00	Average


Left Band edge_Vertical_Peak_802.11ax80_5290MHz

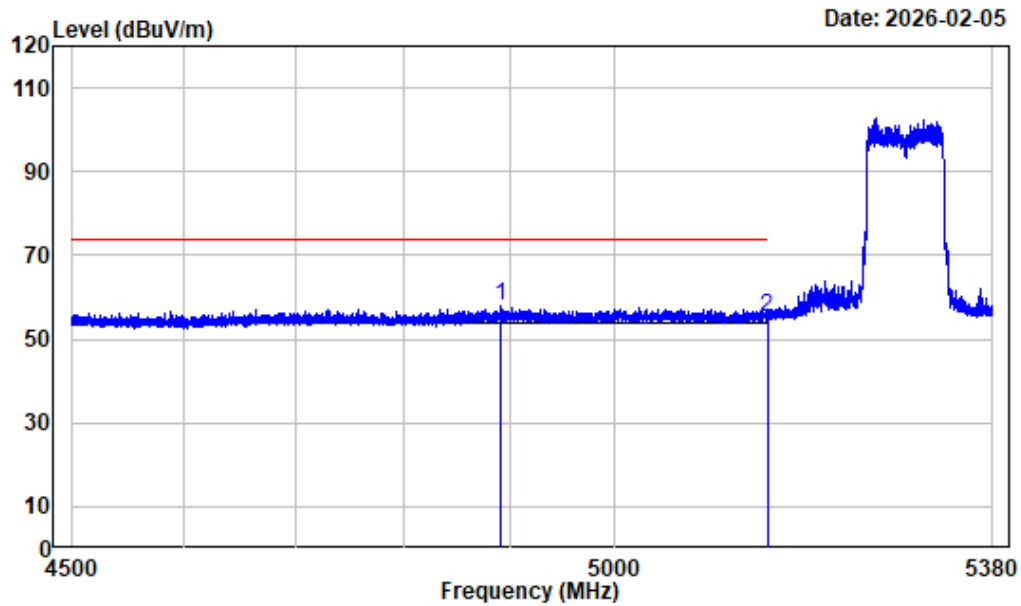

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4891.160	-7.63	65.70	58.07	74.00	-15.93	Peak
2 5150.000	-7.45	62.69	55.24	74.00	-18.76	Peak


Left Band edge_Vertical_Average_802.11ax80_5290MHz

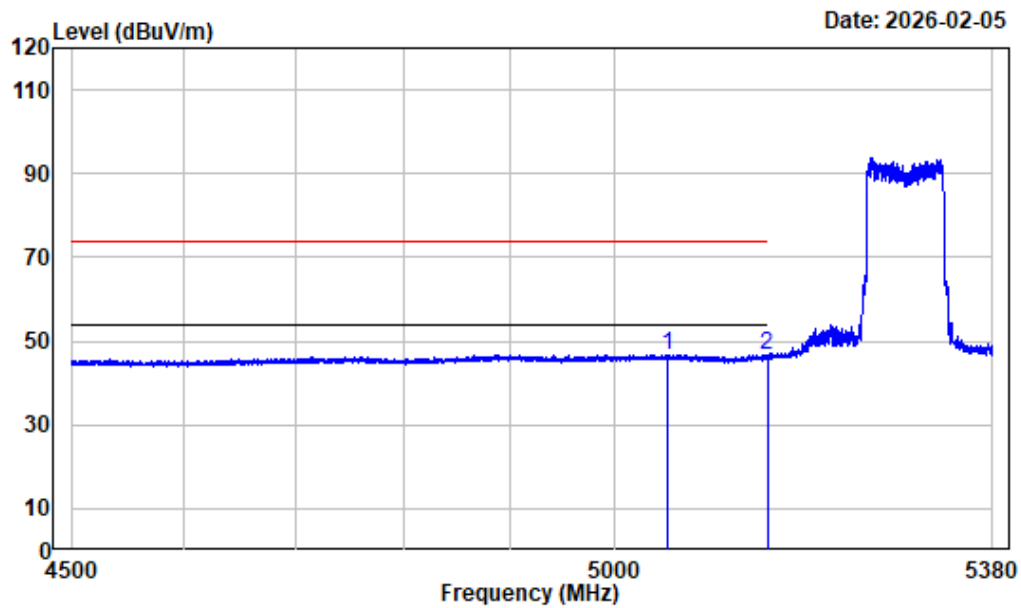

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5050.660	-7.28	54.14	46.86	54.00	-7.14 Average
2	5150.000	-7.45	53.87	46.42	54.00	-7.58 Average


Right Band edge_Horizontal_Peak_802.11ax80_5290MHz

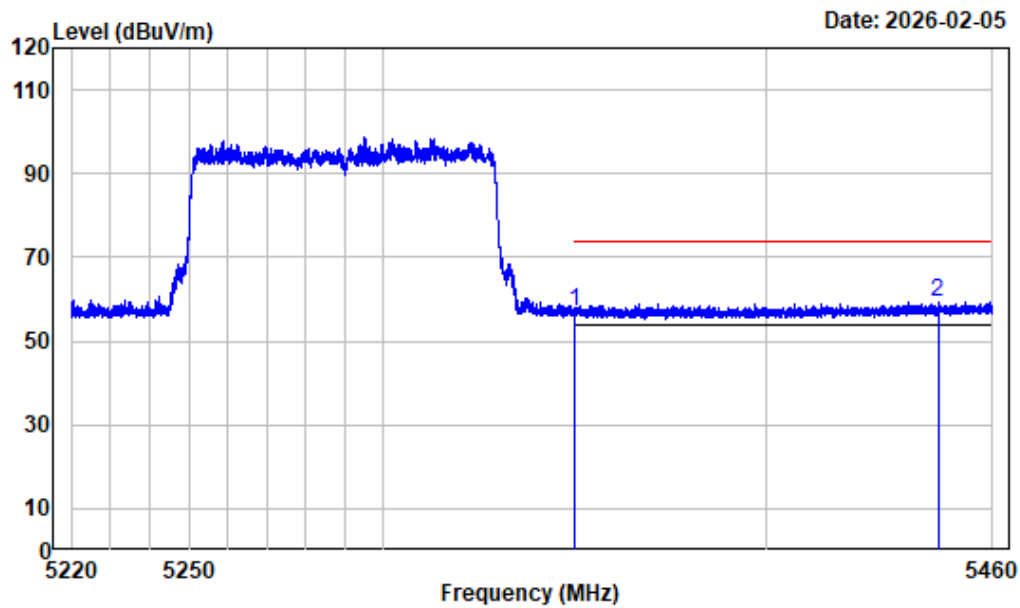

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.65	56.89	74.00	-17.11 Peak
2	5445.480	-6.33	65.81	59.48	74.00	-14.52 Peak


Right Band edge_Horizontal_Average_802.11ax80_5290MHz

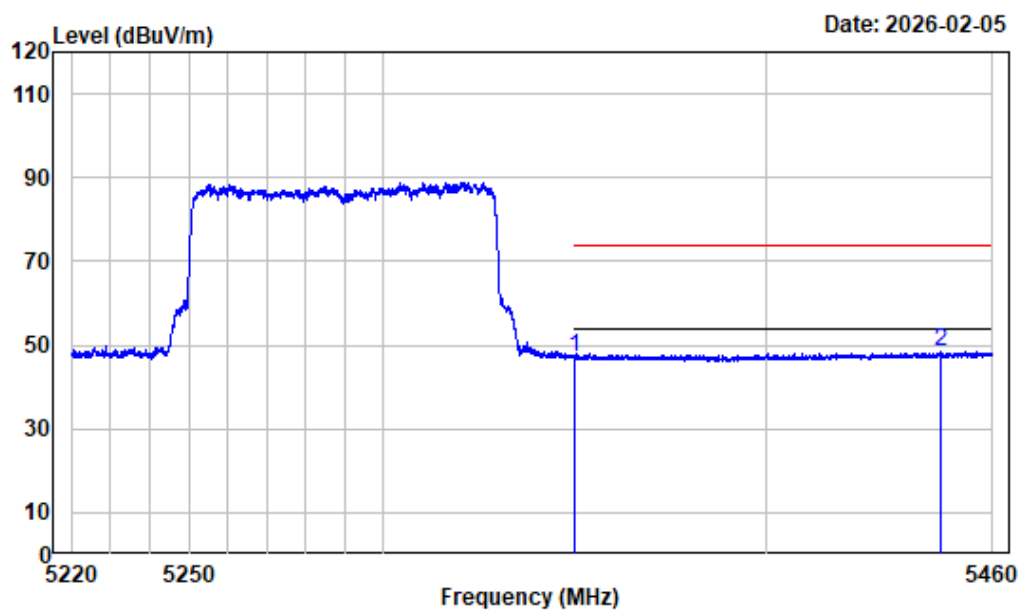

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	53.99	47.23	54.00	-6.77 Average
2	5446.440	-6.33	54.76	48.43	54.00	-5.57 Average


Right Band edge_Vertical_Peak_802.11ax80_5290MHz

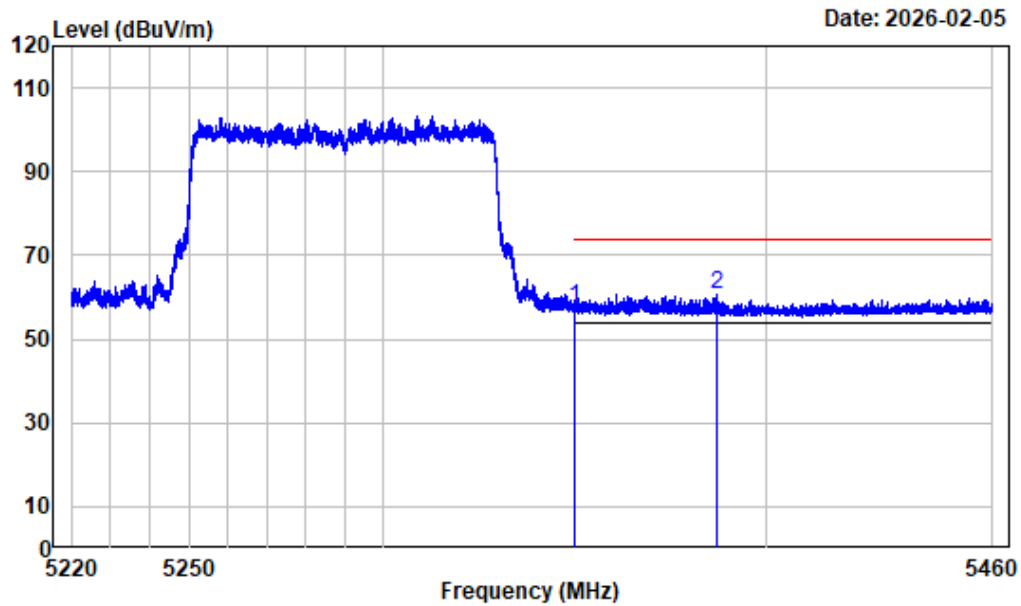

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	64.26	57.50	74.00	-16.50 Peak
2	5386.920	-6.65	67.23	60.58	74.00	-13.42 Peak


Right Band edge_Vertical_Average_802.11ax80_5290MHz

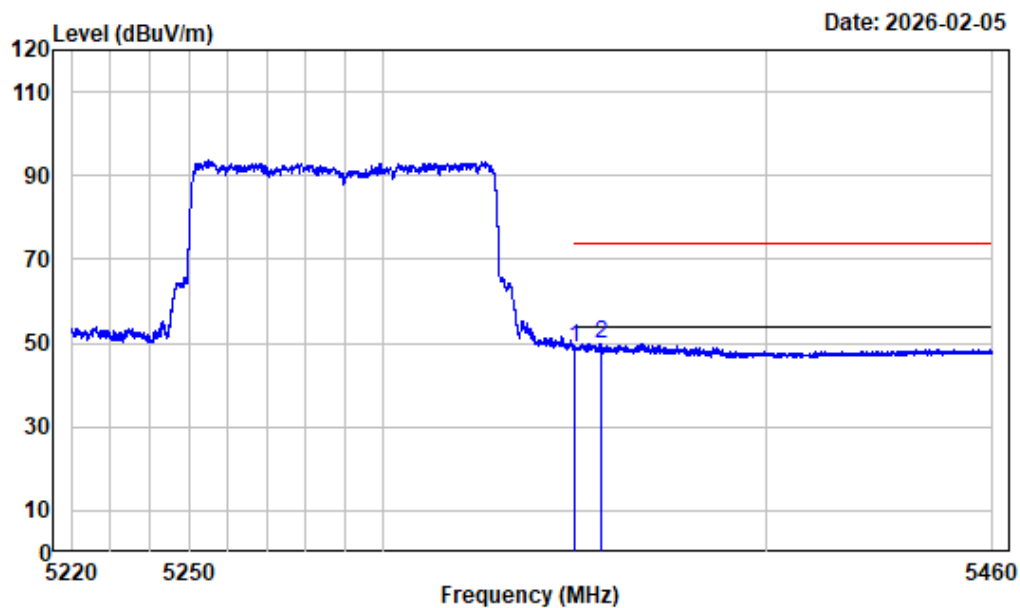

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	55.76	49.00	54.00	-5.00 Average
2	5356.500	-6.74	56.58	49.84	54.00	-4.16 Average


Left Band edge_Horizontal_Peak_802.11a_5500MHz_ANT0

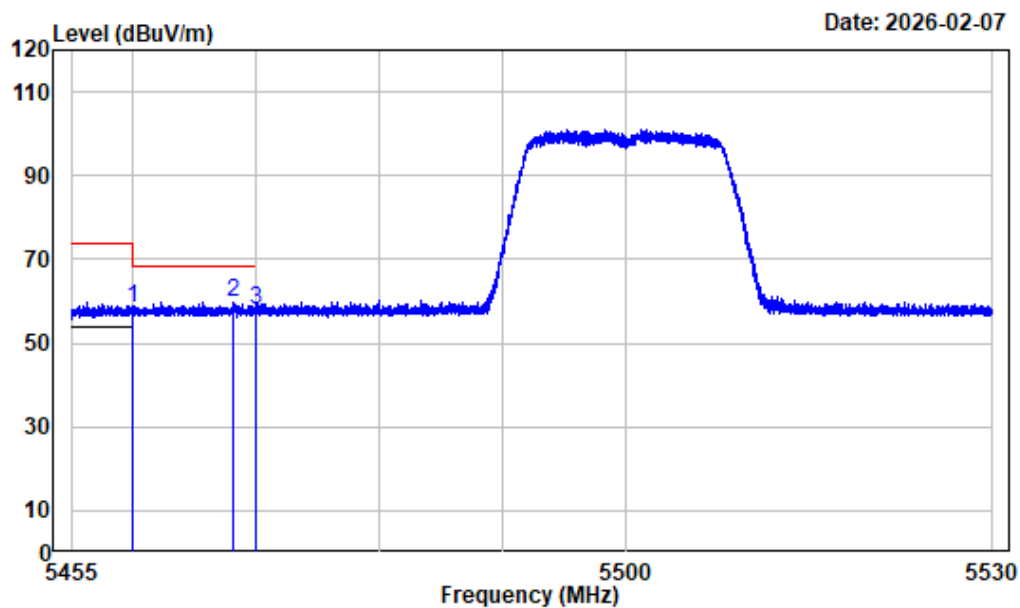

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	64.88	58.62	74.00	-15.38 Peak
2 5468.041	-6.23	66.01	59.78	68.20	-8.42 Peak
3 5470.000	-6.22	64.00	57.78	68.20	-10.42 Peak


Left Band edge_Horizontal_Average_802.11a_5500MHz_ANT0

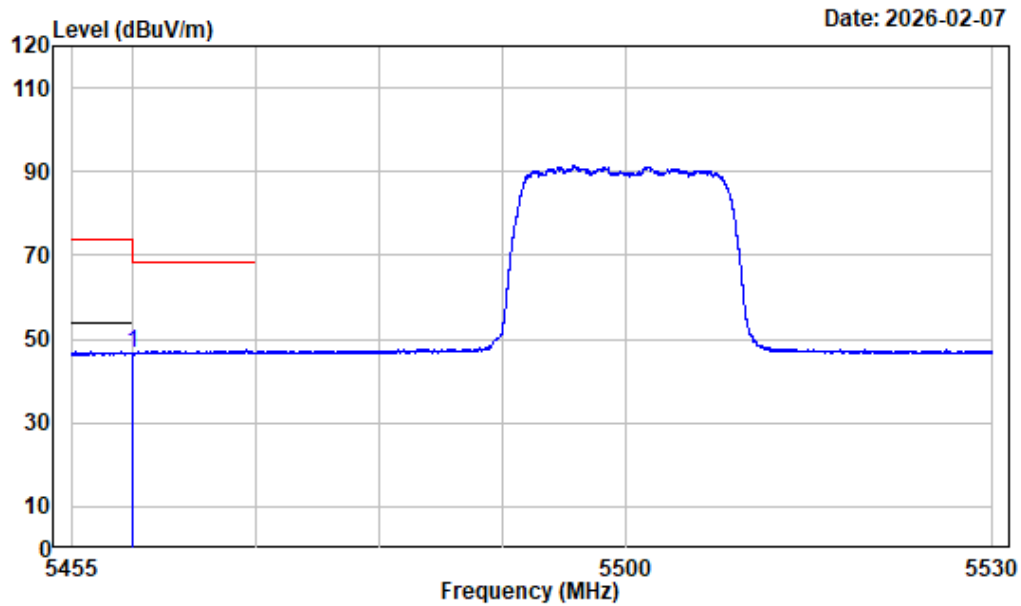

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	52.72	46.46	54.00	-7.54 Average


Left Band edge_Vertical_Peak_802.11a_5500MHz_ANT0

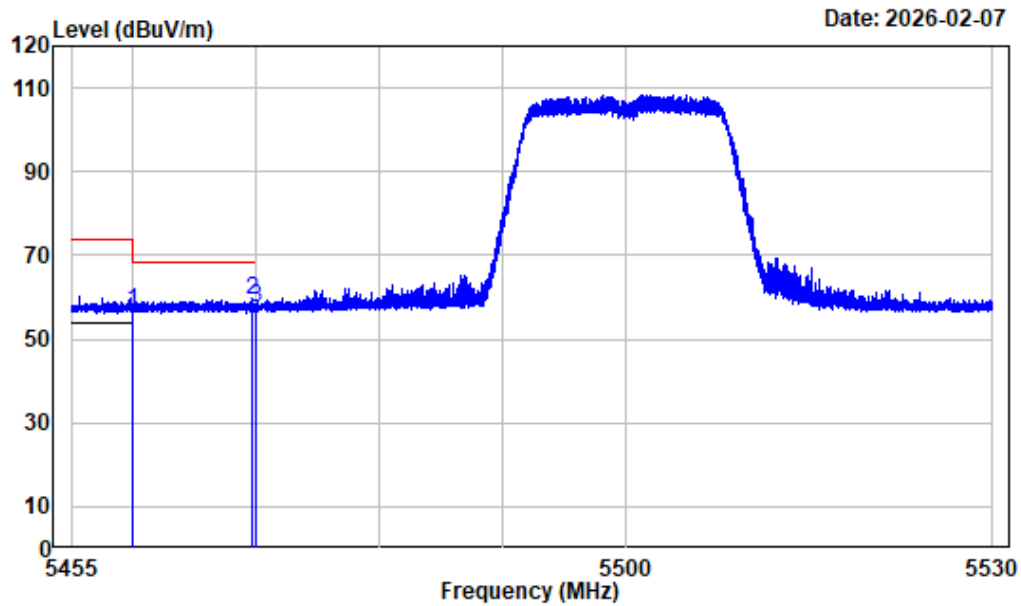

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	63.09	56.83	74.00	-17.17 Peak
2 5469.569	-6.23	65.51	59.28	68.20	-8.92 Peak
3 5470.000	-6.22	63.81	57.59	68.20	-10.61 Peak


Left Band edge_Vertical_Average_802.11a_5500MHz_ANT0

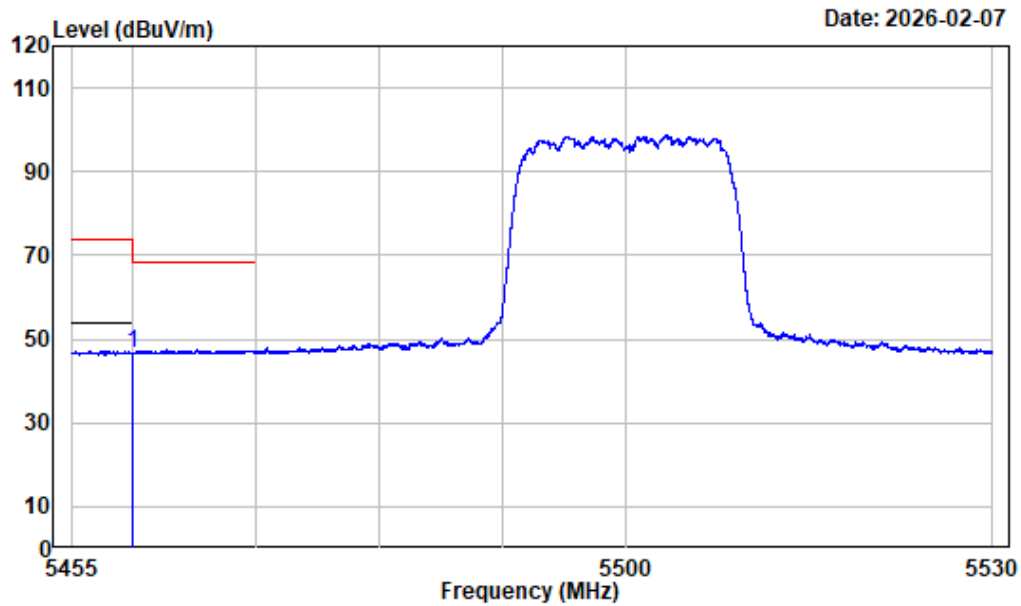

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	52.74	46.48	54.00	-7.52 Average


Right Band edge_Horizontal_Peak_802.11a_5700MHz_ANT0

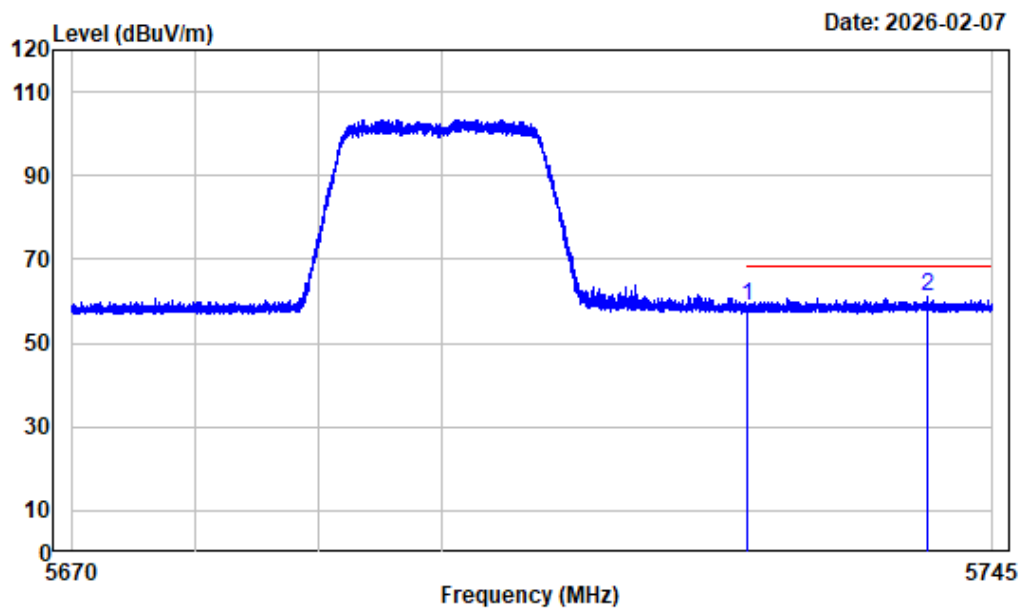

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5700

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.54	64.36	58.82	68.20	-9.38	Peak
2 5739.741	-5.39	66.70	61.31	68.20	-6.89	Peak


Right Band edge_Vertical_Peak_802.11a_5700MHz_ANT0

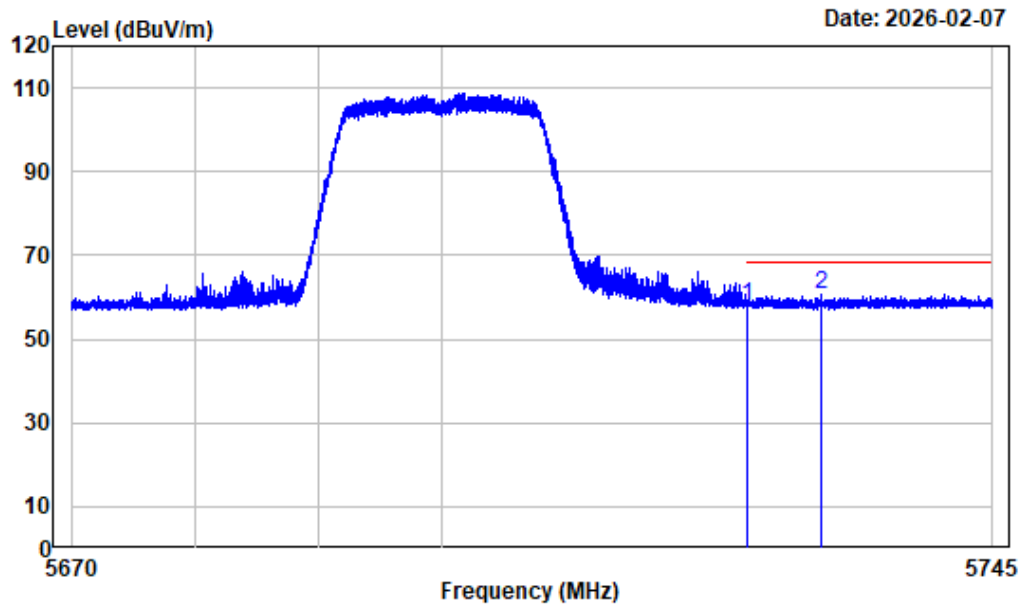

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5700

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.56	58.02	68.20	-10.18 Peak
2	5730.966	-5.48	66.25	60.77	68.20	-7.43 Peak


Left Band edge_Horizontal_Peak_802.11a_5500MHz_ANT1

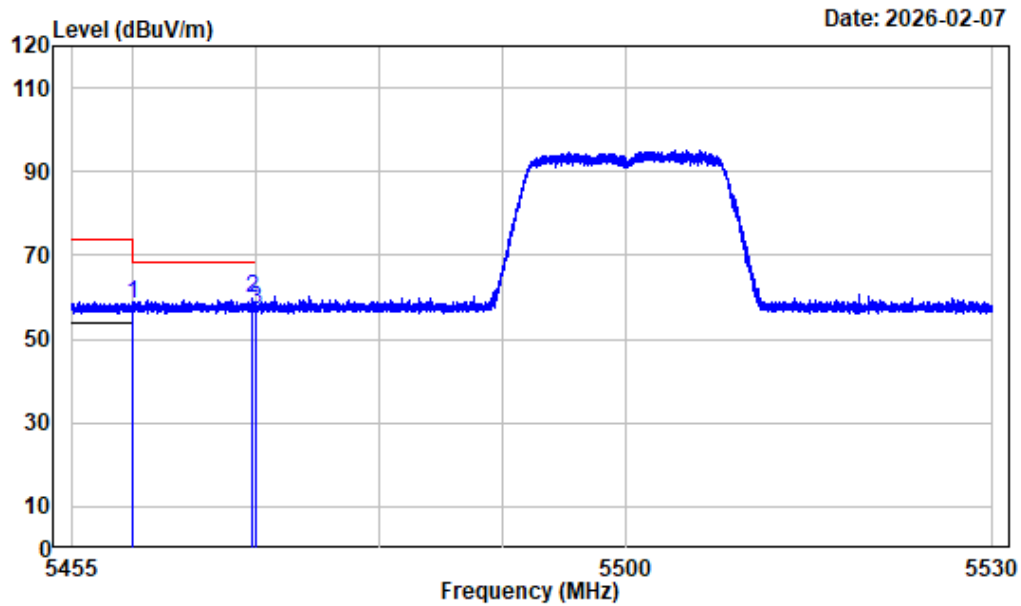

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	64.72	58.46	74.00	-15.54 Peak
2 5469.587	-6.23	65.99	59.76	68.20	-8.44 Peak
3 5470.000	-6.22	63.26	57.04	68.20	-11.16 Peak


Left Band edge_Horizontal_Average_802.11a_5500MHz_ANT1

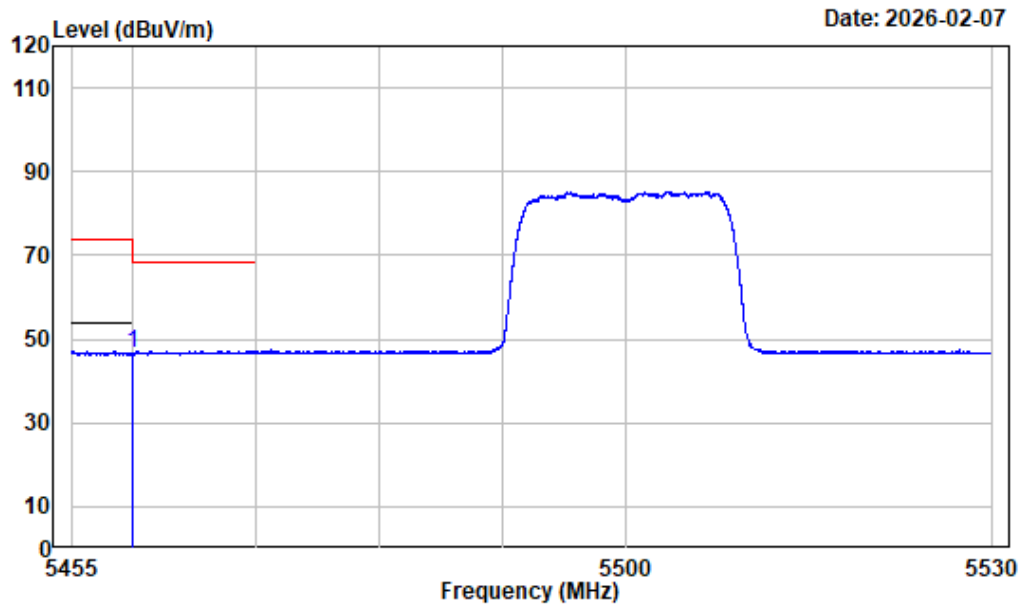

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	52.99	46.73	54.00	-7.27 Average


Left Band edge_Vertical_Peak_802.11a_5500MHz_ANT1

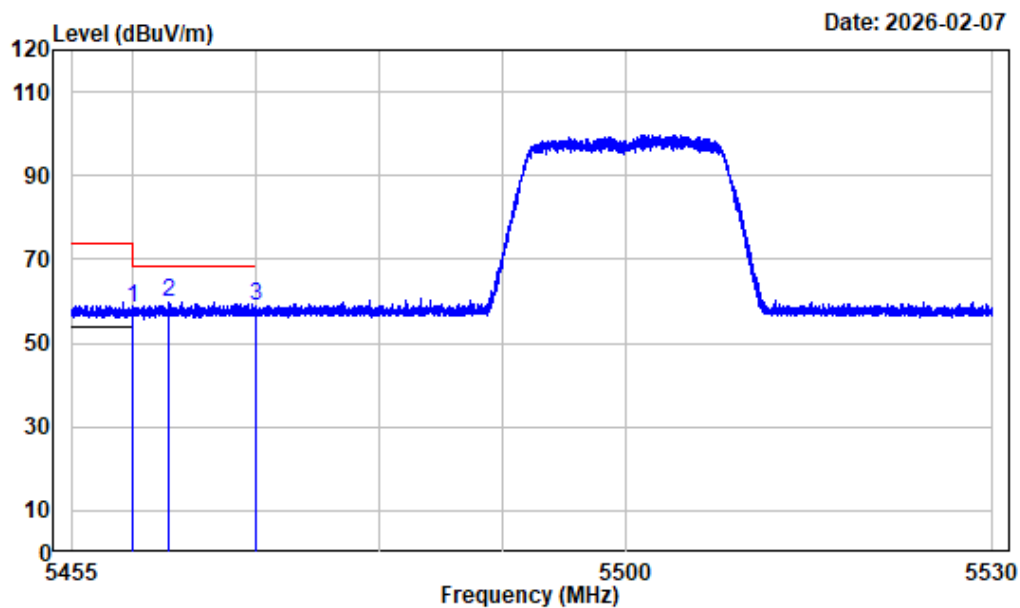

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	64.51	58.25	74.00	-15.75 Peak
2	5462.950	-6.25	65.98	59.73	68.20	-8.47 Peak
3	5470.000	-6.22	64.97	58.75	68.20	-9.45 Peak


Left Band edge_Vertical_Average_802.11a_5500MHz_ANT1

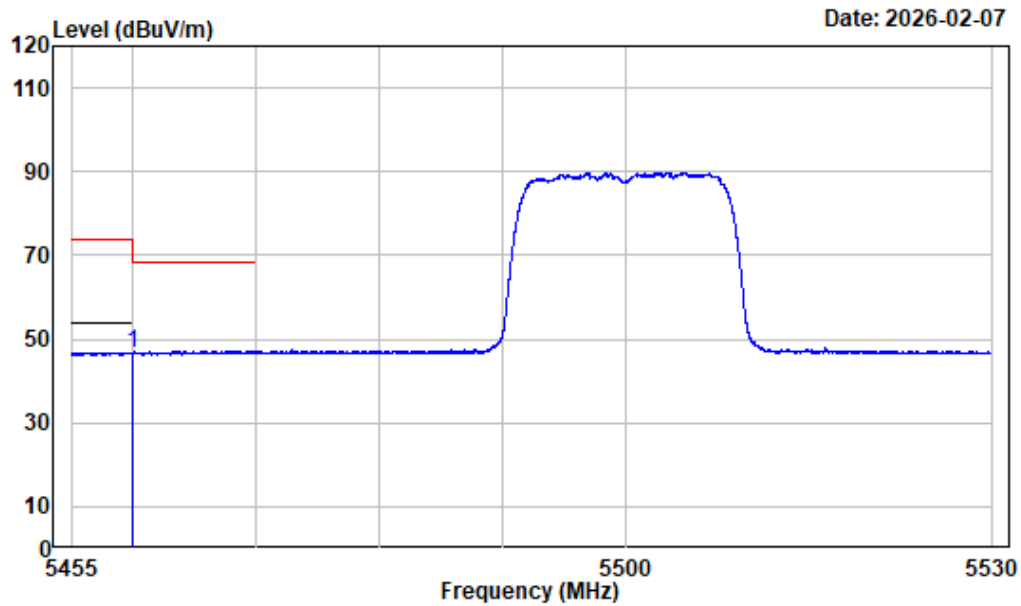

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	52.83	46.57	54.00	-7.43 Average


Right Band edge_Horizontal_Peak_802.11a_5700MHz_ANT1

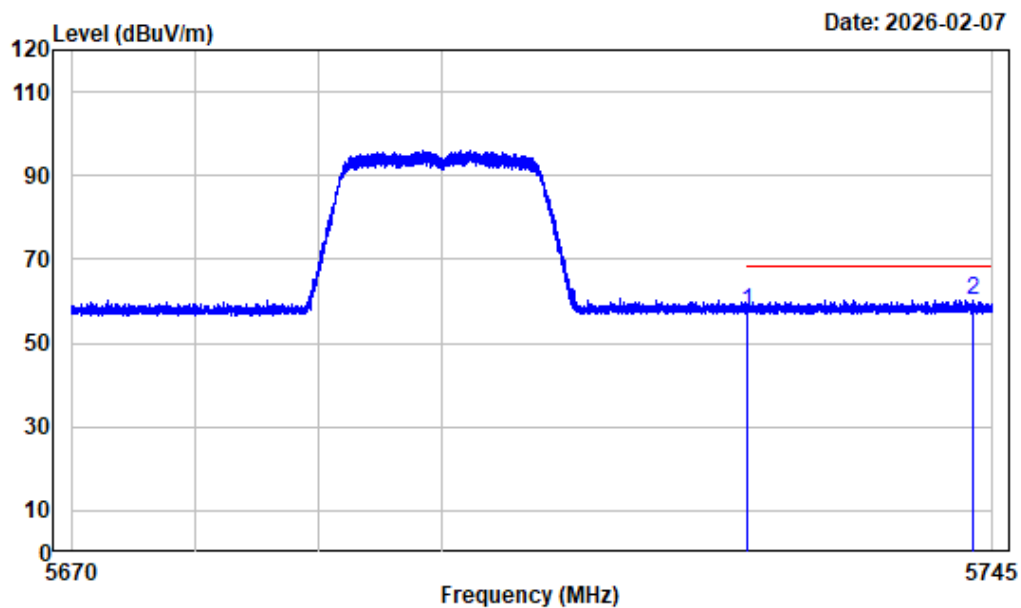

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5700

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5725.000	-5.54	63.16	57.62	68.20	-10.58 Peak
2 5743.350	-5.34	65.63	60.29	68.20	-7.91 Peak


Right Band edge_Vertical_Peak_802.11a_5700MHz_ANT1

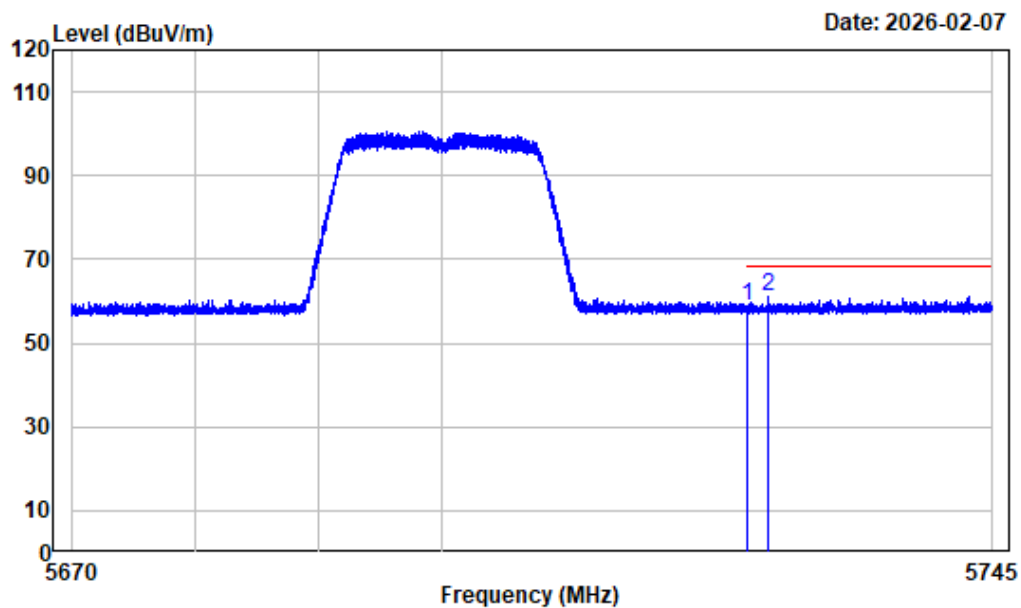

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5700

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	64.46	58.92	68.20	-9.28	Peak
2	5726.644	-5.51	66.67	61.16	68.20	-7.04	Peak


Left Band edge_Horizontal_Peak_802.11n-HT20

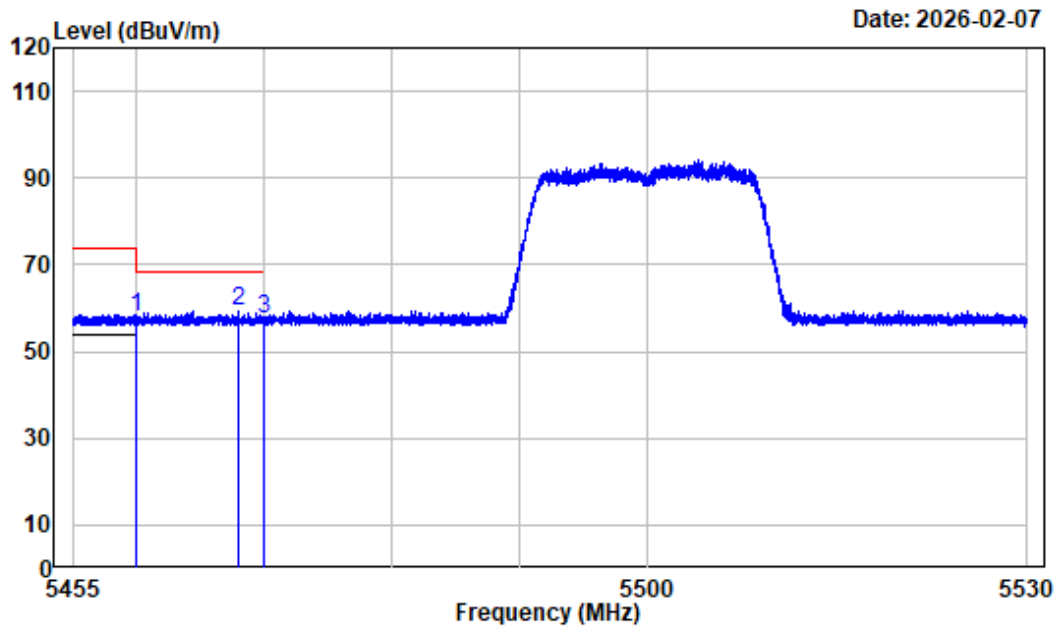

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	64.08	57.82	74.00	-16.18	Peak
2	5467.938	-6.23	65.61	59.38	68.20	-8.82	Peak
3	5470.000	-6.22	63.87	57.65	68.20	-10.55	Peak


Left Band edge_Horizontal_Average_802.11n-HT20

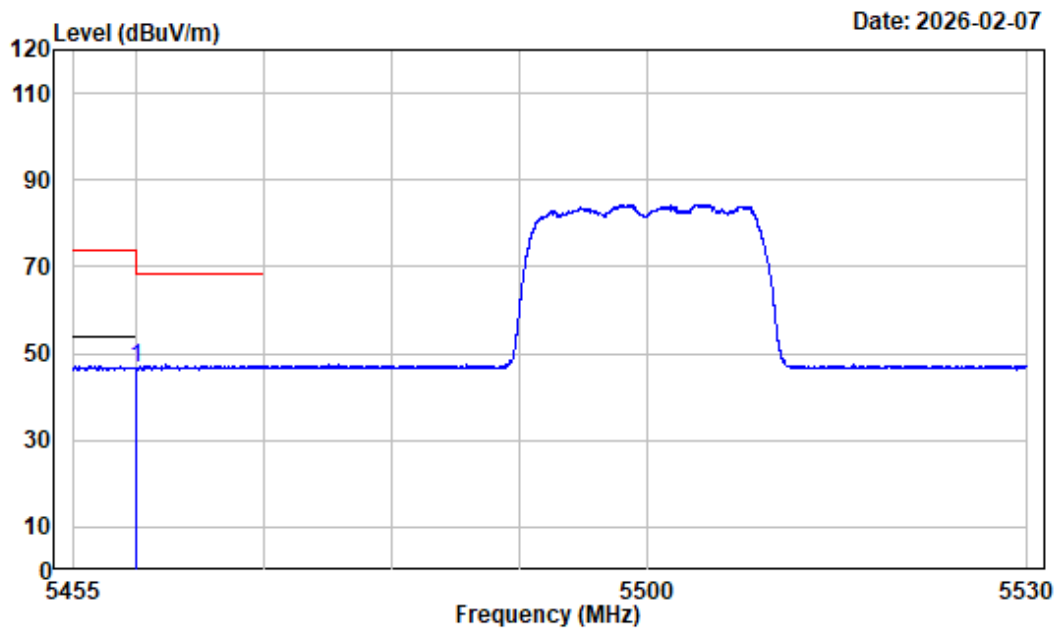

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.26	52.76	46.50	54.00	-7.50	Average


Left Band edge_Vertical_Peak_802.11n-HT20

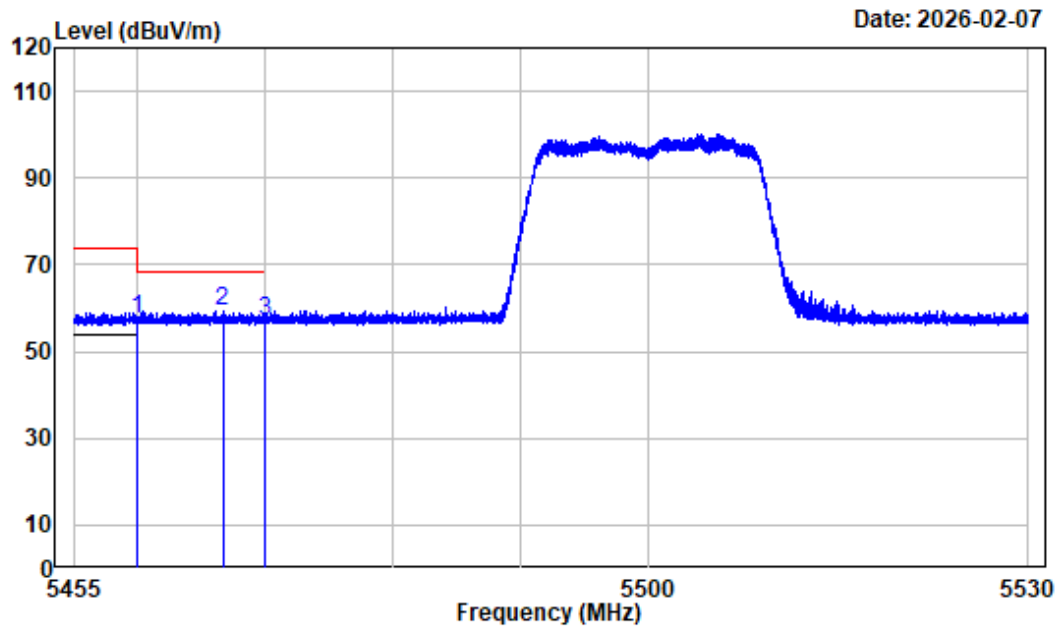

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.86	57.60	74.00	-16.40	Peak
2	5466.644	-6.23	65.74	59.51	68.20	-8.69	Peak
3	5470.000	-6.22	63.25	57.03	68.20	-11.17	Peak


Left Band edge_Vertical_Average_802.11n-HT20

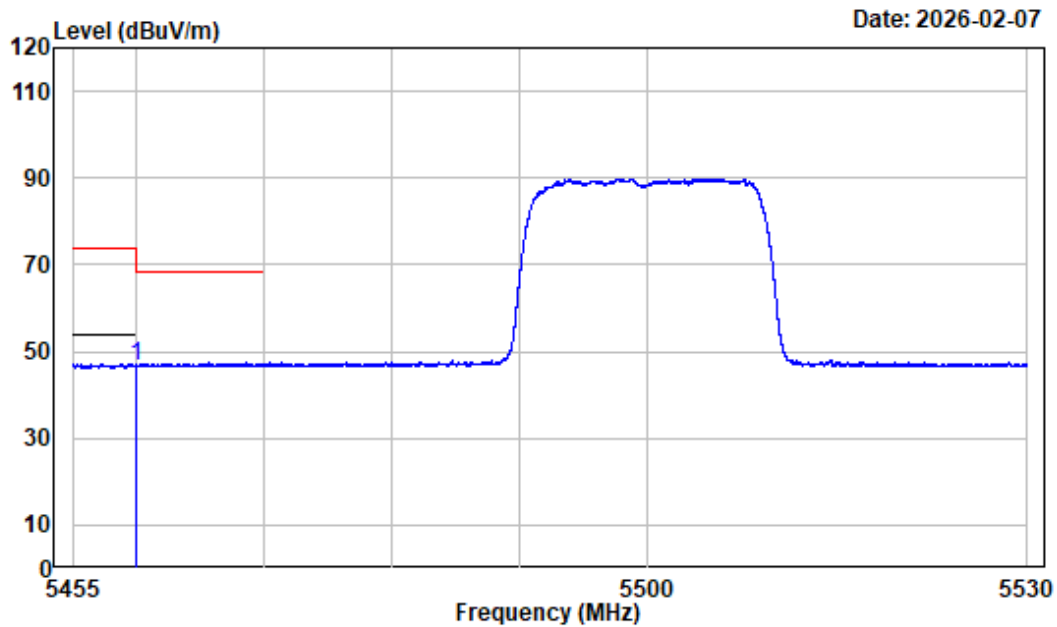

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	53.00	46.74	54.00	-7.26	Average


Right Band edge_Horizontal_802.11n-HT20

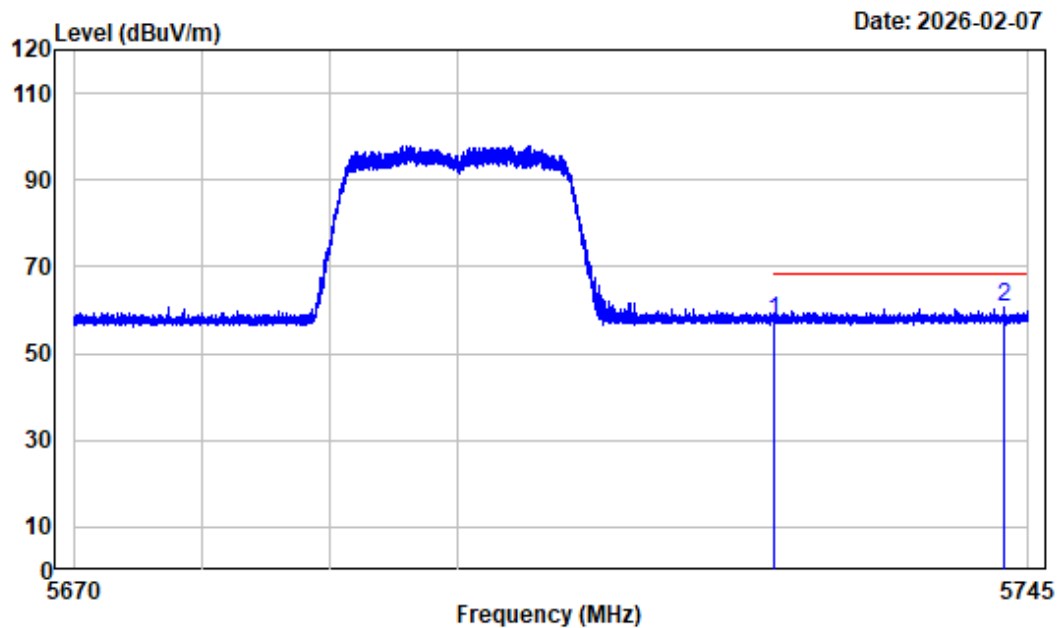

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	62.91	57.37	68.20	-10.83	Peak
2	5743.022	-5.35	65.81	60.46	68.20	-7.74	Peak


Right Band edge_Vertical_802.11n-HT20

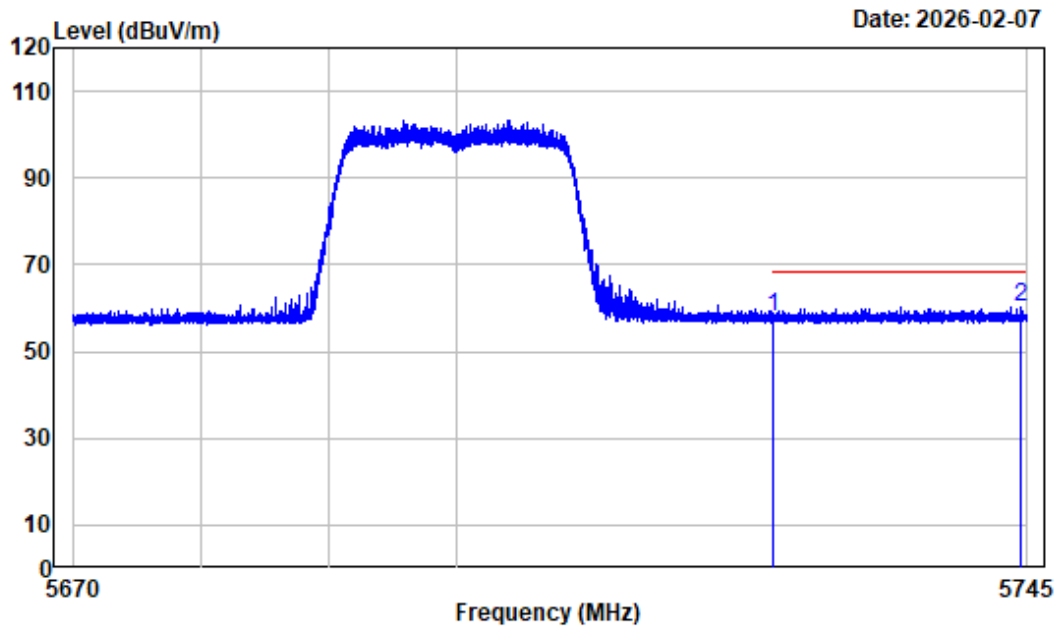

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.44	57.90	68.20	-10.30	Peak
2	5744.503	-5.34	65.75	60.41	68.20	-7.79	Peak


Left Band edge_Horizontal_Peak_802.11n-HT40

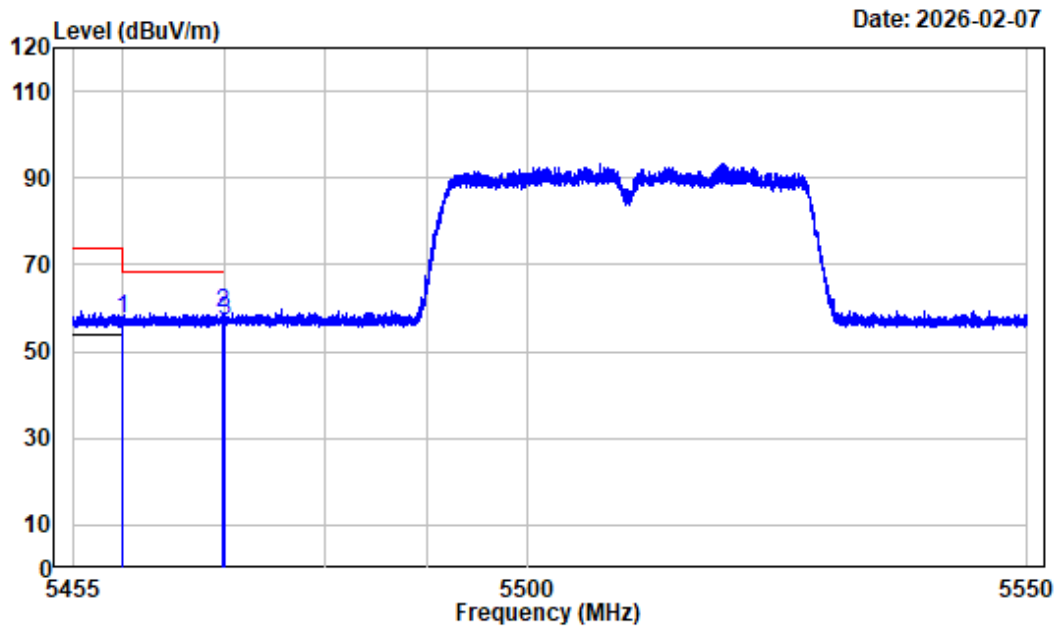

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.94	57.68	74.00	-16.32	Peak
2	5469.832	-6.22	65.13	58.91	68.20	-9.29	Peak
3	5470.000	-6.22	63.46	57.24	68.20	-10.96	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

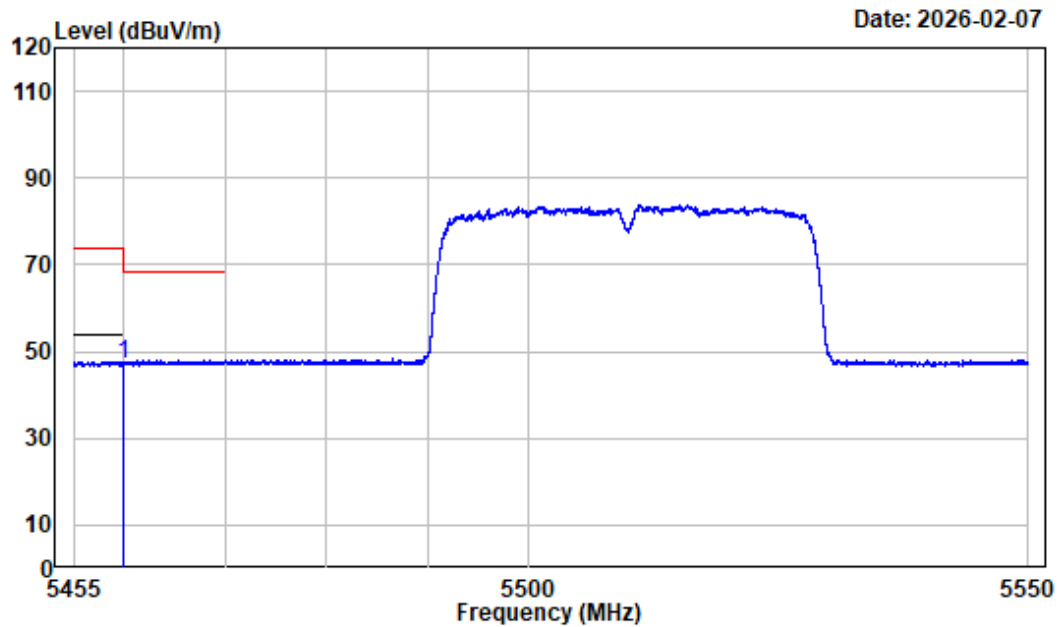

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	53.21	46.95	54.00	-7.05	Average


Left Band edge_Vertical_Peak_802.11n-HT40

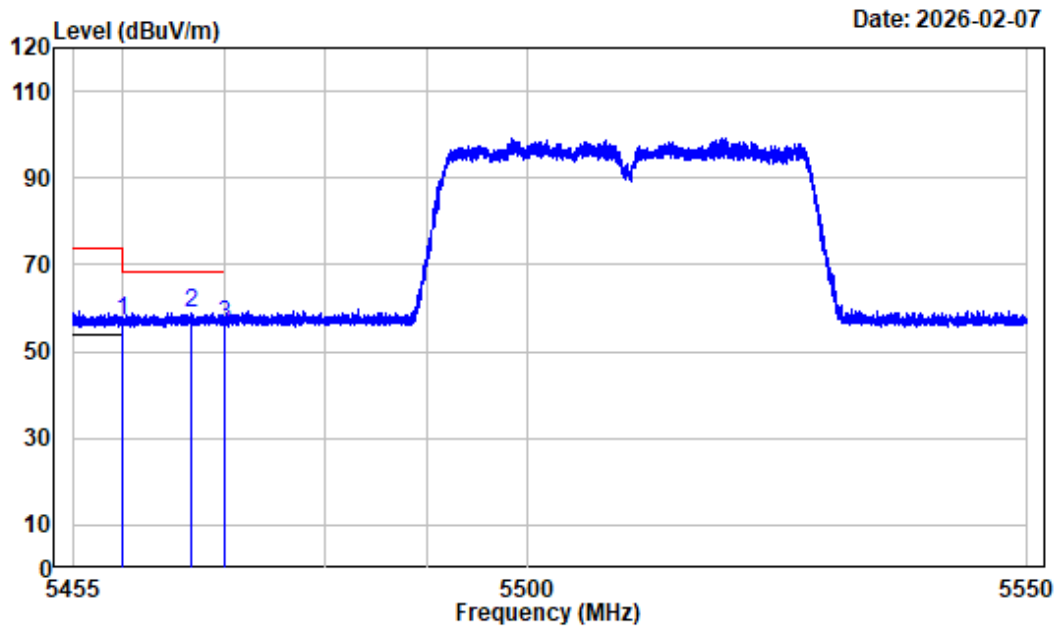

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.42	57.16	74.00	-16.84	Peak
2	5466.768	-6.23	65.17	58.94	68.20	-9.26	Peak
3	5470.000	-6.22	62.57	56.35	68.20	-11.85	Peak


Left Band edge_Vertical_Average_802.11n-HT40

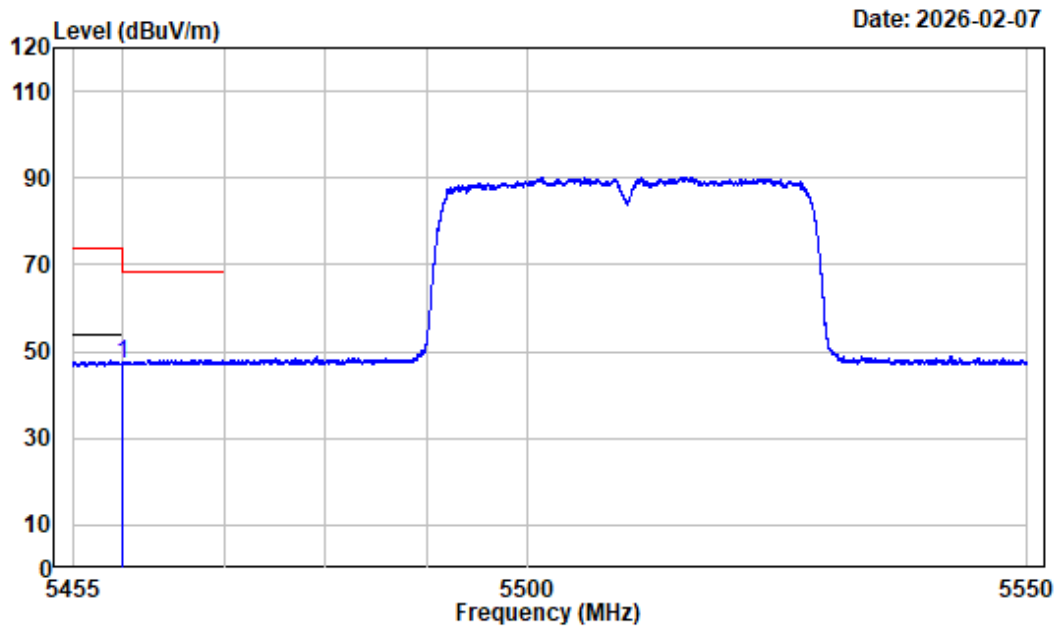

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.26	53.58	47.32	54.00	-6.68	Average


Right Band edge_Horizontal_Peak_802.11n-HT40

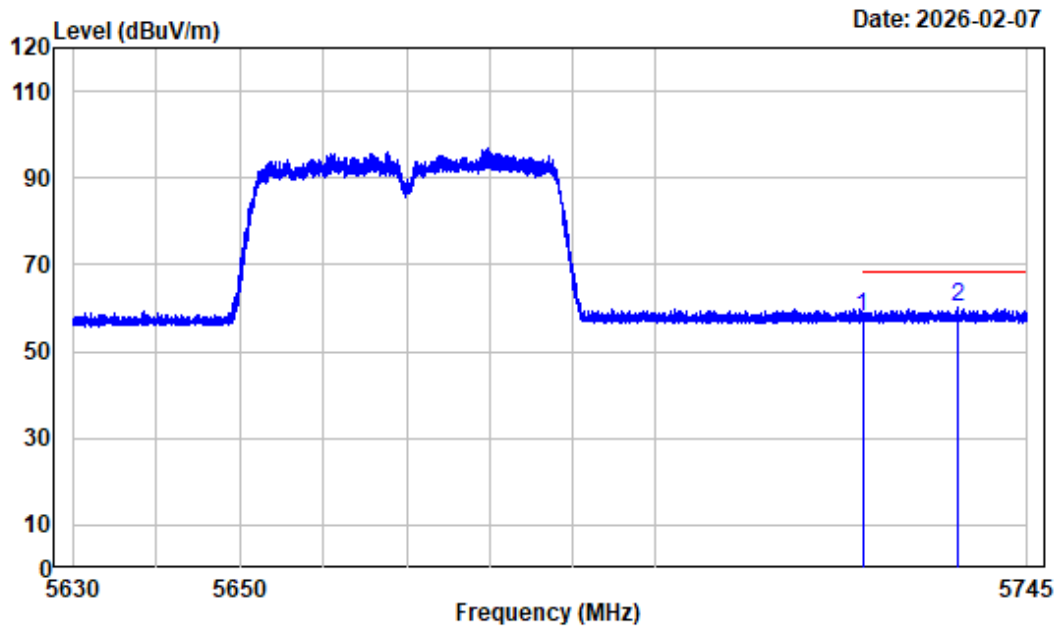

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.30	57.76	68.20	-10.44	Peak
2	5736.562	-5.42	65.48	60.06	68.20	-8.14	Peak


Right Band edge_Vertical_Peak_802.11n-HT40

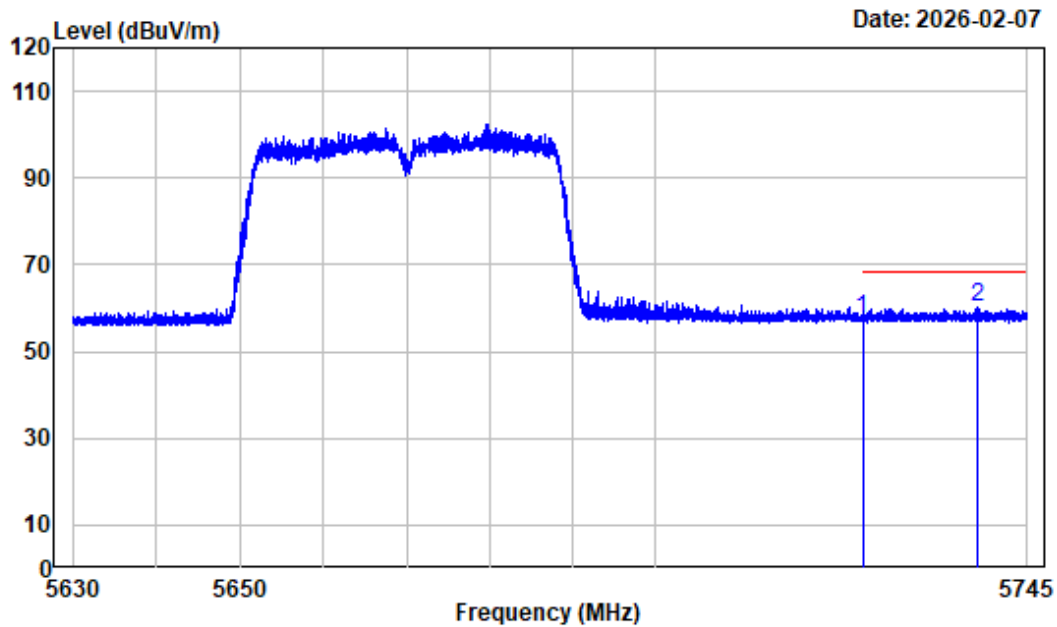

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.15	57.61	68.20	-10.59	Peak
2	5739.063	-5.39	65.62	60.23	68.20	-7.97	Peak


Left Band edge_Horizontal_Peak_802.11ac-vht20_5500MHz

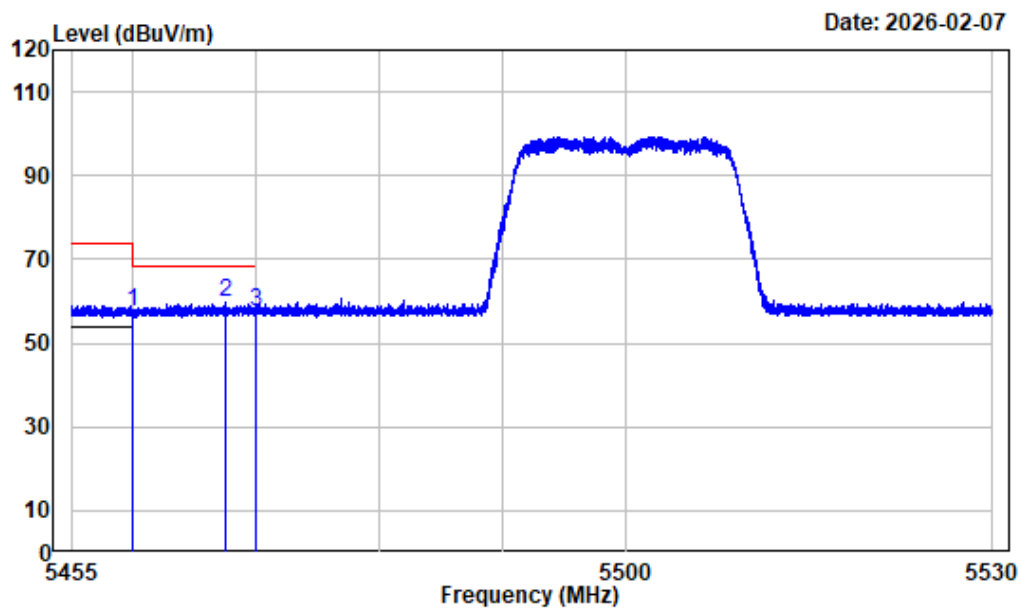

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	63.56	57.30	74.00	-16.70 Peak
2 5467.478	-6.23	65.91	59.68	68.20	-8.52 Peak
3 5470.000	-6.22	63.89	57.67	68.20	-10.53 Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5500MHz

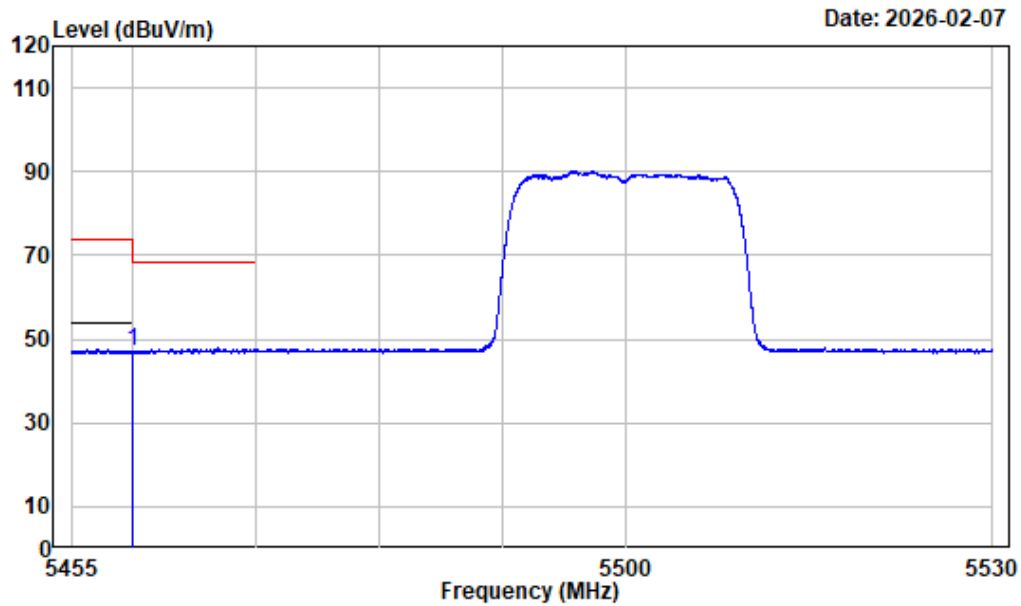

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	53.37	47.11	54.00	-6.89 Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5500MHz

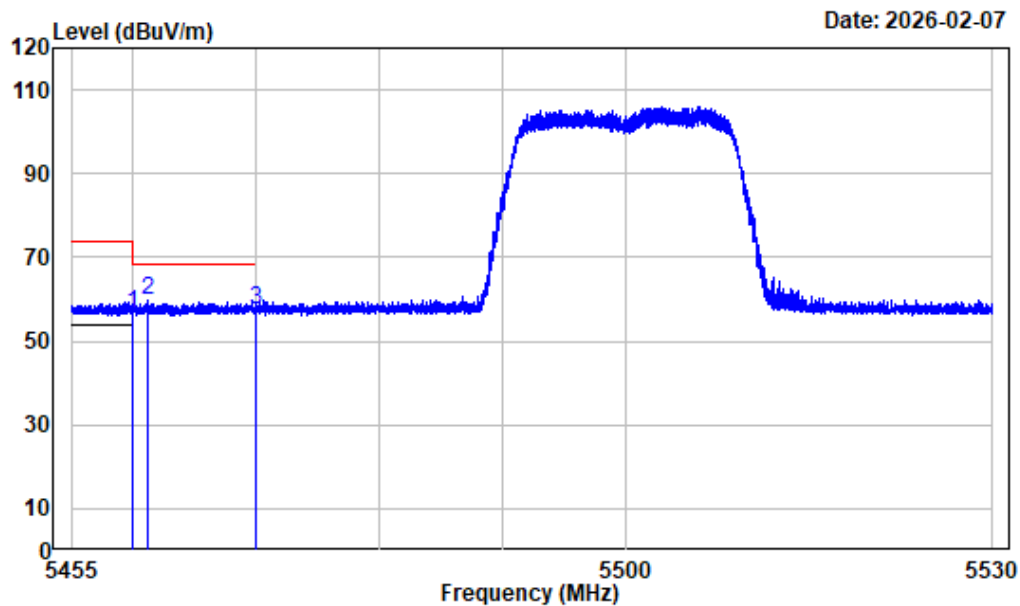

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.05	56.79	74.00	-17.21	Peak
2	5461.150	-6.26	65.94	59.68	68.20	-8.52	Peak
3	5470.000	-6.22	63.68	57.46	68.20	-10.74	Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5500MHz

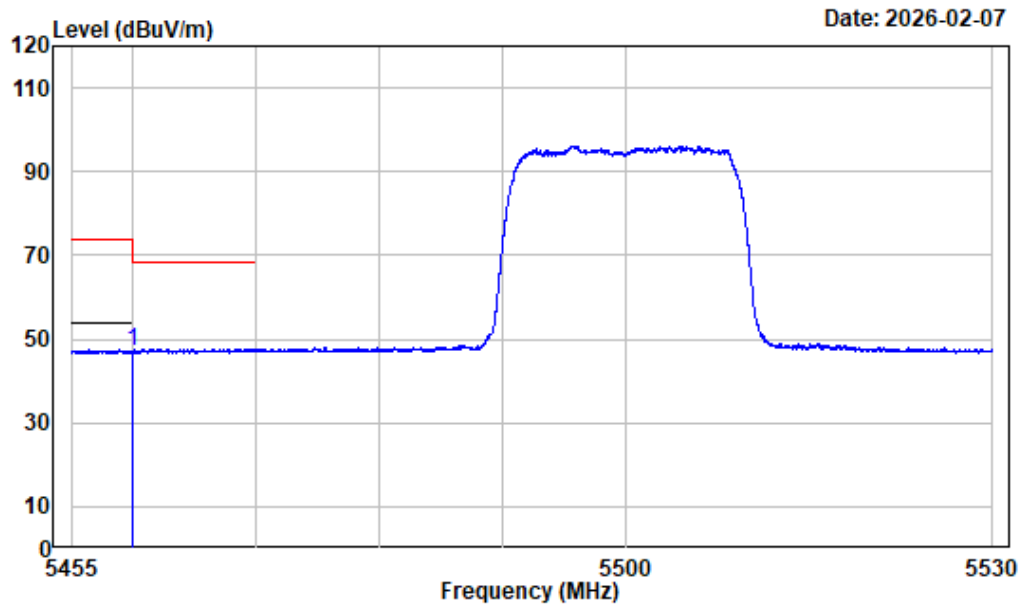

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	53.35	47.09	54.00	-6.91 Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5700MHz

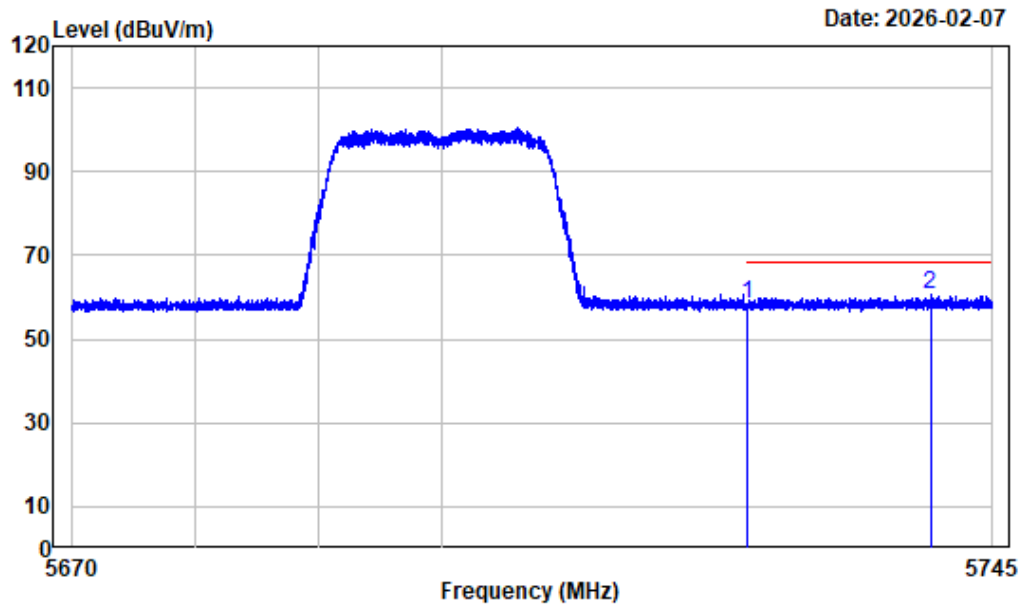

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	64.00	58.46	68.20	-9.74	Peak
2	5739.909	-5.39	66.04	60.65	68.20	-7.55	Peak


Right Band edge_Vertical_Peak_802.11ac-vht20_5700MHz

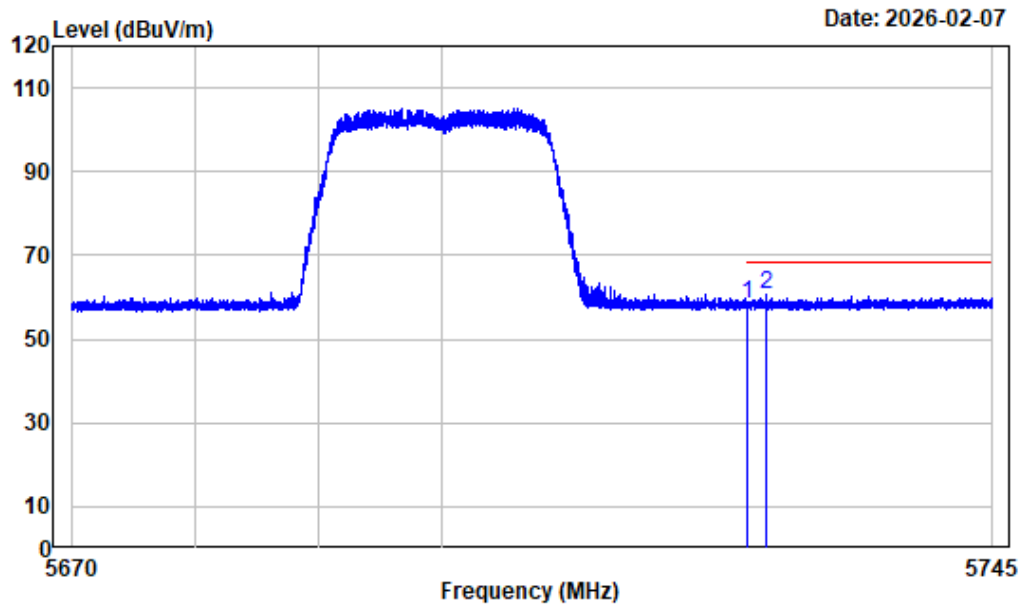

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	64.05	58.51	68.20	-9.69	Peak
2	5726.531	-5.51	66.01	60.50	68.20	-7.70	Peak


Left Band edge_Horizontal_Peak_802.11ac-vht40_5510MHz

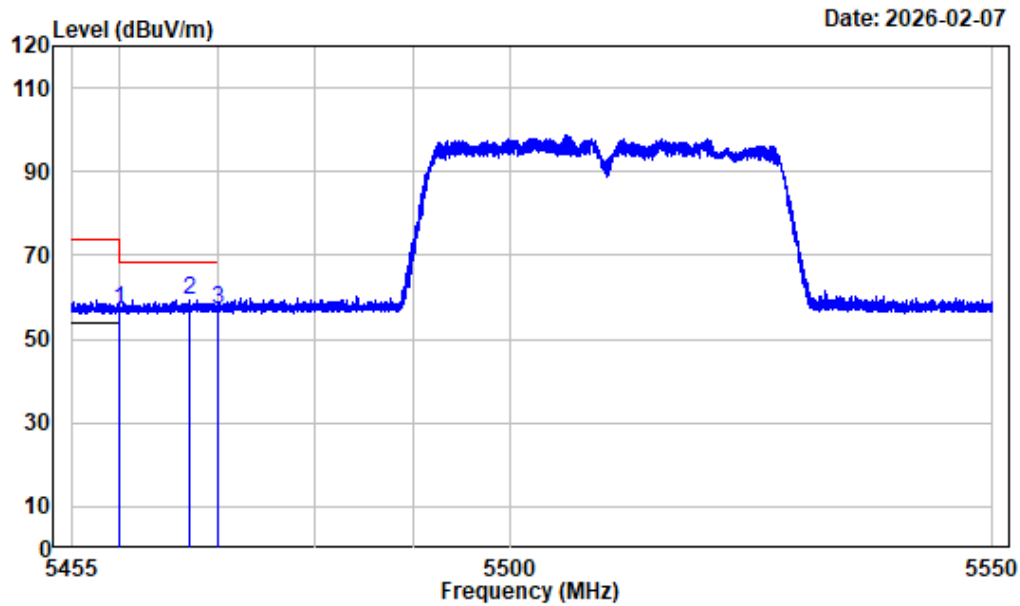

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.22	56.96	74.00	-17.04	Peak
2	5467.101	-6.23	65.73	59.50	68.20	-8.70	Peak
3	5470.000	-6.22	63.48	57.26	68.20	-10.94	Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5510MHz

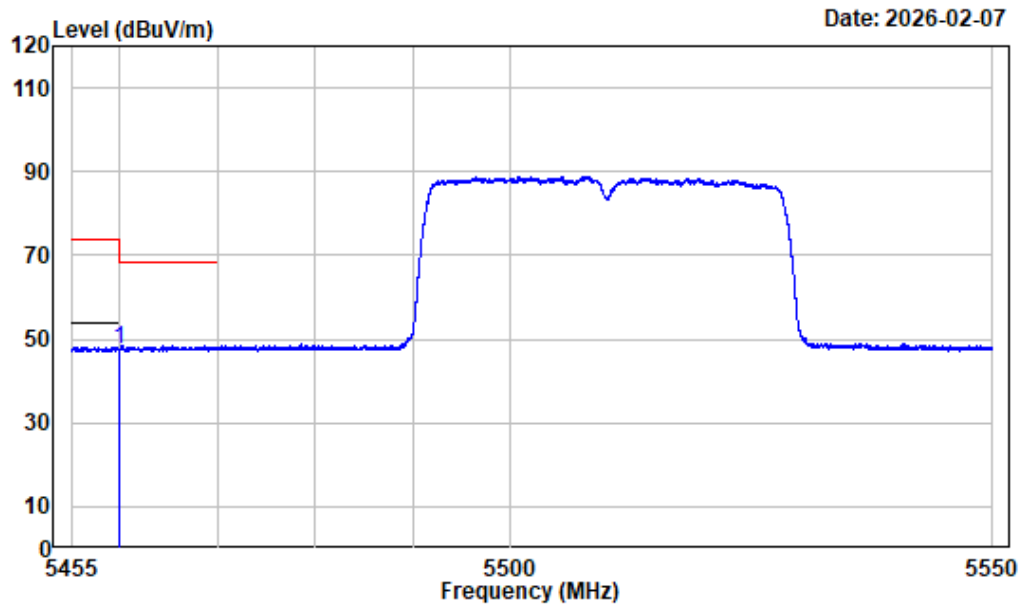

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	53.69	47.43	54.00	-6.57 Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5510MHz

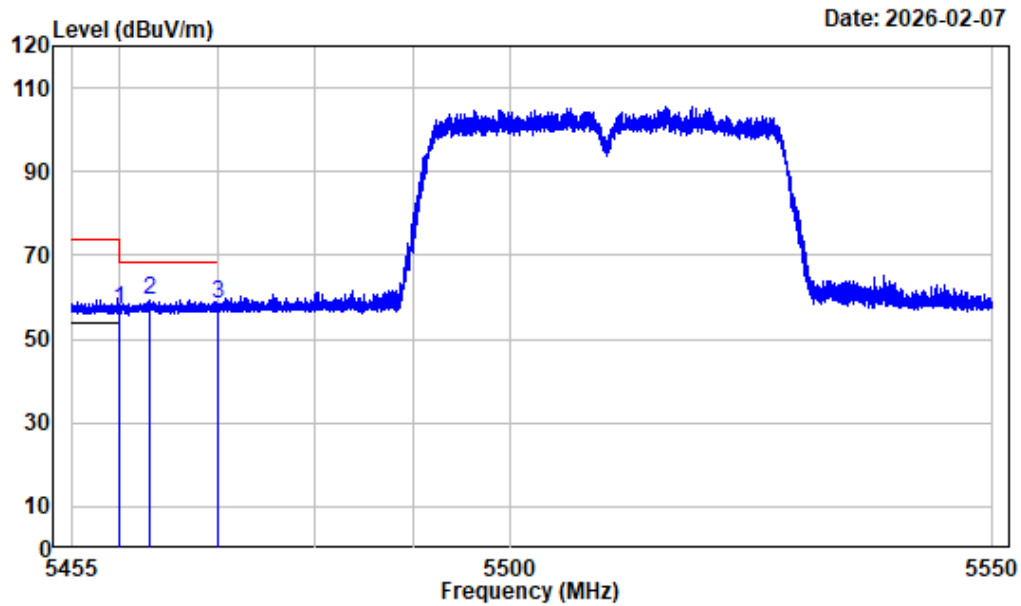

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.51	57.25	74.00	-16.75	Peak
2	5463.027	-6.25	65.52	59.27	68.20	-8.93	Peak
3	5470.000	-6.22	64.69	58.47	68.20	-9.73	Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5510MHz

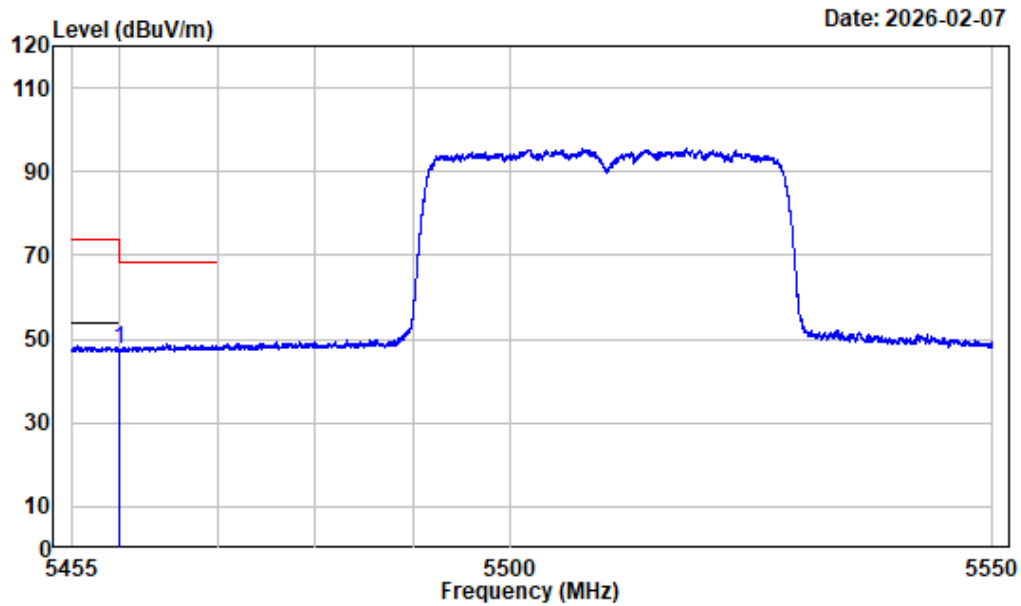

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	53.71	47.45	54.00	-6.55	Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5670MHz

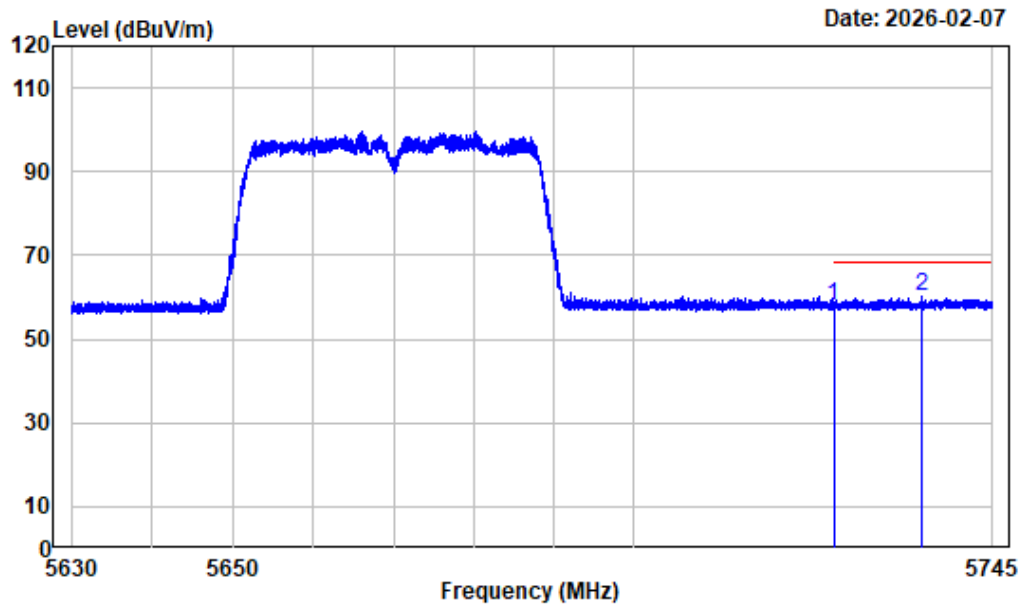

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.55	58.01	68.20	-10.19	Peak
2	5736.030	-5.42	65.49	60.07	68.20	-8.13	Peak


Right Band edge_Vertical_Peak_802.11ac-vht40_5670MHz

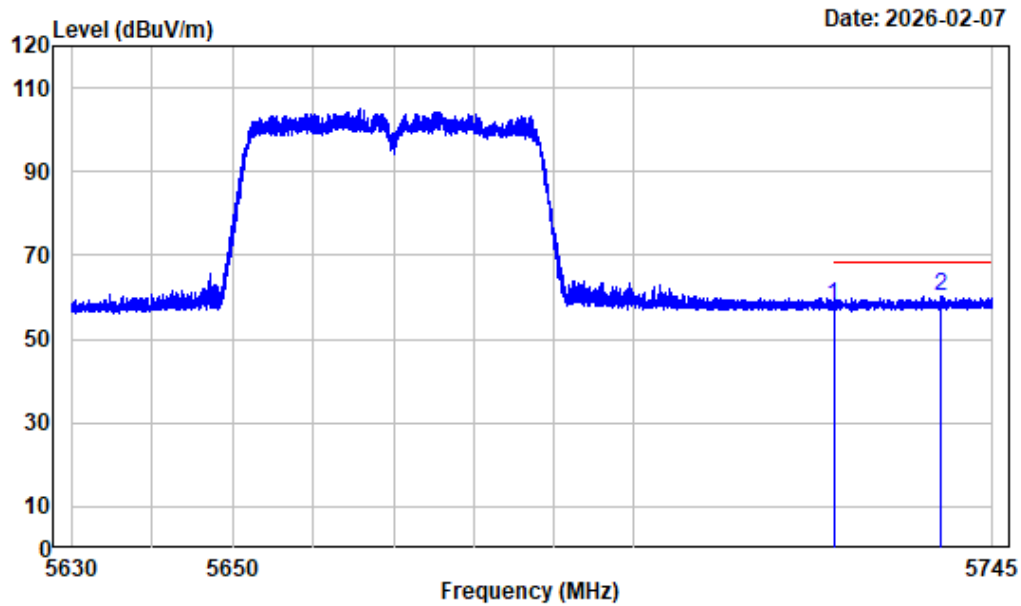

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

	Freq Factor		Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.39	57.85	68.20	-10.35	Peak
2	5738.517	-5.40	65.80	60.40	68.20	-7.80	Peak


Left Band edge_Horizontal_Peak_802.11ac-vht80_5530MHz

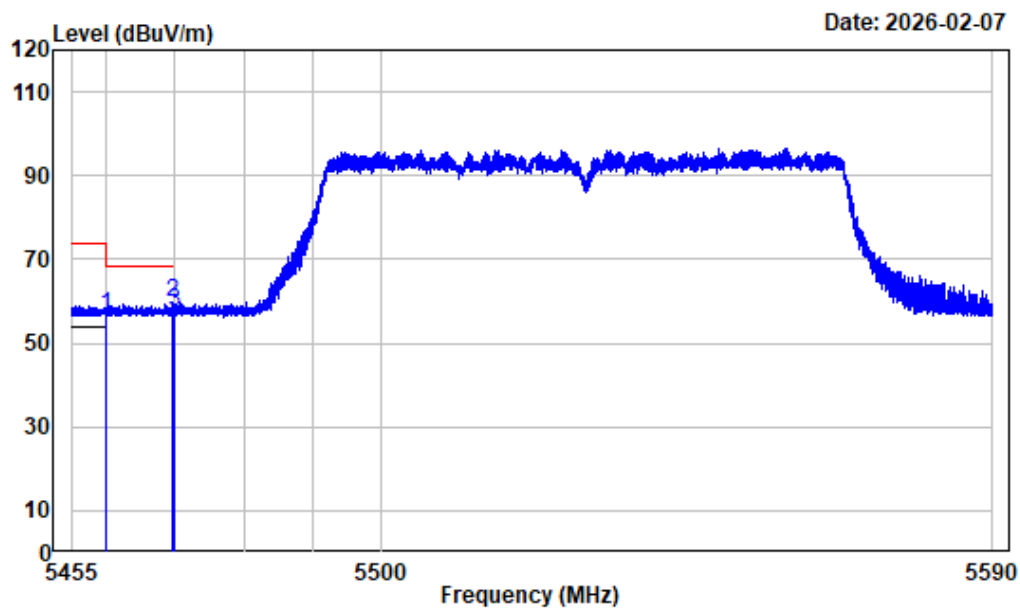

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	62.97	56.71	74.00	-17.29 Peak
2 5469.631	-6.23	65.86	59.63	68.20	-8.57 Peak
3 5470.000	-6.22	63.75	57.53	68.20	-10.67 Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5530MHz

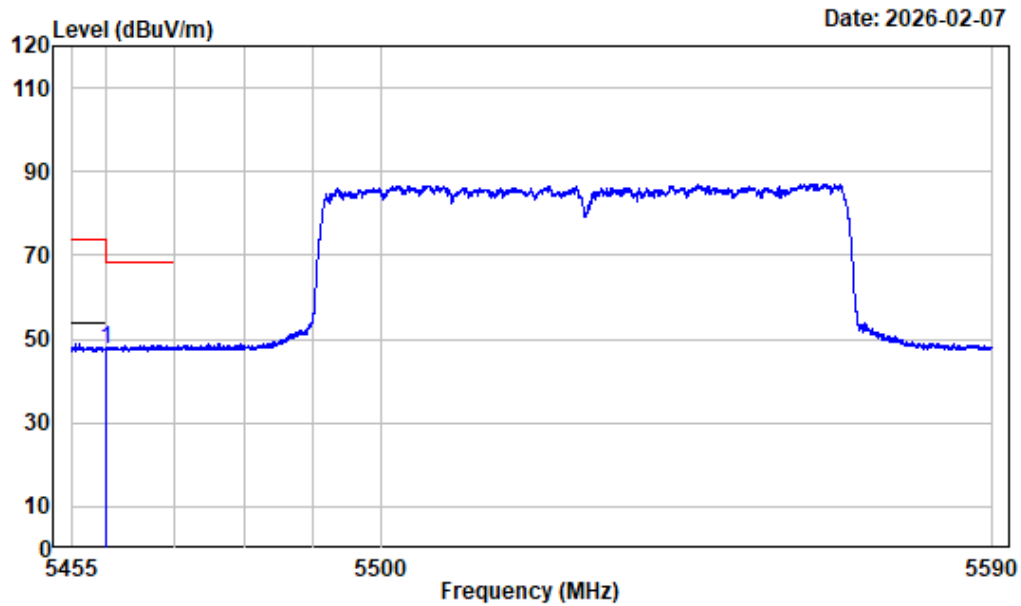

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	53.92	47.66	54.00	-6.34 Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5530MHz

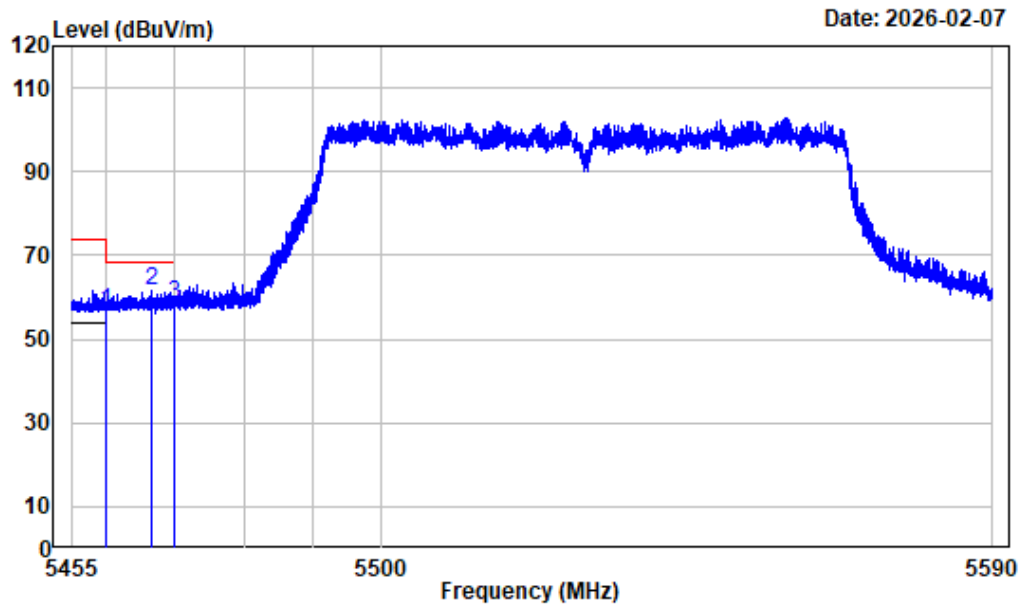

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	62.76	56.50	74.00	-17.50	Peak
2	5466.627	-6.23	67.77	61.54	68.20	-6.66	Peak
3	5470.000	-6.22	64.62	58.40	68.20	-9.80	Peak


Left Band edge_Vertical_Average_802.11ac-vht80_5530MHz

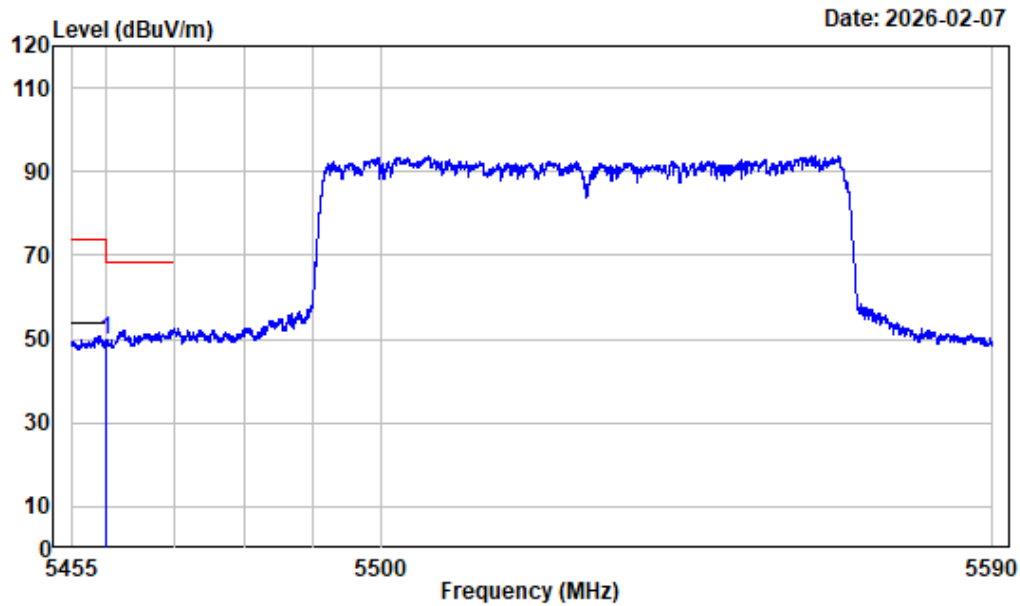

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	56.19	49.93	54.00	-4.07 Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5610MHz

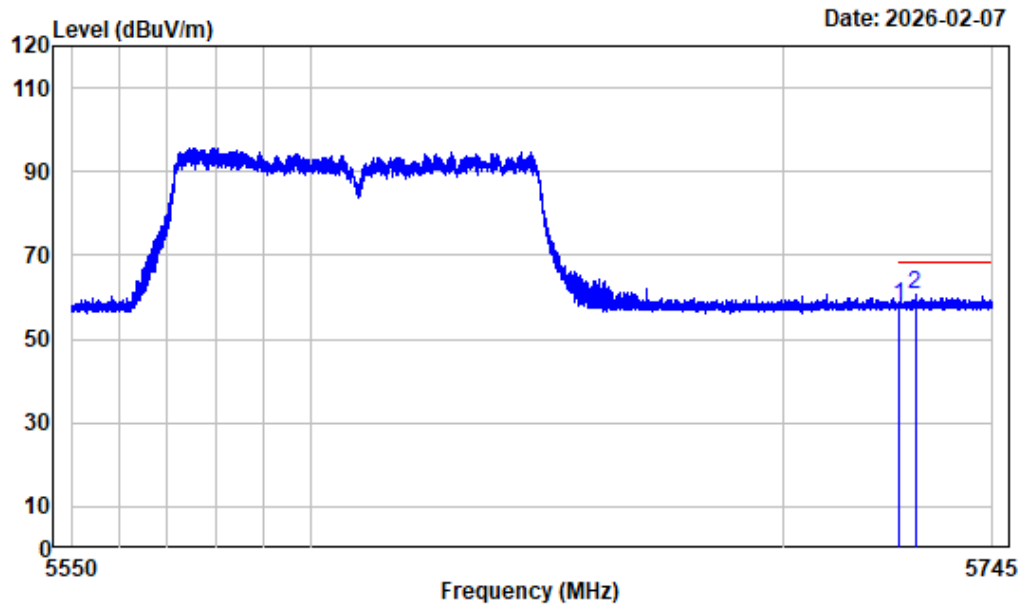

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5610

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.63	58.09	68.20	-10.11	Peak
2	5728.376	-5.49	66.01	60.52	68.20	-7.68	Peak


Right Band edge_Vertical_Peak_802.11ac-vht80_5610MHz

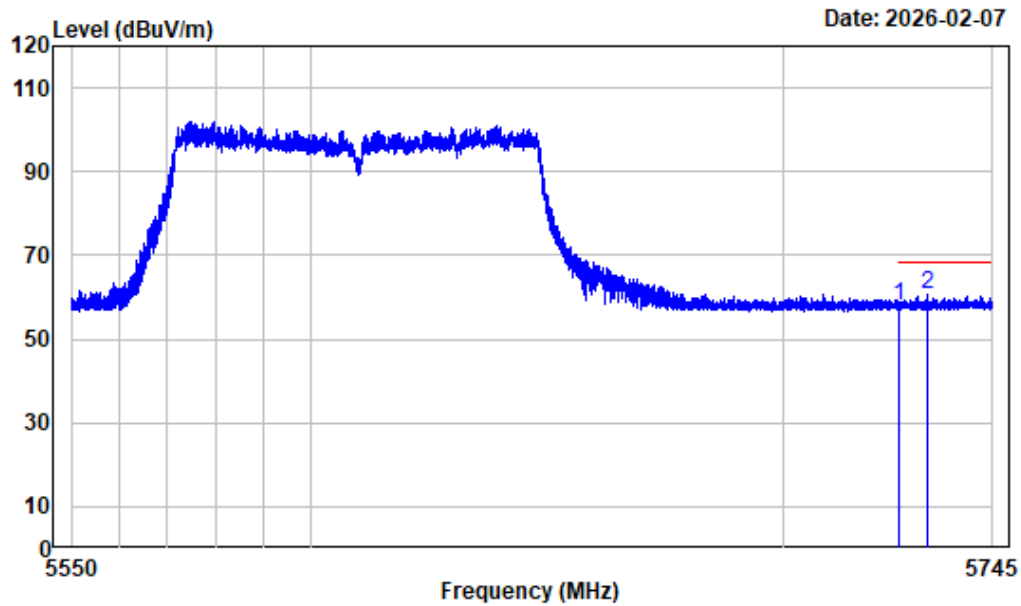

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5610

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.42	57.88	68.20	-10.32	Peak
2	5731.204	-5.47	66.06	60.59	68.20	-7.61	Peak


Left Band edge_Horizontal_Peak_802.11ax20_5500MHz

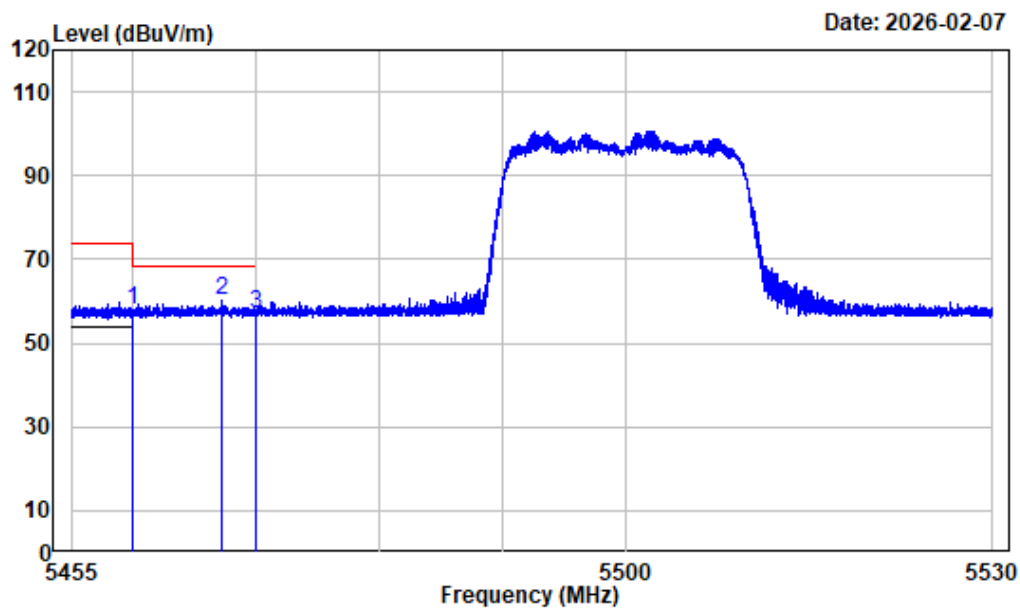

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.26	64.28	58.02	74.00	-15.98	Peak
2 5467.206	-6.23	66.49	60.26	68.20	-7.94	Peak
3 5470.000	-6.22	63.46	57.24	68.20	-10.96	Peak


Left Band edge_Horizontal_Average_802.11ax20_5500MHz

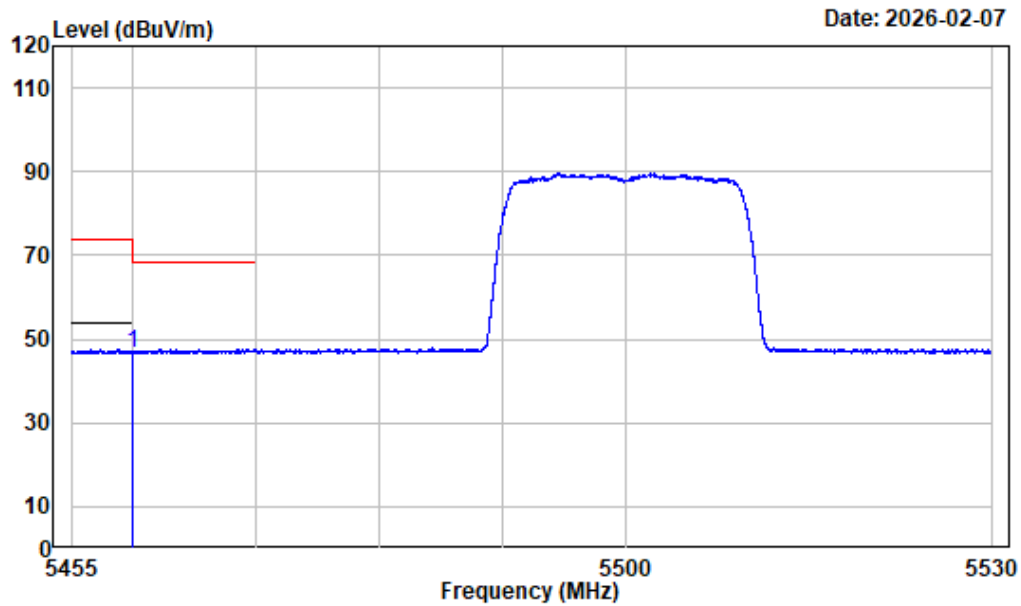

Condition : Horizontal
 Project No. : 2501A25853E-RFA1
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
 Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read	Limit	Over	Remark
Level	Level	Line	Limit	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	53.04	46.78	54.00	-7.22 Average


Left Band edge_Vertical_Peak_802.11ax20_5500MHz

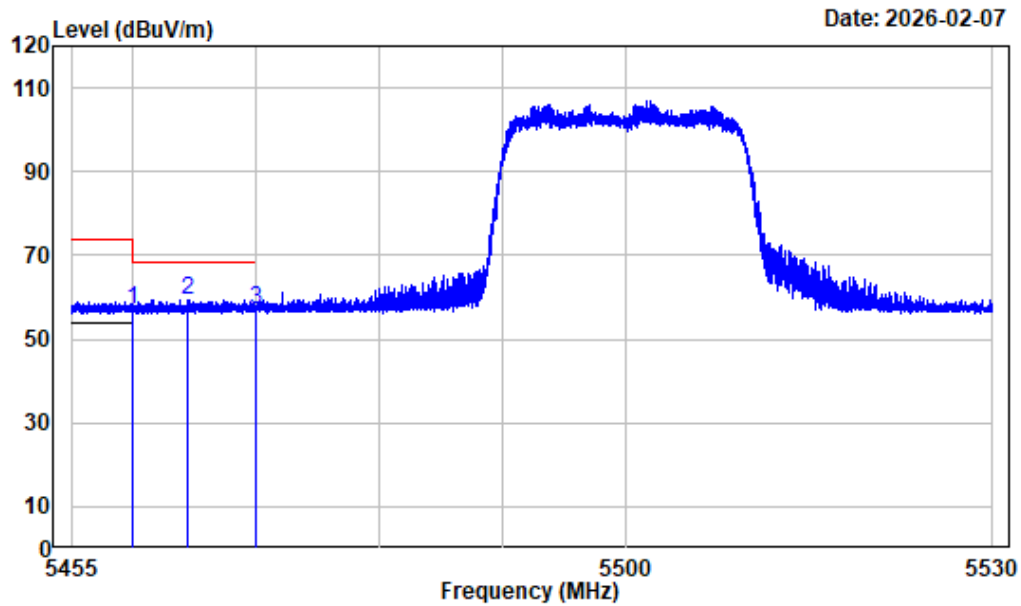

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	63.32	57.06	74.00	-16.94 Peak
2 5464.422	-6.25	65.75	59.50	68.20	-8.70 Peak
3 5470.000	-6.22	63.31	57.09	68.20	-11.11 Peak


Left Band edge_Vertical_Average_802.11ax20_5500MHz

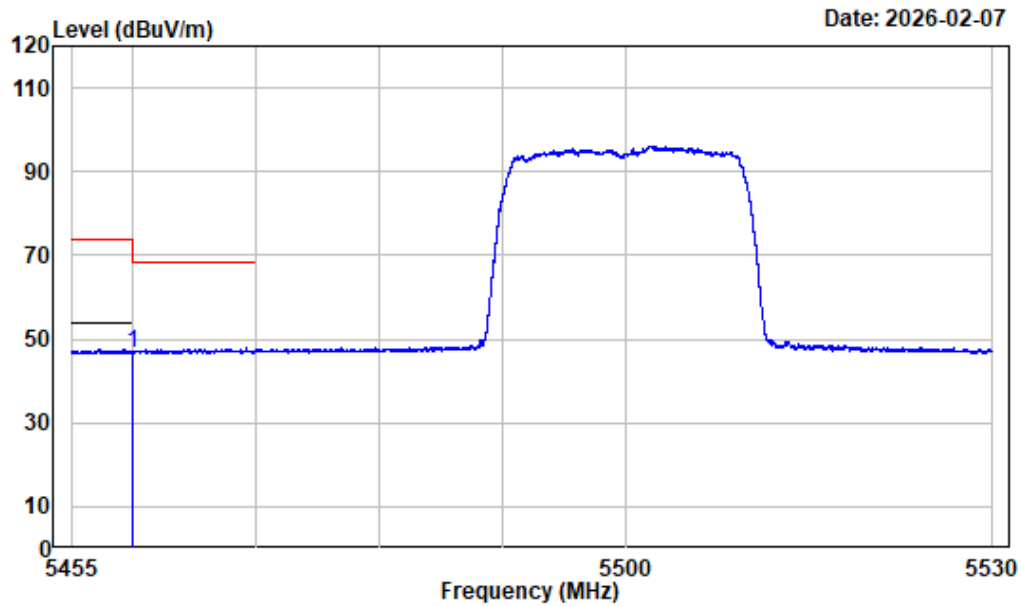

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.26	53.11	46.85	54.00	-7.15	Average


Right Band edge_Horizontal_Peak_802.11ax20_5700MHz

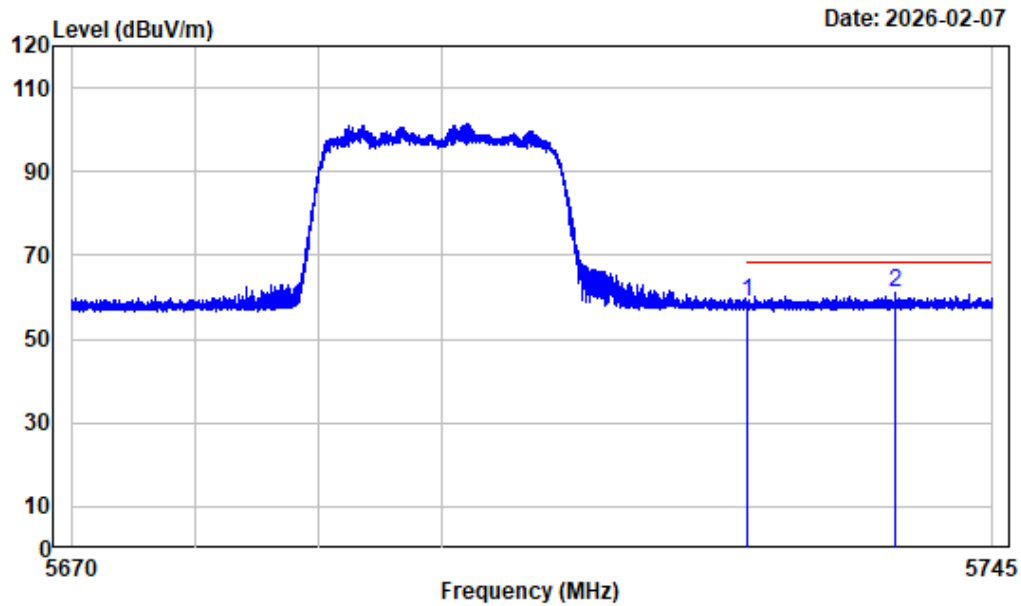

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.54	64.40	58.86	68.20	-9.34	Peak
2 5737.060	-5.42	66.42	61.00	68.20	-7.20	Peak


Right Band edge_Vertical_Peak_802.11ax20_5700MHz

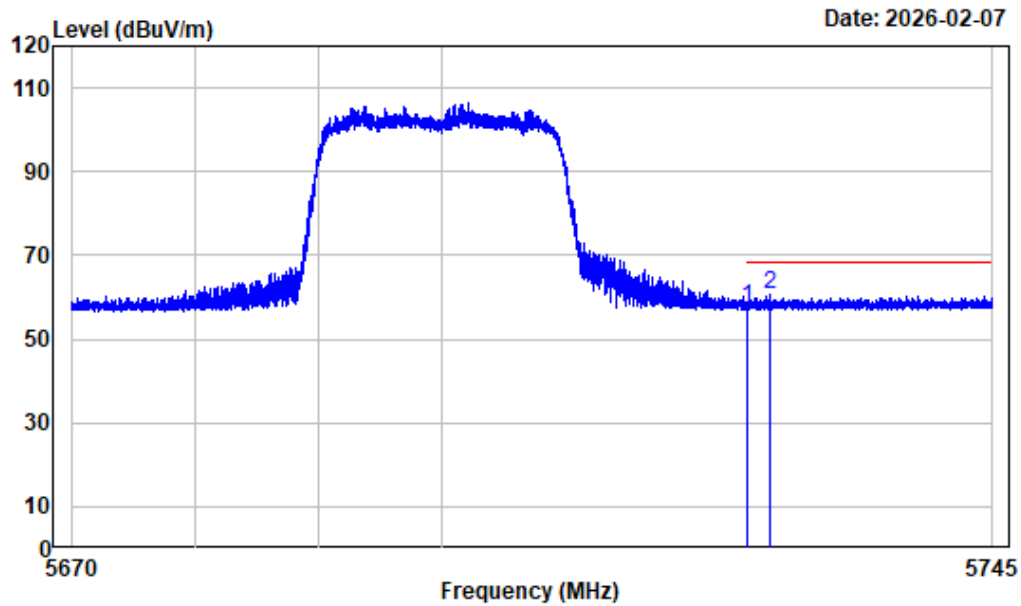

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.22	57.68	68.20	-10.52	Peak
2	5726.784	-5.51	66.16	60.65	68.20	-7.55	Peak


Left Band edge_Horizontal_Peak_802.11ax40_5510MHz

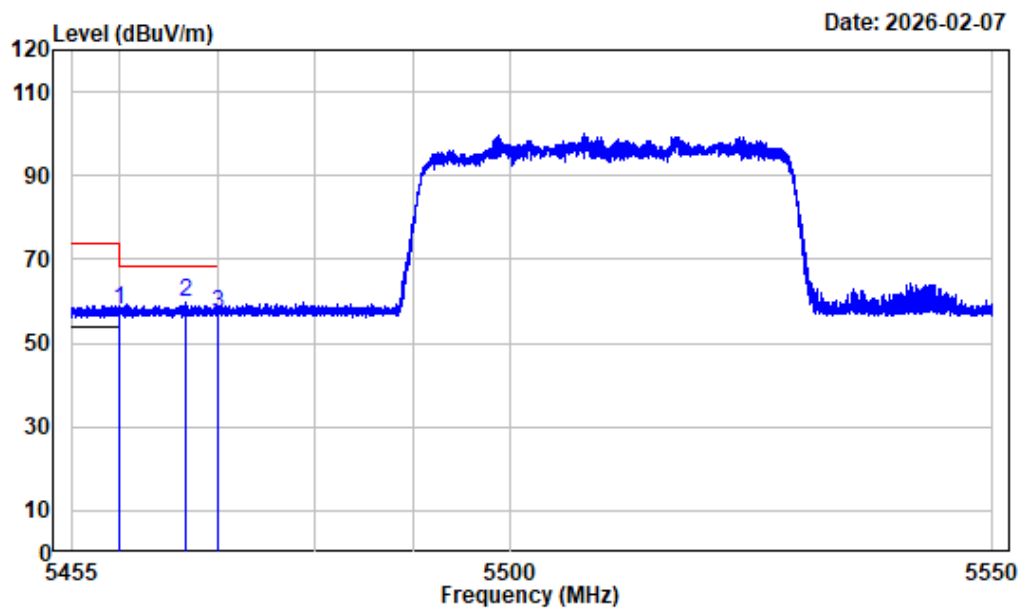

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	64.02	57.76	74.00	-16.24 Peak
2 5466.768	-6.23	65.98	59.75	68.20	-8.45 Peak
3 5470.000	-6.22	63.29	57.07	68.20	-11.13 Peak


Left Band edge_Horizontal_Average_802.11ax40_5510MHz

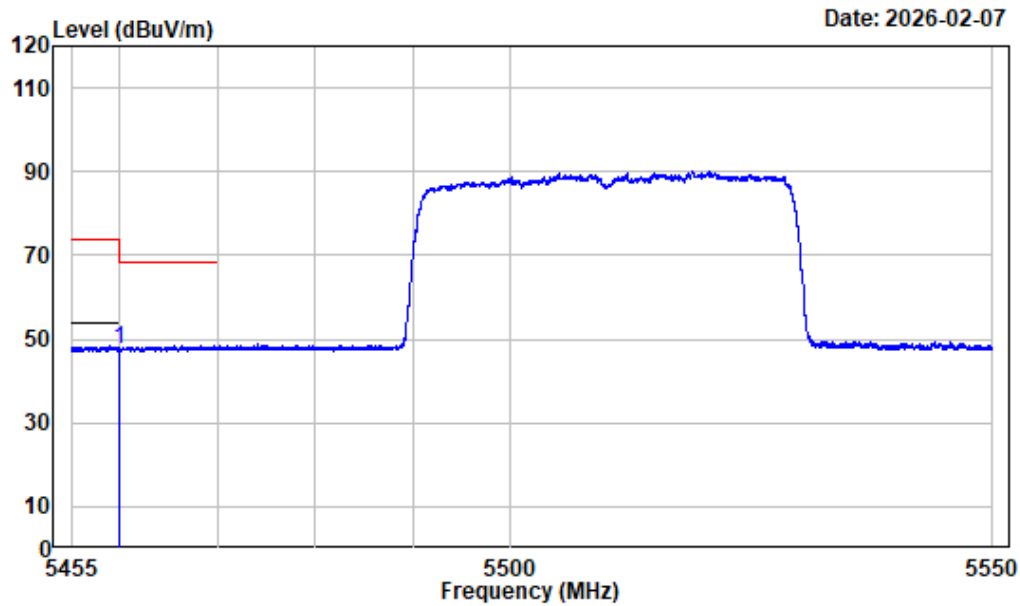

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.26	53.85	47.59	54.00	-6.41	Average


Left Band edge_Vertical_Peak_802.11ax40_5510MHz

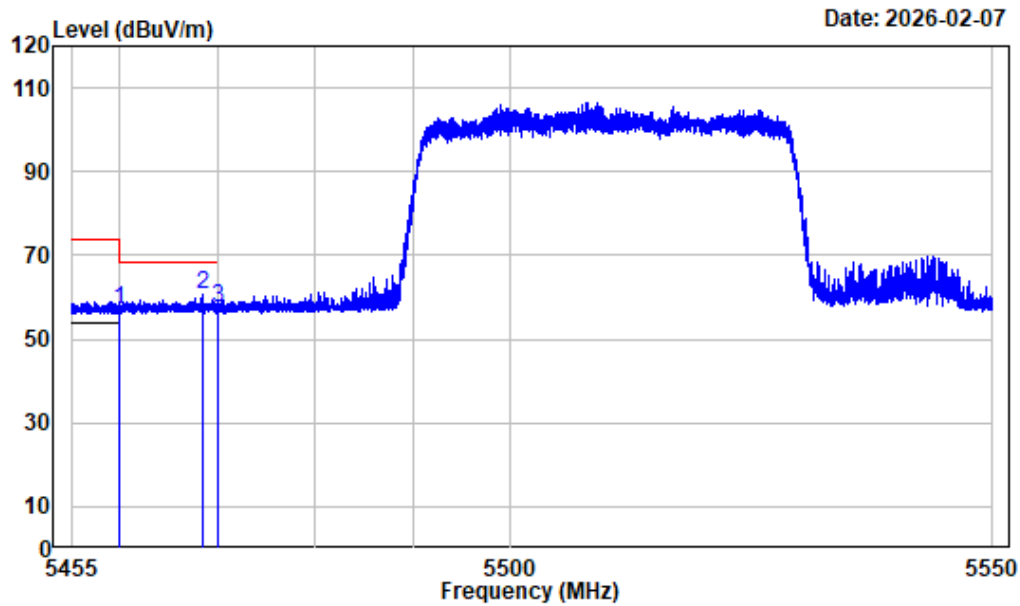

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	63.18	56.92	74.00	-17.08	Peak
2	5468.407	-6.23	66.71	60.48	68.20	-7.72	Peak
3	5470.000	-6.22	63.65	57.43	68.20	-10.77	Peak


Left Band edge_Vertical_Average_802.11ax40_5510MHz

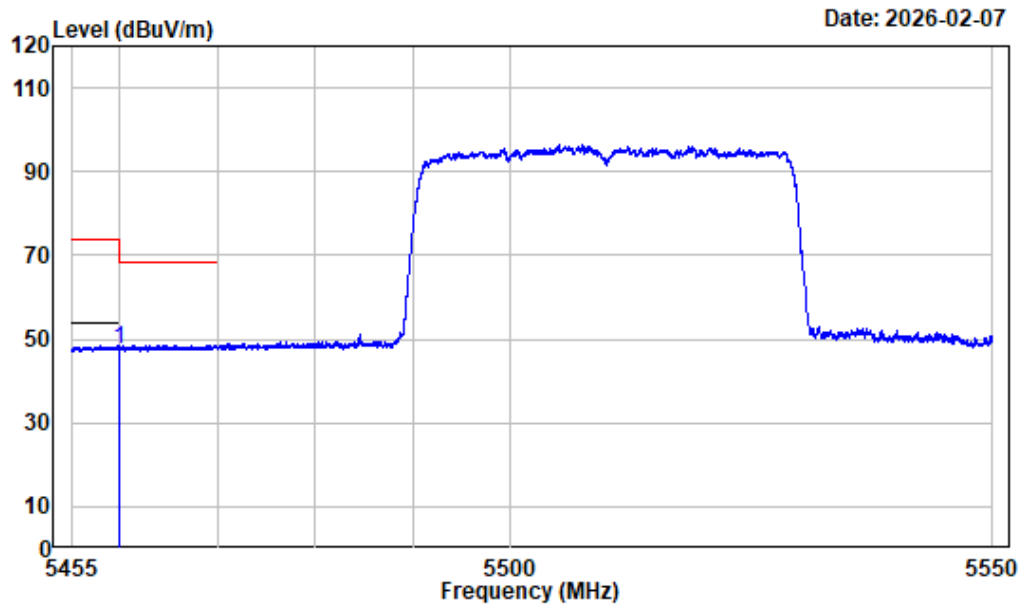

Condition : Vertical
 Project No. : 2501A25853E-RFA1
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
 Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read	Limit	Over	Remark
Level	Level	Line	Limit	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	54.02	47.76	54.00	-6.24 Average


Right Band edge_Horizontal_Peak_802.11ax40_5670MHz

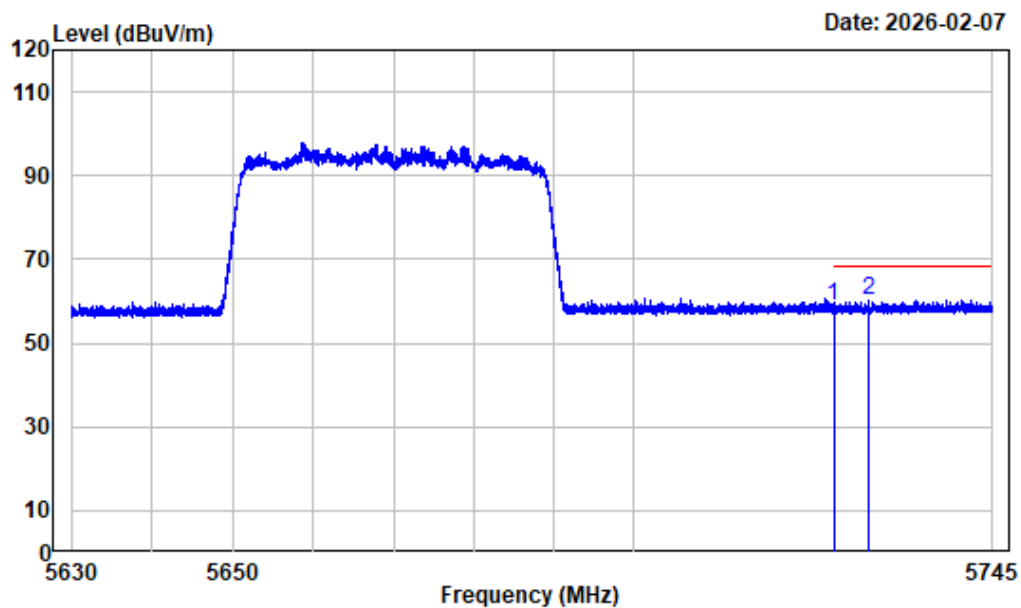

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	64.31	58.77	68.20	-9.43	Peak
2	5729.446	-5.49	65.78	60.29	68.20	-7.91	Peak


Right Band edge_Vertical_Peak_802.11ax40_5670MHz

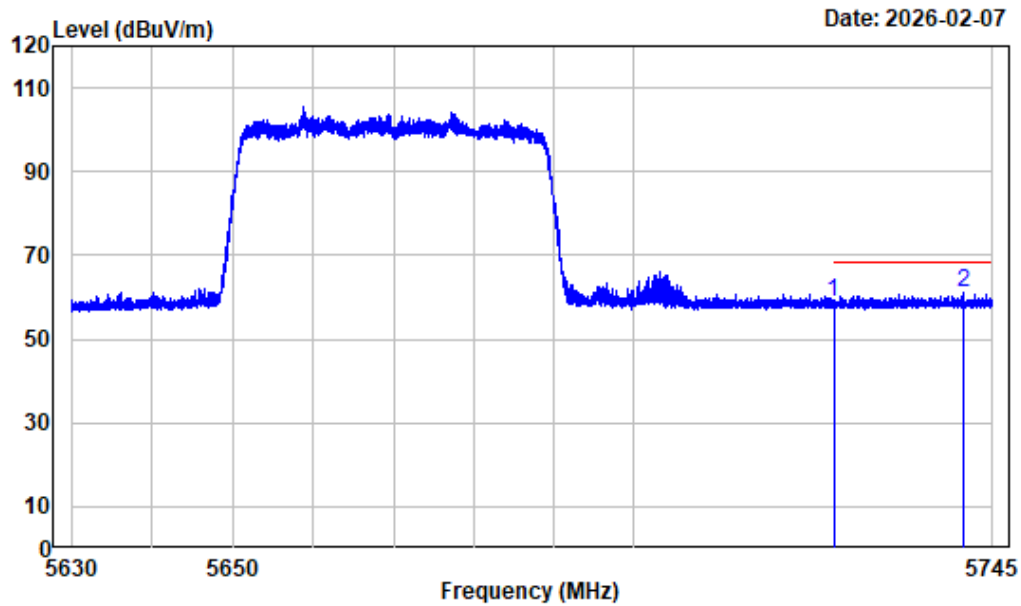

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	64.26	58.72	68.20	-9.48 Peak
2	5741.277	-5.38	66.53	61.15	68.20	-7.05 Peak


Left Band edge_Horizontal_Peak_802.11ax80_5530MHz

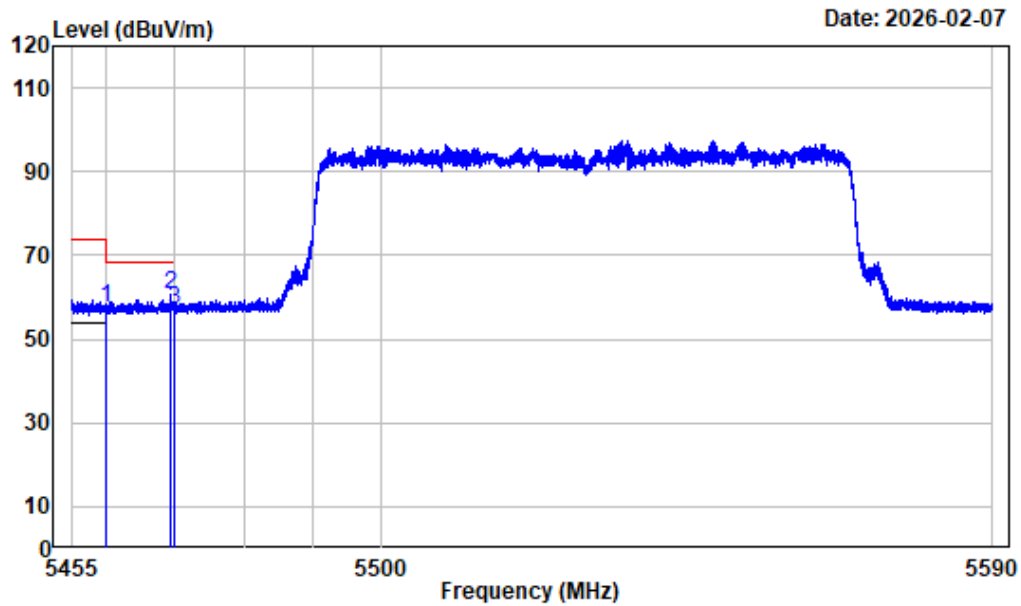

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	63.82	57.56	74.00	-16.44 Peak
2 5469.310	-6.23	66.76	60.53	68.20	-7.67 Peak
3 5470.000	-6.22	63.24	57.02	68.20	-11.18 Peak


Left Band edge_Horizontal_Average_802.11ax80_5530MHz

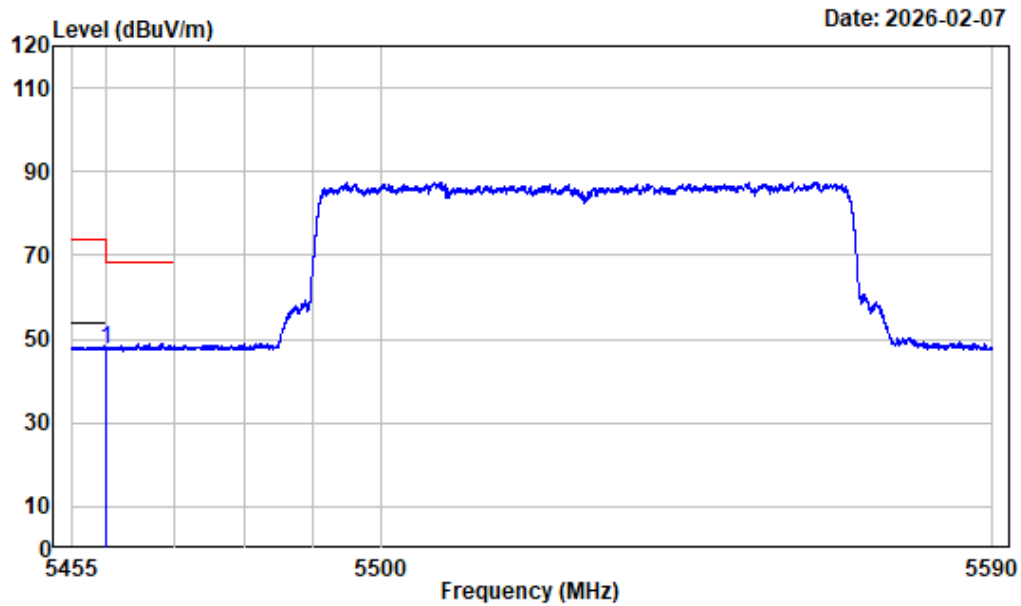

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	53.93	47.67	54.00	-6.33 Average


Left Band edge_Vertical_Peak_802.11ax80_5530MHz

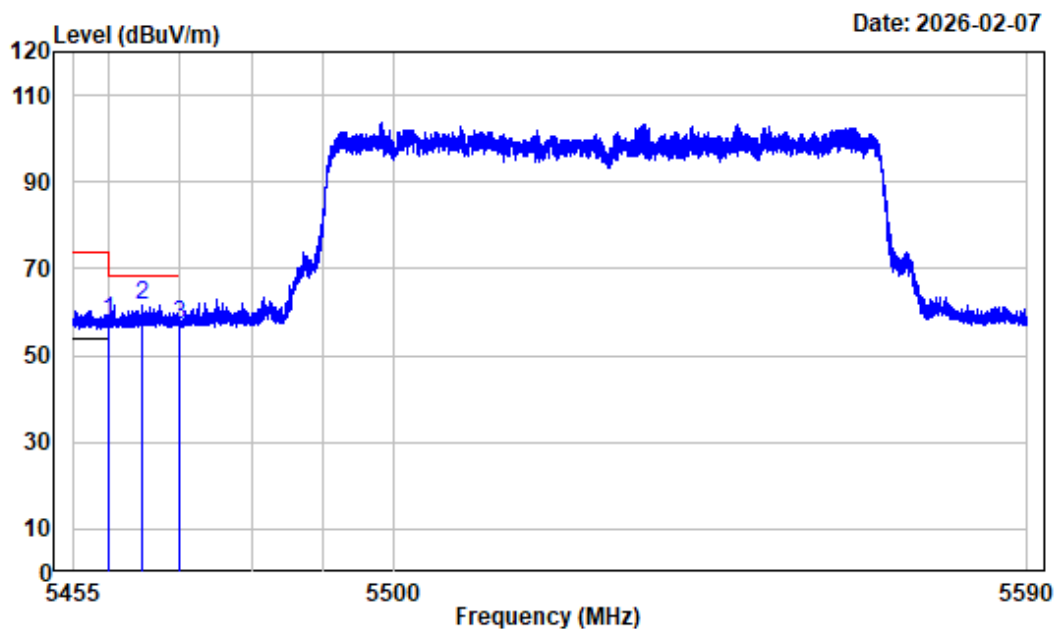

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.26	64.07	57.81	74.00	-16.19	Peak
2	5464.669	-6.25	67.91	61.66	68.20	-6.54	Peak
3	5470.000	-6.22	63.24	57.02	68.20	-11.18	Peak


Left Band edge_Vertical_Average_802.11ax80_5530MHz

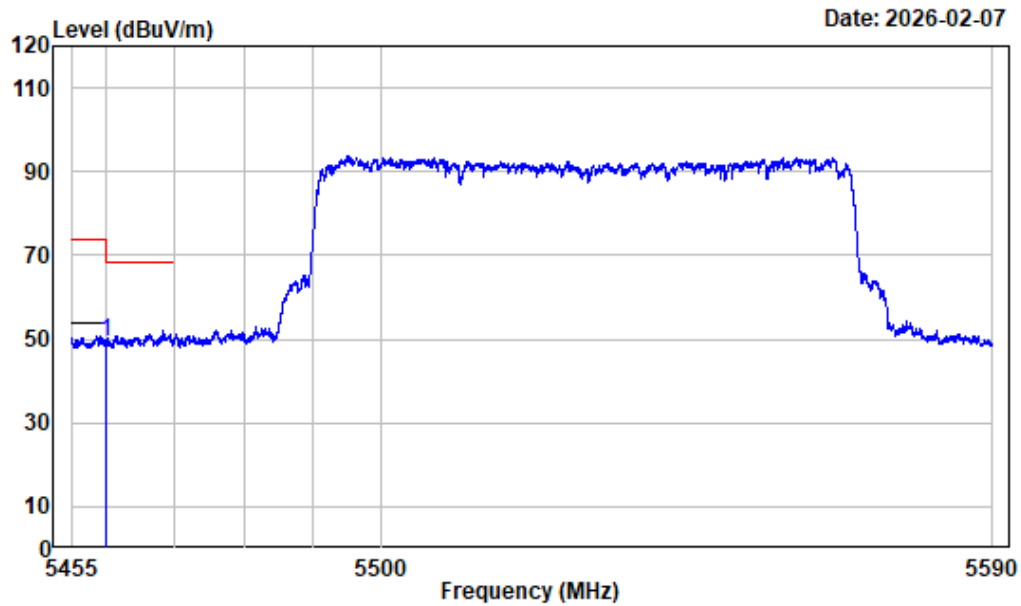

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:10kHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.26	55.59	49.33	54.00	-4.67 Average


Right Band edge_Horizontal_Peak_802.11ax80_5610MHz

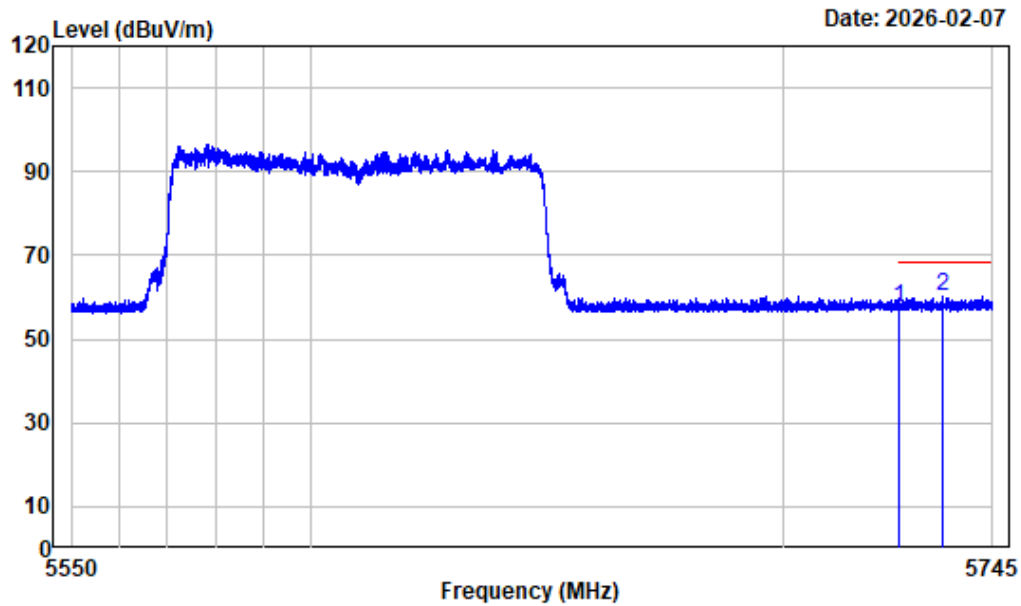

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5610

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	62.90	57.36	68.20	-10.84	Peak
2	5734.373	-5.43	65.76	60.33	68.20	-7.87	Peak


Right Band edge_Vertical_Peak_802.11ax80_5610MHz

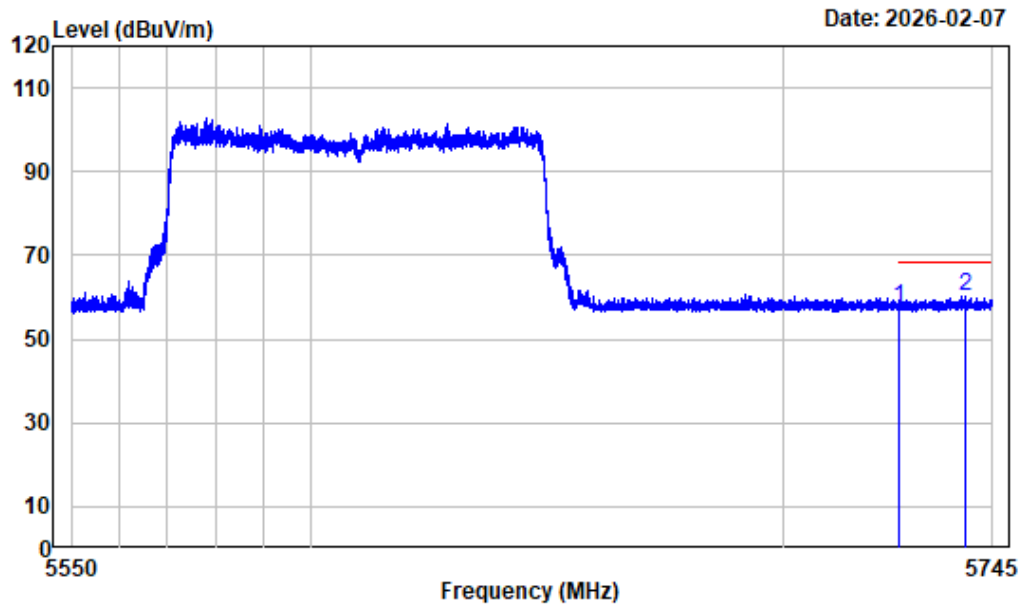

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5610

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.54	63.15	57.61	68.20	-10.59	Peak
2	5739.125	-5.39	65.72	60.33	68.20	-7.87	Peak


Left Band edge_Horizontal_Peak_802.11a_5745MHz_ANT0

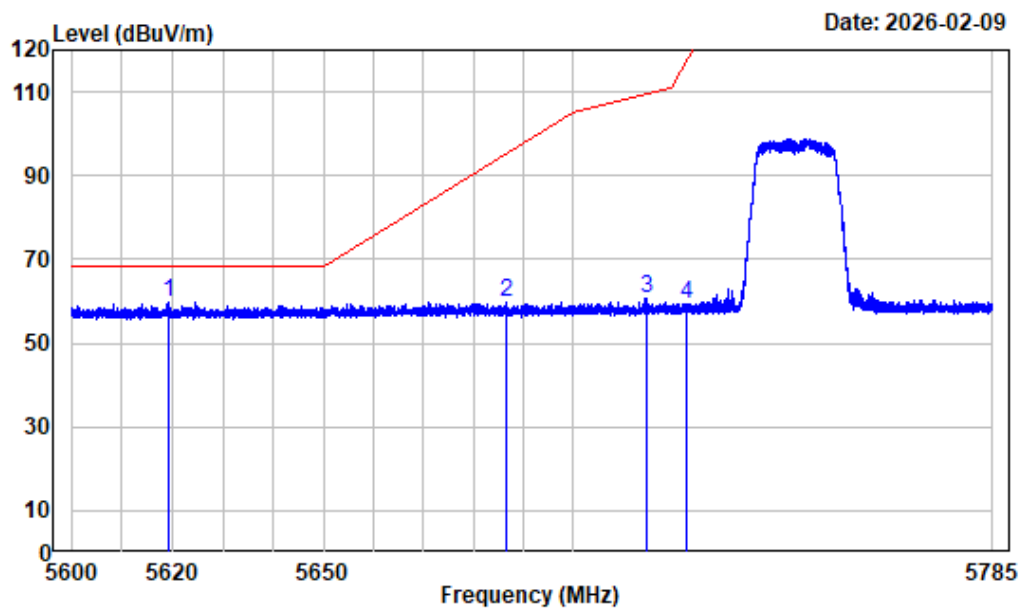

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5619.147	-6.09	65.99	59.90	68.20	-8.30	Peak
2	5686.511	-5.80	65.59	59.79	95.25	-35.46	Peak
3	5714.839	-5.63	66.12	60.49	109.36	-48.87	Peak
4	5722.909	-5.55	65.05	59.50	117.43	-57.93	Peak


Left Band edge_Vertical_Peak_802.11a_5745MHz_ANT0

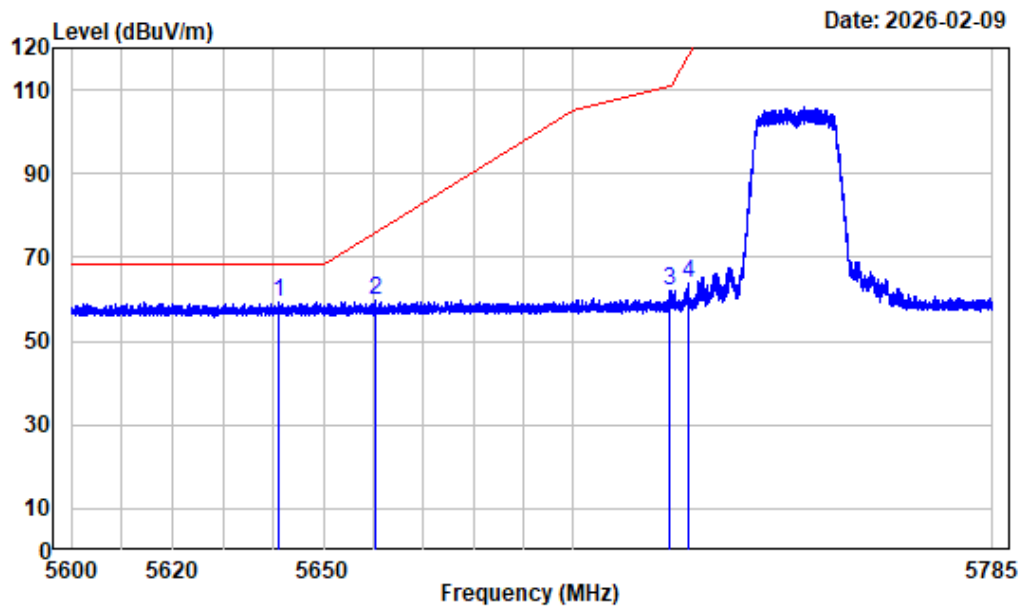

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5641.047	-5.94	65.27	59.33	68.20	-8.87	Peak
2	5660.402	-5.87	65.77	59.90	75.92	-16.02	Peak
3	5719.580	-5.58	67.74	62.16	110.68	-48.52	Peak
4	5723.164	-5.55	69.46	63.91	118.01	-54.10	Peak


Right Band edge_Horizontal_Peak_802.11a_5825MHz_ANT0

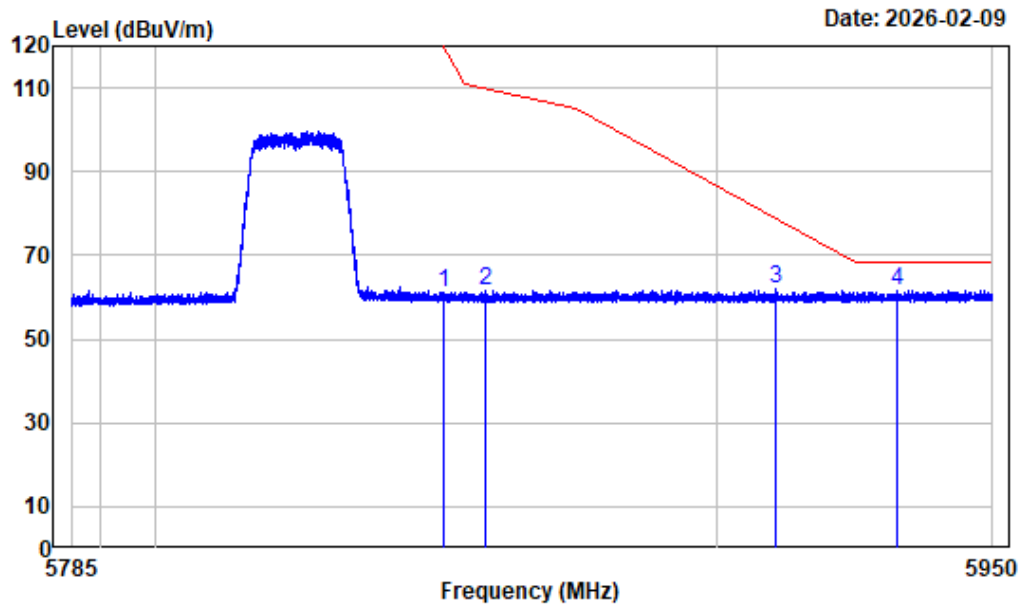

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5851.083	-4.70	65.85	61.15	119.73	-58.58 Peak
2 5858.487	-4.67	66.32	61.65	109.82	-48.17 Peak
3 5910.792	-4.50	66.38	61.88	78.68	-16.80 Peak
4 5932.572	-4.49	66.21	61.72	68.20	-6.48 Peak


Right Band edge_Vertical_Peak_802.11a_5825MHz_ANT0

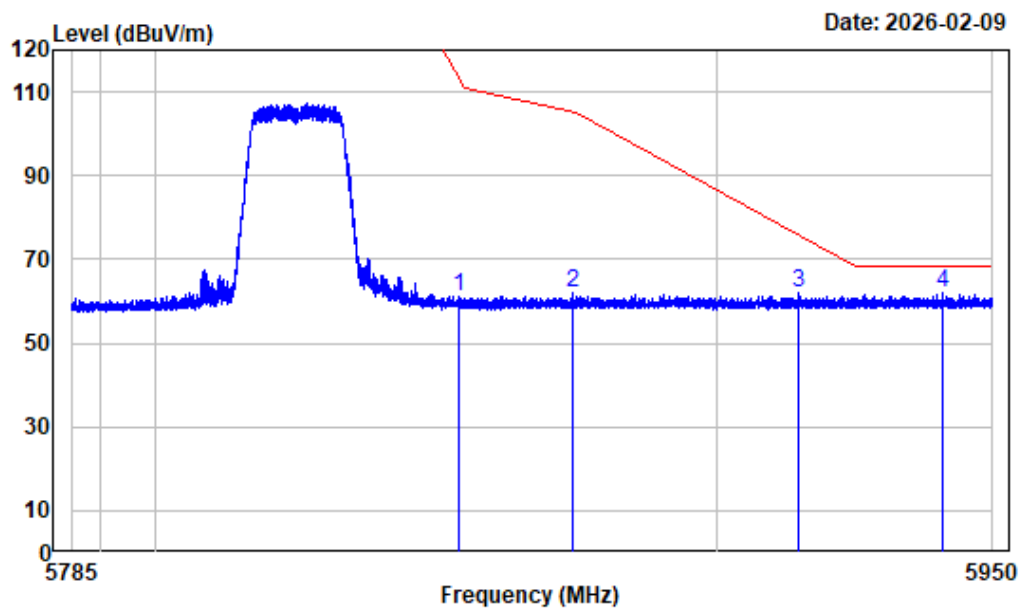

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5853.846	-4.68	65.73	61.05	113.43	-52.38 Peak
2 5874.203	-4.60	66.65	62.05	105.42	-43.37 Peak
3 5914.772	-4.50	66.56	62.06	75.74	-13.68 Peak
4 5941.049	-4.48	66.31	61.83	68.20	-6.37 Peak


Left Band edge_Horizontal_Peak_802.11a_5745MHz_ANT1

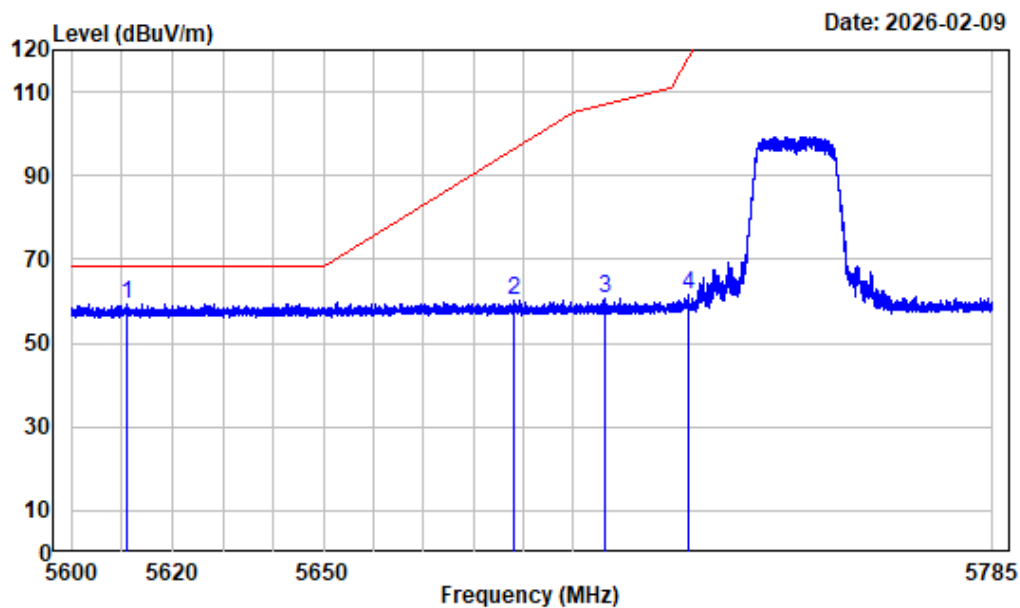

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5611.123	-6.13	65.61	59.48	68.20	-8.72	Peak
2	5688.106	-5.80	66.00	60.20	96.43	-36.23	Peak
3	5706.606	-5.72	66.28	60.56	107.05	-46.49	Peak
4	5723.256	-5.55	66.96	61.41	118.23	-56.82	Peak


Left Band edge_Vertical_Peak_802.11a_5745MHz_ANT1

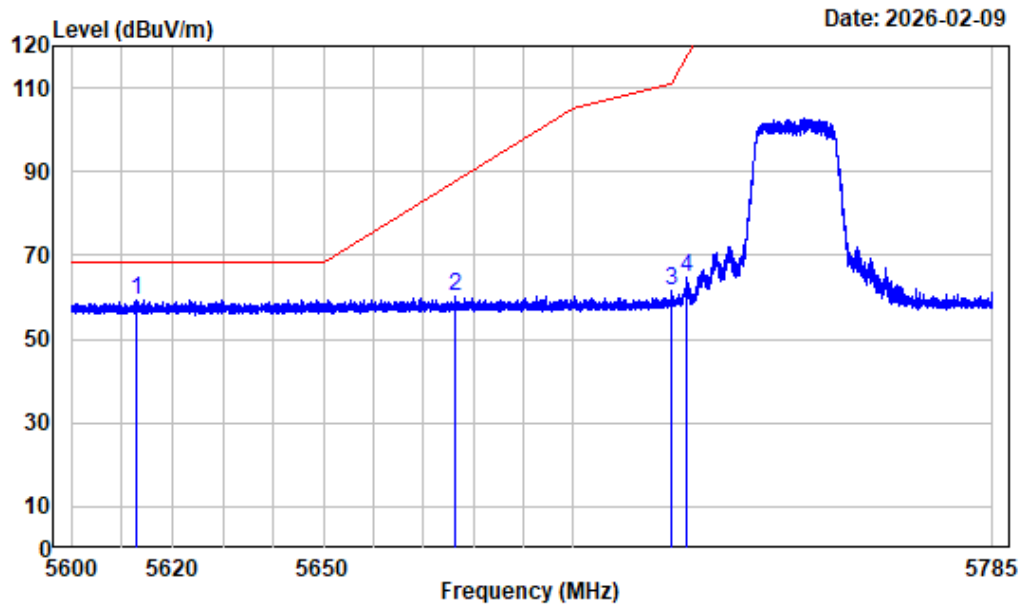

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5612.973	-6.13	65.46	59.33	68.20	-8.87	Peak
2	5676.498	-5.83	66.22	60.39	87.85	-27.46	Peak
3	5719.718	-5.58	67.36	61.78	110.72	-48.94	Peak
4	5722.909	-5.55	70.46	64.91	117.43	-52.52	Peak


Right Band edge_Horizontal_Peak_802.11a_5825MHz_ANT1

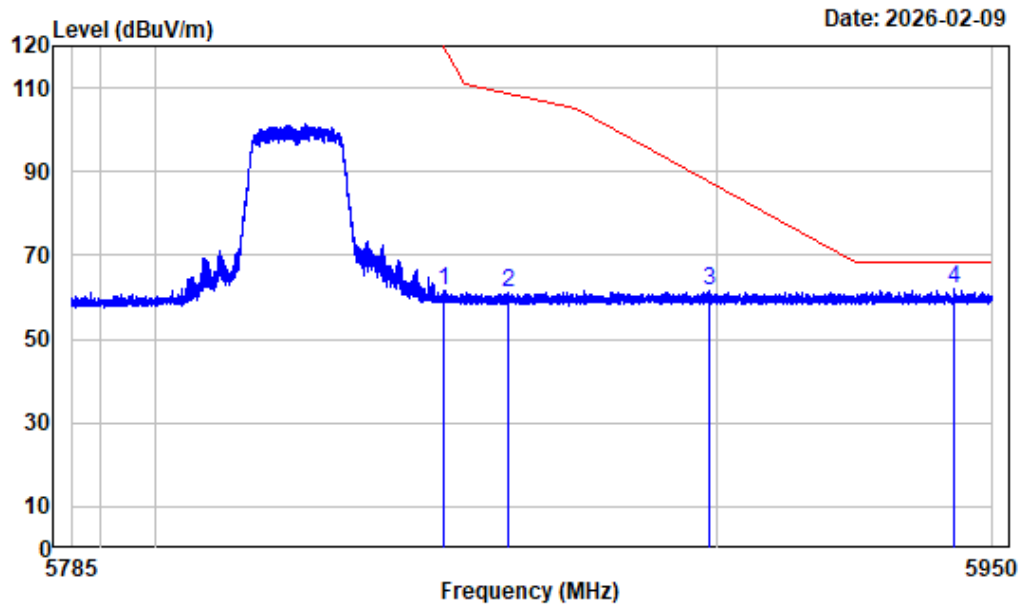

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.227	-4.70	66.37	61.67	119.40	-57.73	Peak
2	5862.715	-4.65	65.80	61.15	108.64	-47.49	Peak
3	5898.726	-4.52	65.93	61.41	87.60	-26.19	Peak
4	5943.132	-4.49	66.63	62.14	68.20	-6.06	Peak


Right Band edge_Vertical_Peak_802.11a_5825MHz_ANT1

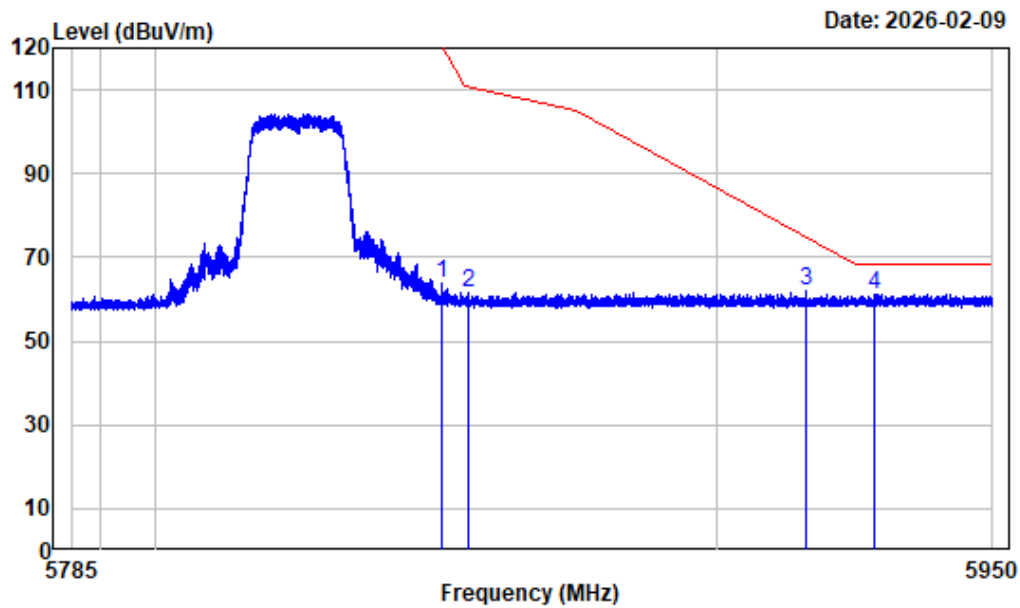

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.855	-4.70	68.44	63.74	120.25	-56.51	Peak
2	5855.661	-4.68	66.09	61.41	110.61	-49.20	Peak
3	5916.196	-4.50	66.32	61.82	74.69	-12.87	Peak
4	5928.612	-4.50	65.73	61.23	68.20	-6.97	Peak


Left Band edge_Horizontal_802.11n-HT20

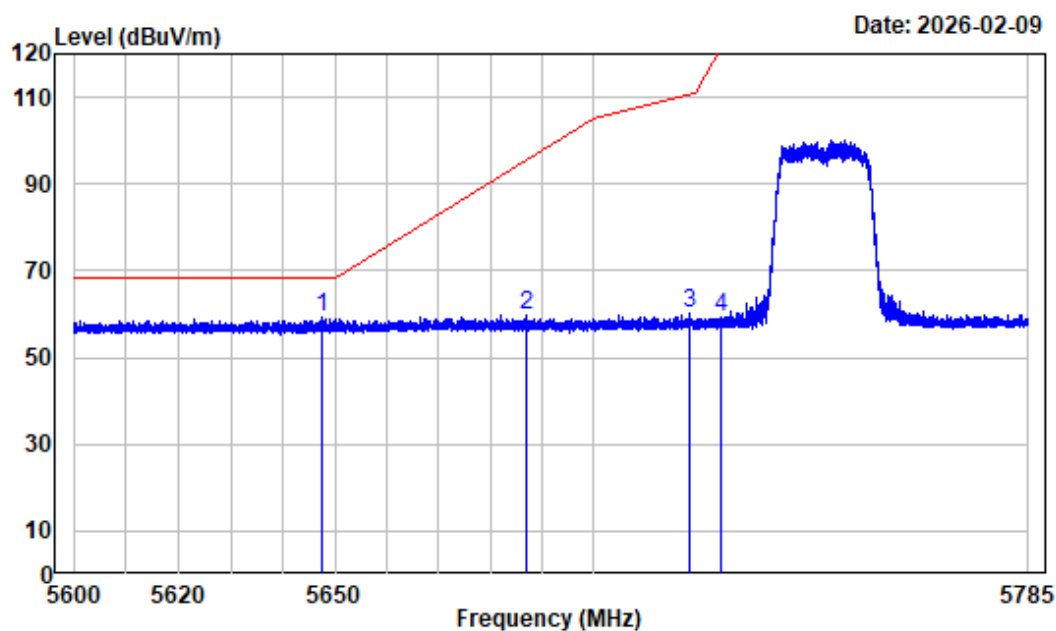

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5647.707	-5.90	65.14	59.24	68.20	-8.96	Peak
2	5687.089	-5.80	65.62	59.82	95.68	-35.86	Peak
3	5718.816	-5.59	65.62	60.03	110.47	-50.44	Peak
4	5724.806	-5.54	64.85	59.31	121.76	-62.45	Peak


Left Band edge_Vertical_802.11n-HT20

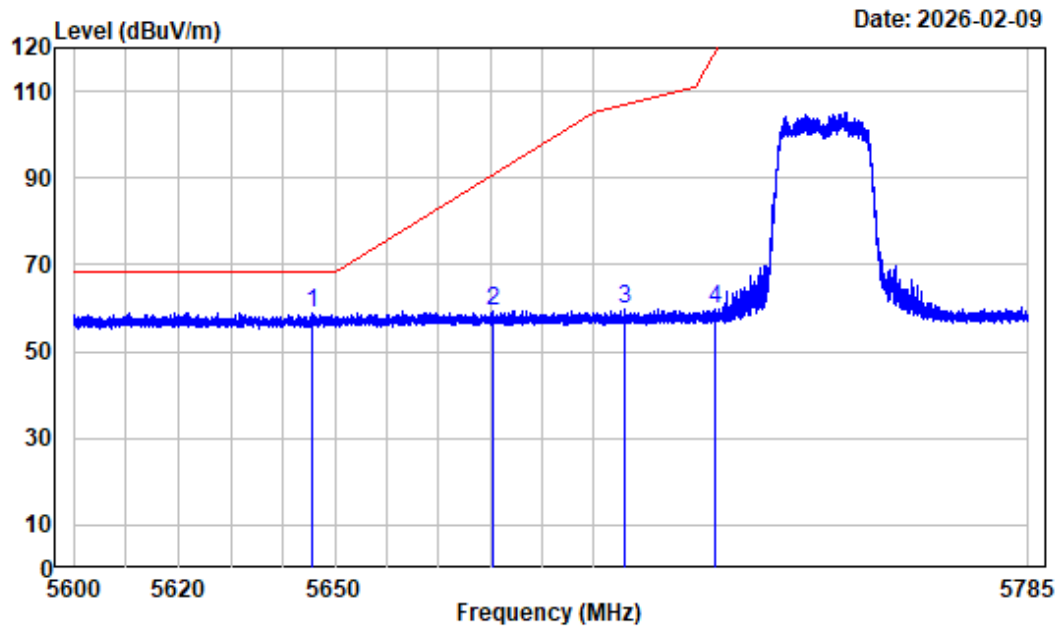

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5645.788	-5.92	64.96	59.04	68.20	-9.16	Peak
2	5680.406	-5.82	65.31	59.49	90.74	-31.25	Peak
3	5706.144	-5.72	65.36	59.64	106.92	-47.28	Peak
4	5723.557	-5.54	65.53	59.99	118.91	-58.92	Peak


Right Band edge_Horizontal_802.11n-HT20

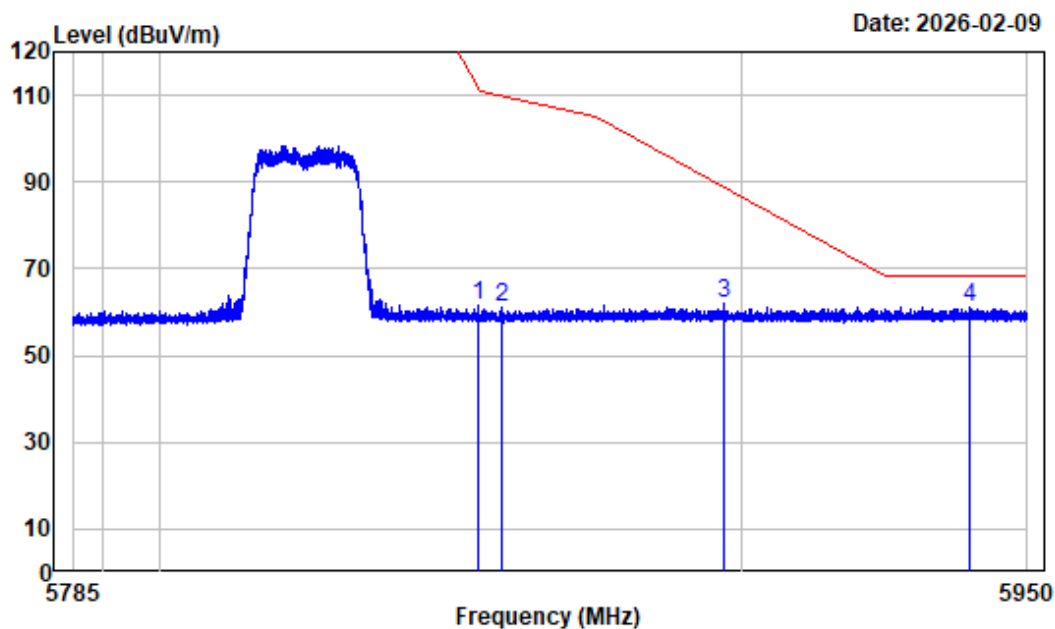

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.486	-4.68	66.10	61.42	111.97	-50.55	Peak
2	5858.466	-4.67	65.72	61.05	109.83	-48.78	Peak
3	5896.973	-4.52	66.36	61.84	88.90	-27.06	Peak
4	5939.956	-4.49	65.80	61.31	68.20	-6.89	Peak


Right Band edge_Vertical_802.11n-HT20

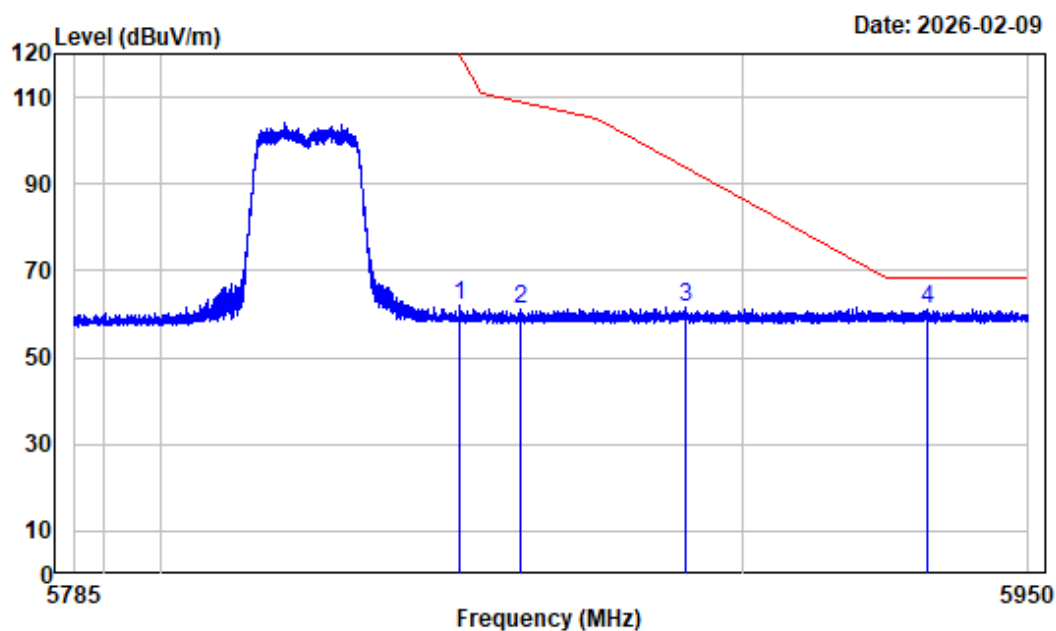

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.289	-4.69	66.56	61.87	119.26	-57.39	Peak
2	5861.684	-4.65	65.93	61.28	108.93	-47.65	Peak
3	5890.311	-4.55	66.30	61.75	93.84	-32.09	Peak
4	5932.345	-4.49	65.72	61.23	68.20	-6.97	Peak


Left Band edge_Horizontal_802.11n-HT40

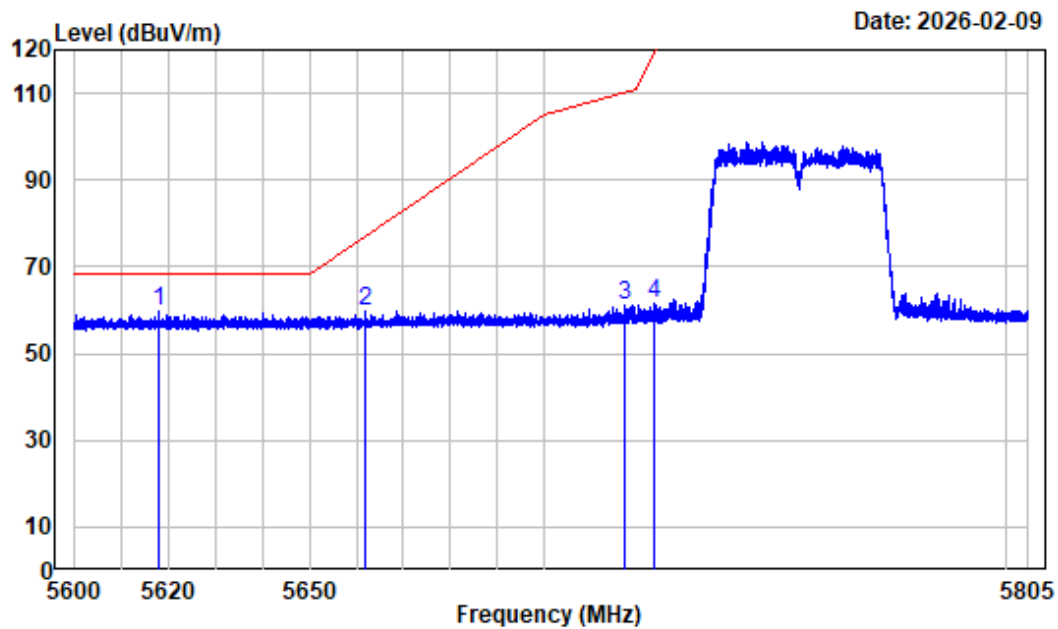

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5618.014	-6.09	65.71	59.62	68.20	-8.58	Peak
2	5661.756	-5.87	65.67	59.80	76.93	-17.13	Peak
3	5717.491	-5.61	66.88	61.27	110.10	-48.83	Peak
4	5723.897	-5.54	67.06	61.52	119.69	-58.17	Peak


Left Band edge_Vertical_802.11n-HT40

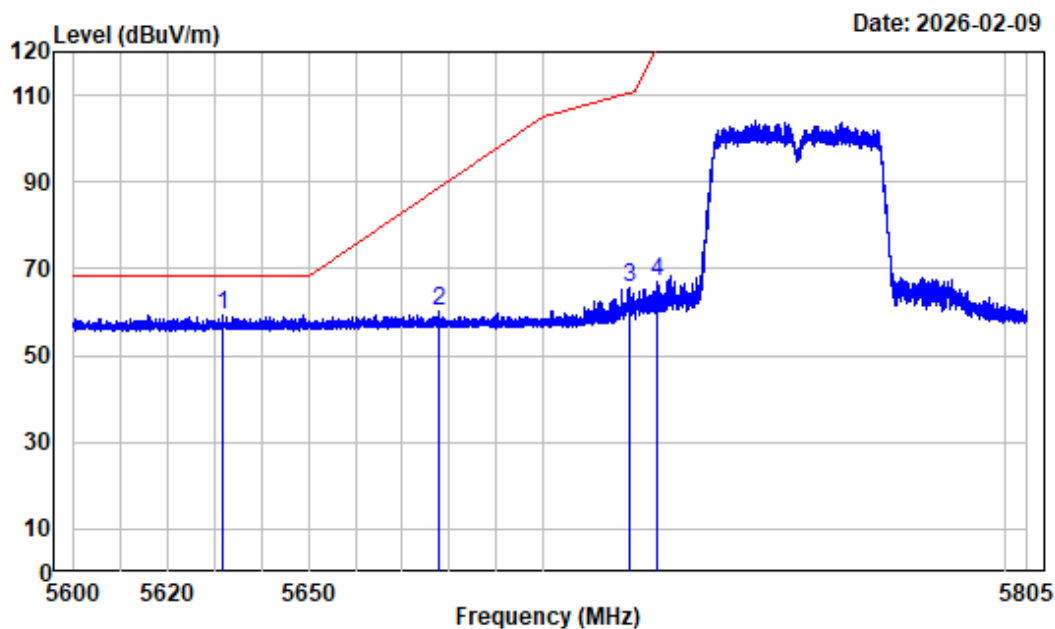

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5631.647	-6.00	65.24	59.24	68.20	-8.96	Peak
2	5677.977	-5.83	66.15	60.32	88.94	-28.62	Peak
3	5718.772	-5.59	71.13	65.54	110.46	-44.92	Peak
4	5724.563	-5.54	72.44	66.90	121.20	-54.30	Peak


Right Band edge_Horizontal_802.11n-HT40

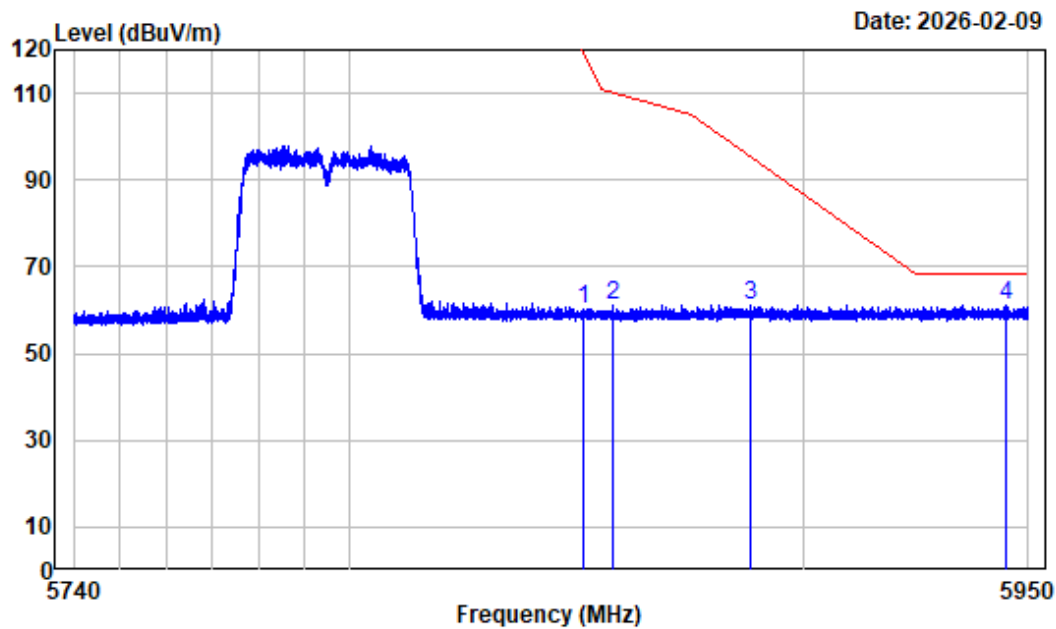

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.379	-4.69	65.14	60.45	119.06	-58.61	Peak
2	5857.652	-4.67	65.76	61.09	110.06	-48.97	Peak
3	5888.024	-4.55	65.73	61.18	95.53	-34.35	Peak
4	5944.908	-4.49	65.50	61.01	68.20	-7.19	Peak


Right Band edge_Vertical_802.11n-HT40

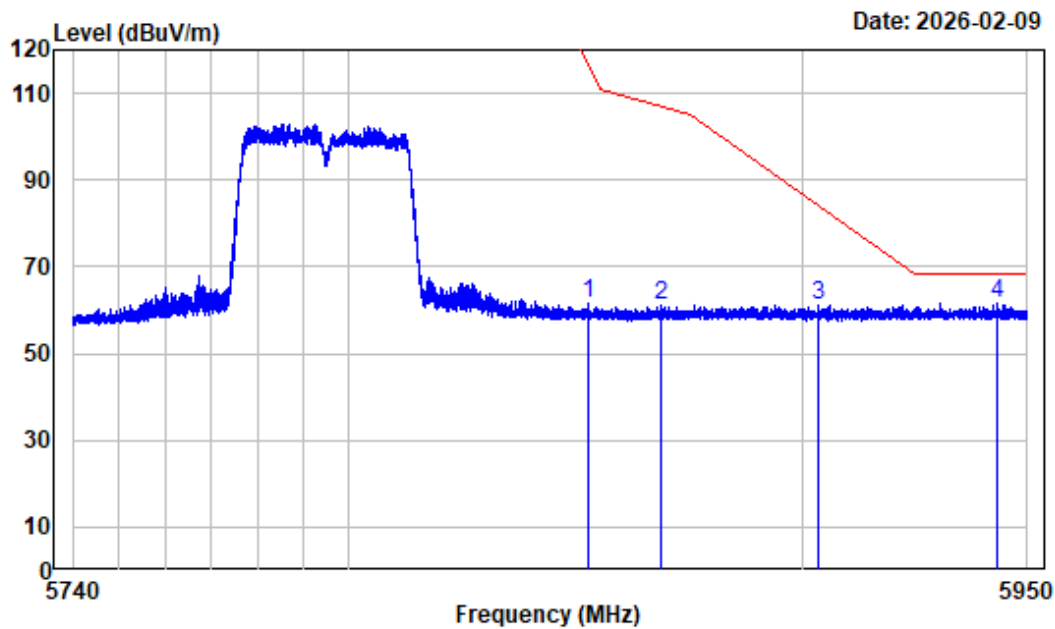

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.455	-4.69	66.38	61.69	116.60	-54.91	Peak
2	5868.441	-4.64	65.86	61.22	107.03	-45.81	Peak
3	5903.249	-4.51	65.84	61.33	84.26	-22.93	Peak
4	5943.096	-4.49	66.16	61.67	68.20	-6.53	Peak


Left Band edge_Horizontal_Peak_802.11ac-vht20_5745MHz

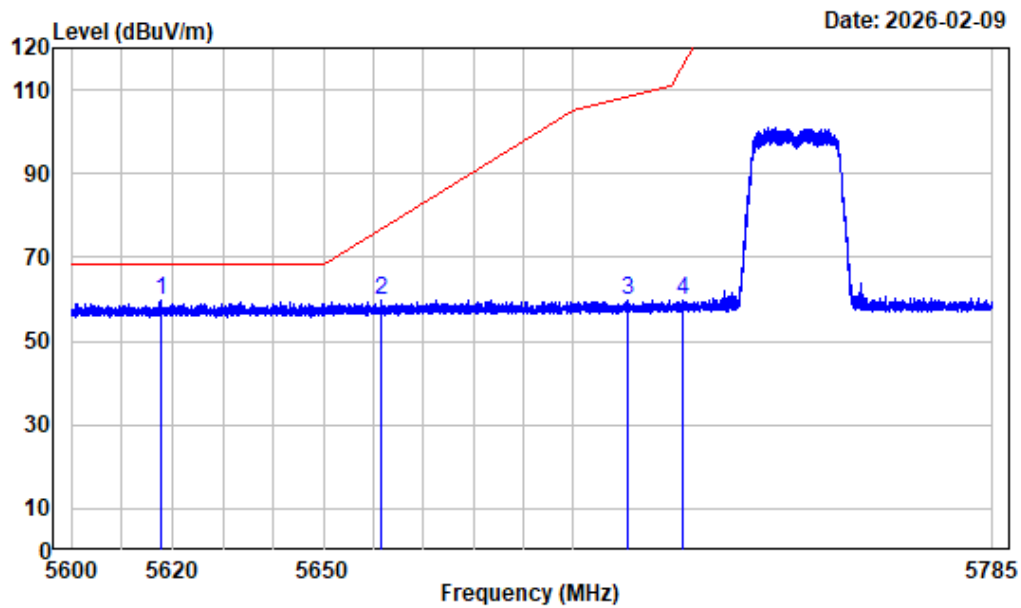

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5617.760	-6.09	65.76	59.67	68.20	-8.53 Peak
2 5661.605	-5.86	65.60	59.74	76.82	-17.08 Peak
3 5710.908	-5.67	65.50	59.83	108.26	-48.43 Peak
4 5722.192	-5.56	65.36	59.80	115.80	-56.00 Peak


Left Band edge_Vertical_Peak_802.11ac-vht20_5745MHz

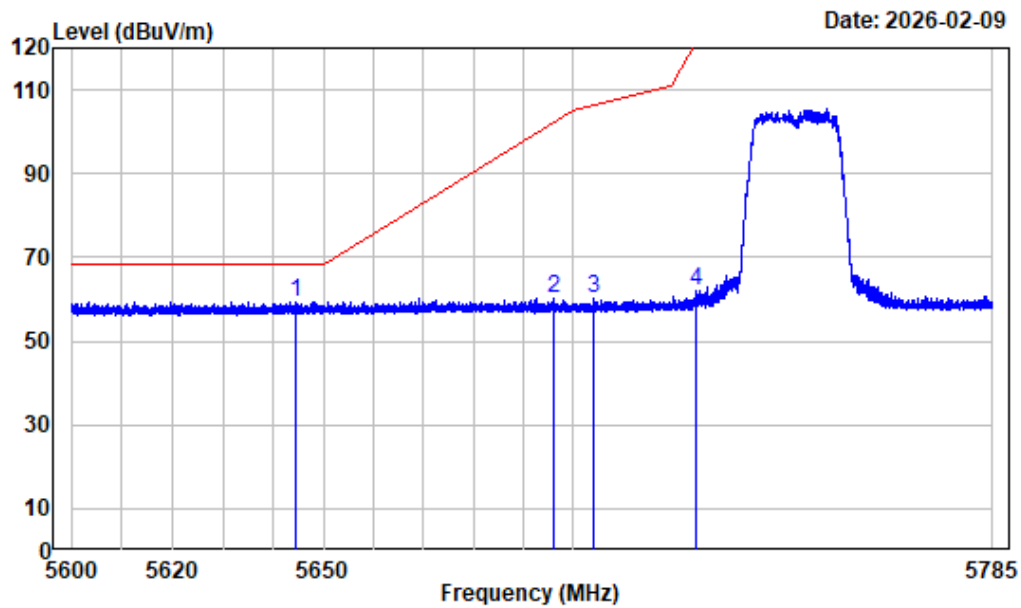

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5644.516	-5.92	65.45	59.53	68.20	-8.67	Peak
2	5696.038	-5.79	65.98	60.19	102.28	-42.09	Peak
3	5704.294	-5.73	65.76	60.03	106.40	-46.37	Peak
4	5724.898	-5.54	67.61	62.07	121.97	-59.90	Peak


Right Band edge_Horizontal_Peak_802.11ac-vht20_5825MHz

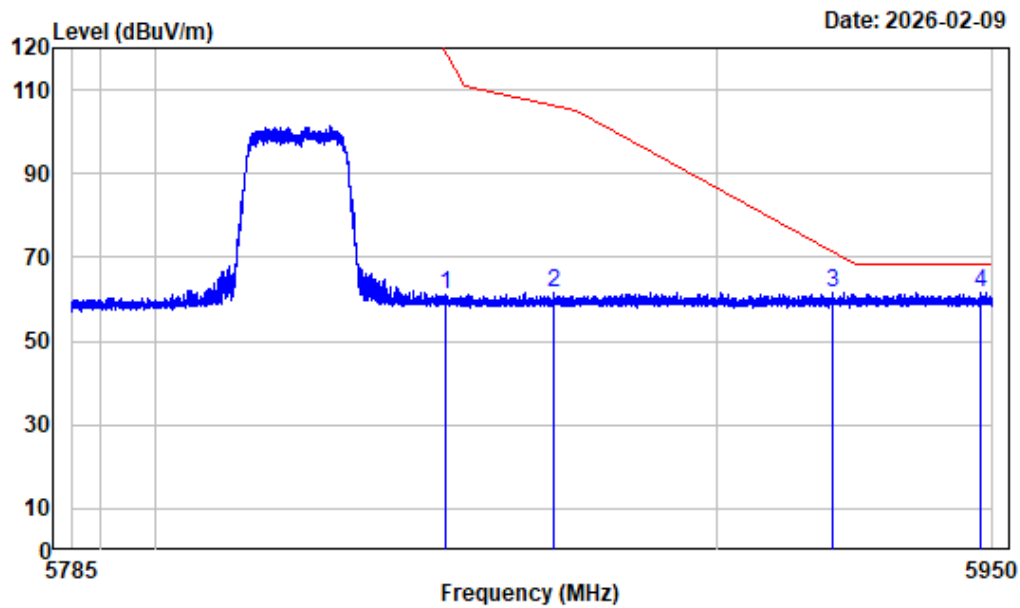

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5851.433	-4.69	65.64	60.95	118.93	-57.98 Peak
2 5870.944	-4.62	66.40	61.78	106.33	-44.55 Peak
3 5921.187	-4.49	66.03	61.54	71.01	-9.47 Peak
4 5947.772	-4.49	66.30	61.81	68.20	-6.39 Peak


Right Band edge_Vertical_Peak_802.11ac-vht20_5825MHz

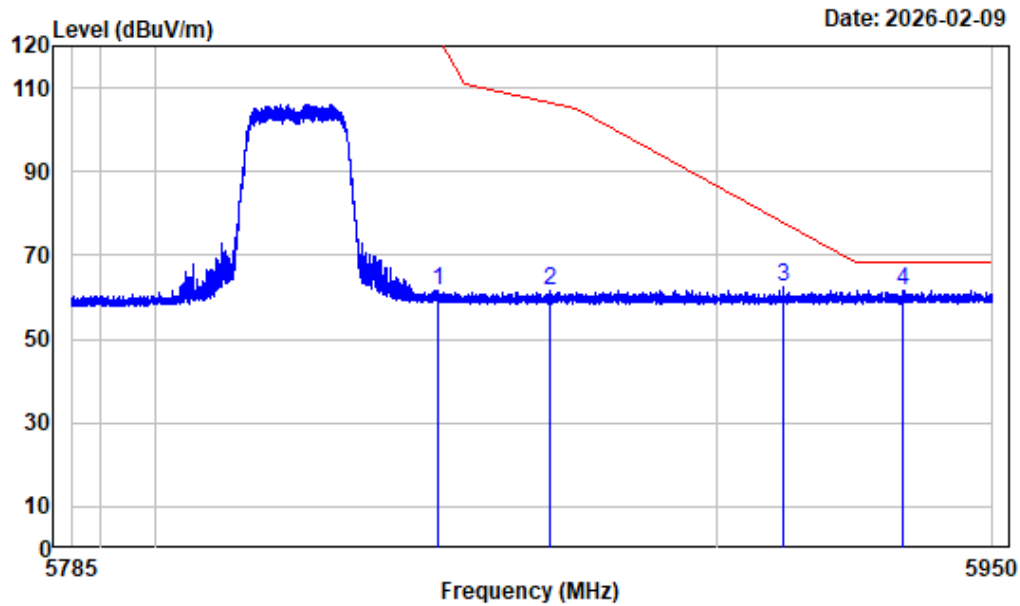

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.175	-4.70	66.07	61.37	121.80	-60.43	Peak
2	5870.305	-4.62	66.22	61.60	106.51	-44.91	Peak
3	5912.112	-4.50	67.09	62.59	77.71	-15.12	Peak
4	5933.706	-4.49	66.22	61.73	68.20	-6.47	Peak


Left Band edge_Horizontal_Peak_802.11ac-vht40_5755MHz

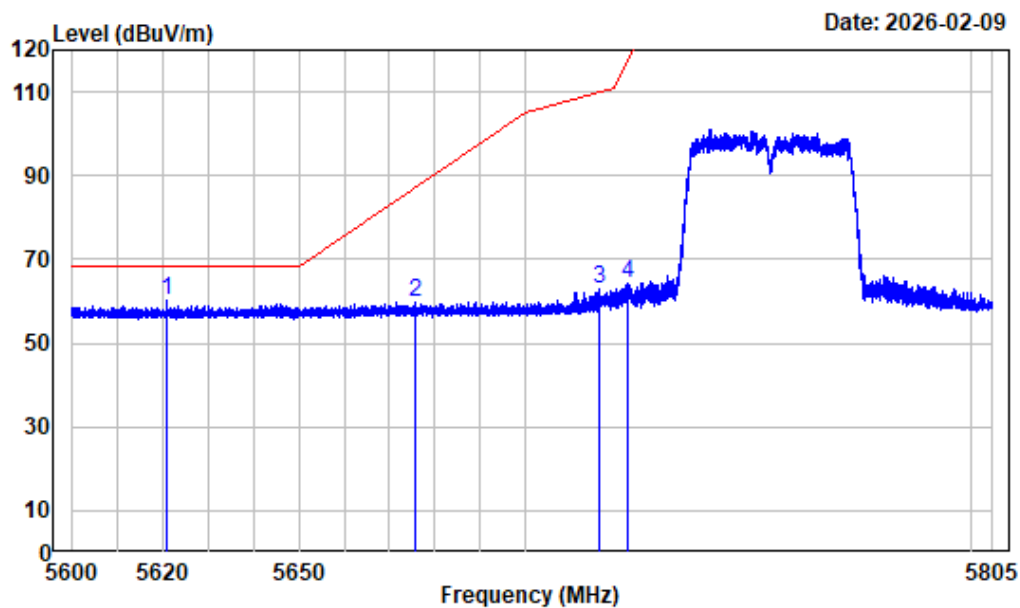

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5620.936	-6.07	66.17	60.10	68.20	-8.10	Peak
2	5675.824	-5.84	65.79	59.95	87.35	-27.40	Peak
3	5716.568	-5.62	68.65	63.03	109.84	-46.81	Peak
4	5723.128	-5.55	69.79	64.24	117.93	-53.69	Peak


Left Band edge_Vertical_Peak_802.11ac-vht40_5755MHz

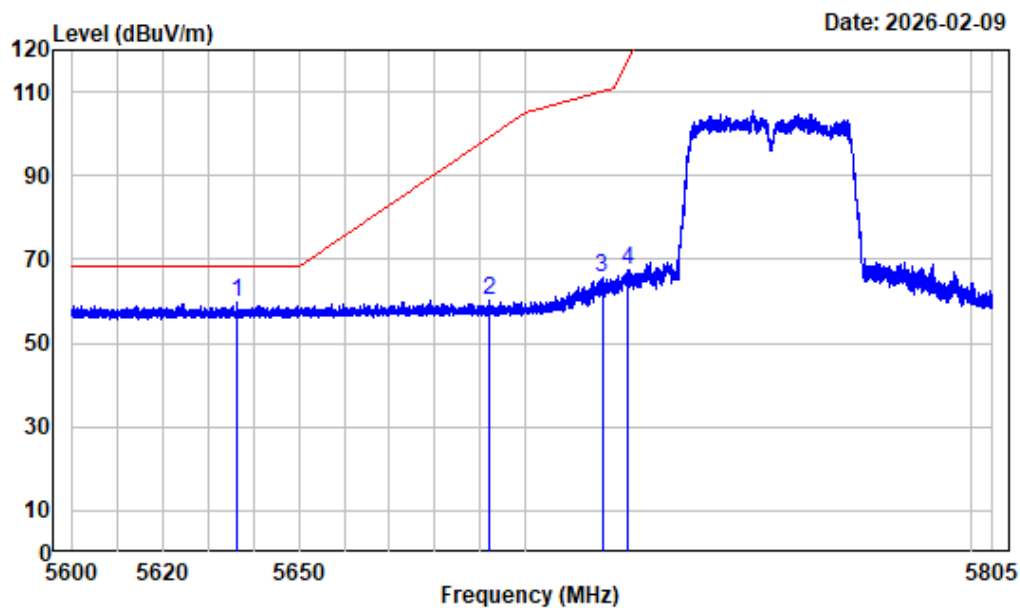

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5636.388	-5.98	65.69	59.71	68.20	-8.49	Peak
2	5692.147	-5.80	66.16	60.36	99.41	-39.05	Peak
3	5717.234	-5.62	71.21	65.59	110.03	-44.44	Peak
4	5722.897	-5.55	73.19	67.64	117.41	-49.77	Peak


Right Band edge_Horizontal_Peak_802.11ac-vht40_5795MHz

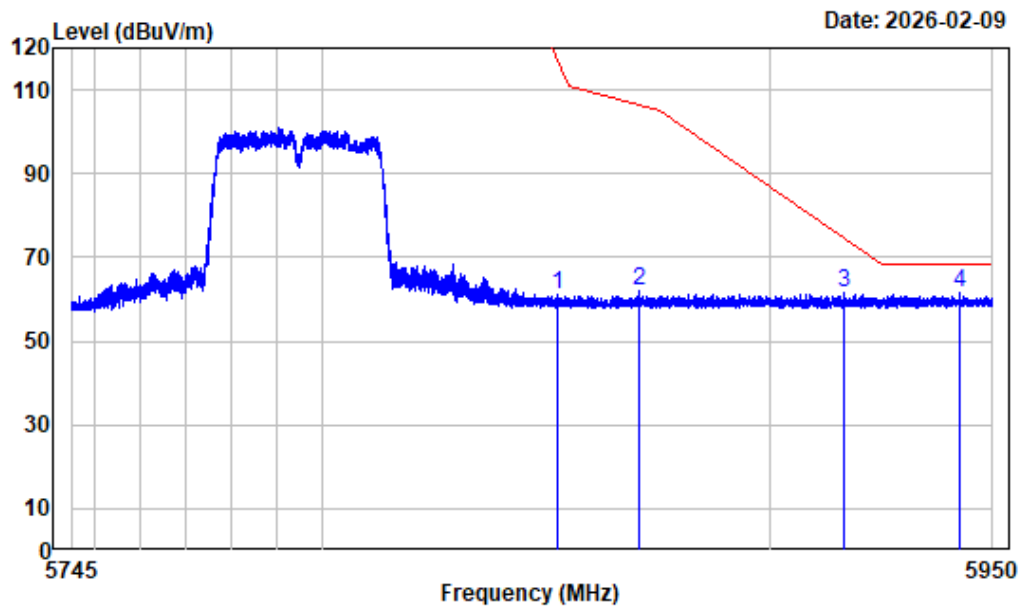

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.317	-4.69	65.71	61.02	116.92	-55.90	Peak
2	5870.460	-4.62	66.55	61.93	106.47	-44.54	Peak
3	5916.457	-4.50	66.02	61.52	74.50	-12.98	Peak
4	5942.748	-4.49	65.87	61.38	68.20	-6.82	Peak


Right Band edge_Vertical_Peak_802.11ac-vht40_5795MHz

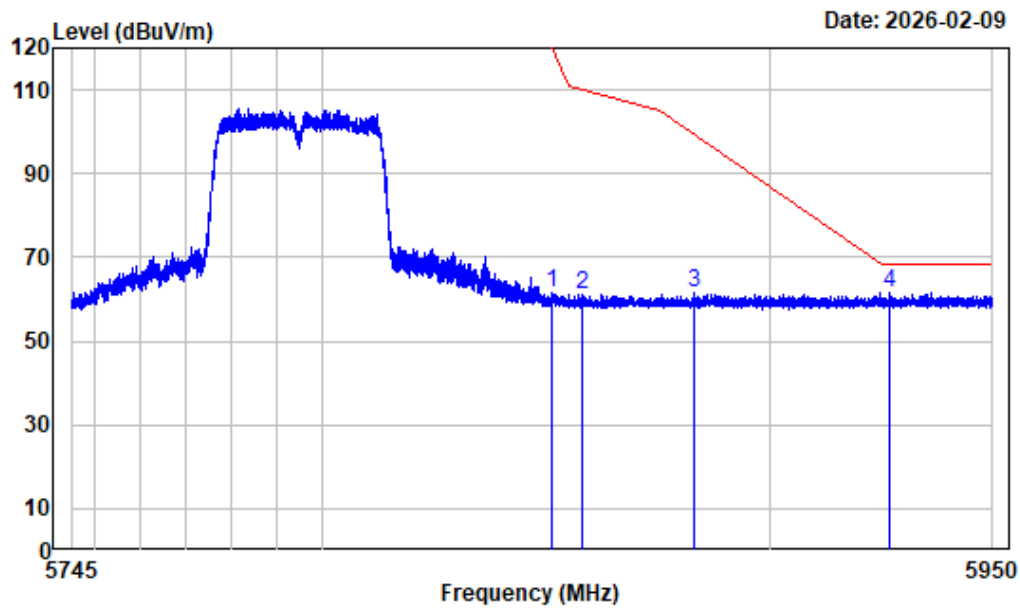

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.241	-4.70	66.26	61.56	119.37	-57.81	Peak
2	5857.775	-4.67	65.89	61.22	110.02	-48.80	Peak
3	5882.914	-4.58	66.36	61.78	99.32	-37.54	Peak
4	5926.579	-4.49	66.13	61.64	68.20	-6.56	Peak


Left Band edge_Horizontal_Peak_802.11ac-vht80_5775MHz

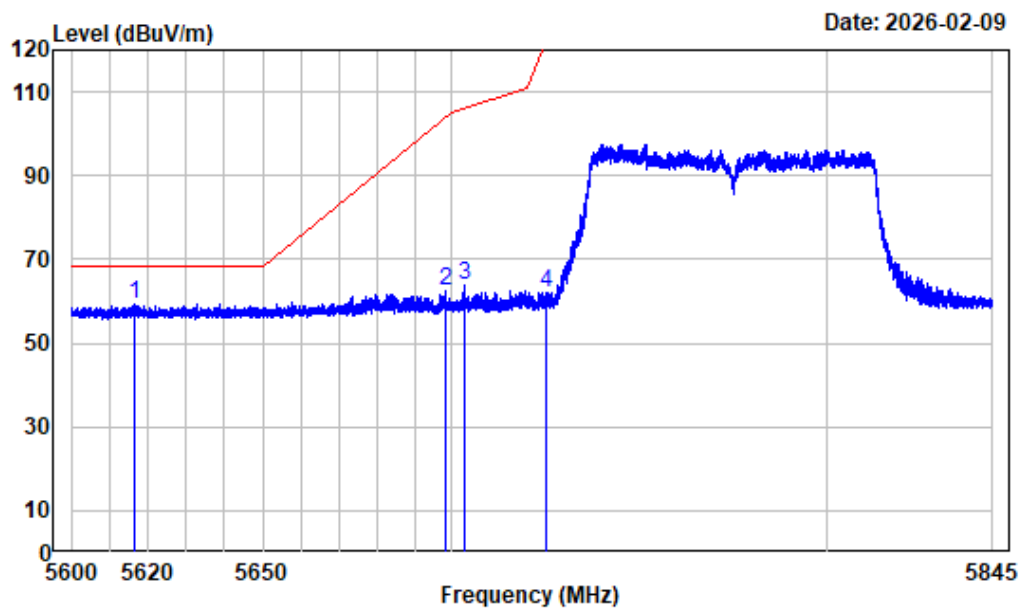

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5616.568	-6.10	65.45	59.35	68.20	-8.85	Peak
2	5698.490	-5.79	68.16	62.37	104.09	-41.72	Peak
3	5703.114	-5.74	69.60	63.86	106.07	-42.21	Peak
4	5724.980	-5.54	67.75	62.21	122.16	-59.95	Peak


Left Band edge_Vertical_Peak_802.11ac-vht80_5775MHz

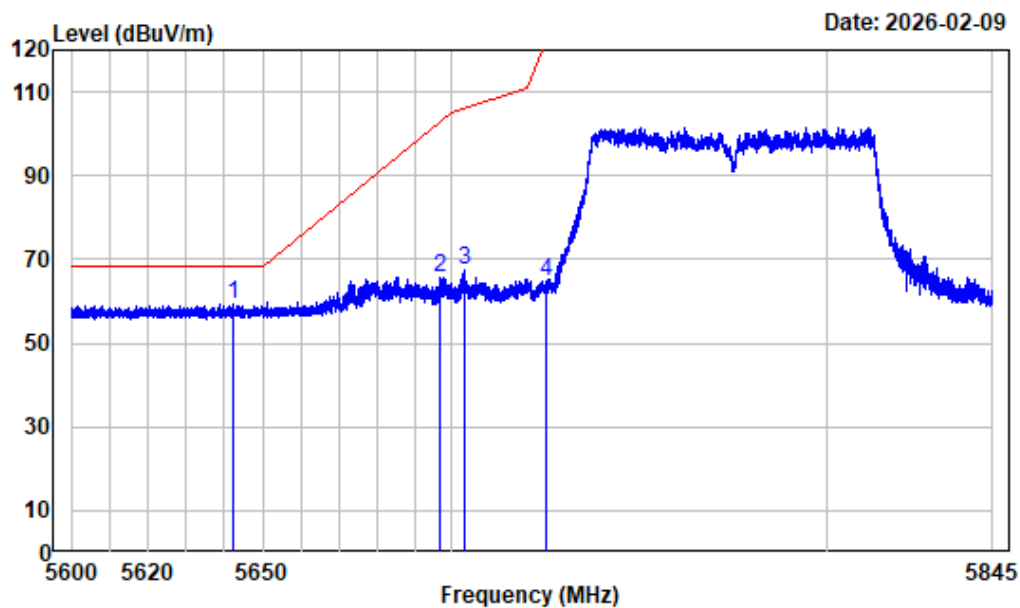

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5642.416	-5.94	65.37	59.43	68.20	-8.77	Peak
2	5696.714	-5.78	71.61	65.83	102.78	-36.95	Peak
3	5703.359	-5.74	73.30	67.56	106.14	-38.58	Peak
4	5724.889	-5.54	70.36	64.82	121.95	-57.13	Peak


Right Band edge_Horizontal_Peak_802.11ac-vht80_5775MHz

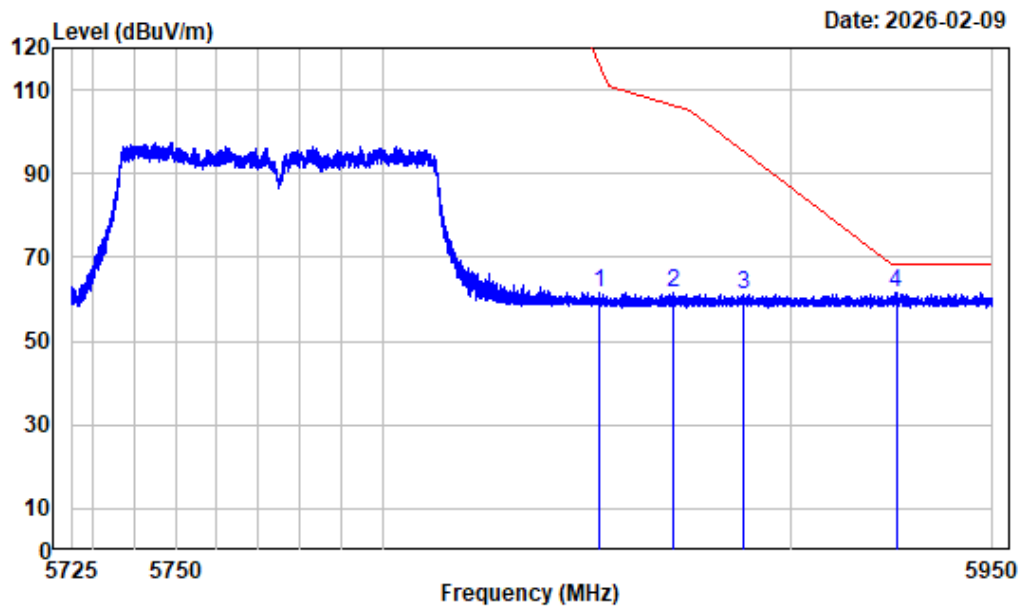

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.772	-4.69	66.12	61.43	115.88	-54.45	Peak
2	5870.856	-4.62	66.12	61.50	106.36	-44.86	Peak
3	5888.125	-4.55	65.88	61.33	95.46	-34.13	Peak
4	5926.065	-4.49	66.10	61.61	68.20	-6.59	Peak


Right Band edge_Vertical_Peak_802.11ac-vht80_5775MHz

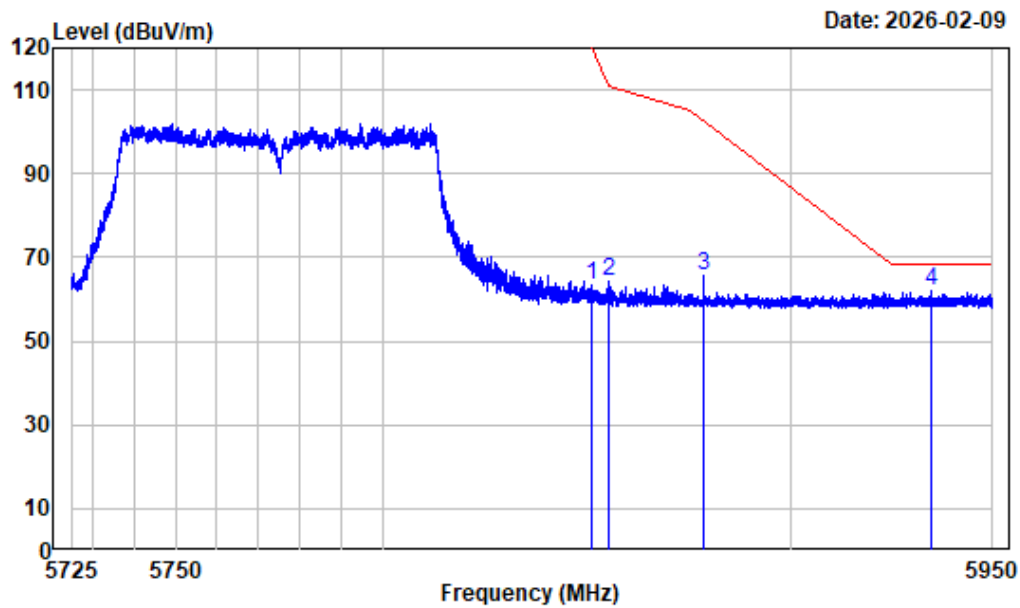

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.888	-4.70	68.08	63.38	120.18	-56.80	Peak
2	5855.106	-4.68	68.97	64.29	110.77	-46.48	Peak
3	5878.675	-4.59	70.28	65.69	102.47	-36.78	Peak
4	5934.700	-4.49	66.59	62.10	68.20	-6.10	Peak


Left Band edge_ Horizontal_Peak_802.11ax20_5745MHz

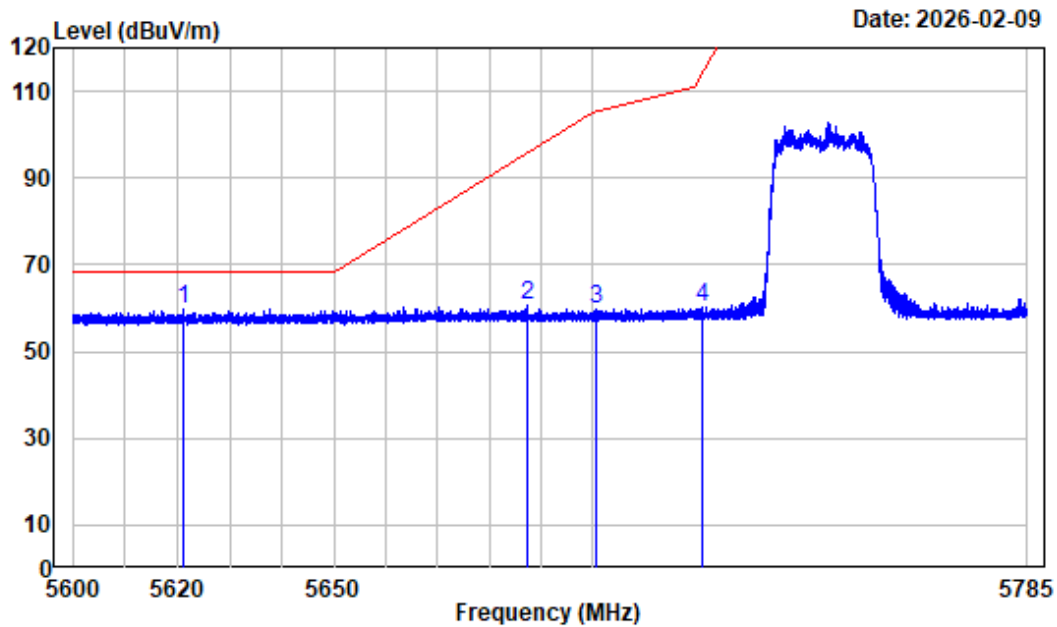

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5621.275	-6.07	65.72	59.65	68.20	-8.55	Peak
2	5687.297	-5.80	66.35	60.55	95.83	-35.28	Peak
3	5700.825	-5.77	65.63	59.86	105.43	-45.57	Peak
4	5721.406	-5.57	65.80	60.23	114.01	-53.78	Peak


Left Band edge_Vertical_Peak_802.11ax20_5745MHz

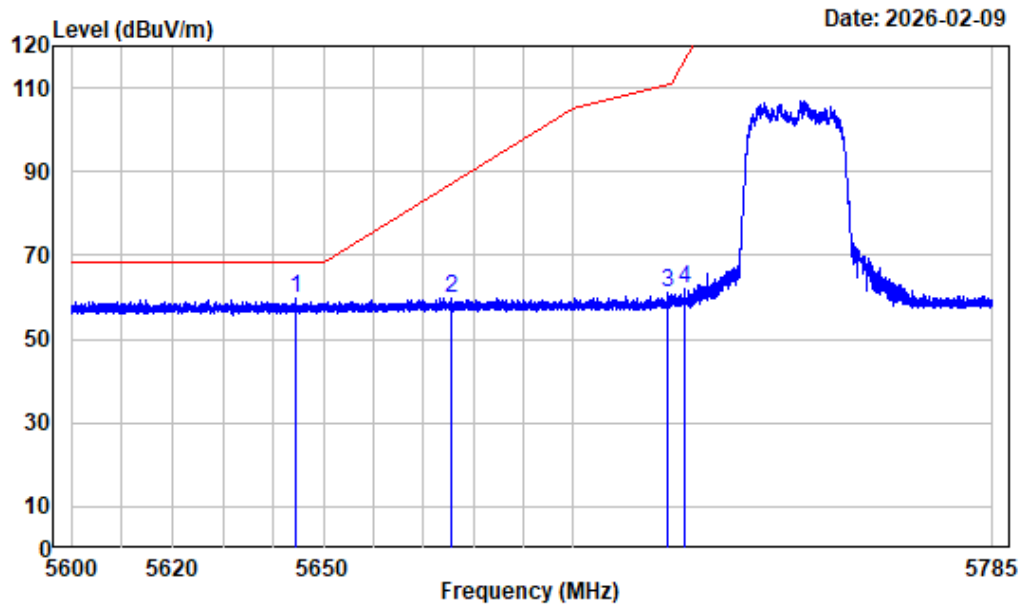

Condition : Vertical
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5644.493	-5.92	65.73	59.81	68.20	-8.39	Peak
2	5675.572	-5.84	65.81	59.97	87.16	-27.19	Peak
3	5719.094	-5.58	66.90	61.32	110.55	-49.23	Peak
4	5722.331	-5.56	67.81	62.25	116.12	-53.87	Peak

Right Band edge_Horizontal_Peak_802.11ax20_5825MHz

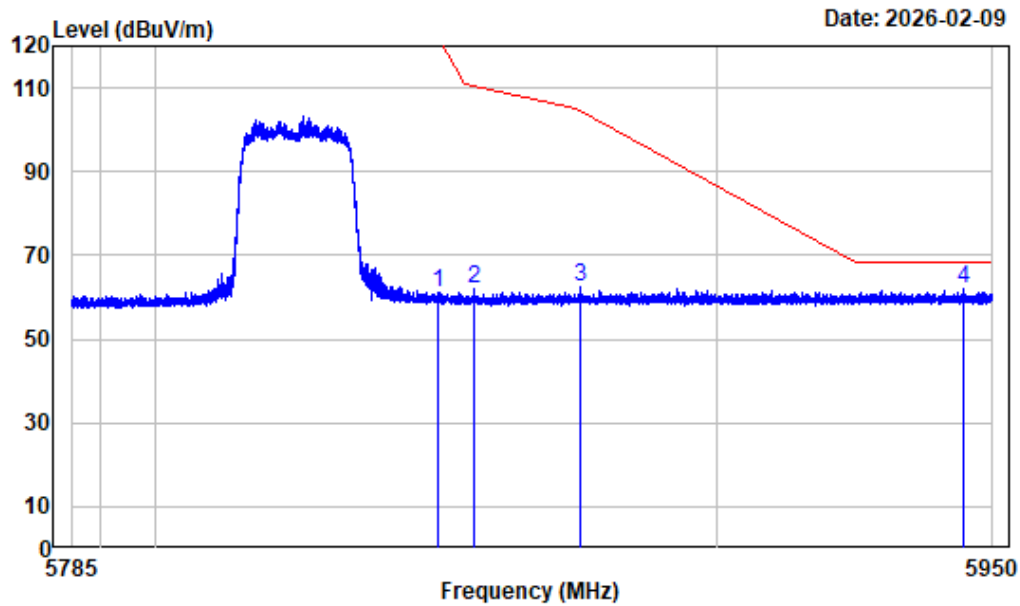

Condition : Horizontal
Project No. : 2501A25853E-RFA1
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5850.196	-4.70	65.88	61.18	121.75	-60.57 Peak
2 5856.734	-4.67	66.55	61.88	110.31	-48.43 Peak
3 5875.482	-4.61	66.88	62.27	104.84	-42.57 Peak
4 5944.823	-4.49	66.40	61.91	68.20	-6.29 Peak