

APPENDIX A

Graph Results (WIFI 2.4GHz & WIFI 5GHz)

WIFI 2.4GHz (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH1(2412MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.729$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH1(2412MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.462 W/kg

Configuration/CH1(2412MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.47 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.444 W/kg

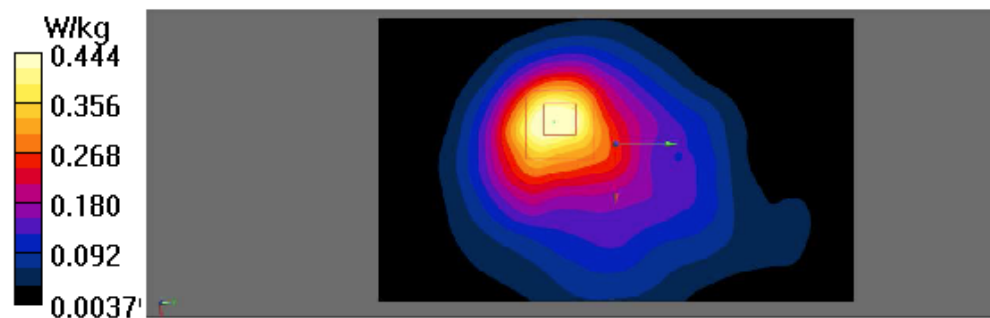

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH7(2442MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH7(2442MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.472 W/kg

Configuration/CH7(2442MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.36 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 0.432 W/kg

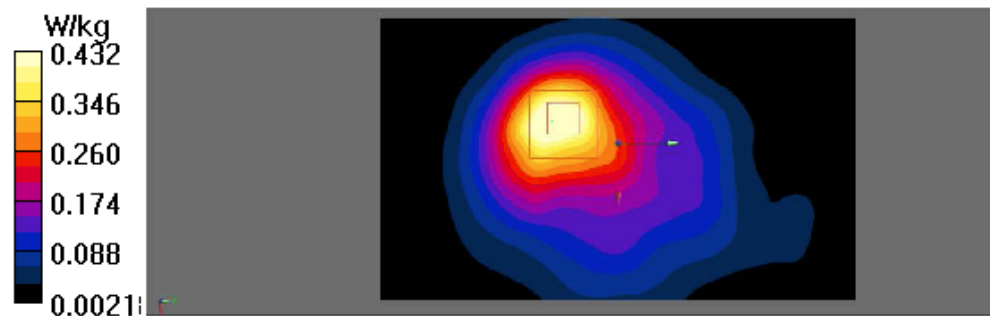

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH13(2472MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.528 W/kg

Configuration/CH13(2472MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.229 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.501 W/kg

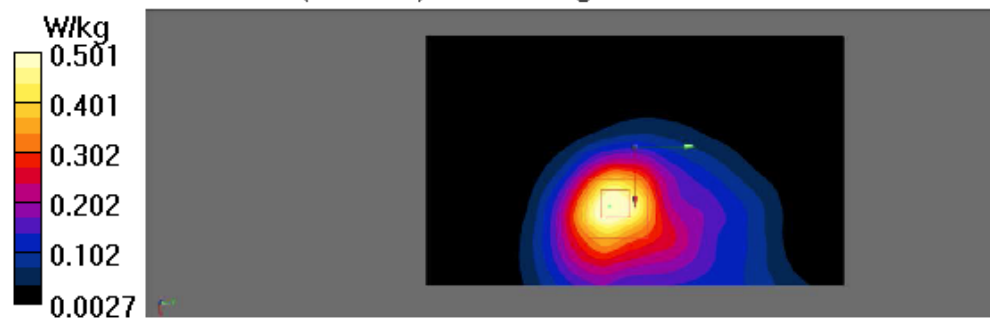

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH13(2472MHz Bottom)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0721 W/kg

Configuration/CH13(2472MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.234 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 0.0727 W/kg

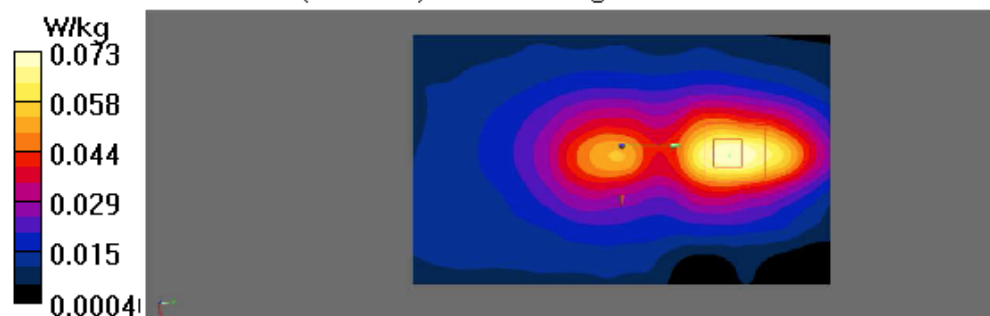

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH13(2472MHz Right)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Right)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.137 W/kg

Configuration/CH13(2472MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.986 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.138 W/kg

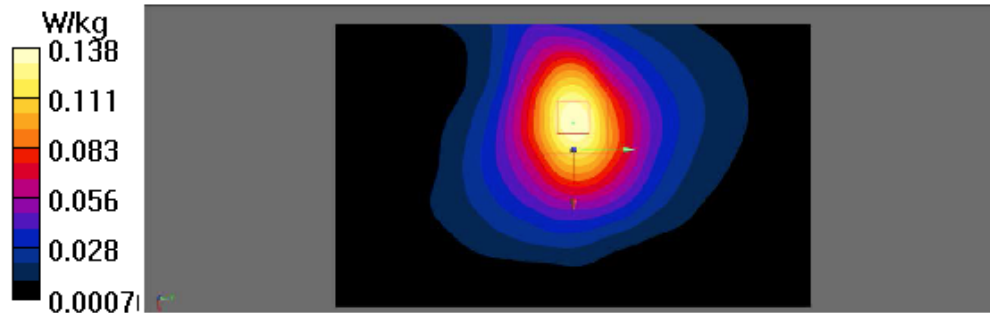

WIFI 2.4GHz (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH1(2412MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.874 \text{ S/m}$; $\epsilon_r = 38.729$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH1(2412MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.557 W/kg

Configuration/CH1(2412MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.116 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 43.5%

Maximum value of SAR (measured) = 0.587 W/kg

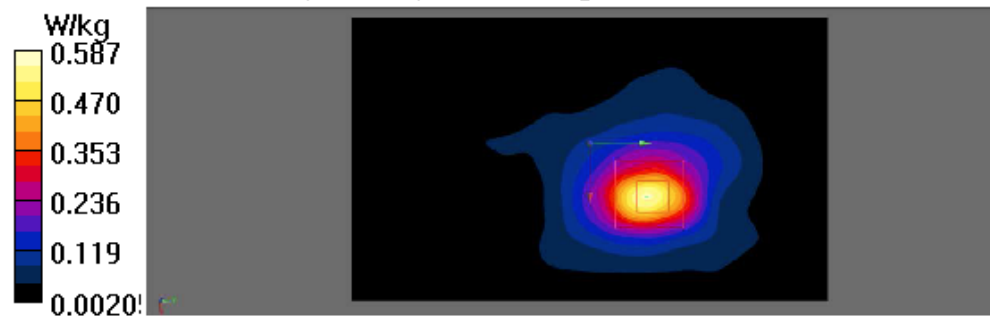

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH7(2442MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH7(2442MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.550 W/kg

Configuration/CH7(2442MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.046 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 43.5%

Maximum value of SAR (measured) = 0.581 W/kg

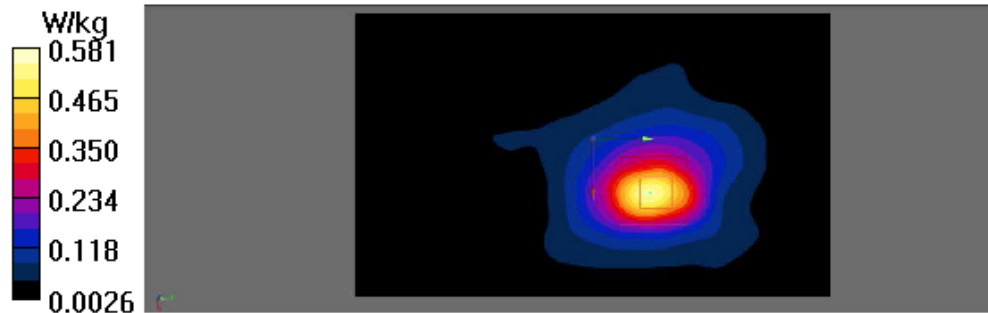

Test Laboratory: Audix SAR Lab

Date: 27/04/2026

CH13(2472MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.584 W/kg

Configuration/CH13(2472MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.422 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 43.5%

Maximum value of SAR (measured) = 0.597 W/kg

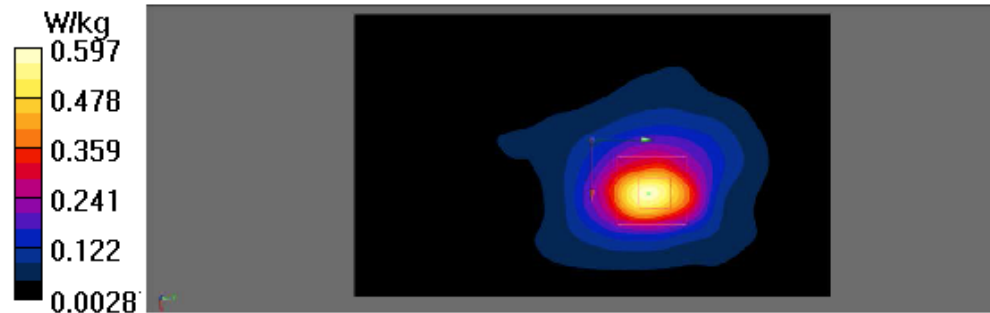

WIFI 5GHz Band 1 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH36(5180MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication
System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication
System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36(5180MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.410 W/kg

Configuration/CH36(5180MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.936 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.296 W/kg

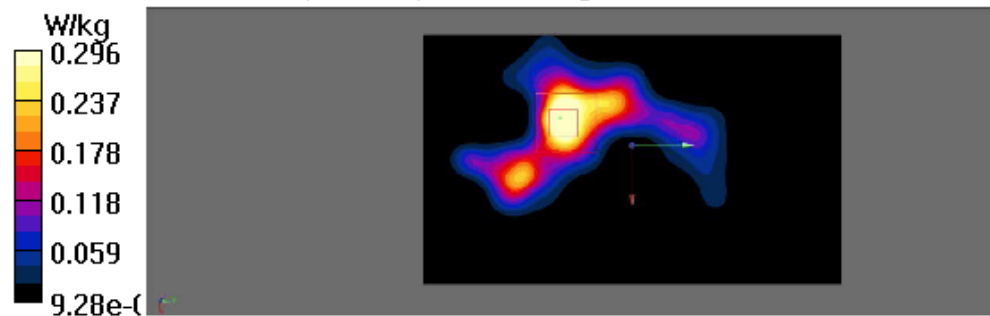

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH40(5200MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.705 \text{ S/m}$; $\epsilon_r = 37.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5200 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40(5200MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.414 W/kg

Configuration/CH40(5200MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.045 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.315 W/kg

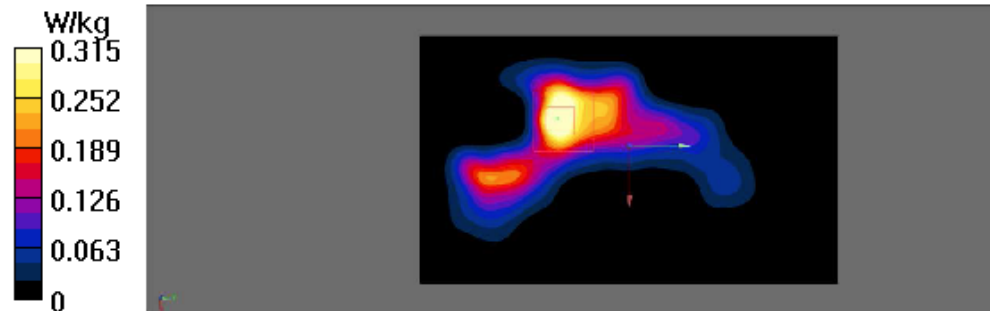

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH48(5240MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.322 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.465 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.311 W/kg

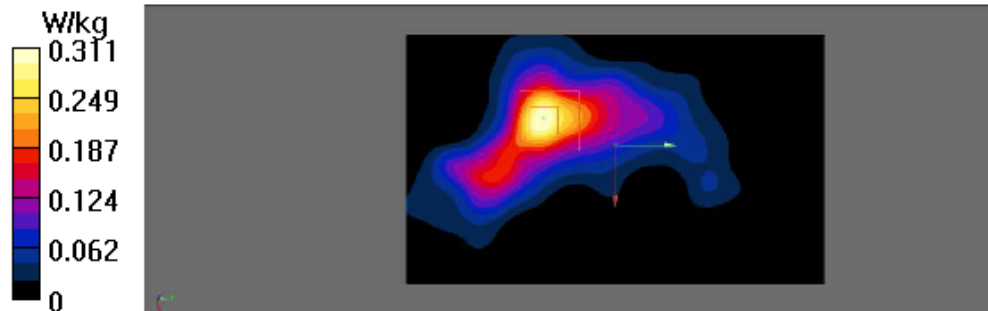

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH48(5240MHz Bottom)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.158 W/kg

Configuration/CH48(5240MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.608 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.185 W/kg

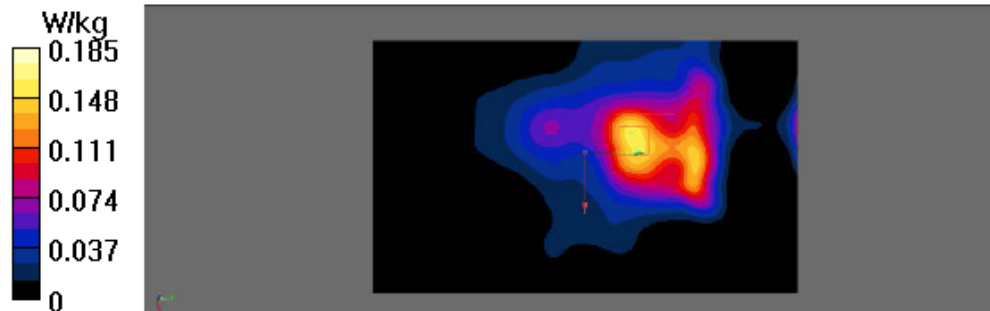

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH48(5240MHz Right)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Right)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.208 W/kg

Configuration/CH48(5240MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.346 V/m ; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.147 W/kg ; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 0.173 W/kg

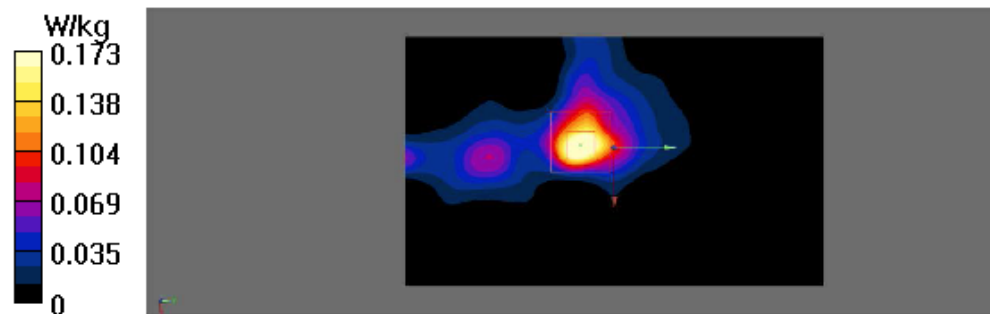

WIFI 5GHz Band 1 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH36(5180MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36(5180MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.545 W/kg

Configuration/CH36(5180MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.7170 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.993 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.305 W/kg

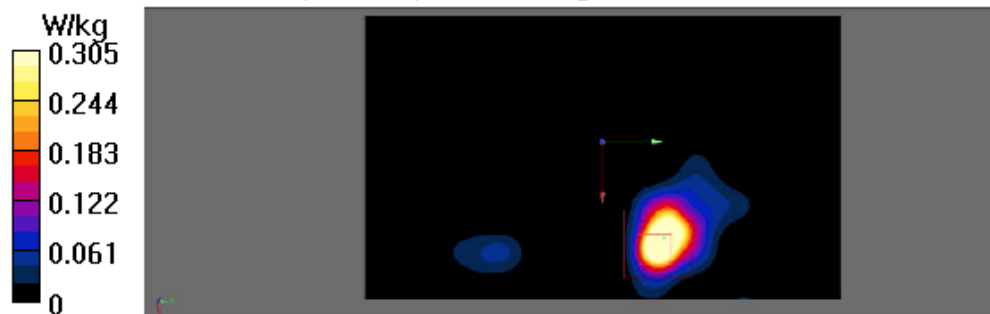

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH40(5200MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.705 \text{ S/m}$; $\epsilon_r = 37.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5200 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40(5200MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.668 W/kg

Configuration/CH40(5200MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.019 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.310 W/kg

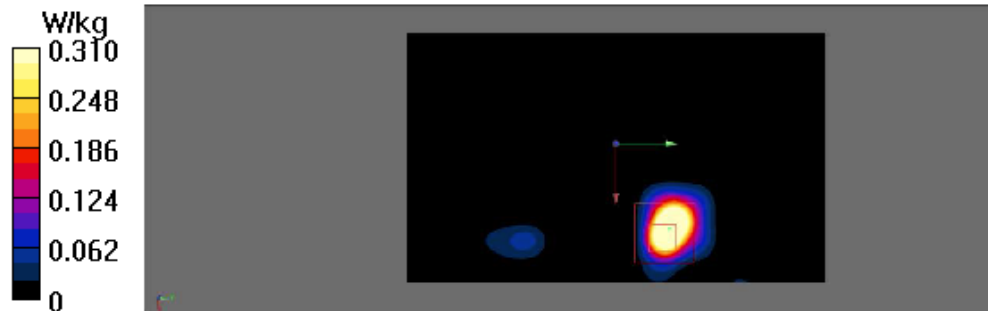

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH48(5240MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.550 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.9180 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.363 W/kg

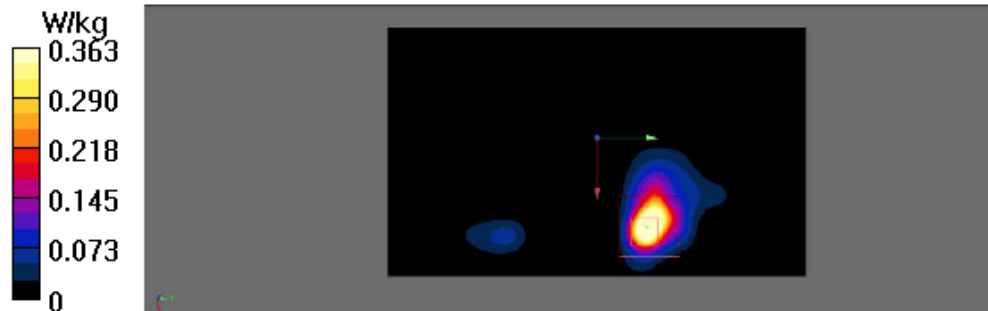

WIFI 5GHz Band 2 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH52(5260MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.784 \text{ S/m}$; $\epsilon_r = 36.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5260 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH52(5260MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.332 W/kg

Configuration/CH52(5260MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.192 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.321 W/kg

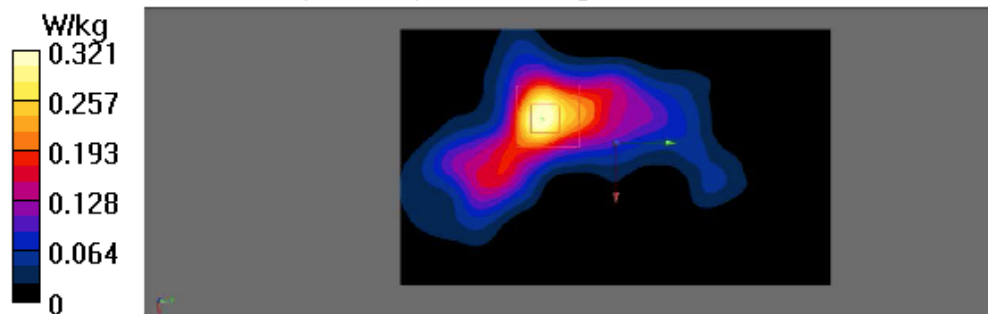

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH60(5300MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.828 \text{ S/m}$; $\epsilon_r = 36.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5300 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH60(5300MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.343 W/kg

Configuration/CH60(5300MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.615 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.900 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.328 W/kg

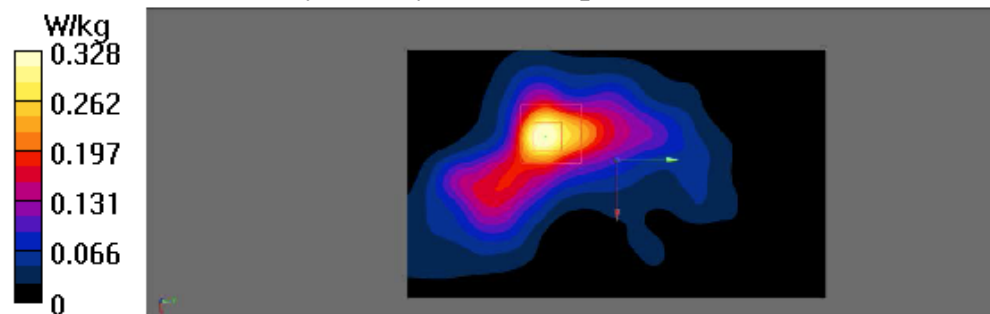

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH64(5320MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.350 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.317 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 0.338 W/kg

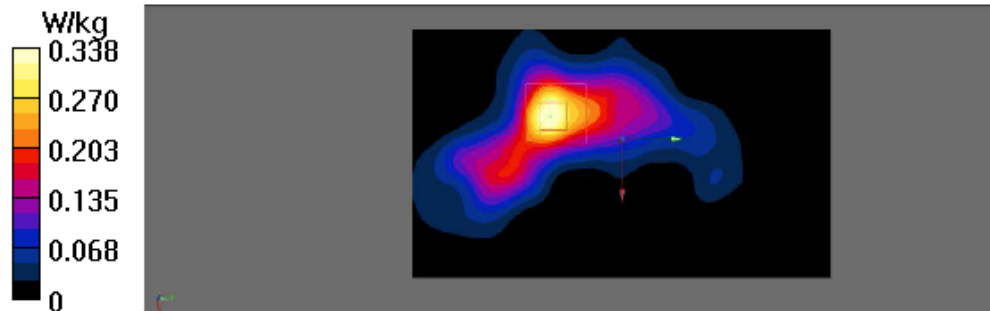

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH64(5320MHz Bottom)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.173 W/kg

Configuration/CH64(5320MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.684 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.201 W/kg

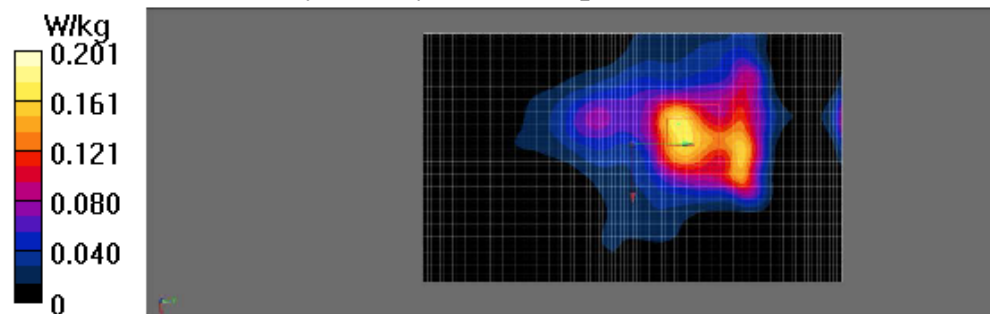

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH64(5320MHz Right)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.853$ S/m; $\epsilon_r = 36.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Right)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.180 W/kg

Configuration/CH64(5320MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.703 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.183 W/kg

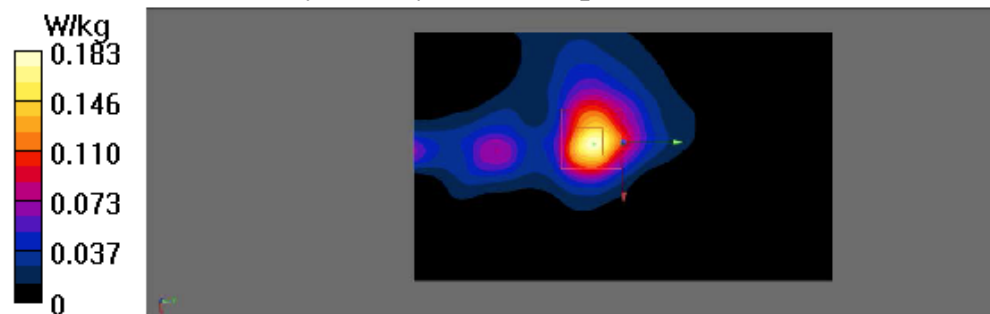

WIFI 5GHz Band 2 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH52(5260MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.784 \text{ S/m}$; $\epsilon_r = 36.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5260 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH52(5260MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.847 W/kg

Configuration/CH52(5260MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.436 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.327 W/kg

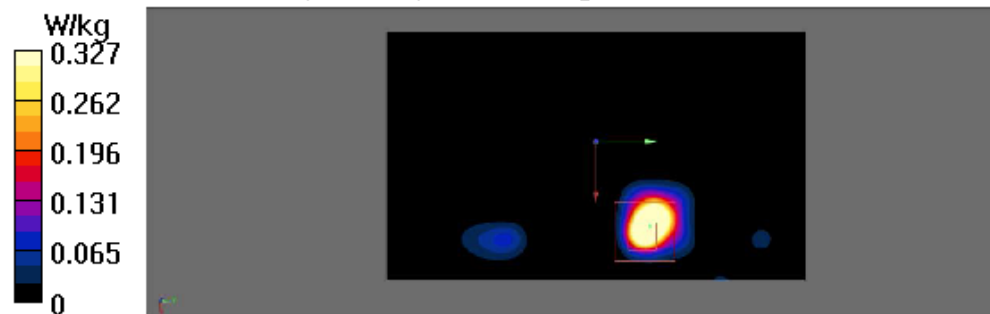

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH60(5300MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.828 \text{ S/m}$; $\epsilon_r = 36.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5300 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH60(5300MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.465 W/kg

Configuration/CH60(5300MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.986 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.414 W/kg

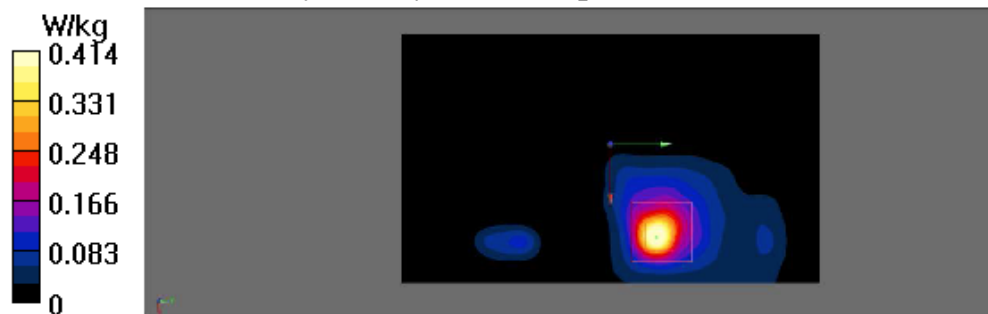

Test Laboratory: Audix SAR Lab

Date: 28/04/2026

CH64(5320MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.528 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.454 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.422 W/kg

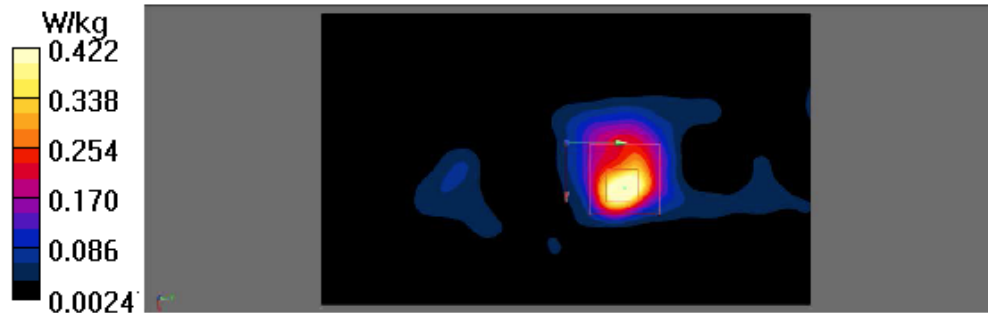

WIFI 5GHz Band 3 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH100(5500MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.341 W/kg

Configuration/CH100(5500MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.424 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.996 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.353 W/kg

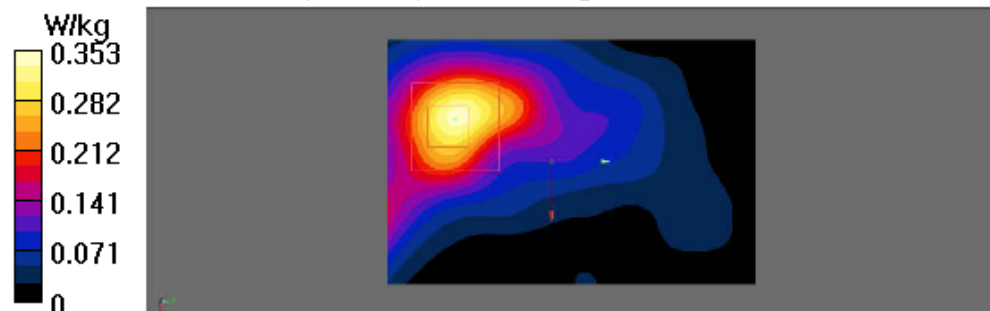

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH100(5500MHz Bottom)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.210 W/kg

Configuration/CH100(5500MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.645 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.221 W/kg

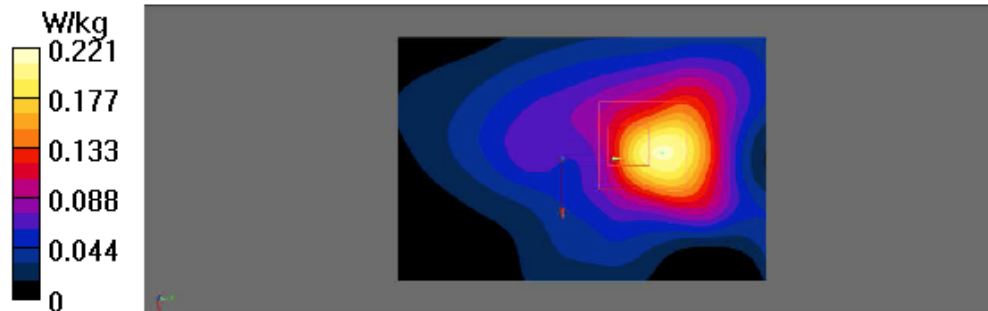

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH100(5500MHz Right)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Right)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.201 W/kg

Configuration/CH100(5500MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.806 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.063 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.204 W/kg

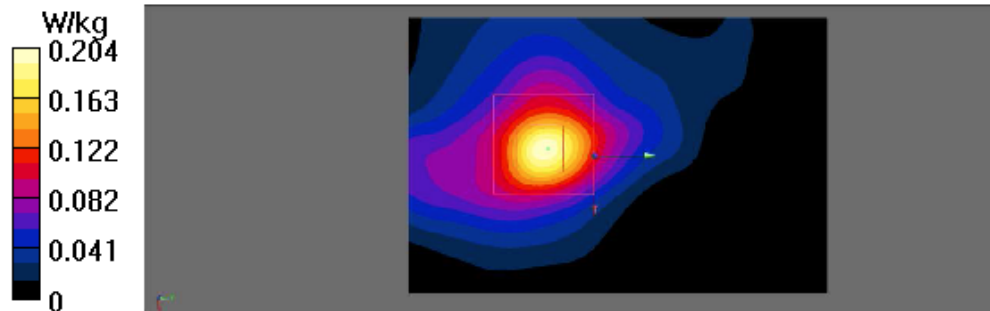

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH120(5600MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 36.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH120(5600MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.337 W/kg

Configuration/CH120(5600MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.356 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.343 W/kg

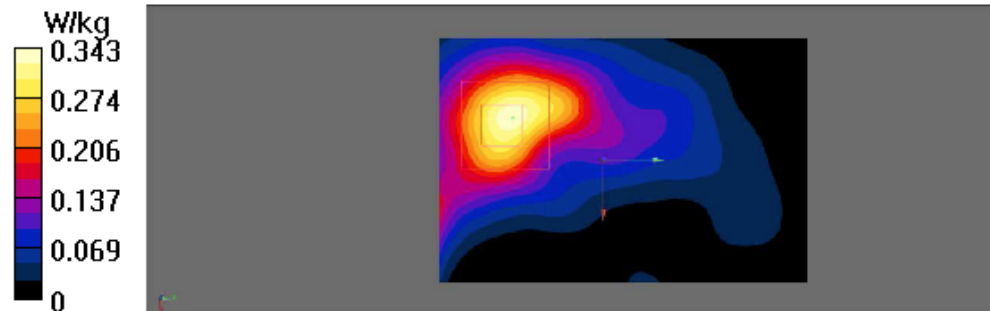

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.357 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.432 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 0.378 W/kg

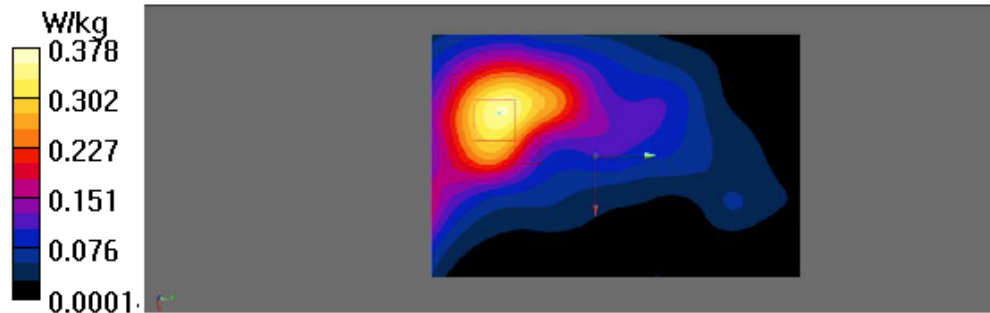

WIFI 5GHz Band 3 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH100(5500MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.496 W/kg

Configuration/CH100(5500MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.657 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 0.447 W/kg

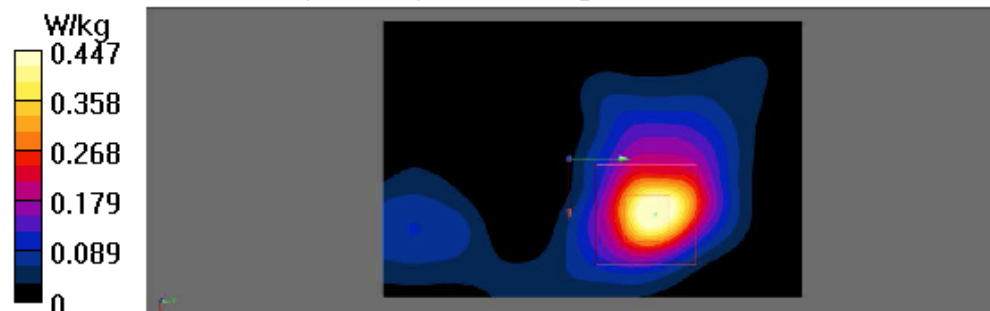

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH120(5600MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 36.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH120(5600MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.469 W/kg

Configuration/CH120(5600MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.869 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.438 W/kg

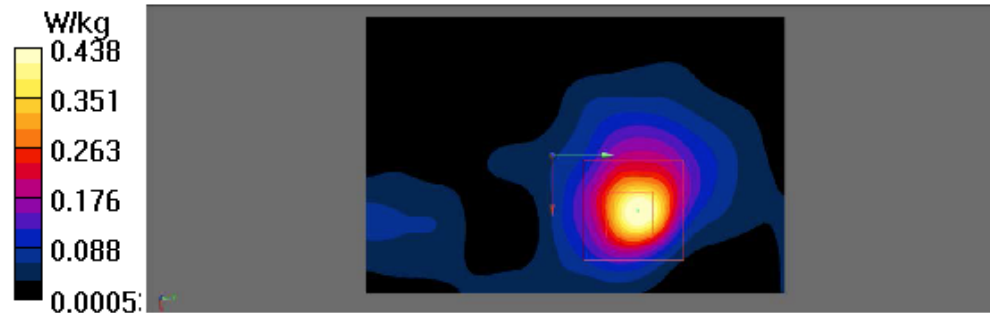

Test Laboratory: Audix SAR Lab

Date: 29/04/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.521 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.827 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.478 W/kg

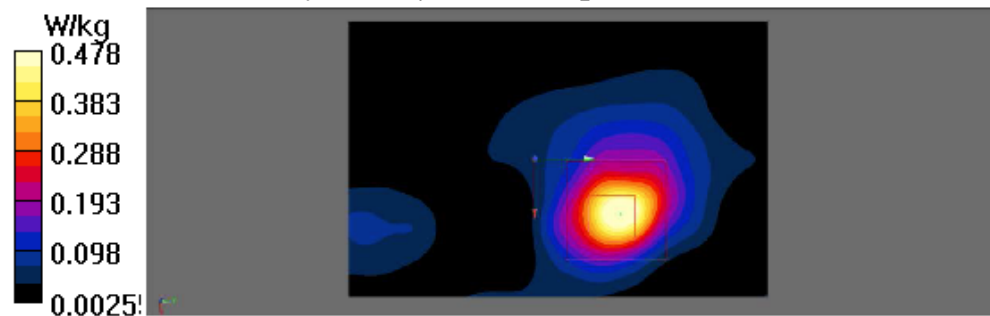

WIFI 5GHz Band 4 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH149(5745MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.379 W/kg

Configuration/CH149(5745MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.629 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 0.373 W/kg

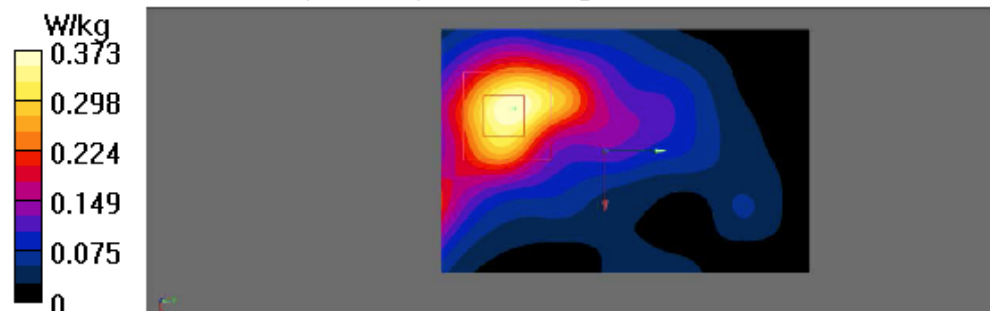

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH149(5745MHz Bottom)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.248 W/kg

Configuration/CH149(5745MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.786 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.630 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 0.214 W/kg

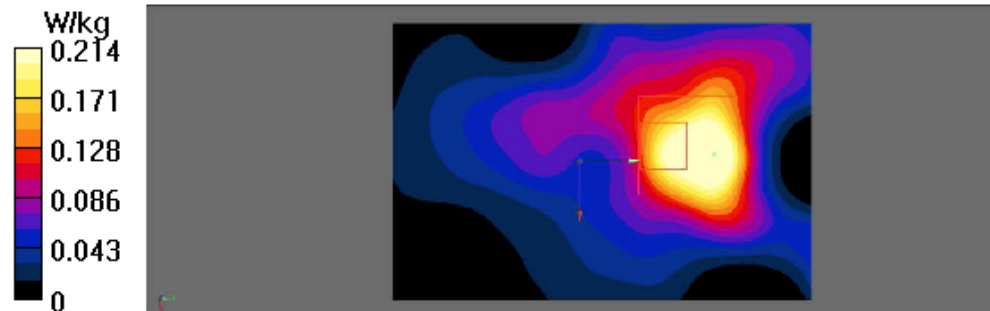

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH149(5745MHz Right)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Right)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.217 W/kg

Configuration/CH149(5745MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.072 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.237 W/kg

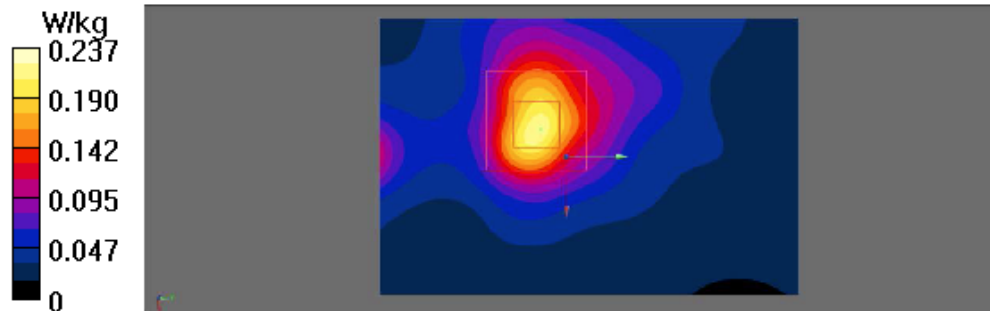

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH157(5785MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5785 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 35.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5785 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH157(5785MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.366 W/kg

Configuration/CH157(5785MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.453 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.376 W/kg

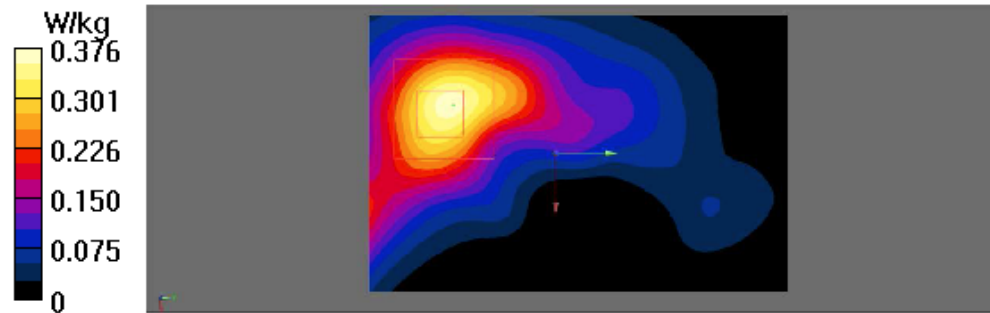

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH165(5825MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.376 W/kg

Configuration/CH165(5825MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.559 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.380 W/kg

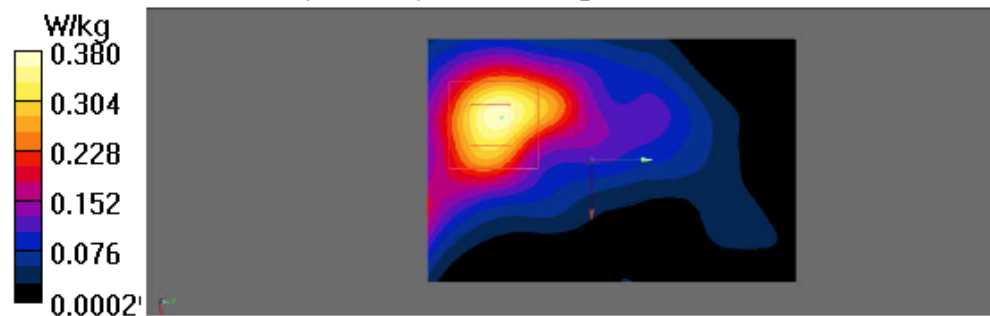

WIFI 5GHz Band 4 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH149(5745MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.637 W/kg

Configuration/CH149(5745MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.520 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.432 W/kg

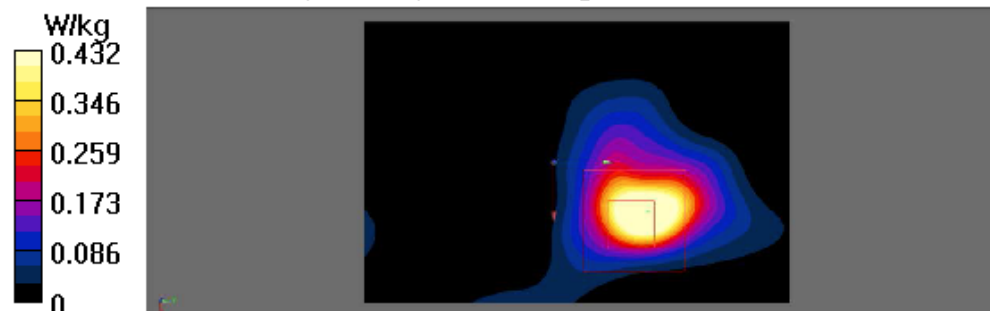

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH157(5785MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5785 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 35.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5785 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH157(5785MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.516 W/kg

Configuration/CH157(5785MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.734 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.513 W/kg

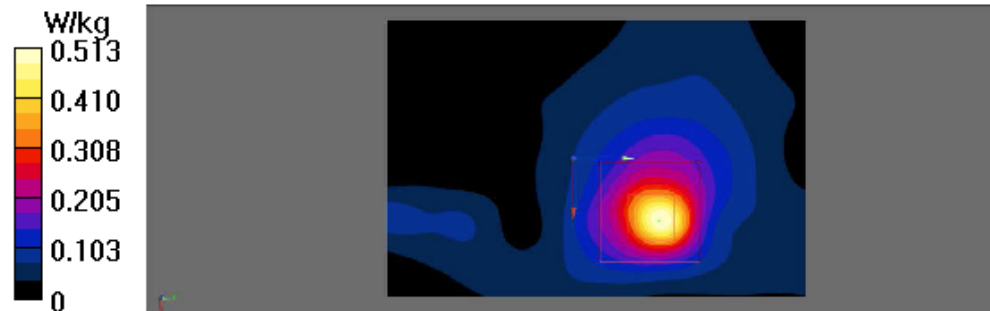

Test Laboratory: Audix SAR Lab

Date: 30/04/2026

CH165(5825MHz Back)

DUT: Notebook Computer M/N: N25B5

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.530 W/kg

Configuration/CH165(5825MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.663 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.484 W/kg

