




For M/B with Intel CPU-SISO Main



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

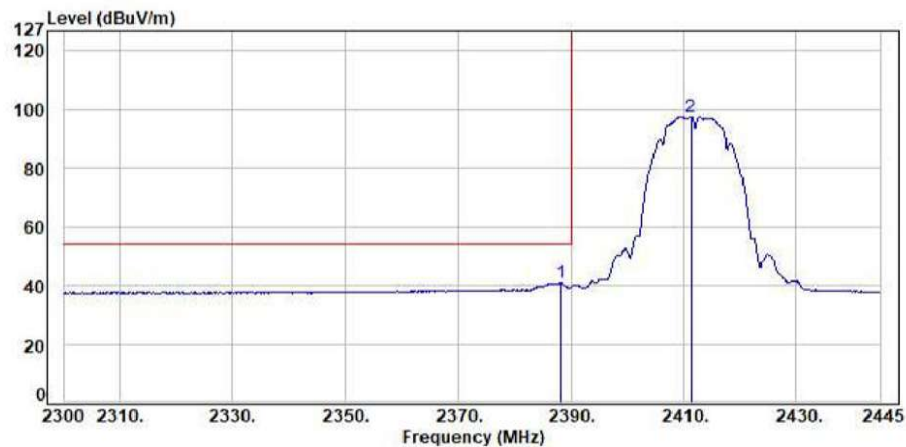


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2388.16	-4.20	45.21	41.01	54.00	-12.99	Average	100	25	P
2	2411.22	-4.16	101.92	97.76	200.00	-102.24	Average	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

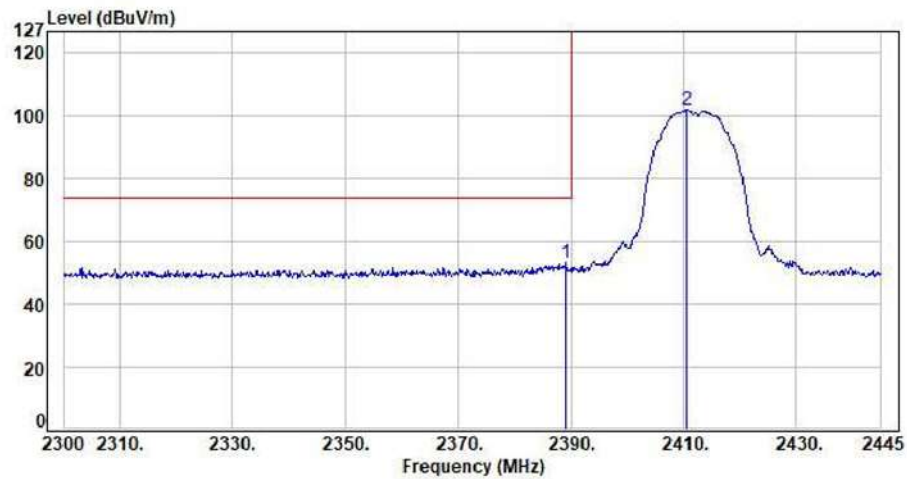


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.03	-4.20	57.13	52.93	74.00	-21.07	Peak	100	25	P
2	2410.64	-4.16	105.98	101.82	200.00	-98.18	Peak	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

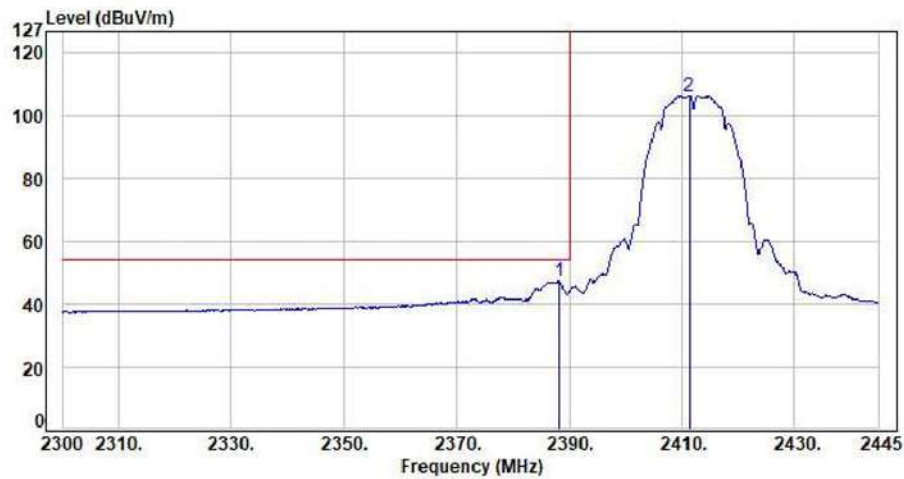


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2388.16	-4.20	51.50	47.30	54.00	-6.70	Average	100	322	P
2	2411.22	-4.16	110.53	106.37	200.00	-93.63	Average	100	322	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

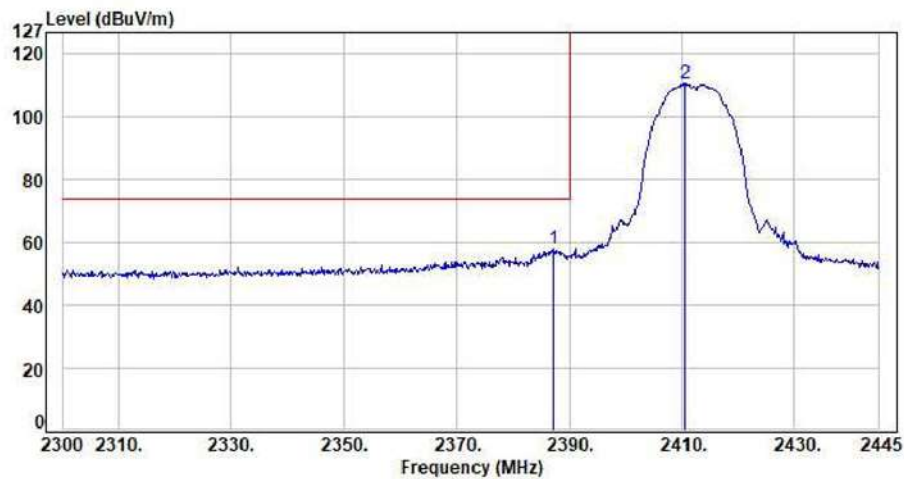


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.15	-4.20	62.07	57.87	74.00	-16.13	Peak	100	322	P
2	2410.49	-4.17	114.58	110.41	200.00	-89.59	Peak	100	322	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

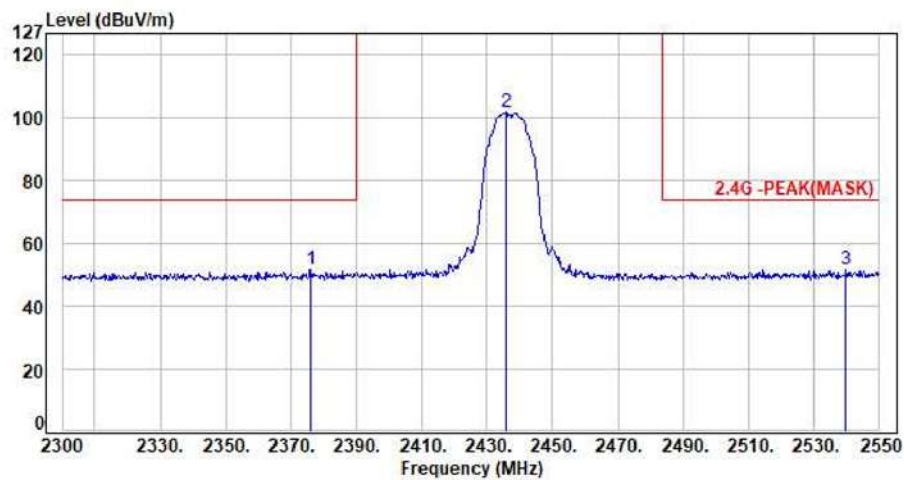


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2376.00	-4.22	55.98	51.76	74.00	-22.24	Peak	100	22	P
2	2435.75	-4.10	105.75	101.65	200.00	-98.35	Peak	100	22	P
3	2539.75	-3.72	55.38	51.66	74.00	-22.34	Peak	100	22	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

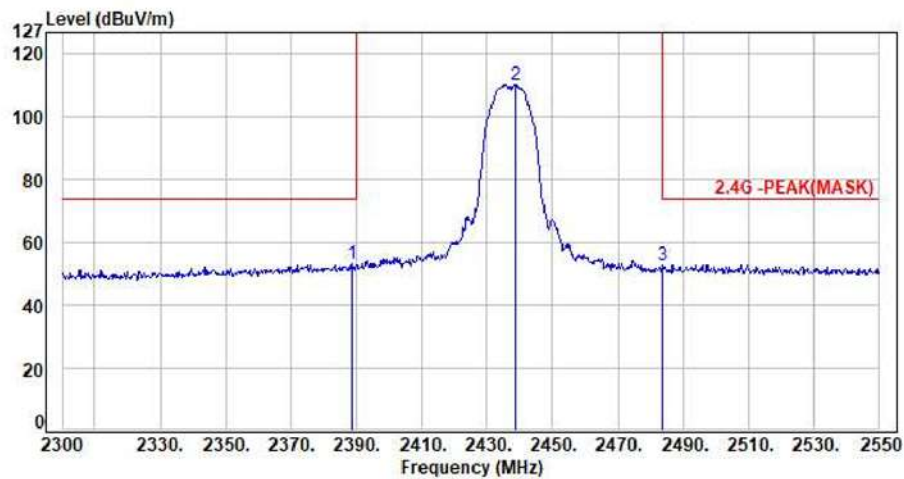


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2388.75	-4.20	57.22	53.02	74.00	-20.98	Peak	100	326	P
2	2438.50	-4.12	114.44	110.32	200.00	-89.68	Peak	100	326	P
3	2483.75	-3.88	56.70	52.82	74.00	-21.18	Peak	100	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

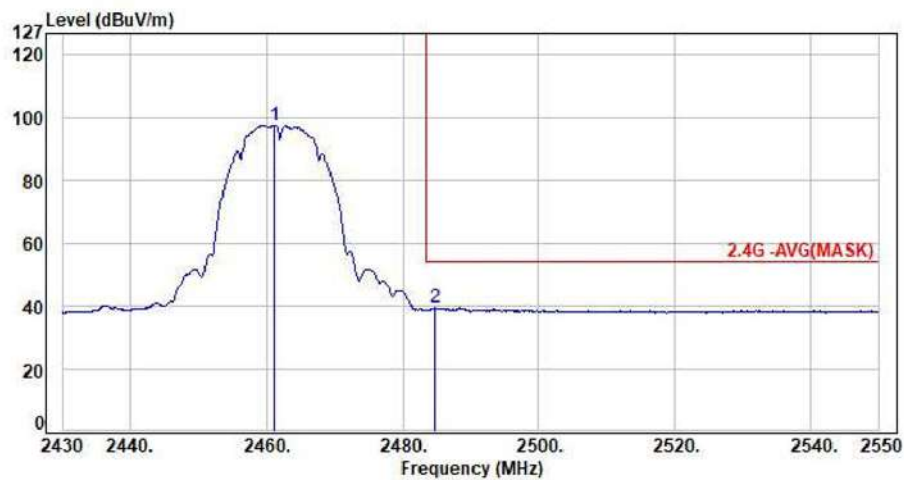


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.20	-3.90	101.63	97.73	200.00	-102.27	Average	100	25	P
2	2484.72	-3.88	43.31	39.43	54.00	-14.57	Average	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

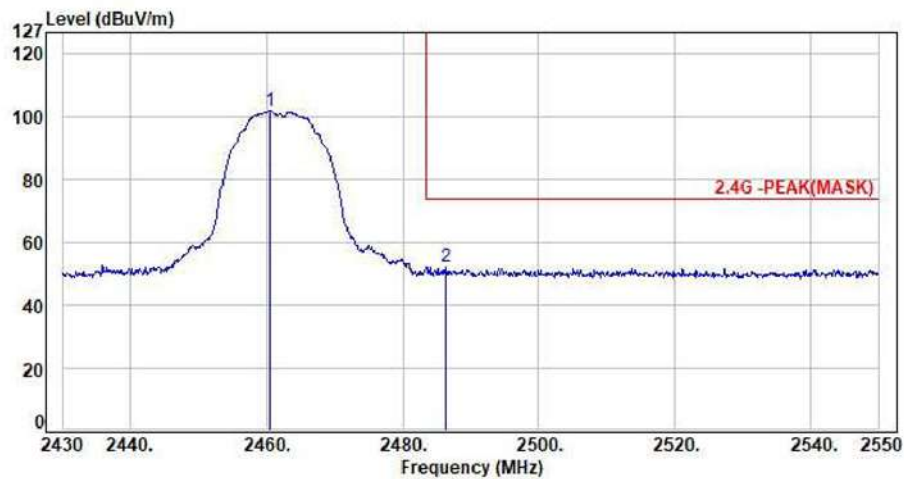


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2460.48	-3.91	105.66	101.75	200.00	-98.25	Peak	100	25	P
2	2486.28	-3.88	56.22	52.34	74.00	-21.66	Peak	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

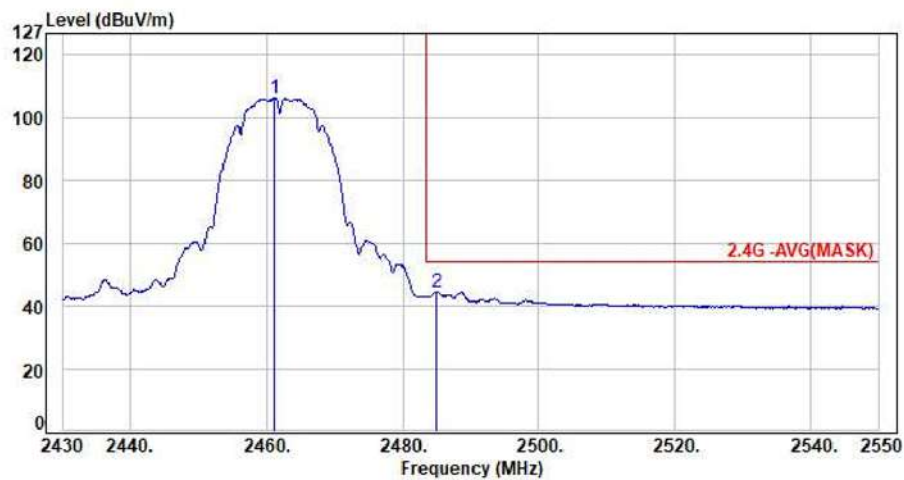


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.20	-3.90	110.03	106.13	200.00	-93.87	Average	100	326	P
2	2484.96	-3.88	48.47	44.59	54.00	-9.41	Average	100	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

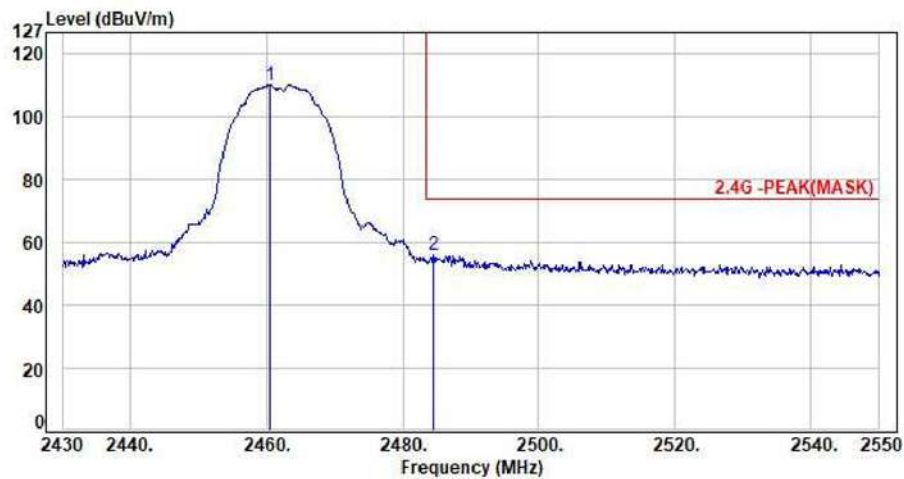


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2460.48	-3.91	114.00	110.09	200.00	-89.91	Peak	100	326	P
2	2484.60	-3.88	59.86	55.98	74.00	-18.02	Peak	100	326	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

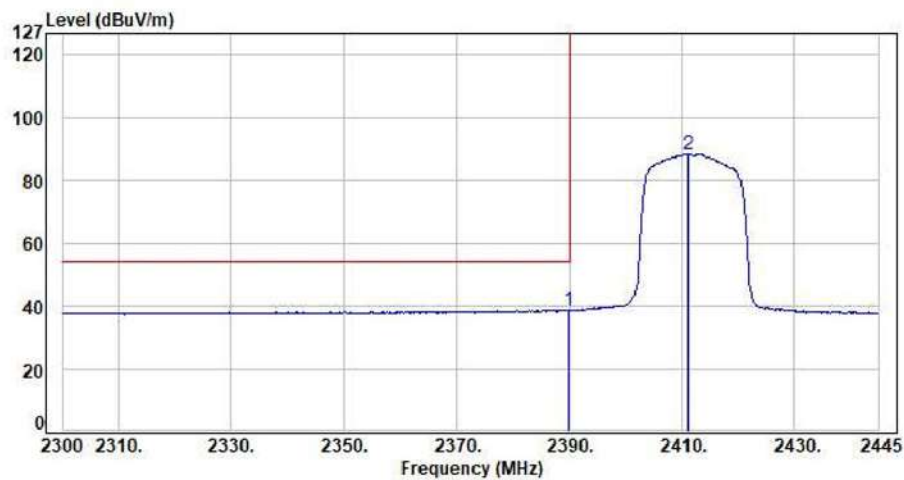


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.90	-4.20	42.96	38.76	54.00	-15.24	Average	100	25	P
2	2411.07	-4.16	92.76	88.60	200.00	-111.40	Average	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

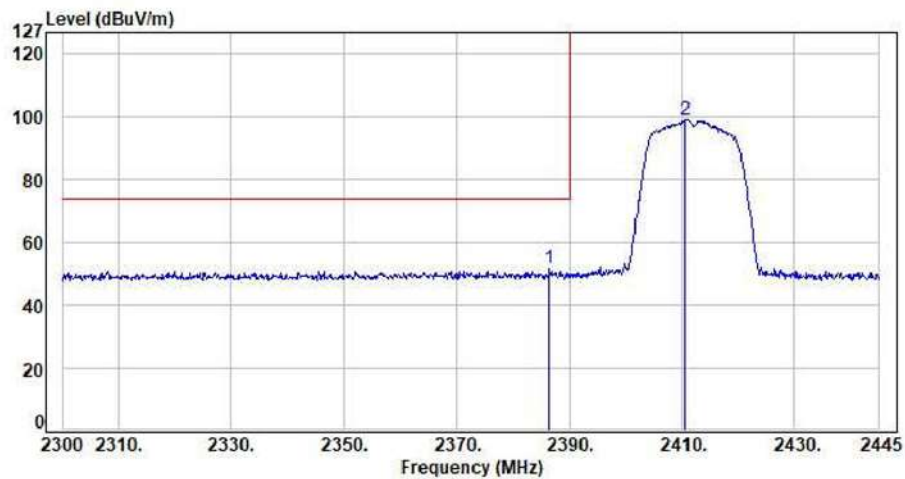


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.42	-4.20	55.78	51.58	74.00	-22.42	Peak	100	25	P
2	2410.64	-4.16	103.10	98.94	200.00	-101.06	Peak	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

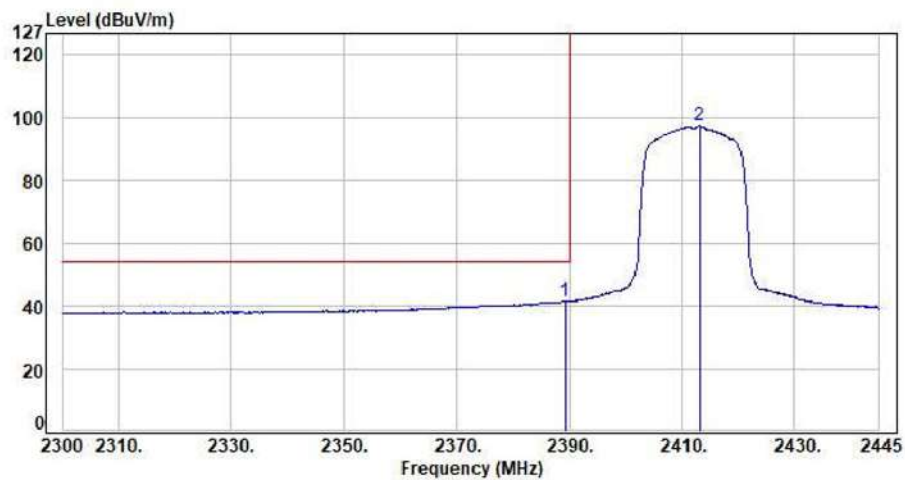


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.18	-4.20	45.74	41.54	54.00	-12.46	Average	100	324	P
2	2413.10	-4.13	101.46	97.33	200.00	-102.67	Average	100	324	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

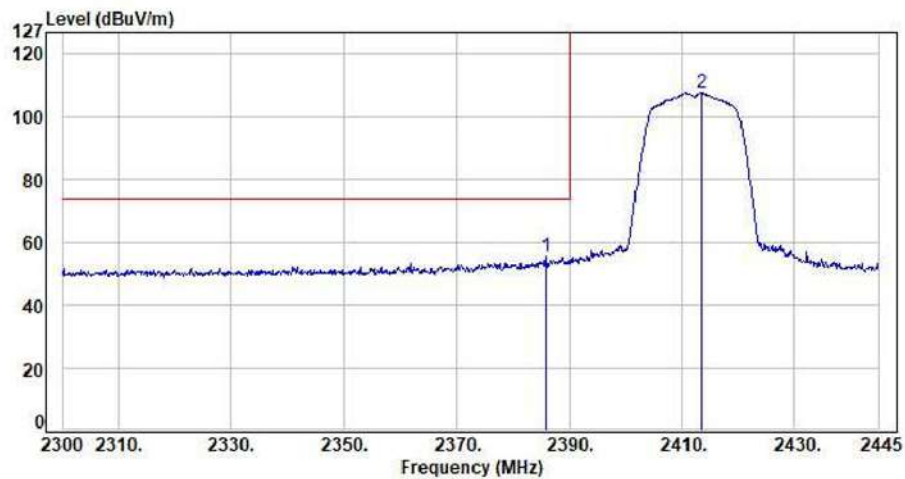


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2385.70	-4.20	59.54	55.34	74.00	-18.66	Peak	100	324	P
2	2413.54	-4.12	111.71	107.59	200.00	-92.41	Peak	100	324	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

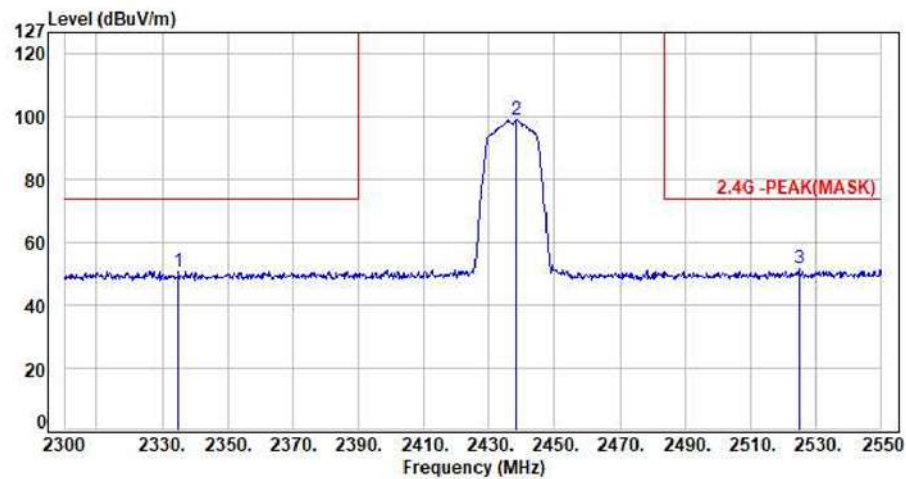


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2335.00	-4.51	55.43	50.92	74.00	-23.08	Peak	100	24	P
2	2438.25	-4.12	103.16	99.04	200.00	-100.96	Peak	100	24	P
3	2524.75	-3.73	55.20	51.47	74.00	-22.53	Peak	100	24	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

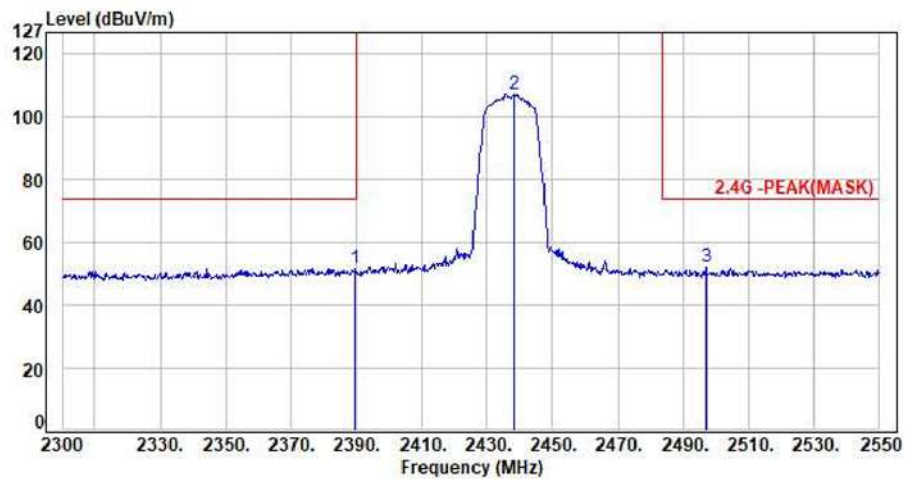


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.75	-4.20	56.01	51.81	74.00	-22.19	Peak	100	322	P
2	2438.25	-4.12	111.31	107.19	200.00	-92.81	Peak	100	322	P
3	2497.00	-3.86	56.15	52.29	74.00	-21.71	Peak	100	322	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

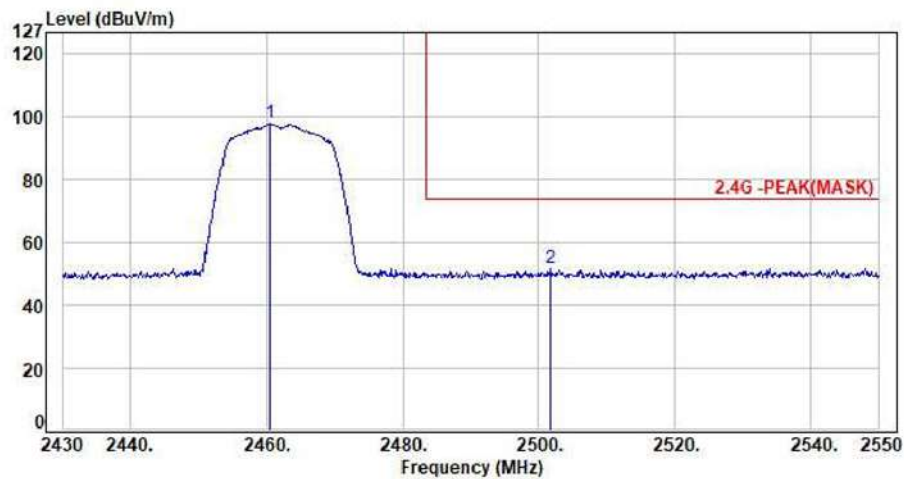


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2460.48	-3.91	101.70	97.79	200.00	-102.21	Peak	100	25	P
2	2501.76	-3.84	55.48	51.64	74.00	-22.36	Peak	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

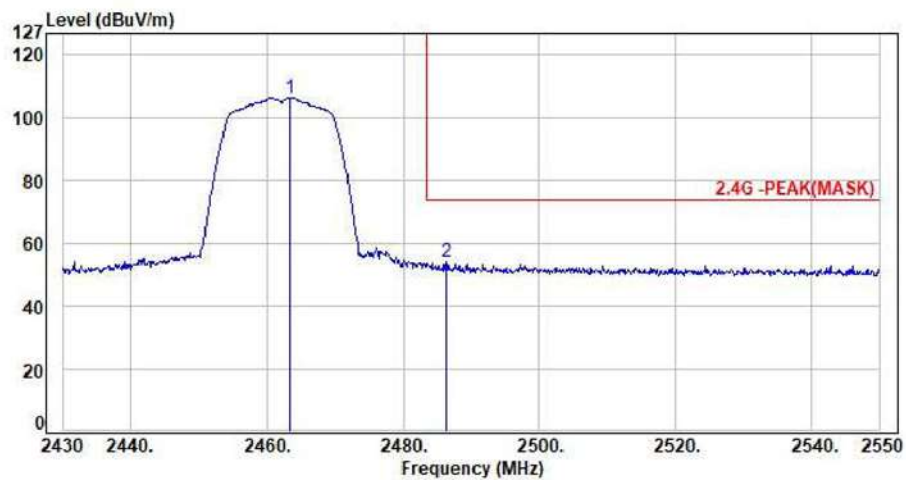

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2463.36	-3.87	110.17	106.30	200.00	-93.70	Peak	100	323	P
2	2486.40	-3.88	57.85	53.97	74.00	-20.03	Peak	100	323	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with Intel CPU- SISO Aux



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

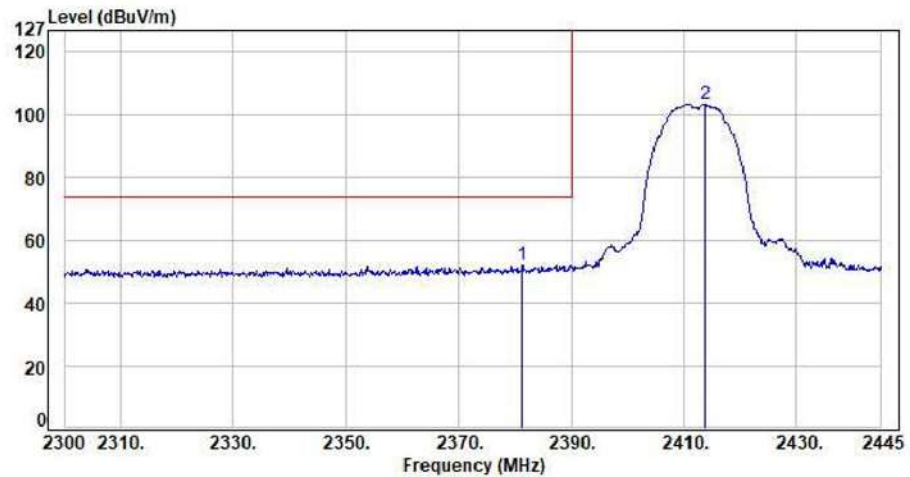


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2381.35	-4.21	56.39	52.18	74.00	-21.82	Peak	100	37	P
2	2413.68	-4.12	107.63	103.51	200.00	-96.49	Peak	100	37	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

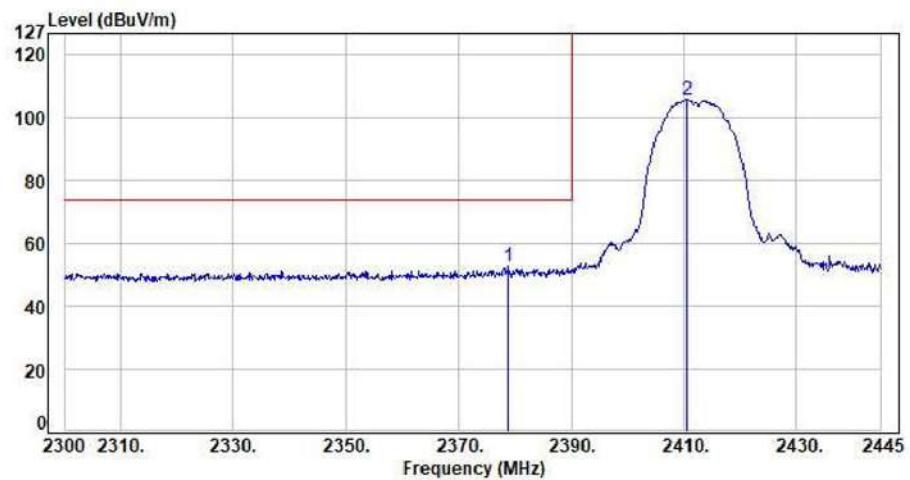

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2378.88	-4.21	56.80	52.59	74.00	-21.41	Peak	100	192	P
2	2410.64	-4.16	109.83	105.67	200.00	-94.33	Peak	100	192	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

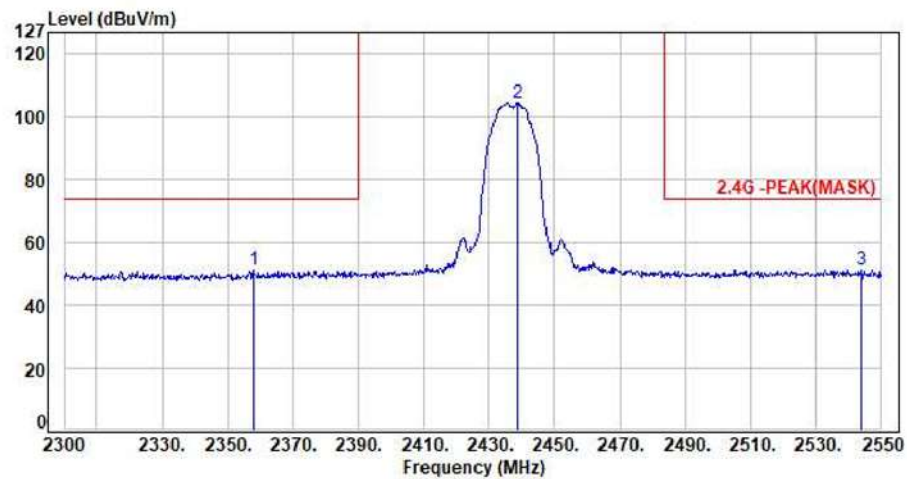

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2358.00	-4.35	55.61	51.26	74.00	-22.74	Peak	100	32	P
2	2438.50	-4.12	108.46	104.34	200.00	-95.66	Peak	100	32	P
3	2544.00	-3.72	55.10	51.38	74.00	-22.62	Peak	100	32	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

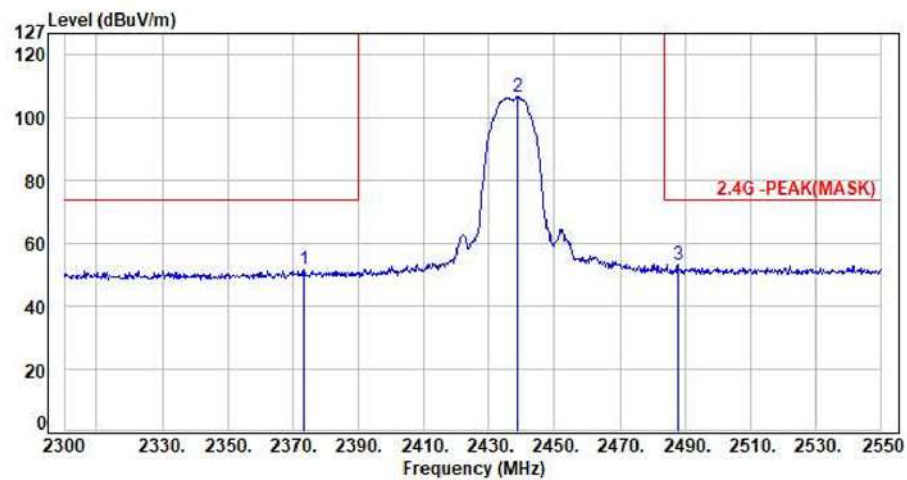


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2373.50	-4.21	55.65	51.44	74.00	-22.56	Peak	100	194	P
2	2438.50	-4.12	110.86	106.74	200.00	-93.26	Peak	100	194	P
3	2487.75	-3.88	57.02	53.14	74.00	-20.86	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

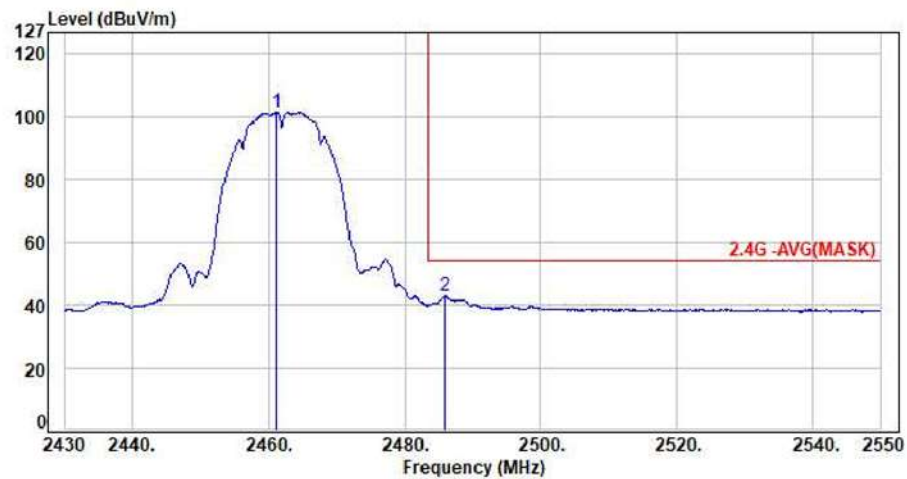

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.20	-3.90	105.28	101.38	200.00	-98.62	Average	100	33	P
2	2485.80	-3.88	46.76	42.88	54.00	-11.12	Average	100	33	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

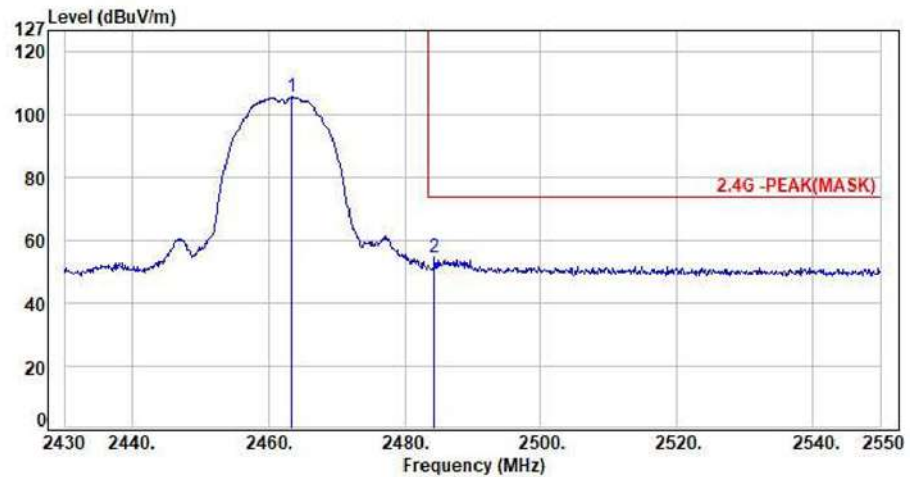

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2463.48	-3.87	109.45	105.58	200.00	-94.42	Peak	100	33	P
2	2484.36	-3.88	58.45	54.57	74.00	-19.43	Peak	100	33	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

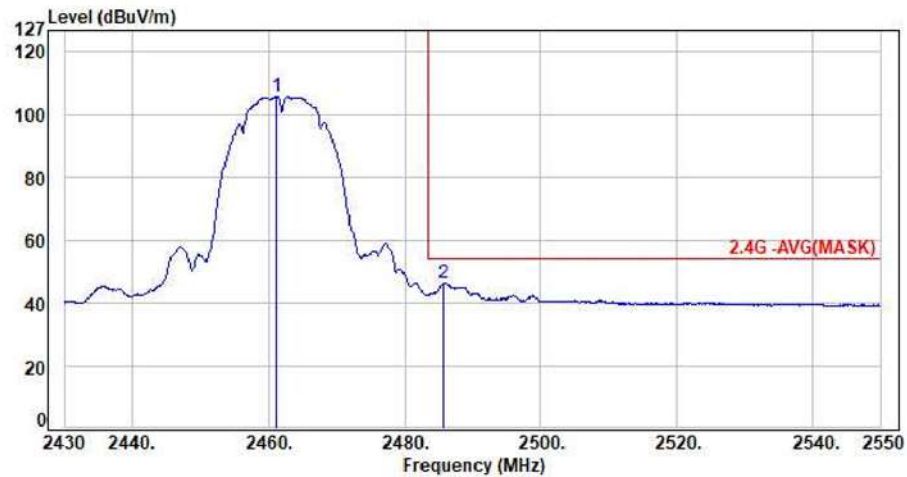


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.20	-3.90	109.62	105.72	200.00	-94.28	Average	100	193	P
2	2485.68	-3.88	50.33	46.45	54.00	-7.55	Average	100	193	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

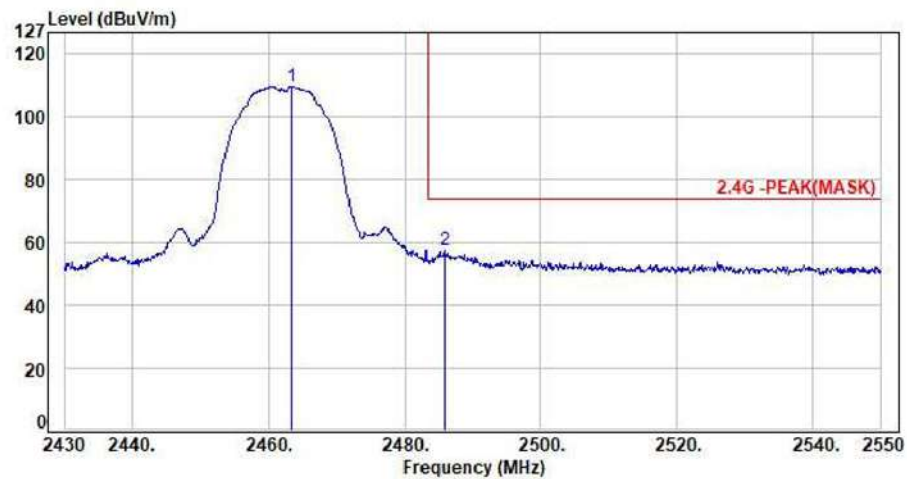

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2463.48	-3.87	113.62	109.75	200.00	-90.25	Peak	100	193	P
2	2485.92	-3.88	61.12	57.24	74.00	-16.76	Peak	100	193	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

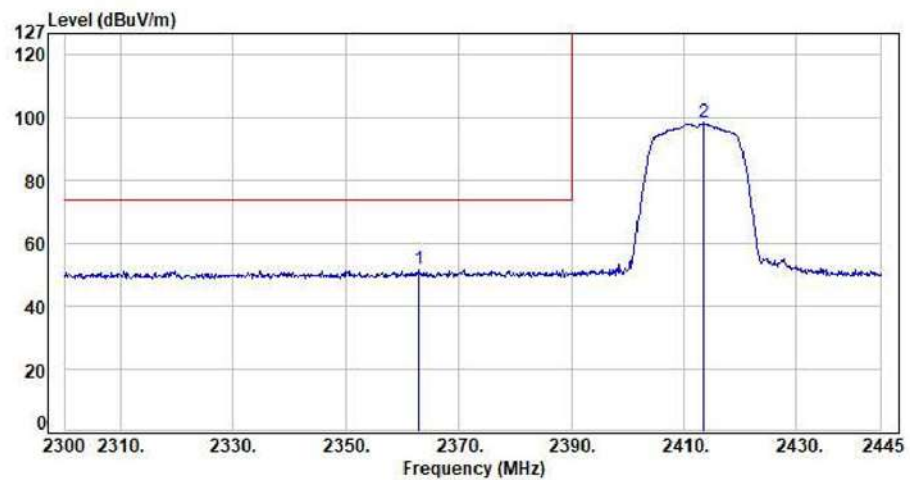

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2362.93	-4.29	56.09	51.80	74.00	-22.20	Peak	100	34	P
2	2413.54	-4.12	102.41	98.29	200.00	-101.71	Peak	100	34	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

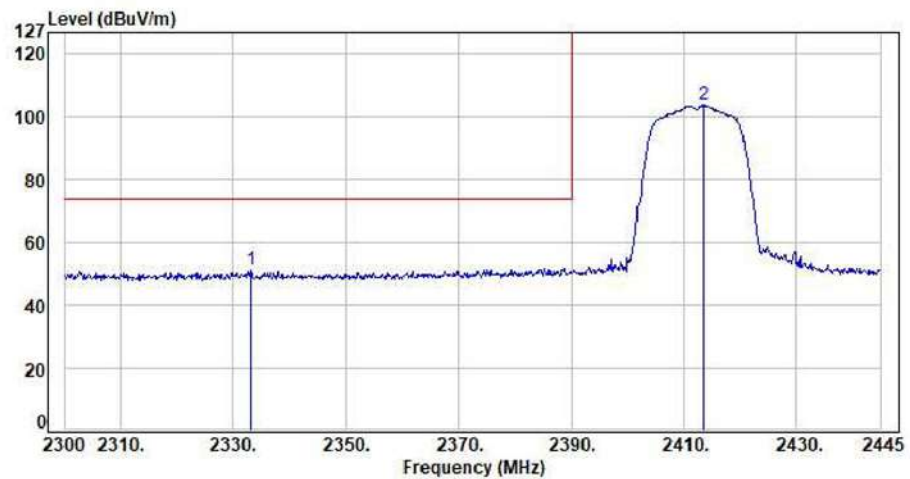

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2333.21	-4.54	55.62	51.08	74.00	-22.92	Peak	100	194	P
2	2413.39	-4.13	107.89	103.76	200.00	-96.24	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

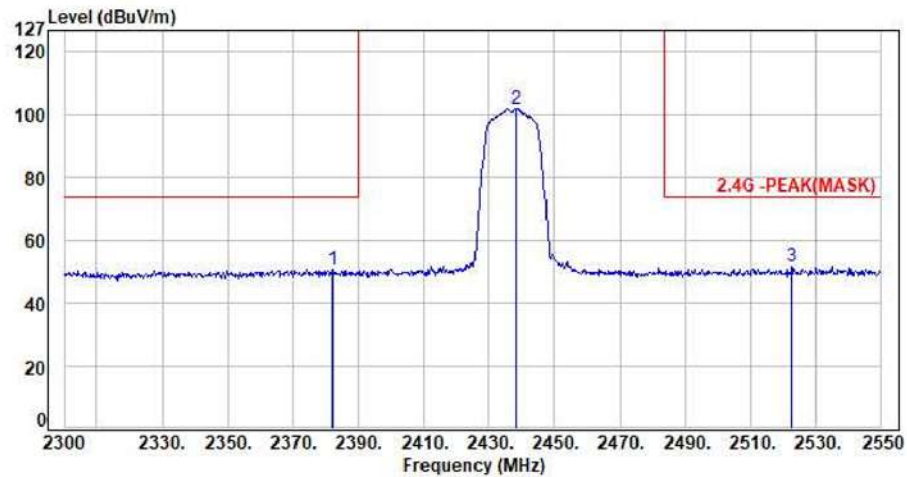


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2382.00	-4.21	55.08	50.87	74.00	-23.13	Peak	100	32	P
2	2438.25	-4.12	106.20	102.08	200.00	-97.92	Peak	100	32	P
3	2522.75	-3.73	55.25	51.52	74.00	-22.48	Peak	100	32	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

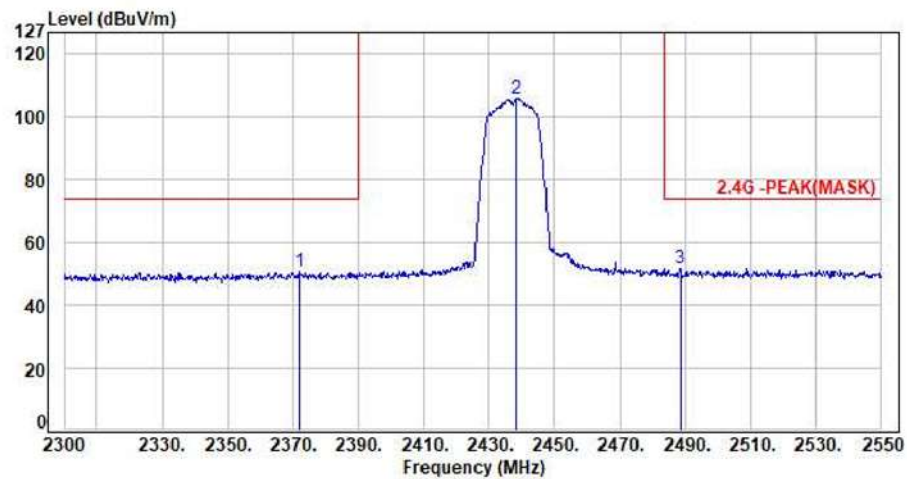


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2372.00	-4.21	54.71	50.50	74.00	-23.50	Peak	100	195	P
2	2438.25	-4.12	109.96	105.84	200.00	-94.16	Peak	100	195	P
3	2488.50	-3.88	55.51	51.63	74.00	-22.37	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

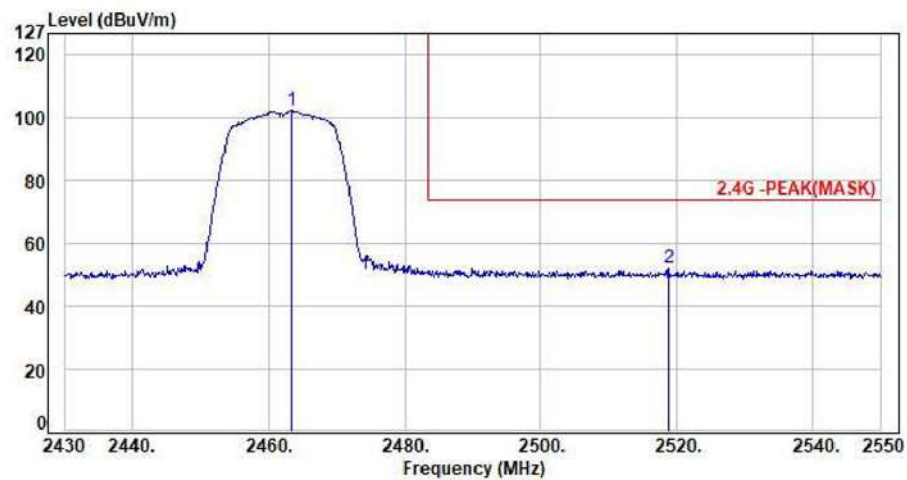

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2463.36	-3.87	106.15	102.28	200.00	-97.72	Peak	100	34	P
2	2518.80	-3.74	56.01	52.27	74.00	-21.73	Peak	100	34	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

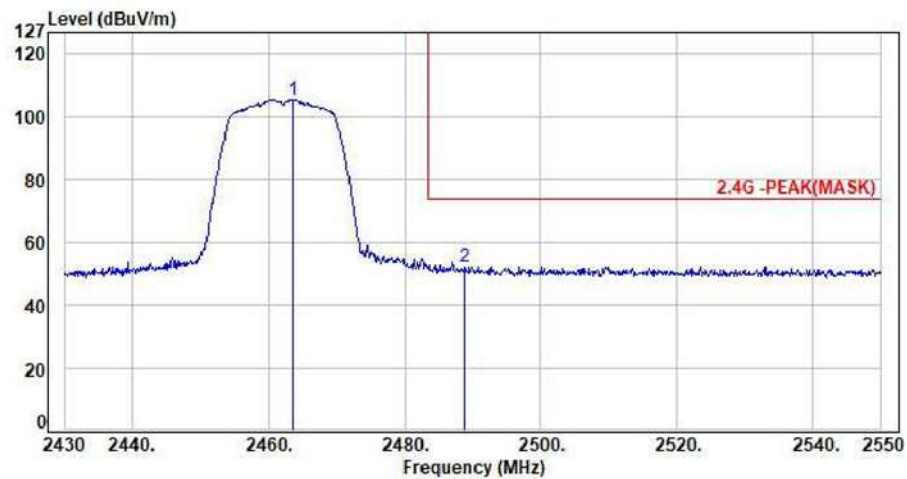

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2463.60	-3.86	109.35	105.49	200.00	-94.51	Peak	100	192	P
2	2488.68	-3.88	56.22	52.34	74.00	-21.66	Peak	100	192	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with Intel CPU- MIMO



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

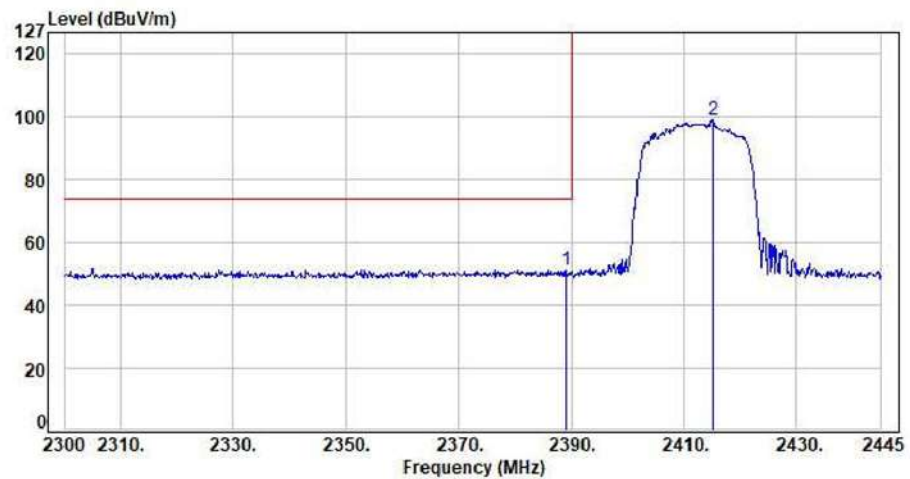

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.03	-4.20	55.58	51.38	74.00	-22.62	Peak	100	22	P
2	2415.13	-4.11	102.91	98.80	200.00	-101.20	Peak	100	22	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

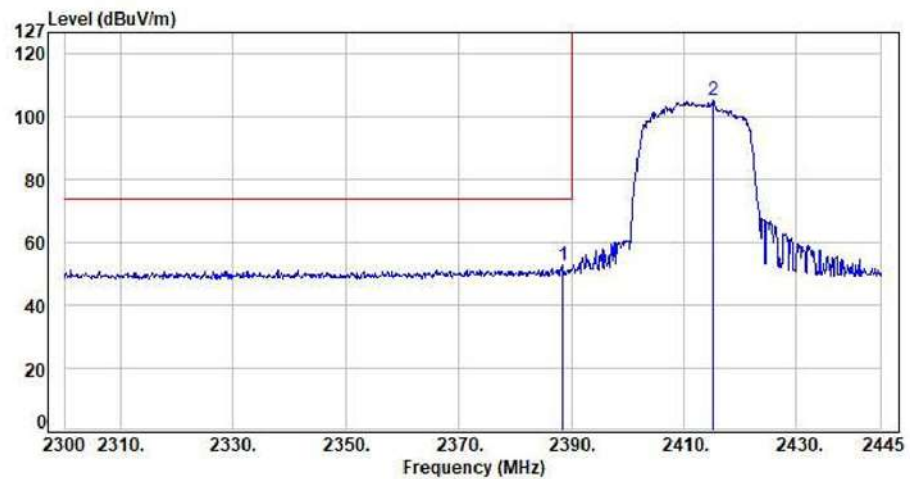

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2388.45	-4.20	56.89	52.69	74.00	-21.31	Peak	100	224	P
2	2415.13	-4.11	109.17	105.06	200.00	-94.94	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

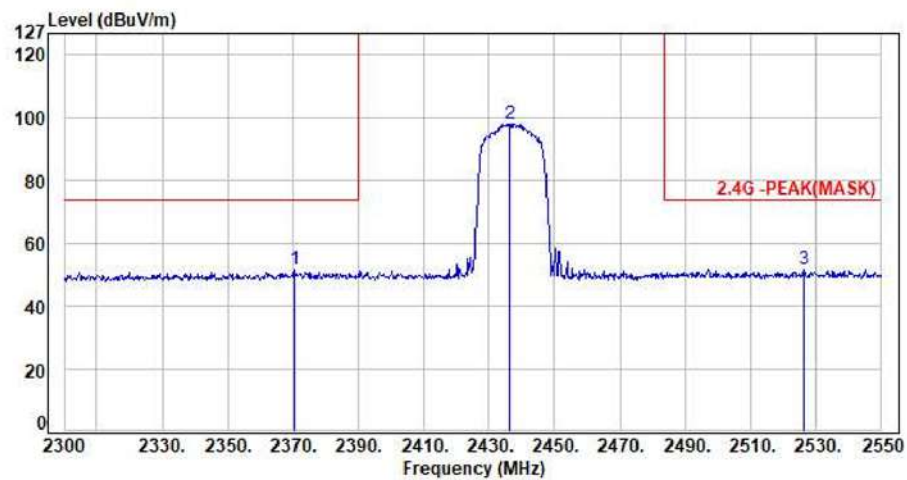

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2370.75	-4.21	55.72	51.51	74.00	-22.49	Peak	100	21	P
2	2436.50	-4.10	102.15	98.05	200.00	-101.95	Peak	100	21	P
3	2526.25	-3.74	55.27	51.53	74.00	-22.47	Peak	100	21	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

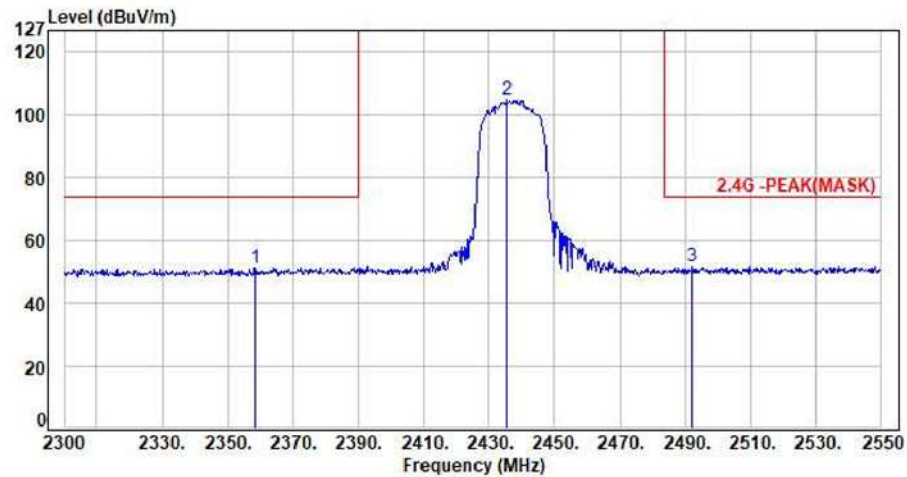

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2358.50	-4.34	55.72	51.38	74.00	-22.62	Peak	100	225	P
2	2435.50	-4.09	108.89	104.80	200.00	-95.20	Peak	100	225	P
3	2492.00	-3.87	55.52	51.65	74.00	-22.35	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH11 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

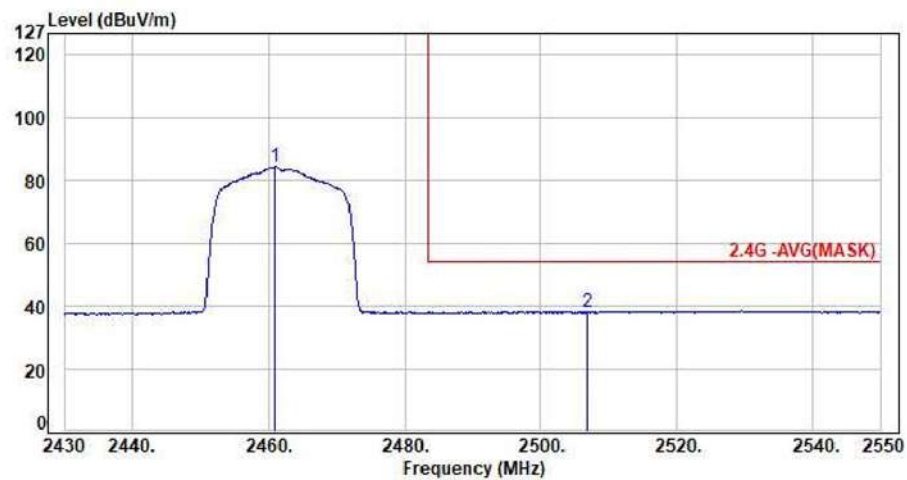

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2461.08	-3.90	88.24	84.34	200.00	-115.66	Average	100	226	P
2	2506.80	-3.78	42.10	38.32	54.00	-15.68	Average	100	226	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH11 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

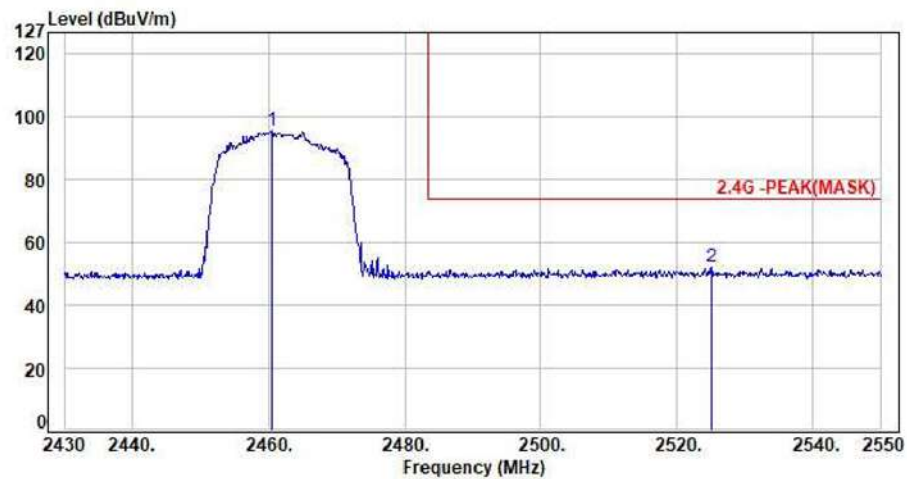

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2460.48	-3.91	99.33	95.42	200.00	-104.58	Peak	100	25	P
2	2525.04	-3.74	56.08	52.34	74.00	-21.66	Peak	100	25	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH11 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

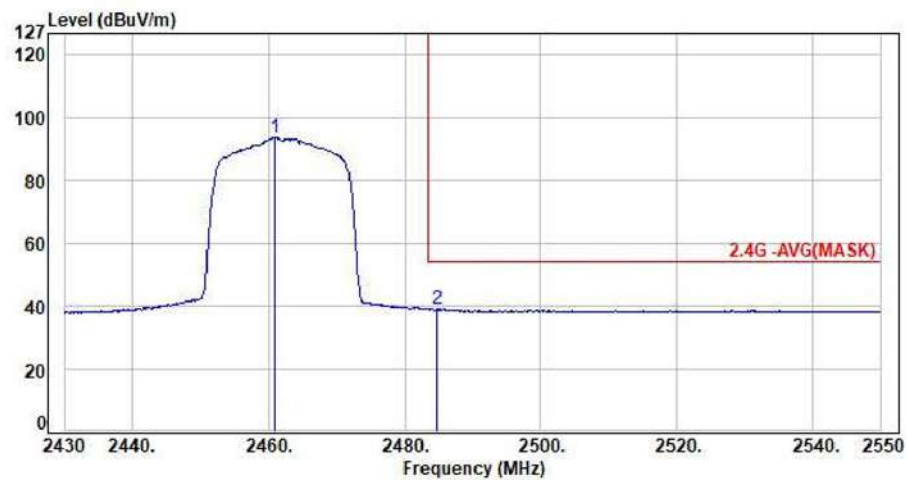

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2460.96	-3.90	97.58	93.68	200.00	-106.32	Average	100	226	P
2	2484.84	-3.88	43.02	39.14	54.00	-14.86	Average	100	226	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH11 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

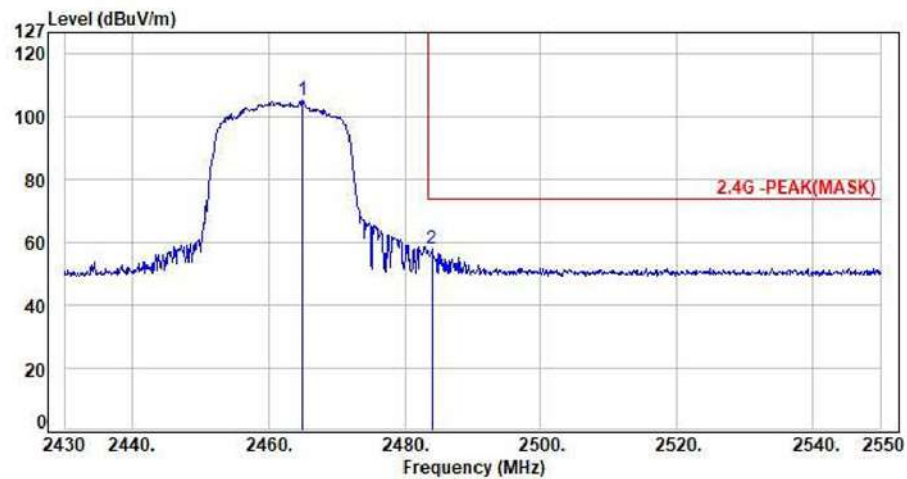

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2465.04	-3.85	109.03	105.18	200.00	-94.82	Peak	100	23	P
2	2484.00	-3.88	61.92	58.04	74.00	-15.96	Peak	100	23	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

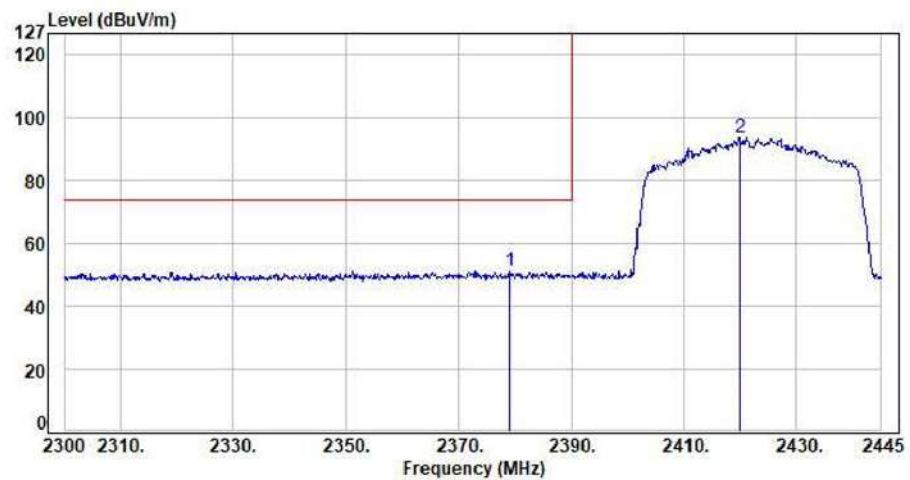

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2379.03	-4.21	55.41	51.20	74.00	-22.80	Peak	100	21	P
2	2419.92	-4.05	97.55	93.50	200.00	-106.50	Peak	100	21	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

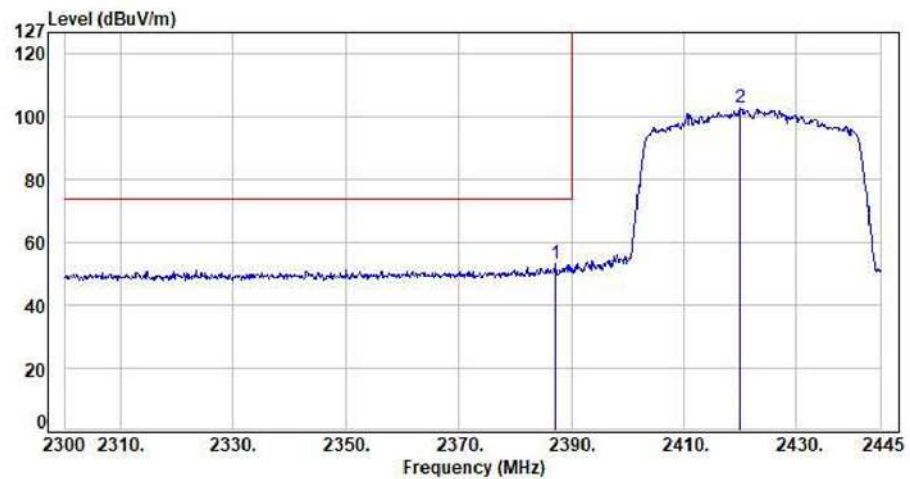

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2387.15	-4.20	57.18	52.98	74.00	-21.02	Peak	100	218	P
2	2419.92	-4.05	106.94	102.89	200.00	-97.11	Peak	100	218	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

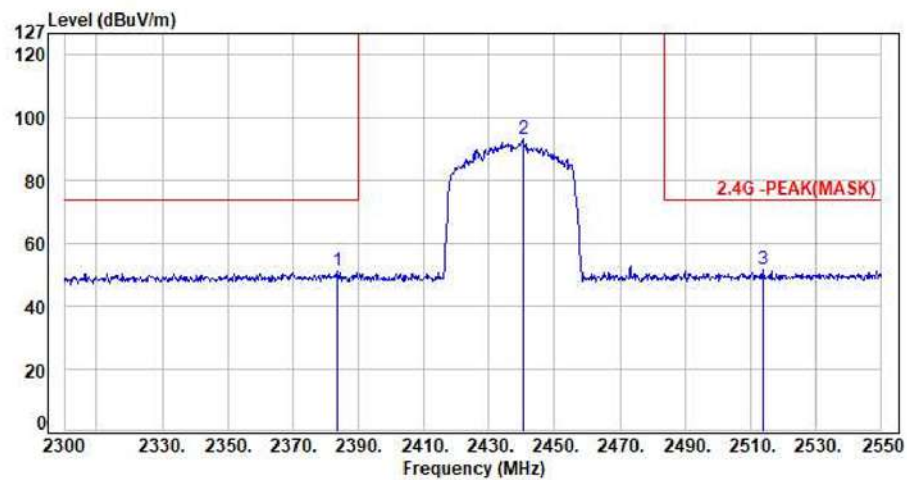

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2383.75	-4.21	55.30	51.09	74.00	-22.91	Peak	100	26	P
2	2440.50	-4.13	97.20	93.07	200.00	-106.93	Peak	100	26	P
3	2513.75	-3.74	55.19	51.45	74.00	-22.55	Peak	100	26	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

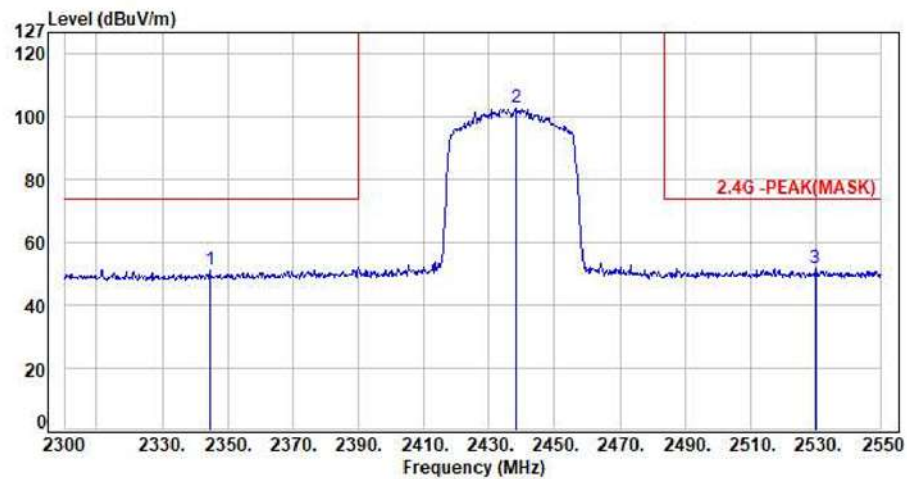

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2344.50	-4.45	55.67	51.22	74.00	-22.78	Peak	100	219	P
2	2438.00	-4.12	107.03	102.91	200.00	-97.09	Peak	100	219	P
3	2529.75	-3.73	55.61	51.88	74.00	-22.12	Peak	100	219	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH09 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

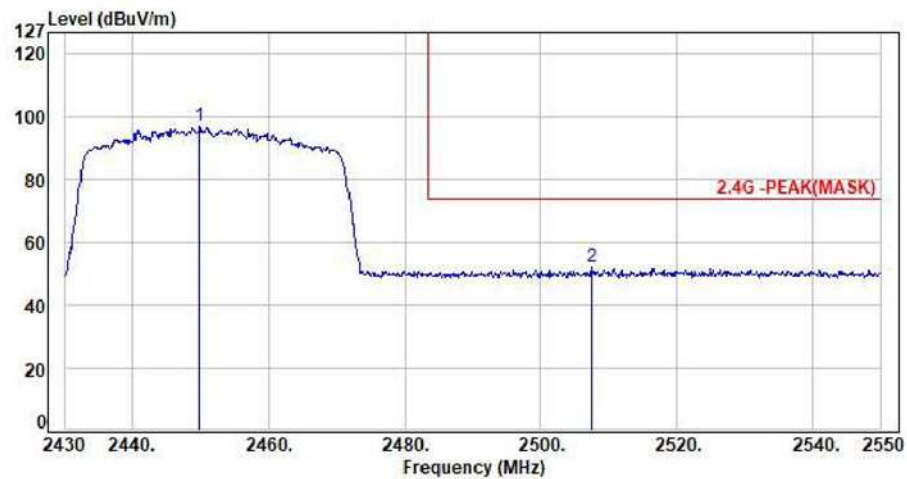

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2449.92	-4.02	101.11	97.09	200.00	-102.91	Peak	100	26	P
2	2507.40	-3.78	55.73	51.95	74.00	-22.05	Peak	100	26	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH09 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

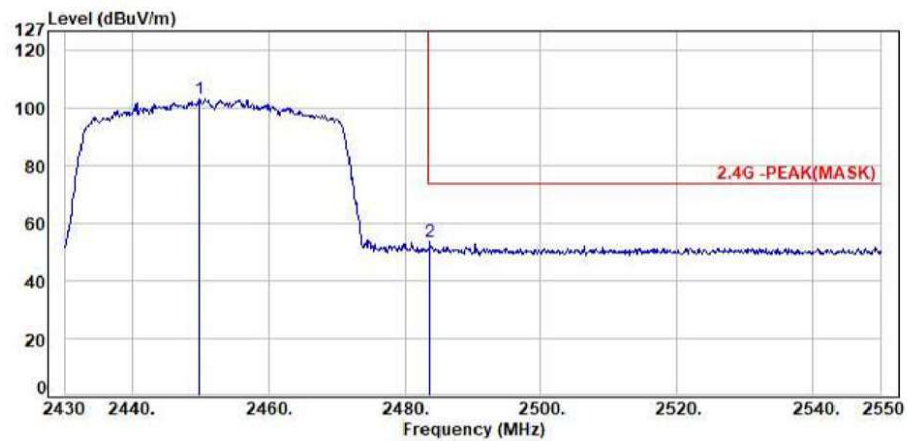

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2449.80	-4.02	107.39	103.37	200.00	-96.63	Peak	100	224	P
2	2483.76	-3.88	57.27	53.39	74.00	-20.61	Peak	100	224	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




6.7 Test Result and Data (1GHz ~ 3GHz)

For M/B with AMD CPU SISO Main



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

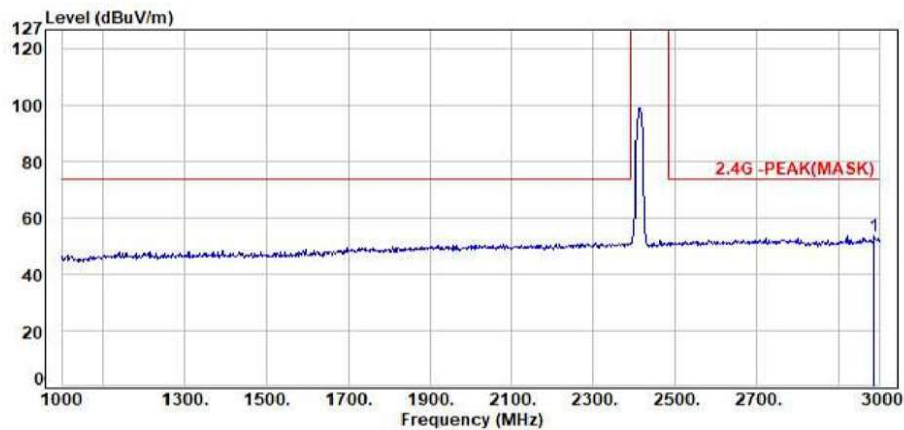

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2986.00	-1.89	55.28	53.39	74.00	-20.61	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

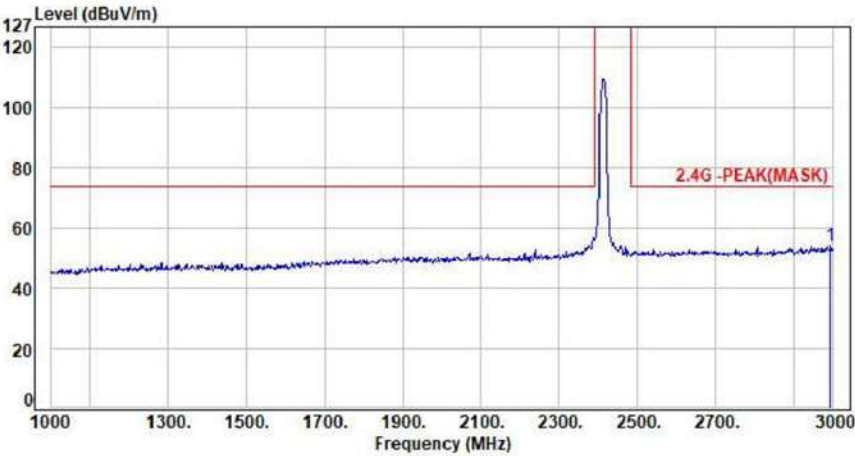


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2992.00	-1.88	55.79	53.91	74.00	-20.09	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

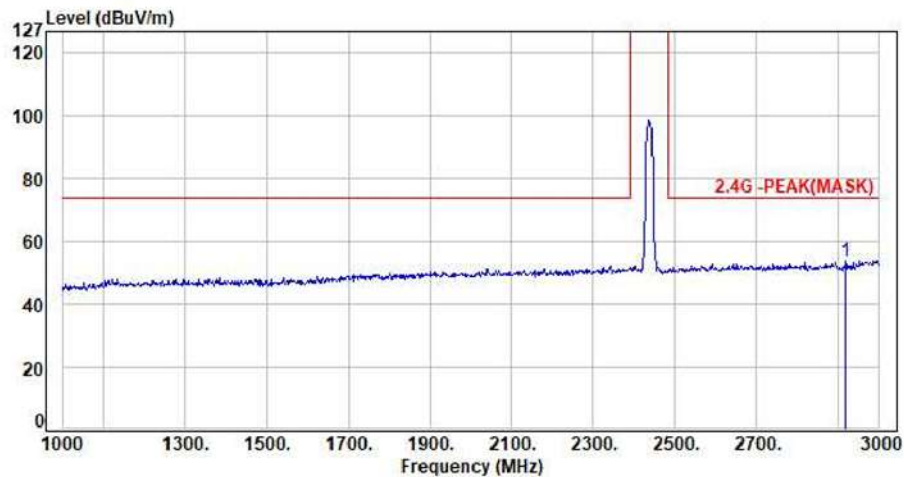

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2418.00	-2.37	55.82	53.45	74.00	-20.55	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

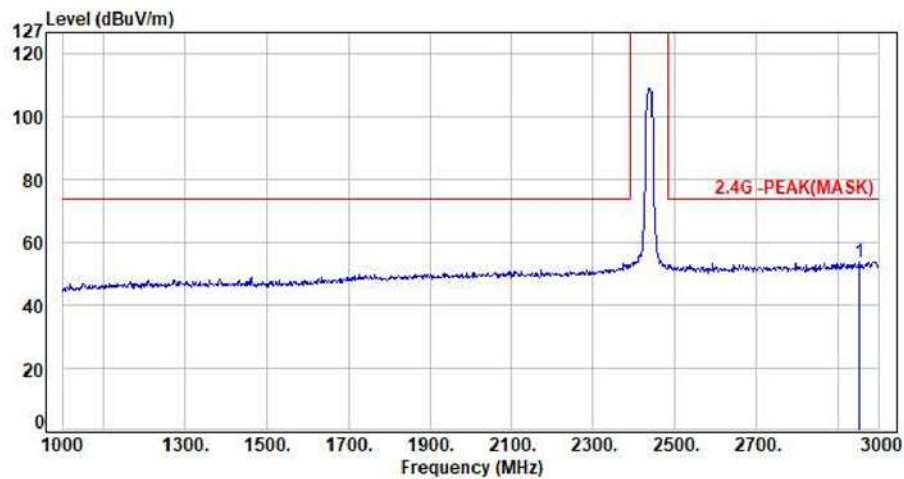

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2950.00	-2.12	55.94	53.82	74.00	-20.18	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

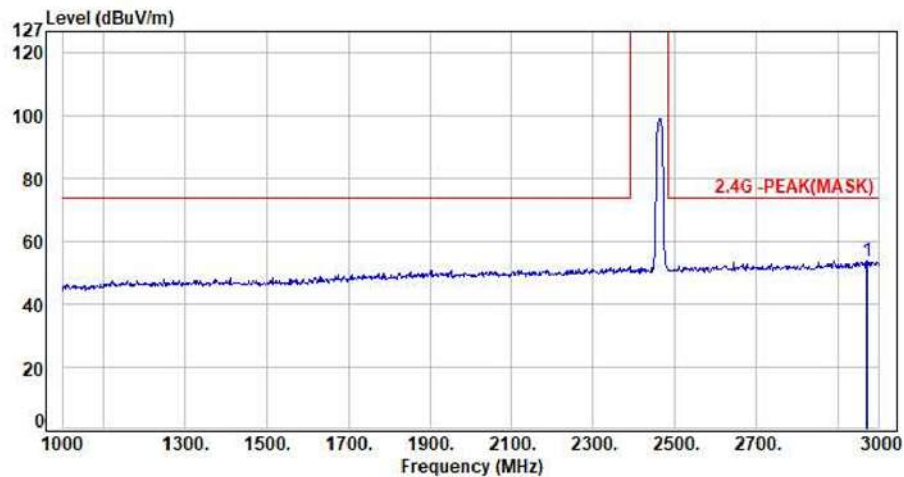

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2970.00	-2.00	55.43	53.43	74.00	-20.57	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

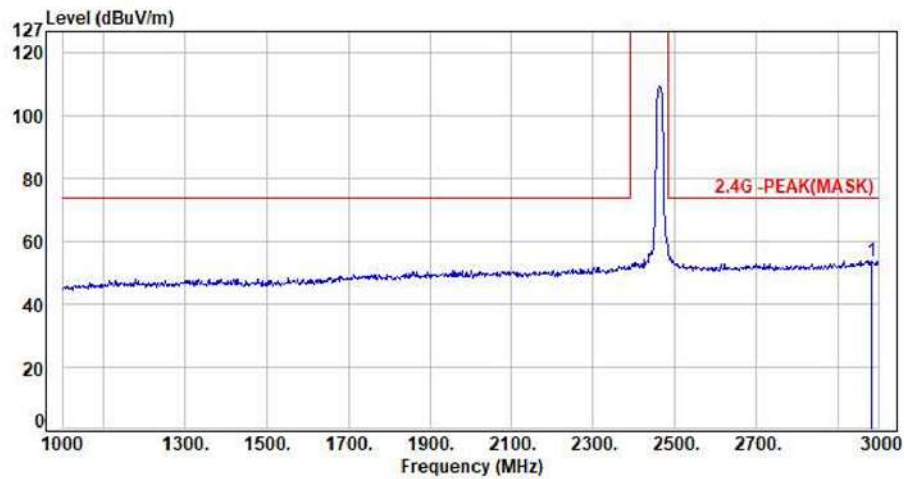

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2482.00	-1.89	55.69	53.80	74.00	-20.20	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

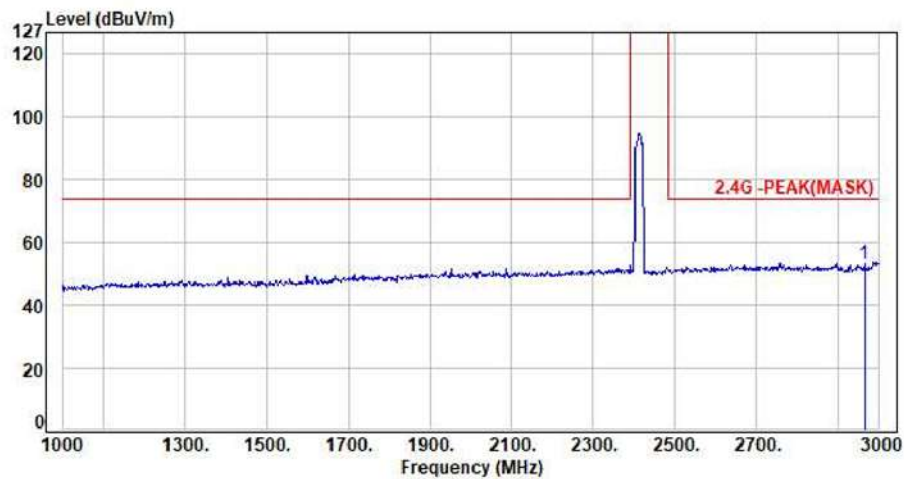

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2964.00	-2.00	55.34	53.34	74.00	-20.66	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

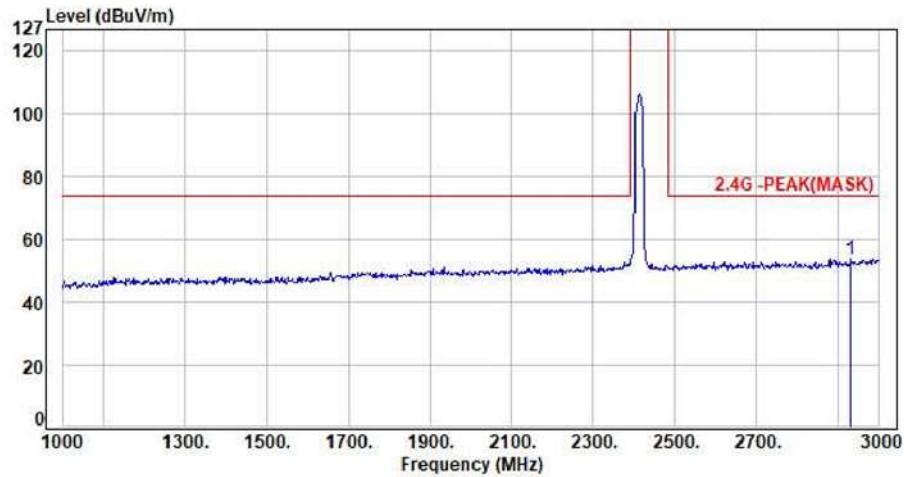

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2930.00	-2.24	55.98	53.74	74.00	-20.26	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

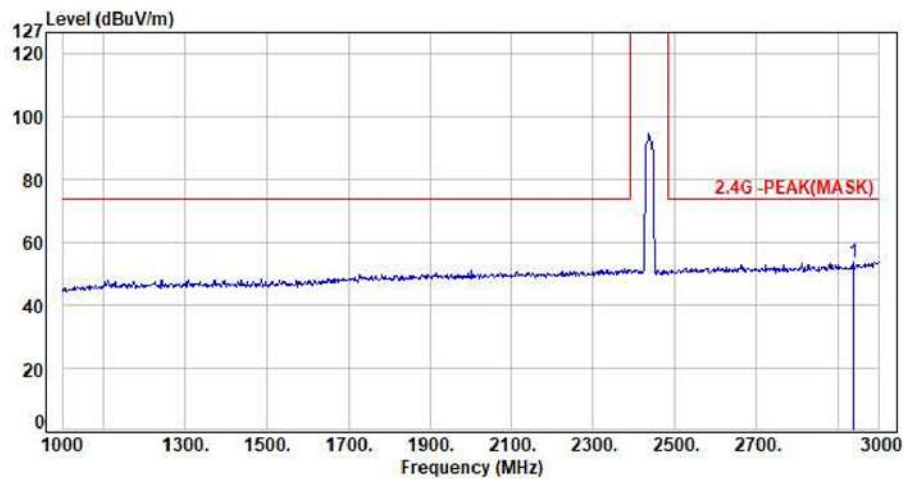

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2936.00	-2.18	55.93	53.75	74.00	-20.25	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

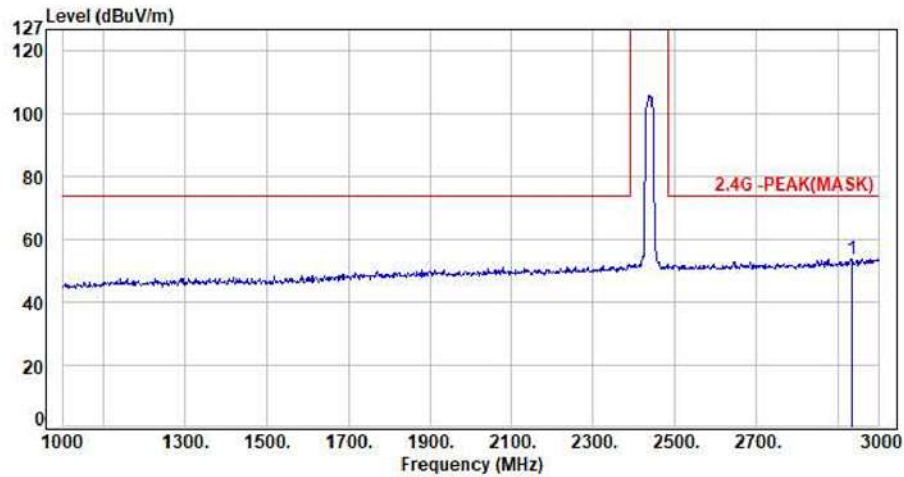

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2932.00	-2.22	56.06	53.84	74.00	-20.16	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

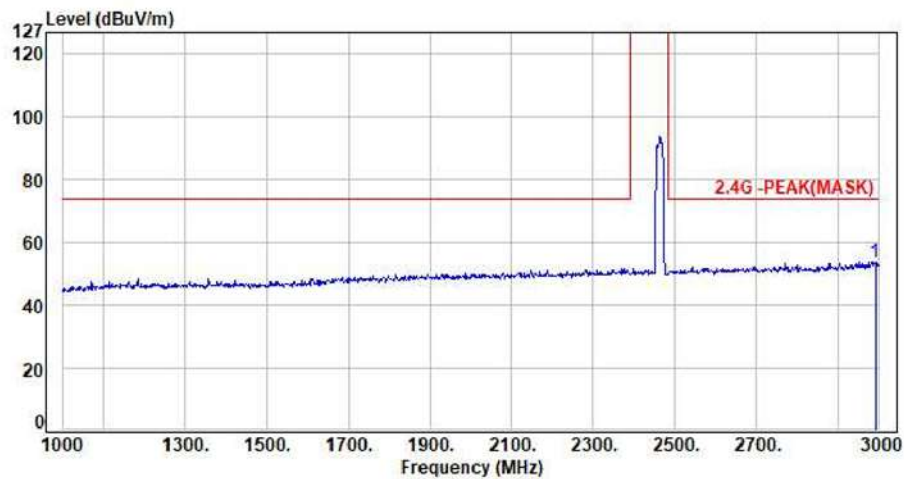

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2990.00	-1.88	55.53	53.65	74.00	-20.35	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

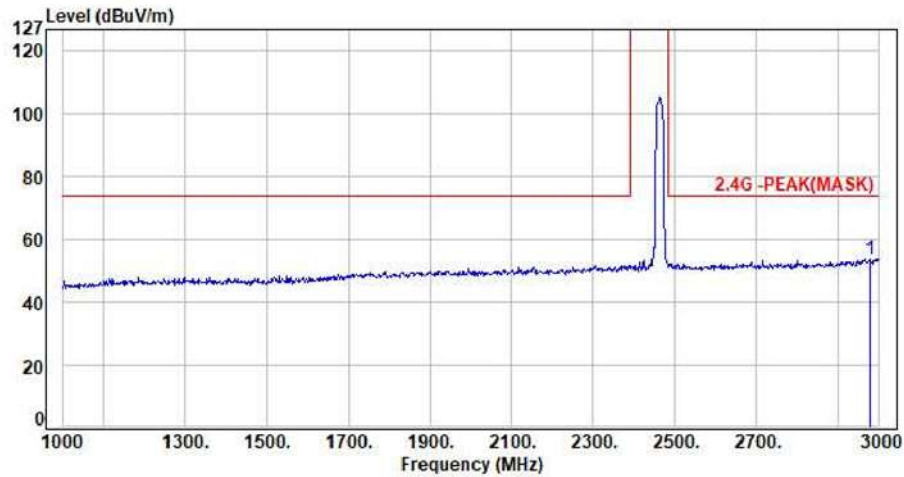

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2978.00	-1.92	55.60	53.68	74.00	-20.32	Peak	100	0	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

For SISO Aux



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

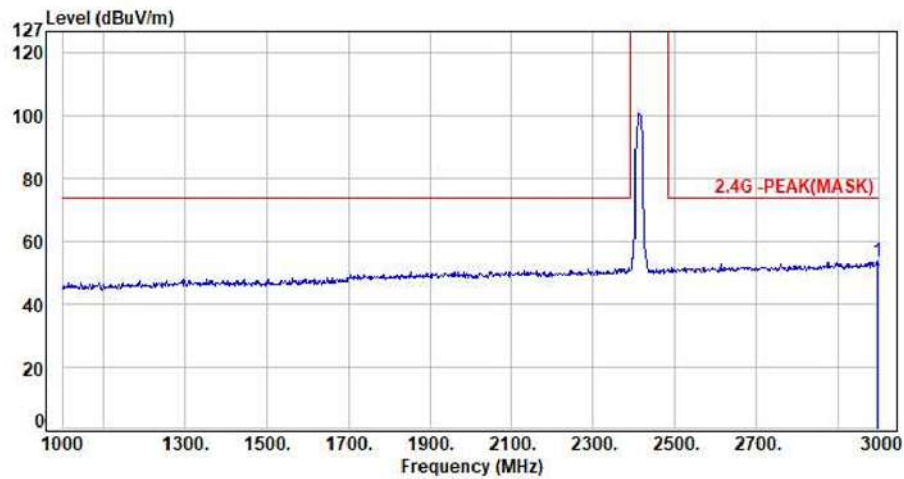

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2994.00	-1.88	55.57	53.69	74.00	-20.31	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

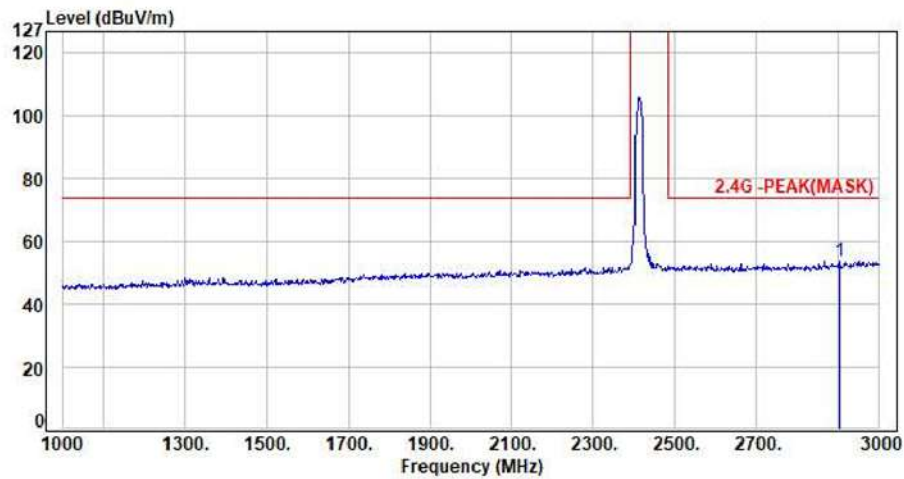

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2902.00	-2.47	56.30	53.83	74.00	-20.17	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

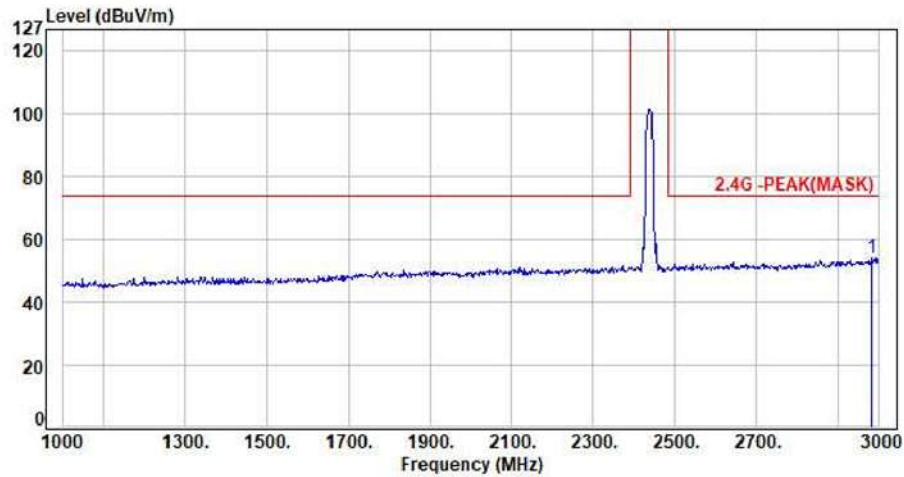

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2482.00	-1.89	55.80	53.91	74.00	-20.09	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

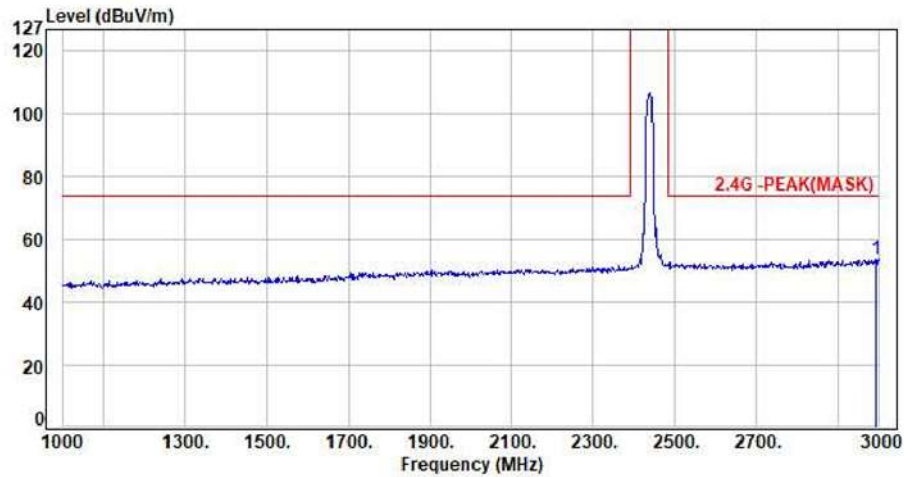

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2992.00	-1.88	55.47	53.59	74.00	-20.41	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

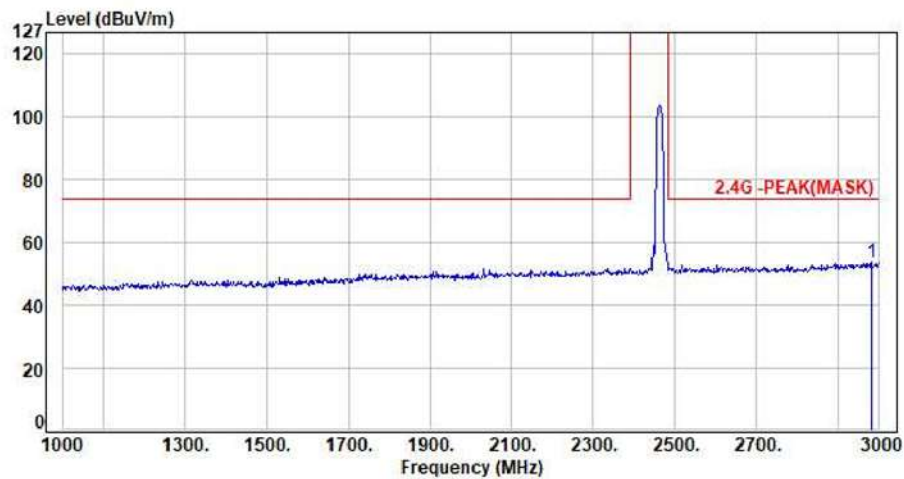

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-1.89	55.26	53.37	74.00	-20.63	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

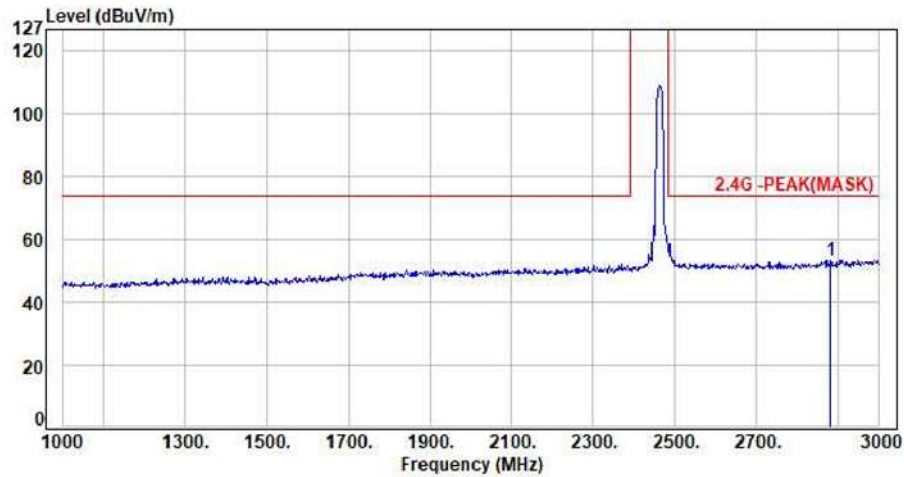

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2882.00	-2.57	55.90	53.33	74.00	-20.67	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

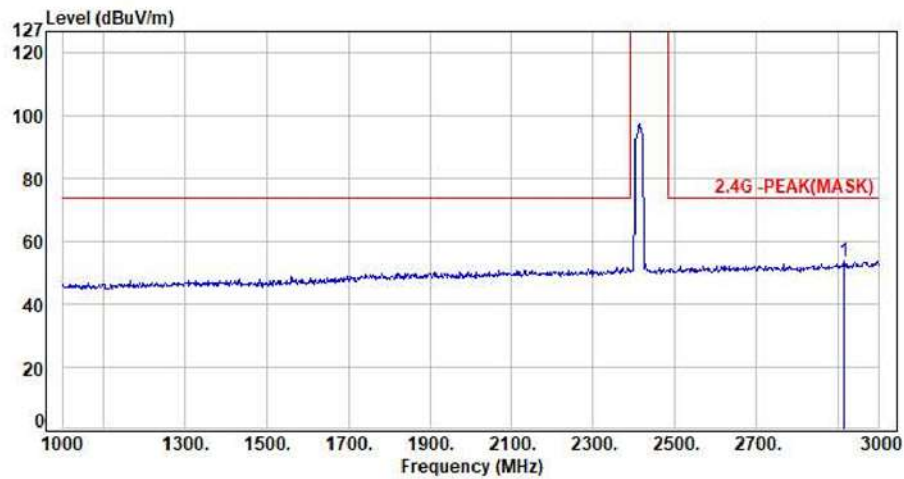

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2414.00	-2.41	55.86	53.45	74.00	-20.55	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

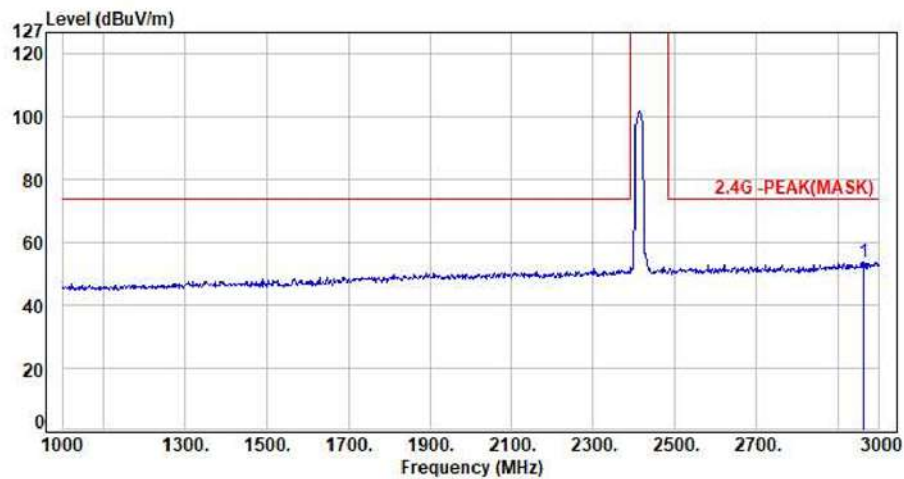

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2962.00	-2.00	55.64	53.64	74.00	-20.36	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

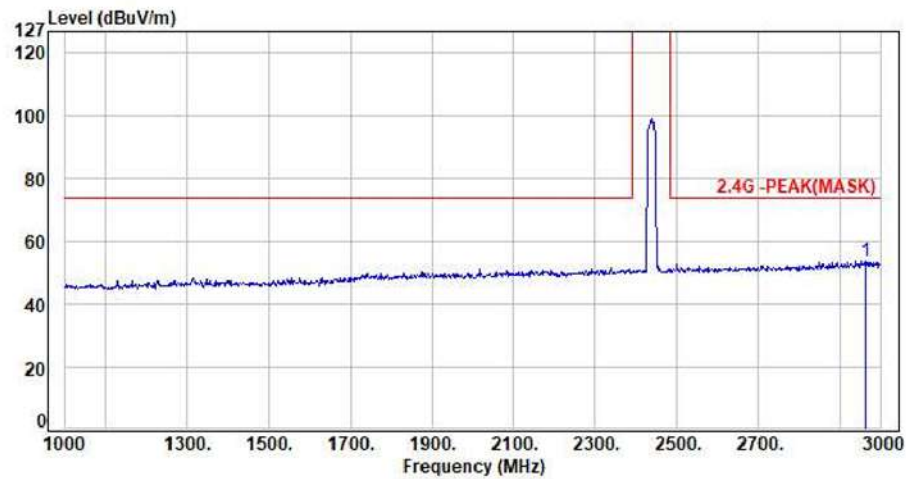

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.00	55.72	53.72	74.00	-20.28	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

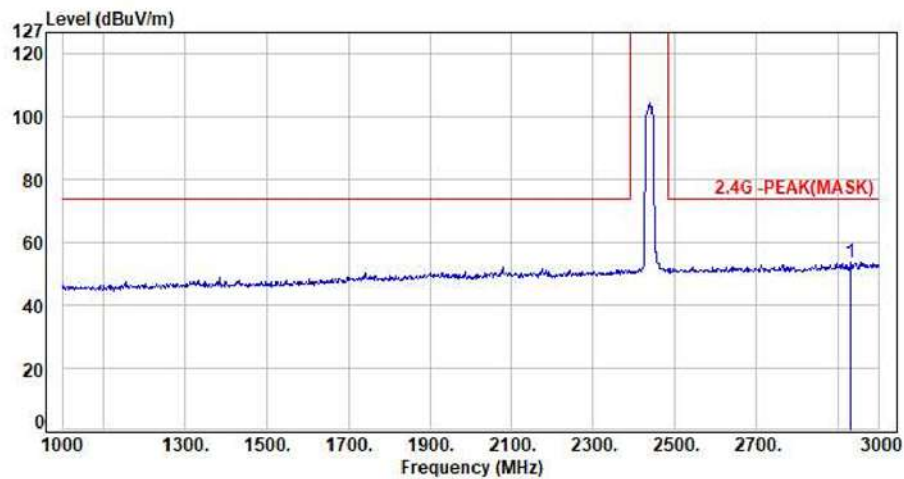

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2930.00	-2.24	55.84	53.60	74.00	-20.40	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

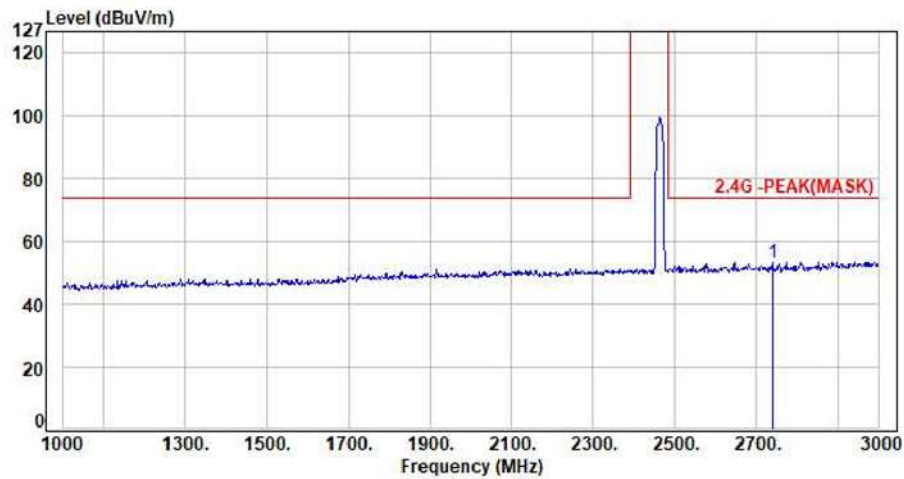

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2738.00	-3.33	56.68	53.35	74.00	-20.65	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

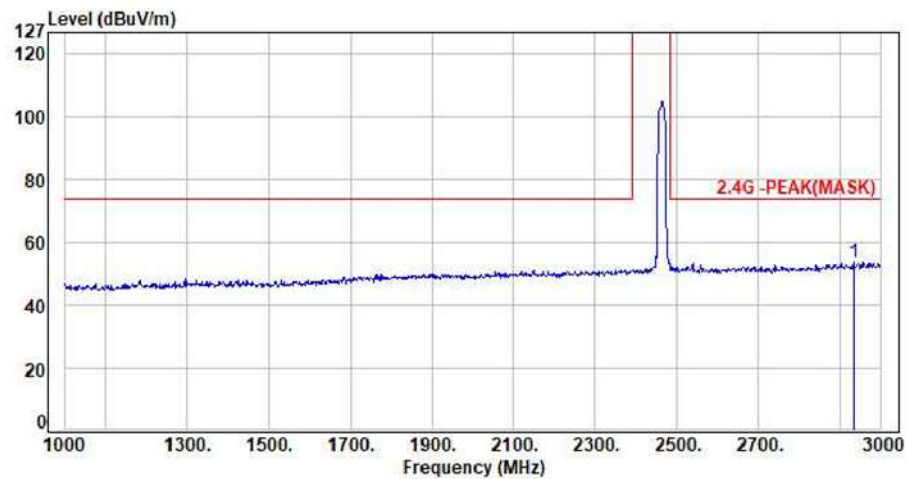

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2932.00	-2.22	55.88	53.66	74.00	-20.34	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

For MIMO



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

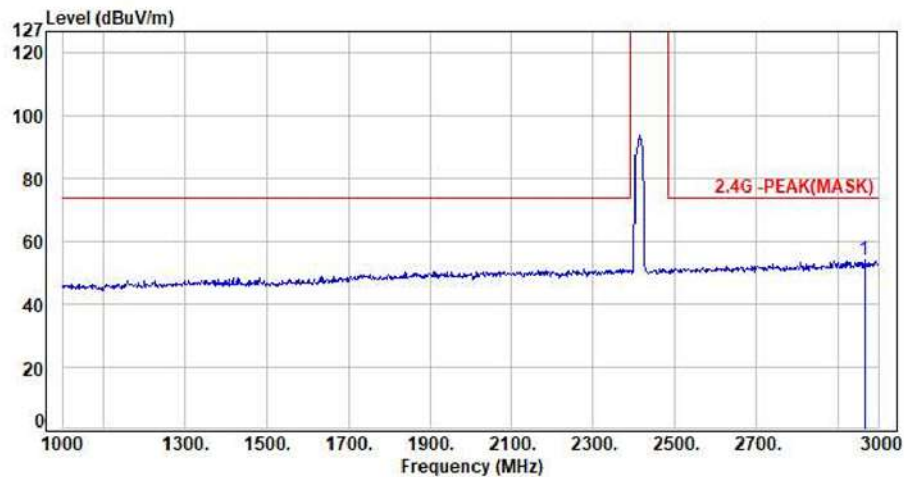

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2964.00	-2.00	55.88	53.88	74.00	-20.12	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

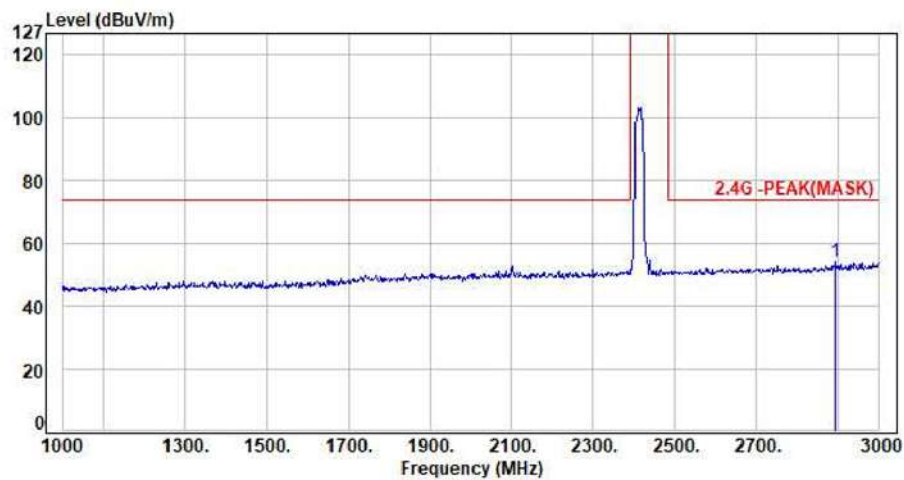

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2892.00	-2.48	56.36	53.88	74.00	-20.12	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

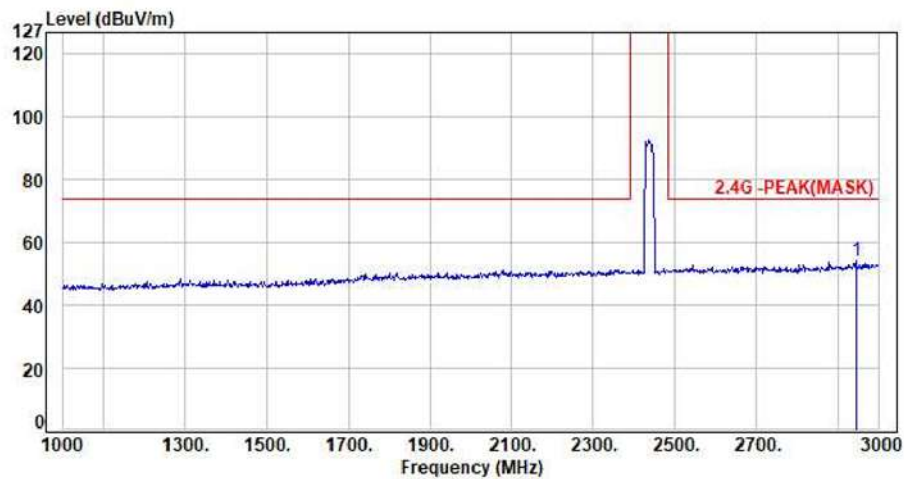

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2442.00	-2.13	56.01	53.88	74.00	-20.12	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

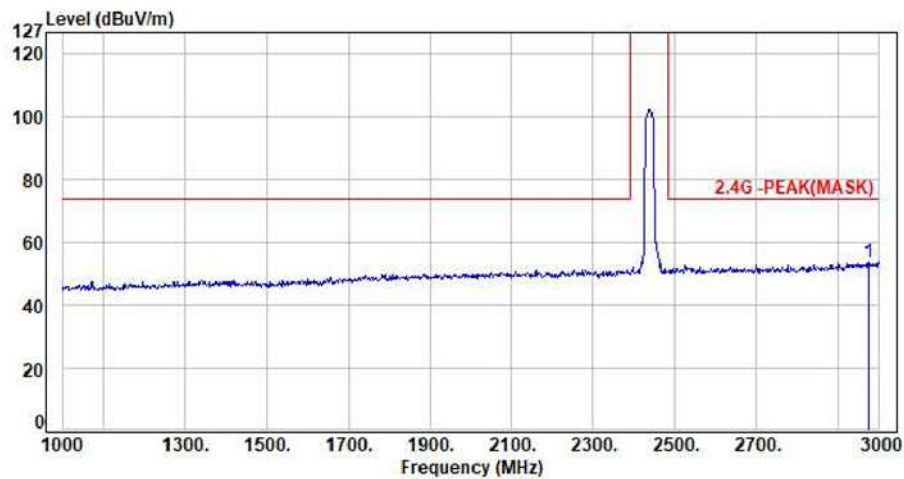

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2972.00	-1.97	55.52	53.55	74.00	-20.45	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH11 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

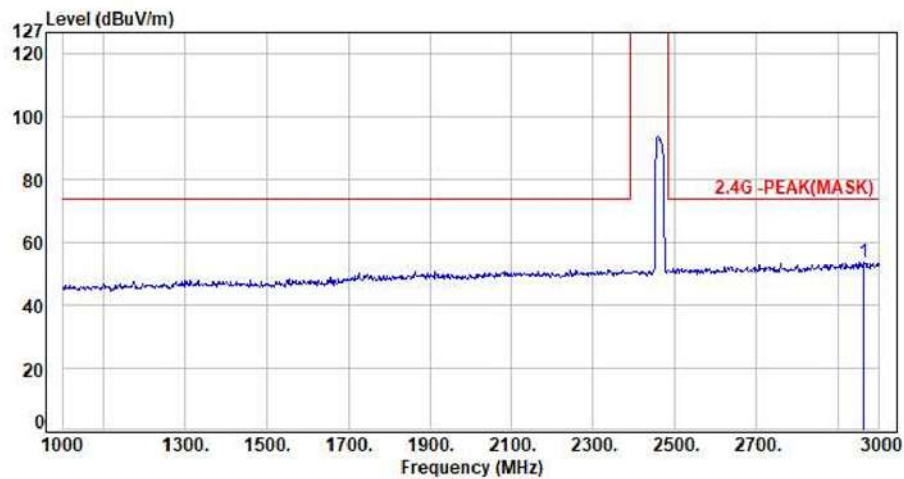

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.00	55.65	53.65	74.00	-20.35	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax20 CH11 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

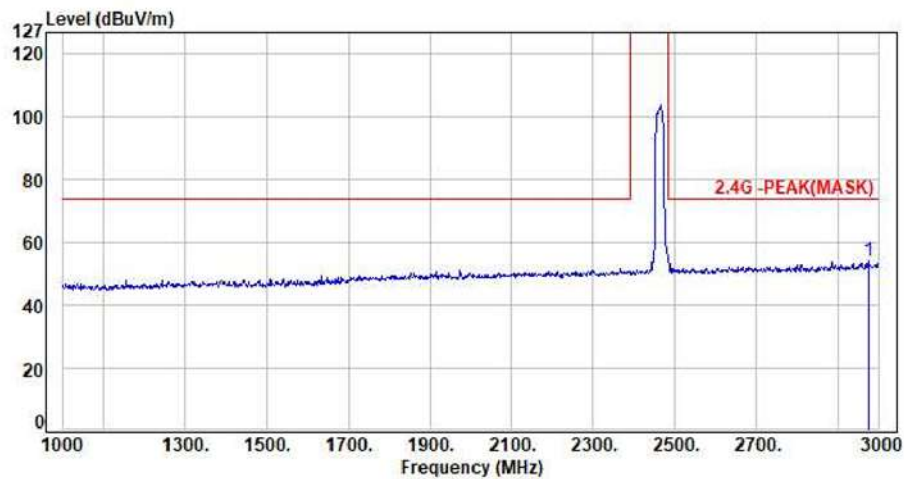

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2972.00	-1.97	55.86	53.89	74.00	-20.11	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

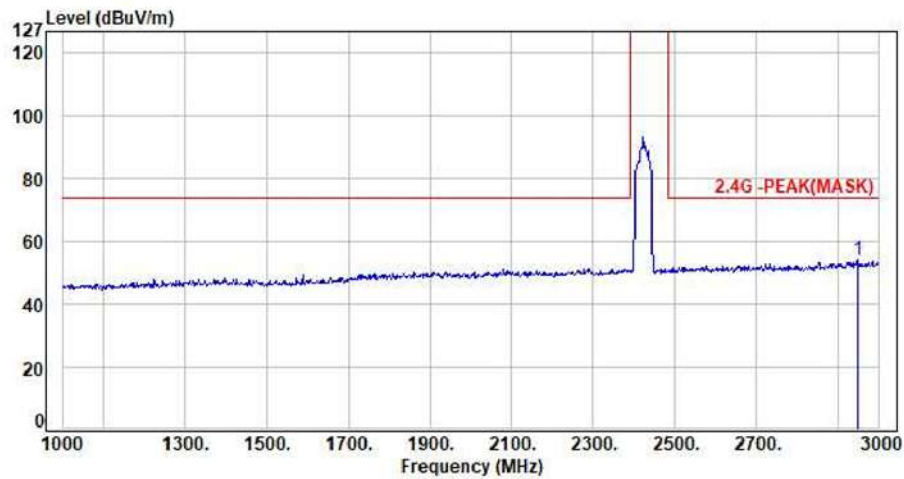

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2946.00	-2.12	55.98	53.86	74.00	-20.14	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

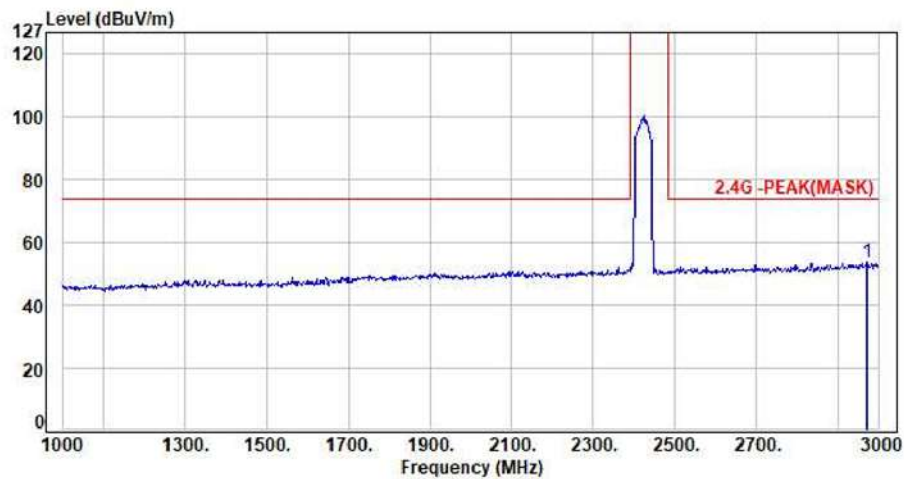

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2970.00	-2.00	55.37	53.37	74.00	-20.63	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

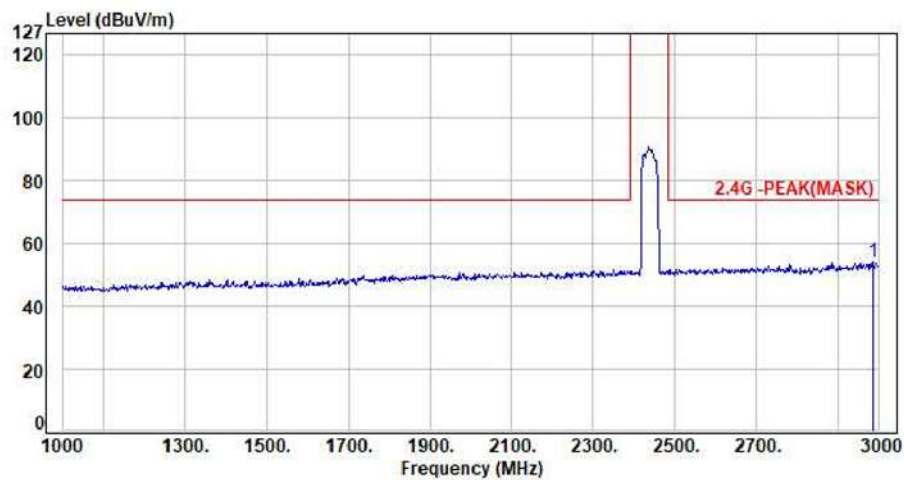

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2484.00	-1.89	55.81	53.92	74.00	-20.08	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

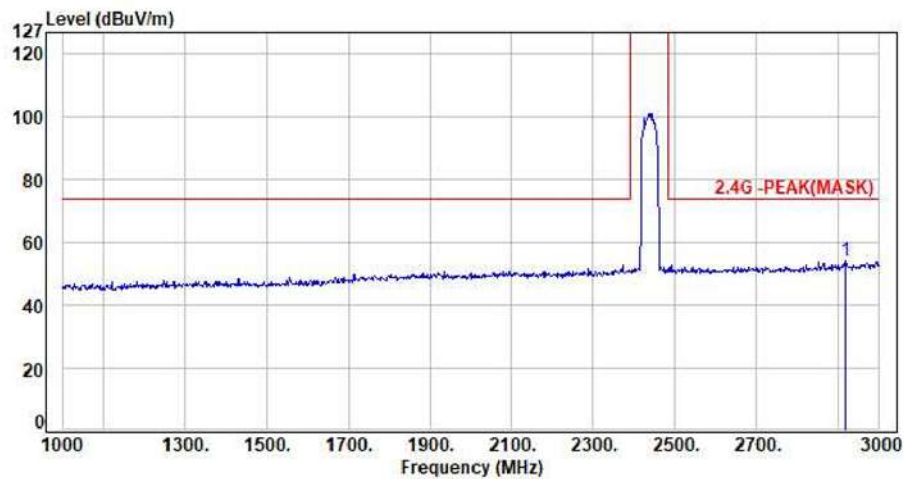

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2916.00	-2.39	56.23	53.84	74.00	-20.16	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH09 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

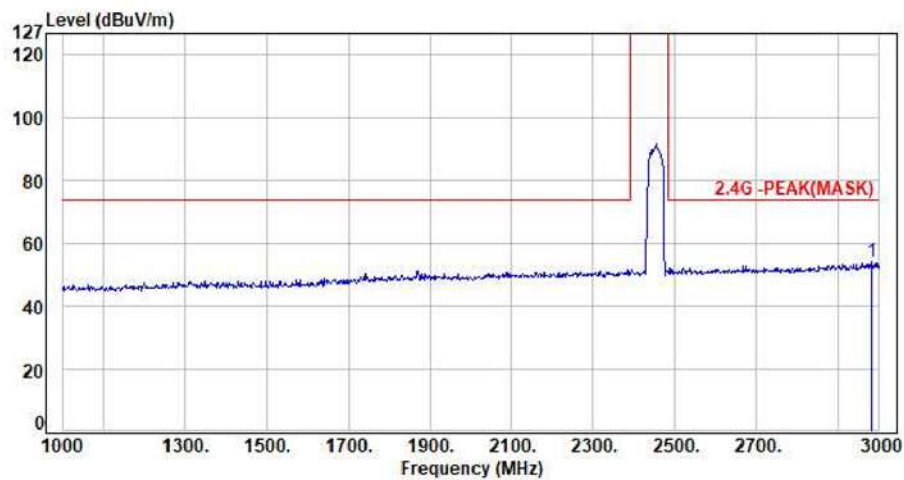

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2482.00	-1.89	55.83	53.94	74.00	-20.06	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 2TX 11ax40 CH09 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

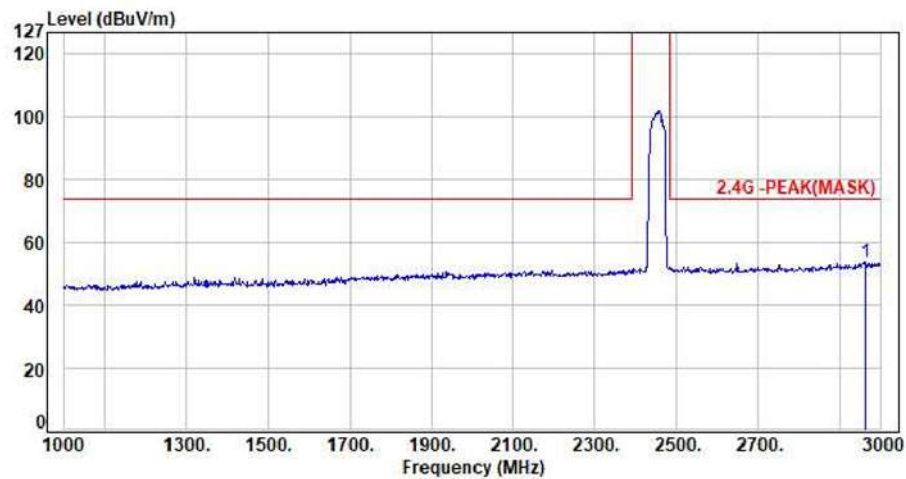

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2962.00	-2.00	55.61	53.61	74.00	-20.39	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with Intel CPU-SISO Main



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

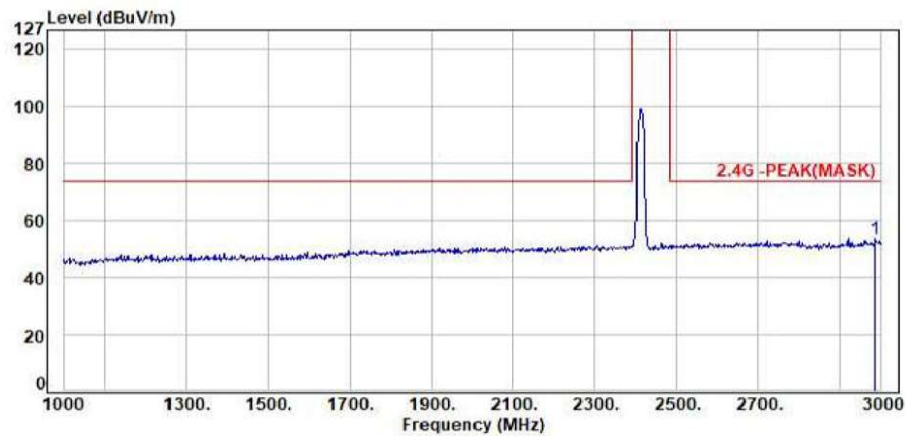


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2986.00	-1.89	55.28	53.39	74.00	-20.61	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

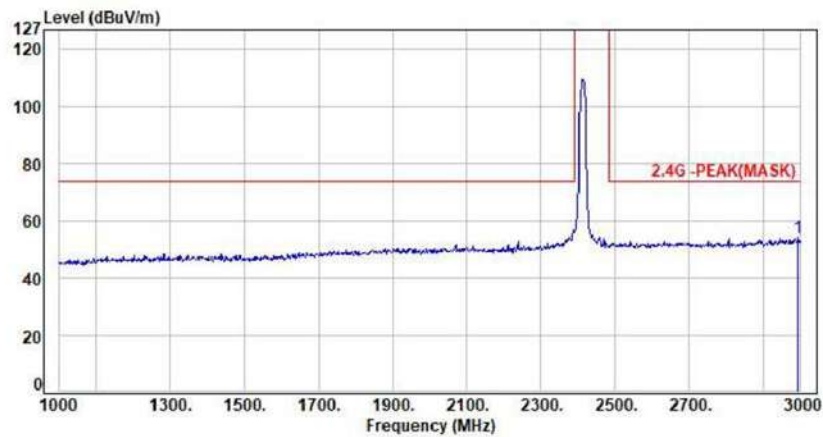


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2992.00	-1.88	55.79	53.91	74.00	-20.09	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

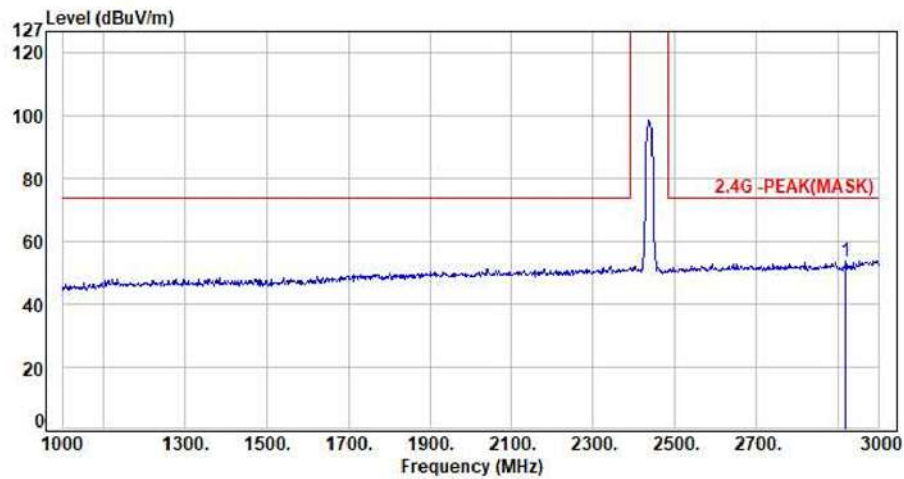

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2418.00	-2.37	55.82	53.45	74.00	-20.55	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH06 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

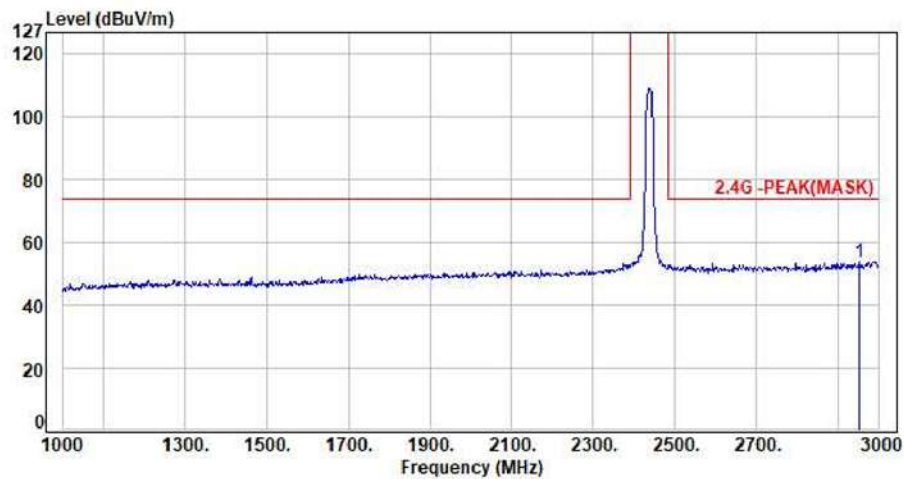

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2950.00	-2.12	55.94	53.82	74.00	-20.18	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

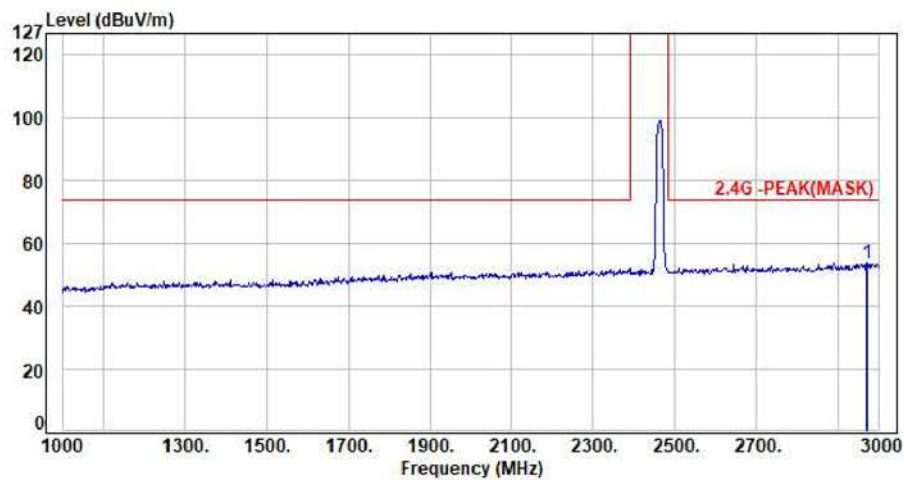

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2970.00	-2.00	55.43	53.43	74.00	-20.57	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

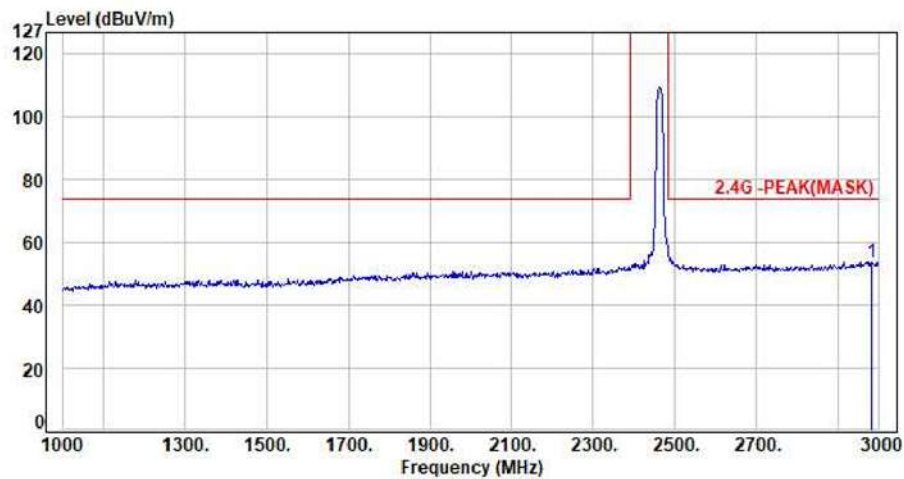

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2482.00	-1.89	55.69	53.80	74.00	-20.20	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

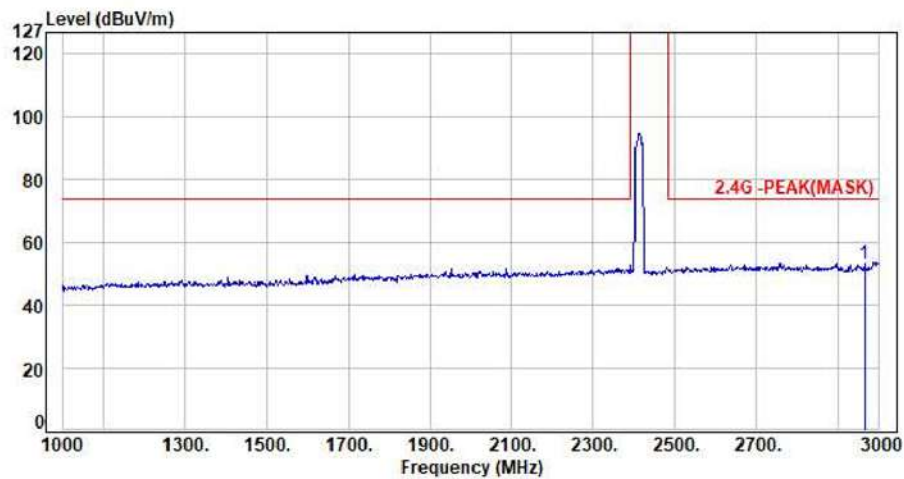

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2964.00	-2.00	55.34	53.34	74.00	-20.66	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Horizontal

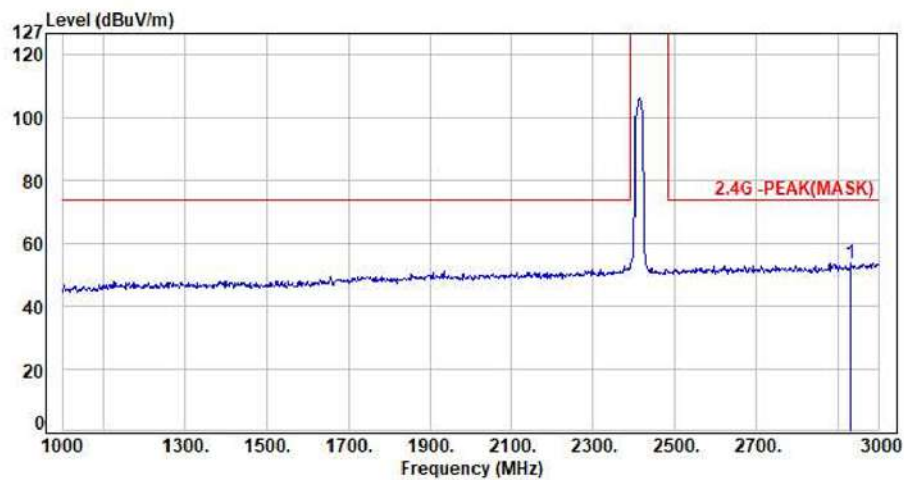

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2930.00	-2.24	55.98	53.74	74.00	-20.26	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



CERPASS TECHNOLOGY CORP.

Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC 120V/60Hz)
Pol : Vertical

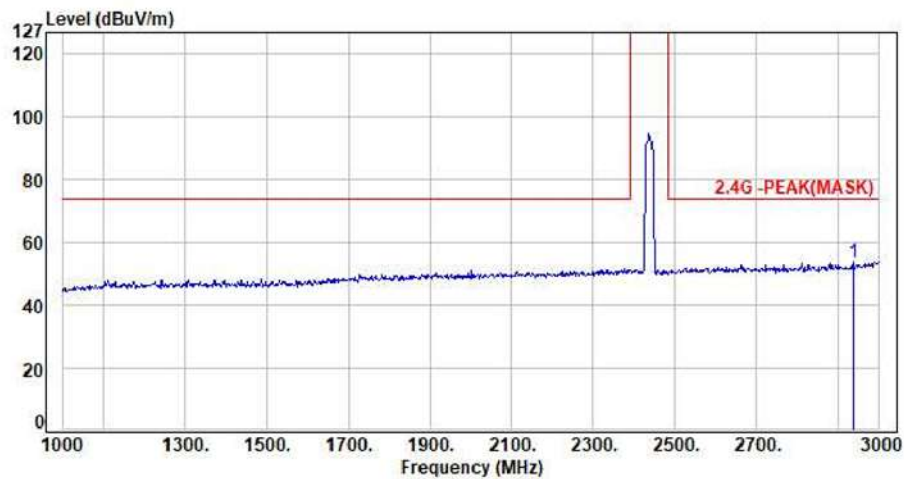

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2936.00	-2.18	55.93	53.75	74.00	-20.25	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor