

APPENDIX A

Graph Results (WIFI 2.4GHz & WIFI 5GHz)

WIFI 2.4GHz

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH1(2412MHz Bottom)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2412 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.841 \text{ S/m}$; $\epsilon_r = 38.849$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2412 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH1(2412MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.768 W/kg

Configuration/CH1(2412MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.543 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 0.711 W/kg

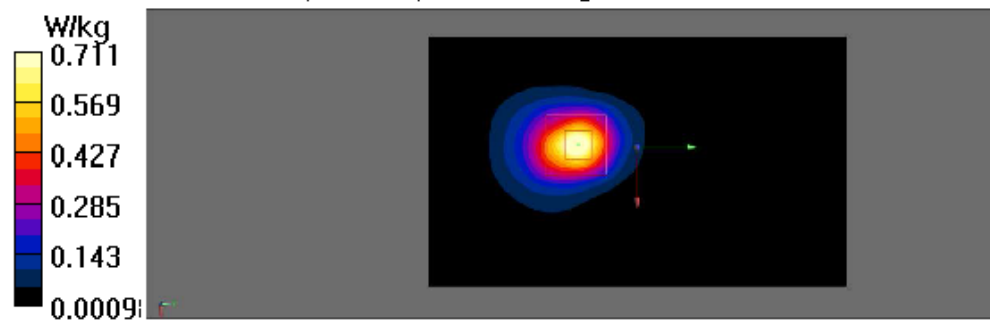

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH7(2442MHz Bottom)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH7(2442MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.786 W/kg

Configuration/CH7(2442MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.481 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 0.731 W/kg

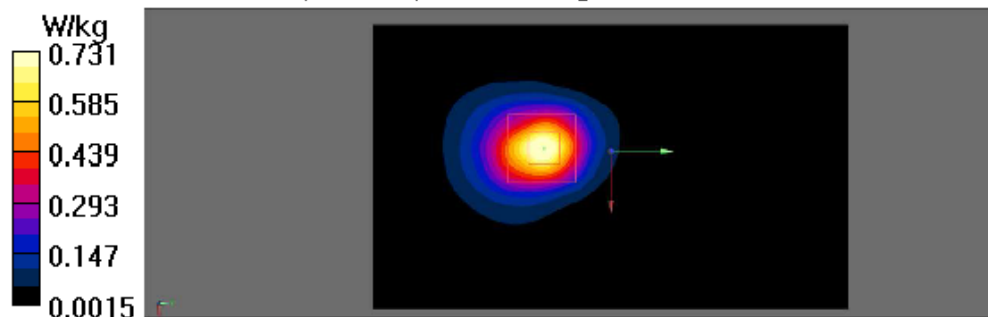

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Back)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.453 W/kg

Configuration/CH13(2472MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.944 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.260 W/kg

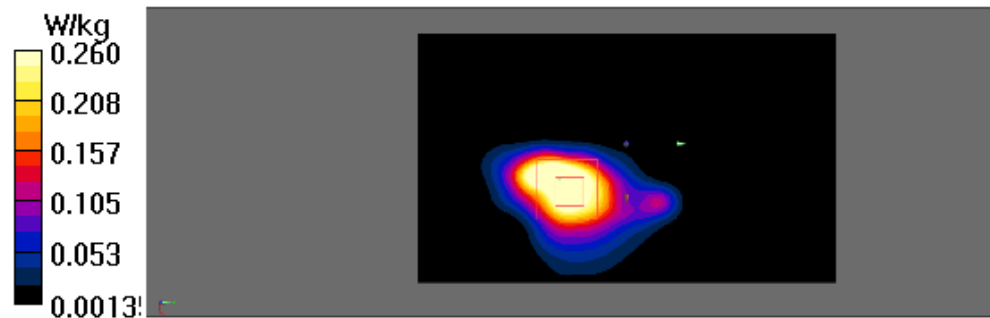

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Bottom)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.804 W/kg

Configuration/CH13(2472MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.478 V/m ; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.643 W/kg ; SAR(10 g) = 0.273 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.738 W/kg

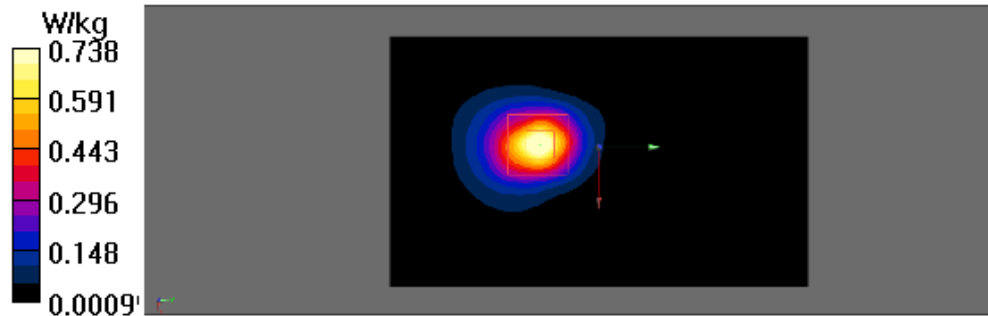

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Right)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0219 W/kg

Configuration/CH13(2472MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.210 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.0236 W/kg

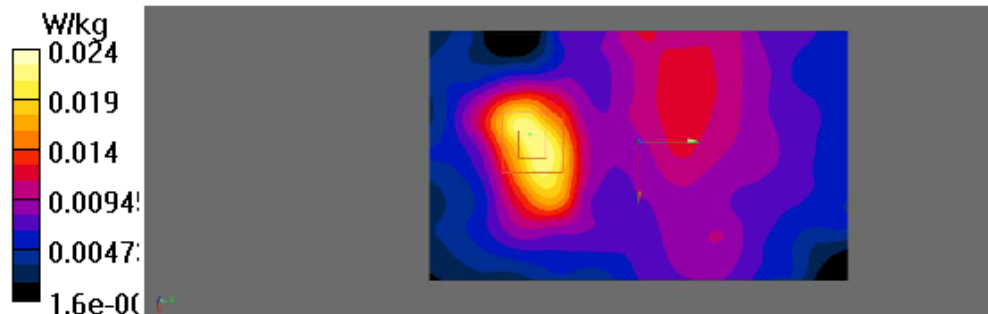

WIFI 2.4GHz

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH1(2412MHz Right)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 38.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH1(2412MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Configuration/CH1(2412MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.74 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.412 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 1.32 W/kg

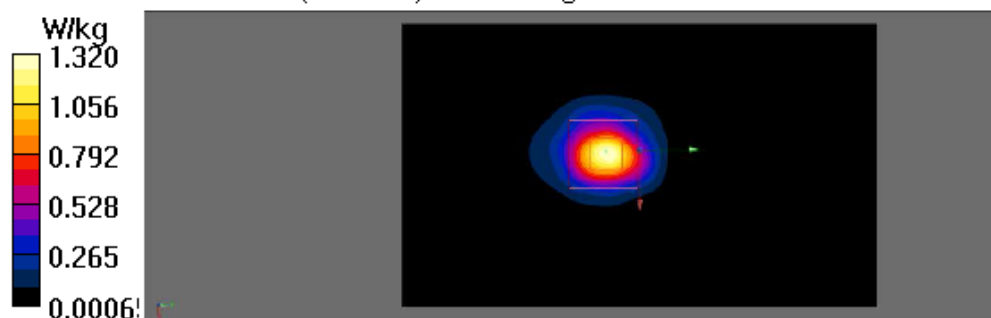

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH7(2442MHz Right)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH7(2442MHz Right)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.33 W/kg

Configuration/CH7(2442MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.77 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.5%

Maximum value of SAR (measured) = 1.31 W/kg

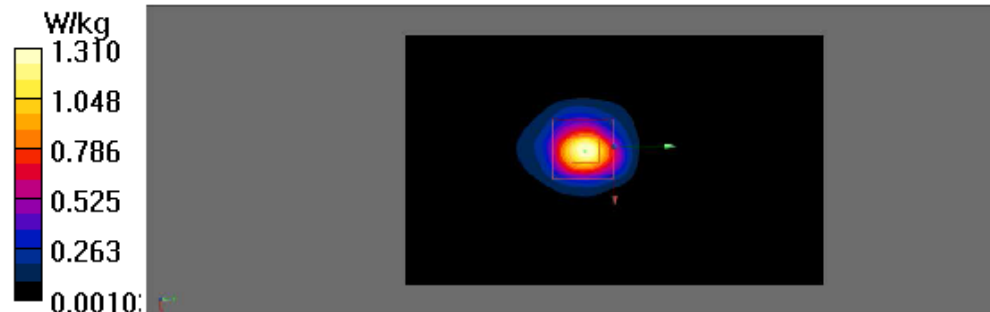

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Back)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.319 W/kg

Configuration/CH13(2472MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.553 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 0.311 W/kg

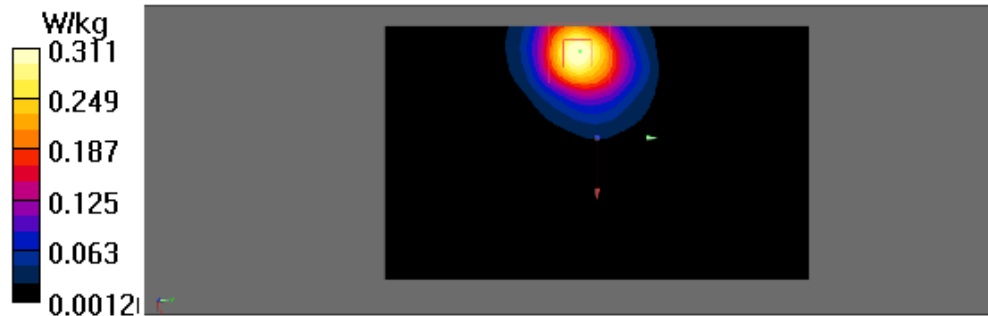

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Bottom)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0314 W/kg

Configuration/CH13(2472MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.979 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.0315 W/kg

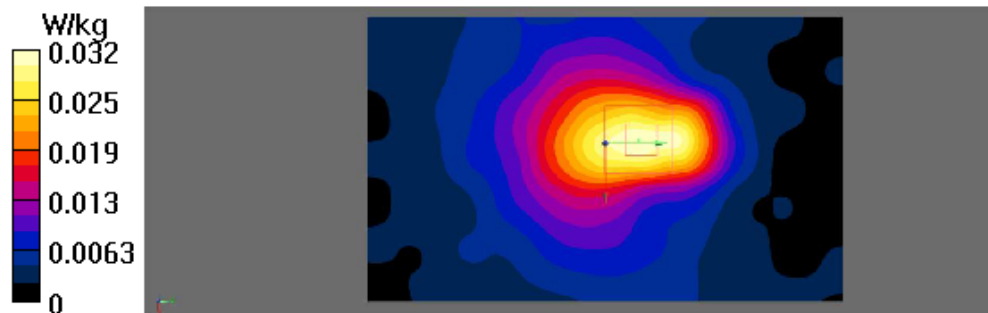

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Right)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.882 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.36 W/kg

Configuration/CH13(2472MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.59 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

Maximum value of SAR (measured) = 1.36 W/kg

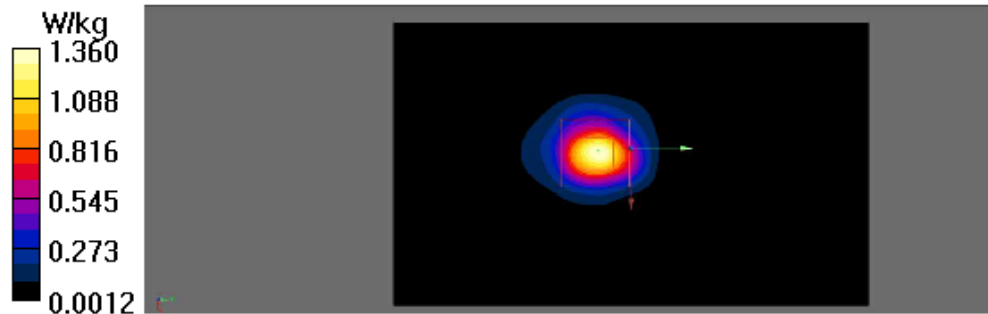

WIFI 5GHz Band 1

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH36(5180MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36(5180MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.359 W/kg

Configuration/CH36(5180MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.838 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.4%

Maximum value of SAR (measured) = 0.439 W/kg

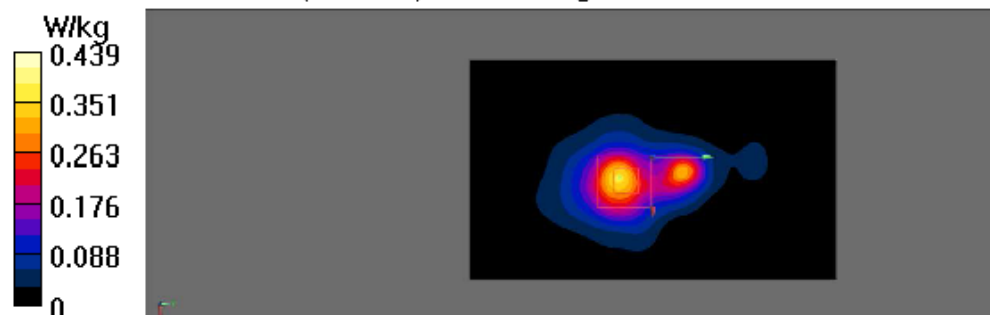

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH40(5200MHz Bottom)

DUT:Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.705 \text{ S/m}$; $\epsilon_r = 37.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5200 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40(5200MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.373 W/kg

Configuration/CH40(5200MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.808 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 16.2%

Maximum value of SAR (measured) = 0.452 W/kg

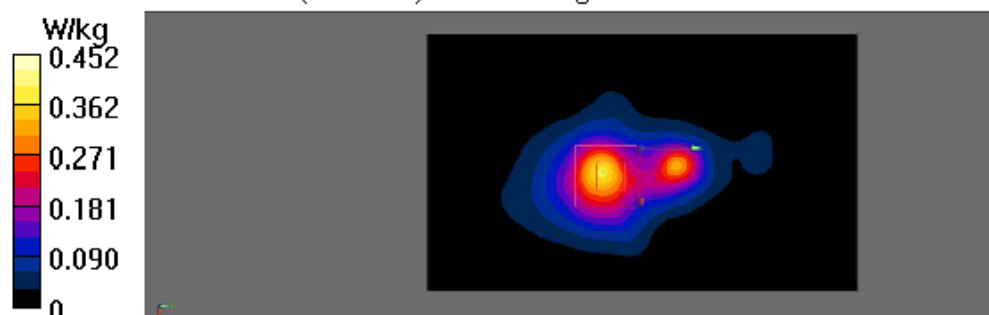

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.248 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.461 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 17.1%

Maximum value of SAR (measured) = 0.194 W/kg

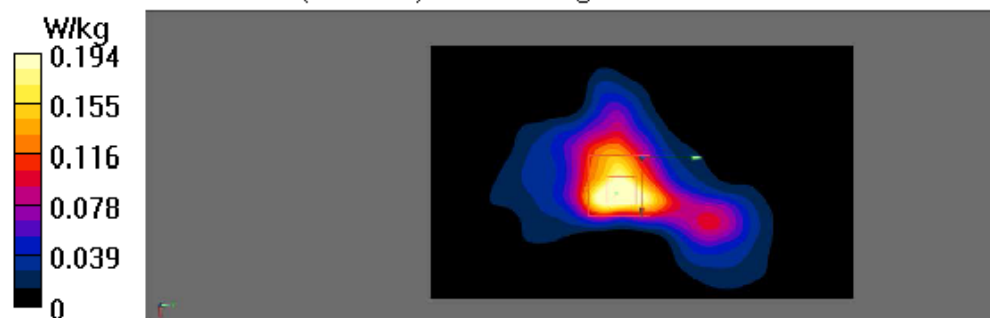

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Bottom)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.376 W/kg

Configuration/CH48(5240MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.073 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.7%

Maximum value of SAR (measured) = 0.458 W/kg

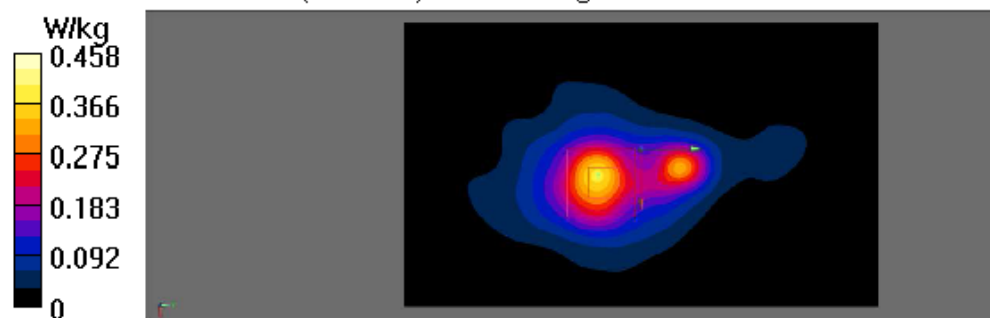

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Right)

DUT: Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0830 W/kg

Configuration/CH48(5240MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.403 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 16.3%

Maximum value of SAR (measured) = 0.0920 W/kg

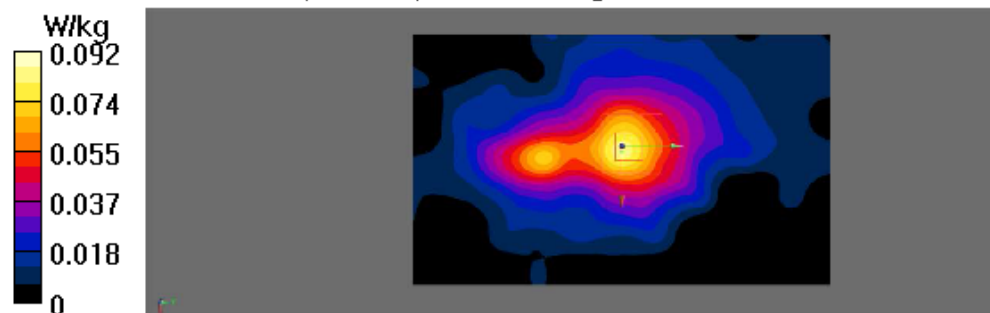

WIFI 5GHz Band 2

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH52(5260MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz; Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.784 \text{ S/m}$; $\epsilon_r = 36.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5260 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH52(5260MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.383 W/kg

Configuration/CH52(5260MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.969 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 15.6%

Maximum value of SAR (measured) = 0.478 W/kg

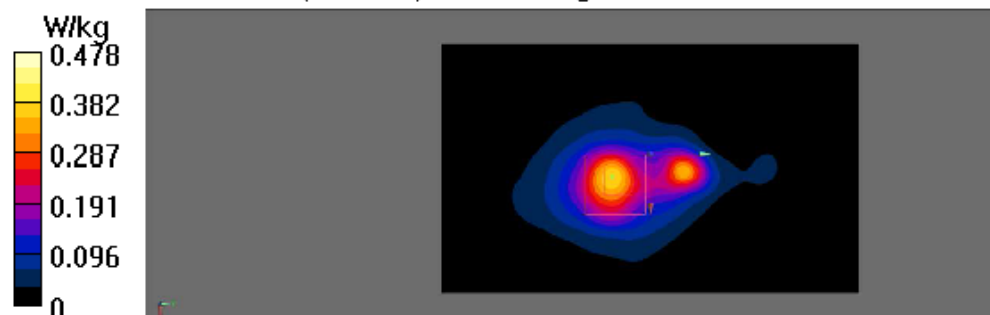

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH60(5300MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.828 \text{ S/m}$; $\epsilon_r = 36.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5300 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH60(5300MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.399 W/kg

Configuration/CH60(5300MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.993 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.9%

Maximum value of SAR (measured) = 0.487 W/kg

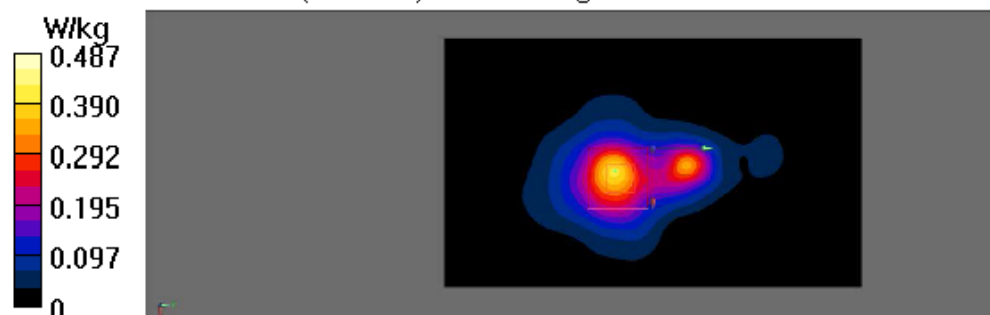

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.298 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.458 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 15.8%

Maximum value of SAR (measured) = 0.196 W/kg

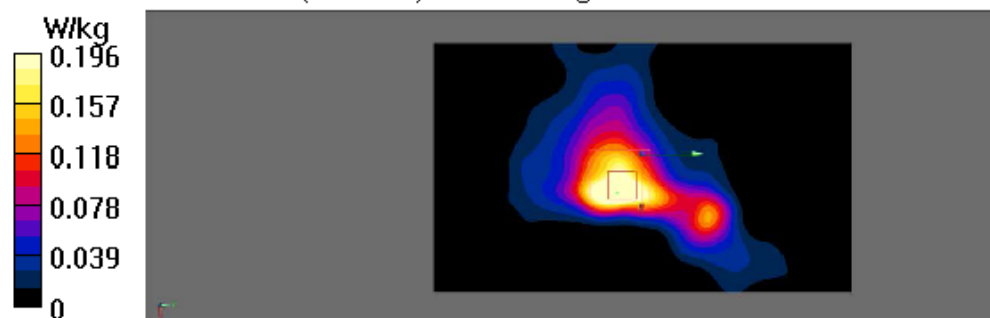

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.397 W/kg

Configuration/CH64(5320MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.998 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 16.1%

Maximum value of SAR (measured) = 0.490 W/kg

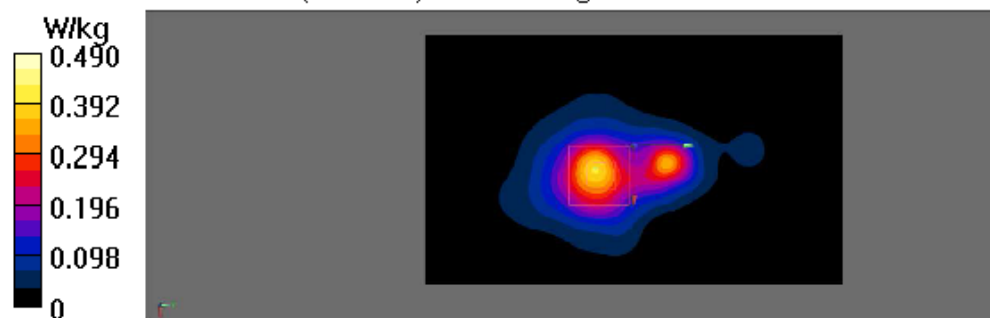

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz; Frequency: 5320 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0897 W/kg

Configuration/CH64(5320MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.493 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 15.9%

Maximum value of SAR (measured) = 0.0926 W/kg

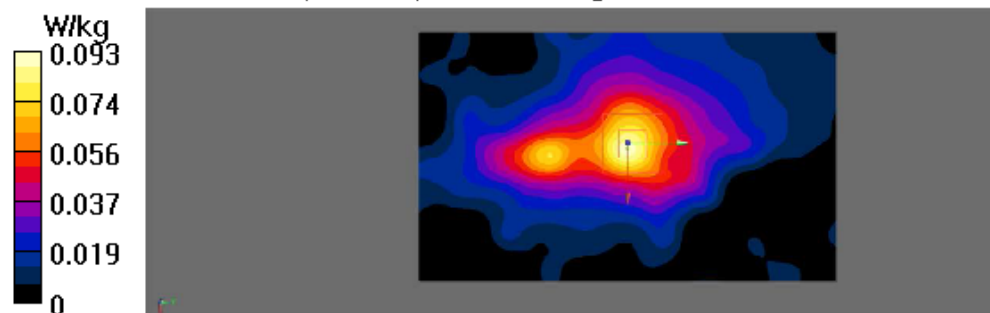

WIFI 5GHz Band 3

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.270 W/kg

Configuration/CH100(5500MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.788 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 16.2%

Maximum value of SAR (measured) = 0.230 W/kg

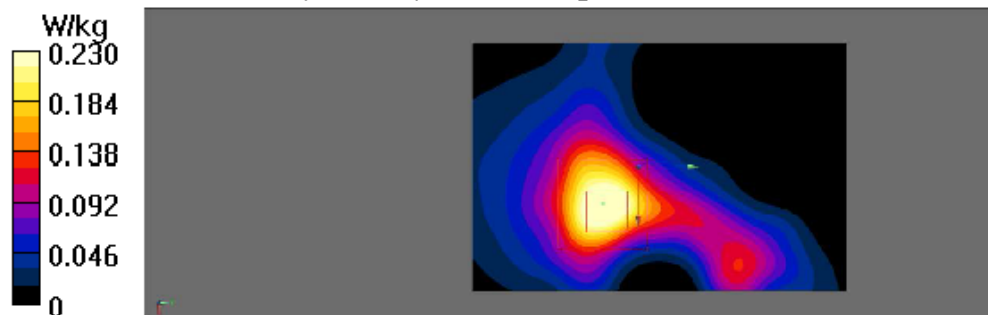

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.526 W/kg

Configuration/CH100(5500MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.092 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 15.9%

Maximum value of SAR (measured) = 0.557 W/kg

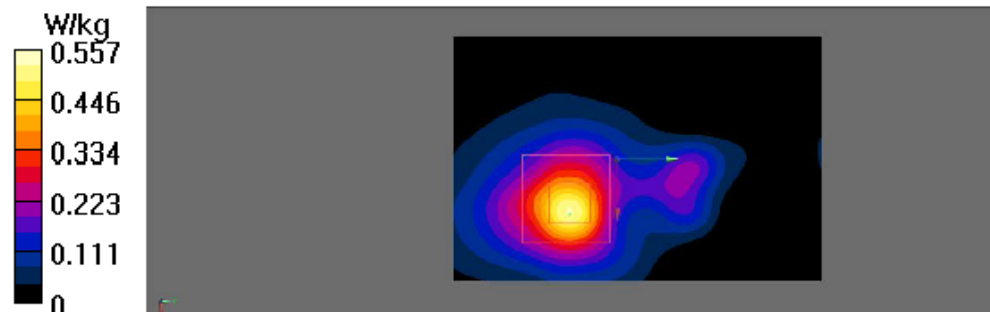

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.106 W/kg

Configuration/CH100(5500MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.600 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 18.4%

Maximum value of SAR (measured) = 0.107 W/kg

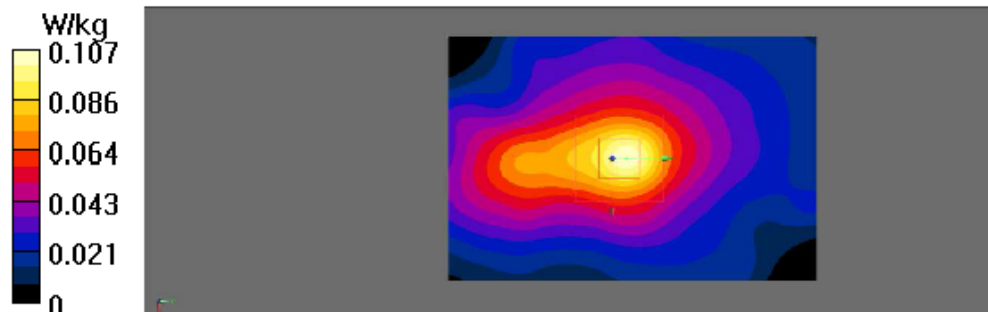

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH120(5600MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 36.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH120(5600MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.529 W/kg

Configuration/CH120(5600MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.088 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.4%

Maximum value of SAR (measured) = 0.558 W/kg

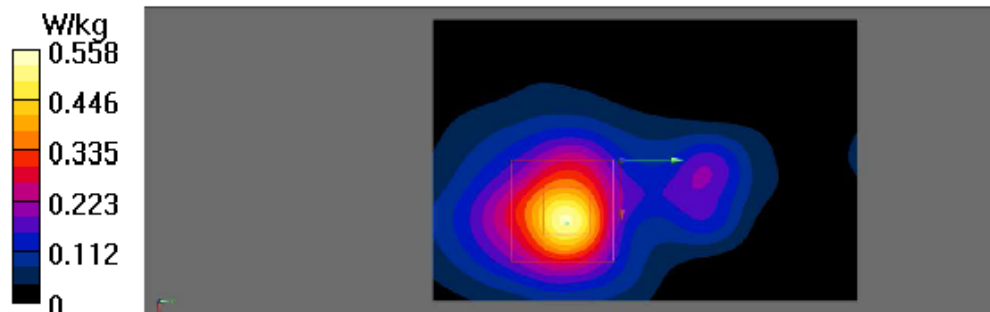

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH140(5700MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.557 W/kg

Configuration/CH140(5700MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.190 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.4%

Maximum value of SAR (measured) = 0.593 W/kg

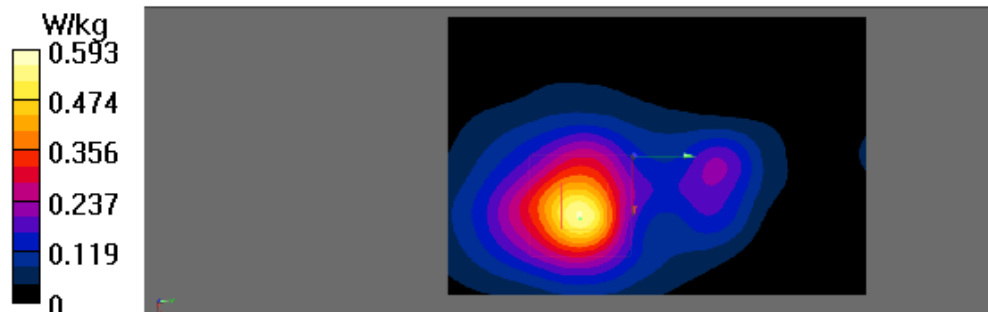

WIFI 5GHz Band 4

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.263 W/kg

Configuration/CH149(5745MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.791 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.5%

Maximum value of SAR (measured) = 0.247 W/kg

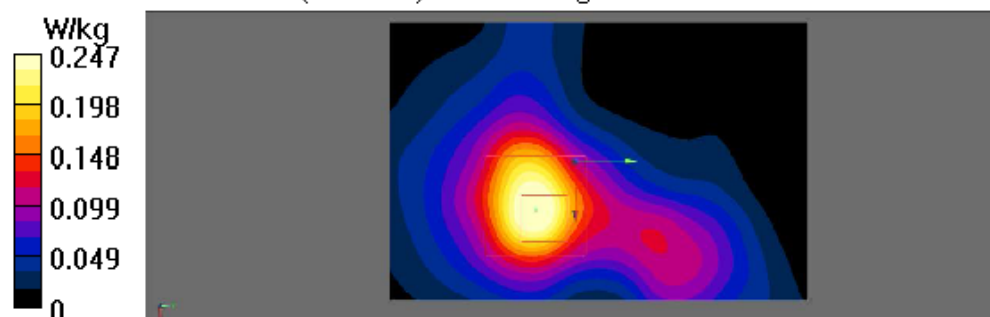

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.563 W/kg

Configuration/CH149(5745MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.282 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 4.13 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 15.4%

Maximum value of SAR (measured) = 0.597 W/kg

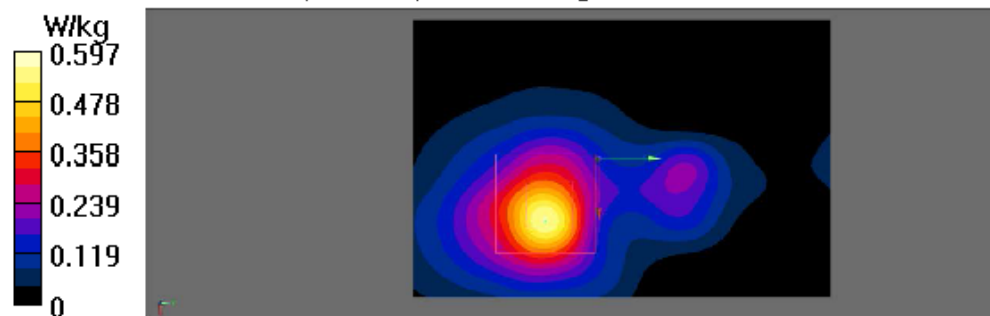

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Right)

DUT:Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.114 W/kg

Configuration/CH149(5745MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.642 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 21.7%

Maximum value of SAR (measured) = 0.116 W/kg

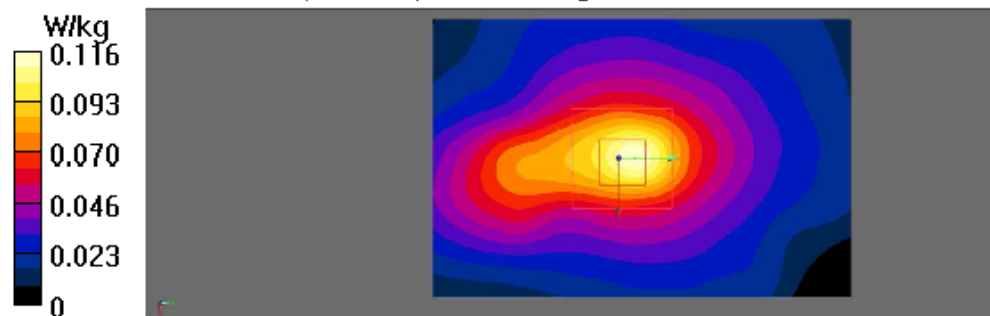

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH157(5785MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5785 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 35.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5785 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH157(5785MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.569 W/kg

Configuration/CH157(5785MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.155 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 15%

Maximum value of SAR (measured) = 0.606 W/kg

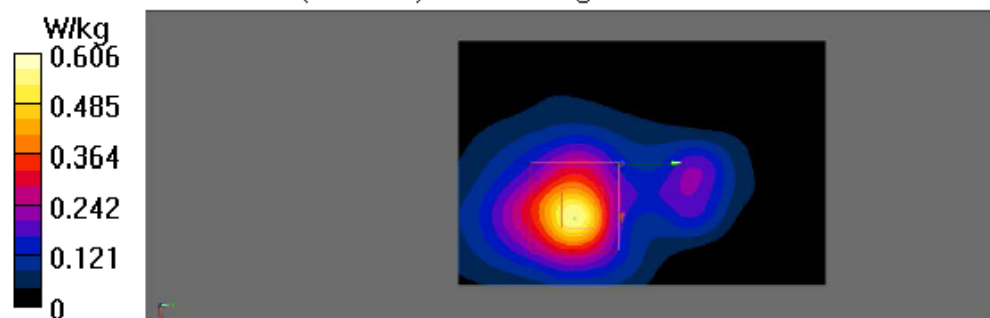

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH165(5825MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz; Frequency: 5825 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.573 W/kg

Configuration/CH165(5825MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.176 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 15.7%

Maximum value of SAR (measured) = 0.604 W/kg

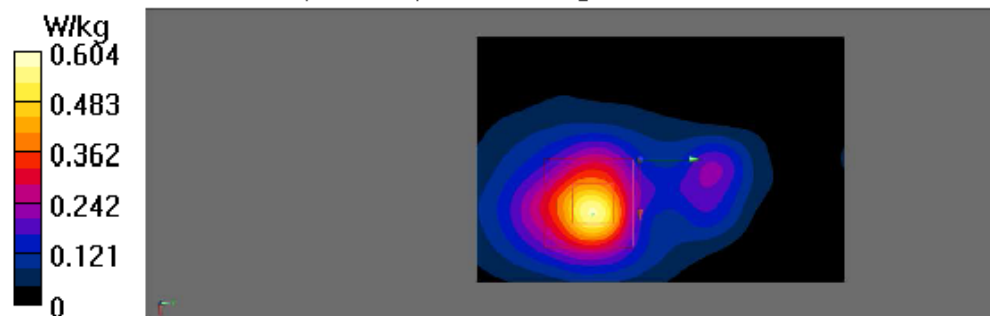

WIFI 5GHz Band 1
Ant 2:

Test Laboratory: Audix SAR Lab
CH36(5180MHz Righth)

Date: 07/05/2026

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication
System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication
System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36(5180MHz Right)/Area Scan (61x101x1): Interpolated
grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.09 W/kg

Configuration/CH36(5180MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.562 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.330 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 15.1%

Maximum value of SAR (measured) = 1.48 W/kg

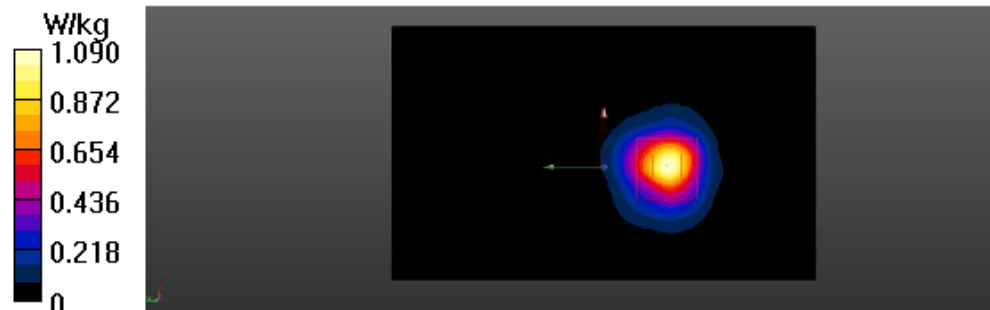

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH40(5200MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.705 \text{ S/m}$; $\epsilon_r = 37.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5200 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40(5200MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.11 W/kg

Configuration/CH40(5200MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.751 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 14.8%

Maximum value of SAR (measured) = 1.51 W/kg

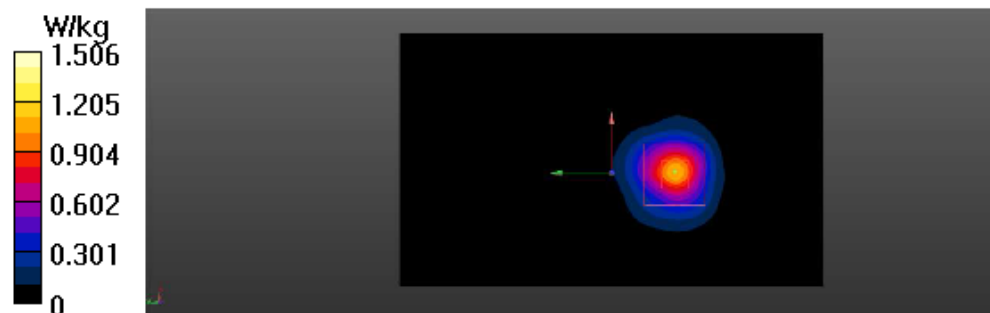

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Back)

DUT:Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.601 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.426 V/m ; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.601 W/kg ; SAR(10 g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 17.1%

Maximum value of SAR (measured) = 0.608 W/kg

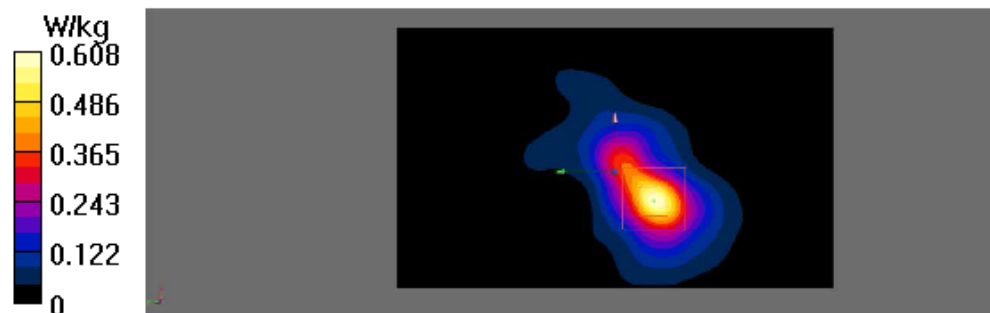

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0385 W/kg

Configuration/CH48(5240MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.635 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 16.6%

Maximum value of SAR (measured) = 0.0432 W/kg

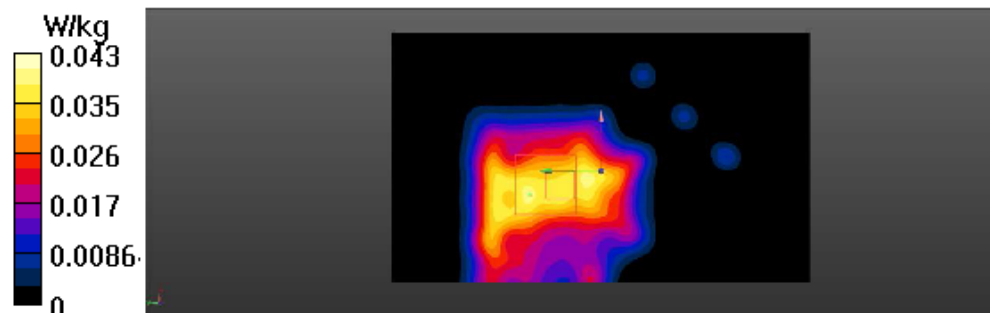

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Right)

DUT:Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.01 W/kg

Configuration/CH48(5240MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.781 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.302 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 15.3%

Maximum value of SAR (measured) = 1.15 W/kg

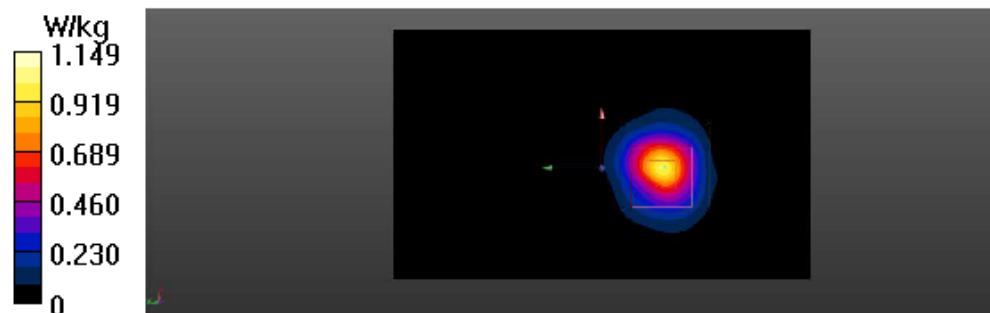

WIFI 5GHz Band 2

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH52(5260MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.784 \text{ S/m}$; $\epsilon_r = 36.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5260 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH52(5260MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.957 W/kg

Configuration/CH52(5260MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.933 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.289 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 14.6%

Maximum value of SAR (measured) = 1.25 W/kg

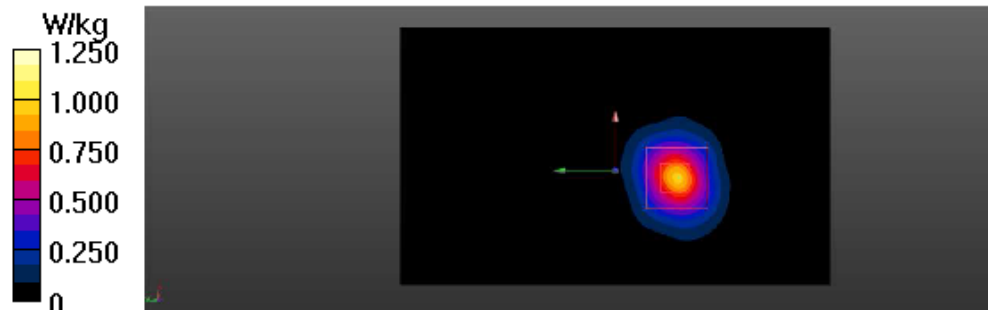

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH60(5300MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.828 \text{ S/m}$; $\epsilon_r = 36.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5300 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH60(5300MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.11 W/kg

Configuration/CH60(5300MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.168 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.340 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 14.1%

Maximum value of SAR (measured) = 1.50 W/kg

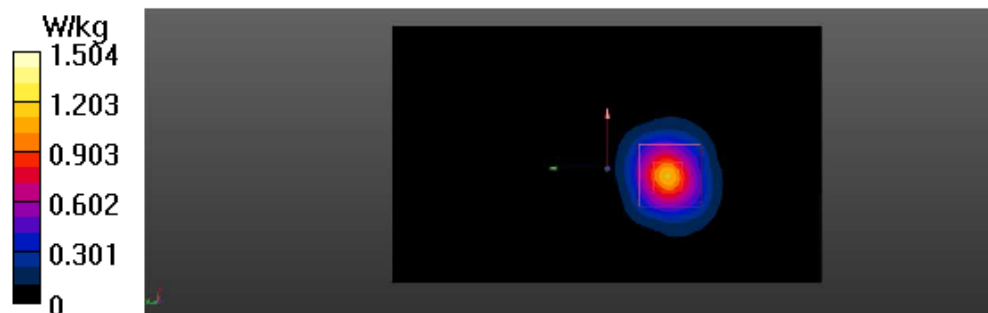

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.316 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.155 V/m ; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.262 W/kg ; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.307 W/kg

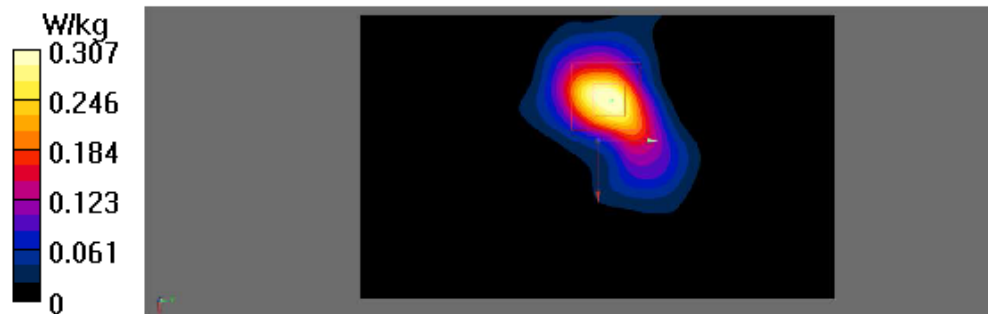

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0486 W/kg

Configuration/CH64(5320MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.208 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.0394 W/kg

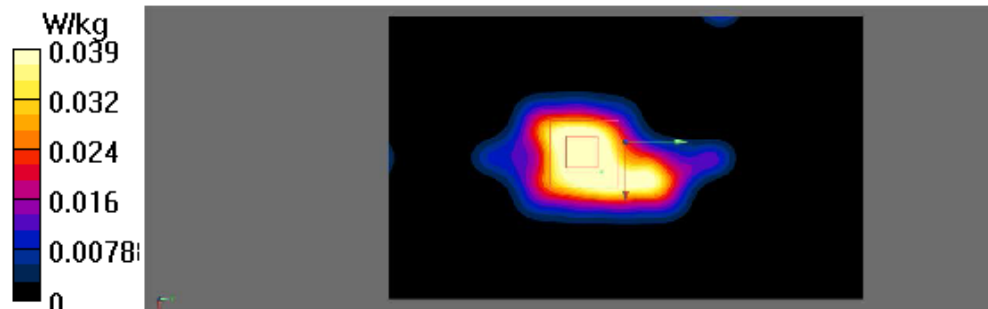

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.15 W/kg

Configuration/CH64(5320MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.868 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.49 W/kg

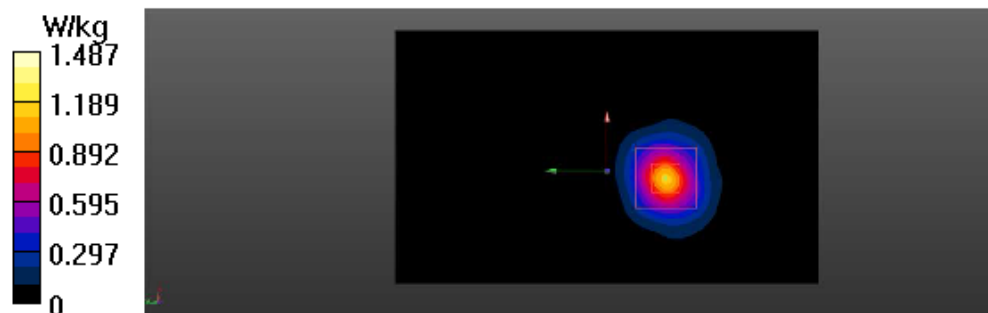

WIFI 5GHz Band 3

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.60 W/kg

Configuration/CH100(5500MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.072 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 4.08 W/kg

SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 1.65 W/kg

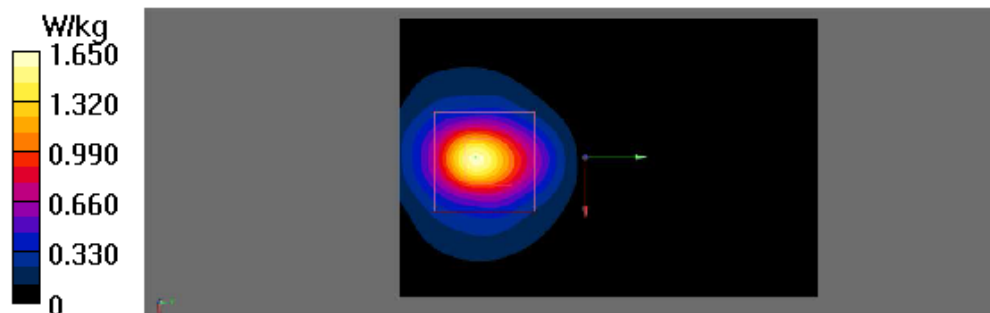

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH120(5600MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 36.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH120(5600MHz Right)/Area Scan (41x61x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.58 W/kg

Configuration/CH120(5600MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.031 V/m ; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 0.729 W/kg ; SAR(10 g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 1.67 W/kg

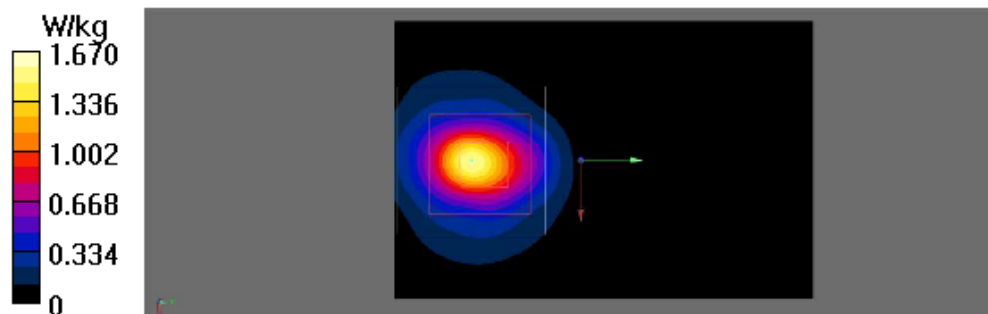

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.365 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.286 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.353 W/kg

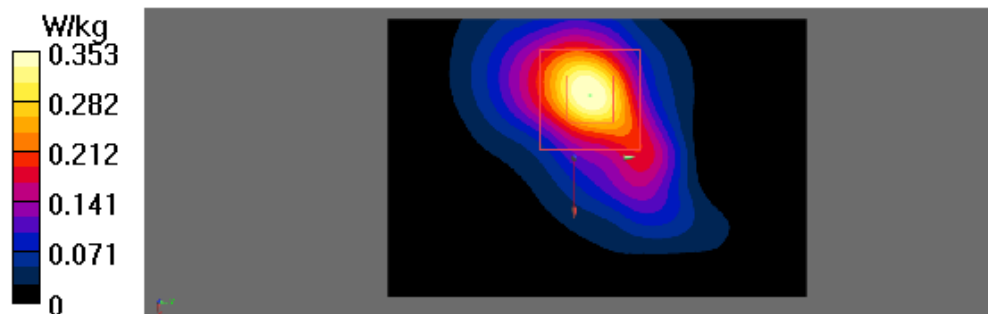

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH140(5700MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0459 W/kg

Configuration/CH140(5700MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.630 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.021 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.0527 W/kg

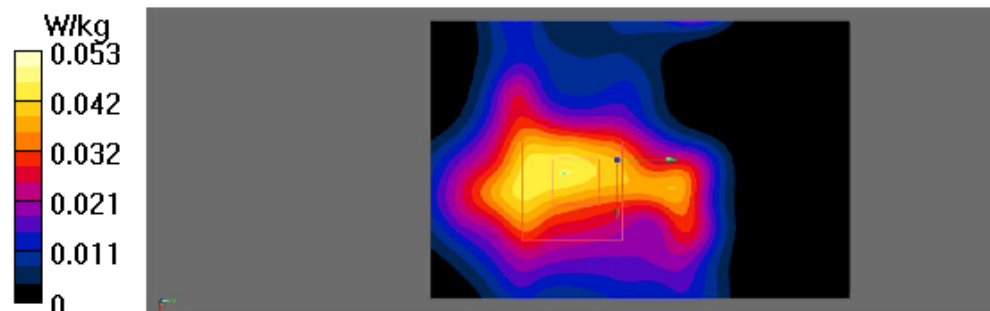

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH140(5700MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.231 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.67 W/kg

Configuration/CH140(5700MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.004 V/m ; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 4.39 W/kg

SAR(1 g) = 0.737 W/kg ; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 1.79 W/kg

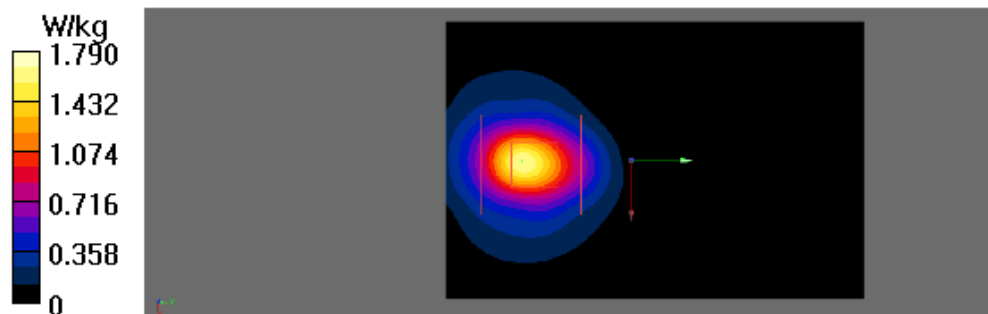

WIFI 5GHz Band 4

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.75 W/kg

Configuration/CH149(5745MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.110 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 4.77 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.91 W/kg

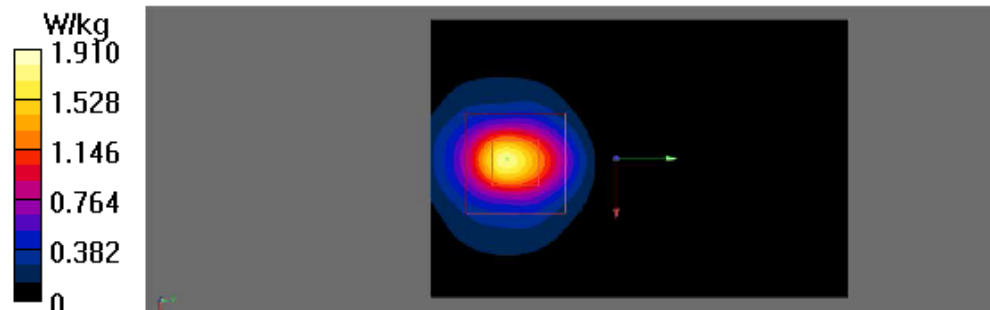

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH157(5785MHz Right)

DUT:Notebook Computer M/N:N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5785 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 35.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5785 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH157(5785MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.75 W/kg

Configuration/CH157(5785MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.365 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 4.79 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 1.91 W/kg

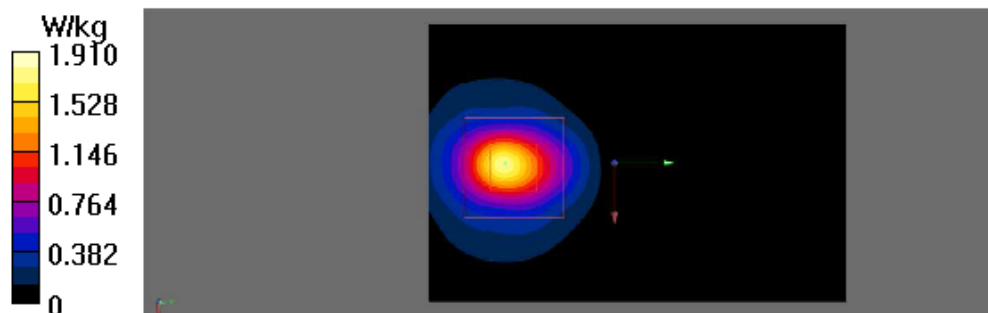

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH165(5825MHz Back)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.356 W/kg

Configuration/CH165(5825MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.837 V/m ; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.972 W/kg

SAR(1 g) = 0.314 W/kg ; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.358 W/kg

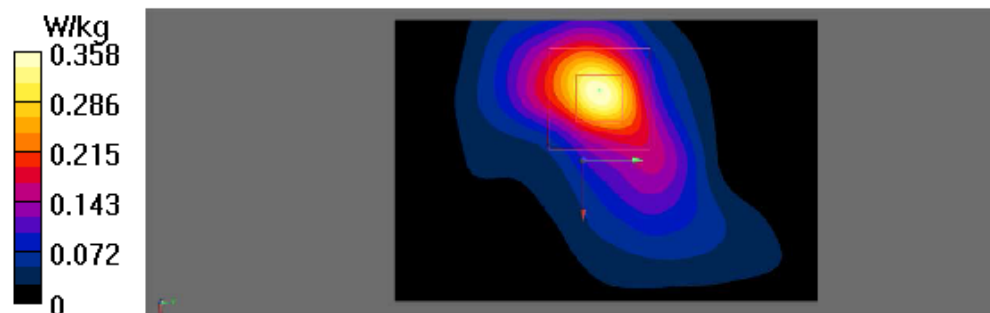

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH165(5825MHz Bottom)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0595 W/kg

Configuration/CH165(5825MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.577 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 0.0402 W/kg

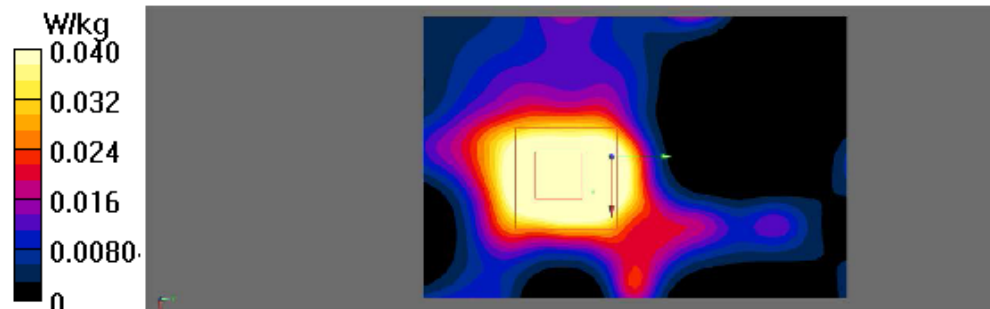

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH165(5825MHz Right)

DUT: Notebook Computer M/N: N25WB1

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.77 W/kg

Configuration/CH165(5825MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.856 V/m; Power Drift = 2.15 dB

Peak SAR (extrapolated) = 4.70 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.418 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 1.89 W/kg

