





Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Peak

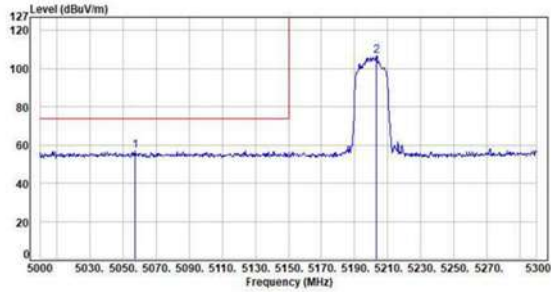

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5057.30	5.07	52.00	57.07	74.00	-16.93	Peak	400	101	P
2	5203.10	5.41	101.30	106.71	200.00	-93.29	Peak	400	101	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Average

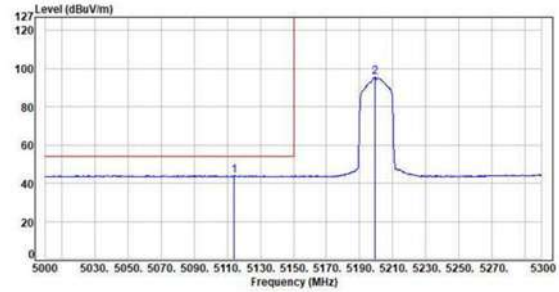

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5114.00	5.36	38.57	43.93	54.00	-10.07	Average	400	101	P
2	5199.20	5.40	90.10	95.50	200.00	-104.50	Average	400	101	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Peak

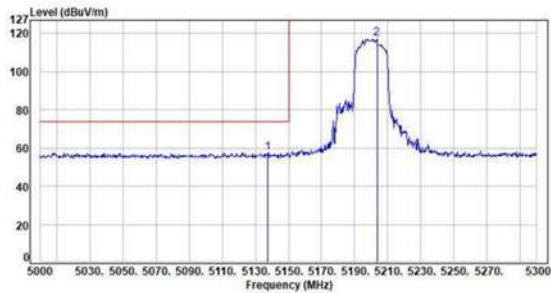

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5137.70	5.37	52.31	57.68	74.00	-16.32	Peak	100	358	P
2	5203.40	5.41	111.70	117.11	200.00	-82.89	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Average

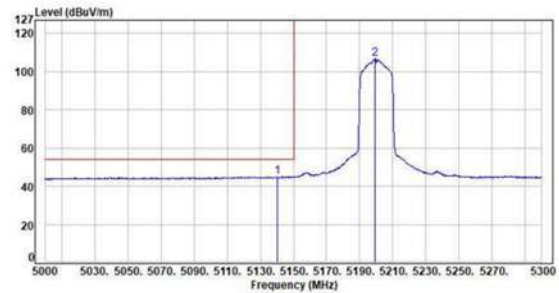


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.10	5.37	39.66	45.03	54.00	-8.97	Average	100	358	P
2	5199.20	5.40	101.13	106.53	200.00	-93.47	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Peak

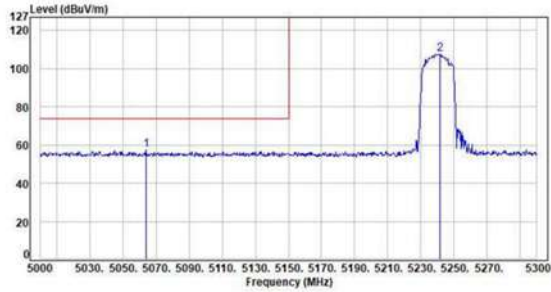

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5063.90	5.12	52.52	57.64	74.00	-16.36	Peak	328	96	P
2	5241.50	5.49	102.41	107.90	200.00	-92.10	Peak	328	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Average

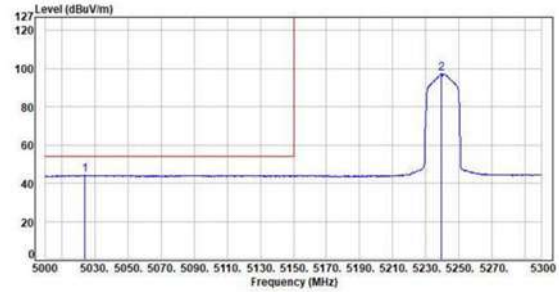

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5064.00	5.02	39.19	44.21	54.00	-9.79	Average	328	96	P
2	5239.40	5.49	91.98	97.47	200.00	-102.53	Average	328	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Peak

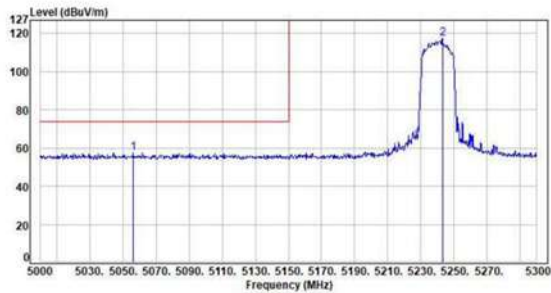

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5056.10	5.08	52.41	57.49	74.00	-16.51	Peak	100	358	P
2	5243.00	5.50	111.94	117.44	200.00	-82.56	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Average

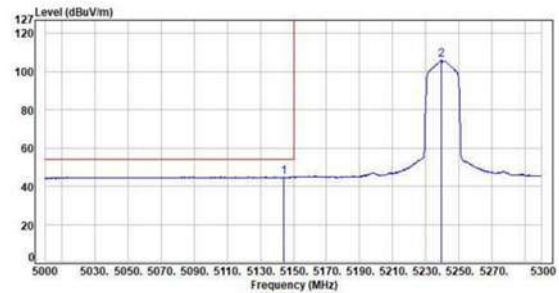


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5144.30	5.37	39.57	44.94	54.00	-9.06	Average	100	358	P
2	5239.40	5.49	100.57	106.06	200.00	-93.94	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Peak

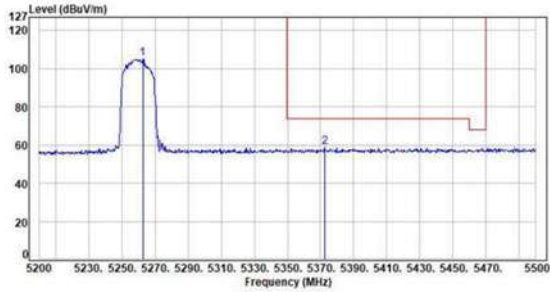

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5262.70	5.57	99.75	105.32	200.00	-94.68	Peak	394	102	P
2	5372.50	5.81	53.18	58.99	74.00	-15.01	Peak	394	102	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Average

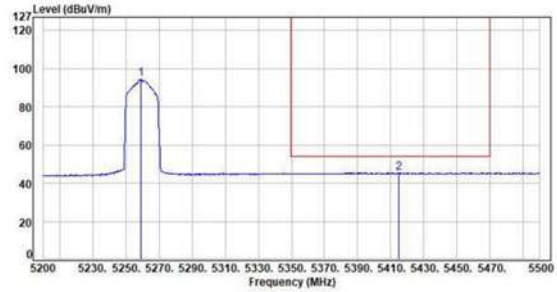

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	88.94	94.49	200.00	-105.51	Average	394	102	P
2	5414.00	5.88	39.62	45.50	74.00	-28.50	Average	394	102	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Peak

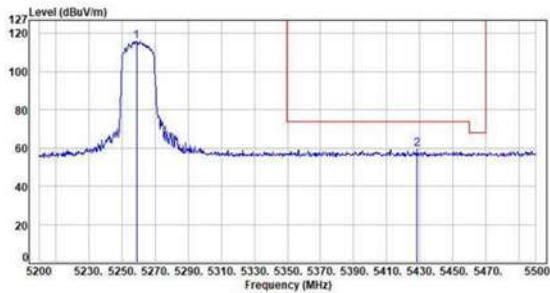

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5258.00	5.55	110.41	115.96	200.00	-84.04	Peak	140	358	P
2	5428.30	5.88	53.60	59.48	74.00	-14.52	Peak	140	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Average

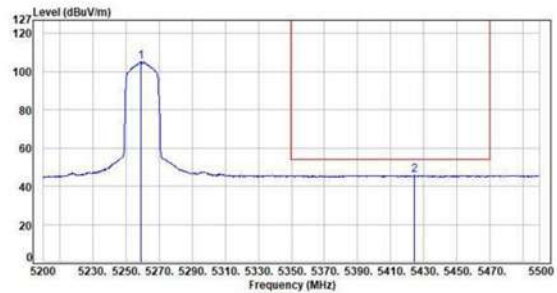


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	99.86	105.41	200.00	-94.59	Average	140	358	P
2	5424.40	5.87	39.77	45.64	74.00	-28.36	Average	140	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Peak

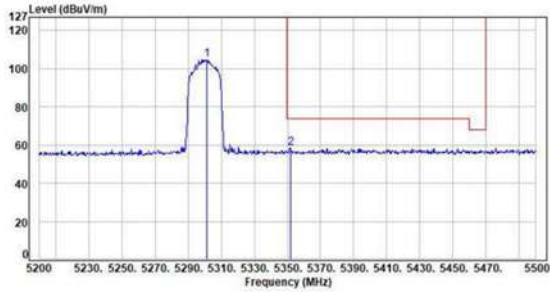

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5301.40	5.74	99.23	104.97	200.00	-95.03	Peak	100	220	P
2	5351.00	5.75	52.90	58.65	74.00	-15.35	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Average

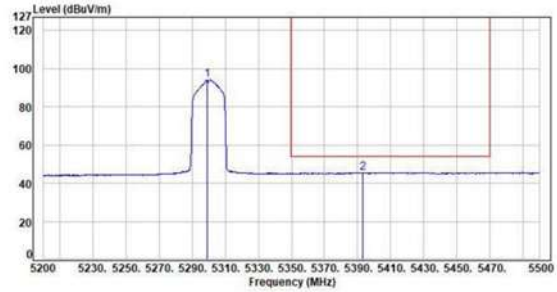

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	88.51	94.24	200.00	-105.76	Average	100	220	P
2	5393.20	5.86	39.63	45.49	54.00	-8.51	Average	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Peak

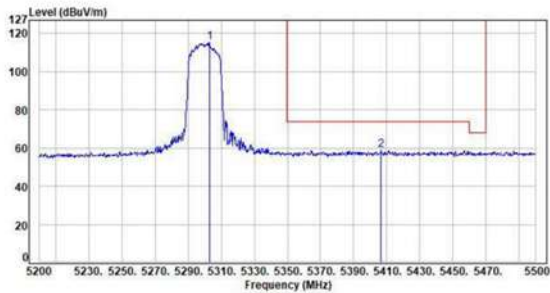

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5302.90	5.74	109.70	115.44	200.00	-84.56	Peak	156	357	P
2	5406.70	5.87	52.88	58.75	74.00	-15.25	Peak	156	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Average

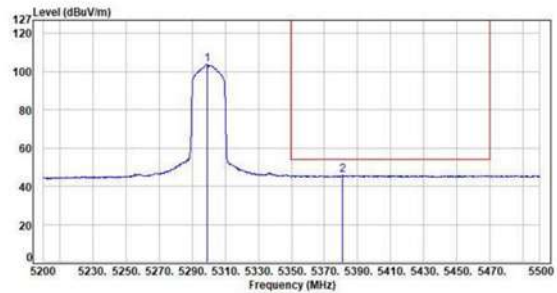


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	98.31	104.04	200.00	-95.96	Average	156	357	P
2	5380.90	5.83	39.84	45.67	54.00	-8.33	Average	156	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Peak

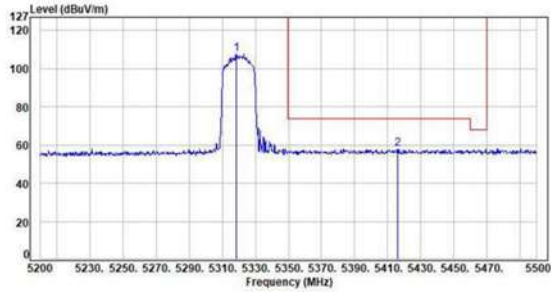

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5318.50	5.74	102.00	107.02	200.00	-92.18	Peak	352	93	P
2	5416.00	5.88	52.22	58.10	74.00	-15.90	Peak	352	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Average

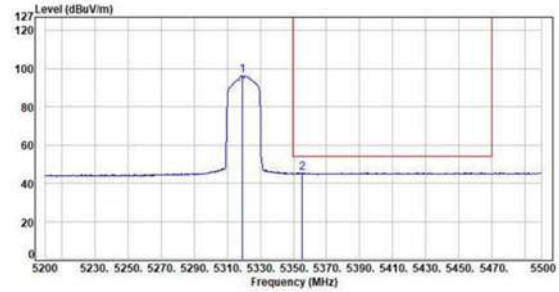

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5319.10	5.73	90.66	96.39	200.00	-103.61	Average	352	93	P
2	5355.10	5.76	39.05	44.81	54.00	-8.59	Average	352	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Peak

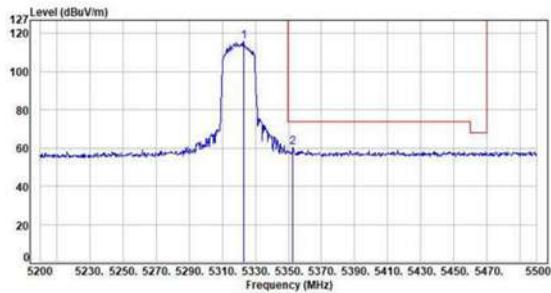

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5323.00	5.73	110.09	115.82	200.00	-84.18	Peak	155	358	P
2	5352.70	5.76	54.49	60.25	74.00	-13.75	Peak	155	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Average

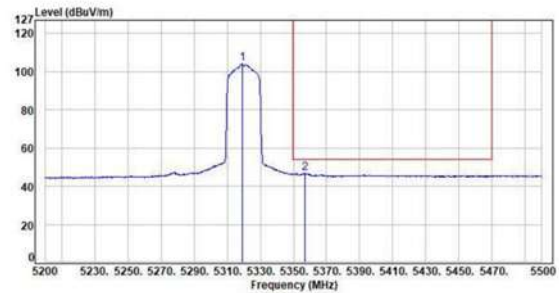


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5319.10	5.73	98.49	104.22	200.00	-95.78	Average	155	358	P
2	5356.90	5.75	41.10	46.85	54.00	-7.15	Average	155	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Peak

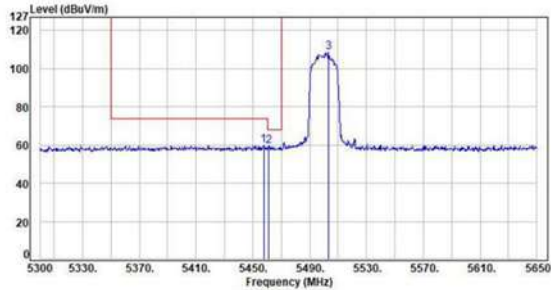

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	5.87	53.86	59.73	74.00	-14.27	Peak	376	96	P
2	5461.35	5.87	53.47	59.34	68.20	-8.06	Peak	376	96	P
3	5503.00	5.81	102.76	108.57	200.00	-91.43	Peak	376	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Average

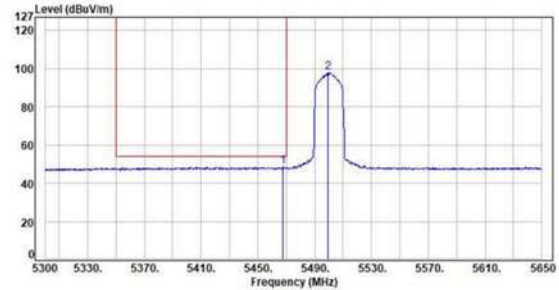

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5467.65	5.86	42.04	48.70	54.00	-5.30	Average	376	96	P
2	5499.15	5.81	92.16	97.97	200.00	-102.03	Average	376	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Peak

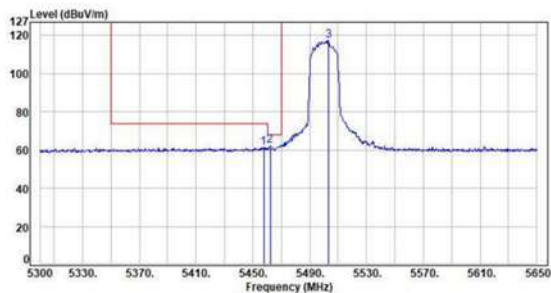

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	5.87	55.55	61.42	74.00	-12.58	Peak	100	360	P
2	5462.05	5.87	56.25	62.12	68.20	-6.08	Peak	100	360	P
3	5503.00	5.81	111.54	117.35	200.00	-82.65	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Average

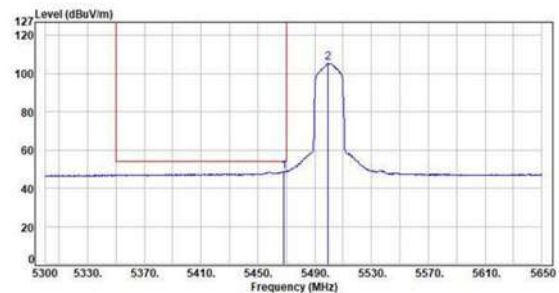


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.35	5.86	43.12	48.98	54.00	-5.02	Average	100	360	P
2	5499.15	5.81	99.79	105.60	200.00	-94.40	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Peak

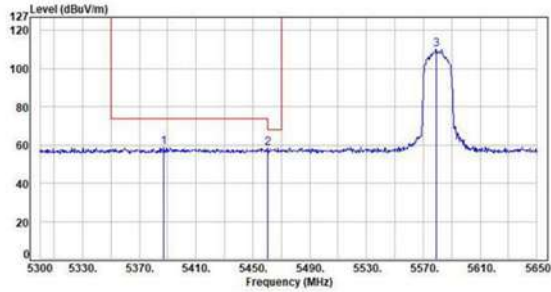

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5387.15	5.83	52.87	58.70	74.00	-15.30	Peak	384	88	P
2	5460.30	5.87	52.40	58.27	68.20	-9.93	Peak	384	88	P
3	5578.95	5.83	104.28	110.11	200.00	-89.89	Peak	384	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Average

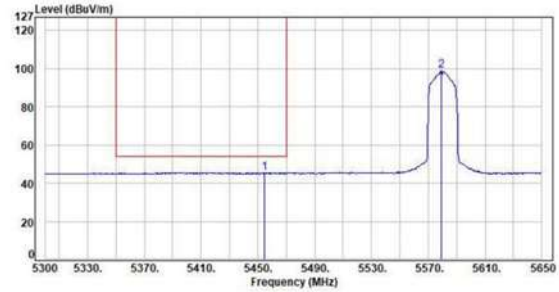

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5454.35	5.88	39.62	45.50	54.00	-8.50	Average	384	88	P
2	5579.30	5.83	92.97	98.80	200.00	-101.20	Average	384	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Peak

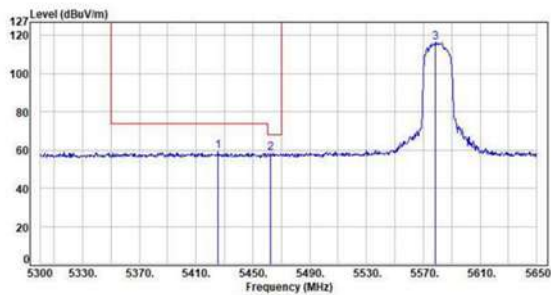

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5425.65	5.87	53.66	59.53	74.00	-14.47	Peak	105	360	P
2	5462.40	5.87	52.71	58.58	68.20	-9.62	Peak	105	360	P
3	5578.60	5.83	110.79	116.62	200.00	-83.38	Peak	105	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Average

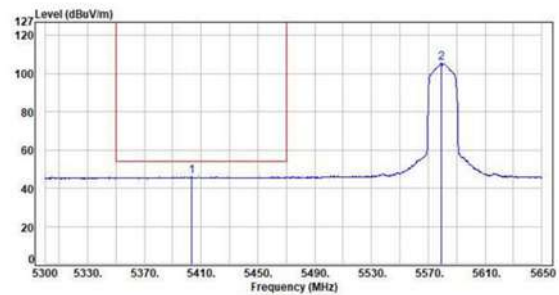


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5403.60	5.88	40.27	46.15	54.00	-7.85	Average	105	360	P
2	5579.30	5.83	99.83	105.66	200.00	-94.34	Average	105	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Peak

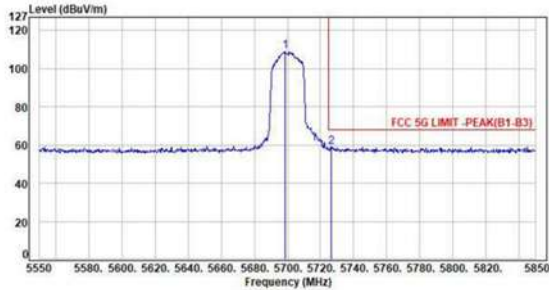

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5698.50	5.76	103.29	109.05	200.00	-90.95	Peak	263	87	P
2	5726.40	5.81	53.16	58.97	68.20	-9.23	Peak	263	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Average

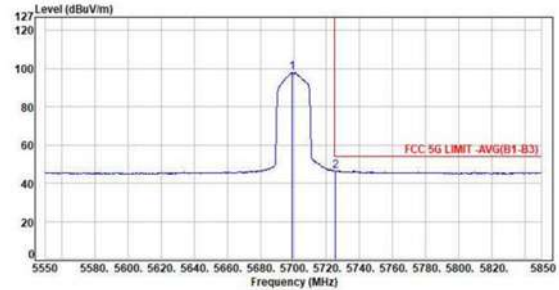

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5699.40	5.76	92.50	98.26	200.00	-101.74	Average	263	87	P
2	5725.50	5.81	40.69	46.50	54.00	-7.50	Average	263	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Peak

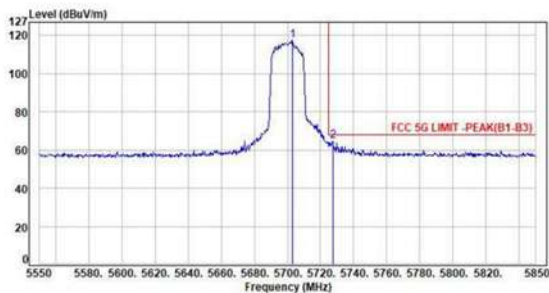

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5703.00	5.77	111.70	117.47	200.00	-82.53	Peak	100	327	P
2	5727.30	5.81	58.97	64.78	68.20	-3.42	Peak	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Average

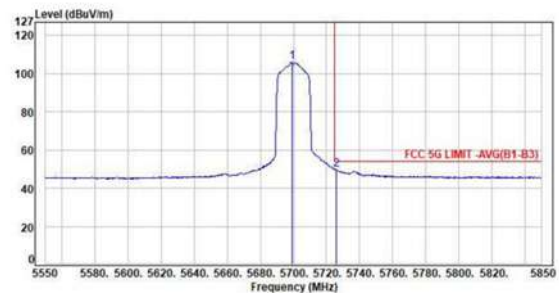

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5699.10	5.76	100.41	106.17	200.00	-93.83	Average	100	327	P
2	5725.00	5.81	43.89	49.70	54.00	-4.30	Average	100	327	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NSS1 MCS0

Pol : Vertical

Detector : Peak

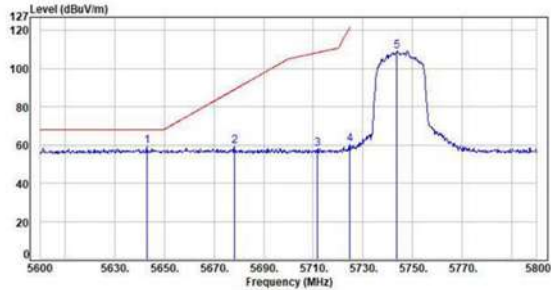


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5643.00	5.04	53.39	59.23	68.20	-8.97	Peak	375	260	P
2	5678.20	5.79	53.39	59.18	69.07	-9.89	Peak	375	260	P
3	5711.80	5.78	52.17	57.95	108.50	-50.55	Peak	375	260	P
4	5724.60	5.82	54.34	60.16	121.29	-61.13	Peak	375	260	P
5	5743.60	5.85	103.40	109.25	200.00	-90.75	Peak	375	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0

Pol : Horizontal

Detector : Peak

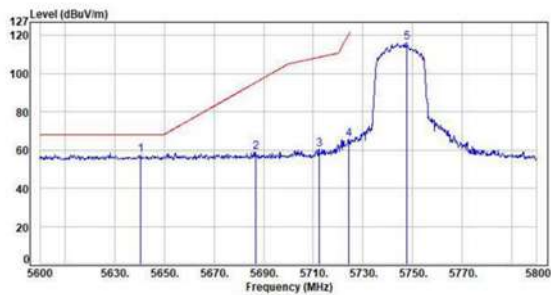

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5640.40	5.85	51.56	57.41	68.20	-10.79	Peak	100	328	P
2	5686.00	5.79	53.09	58.88	95.43	-36.55	Peak	100	328	P
3	5712.40	5.78	54.75	60.53	108.67	-48.14	Peak	100	328	P
4	5724.20	5.82	59.66	65.48	120.30	-54.80	Peak	100	328	P
5	5747.00	5.87	110.37	116.24	200.00	-83.76	Peak	100	328	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0

Pol : Vertical

Detector : Peak

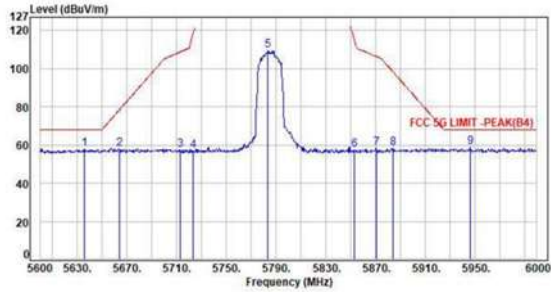

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5636.00	5.04	52.28	58.12	68.20	-10.08	Peak	315	83	P
2	5663.60	5.81	52.20	58.01	78.26	-20.25	Peak	315	83	P
3	5713.20	5.79	51.82	57.61	108.90	-51.29	Peak	315	83	P
4	5723.20	5.82	51.34	57.16	118.10	-60.94	Peak	315	83	P
5	5783.60	5.75	103.64	109.39	200.00	-90.61	Peak	315	83	P
6	5853.20	5.82	51.53	57.35	114.90	-57.55	Peak	315	83	P
7	5870.80	5.93	52.31	58.24	106.38	-48.14	Peak	315	83	P
8	5884.00	6.00	52.26	58.26	96.54	-40.28	Peak	315	83	P
9	5946.80	6.12	52.73	58.85	68.20	-9.35	Peak	315	83	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH157 NSS1 MCS0

Pol : Horizontal

Detector : Peak

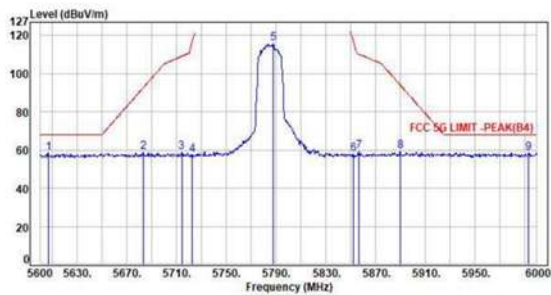

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5606.00	5.84	52.60	58.44	68.20	-9.76	Peak	100	352	P
2	5683.20	5.79	52.97	58.76	92.77	-34.01	Peak	100	352	P
3	5714.00	5.79	53.34	59.13	109.12	-49.99	Peak	100	352	P
4	5722.40	5.81	51.55	57.36	116.27	-58.91	Peak	100	352	P
5	5780.00	5.74	110.18	115.92	200.00	-84.08	Peak	100	352	P
6	5852.00	5.80	52.11	57.91	117.64	-59.73	Peak	100	352	P
7	5856.40	5.85	53.33	59.18	110.41	-51.23	Peak	100	352	P
8	5890.00	6.06	53.45	59.51	94.10	-34.59	Peak	100	352	P
9	5993.20	6.22	52.34	58.56	68.20	-9.64	Peak	100	352	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Vertical Detector : Peak

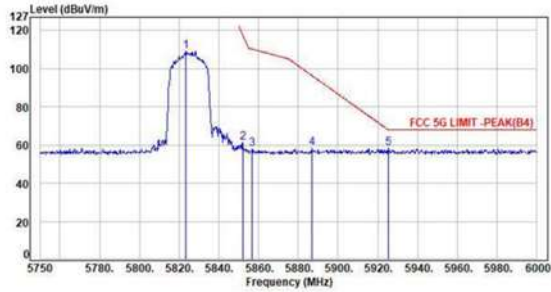

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5823.50	5.75	103.42	109.17	200.00	-90.83	Peak	100	261	P
2	5852.00	5.00	55.63	61.43	117.64	-56.21	Peak	100	261	P
3	5856.75	5.85	51.87	57.72	110.31	-52.59	Peak	100	261	P
4	5887.00	6.02	52.44	58.46	96.32	-37.86	Peak	100	261	P
5	5925.50	6.11	52.10	58.21	68.20	-9.99	Peak	100	261	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Peak

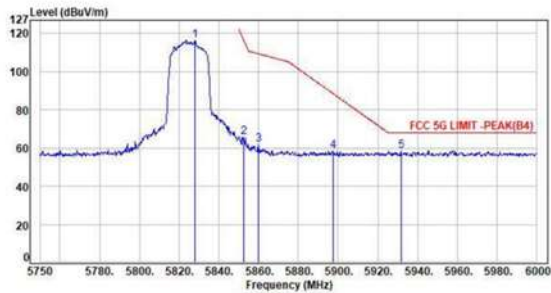


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5828.00	5.75	110.83	116.58	200.00	-83.42	Peak	100	329	P
2	5852.50	5.81	59.76	65.57	116.50	-50.93	Peak	100	329	P
3	5859.75	5.06	55.81	61.67	109.47	-47.80	Peak	100	329	P
4	5897.50	6.10	52.40	58.50	88.55	-30.05	Peak	100	329	P
5	5931.75	6.12	52.42	58.54	68.20	-9.66	Peak	100	329	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Peak

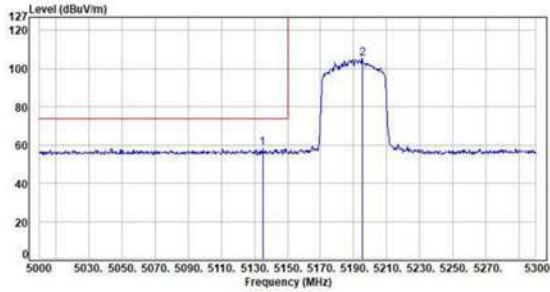

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5135.00	5.37	53.17	58.54	74.00	-15.46	Peak	314	98	P
2	5195.30	5.39	99.78	105.17	200.00	-94.83	Peak	314	98	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Average

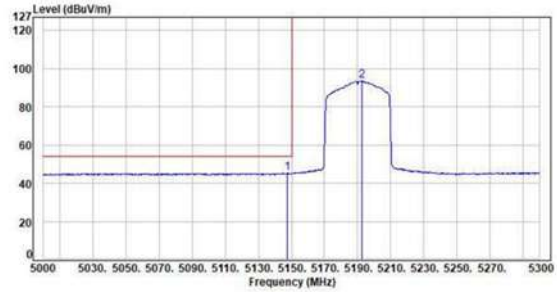

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.60	5.37	39.98	45.35	54.00	-8.65	Average	314	98	P
2	5192.30	5.39	88.34	93.73	200.00	-106.27	Average	314	98	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Peak

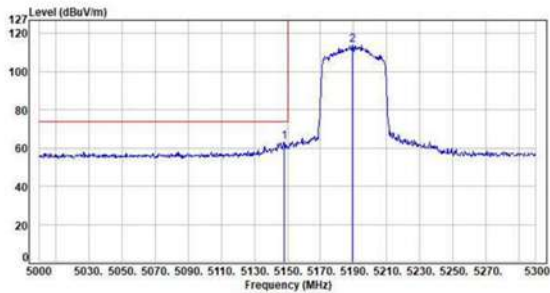

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.90	5.37	57.80	63.17	74.00	-10.83	Peak	100	0	P
2	5189.00	5.39	103.13	108.52	200.00	-91.48	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Average

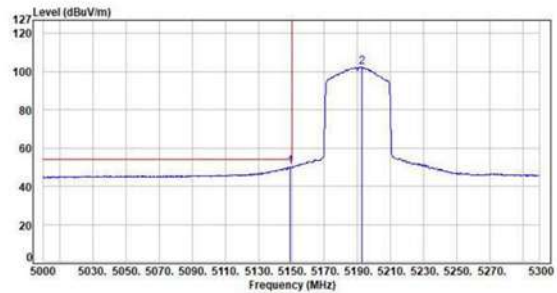


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5149.40	5.37	44.65	50.02	54.00	-3.98	Average	100	0	P
2	5192.30	5.39	91.77	97.16	200.00	-102.84	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Peak

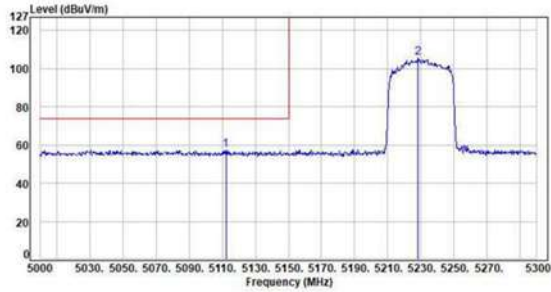

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5112.20	5.36	52.05	57.41	74.00	-16.59	Peak	345	94	P
2	5228.00	5.47	100.14	105.61	200.00	-94.39	Peak	345	94	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Average

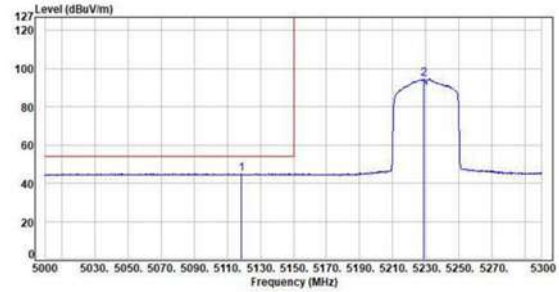

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5112.50	5.36	39.51	44.87	54.00	-9.13	Average	345	94	P
2	5228.00	5.47	98.96	104.43	200.00	-95.57	Average	345	94	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Peak

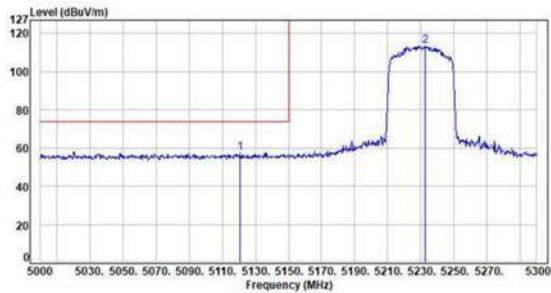

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.90	5.36	52.25	57.61	74.00	-16.39	Peak	100	360	P
2	5232.00	5.47	108.12	113.59	200.00	-86.41	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Average

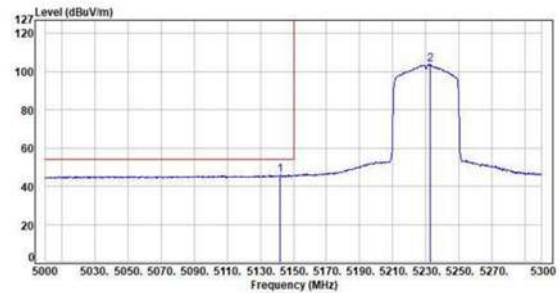


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5142.20	5.38	40.69	46.07	54.00	-7.93	Average	100	360	P
2	5232.50	5.46	98.24	103.70	200.00	-96.30	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Peak

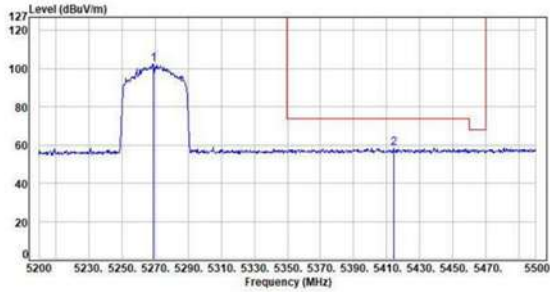

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5269.00	5.60	96.55	102.15	200.00	-97.85	Peak	100	210	P
2	5414.20	5.67	52.57	58.44	74.00	-15.56	Peak	100	210	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Average

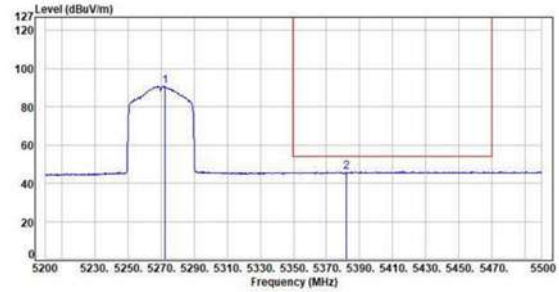

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5272.30	5.61	85.20	90.61	200.00	-109.19	Average	100	210	P
2	5382.10	5.62	40.05	45.67	54.00	-8.13	Average	100	210	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Peak

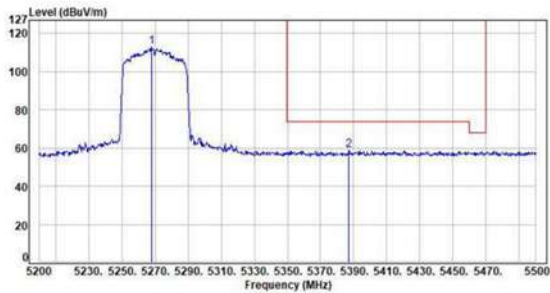

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5267.00	5.60	107.19	112.79	200.00	-87.21	Peak	100	360	P
2	5387.20	5.83	52.85	58.68	74.00	-15.32	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Average

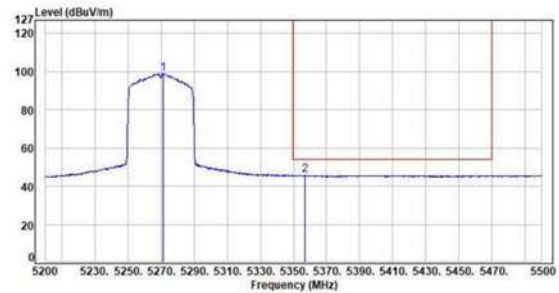


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5271.40	5.61	93.36	98.97	200.00	-101.03	Average	100	360	P
2	5356.90	5.75	39.98	45.73	54.00	-8.27	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Peak

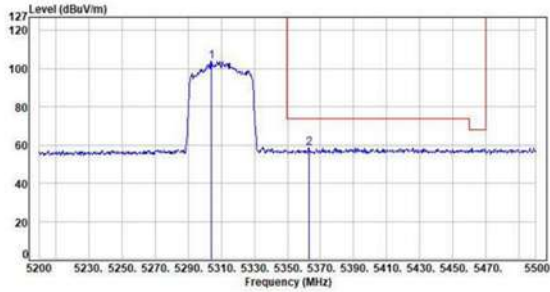

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5304.10	5.74	98.29	104.03	200.00	-95.97	Peak	100	215	P
2	5362.90	5.79	52.63	58.42	74.00	-15.58	Peak	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Average

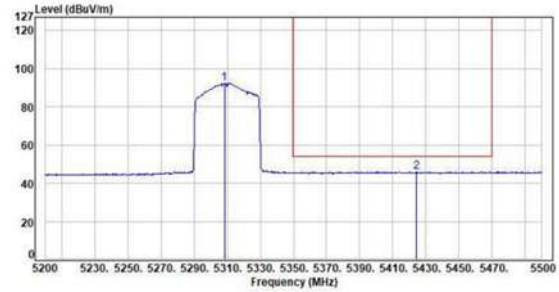

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5308.30	5.73	86.65	92.38	200.00	-107.62	Average	100	215	P
2	5424.40	5.87	40.09	45.96	54.00	-8.04	Average	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Peak

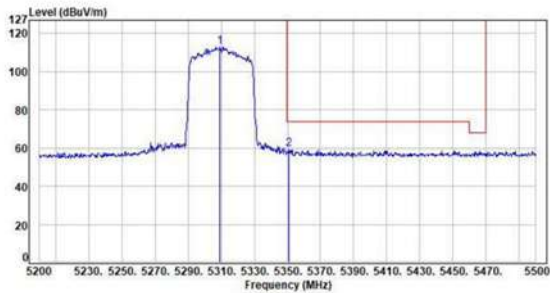

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5309.20	5.73	107.45	113.18	200.00	-86.82	Peak	123	357	P
2	5350.90	5.75	53.86	59.61	74.00	-14.39	Peak	123	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Average

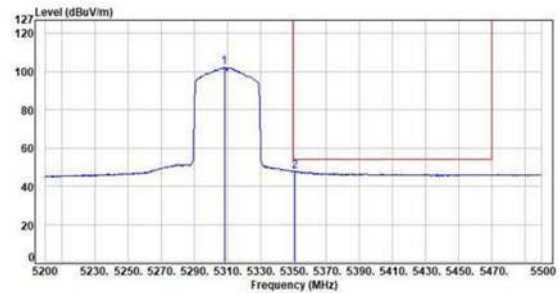


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5308.30	5.73	96.52	102.25	200.00	-97.75	Average	123	357	P
2	5350.60	5.75	42.10	47.85	54.00	-6.15	Average	123	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Peak

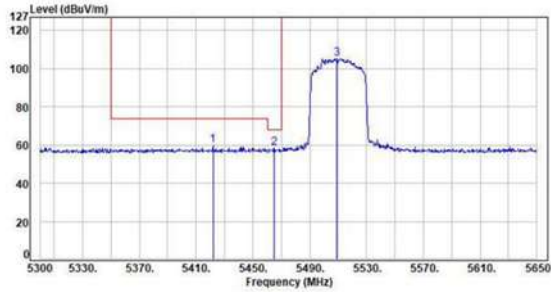

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5421.80	5.87	53.77	59.64	74.00	-14.36	Peak	392	85	P
2	5465.20	5.87	52.54	58.41	68.20	-9.79	Peak	392	85	P
3	5588.95	5.81	99.65	105.46	200.00	-94.54	Peak	392	85	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Average

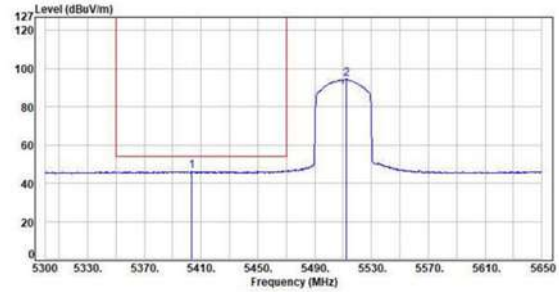

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5403.60	5.88	48.43	54.31	54.00	-7.69	Average	392	85	P
2	5512.45	5.81	88.95	94.76	200.00	-105.24	Average	392	85	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Peak

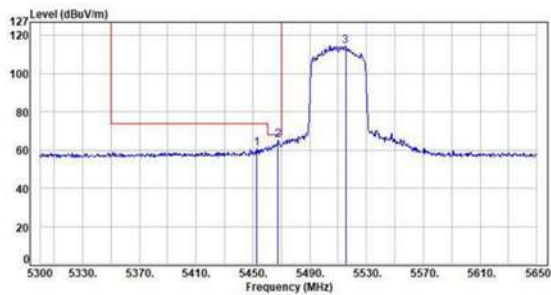

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5452.60	5.88	55.82	60.90	74.00	-13.10	Peak	100	360	P
2	5467.65	5.86	59.37	65.23	68.20	-2.97	Peak	100	360	P
3	5515.25	5.81	108.87	114.68	200.00	-85.32	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Average

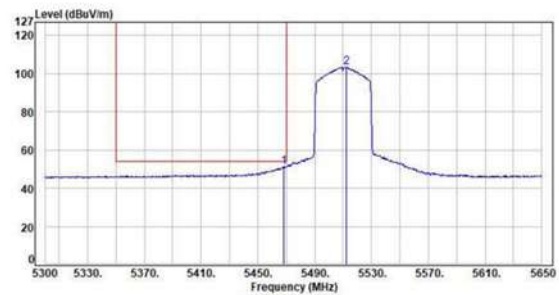


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.35	5.86	45.40	51.26	54.00	-2.74	Average	100	360	P
2	5512.45	5.81	97.75	103.56	200.00	-96.44	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Vertical Detector : Peak

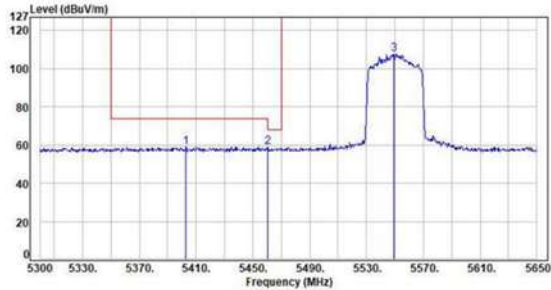

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5402.90	5.87	53.18	59.05	74.00	-14.95	Peak	386	88	P
2	5460.65	5.87	53.06	58.93	68.20	-9.27	Peak	386	88	P
3	5549.20	5.82	101.82	107.64	200.00	-92.36	Peak	386	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Vertical Detector : Average

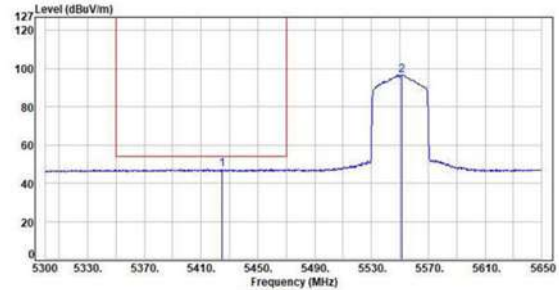

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5424.60	5.87	41.47	47.34	54.00	-6.66	Average	386	88	P
2	5550.95	5.82	98.97	104.79	200.00	-95.21	Average	386	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Horizontal Detector : Peak

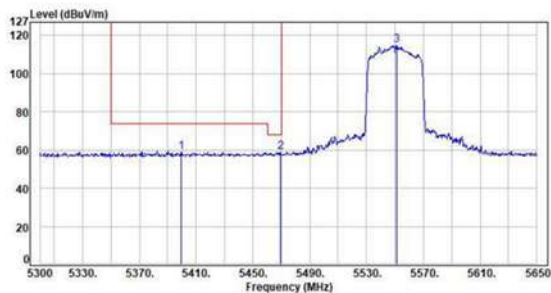

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5399.40	5.87	53.20	59.07	74.00	-14.93	Peak	100	360	P
2	5469.40	5.85	53.12	58.97	68.20	-9.23	Peak	100	360	P
3	5551.30	5.82	109.03	114.85	200.00	-85.15	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Horizontal Detector : Average

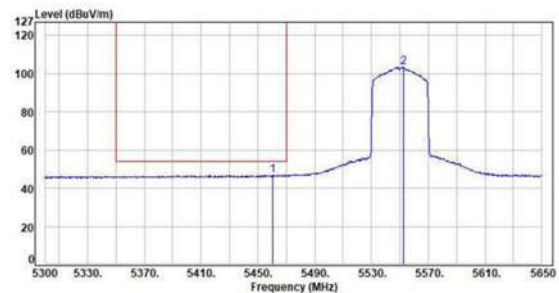


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.65	5.87	40.93	46.80	54.00	-7.20	Average	100	360	P
2	5552.35	5.82	97.55	103.37	200.00	-96.63	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Peak

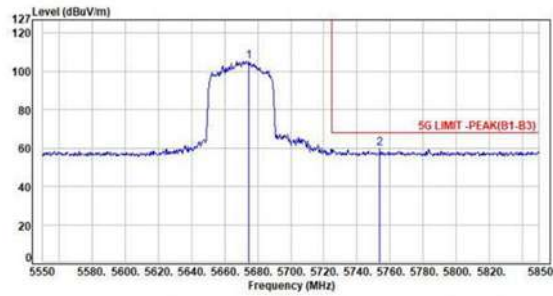

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5674.80	5.81	99.68	105.49	200.00	-94.51	Peak	100	128	P
2	5753.70	5.87	53.92	59.79	68.20	-8.41	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Average

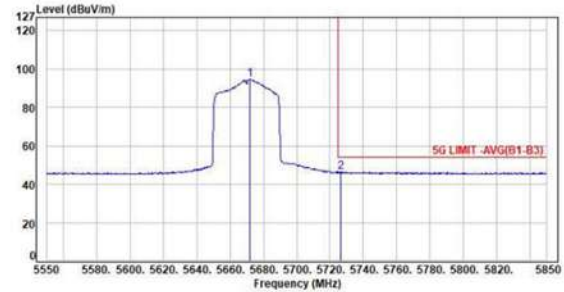

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5672.10	5.81	88.86	94.67	200.00	-105.33	Average	100	128	P
2	5726.40	5.81	40.47	46.28	54.00	-7.72	Average	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Peak

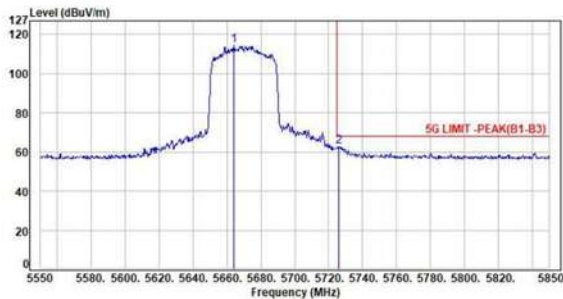

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5664.00	5.82	108.52	114.34	200.00	-85.66	Peak	100	357	P
2	5726.10	5.81	57.04	62.85	68.20	-5.35	Peak	100	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Average

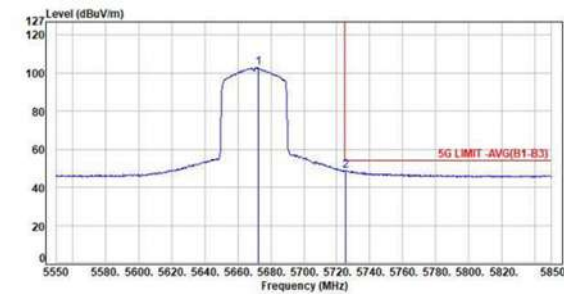

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5672.40	5.82	97.07	102.89	200.00	-97.11	Average	100	357	P
2	5725.50	5.81	42.95	48.76	54.00	-5.24	Average	100	357	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0

Pol : Vertical

Detector : Peak

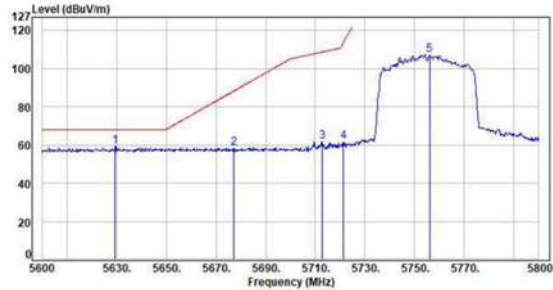

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5629.40	5.84	53.66	59.50	68.20	-8.70	Peak	302	90	P
2	5677.20	5.86	52.86	58.66	68.33	-29.67	Peak	302	90	P
3	5712.80	5.79	56.09	61.88	108.78	-46.90	Peak	302	90	P
4	5721.40	5.81	55.89	61.70	113.99	-52.29	Peak	302	90	P
5	5756.00	5.86	101.41	107.27	200.00	-92.73	Peak	302	90	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH151 NSS1 MCS0

Pol : Horizontal

Detector : Peak

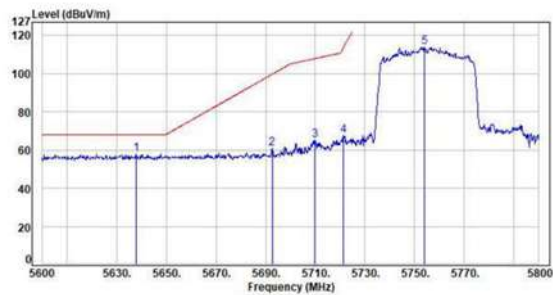

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5637.80	5.85	51.98	57.83	68.20	-10.37	Peak	112	330	P
2	5692.60	5.76	54.90	60.66	99.72	-39.06	Peak	112	330	P
3	5710.00	5.78	59.56	65.34	108.00	-42.66	Peak	112	330	P
4	5721.40	5.81	61.70	67.59	113.99	-46.40	Peak	112	330	P
5	5754.00	5.86	100.21	114.07	200.00	-85.93	Peak	112	330	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Vertical Detector : Peak

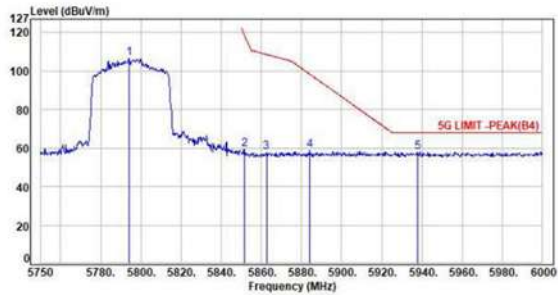

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5794.00	5.70	100.87	106.57	200.00	-93.43	Peak	100	93	P
2	5851.50	5.00	53.71	59.51	116.78	-59.27	Peak	100	93	P
3	5861.50	5.00	52.25	58.13	108.70	-50.57	Peak	100	93	P
4	5884.25	6.01	52.85	58.86	98.35	-39.49	Peak	100	93	P
5	5937.75	6.12	51.81	57.93	68.20	-10.27	Peak	100	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Peak

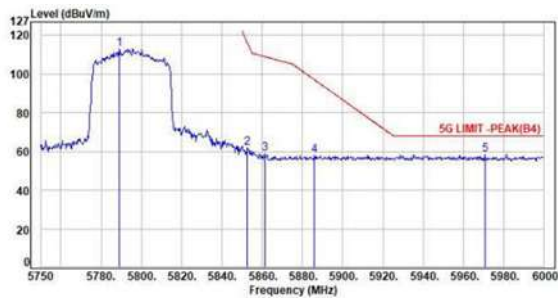


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5789.10	5.73	107.33	113.06	200.00	-86.94	Peak	100	43	P
2	5852.70	5.81	55.82	61.63	116.04	-54.41	Peak	100	43	P
3	5861.40	5.87	53.21	59.08	109.01	-49.93	Peak	100	43	P
4	5886.00	6.02	51.89	57.91	97.06	-39.15	Peak	100	43	P
5	5970.60	6.17	52.22	58.39	68.20	-9.81	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Peak

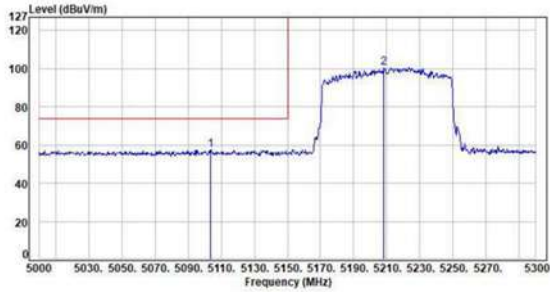

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5103.00	5.36	52.17	57.53	74.00	-16.47	Peak	351	97	P
2	5200.20	5.41	95.16	100.57	200.00	-99.43	Peak	351	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Average

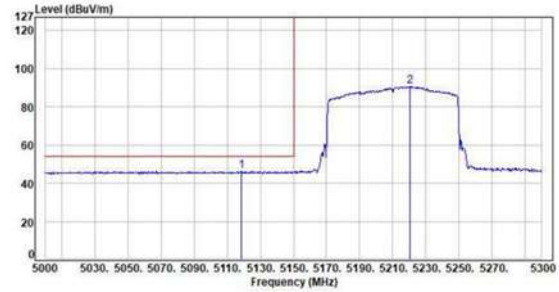

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5118.00	5.35	41.11	46.46	54.00	-7.54	Average	351	97	P
2	5220.20	5.43	85.29	90.72	200.00	-109.28	Average	351	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Peak

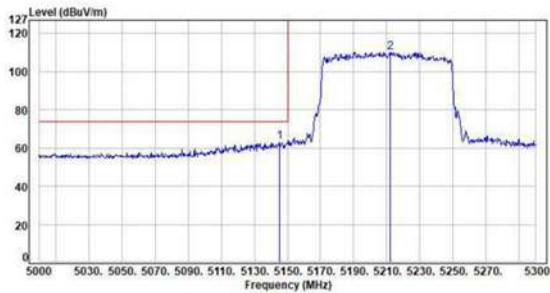

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5145.20	5.37	57.68	63.05	74.00	-10.95	Peak	100	358	P
2	5212.10	5.42	104.75	110.17	200.00	-89.83	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Average

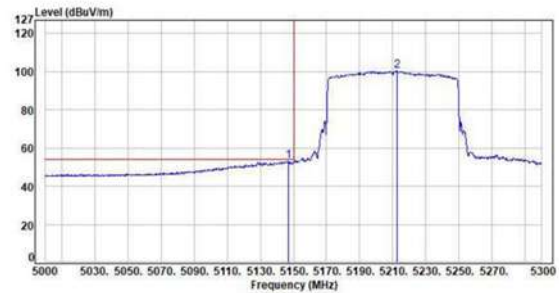


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.00	5.37	47.55	52.92	54.00	-1.08	Average	100	358	P
2	5212.70	5.43	94.85	100.28	200.00	-99.72	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Peak

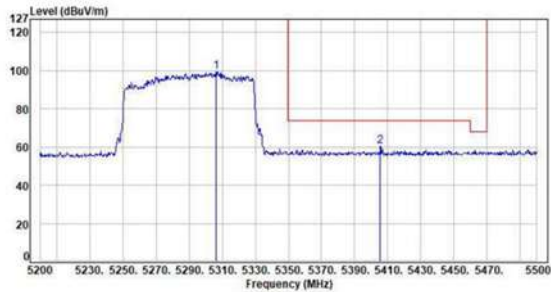

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5306.50	5.73	93.61	99.34	200.00	-100.66	Peak	100	218	P
2	5405.50	5.88	54.43	60.31	74.00	-13.69	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Average

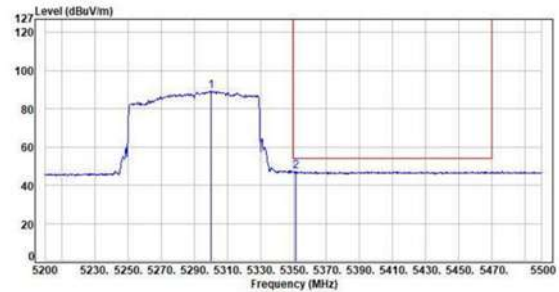

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5306.20	5.73	83.65	89.38	200.00	-110.62	Average	100	218	P
2	5351.20	5.75	41.46	47.21	54.00	-6.79	Average	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Peak

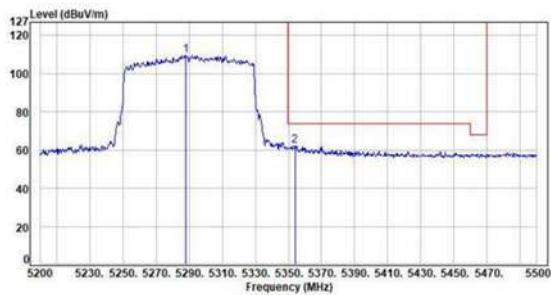

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5288.20	5.67	104.14	109.81	200.00	-90.19	Peak	100	2	P
2	5353.90	5.76	56.76	62.52	74.00	-11.48	Peak	100	2	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Average

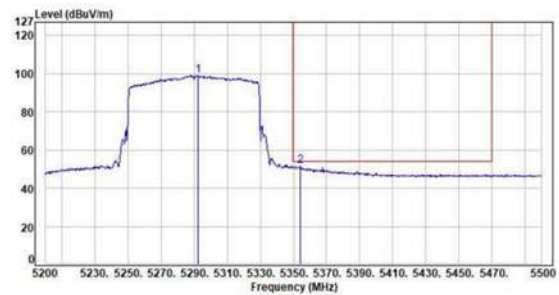


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5292.40	5.70	93.33	99.03	200.00	-100.97	Average	100	2	P
2	5354.20	5.76	45.69	51.45	54.00	-2.55	Average	100	2	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Peak

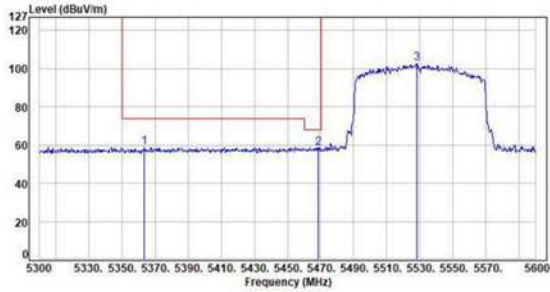

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5363.60	5.79	53.27	59.06	74.00	-14.94	Peak	392	89	P
2	5468.60	5.86	52.56	58.42	68.20	-9.78	Peak	392	89	P
3	5528.00	5.81	96.92	102.73	200.00	-97.27	Peak	392	89	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Average

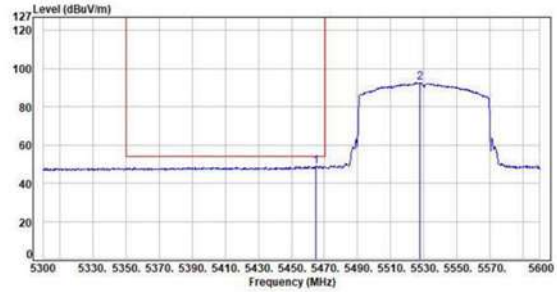

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5464.70	5.87	43.11	48.98	54.00	-5.02	Average	392	89	P
2	5527.70	5.81	86.89	92.70	200.00	-107.30	Average	392	89	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Peak

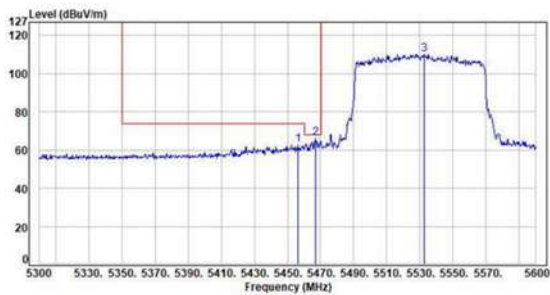

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5456.31	5.87	57.05	62.92	74.00	-11.08	Peak	100	0	P
2	5467.20	5.87	60.24	66.11	68.20	-2.09	Peak	100	0	P
3	5532.54	5.82	104.22	110.04	200.00	-89.96	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Average

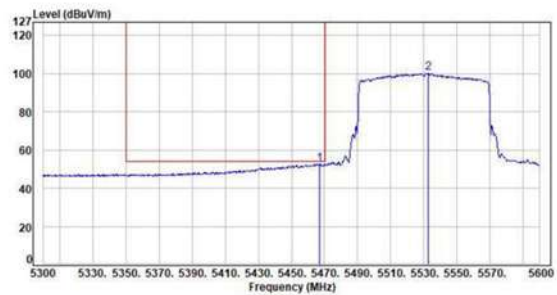

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5466.80	5.87	46.65	52.52	54.00	-1.48	Average	100	0	P
2	5532.50	5.82	94.61	100.43	200.00	-99.57	Average	100	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0

Pol : Vertical

Detector : Peak

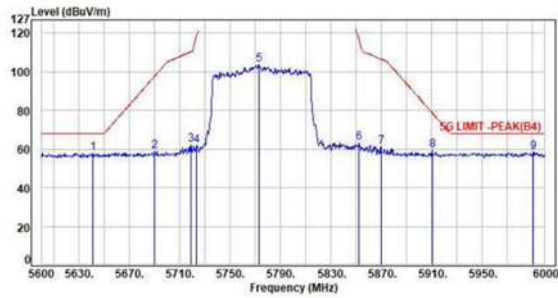


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5641.20	5.85	52.29	58.14	68.20	-10.06	Peak	282	90	P
2	5690.00	5.78	53.32	59.10	97.80	-38.70	Peak	282	90	P
3	5718.80	5.81	56.25	62.06	110.46	-48.40	Peak	282	90	P
4	5723.20	5.82	56.08	61.90	118.10	-56.20	Peak	282	90	P
5	5773.20	5.79	98.82	104.61	200.00	-95.39	Peak	282	90	P
6	5852.40	5.80	57.29	63.09	116.73	-53.64	Peak	282	90	P
7	5870.80	5.92	55.46	61.38	106.60	-45.22	Peak	282	90	P
8	5910.80	6.11	53.19	59.30	78.71	-19.41	Peak	282	90	P
9	5991.20	6.21	52.40	58.61	68.20	-9.59	Peak	282	90	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH155 NSS1 MCS0

Pol : Horizontal

Detector : Peak

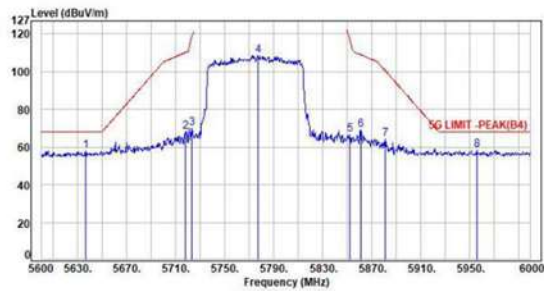

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5636.40	5.84	51.99	57.83	68.20	-10.37	Peak	100	356	P
2	5718.40	5.81	62.48	68.29	110.35	-42.06	Peak	100	356	P
3	5723.60	5.82	64.06	69.88	119.81	-49.93	Peak	100	356	P
4	5777.20	5.76	102.99	108.75	200.00	-91.25	Peak	100	356	P
5	5852.40	5.80	61.05	66.85	116.73	-49.88	Peak	100	356	P
6	5861.20	5.87	63.16	69.03	109.06	-40.03	Peak	100	356	P
7	5881.20	5.99	58.34	64.33	100.61	-36.28	Peak	100	356	P
8	5956.40	6.13	52.41	58.54	68.20	-9.66	Peak	100	356	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with Intel CPU -SISO Main

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

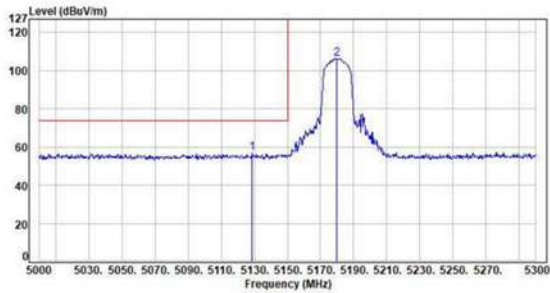

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5128.70	5.36	51.74	57.10	74.00	-16.90	Peak	100	95	P
2	5179.70	5.39	101.07	106.46	200.00	-93.54	Peak	100	95	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Average

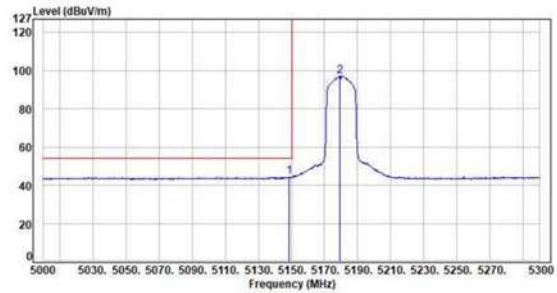

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5148.50	5.37	38.06	44.23	54.00	-9.77	Average	100	95	P
2	5179.40	5.39	91.02	97.21	200.00	-102.79	Average	100	95	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

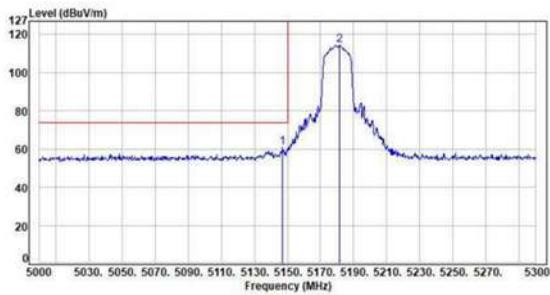

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.00	5.37	55.45	60.82	74.00	-13.18	Peak	265	359	P
2	5181.20	5.39	108.97	114.36	200.00	-85.64	Peak	265	359	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Average

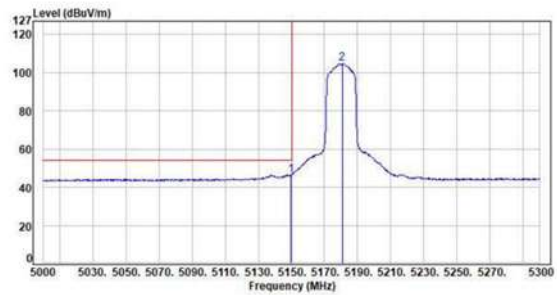

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5149.70	5.37	41.20	46.57	54.00	-7.43	Average	265	359	P
2	5180.60	5.39	99.51	104.90	200.00	-95.10	Average	265	359	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

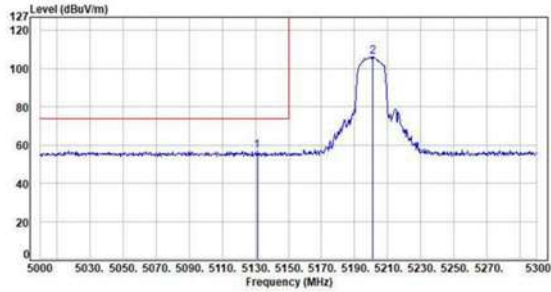


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5131.10	5.38	51.42	56.80	74.00	-17.20	Peak	100	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Average

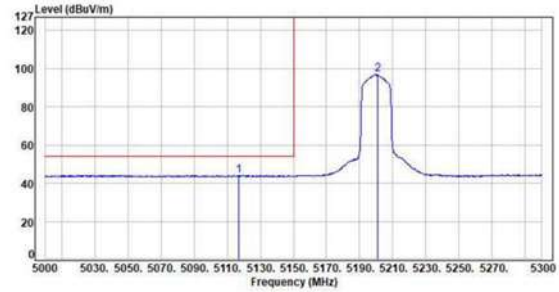


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5116.70	5.36	38.74	44.10	54.00	-9.90	Average	100	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

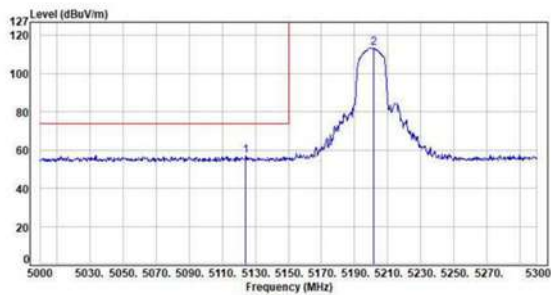


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5124.20	5.36	51.61	56.97	74.00	-17.03	Peak	255	360	P
2	5201.60	5.40	108.26	113.66	200.00	-86.34	Peak	255	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Average

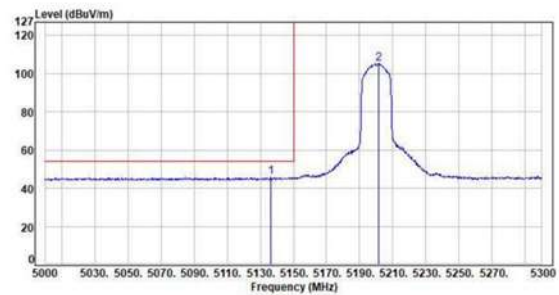

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5136.50	5.37	40.33	45.70	54.00	-8.30	Average	255	360	P
2	5201.30	5.40	100.00	105.40	200.00	-94.60	Average	255	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

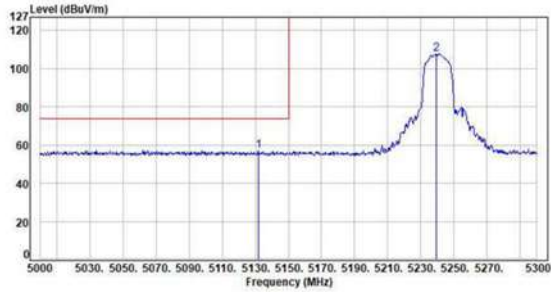


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5132.00	5.37	51.57	56.94	74.00	-17.06	Peak	101	96	P
2	5239.10	5.49	102.32	107.81	200.00	-92.19	Peak	101	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Average

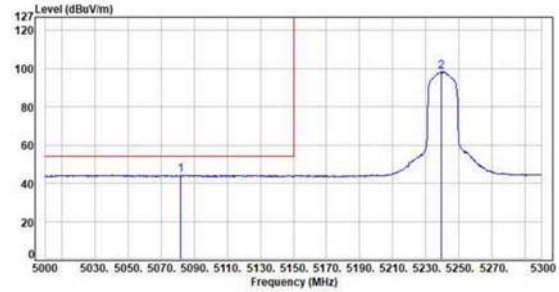


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5081.90	5.23	39.01	44.24	54.00	-9.76	Average	101	96	P
2	5239.40	5.49	92.94	98.43	200.00	-101.57	Average	101	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

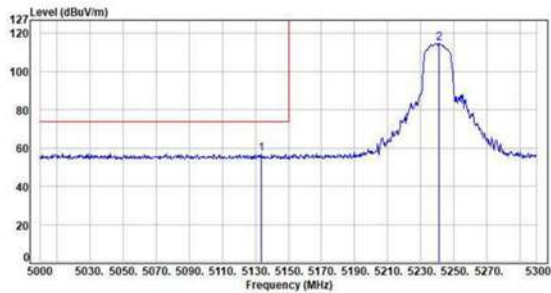


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5133.50	5.37	51.67	57.04	74.00	-16.96	Peak	100	357	P
2	5241.20	5.49	109.56	115.05	200.00	-84.95	Peak	100	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Average

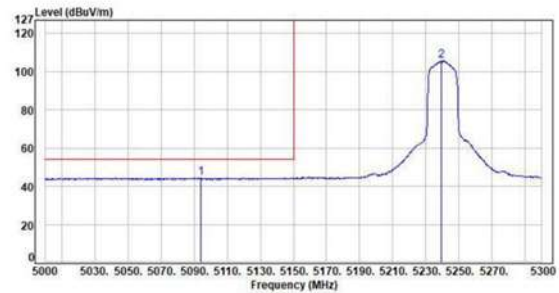

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5093.90	5.30	39.24	44.54	54.00	-9.46	Average	100	357	P
2	5239.40	5.49	100.00	105.57	200.00	-94.43	Average	100	357	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Peak

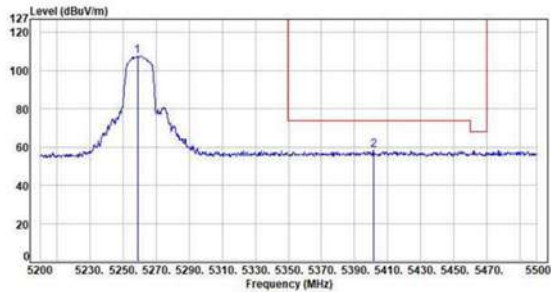


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5258.80	5.55	102.22	107.77	200.00	-92.23	Peak	100	92	P
2	5401.30	5.87	52.79	58.66	74.00	-15.34	Peak	100	92	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Average

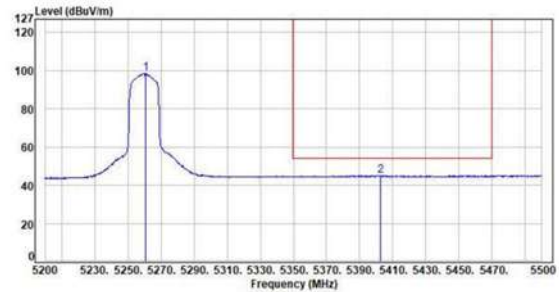


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.90	5.56	92.87	98.43	200.00	-101.57	Average	100	92	P
2	5402.00	5.87	39.11	44.98	54.00	-9.02	Average	100	92	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Peak

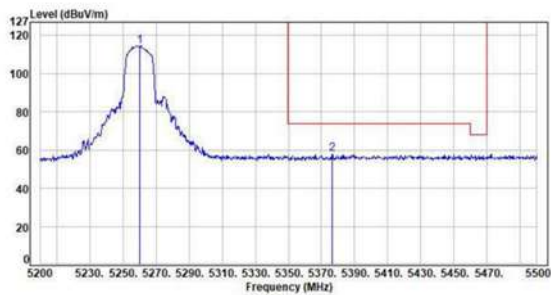


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.30	5.55	108.86	114.41	200.00	-85.59	Peak	286	358	P
2	5376.40	5.81	51.90	57.71	74.00	-16.29	Peak	286	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Average

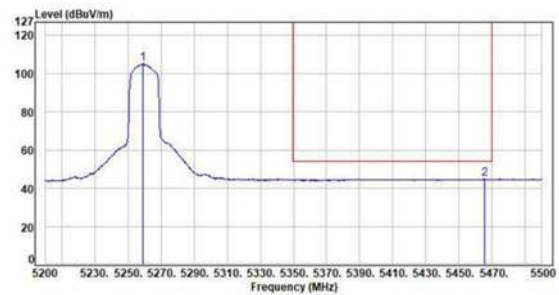

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	99.61	105.16	200.00	-94.84	Average	286	358	P
2	5465.20	5.87	38.97	44.84	54.00	-9.16	Average	286	358	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Peak

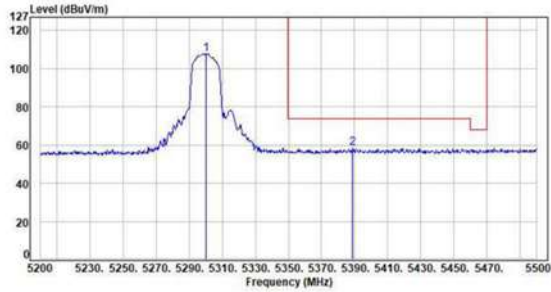


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.50	5.73	102.18	107.91	200.00	-92.09	Peak	100	96	P
2	5300.40	5.84	52.55	58.39	74.00	-15.61	Peak	100	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Average

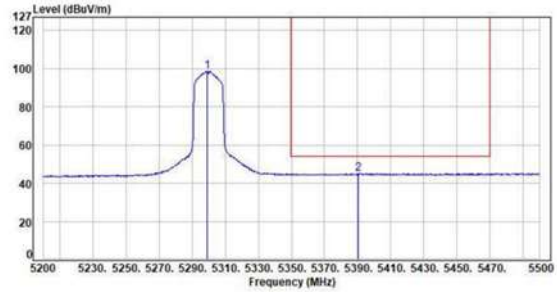


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	92.93	98.66	200.00	-101.34	Average	100	96	P
2	5390.50	5.84	39.21	45.05	54.00	-8.95	Average	100	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Peak

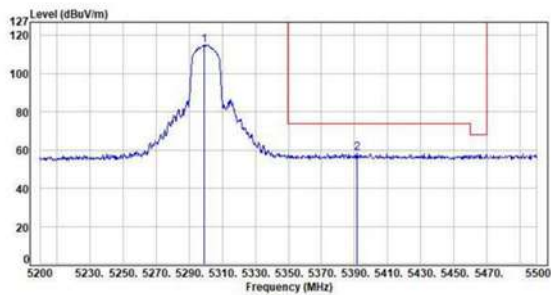


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.00	5.73	109.40	115.13	200.00	-84.87	Peak	100	358	P
2	5391.70	5.84	52.49	58.33	74.00	-15.67	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Average

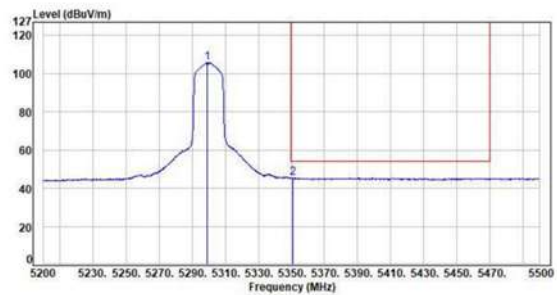

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	99.96	105.69	200.00	-94.31	Average	100	358	P
2	5350.90	5.75	39.71	45.46	54.00	-8.54	Average	100	358	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

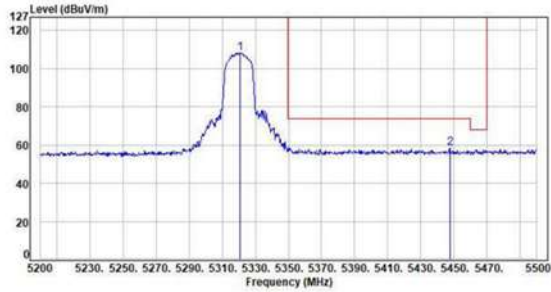


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.60	5.73	102.66	108.39	200.00	-91.61	Peak	100	94	P
2	5447.50	5.88	52.50	58.38	74.00	-15.62	Peak	100	94	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Average

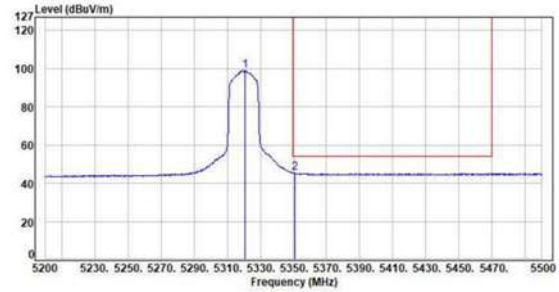


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.60	5.73	93.30	99.03	200.00	-100.97	Average	100	94	P
2	5350.60	5.75	39.52	45.27	54.00	-8.73	Average	100	94	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

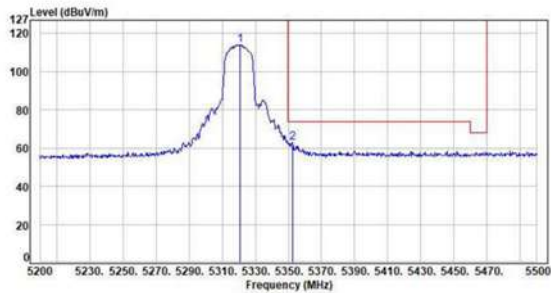


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.60	5.73	108.44	114.17	200.00	-85.83	Peak	100	360	P
2	5352.70	5.76	57.23	62.99	74.00	-11.01	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Average

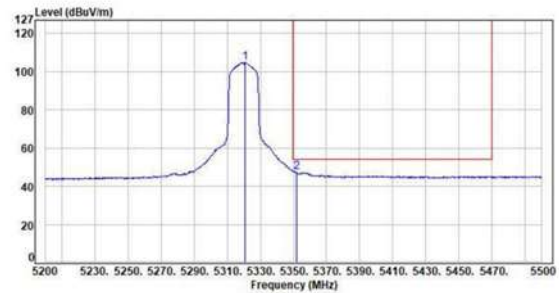

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.60	5.73	99.05	104.78	200.00	-95.22	Average	100	360	P
2	5351.00	5.75	41.47	47.22	54.00	-6.78	Average	100	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

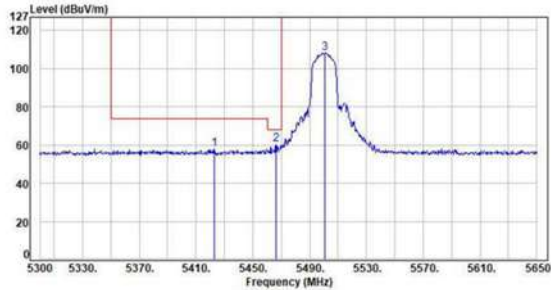

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5422.85	5.87	52.16	58.03	74.00	-15.97	Peak	100	100	P
2	5466.25	5.87	54.39	60.26	68.20	-7.94	Peak	100	100	P
3	5500.55	5.81	102.55	108.36	200.00	-91.64	Peak	100	100	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Average

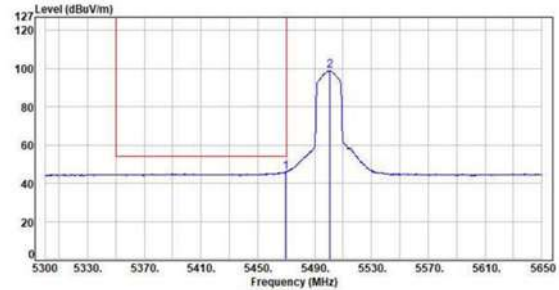

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.75	5.85	39.96	45.81	54.00	-8.19	Average	100	100	P
2	5500.90	5.81	99.09	104.90	200.00	-95.10	Average	100	100	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

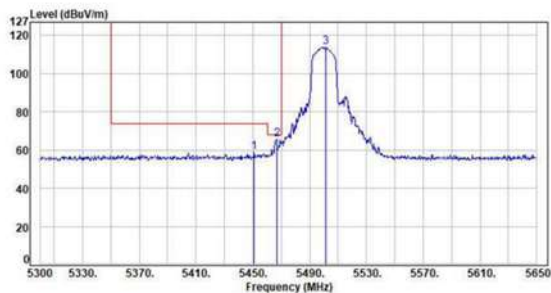

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5450.85	5.89	52.93	58.82	74.00	-15.18	Peak	151	360	P
2	5466.60	5.87	59.59	65.46	68.20	-2.74	Peak	151	360	P
3	5501.25	5.81	108.08	113.89	200.00	-86.11	Peak	151	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Average

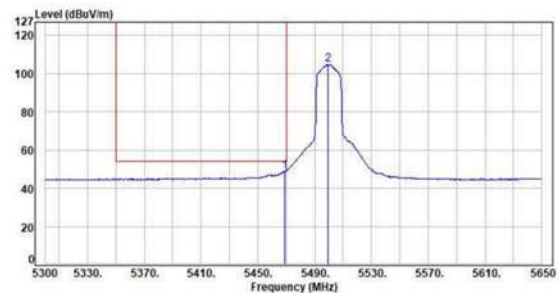

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5469.05	5.85	43.00	48.85	54.00	-5.15	Average	151	360	P
2	5499.50	5.81	99.04	104.85	200.00	-95.15	Average	151	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Peak

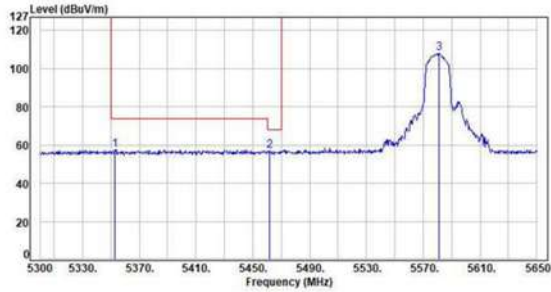

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5352.85	5.76	51.86	57.62	74.00	-16.38	Peak	100	97	P
2	5461.70	5.87	51.14	57.01	68.20	-11.19	Peak	100	97	P
3	5581.05	5.83	102.11	107.94	200.00	-92.06	Peak	100	97	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Average

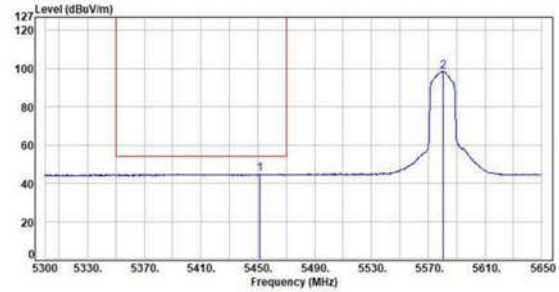

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5451.20	5.89	38.83	44.72	54.00	-9.28	Average	100	97	P
2	5580.70	5.83	92.66	98.49	200.00	-101.51	Average	100	97	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Peak

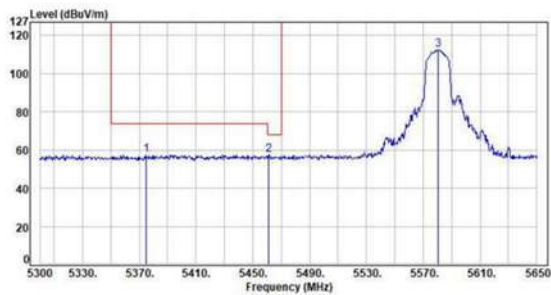

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5374.55	5.81	51.79	57.60	74.00	-16.40	Peak	100	360	P
2	5461.35	5.87	51.48	57.35	68.20	-10.85	Peak	100	360	P
3	5580.70	5.83	106.69	112.52	200.00	-87.48	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Average

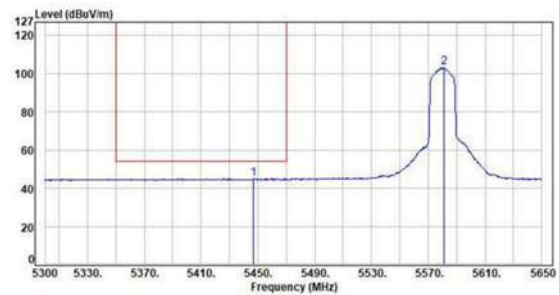

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5446.65	5.88	39.03	44.91	54.00	-9.09	Average	100	360	P
2	5581.05	5.83	97.30	103.13	200.00	-96.87	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

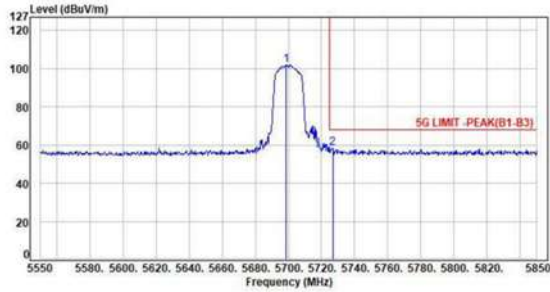


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5698.80	5.76	96.24	102.00	200.00	-96.00	Peak	100	97	P
2	5726.70	5.81	52.60	58.41	68.20	-9.79	Peak	100	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

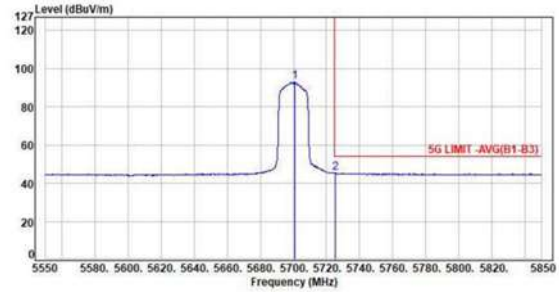


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.90	5.76	87.30	93.06	200.00	-106.94	Average	100	97	P
2	5725.20	5.81	39.46	45.27	54.00	-8.73	Average	100	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

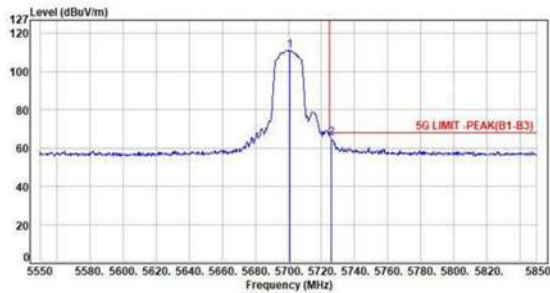


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.60	5.76	105.50	111.26	200.00	-88.74	Peak	142	277	P
2	5725.80	5.81	59.36	65.17	68.20	-3.03	Peak	142	277	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

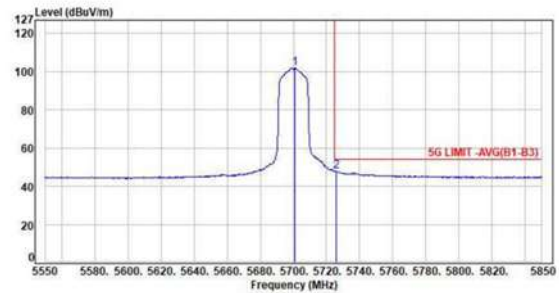

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.90	5.76	96.08	101.84	200.00	-98.16	Average	142	277	P
2	5725.00	5.81	41.94	47.75	54.00	-6.25	Average	142	277	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

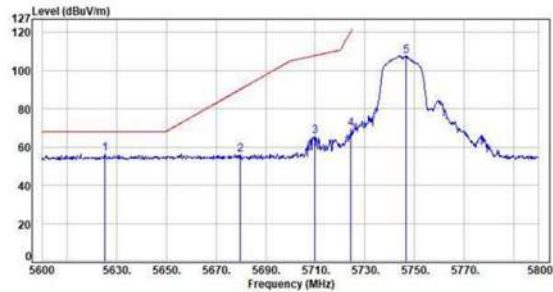

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5625.40	3.00	53.43	56.51	68.20	-11.69	Peak	100	94	P
2	5679.00	3.02	53.04	56.06	90.25	-34.19	Peak	100	94	P
3	5709.00	3.00	62.82	65.82	107.94	-42.12	Peak	100	94	P
4	5724.40	3.04	66.48	69.52	120.83	-51.31	Peak	100	94	P
5	5746.40	3.07	104.60	107.67	200.00	-92.33	Peak	100	94	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

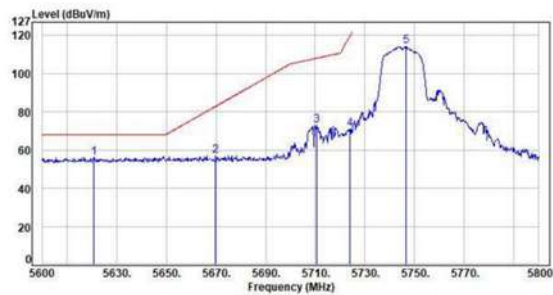

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5621.00	3.09	53.12	56.21	68.20	-11.99	Peak	100	284	P
2	5669.00	3.05	54.04	57.09	82.05	-25.76	Peak	100	284	P
3	5710.40	3.00	69.85	72.85	108.11	-35.26	Peak	100	284	P
4	5723.00	3.04	68.12	71.16	119.46	-48.30	Peak	100	284	P
5	5746.40	3.07	111.16	114.23	200.00	-85.77	Peak	100	284	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

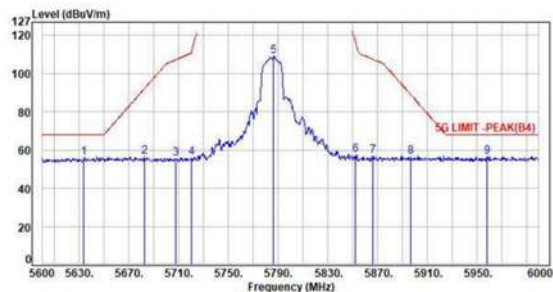

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5633.60	3.09	52.80	55.89	68.20	-12.31	Peak	100	95	P
2	5682.40	3.03	53.61	56.64	92.18	-35.54	Peak	100	95	P
3	5708.00	3.01	52.70	55.71	107.44	-51.73	Peak	100	95	P
4	5720.40	3.03	53.14	56.17	111.71	-55.54	Peak	100	95	P
5	5786.40	2.94	106.00	108.94	200.00	-91.06	Peak	100	95	P
6	5852.40	2.99	54.41	57.40	116.73	-59.33	Peak	100	95	P
7	5866.40	3.08	53.70	56.78	107.61	-50.83	Peak	100	95	P
8	5896.80	3.26	53.05	56.31	89.07	-32.76	Peak	100	95	P
9	5958.00	3.31	53.38	56.69	68.20	-11.51	Peak	100	95	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

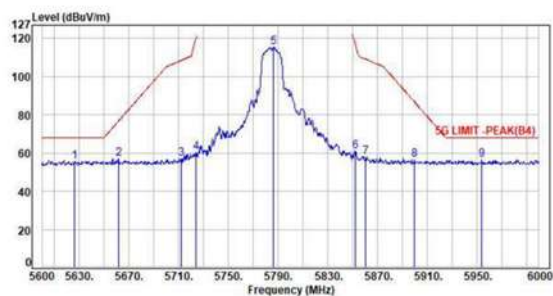

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5626.40	3.08	52.58	55.66	68.20	-12.54	Peak	100	282	P
2	5661.60	3.06	53.79	56.85	76.78	-19.93	Peak	100	282	P
3	5712.00	3.00	54.18	57.18	108.56	-51.38	Peak	100	282	P
4	5724.00	3.04	57.50	60.54	119.92	-59.38	Peak	100	282	P
5	5786.00	2.95	112.51	115.46	200.00	-84.54	Peak	100	282	P
6	5852.00	2.99	58.06	61.05	117.64	-56.59	Peak	100	282	P
7	5860.00	3.04	54.94	57.98	109.18	-51.20	Peak	100	282	P
8	5899.60	3.28	53.30	56.58	87.00	-30.42	Peak	100	282	P
9	5954.00	3.29	53.37	56.66	68.20	-11.54	Peak	100	282	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

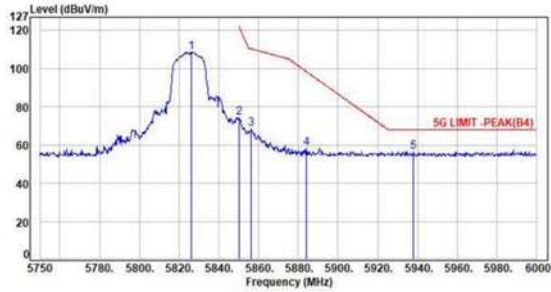

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5826.00	2.93	105.80	108.73	200.00	-91.27	Peak	100	95	P
2	5850.25	2.98	71.35	74.33	121.63	-47.30	Peak	100	95	P
3	5856.25	3.03	65.32	68.35	110.45	-42.10	Peak	100	95	P
4	5884.25	3.19	55.32	58.51	98.35	-39.84	Peak	100	95	P
5	5938.00	3.28	53.25	56.53	68.20	-11.67	Peak	100	95	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

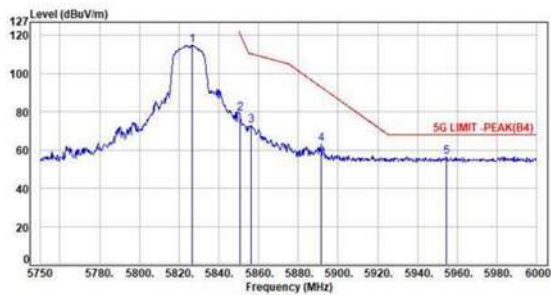

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5826.50	2.93	112.18	115.11	200.00	-84.89	Peak	100	330	P
2	5850.50	2.98	76.19	79.17	121.06	-41.89	Peak	100	330	P
3	5856.25	3.03	70.00	73.03	110.45	-37.42	Peak	100	330	P
4	5891.25	3.24	59.88	63.12	93.17	-30.05	Peak	100	330	P
5	5954.50	3.29	53.00	56.29	68.20	-11.91	Peak	100	330	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with Intel CPU -SISO Aux

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

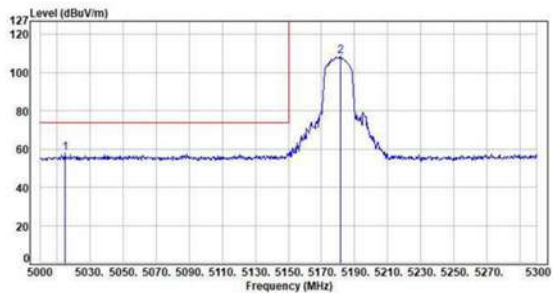


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5015.00	5.02	52.82	57.04	74.00	-16.16	Peak	378	257	P
2	5181.20	5.39	103.02	108.41	200.00	-91.59	Peak	378	257	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Average

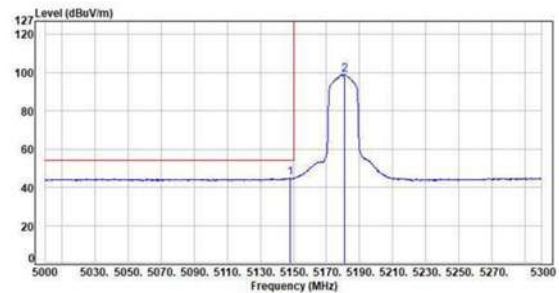


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5148.20	5.37	39.37	44.74	54.00	-9.26	Average	378	257	P
2	5180.90	5.39	93.64	99.03	200.00	-100.97	Average	378	257	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

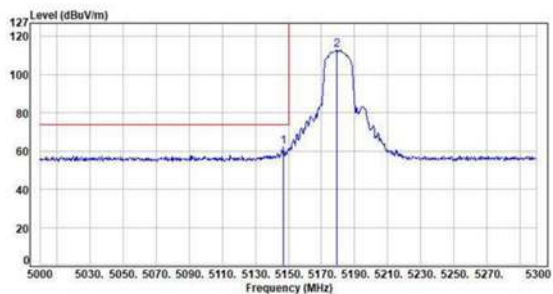


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.00	5.37	56.91	62.28	74.00	-11.72	Peak	100	357	P
2	5179.10	5.39	107.60	112.99	200.00	-87.01	Peak	100	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Average

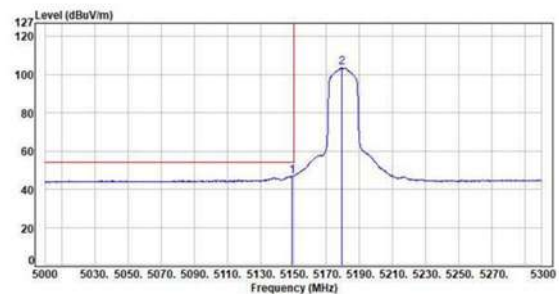

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5149.10	5.37	41.32	46.69	54.00	-7.31	Average	100	357	P
2	5179.40	5.39	98.19	103.58	200.00	-96.42	Average	100	357	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

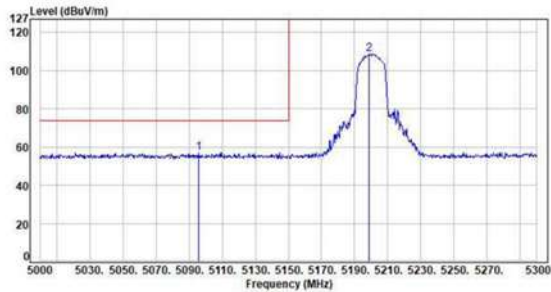


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5095.70	5.31	51.91	57.22	74.00	-16.78	Peak	397	259	P
2	5199.90	5.40	103.44	108.84	200.00	-91.16	Peak	397	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Average

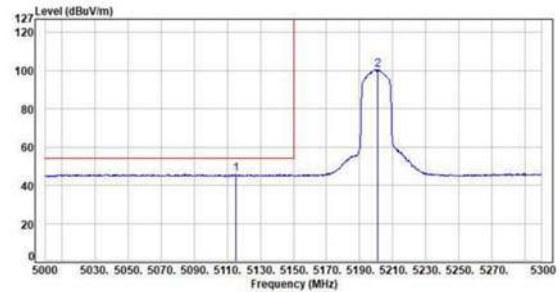


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5115.20	5.36	40.66	46.02	54.00	-7.98	Average	397	259	P
2	5201.00	5.40	95.21	100.61	200.00	-99.39	Average	397	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

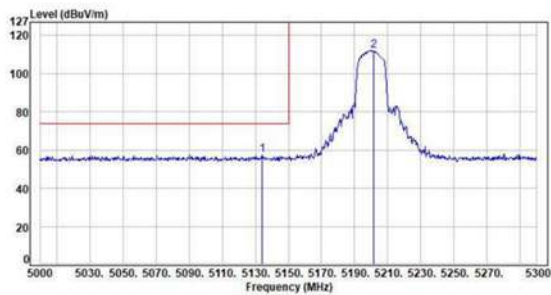


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5134.40	5.37	52.10	57.47	74.00	-16.53	Peak	334	359	P
2	5201.30	5.40	106.84	112.24	200.00	-87.76	Peak	334	359	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Average

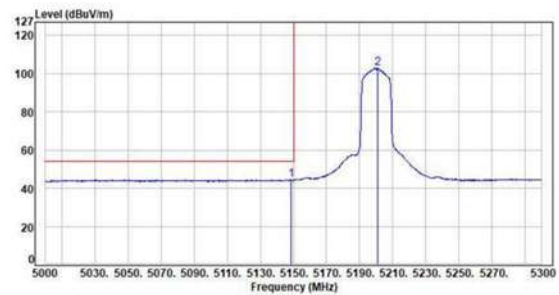

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5148.50	5.37	39.15	44.52	54.00	-9.48	Average	334	359	P
2	5200.70	5.40	97.47	102.87	200.00	-97.13	Average	334	359	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

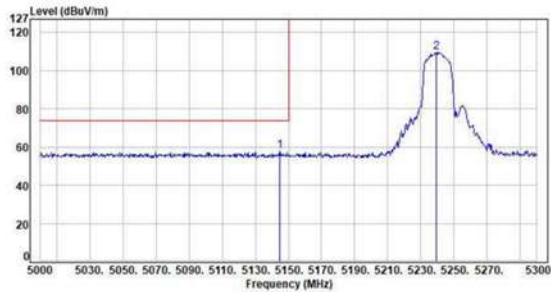


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5144.60	5.37	52.36	57.73	74.00	-16.27	Peak	389	260	P
2	5239.40	5.49	104.03	109.52	200.00	-90.48	Peak	389	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Average

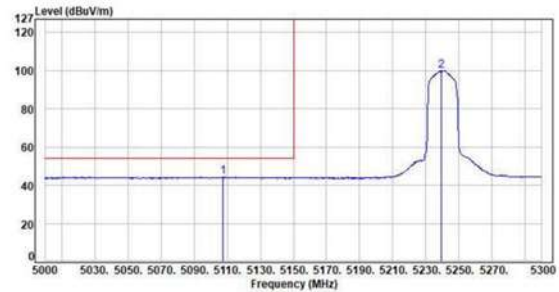


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5107.70	5.35	38.96	44.31	54.00	-9.69	Average	389	260	P
2	5239.40	5.49	94.62	100.11	200.00	-99.89	Average	389	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

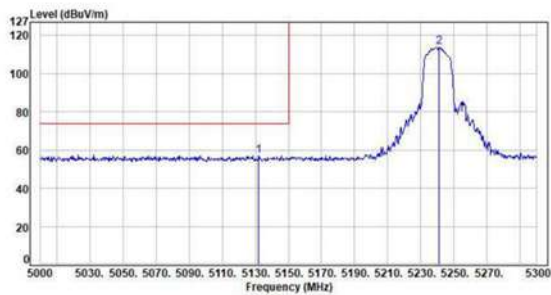


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5132.00	5.37	51.85	57.22	74.00	-16.78	Peak	104	41	P
2	5241.20	5.49	108.31	113.80	200.00	-86.20	Peak	104	41	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Average

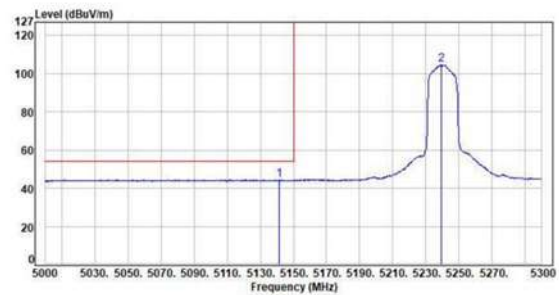

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5141.60	5.37	39.19	44.56	54.00	-9.44	Average	104	41	P
2	5239.40	5.49	99.12	104.61	200.00	-95.39	Average	104	41	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Peak

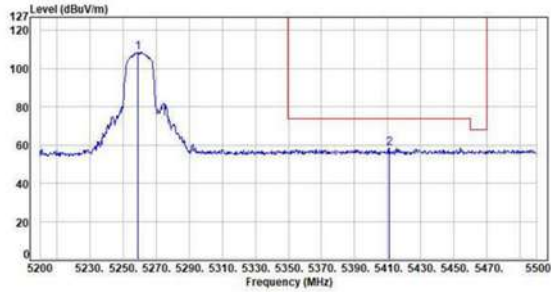


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	103.10	108.65	200.00	-91.35	Peak	387	257	P
2	5410.90	5.87	52.71	58.58	74.00	-15.42	Peak	387	257	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Average

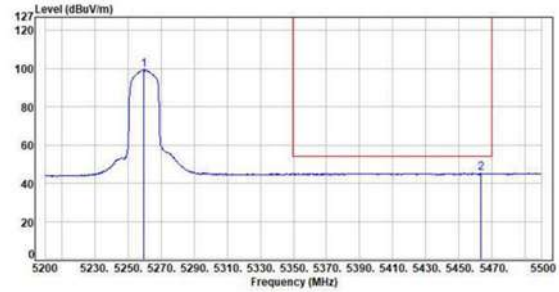


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.40	5.55	93.00	99.35	200.00	-100.65	Average	387	257	P
2	5463.40	5.87	39.37	45.24	54.00	-8.76	Average	387	257	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Peak

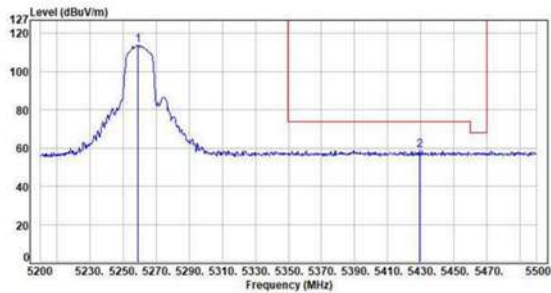


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	108.31	113.86	200.00	-86.14	Peak	118	42	P
2	5429.20	5.89	53.26	59.15	74.00	-14.85	Peak	118	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Average

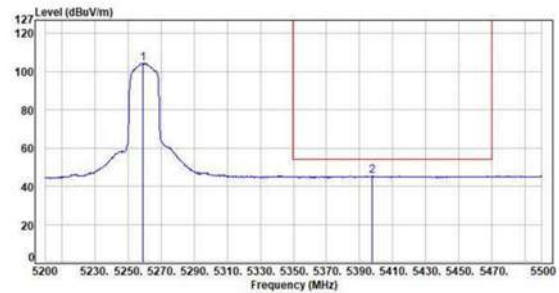

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	98.89	104.44	200.00	-95.56	Average	118	42	P
2	5397.70	5.87	39.43	45.30	54.00	-8.70	Average	118	42	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Peak

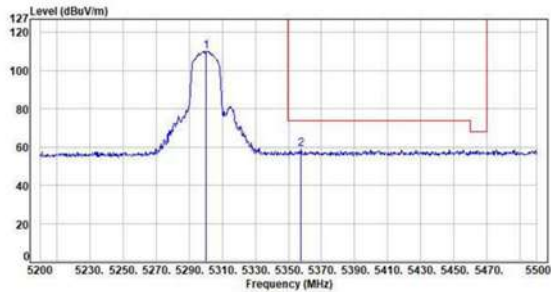

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.50	5.73	104.52	110.25	200.00	-89.75	Peak	381	260	P
2	5357.50	5.75	53.25	59.00	74.00	-15.00	Peak	381	260	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Average

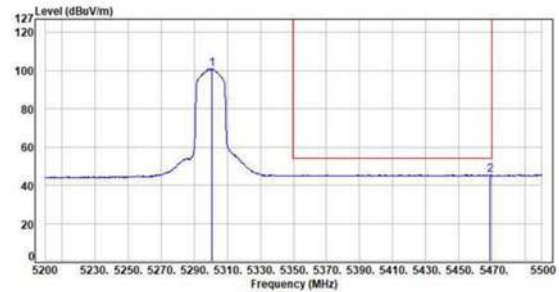

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	5.73	95.21	100.94	200.00	-99.06	Average	381	260	P
2	5469.50	5.86	39.58	45.44	54.00	-8.56	Average	381	260	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Peak

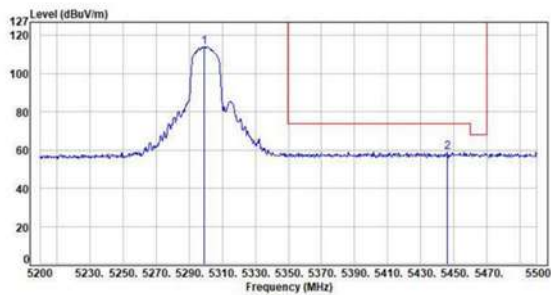

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.00	5.73	108.38	114.11	200.00	-85.89	Peak	124	39	P
2	5446.00	5.88	53.14	59.02	74.00	-14.98	Peak	124	39	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Average

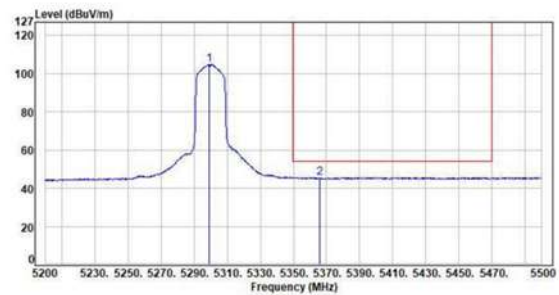

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	99.09	104.82	200.00	-95.18	Average	124	39	P
2	5365.60	5.79	39.79	45.58	54.00	-8.42	Average	124	39	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

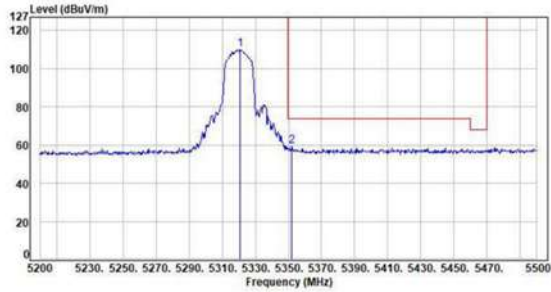


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.90	5.73	104.29	110.02	200.00	-89.98	Peak	377	259	P
2	5351.10	5.75	53.42	59.17	74.00	-14.83	Peak	377	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Average

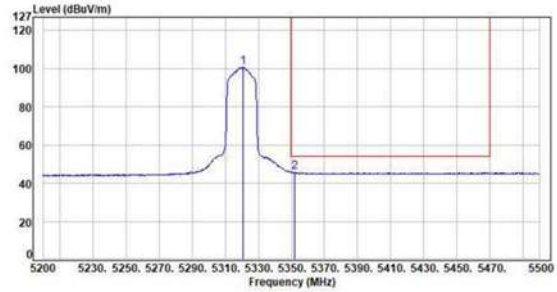


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.90	5.73	94.96	100.69	200.00	-99.31	Average	377	259	P
2	5351.00	5.75	39.90	45.65	74.00	-28.35	Average	377	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

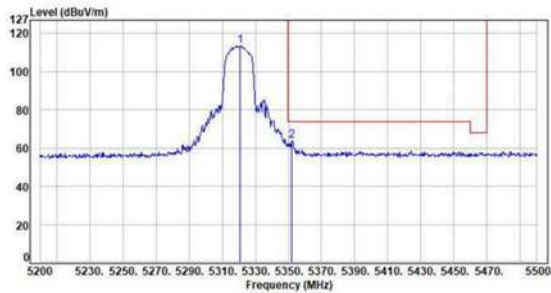


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.90	5.73	107.81	113.54	200.00	-86.46	Peak	123	40	P
2	5351.00	5.75	58.16	63.91	74.00	-10.09	Peak	123	40	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Average

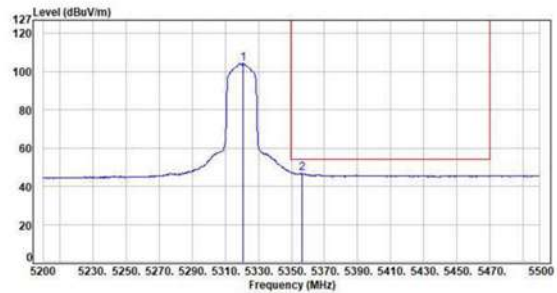

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.90	5.73	98.57	104.30	200.00	-95.70	Average	123	40	P
2	5356.30	5.75	40.95	46.70	74.00	-27.30	Average	123	40	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

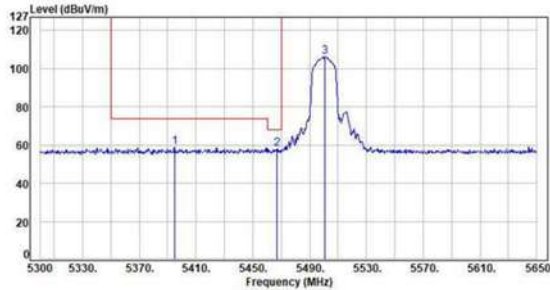

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5394.85	5.86	52.99	58.85	74.00	-15.15	Peak	100	218	P
2	5466.95	5.87	52.28	58.15	68.20	-10.05	Peak	100	218	P
3	5500.90	5.81	100.60	106.41	200.00	-93.59	Peak	100	218	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Average

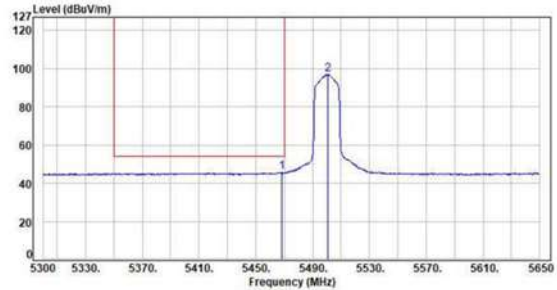

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.00	5.86	39.84	45.70	54.00	-8.30	Average	100	218	P
2	5500.90	5.81	91.19	97.00	200.00	-103.00	Average	100	218	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

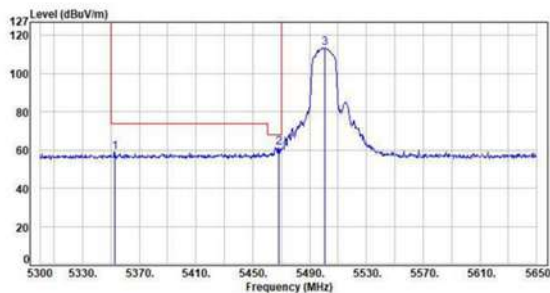

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5352.50	5.76	53.00	58.76	74.00	-15.24	Peak	145	80	P
2	5468.00	5.86	55.32	61.18	68.20	-7.02	Peak	145	80	P
3	5500.90	5.81	107.81	113.62	200.00	-86.38	Peak	145	80	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Average

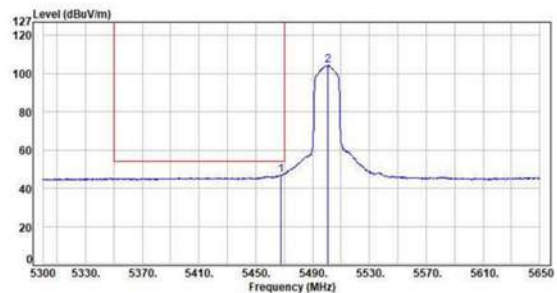

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5467.65	5.86	41.20	47.06	54.00	-6.94	Average	145	80	P
2	5500.55	5.81	98.59	104.40	200.00	-95.60	Average	145	80	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Peak

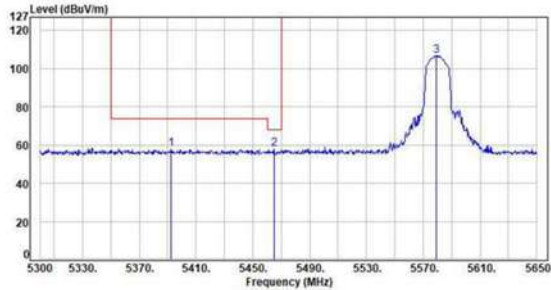

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5392.40	5.85	52.31	58.16	74.00	-15.84	Peak	101	217	P
2	5464.85	5.87	51.84	57.71	68.20	-10.49	Peak	101	217	P
3	5579.30	5.83	101.10	106.93	200.00	-93.07	Peak	101	217	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Average

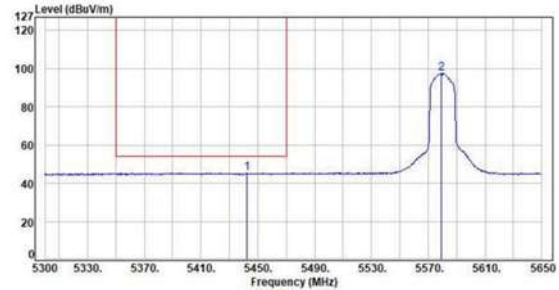

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5442.10	5.89	39.35	45.24	54.00	-8.76	Average	101	217	P
2	5578.95	5.83	91.92	97.75	200.00	-102.25	Average	101	217	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Peak

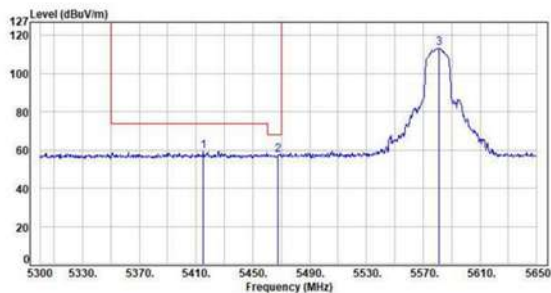

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5415.15	5.88	53.48	59.36	74.00	-14.64	Peak	134	354	P
2	5467.65	5.86	51.43	57.29	68.20	-10.91	Peak	134	354	P
3	5581.05	5.83	107.46	113.29	200.00	-86.71	Peak	134	354	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Average

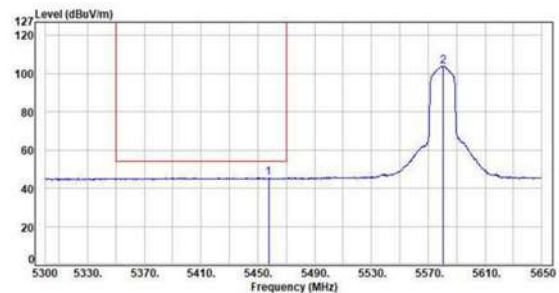

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	5.87	39.54	45.41	54.00	-8.59	Average	134	354	P
2	5580.70	5.83	98.09	103.92	200.00	-96.08	Average	134	354	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

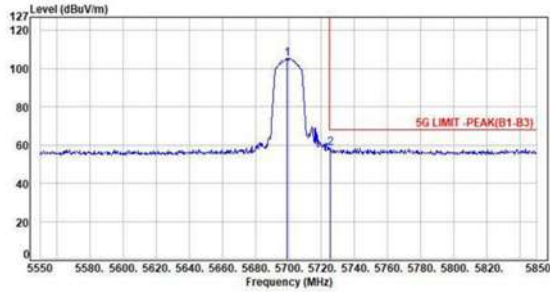


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5699.10	5.76	99.72	105.48	200.00	-94.52	Peak	385	260	P
2	5725.20	5.81	52.70	58.51	68.20	-9.69	Peak	385	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

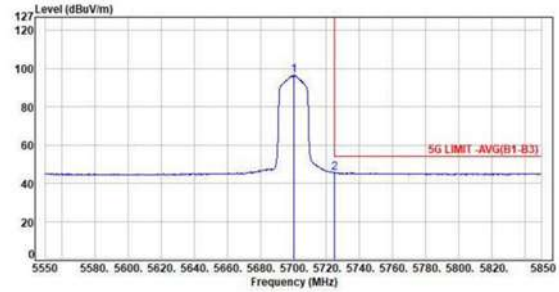


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.30	5.76	98.70	104.46	200.00	-95.54	Average	385	260	P
2	5724.90	5.82	39.73	45.55	54.00	-8.45	Average	385	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

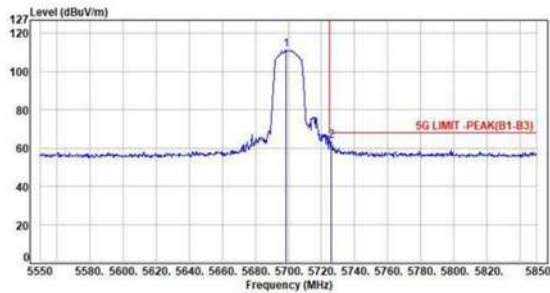


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5698.80	5.76	105.59	111.35	200.00	-88.65	Peak	100	74	P
2	5725.80	5.81	58.14	63.95	68.20	-4.25	Peak	100	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

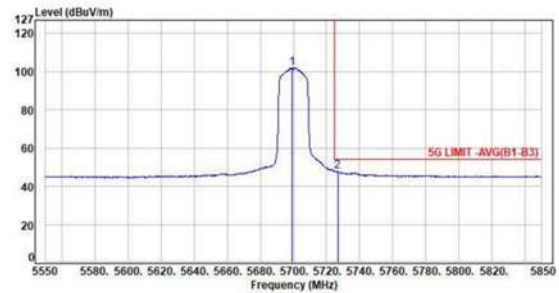

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5699.40	5.76	96.28	102.04	200.00	-97.96	Average	100	74	P
2	5726.70	5.81	42.16	47.97	54.00	-6.03	Average	100	74	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

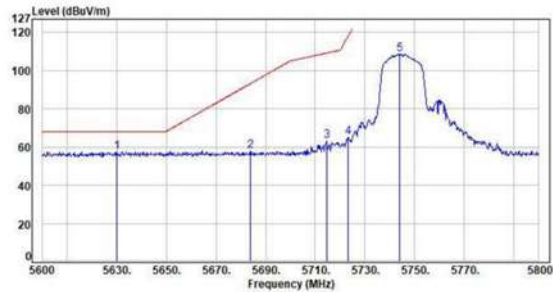

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5630.00	5.84	51.79	57.63	68.20	-10.57	Peak	358	263	P
2	5683.00	5.79	52.30	58.09	93.21	-35.12	Peak	358	263	P
3	5714.60	5.79	57.25	63.04	109.29	-46.25	Peak	358	263	P
4	5723.20	5.82	59.52	65.34	118.10	-52.76	Peak	358	263	P
5	5744.00	5.86	102.93	108.79	200.00	-91.21	Peak	358	263	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

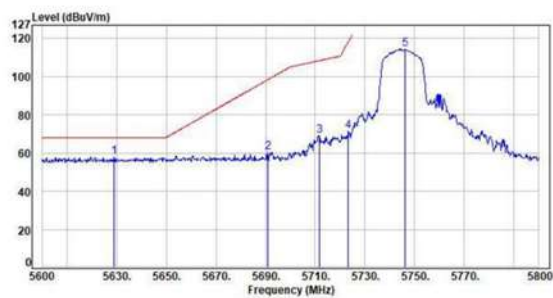

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5629.00	5.83	51.96	57.79	68.20	-10.41	Peak	100	70	P
2	5691.00	5.78	54.75	60.53	98.54	-38.01	Peak	100	70	P
3	5711.00	5.78	63.47	69.25	108.50	-39.25	Peak	100	70	P
4	5723.20	5.82	65.44	71.26	118.10	-46.84	Peak	100	70	P
5	5746.00	5.86	100.61	114.47	200.00	-85.53	Peak	100	70	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

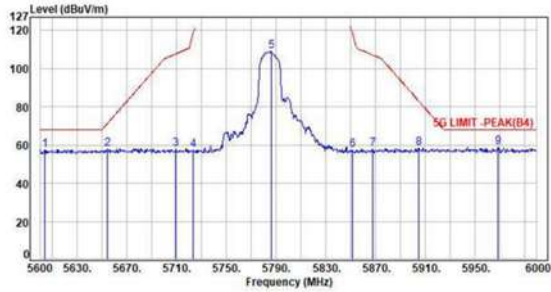

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5604.00	5.84	51.67	57.51	68.20	-10.69	Peak	100	260	P
2	5654.00	5.84	52.27	58.11	71.16	-13.05	Peak	100	260	P
3	5709.20	5.78	52.09	57.87	107.78	-49.91	Peak	100	260	P
4	5723.60	5.82	51.50	57.32	119.01	-61.69	Peak	100	260	P
5	5786.00	5.75	103.20	108.95	200.00	-91.05	Peak	100	260	P
6	5851.20	5.80	51.46	57.26	119.46	-62.20	Peak	100	260	P
7	5867.60	5.91	52.14	58.05	107.27	-49.22	Peak	100	260	P
8	5905.20	6.12	52.51	58.63	82.85	-24.22	Peak	100	260	P
9	5968.80	6.17	52.70	58.87	68.20	-9.33	Peak	100	260	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

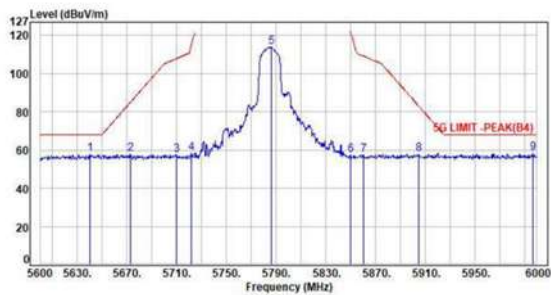

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5640.40	5.85	51.92	57.77	68.20	-10.43	Peak	100	67	P
2	5672.80	5.81	51.91	57.72	85.07	-27.35	Peak	100	67	P
3	5709.60	5.78	51.90	57.68	107.89	-50.21	Peak	100	67	P
4	5722.00	5.81	52.86	58.67	115.36	-56.69	Peak	100	67	P
5	5786.00	5.75	100.30	106.05	200.00	-93.95	Peak	100	67	P
6	5850.40	5.79	51.66	57.45	121.29	-63.84	Peak	100	67	P
7	5860.80	5.86	51.78	57.64	109.18	-51.54	Peak	100	67	P
8	5905.20	6.12	51.99	58.11	82.85	-24.74	Peak	100	67	P
9	5996.80	6.22	52.21	58.43	68.20	-9.77	Peak	100	67	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

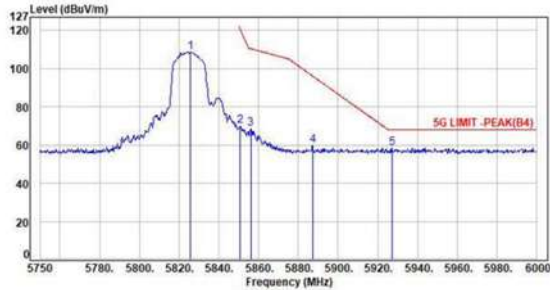

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.50	5.74	103.08	108.82	200.00	-91.18	Peak	101	259	P
2	5850.75	5.79	64.00	69.87	120.49	-50.62	Peak	101	259	P
3	5856.00	5.85	62.49	68.34	110.52	-42.18	Peak	101	259	P
4	5887.25	6.02	53.84	59.86	96.13	-36.27	Peak	101	259	P
5	5927.00	6.12	52.31	58.43	68.20	-9.77	Peak	101	259	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

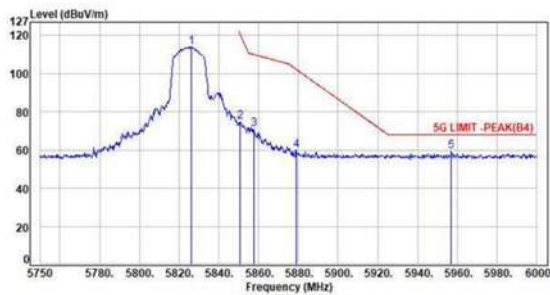

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5826.00	5.74	108.26	114.00	200.00	-86.00	Peak	100	72	P
2	5850.75	5.79	68.85	74.64	120.49	-45.85	Peak	100	72	P
3	5857.50	5.85	65.31	71.16	110.10	-38.94	Peak	100	72	P
4	5870.75	5.97	53.86	59.83	102.42	-42.59	Peak	100	72	P
5	5957.00	6.14	53.20	59.34	68.20	-8.86	Peak	100	72	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with Intel CPU -MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Vertical

Detector : Peak

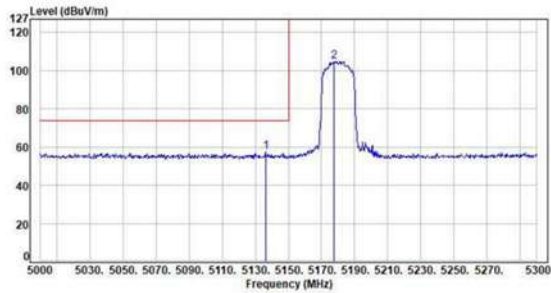


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5136.20	5.37	51.92	57.29	74.00	-16.71	Peak	334	96	P
2	5177.60	5.39	99.61	105.00	200.00	-95.00	Peak	334	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Vertical

Detector : Average

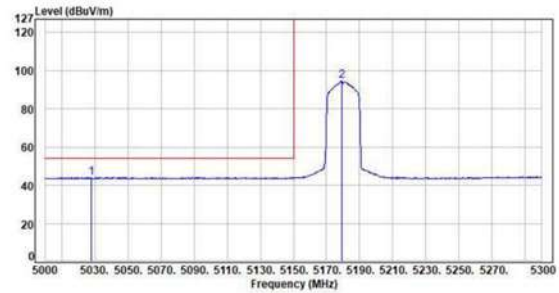


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5028.20	5.02	39.11	44.13	54.00	-9.87	Average	334	96	P
2	5179.40	5.39	89.46	94.85	200.00	-105.15	Average	334	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Horizontal

Detector : Peak

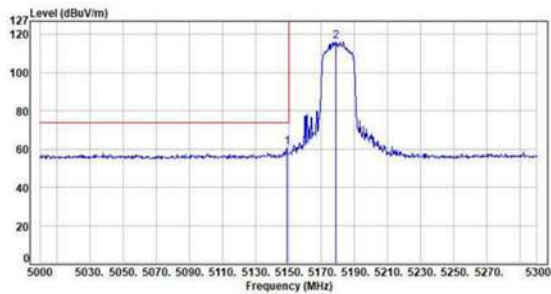


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5149.10	5.37	55.38	60.75	74.00	-13.25	Peak	115	357	P
2	5178.00	5.39	111.09	116.48	200.00	-83.52	Peak	115	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Horizontal

Detector : Average

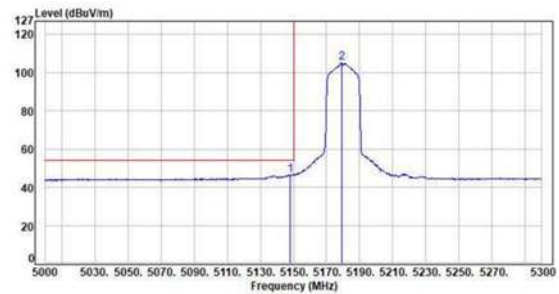


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.90	5.37	41.14	46.51	54.00	-7.49	Average	115	357	P
2	5179.40	5.39	99.80	105.19	200.00	-94.81	Average	115	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Peak

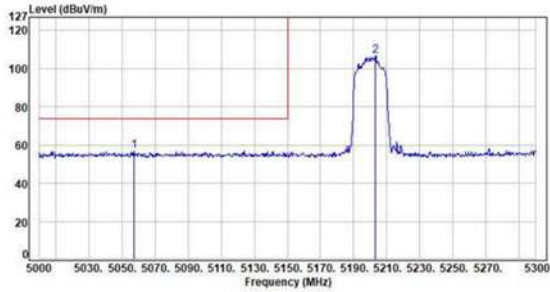

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5057.30	5.07	52.00	57.07	74.00	-16.93	Peak	400	101	P
2	5203.10	5.41	101.30	106.71	200.00	-93.29	Peak	400	101	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Average

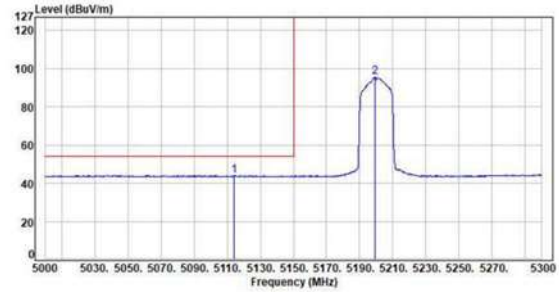

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5114.00	5.36	38.57	43.93	54.00	-10.07	Average	400	101	P
2	5199.20	5.40	90.10	95.50	200.00	-104.50	Average	400	101	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Peak

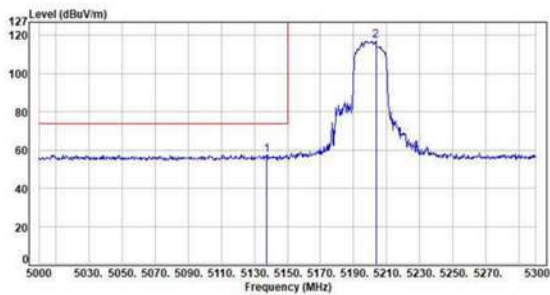

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5137.70	5.37	52.31	57.68	74.00	-16.32	Peak	100	358	P
2	5203.40	5.41	111.70	117.11	200.00	-82.89	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Average

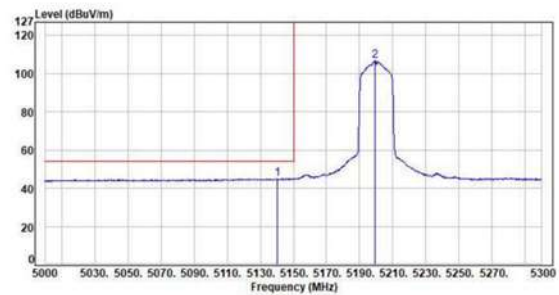


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5140.10	5.37	39.66	45.03	54.00	-8.97	Average	100	358	P
2	5199.20	5.40	101.13	106.53	200.00	-93.47	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Peak

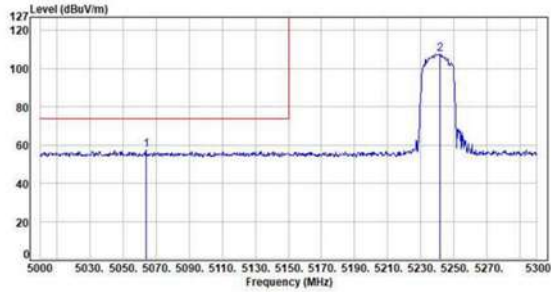

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5063.90	5.12	52.52	57.64	74.00	-16.36	Peak	328	96	P
2	5241.50	5.49	102.41	107.90	200.00	-92.10	Peak	328	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Average

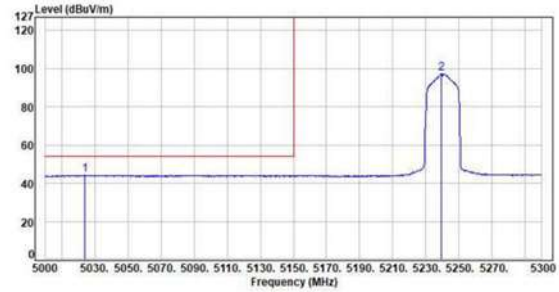

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5024.00	5.02	39.19	44.21	54.00	-9.79	Average	328	96	P
2	5239.40	5.49	91.98	97.47	200.00	-102.53	Average	328	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Peak

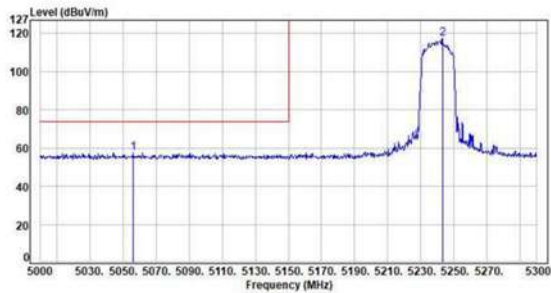

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5056.10	5.08	52.41	57.49	74.00	-16.51	Peak	100	358	P
2	5243.00	5.50	111.94	117.44	200.00	-82.56	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Average

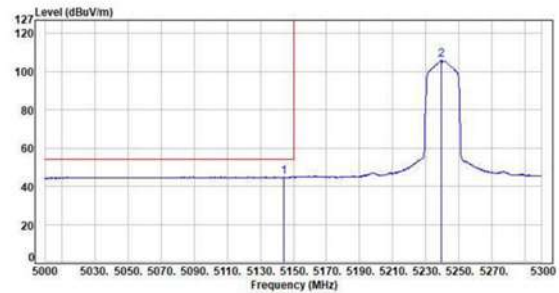


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5144.30	5.37	39.57	44.94	54.00	-9.06	Average	100	358	P
2	5239.40	5.49	100.57	106.06	200.00	-93.94	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Peak

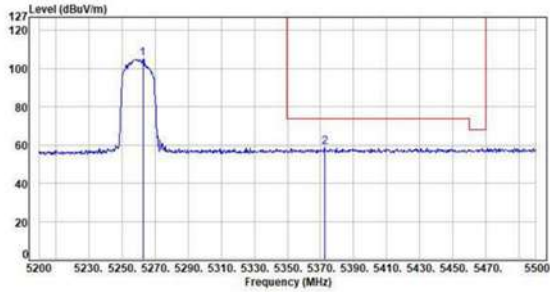

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5262.70	5.57	99.75	105.32	200.00	-94.68	Peak	394	102	P
2	5372.50	5.81	53.18	58.99	74.00	-15.01	Peak	394	102	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Average

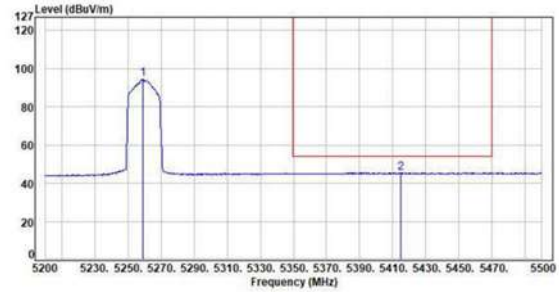

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	88.94	94.49	200.00	-105.51	Average	394	102	P
2	5414.00	5.88	39.62	45.50	54.00	-8.50	Average	394	102	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Peak

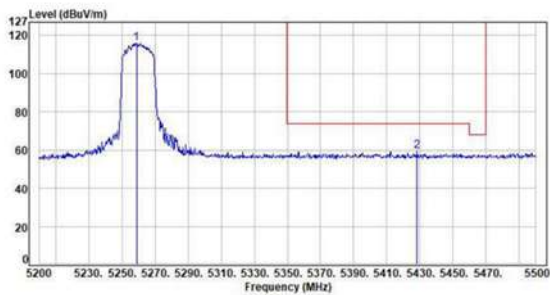

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5258.00	5.55	110.41	115.96	200.00	-84.04	Peak	140	358	P
2	5428.30	5.88	53.60	59.48	74.00	-14.52	Peak	140	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Average

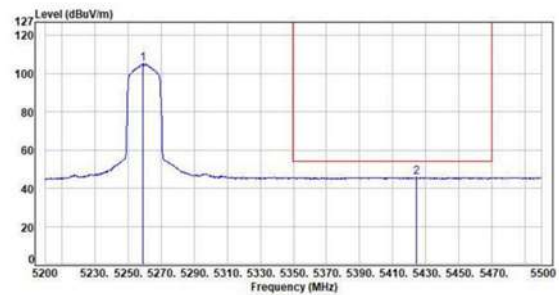


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5259.10	5.55	99.86	105.41	200.00	-94.59	Average	140	358	P
2	5424.40	5.87	39.77	45.64	54.00	-8.36	Average	140	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Peak

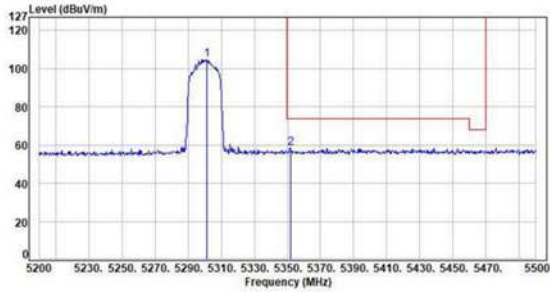

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5301.40	5.74	99.23	104.97	200.00	-95.03	Peak	100	220	P
2	5351.00	5.75	52.90	58.65	74.00	-15.35	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Average

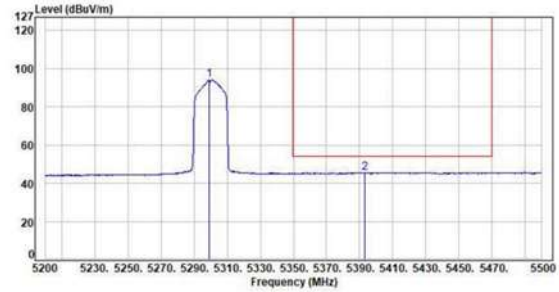

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	88.51	94.24	200.00	-105.76	Average	100	220	P
2	5393.20	5.86	39.63	45.49	54.00	-8.51	Average	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Peak

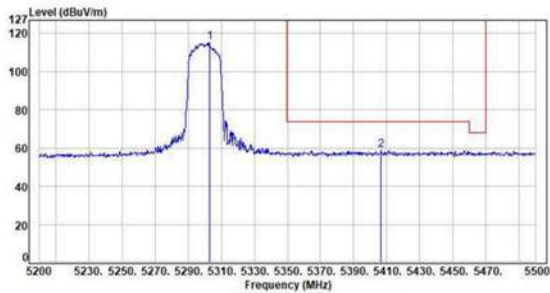

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5302.90	5.74	109.70	115.44	200.00	-84.56	Peak	156	357	P
2	5406.70	5.87	52.88	58.75	74.00	-15.25	Peak	156	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Average

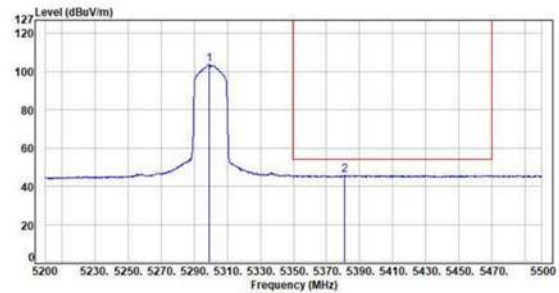


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5299.30	5.73	98.31	104.04	200.00	-95.96	Average	156	357	P
2	5380.90	5.83	39.84	45.67	54.00	-8.33	Average	156	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Peak

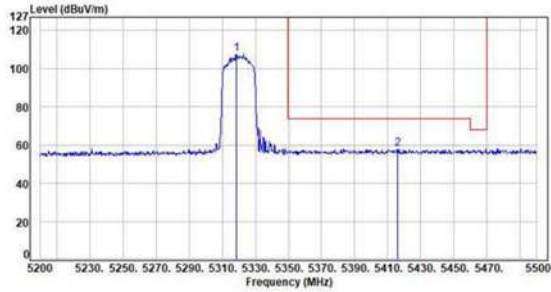

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5318.50	5.74	102.00	107.02	200.00	-92.18	Peak	352	93	P
2	5416.00	5.80	52.22	58.10	74.00	-15.90	Peak	352	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Average

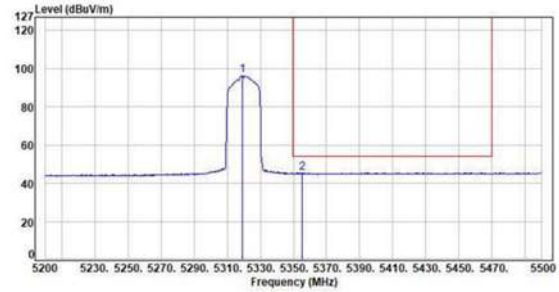

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5319.10	5.73	90.66	96.39	200.00	-103.61	Average	352	93	P
2	5359.10	5.76	39.65	45.41	54.00	-8.59	Average	352	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Peak

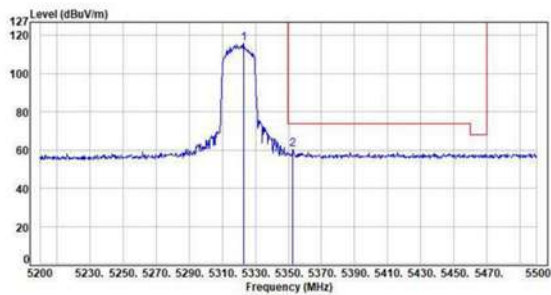

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5323.00	5.73	110.09	115.82	200.00	-84.18	Peak	155	358	P
2	5352.70	5.76	54.49	60.25	74.00	-13.75	Peak	155	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Average

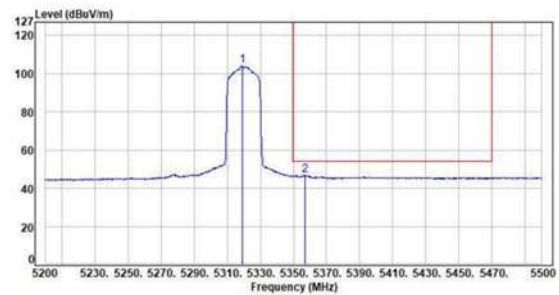


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5319.10	5.73	98.49	104.22	200.00	-95.78	Average	155	358	P
2	5356.90	5.75	41.10	46.85	54.00	-7.15	Average	155	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Peak

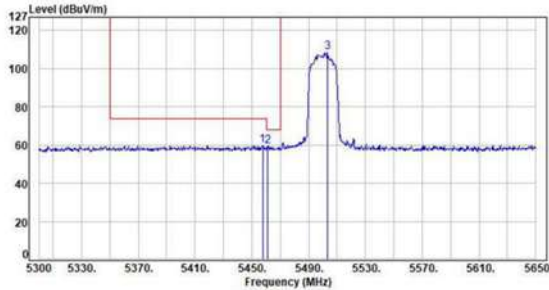

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	5.87	53.86	59.73	74.00	-14.27	Peak	376	96	P
2	5461.35	5.87	53.47	59.34	68.20	-8.86	Peak	376	96	P
3	5503.00	5.81	102.76	108.57	200.00	-91.43	Peak	376	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Average

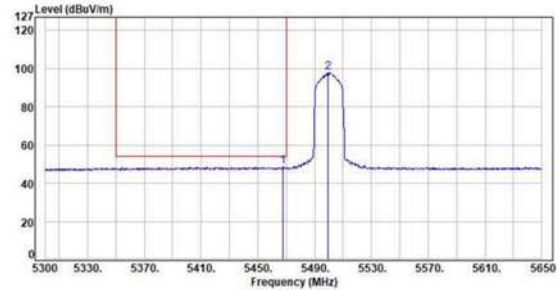

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5467.65	5.86	42.84	48.70	54.00	-5.30	Average	376	96	P
2	5499.15	5.81	92.16	97.97	200.00	-102.03	Average	376	96	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Peak

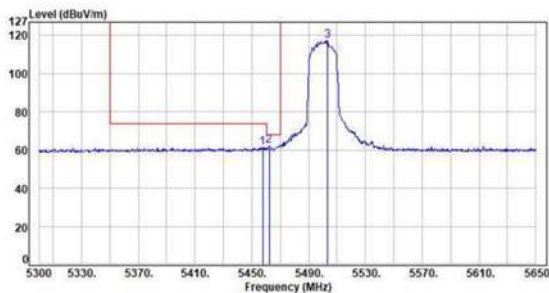

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5457.50	5.87	55.55	61.42	74.00	-12.58	Peak	100	360	P
2	5462.05	5.87	56.25	62.12	68.20	-6.08	Peak	100	360	P
3	5503.00	5.81	111.54	117.35	200.00	-82.65	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Average

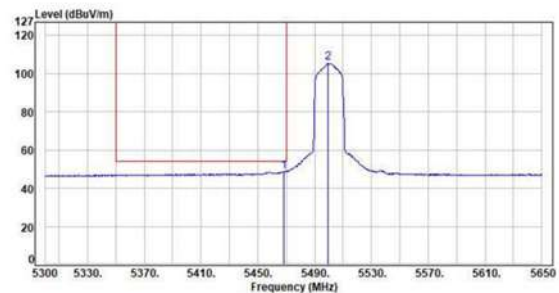


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.35	5.86	43.12	48.98	54.00	-5.02	Average	100	360	P
2	5499.15	5.81	99.79	105.60	200.00	-94.40	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Peak

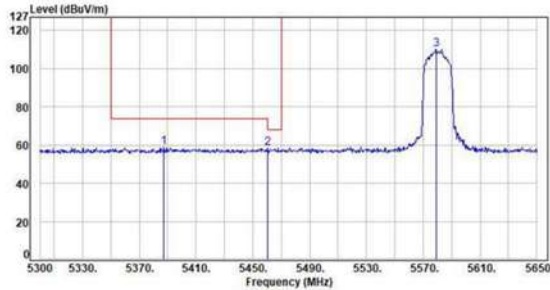

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5387.15	5.83	52.87	58.70	74.00	-15.30	Peak	384	88	P
2	5460.30	5.87	52.40	58.27	68.20	-9.93	Peak	384	88	P
3	5578.95	5.83	104.28	110.11	200.00	-89.89	Peak	384	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Average

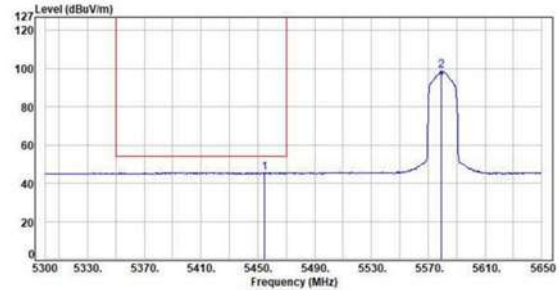

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5454.35	5.88	39.62	45.50	54.00	-8.50	Average	384	88	P
2	5579.30	5.83	92.97	98.80	200.00	-101.20	Average	384	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Peak

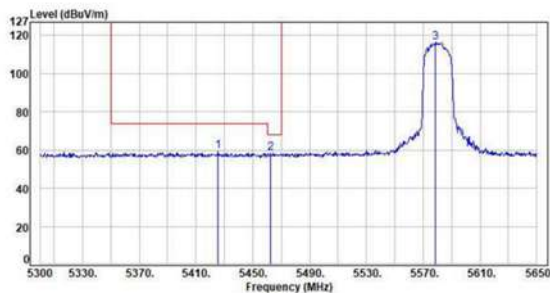

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5425.65	5.87	53.66	59.53	74.00	-14.47	Peak	105	360	P
2	5462.40	5.87	52.71	58.58	68.20	-9.62	Peak	105	360	P
3	5578.60	5.83	110.79	116.62	200.00	-83.38	Peak	105	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Average

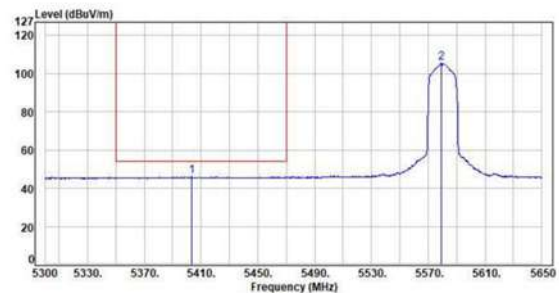


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5403.60	5.88	40.27	46.15	54.00	-7.85	Average	105	360	P
2	5579.30	5.83	99.83	105.66	200.00	-94.34	Average	105	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Peak

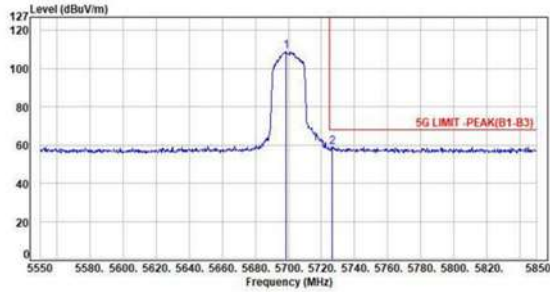

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5698.50	5.76	103.29	109.05	200.00	-90.95	Peak	263	87	P
2	5726.40	5.81	53.16	58.97	68.20	-9.23	Peak	263	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Average

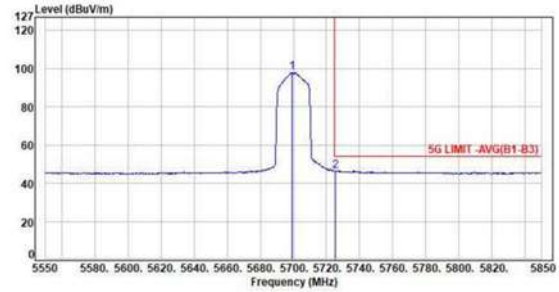

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5699.40	5.76	92.50	98.26	200.00	-101.74	Average	263	87	P
2	5725.50	5.81	40.69	46.50	54.00	-7.50	Average	263	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Peak

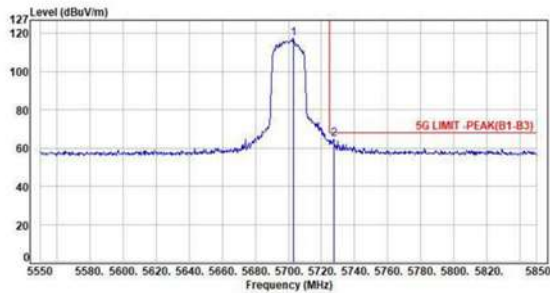

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5703.00	5.77	111.70	117.47	200.00	-82.53	Peak	100	327	P
2	5727.30	5.81	58.97	64.78	68.20	-3.42	Peak	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Average

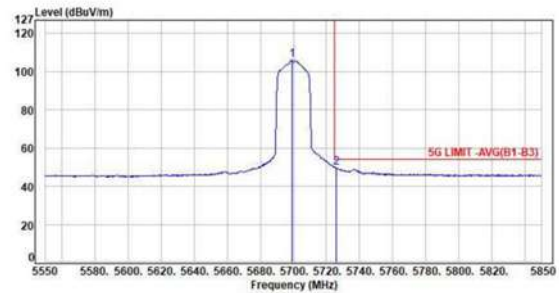


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5699.10	5.76	100.41	106.17	200.00	-93.83	Average	100	327	P
2	5725.00	5.81	43.89	49.70	54.00	-4.30	Average	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Peak

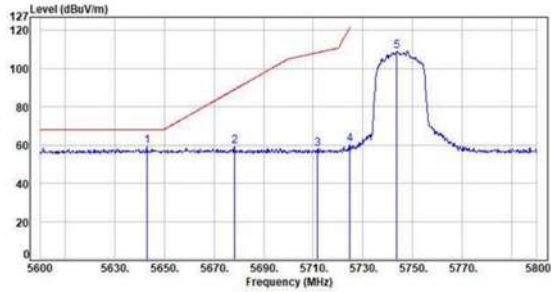

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5643.00	5.04	53.39	59.23	68.20	-8.97	Peak	375	260	P
2	5670.20	5.79	53.39	59.18	89.07	-29.89	Peak	375	260	P
3	5711.80	5.78	52.17	57.95	108.50	-50.55	Peak	375	260	P
4	5724.60	5.82	54.34	60.16	121.29	-61.13	Peak	375	260	P
5	5743.60	5.85	103.40	109.25	200.00	-90.75	Peak	375	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Peak

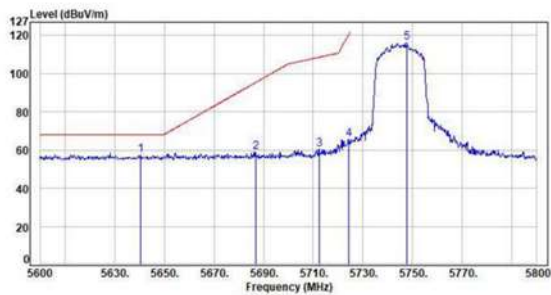

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5640.40	5.85	51.56	57.41	68.20	-10.79	Peak	100	328	P
2	5686.80	5.79	53.09	58.88	95.43	-36.55	Peak	100	328	P
3	5712.40	5.78	54.75	60.53	108.67	-48.14	Peak	100	328	P
4	5724.20	5.82	59.66	65.48	120.30	-54.80	Peak	100	328	P
5	5747.00	5.87	110.37	116.24	200.00	-83.76	Peak	100	328	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0

Pol : Vertical

Detector : Peak

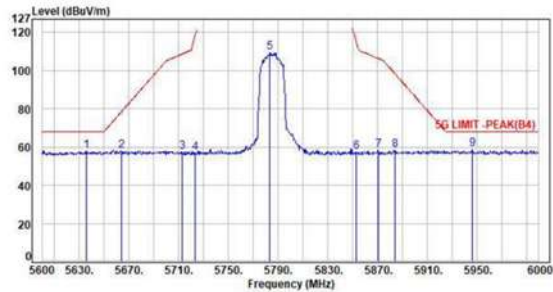

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5636.00	5.04	52.28	58.12	68.20	-10.08	Peak	315	83	P
2	5663.60	5.81	52.20	58.01	78.26	-20.25	Peak	315	83	P
3	5713.20	5.79	51.82	57.61	108.90	-51.29	Peak	315	83	P
4	5723.20	5.82	51.34	57.16	118.10	-60.94	Peak	315	83	P
5	5783.60	5.75	103.64	109.39	200.00	-90.61	Peak	315	83	P
6	5853.20	5.82	51.53	57.35	114.90	-57.55	Peak	315	83	P
7	5879.00	5.93	52.31	58.24	106.38	-48.14	Peak	315	83	P
8	5884.00	6.00	52.26	58.26	96.54	-40.28	Peak	315	83	P
9	5946.00	6.12	52.73	58.85	68.20	-9.35	Peak	315	83	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH157 NSS1 MCS0

Pol : Horizontal

Detector : Peak

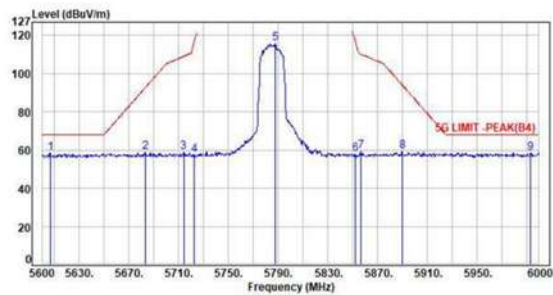

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5606.00	5.04	52.60	58.44	68.20	-9.76	Peak	100	352	P
2	5683.20	5.79	52.97	58.76	92.77	-34.01	Peak	100	352	P
3	5714.00	5.79	53.34	59.13	109.12	-49.99	Peak	100	352	P
4	5722.40	5.81	51.55	57.36	116.27	-58.91	Peak	100	352	P
5	5788.00	5.74	110.10	115.92	200.00	-84.08	Peak	100	352	P
6	5852.00	5.80	52.11	57.91	117.64	-59.73	Peak	100	352	P
7	5856.40	5.85	53.33	59.18	110.41	-51.23	Peak	100	352	P
8	5890.00	6.06	53.45	59.51	94.10	-34.59	Peak	100	352	P
9	5993.20	6.22	52.34	58.56	68.20	-9.64	Peak	100	352	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Vertical Detector : Peak

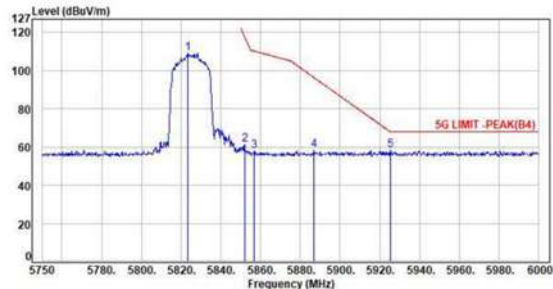

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5823.50	5.75	103.42	109.17	200.00	-90.83	Peak	100	261	P
2	5852.00	5.80	55.63	61.43	117.64	-56.21	Peak	100	261	P
3	5856.75	5.85	51.87	57.72	110.31	-52.59	Peak	100	261	P
4	5887.00	6.02	52.44	58.46	96.32	-37.86	Peak	100	261	P
5	5925.50	6.11	52.10	58.21	68.20	-9.99	Peak	100	261	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Peak

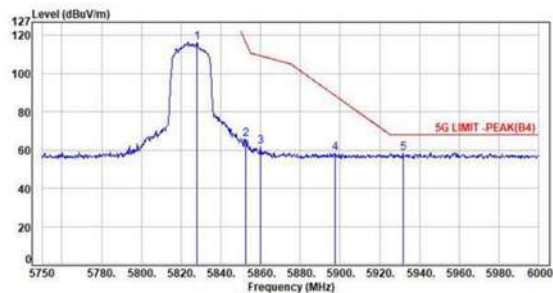


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5828.00	5.75	110.83	116.58	200.00	-83.42	Peak	100	329	P
2	5852.50	5.81	59.76	65.57	116.50	-50.93	Peak	100	329	P
3	5859.75	5.86	55.81	61.67	109.47	-47.80	Peak	100	329	P
4	5897.50	6.10	52.40	58.50	88.55	-30.05	Peak	100	329	P
5	5931.75	6.12	52.42	58.54	68.20	-9.66	Peak	100	329	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Peak

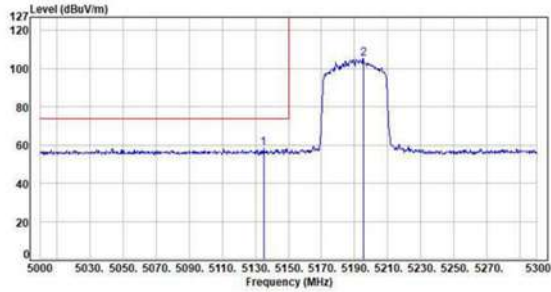

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5135.00	5.37	53.17	58.54	74.00	-15.46	Peak	314	98	P
2	5195.30	5.39	99.78	105.17	200.00	-94.83	Peak	314	98	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Average

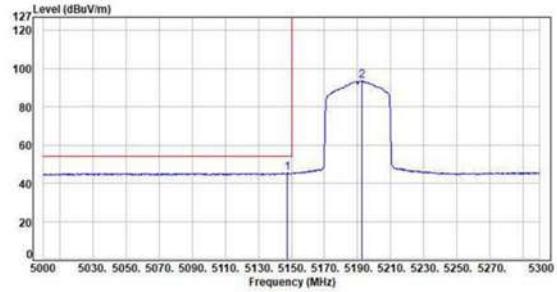

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.60	5.37	39.98	45.35	54.00	-8.65	Average	314	98	P
2	5192.30	5.39	98.34	103.73	200.00	-96.27	Average	314	98	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Peak

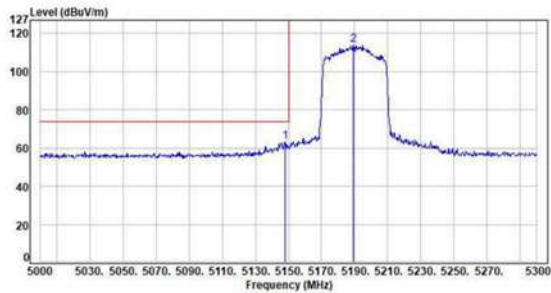

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.90	5.37	57.80	63.17	74.00	-10.83	Peak	100	0	P
2	5189.00	5.39	100.52	105.91	200.00	-94.09	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Average

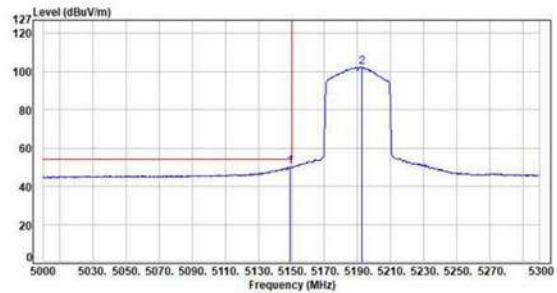


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5149.40	5.37	44.65	50.02	54.00	-3.98	Average	100	0	P
2	5192.30	5.39	97.16	102.55	200.00	-97.45	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Peak

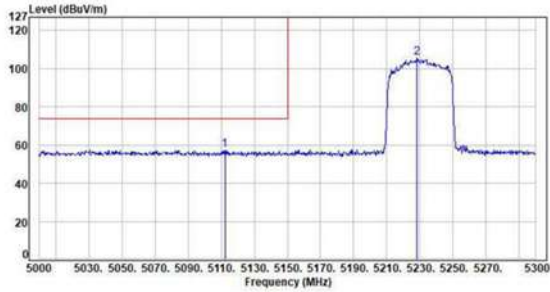

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5112.20	5.36	52.05	57.41	74.00	-16.59	Peak	345	94	P
2	5228.00	5.47	100.14	105.61	200.00	-94.39	Peak	345	94	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Average

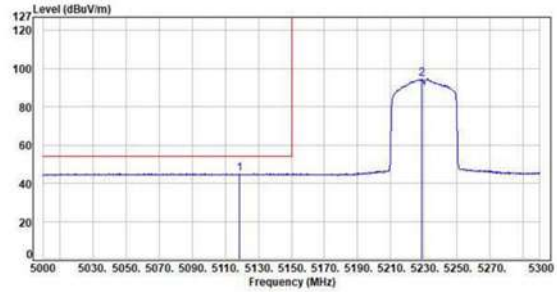

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5118.50	5.36	39.51	44.87	54.00	-9.13	Average	345	94	P
2	5228.60	5.47	98.96	104.43	200.00	-95.57	Average	345	94	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Peak

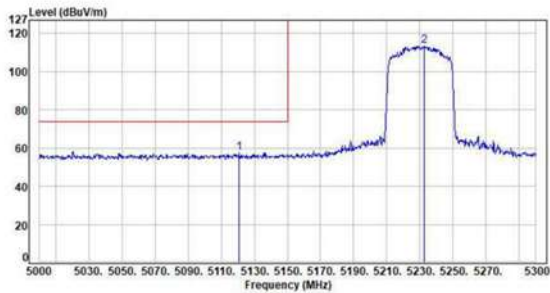

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5120.90	5.36	52.25	57.61	74.00	-16.39	Peak	100	360	P
2	5232.80	5.47	100.12	105.59	200.00	-94.41	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Average

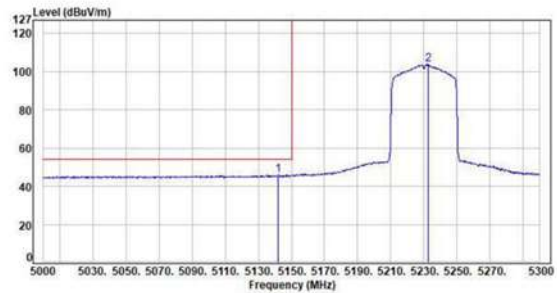


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5142.20	5.38	40.69	46.07	54.00	-7.93	Average	100	360	P
2	5232.50	5.46	98.24	103.70	200.00	-96.30	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Peak

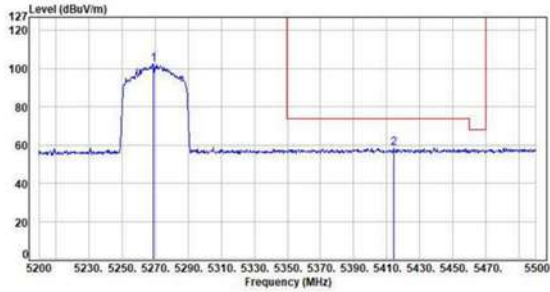

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5269.00	5.60	96.55	102.15	200.00	-97.85	Peak	100	210	P
2	5414.20	5.87	52.57	58.44	74.00	-15.56	Peak	100	210	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Average

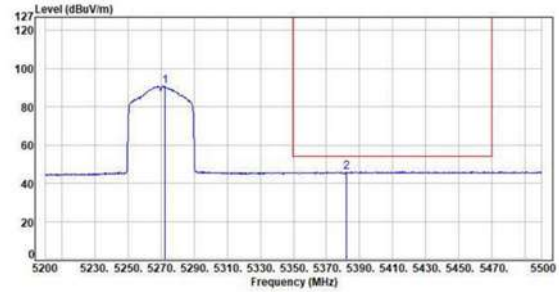

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5272.30	5.61	85.20	90.81	200.00	-109.19	Average	100	210	P
2	5382.10	5.82	40.05	45.87	54.00	-8.13	Average	100	210	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Peak

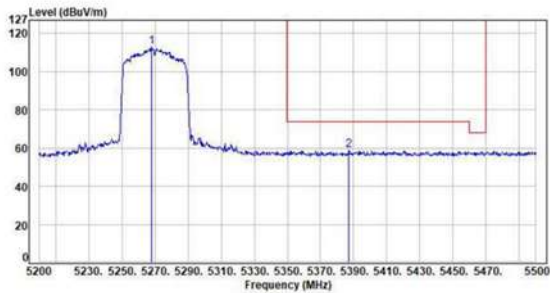

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5267.00	5.60	107.19	112.79	200.00	-87.21	Peak	100	360	P
2	5387.20	5.83	52.85	58.68	74.00	-15.32	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Average

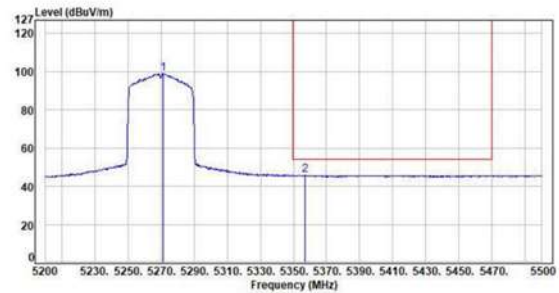


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5271.40	5.61	93.36	98.97	200.00	-101.03	Average	100	360	P
2	5356.90	5.75	39.98	45.73	54.00	-8.27	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Peak

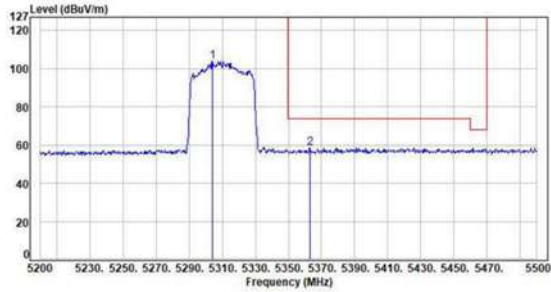

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5304.10	5.74	98.29	104.03	200.00	-95.97	Peak	100	215	P
2	5302.90	5.79	52.63	58.42	74.00	-15.58	Peak	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Average

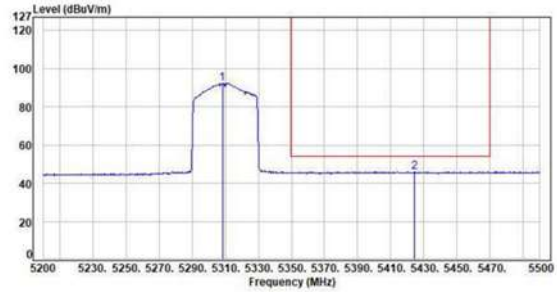

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5308.30	5.73	86.65	92.38	200.00	-107.62	Average	100	215	P
2	5424.40	5.87	40.09	45.96	54.00	-8.04	Average	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Peak

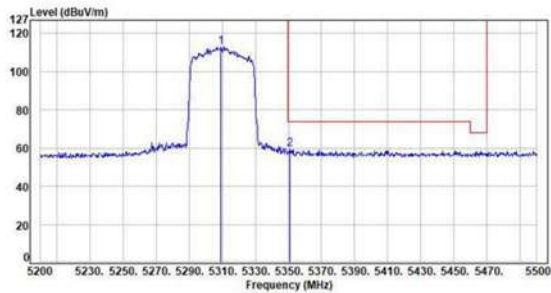

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5309.20	5.73	107.45	113.18	200.00	-86.82	Peak	123	357	P
2	5350.90	5.75	53.86	59.61	74.00	-14.39	Peak	123	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Average

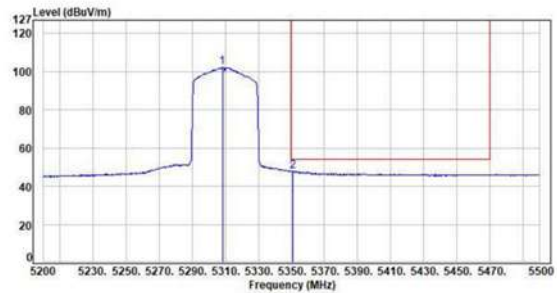


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5308.30	5.73	96.52	102.25	200.00	-97.75	Average	123	357	P
2	5350.60	5.75	42.10	47.85	54.00	-6.15	Average	123	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Peak

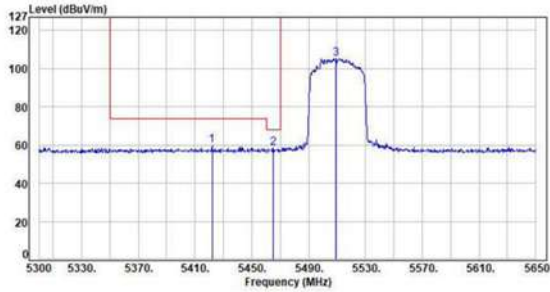

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5421.00	5.87	53.77	59.64	74.00	-14.36	Peak	392	85	P
2	5465.20	5.87	52.54	58.41	68.20	-9.79	Peak	392	85	P
3	5508.95	5.81	99.65	105.46	200.00	-94.54	Peak	392	85	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Average

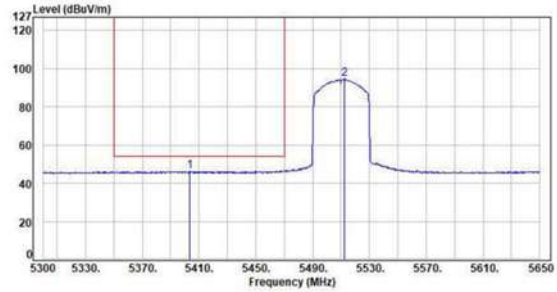

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5403.60	5.88	48.43	54.31	54.00	-7.69	Average	392	85	P
2	5512.45	5.81	88.95	94.76	200.00	-105.24	Average	392	85	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Peak

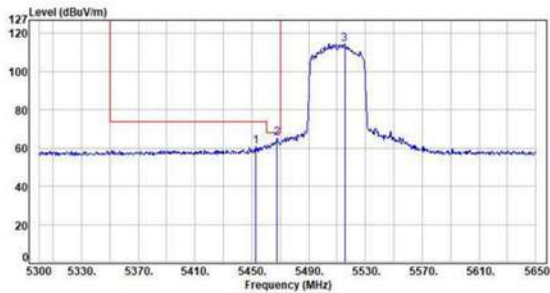

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5452.60	5.88	55.02	60.90	74.00	-13.10	Peak	100	360	P
2	5467.65	5.86	59.37	65.23	68.20	-2.97	Peak	100	360	P
3	5515.25	5.81	108.87	114.68	200.00	-85.32	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Average

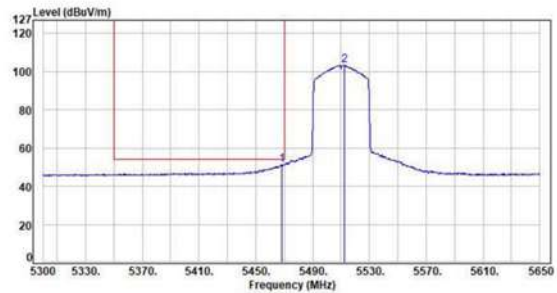


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5468.35	5.86	45.40	51.26	54.00	-2.74	Average	100	360	P
2	5512.45	5.81	97.75	103.56	200.00	-96.44	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Vertical Detector : Peak

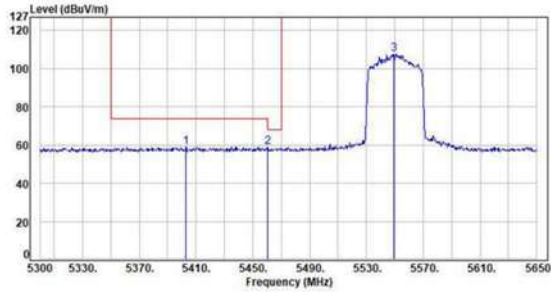

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5402.90	5.87	53.18	59.05	74.00	-14.95	Peak	386	88	P
2	5460.65	5.87	53.06	58.93	68.20	-9.27	Peak	386	88	P
3	5549.20	5.82	101.82	107.64	200.00	-92.36	Peak	386	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Vertical Detector : Average

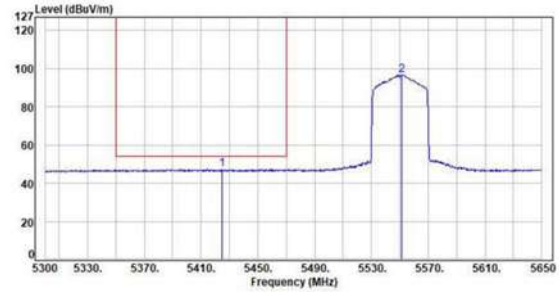

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5424.60	5.87	41.47	47.34	54.00	-6.66	Average	386	88	P
2	5550.95	5.82	98.97	104.79	200.00	-95.21	Average	386	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Horizontal Detector : Peak

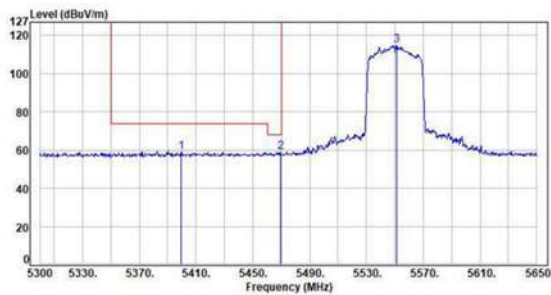

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5399.40	5.87	53.20	59.07	74.00	-14.93	Peak	100	360	P
2	5469.40	5.85	53.12	58.97	68.20	-9.23	Peak	100	360	P
3	5551.30	5.82	109.03	114.85	200.00	-85.15	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Horizontal Detector : Average

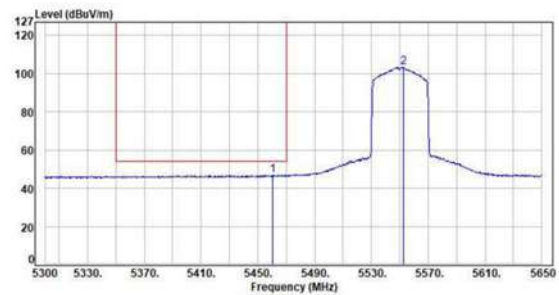


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.65	5.87	40.93	46.80	54.00	-7.20	Average	100	360	P
2	5552.35	5.82	97.55	103.37	200.00	-96.63	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Peak

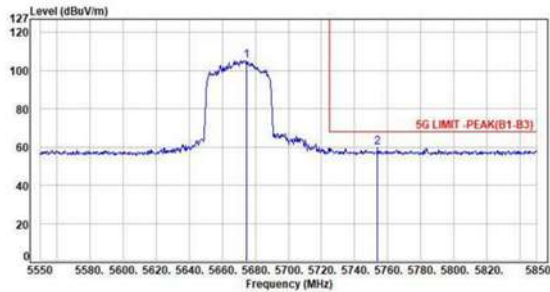

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5674.00	5.81	99.68	105.49	200.00	-94.51	Peak	100	128	P
2	5753.70	5.87	53.92	59.79	68.20	-8.41	Peak	100		

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Average

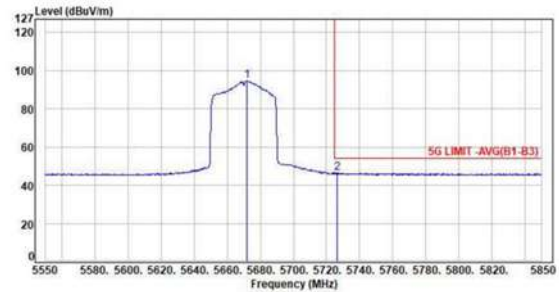

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5672.10	5.81	88.86	94.67	200.00	-105.33	Average	100	128	P
2	5726.40	5.81	40.47	46.28	54.00	-7.72	Average	100		

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Peak

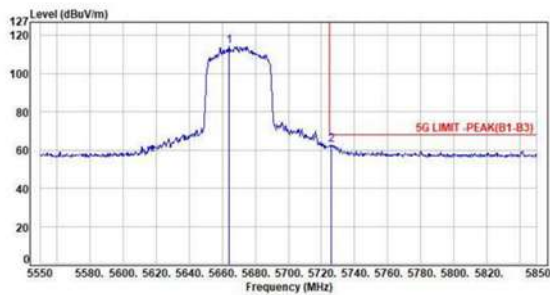

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5664.00	5.82	108.52	114.34	200.00	-85.66	Peak	100	357	P
2	5726.10	5.81	57.04	62.85	68.20	-5.35	Peak	100	357	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Average

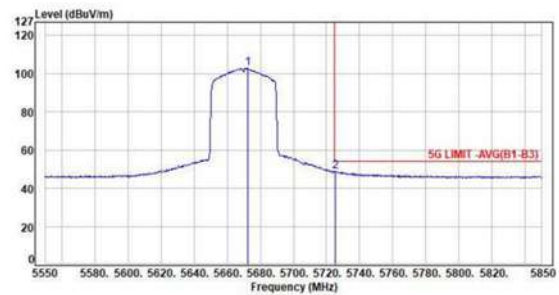

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5672.40	5.82	97.07	102.89	200.00	-97.11	Average	100	357	P
2	5725.50	5.81	42.95	48.76	54.00	-5.24	Average	100	357	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0

Pol : Vertical

Detector : Peak

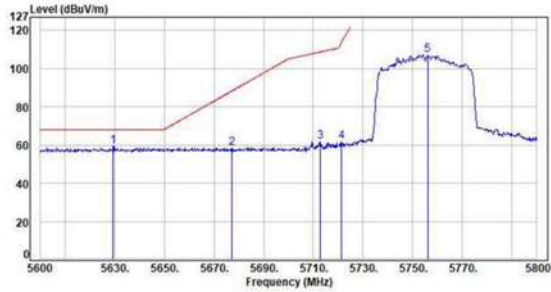

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5629.40	5.84	53.66	59.50	68.20	-8.70	Peak	302	90	P
2	5677.20	5.80	52.06	58.66	88.33	-29.67	Peak	302	90	P
3	5712.80	5.79	56.09	61.88	108.78	-46.90	Peak	302	90	P
4	5721.40	5.81	55.89	61.70	113.99	-52.29	Peak	302	90	P
5	5756.00	5.86	101.41	107.27	200.00	-92.73	Peak	302	90	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH151 NSS1 MCS0

Pol : Horizontal

Detector : Peak

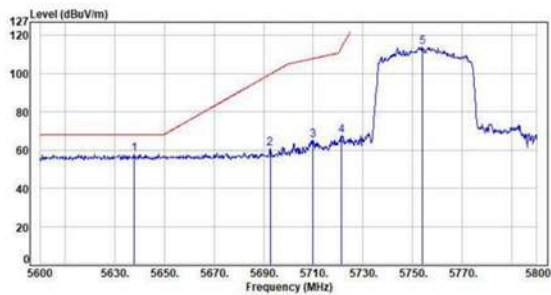

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5637.80	5.85	51.98	57.83	68.20	-10.37	Peak	112	330	P
2	5692.60	5.76	54.90	60.66	99.72	-39.06	Peak	112	330	P
3	5710.00	5.78	59.56	65.34	108.00	-42.66	Peak	112	330	P
4	5721.40	5.81	61.78	67.59	113.99	-46.40	Peak	112	330	P
5	5754.00	5.86	100.21	106.07	200.00	-85.93	Peak	112	330	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Vertical Detector : Peak

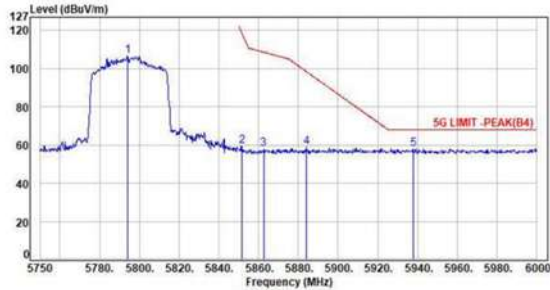

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5794.00	5.70	100.87	106.57	200.00	-93.43	Peak	100	93	P
2	5851.50	5.80	53.71	59.51	118.78	-59.27	Peak	100	93	P
3	5862.50	5.88	52.25	58.13	108.70	-50.57	Peak	100	93	P
4	5884.25	6.01	52.85	58.86	98.35	-39.49	Peak	100	93	P
5	5937.75	6.12	51.81	57.93	68.20	-10.27	Peak	100	93	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Peak

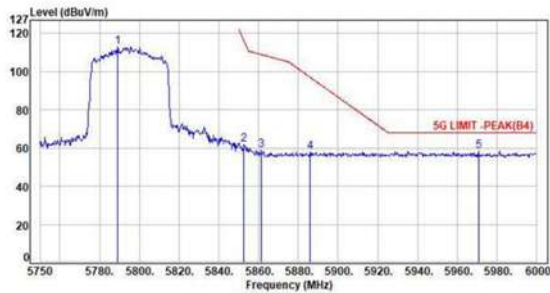


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5789.10	5.73	107.33	113.06	200.00	-86.94	Peak	100	43	P
2	5852.70	5.81	55.82	61.63	116.04	-54.41	Peak	100	43	P
3	5861.40	5.87	53.21	59.08	109.01	-49.93	Peak	100	43	P
4	5886.00	6.02	51.89	57.91	97.06	-39.15	Peak	100	43	P
5	5970.60	6.17	52.22	58.39	68.20	-9.81	Peak	100	43	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Peak

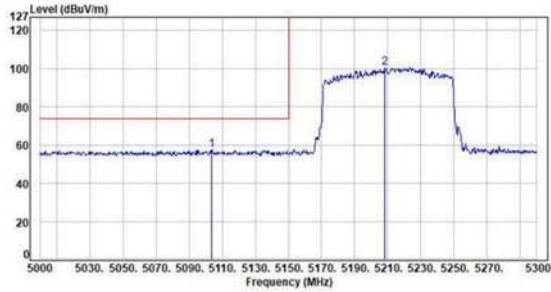

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5103.80	5.36	52.17	57.53	74.00	-16.47	Peak	351	97	P
2	5200.20	5.41	95.16	100.57	200.00	-99.43	Peak	351	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Average

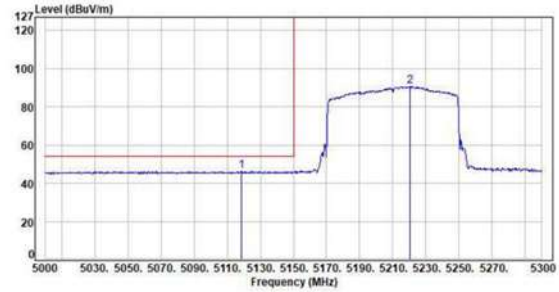

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5118.80	5.35	41.11	46.46	54.00	-7.54	Average	351	97	P
2	5220.20	5.43	85.29	90.72	200.00	-109.28	Average	351	97	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Peak

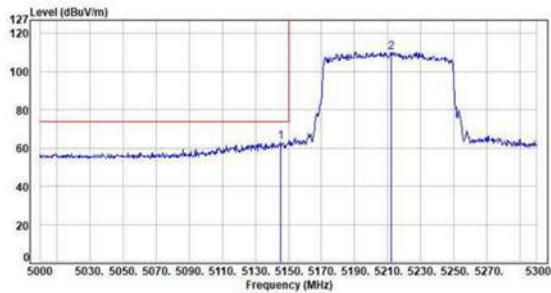

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5145.20	5.37	57.68	63.05	74.00	-10.95	Peak	100	358	P
2	5212.10	5.42	104.75	110.17	200.00	-89.83	Peak	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Average

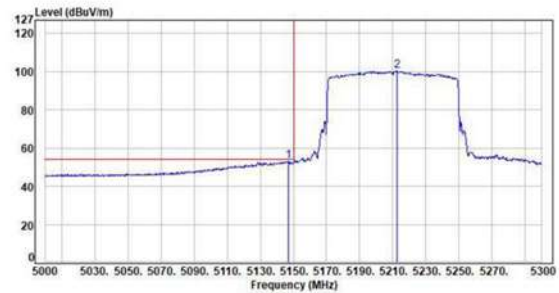


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5147.00	5.37	47.55	52.92	54.00	-1.08	Average	100	358	P
2	5212.70	5.43	94.85	100.28	200.00	-99.72	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Peak

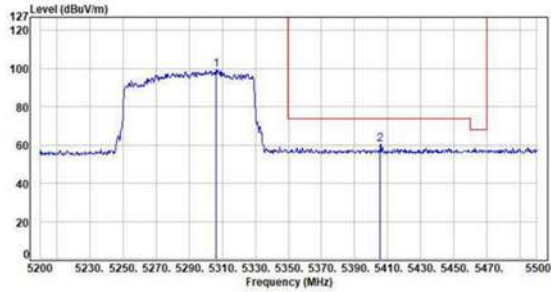

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5306.50	5.73	93.61	99.34	200.00	-100.66	Peak	100	218	P
2	5405.50	5.88	54.43	60.31	74.00	-13.69	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Average

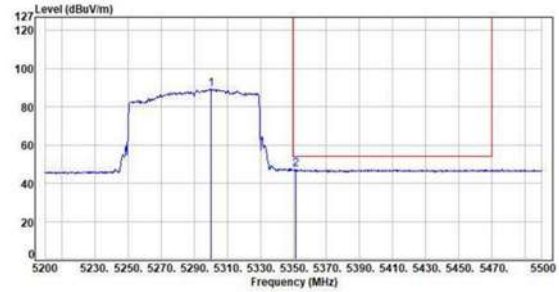

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5306.20	5.73	83.65	89.38	200.00	-110.62	Average	100	218	P
2	5351.20	5.75	41.46	47.21	54.00	-6.79	Average	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Peak

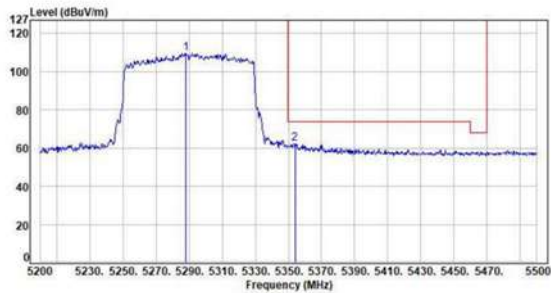

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5288.20	5.67	104.14	109.81	200.00	-90.19	Peak	100	2	P
2	5353.90	5.76	56.76	62.52	74.00	-11.48	Peak	100	2	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Average

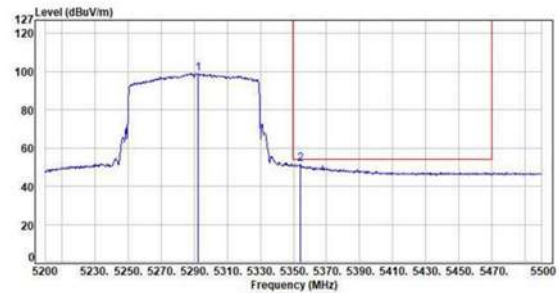

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5292.40	5.70	93.33	99.03	200.00	-100.97	Average	100	2	P
2	5354.20	5.76	45.69	51.45	54.00	-2.55	Average	100	2	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor