




Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

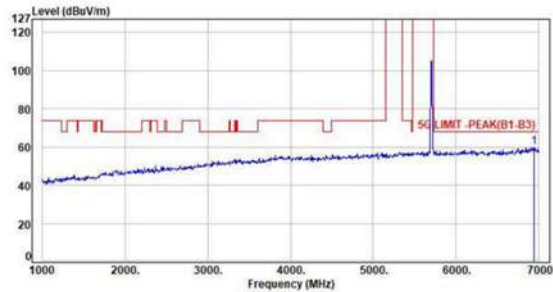

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	51.90	59.68	68.20	-8.52	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

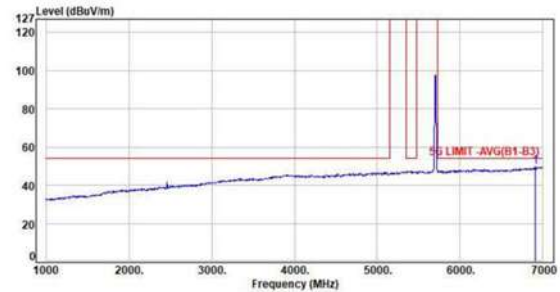

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	7.63	41.98	49.61	54.00	-4.39	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

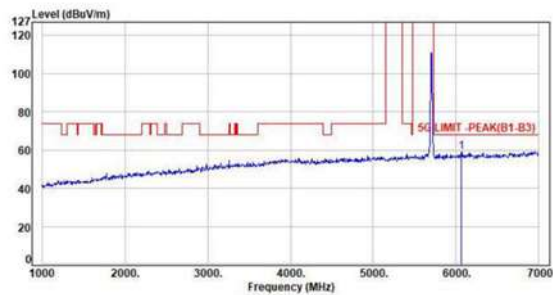

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6064.00	6.41	52.62	59.03	68.20	-9.17	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

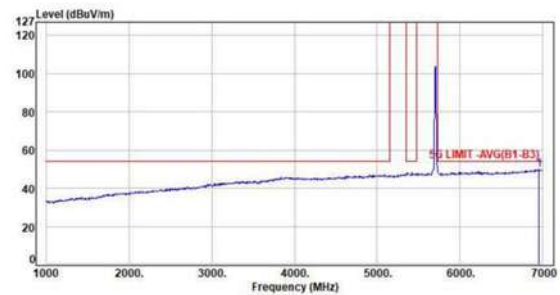

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	41.96	49.76	54.00	-4.24	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

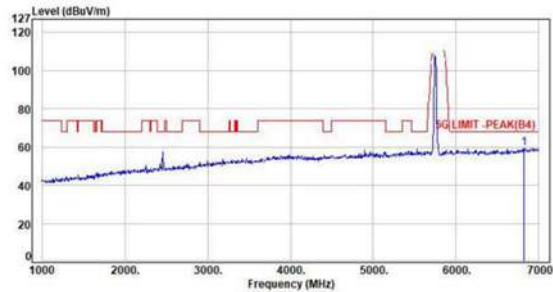

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5820.00	7.56	51.76	59.32	68.20	-8.88	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Average

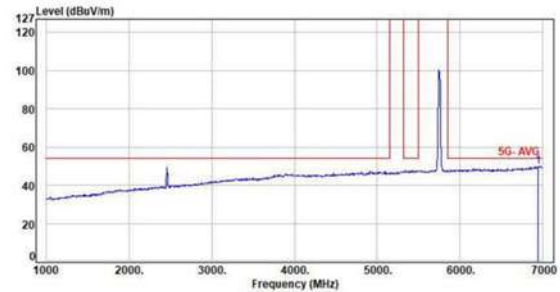

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5820.00	7.78	42.07	49.85	54.00	-4.15	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

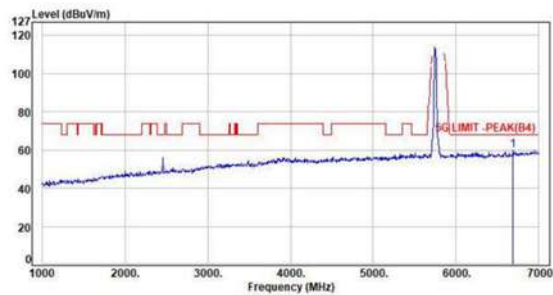

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5820.00	7.42	52.36	59.78	68.20	-8.42	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Average

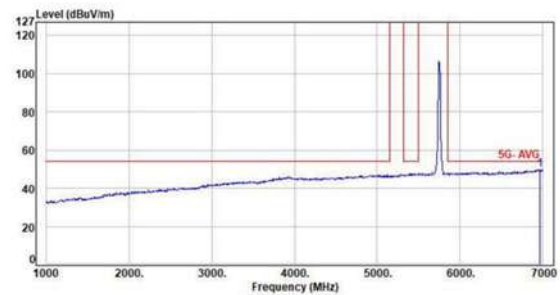

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5820.00	7.77	41.84	49.61	54.00	-4.39	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

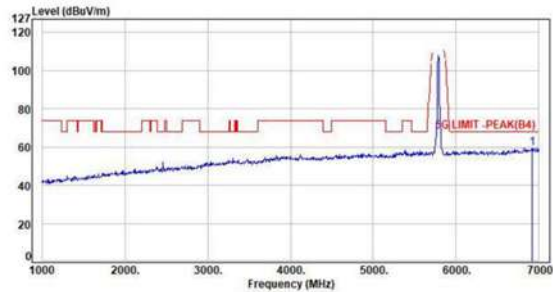

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5916.00	7.66	51.81	59.47	68.20	-8.73	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Average

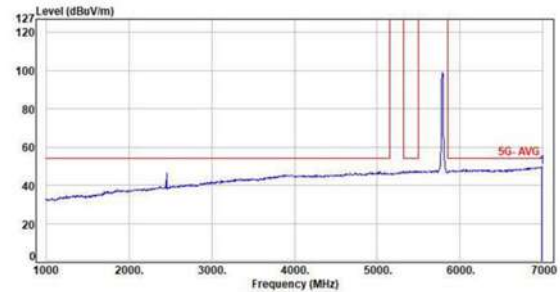

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5988.00	7.71	41.86	49.57	54.00	-4.43	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

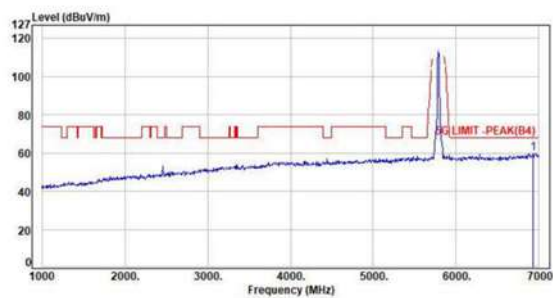

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5934.00	7.74	52.13	59.87	68.20	-8.33	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Average

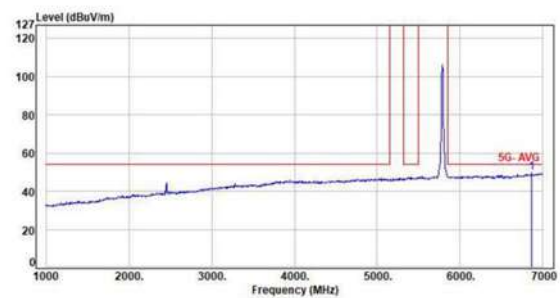

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5862.00	7.62	42.01	49.63	54.00	-4.37	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

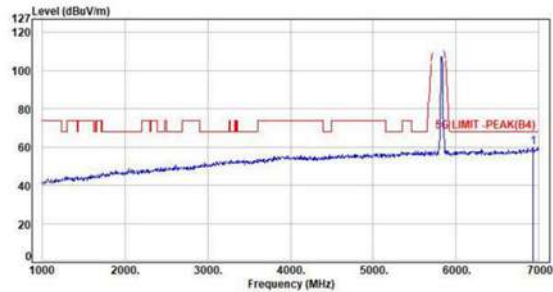

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	7.71	52.00	59.71	68.20	-8.49	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Average

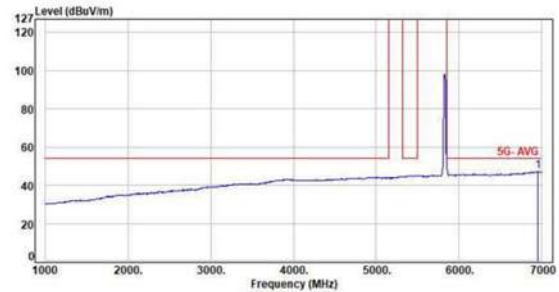

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	7.77	39.68	47.45	54.00	-6.55	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

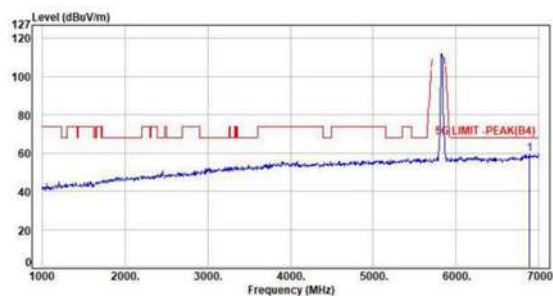

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6886.00	7.60	51.81	59.41	68.20	-8.79	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Average

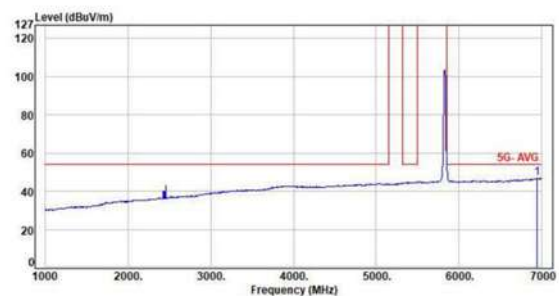

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	38.97	46.75	54.00	-7.25	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For M/B with Intel CPU -MIMO


Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Pol : Vertical Detector : Peak

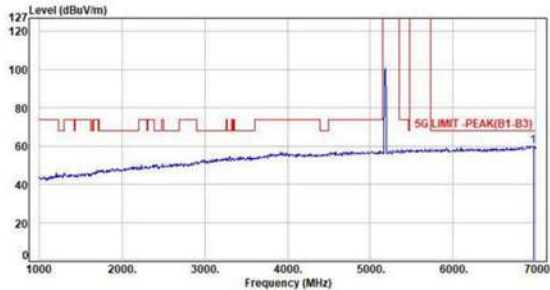

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	7.75	52.37	60.12	68.20	-8.08	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Pol : Vertical Detector : Average

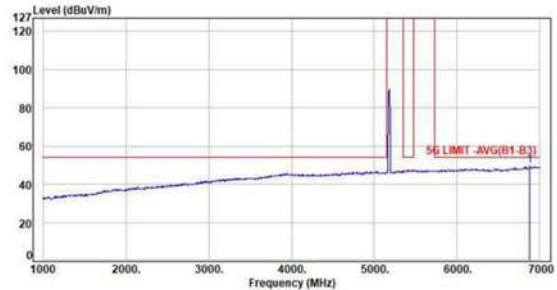

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6880.00	7.61	42.03	49.64	54.00	-4.36	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Pol : Horizontal Detector : Peak

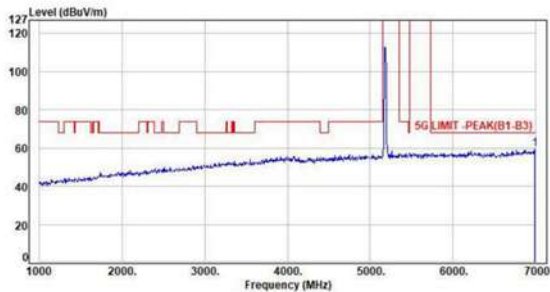

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	51.64	59.38	68.20	-8.82	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0
Pol : Horizontal Detector : Average

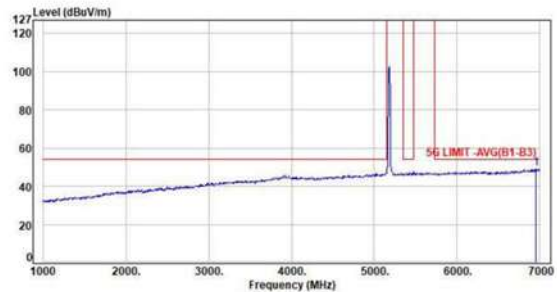


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	41.33	49.13	54.00	-4.87	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Peak

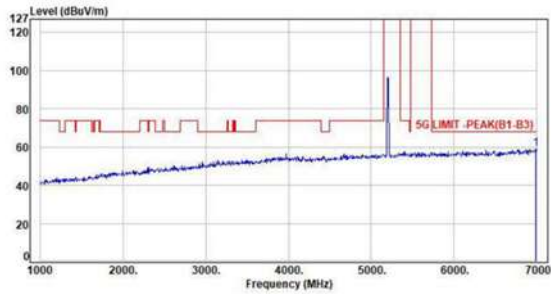

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	51.17	58.91	68.20	-9.29	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Average

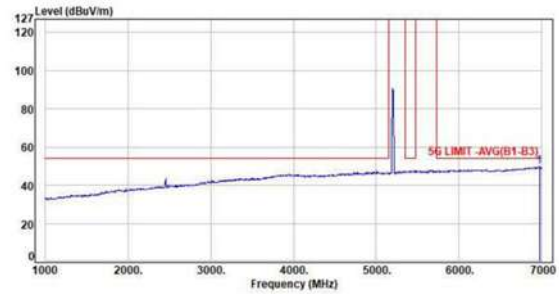

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6978.00	7.75	41.99	49.74	54.00	-4.26	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Peak

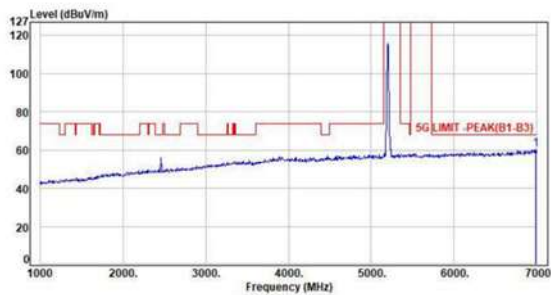

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	52.50	60.21	68.20	-7.99	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Average

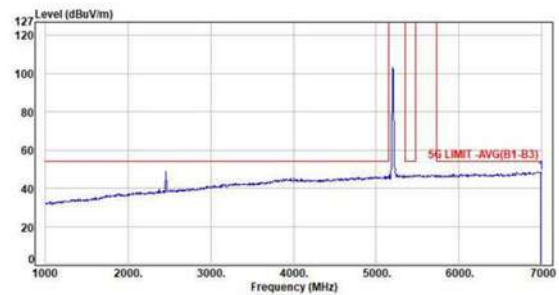


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	40.75	48.46	54.00	-5.54	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Peak

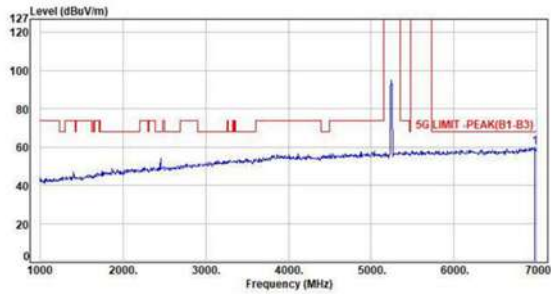

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	7.74	52.05	59.79	68.20	-8.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Average

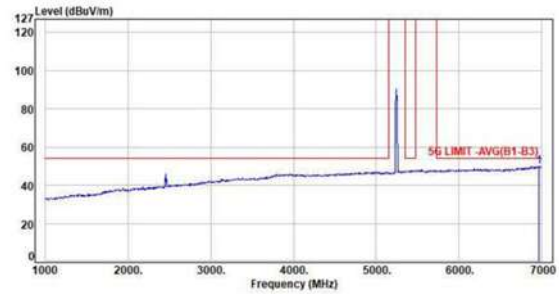

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	7.77	42.04	49.81	54.00	-4.19	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Peak

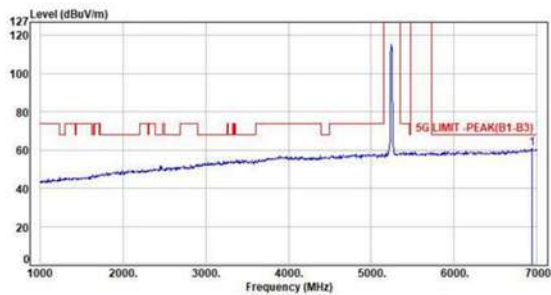

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	53.29	61.07	68.20	-7.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Average

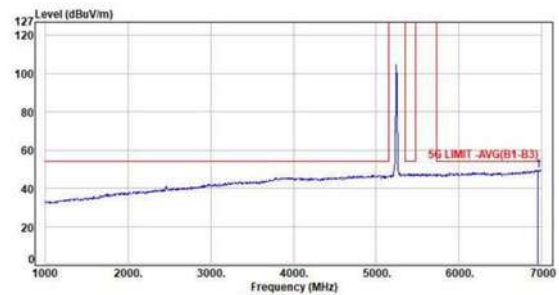


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	41.65	49.45	54.00	-4.55	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Peak

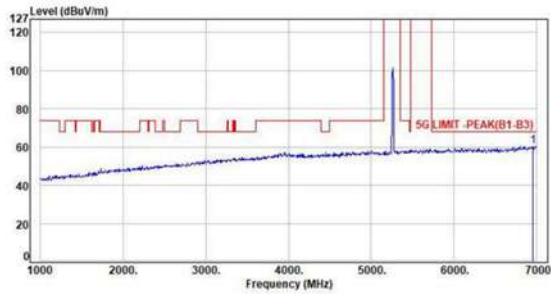

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	7.77	52.57	60.34	68.20	-7.86	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Average

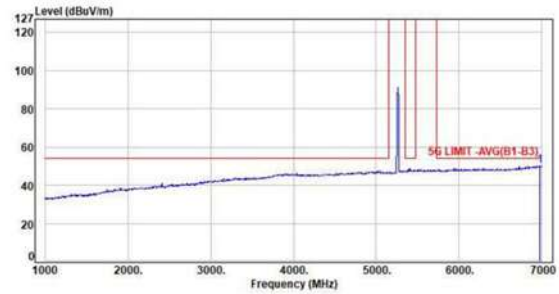

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	7.74	42.48	50.22	54.00	-3.78	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Peak

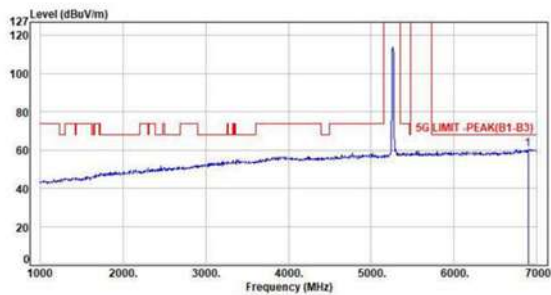

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6892.00	7.62	52.88	60.50	68.20	-7.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Average

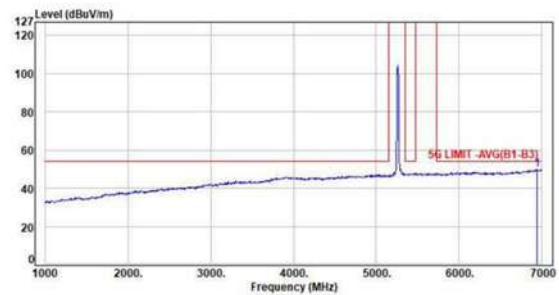


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6940.00	7.76	41.86	49.62	54.00	-4.38	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Peak

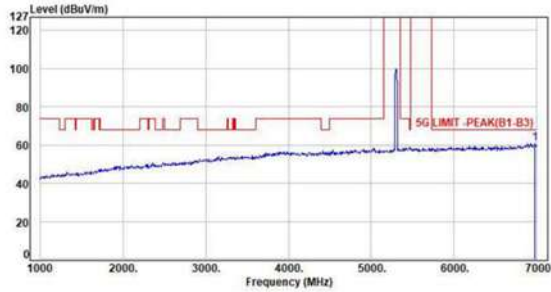

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	7.74	53.13	60.87	68.20	-7.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Average

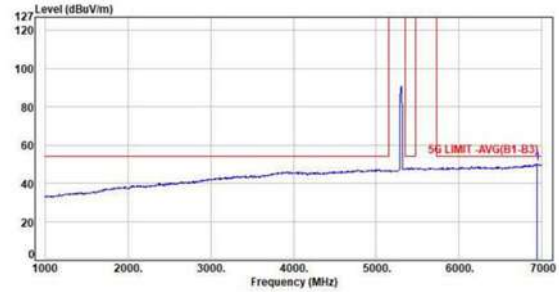

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	42.25	50.03	54.00	-3.97	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Peak

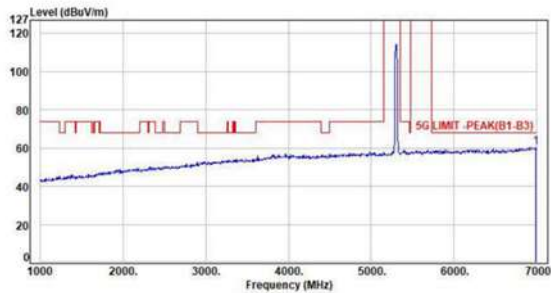

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	52.87	60.58	68.20	-7.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Average

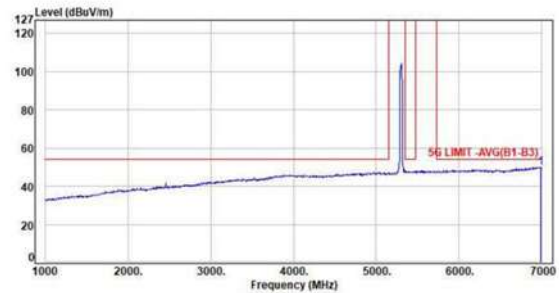


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	42.23	49.94	54.00	-4.06	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Peak

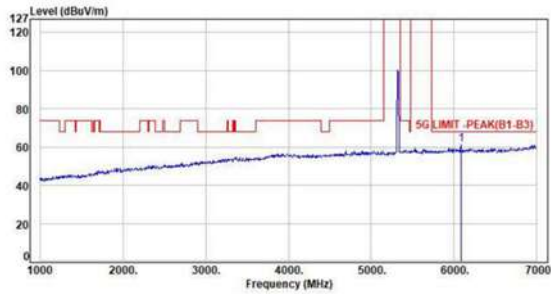

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6082.00	6.45	54.66	61.11	68.20	-7.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Average

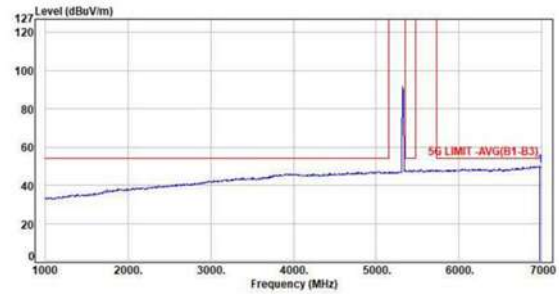

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	7.74	42.47	50.21	54.00	-3.79	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Peak

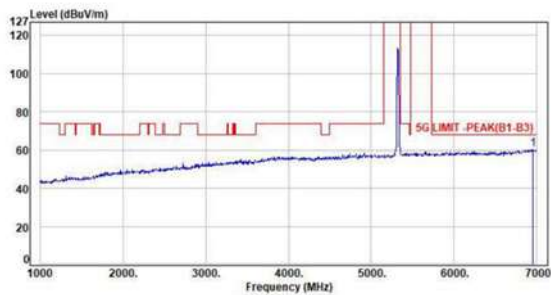

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	52.72	60.52	68.20	-7.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Average

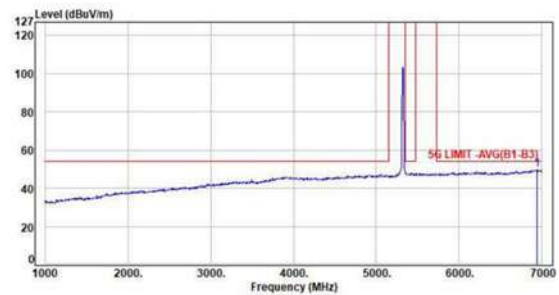


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	41.94	49.72	54.00	-4.28	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Peak

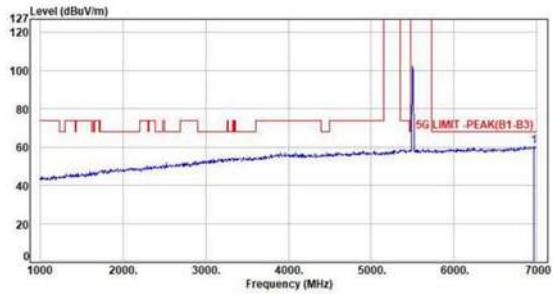

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	7.77	52.79	60.56	68.20	-7.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Average

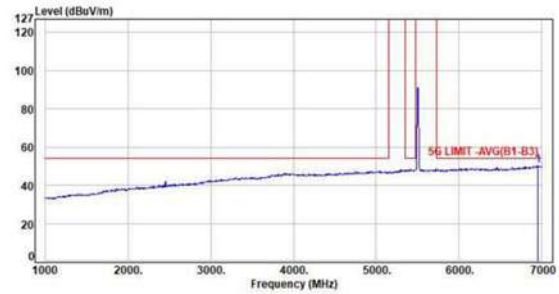

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	7.77	42.43	50.20	54.00	-3.80	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Peak

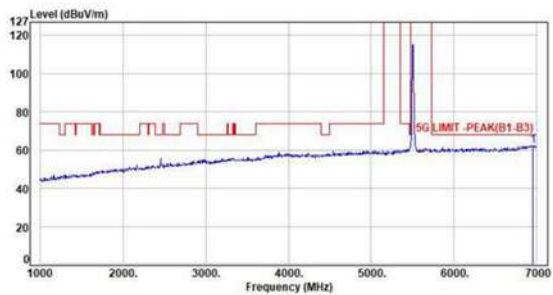

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	54.63	62.43	68.20	-5.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Average

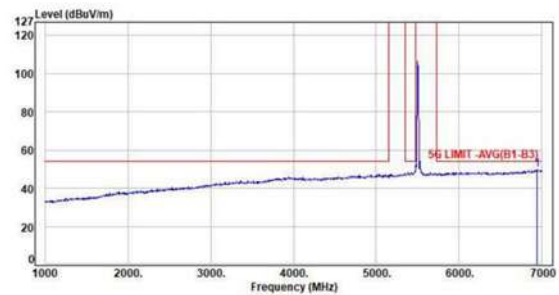


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6948.00	7.76	42.11	49.87	54.00	-4.13	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Peak

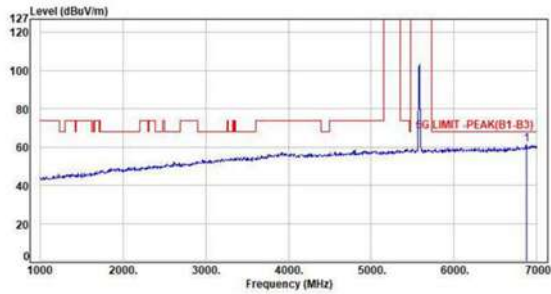

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6874.00	7.61	53.75	61.36	68.20	-6.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Average

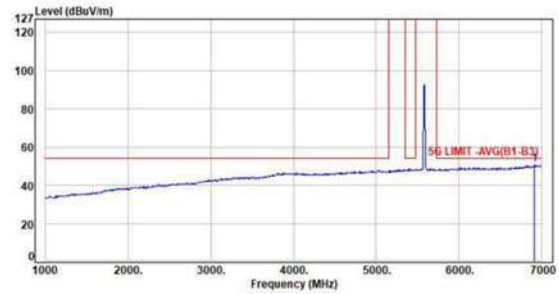

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6910.00	7.65	42.92	50.57	54.00	-3.43	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Peak

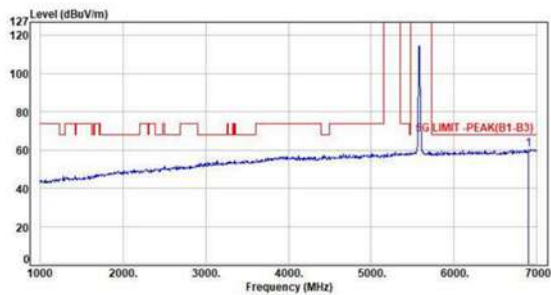

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6898.00	7.61	52.85	60.46	68.20	-7.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Average

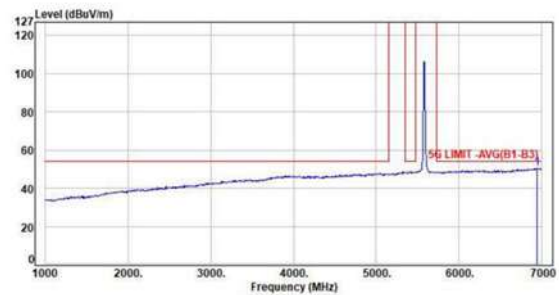


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	42.66	50.44	54.00	-3.56	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Peak

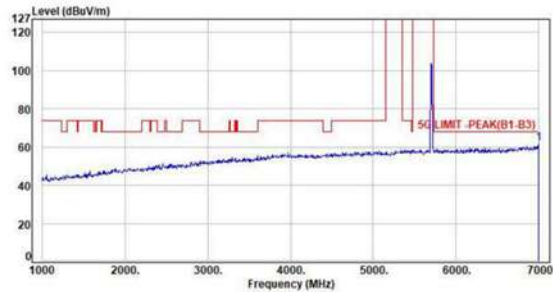

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	7.71	54.06	61.77	68.20	-6.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Average

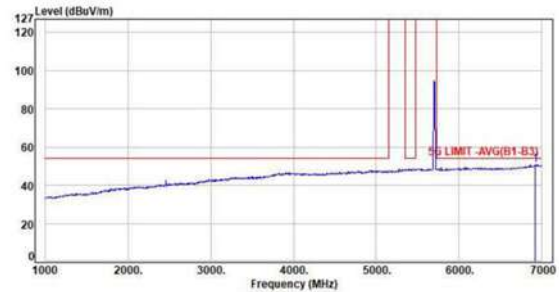

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	7.69	43.02	50.71	54.00	-3.29	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Peak

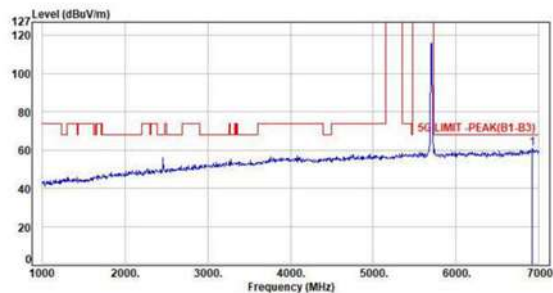

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	7.69	52.99	60.68	68.20	-7.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Average

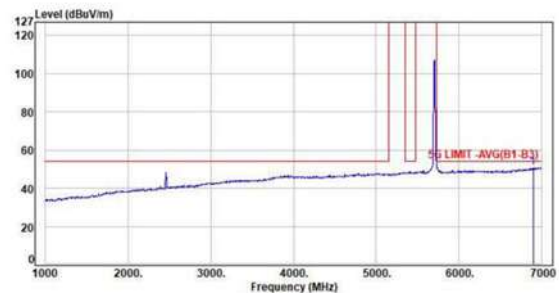


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6892.00	7.62	43.02	50.64	54.00	-3.36	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Peak

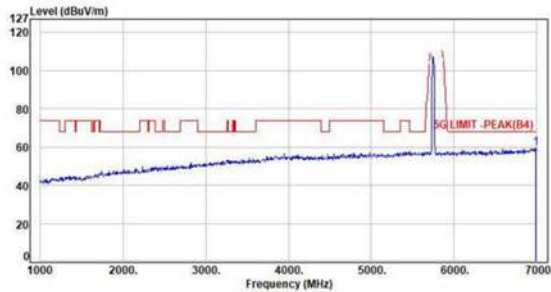

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	51.58	59.32	68.20	-8.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Average

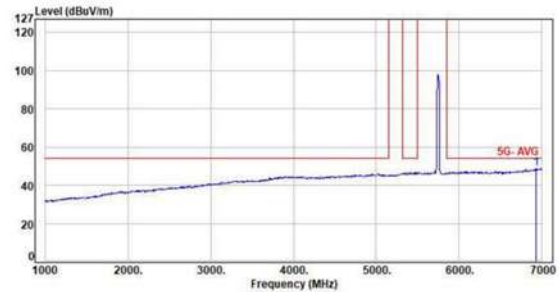

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	7.71	40.99	48.70	54.00	-5.30	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Peak

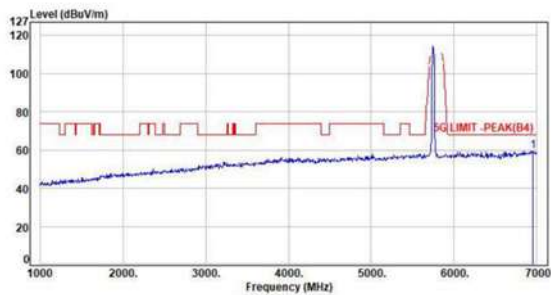

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	7.77	51.70	59.47	68.20	-8.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Average

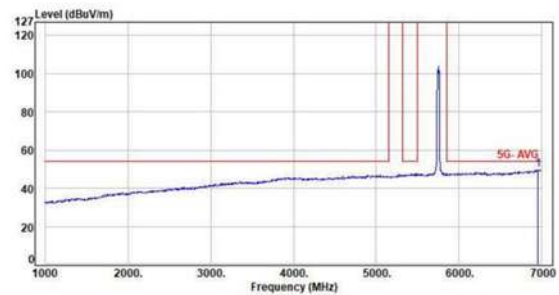


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	7.77	41.88	49.65	54.00	-4.35	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Vertical Detector : Peak

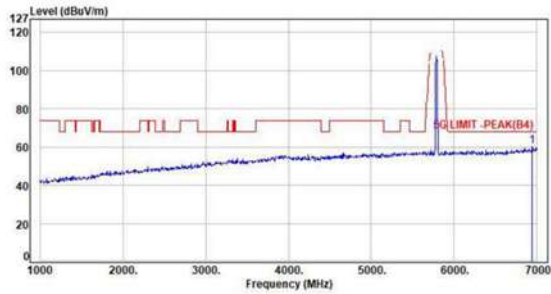

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	52.36	60.14	68.20	-8.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Vertical Detector : Average

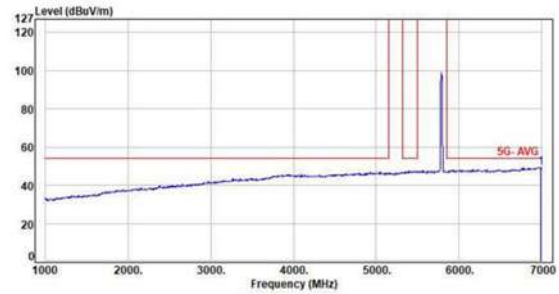

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	41.61	49.35	54.00	-4.65	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Peak

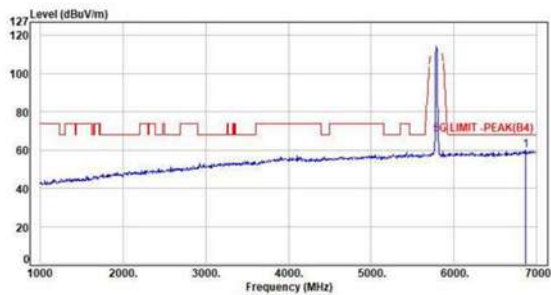

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6868.00	7.61	52.19	59.80	68.20	-8.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Average

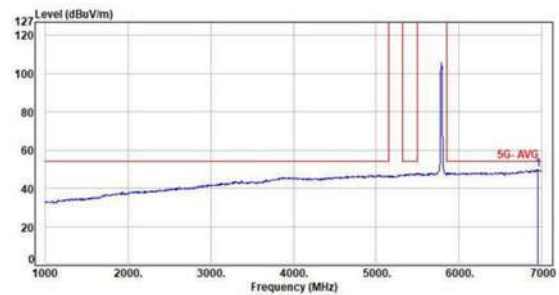


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	41.97	49.77	54.00	-4.23	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Vertical Detector : Peak

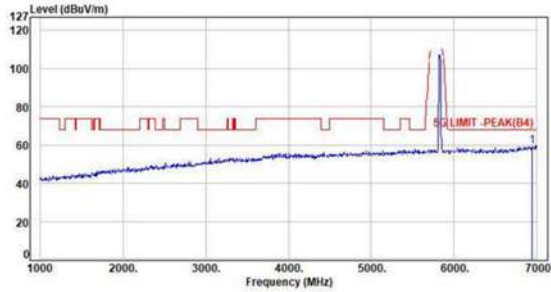

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5940.00	7.76	51.88	59.64	68.20	-8.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Vertical Detector : Average

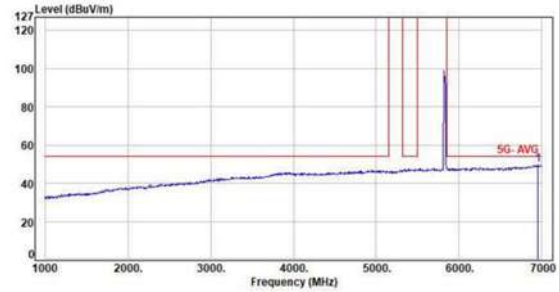

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5958.00	7.77	41.74	49.51	54.00	-4.49	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Peak

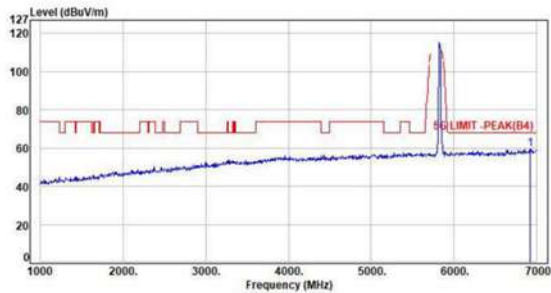

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5916.00	7.66	51.97	59.63	68.20	-8.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Average

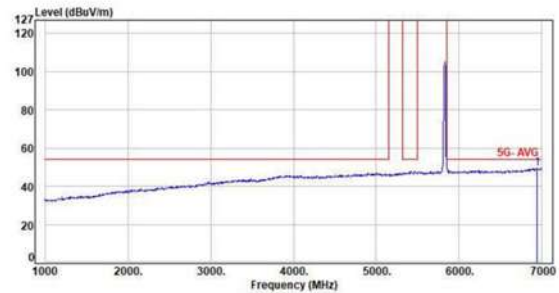


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5946.00	7.78	41.53	49.31	54.00	-4.69	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Peak

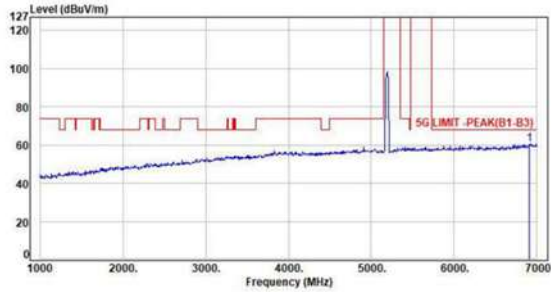

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	7.63	52.82	60.45	68.20	-7.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Average

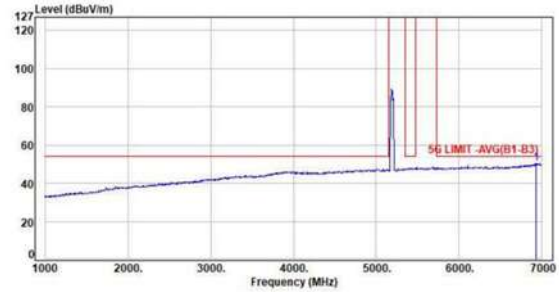

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6934.00	7.74	42.45	50.19	54.00	-3.81	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Peak

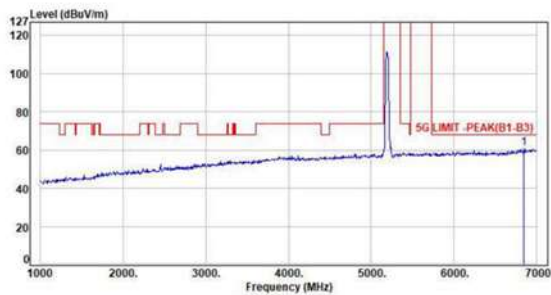

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6844.00	7.61	53.00	60.61	68.20	-7.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Average

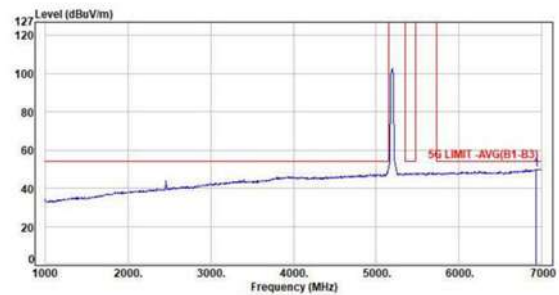


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6934.00	7.74	42.22	49.96	54.00	-4.04	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Peak

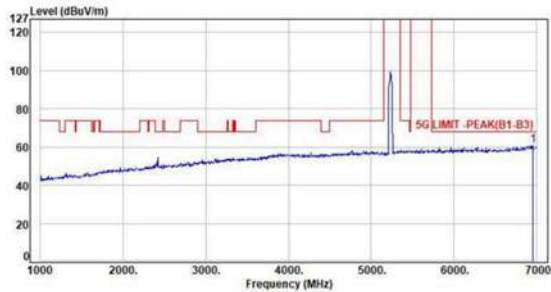

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	53.00	60.80	68.20	-7.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Average

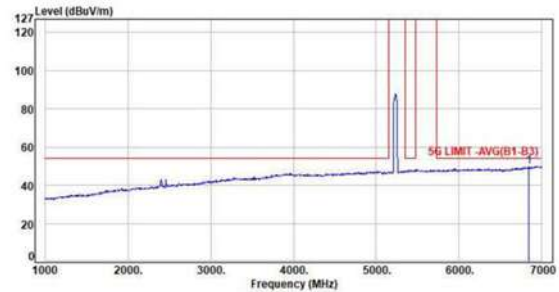

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6844.00	7.61	42.27	49.88	54.00	-4.12	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Peak

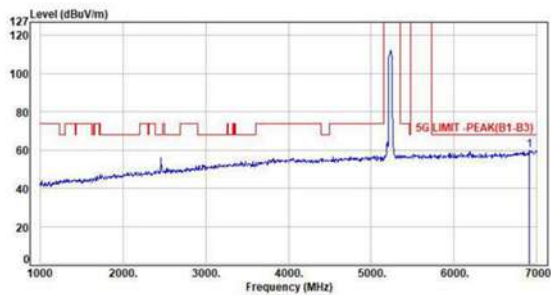

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6910.00	7.65	52.12	59.77	68.20	-8.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Average

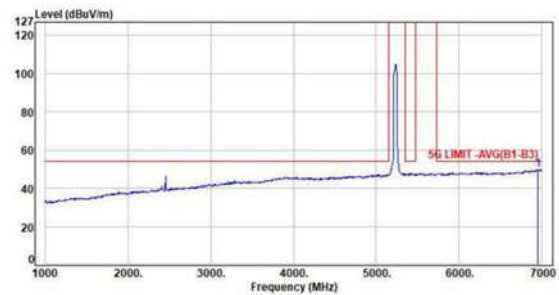


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	41.95	49.75	54.00	-4.25	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Peak

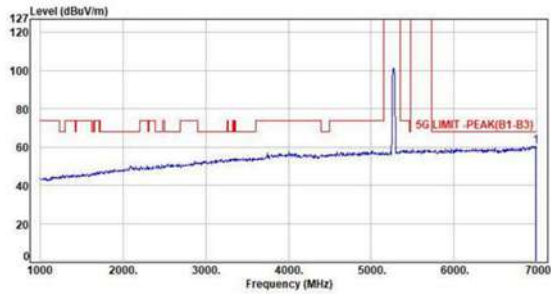

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	52.72	60.46	68.20	-7.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Average

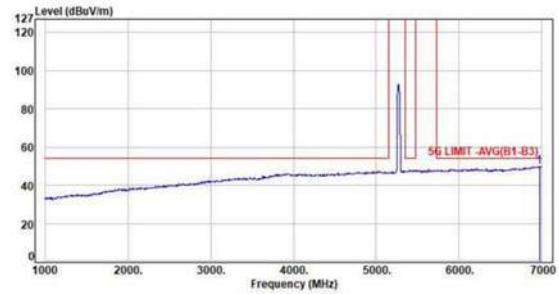

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6978.00	7.75	42.19	49.94	54.00	-4.06	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Peak

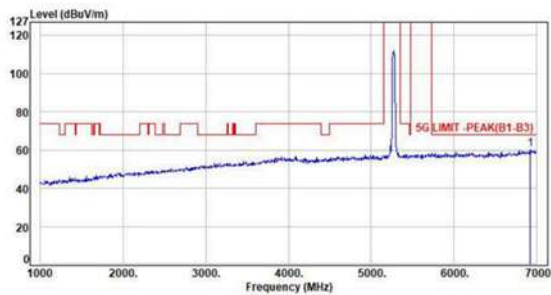

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6922.00	7.69	52.56	60.25	68.20	-7.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Average

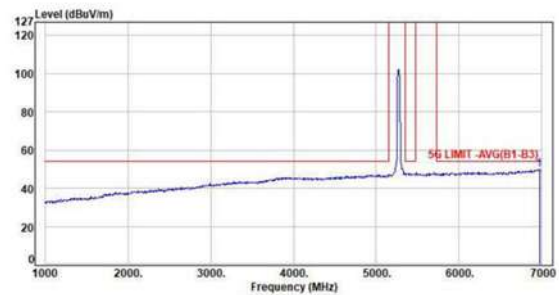


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6978.00	7.75	42.16	49.91	54.00	-4.09	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Peak

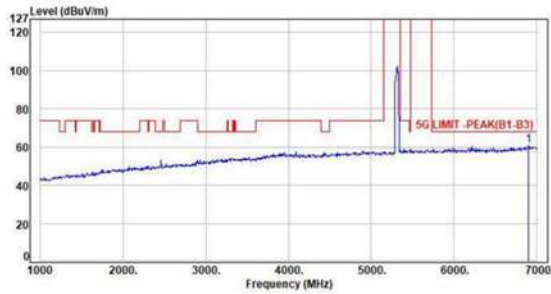

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6898.00	7.61	53.26	60.87	68.20	-7.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Average

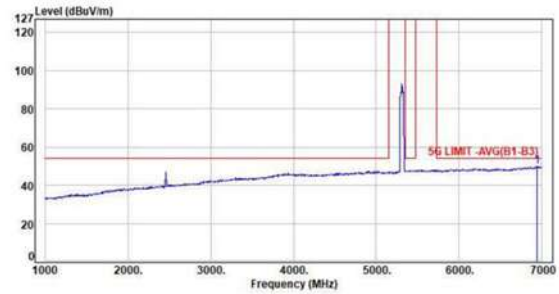

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	41.99	49.77	54.00	-4.23	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Peak

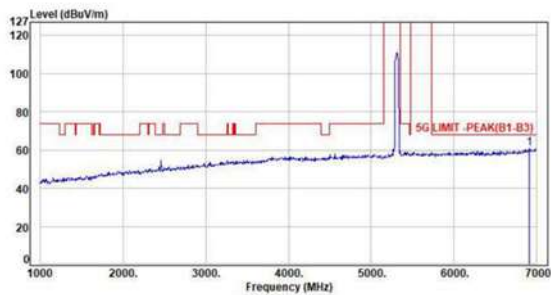

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6904.00	7.63	53.32	60.95	68.20	-7.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Average

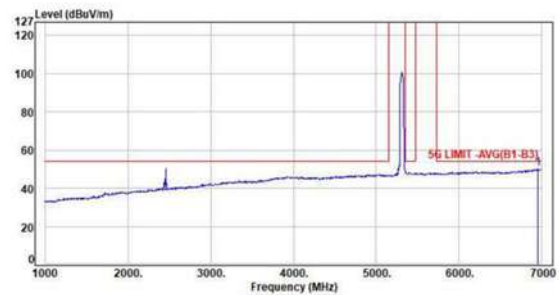


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	42.31	50.11	54.00	-3.89	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Peak

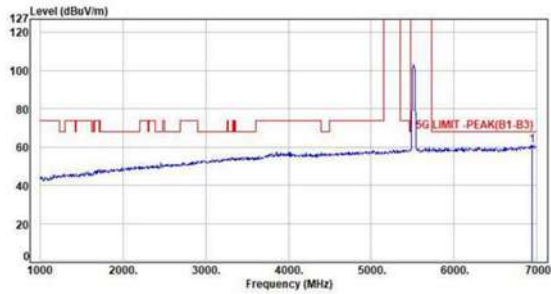

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	53.13	60.91	68.20	-7.29	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Average

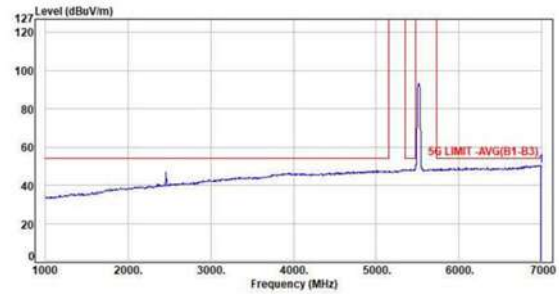

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	42.69	50.43	54.00	-3.57	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Peak

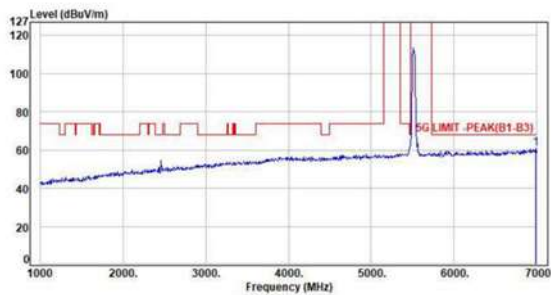

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	52.95	60.66	68.20	-7.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Average

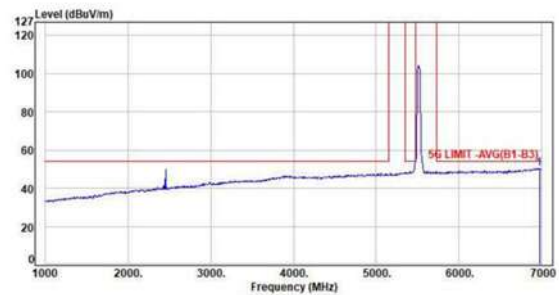


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	7.75	42.68	50.43	54.00	-3.57	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Vertical Detector : Peak

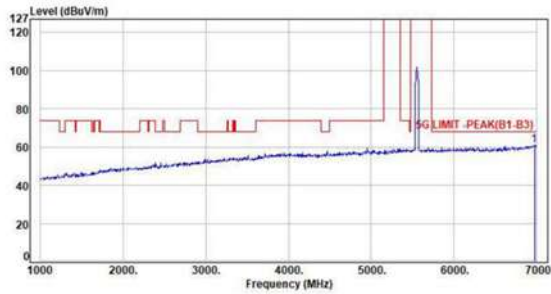

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	7.75	53.21	60.96	68.20	-7.24	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Vertical Detector : Average

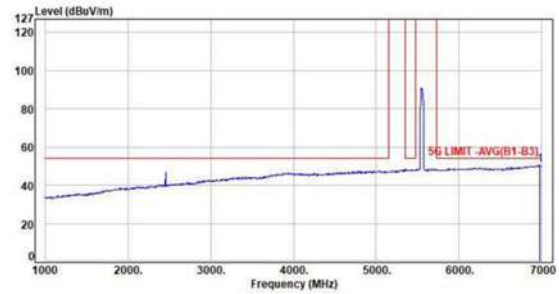

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6976.00	7.74	42.84	50.58	54.00	-3.42	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Horizontal Detector : Peak

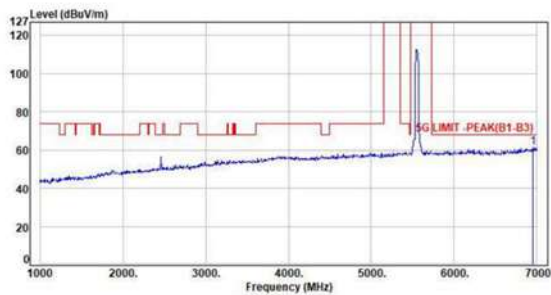

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6958.00	7.77	53.72	61.49	68.20	-6.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH110 NSS1 MCS0
Pol : Horizontal Detector : Average

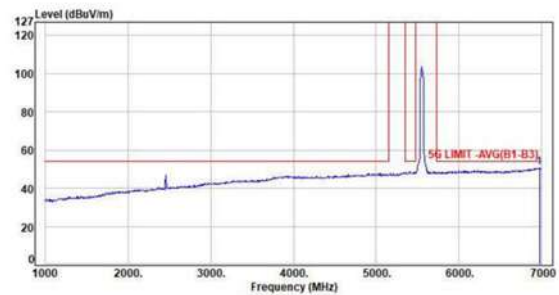


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	7.75	42.78	50.53	54.00	-3.47	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Peak

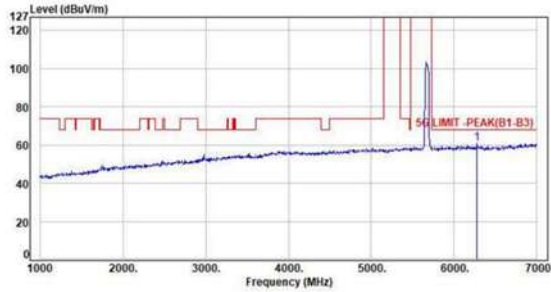

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5728.00	6.67	53.96	60.63	68.20	-7.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Vertical Detector : Average

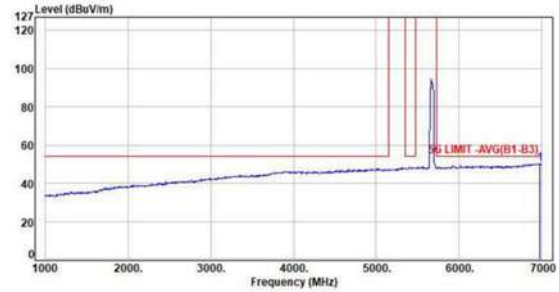

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5728.00	7.74	42.61	50.35	54.00	-3.65	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Peak

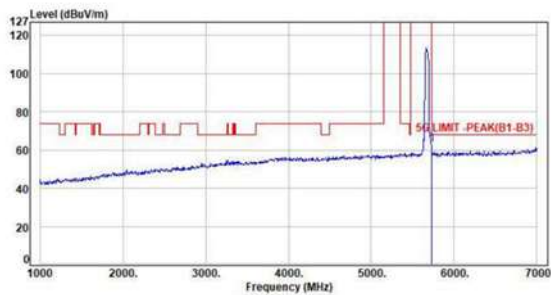

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5728.00	5.82	56.72	62.54	68.20	-5.66	Peak	150	350	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Average

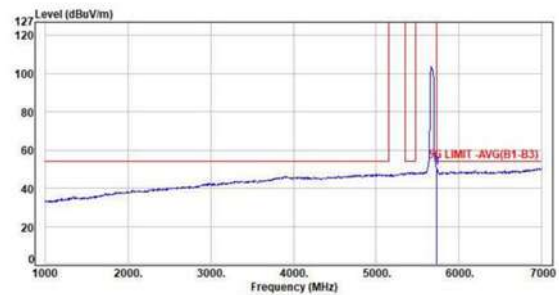


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5728.00	5.82	44.90	50.72	54.00	-3.28	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

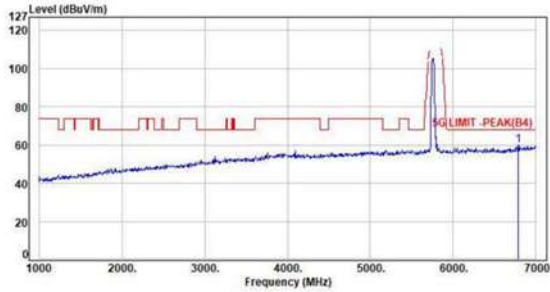

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5784.00	7.50	52.33	59.83	68.20	-8.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Pol : Vertical Detector : Average

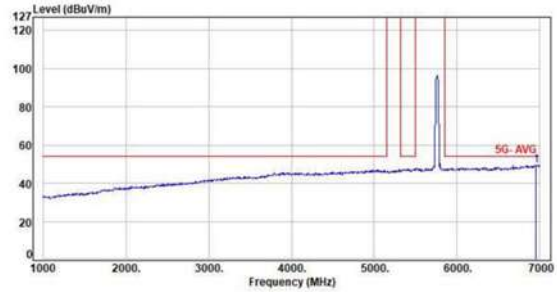

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5784.00	7.80	41.69	49.49	54.00	-4.51	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

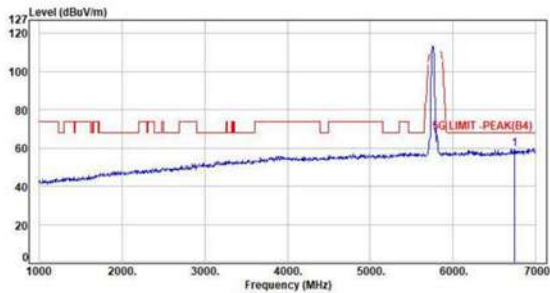

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5742.00	7.44	51.89	59.33	68.20	-8.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Pol : Horizontal Detector : Average

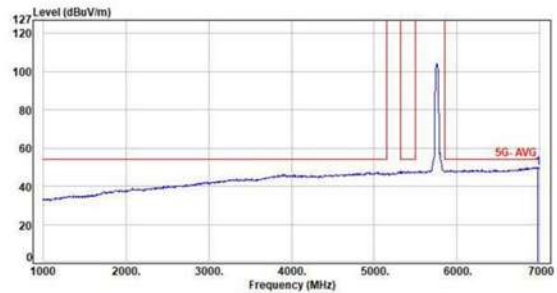


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5776.00	7.74	42.12	49.86	54.00	-4.14	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Vertical Detector : Peak

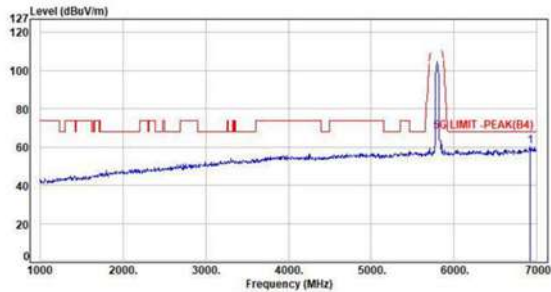

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5916.00	7.66	52.48	60.14	68.20	-8.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Vertical Detector : Average

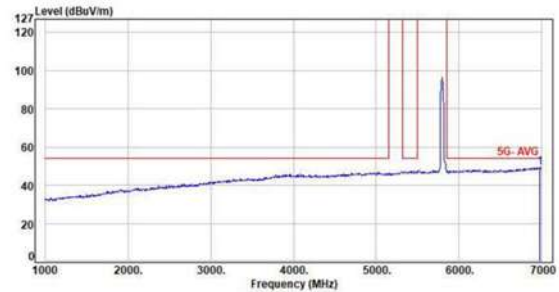

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5916.00	7.74	41.72	49.46	54.00	-4.54	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Peak

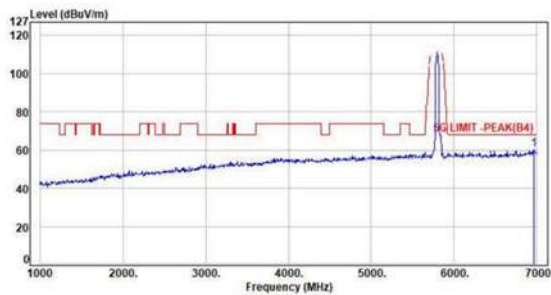

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5964.00	7.77	52.39	60.16	68.20	-8.04	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Average

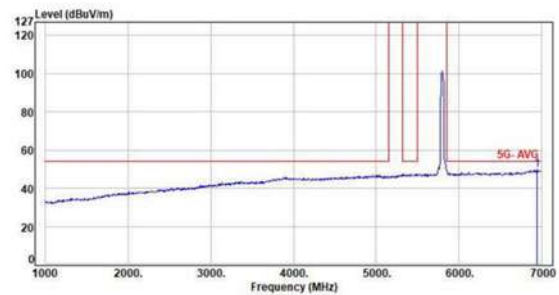


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5964.00	7.78	41.78	49.56	54.00	-4.44	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Peak

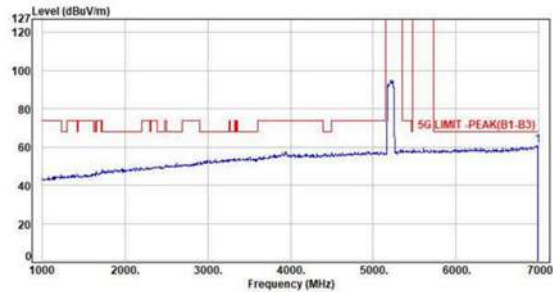

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6982.00	7.74	52.96	60.70	68.20	-7.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Vertical Detector : Average

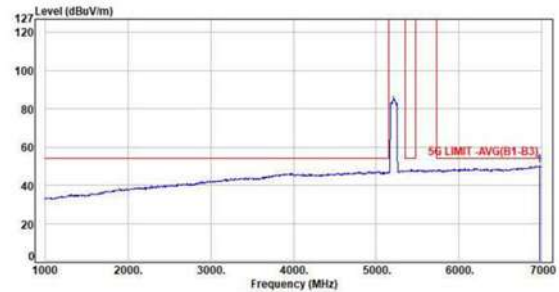

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6978.00	7.75	42.71	50.46	54.00	-3.54	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Peak

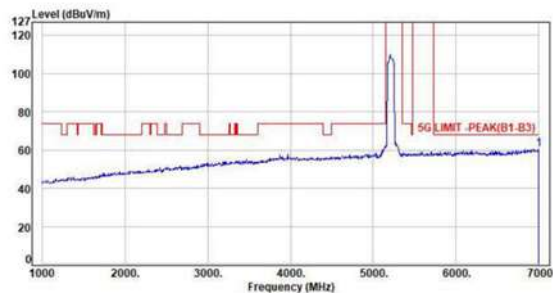

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	7.71	52.84	60.55	68.20	-7.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Pol : Horizontal Detector : Average

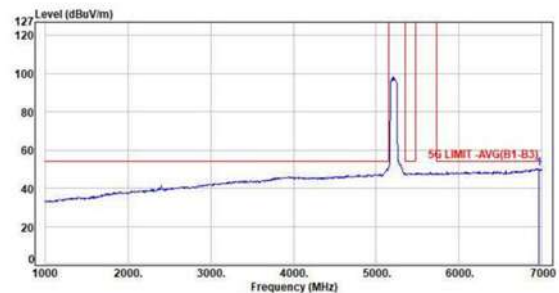


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6964.00	7.77	42.65	50.42	54.00	-3.58	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Peak

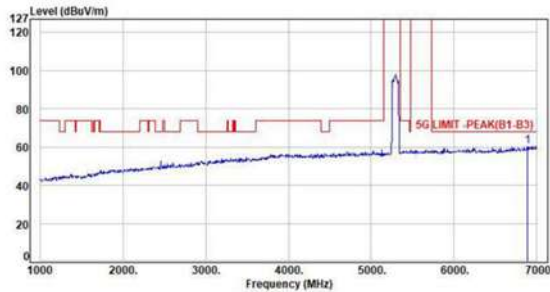

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6886.00	7.60	52.98	60.58	68.20	-7.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Average

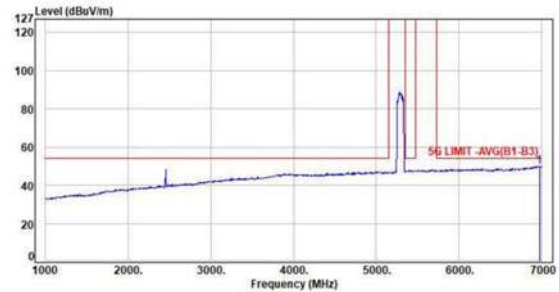

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6978.00	7.75	42.21	49.96	54.00	-4.04	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Peak

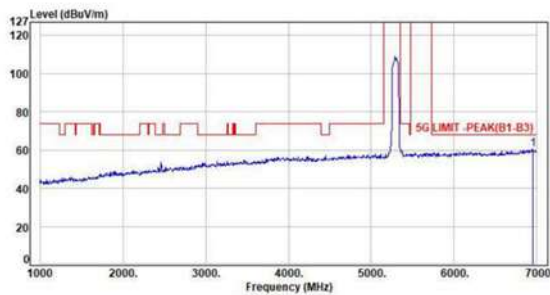

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6952.00	7.80	52.62	60.42	68.20	-7.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Average

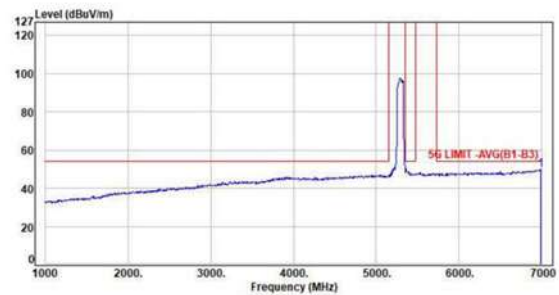


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	41.96	49.67	54.00	-4.33	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Peak

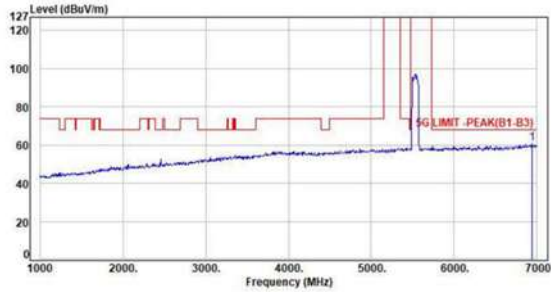

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6940.00	7.76	52.95	60.71	68.20	-7.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Average

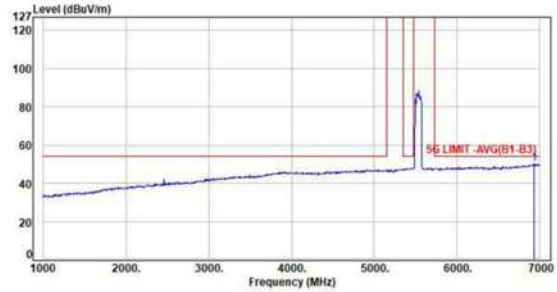

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6928.00	7.71	42.27	49.98	54.00	-4.02	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Peak

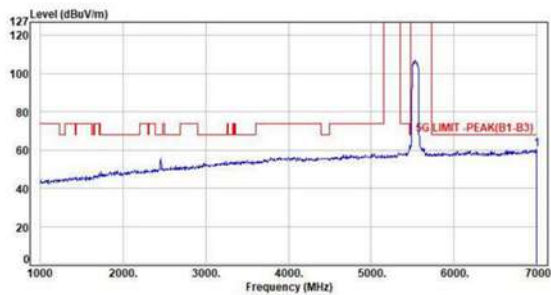

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6994.00	7.71	52.62	60.33	68.20	-7.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Average

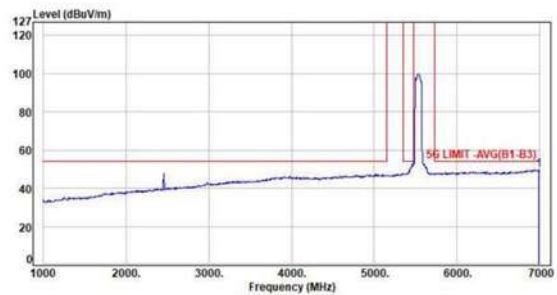


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6988.00	7.71	41.84	49.55	54.00	-4.45	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Pol : Vertical Detector : Peak

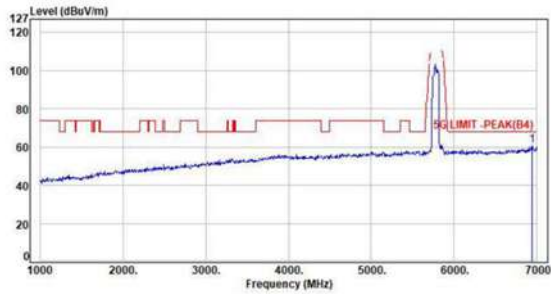

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6940.00	7.76	53.01	60.77	68.20	-7.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Pol : Vertical Detector : Average

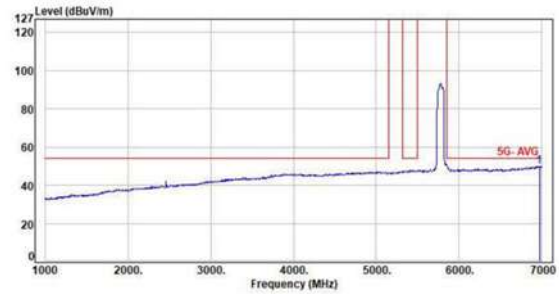

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6970.00	7.75	42.15	49.90	54.00	-4.10	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Pol : Horizontal Detector : Peak

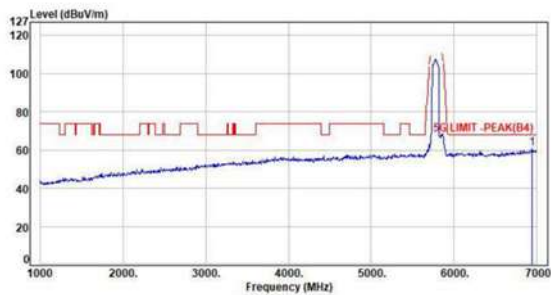

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6946.00	7.78	53.21	60.99	68.20	-7.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
Pol : Horizontal Detector : Average

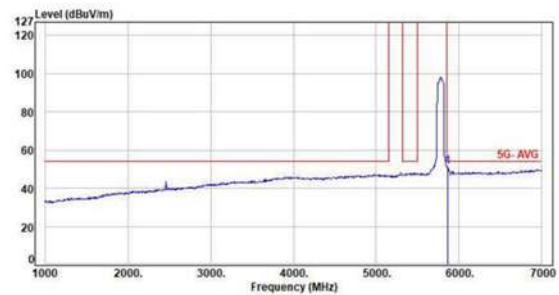

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5860.00	5.86	45.50	51.36	54.00	-2.64	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




6.8. Test Result and Data (7GHz ~ 18GHz)

For M/B with AMD CPU -SISO Main

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

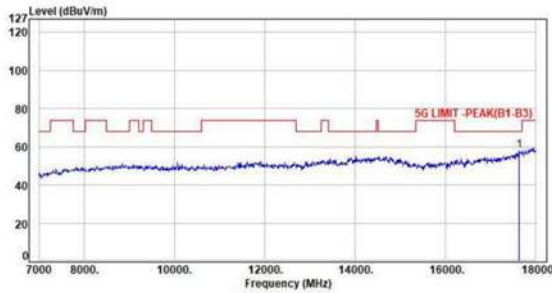

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	44.52	58.00	68.20	-10.20	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Average

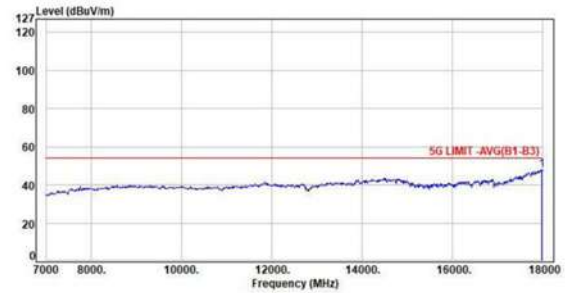

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.87	47.97	54.00	-6.03	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

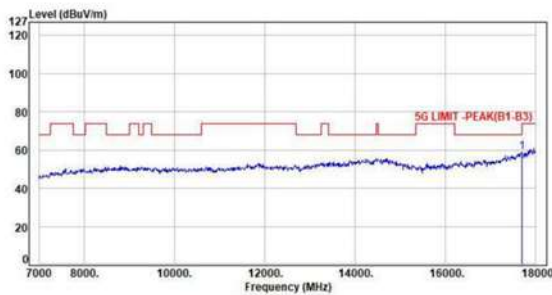

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	45.26	58.83	68.20	-9.37	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Average

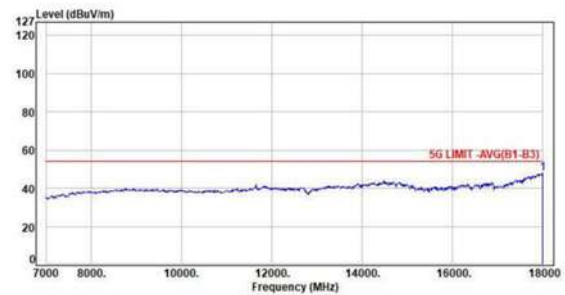

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.88	48.02	54.00	-5.98	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

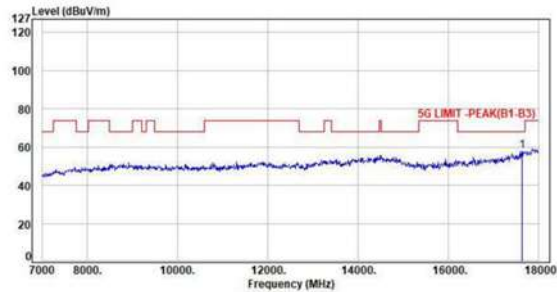

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	44.41	57.89	68.20	-10.31	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Average

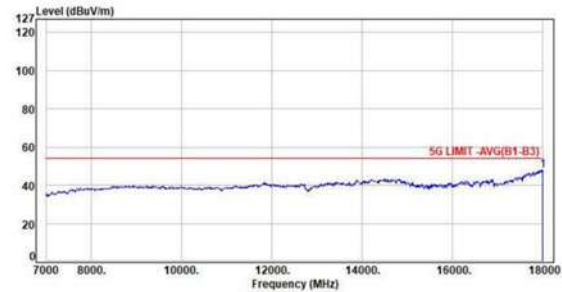

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.64	47.78	54.00	-6.22	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

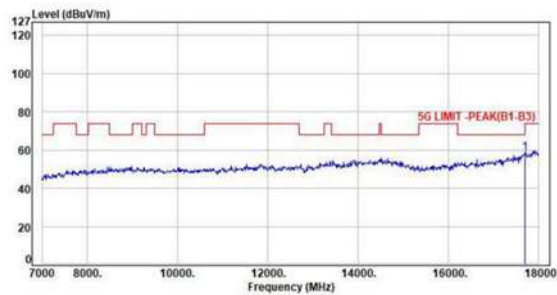

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	44.97	58.54	68.20	-9.66	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Average

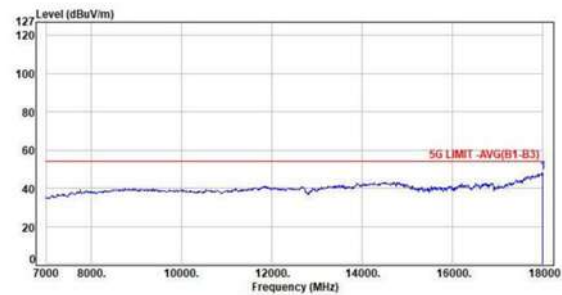

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.97	48.11	54.00	-5.89	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

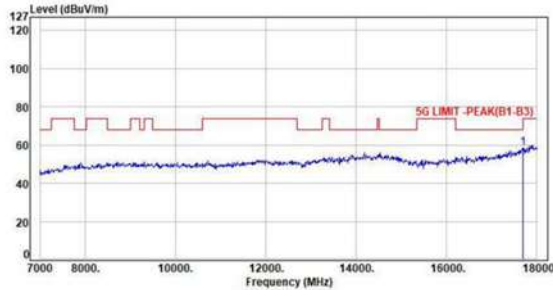

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	44.62	58.19	68.20	-10.01	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Average

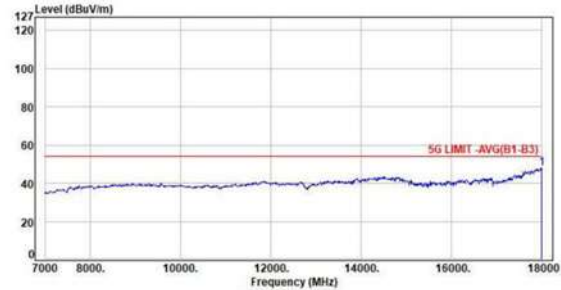

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.64	47.78	54.00	-6.22	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

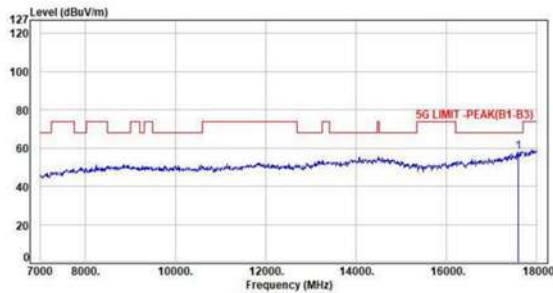

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17593.00	13.29	44.73	58.02	68.20	-10.18	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Average

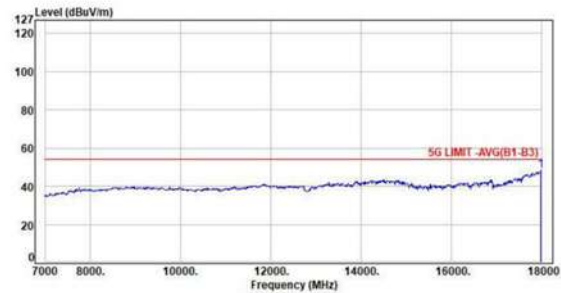

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	33.00	48.10	54.00	-5.90	Average	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH52 6Mbps
Pol : Vertical Detector : Peak

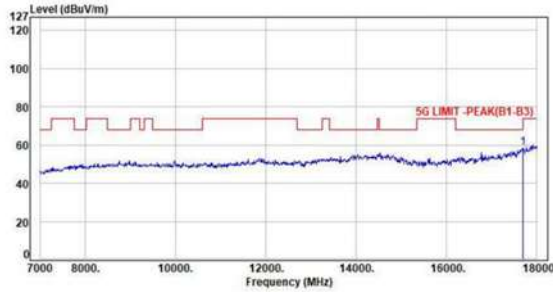

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	44.80	58.37	68.20	-9.83	Peak	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH52 6Mbps
Pol : Vertical Detector : Average

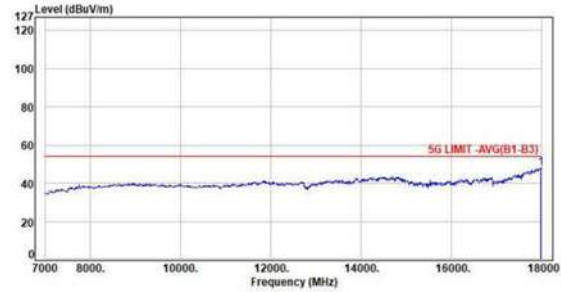

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.91	48.01	54.00	-5.99	Average	150	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11a CH52 6Mbps
Pol : Horizontal Detector : Peak

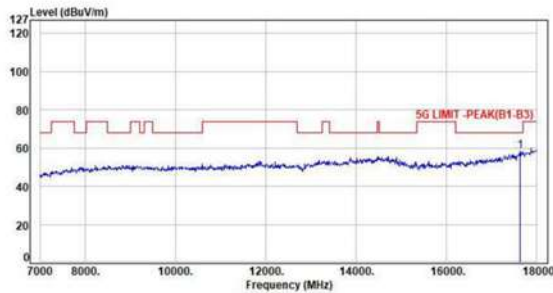

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	44.80	58.28	68.20	-9.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps
Pol : Horizontal Detector : Average

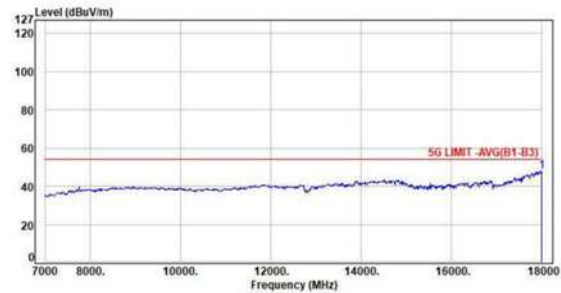

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.77	47.91	54.00	-6.09	Average	150	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Peak

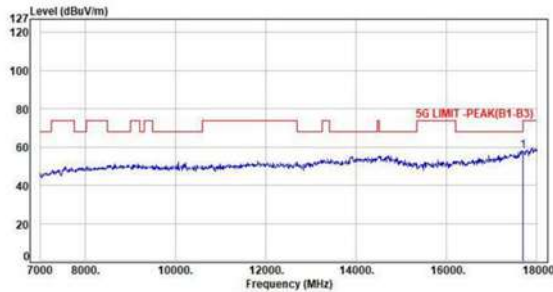

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	44.48	58.05	68.20	-10.15	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Average

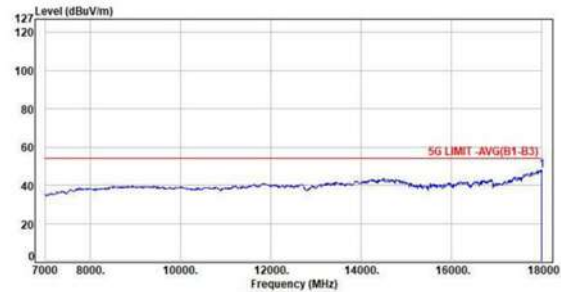

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.58	47.72	54.00	-6.28	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Peak

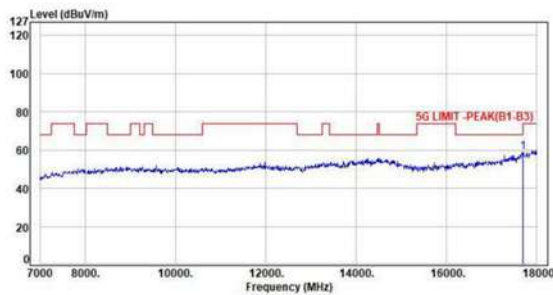

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	45.40	58.97	68.20	-9.23	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Average

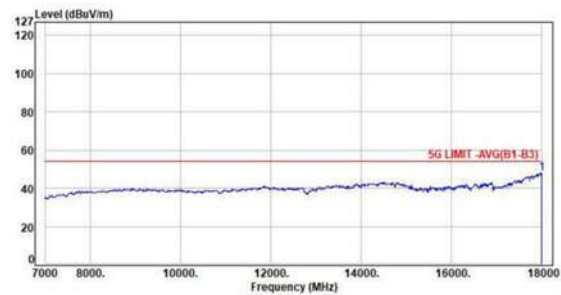

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.65	47.79	54.00	-6.21	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

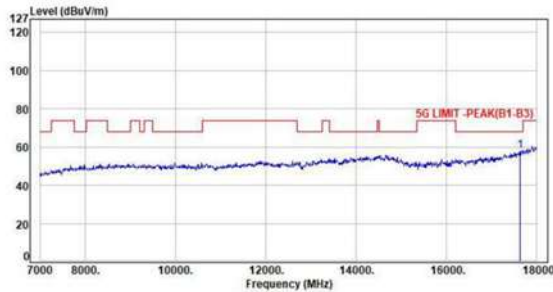

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	44.42	57.90	68.20	-10.30	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Average

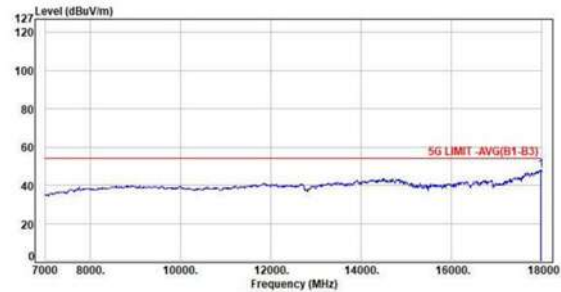

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.81	47.91	54.00	-6.09	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

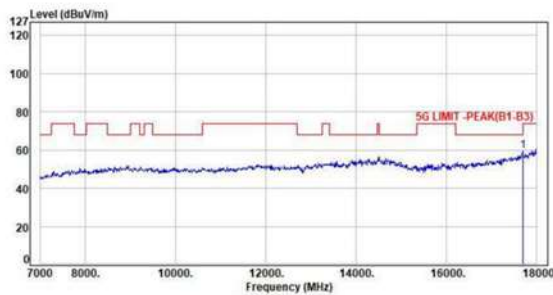

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	45.67	59.24	68.20	-8.96	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Average

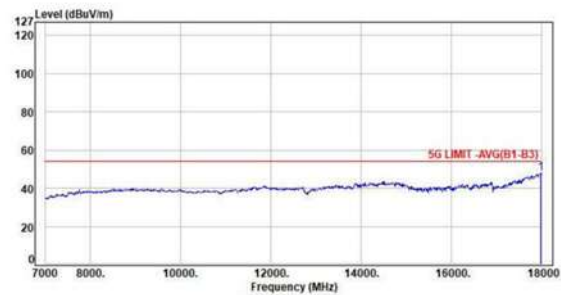

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.70	47.80	54.00	-6.20	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

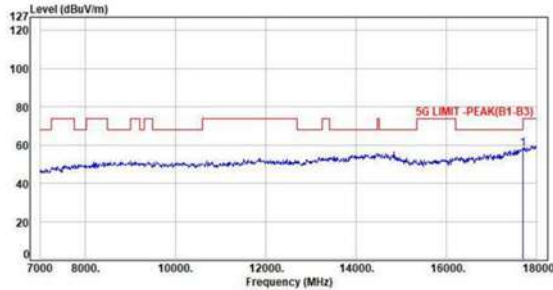

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17692.00	13.58	44.47	58.05	68.20	-10.15	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Average

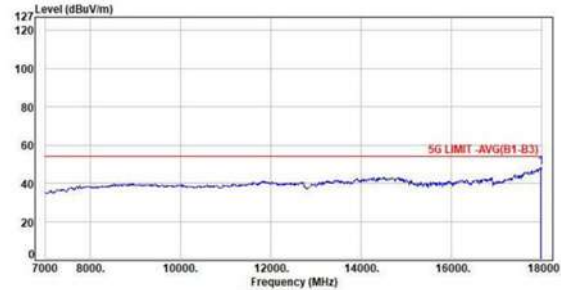

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	33.01	48.11	54.00	-5.89	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

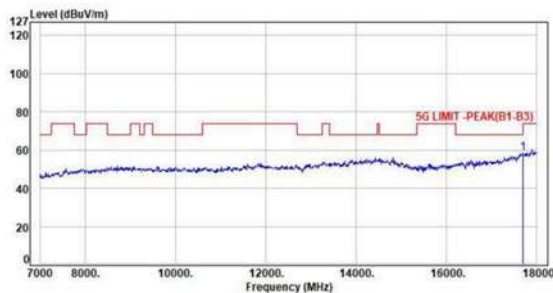

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17692.00	13.58	44.79	58.37	68.20	-9.83	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Average

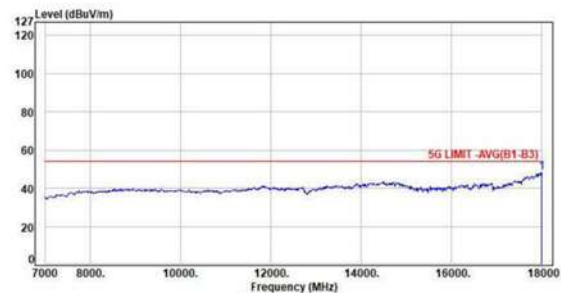

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	33.26	48.40	54.00	-5.60	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Peak

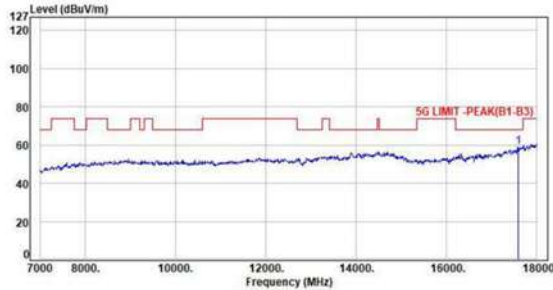

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17593.00	13.29	45.49	58.78	68.20	-9.42	Peak	100	150	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Average

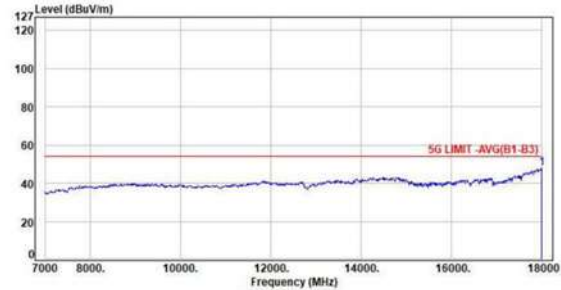

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.81	47.95	54.00	-6.05	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Peak

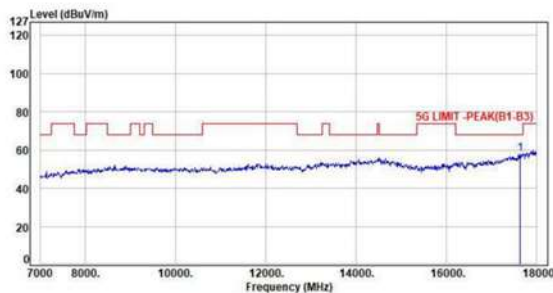

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17626.00	13.44	44.73	58.17	68.20	-10.03	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Average

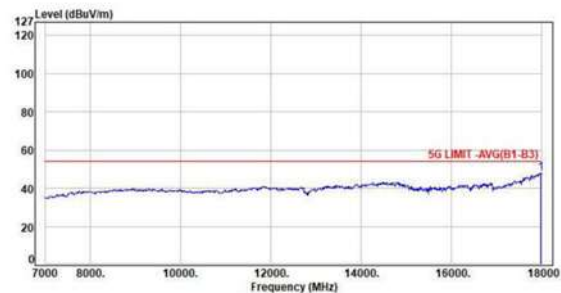

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.66	47.76	54.00	-6.24	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

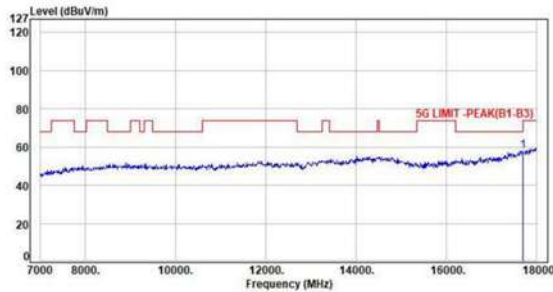

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	44.35	57.92	68.20	-10.28	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

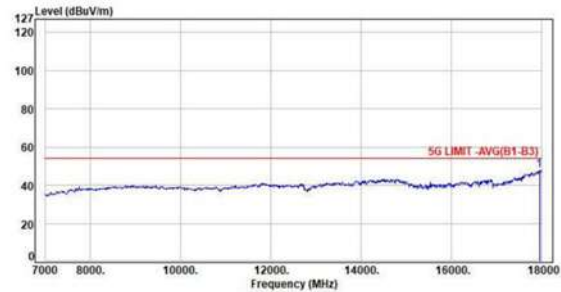

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.60	47.57	54.00	-6.43	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

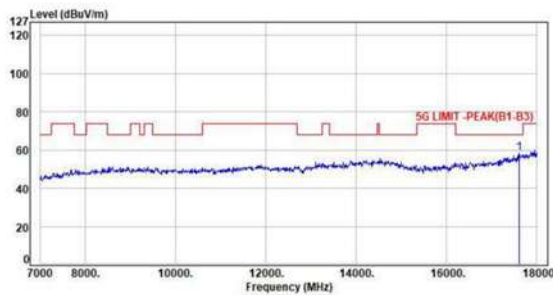

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17604.00	13.36	45.28	58.64	68.20	-9.56	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

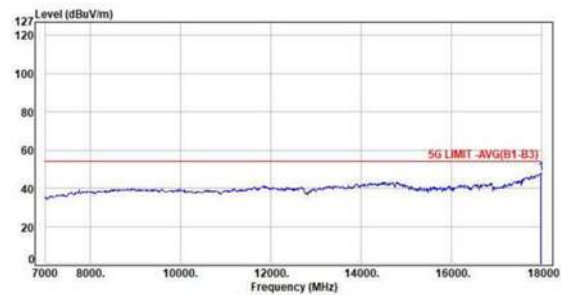

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.70	47.80	54.00	-6.20	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

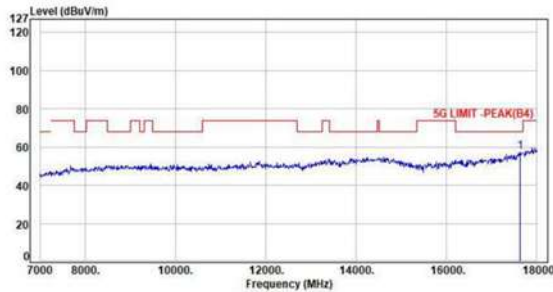

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17626.00	13.44	44.24	57.68	68.20	-10.52	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Average

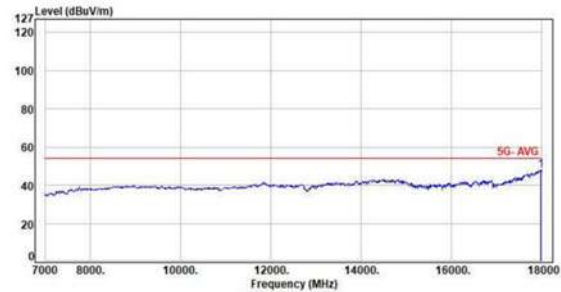

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.74	47.84	54.00	-6.16	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

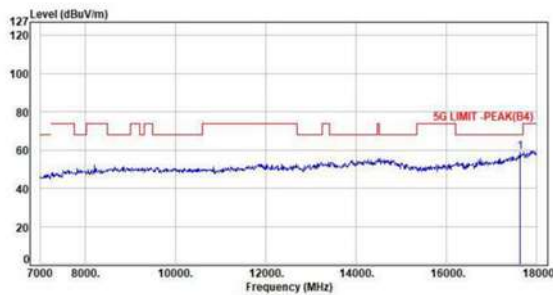

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	45.46	58.94	68.20	-9.26	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Average

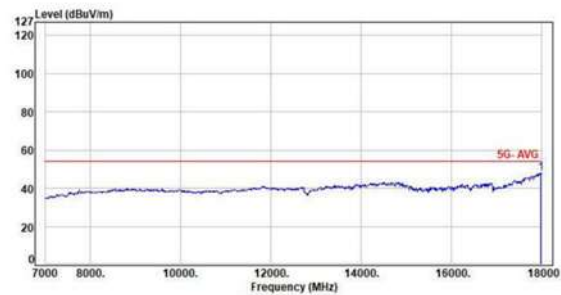

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.81	47.91	54.00	-6.09	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

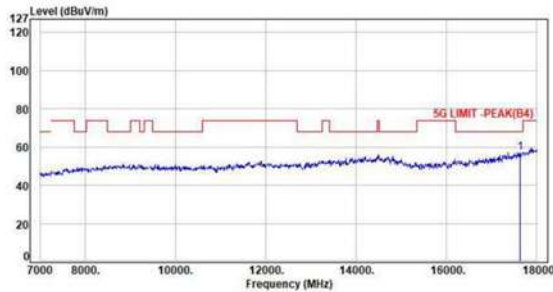

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	43.71	57.19	68.20	-11.01	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Average

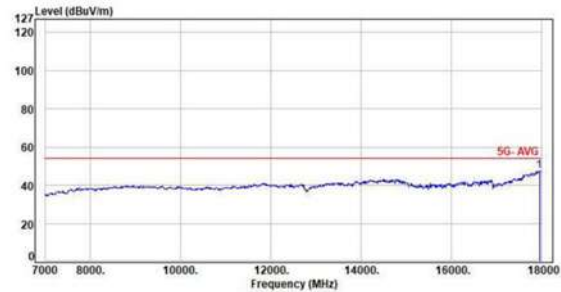

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.57	47.54	54.00	-6.46	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

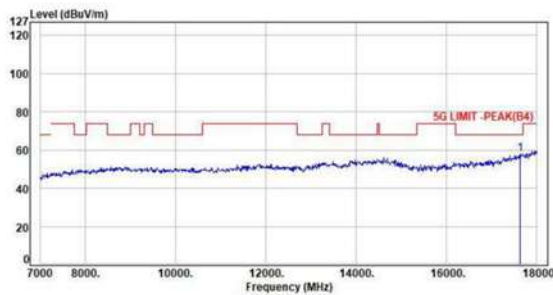

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	44.59	58.07	68.20	-10.13	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Average

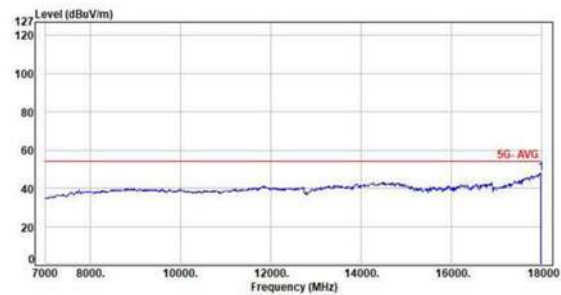

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.75	47.85	54.00	-6.15	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

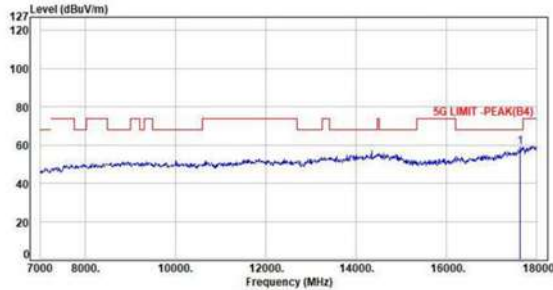

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17637.00	13.48	45.49	58.97	68.20	-9.23	Peak	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Average

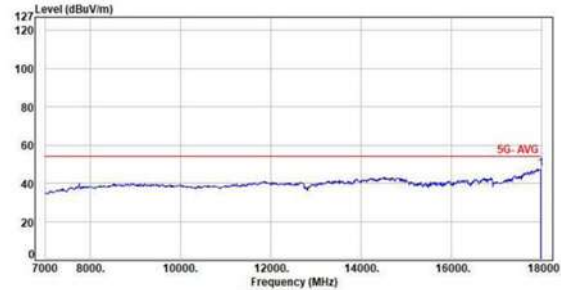

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17967.00	15.06	32.39	47.45	54.00	-6.55	Average	150	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

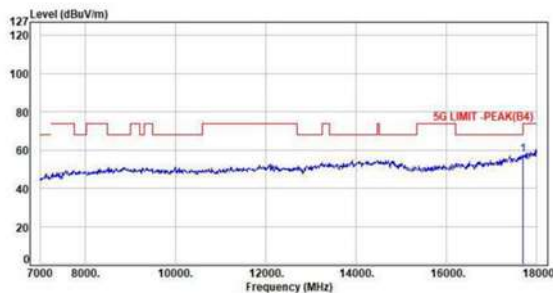

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17692.00	13.58	43.80	57.38	68.20	-10.82	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Average

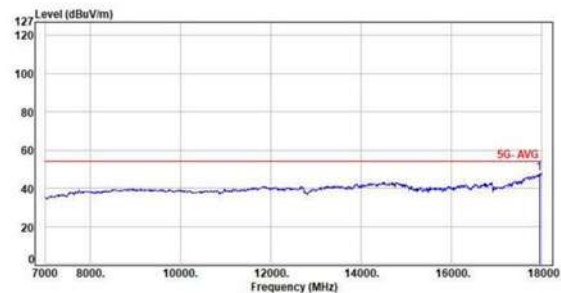

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.70	47.67	54.00	-6.33	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with AMD CPU -SISO Aux

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

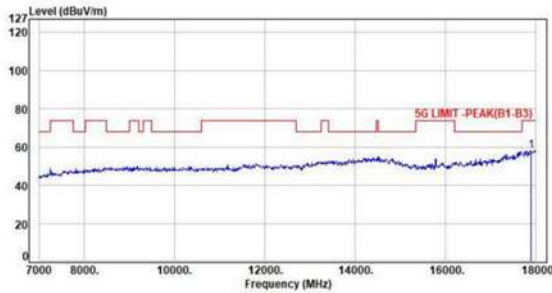


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	14.72	43.43	58.15	74.00	-15.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Average

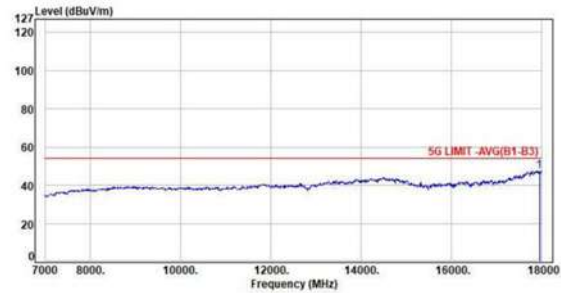


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.58	47.55	54.00	-6.45	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

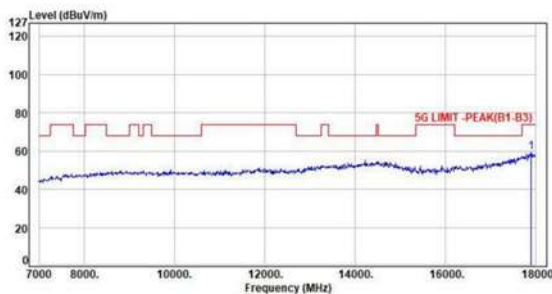


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	14.72	44.64	59.36	74.00	-14.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Average

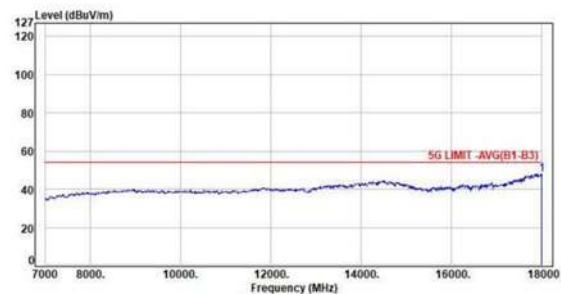

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17909.00	15.14	32.72	47.86	54.00	-6.14	Average	150	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

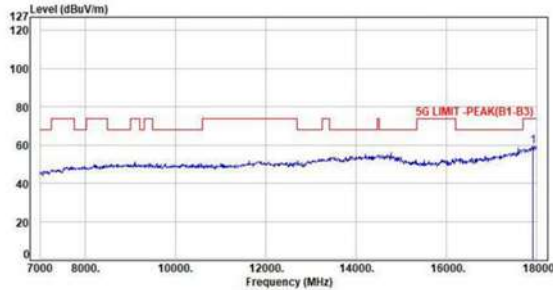

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	14.85	44.58	59.43	74.00	-14.57	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Average

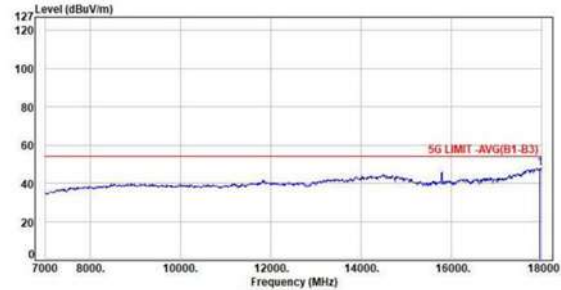

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	32.74	47.76	54.00	-6.24	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

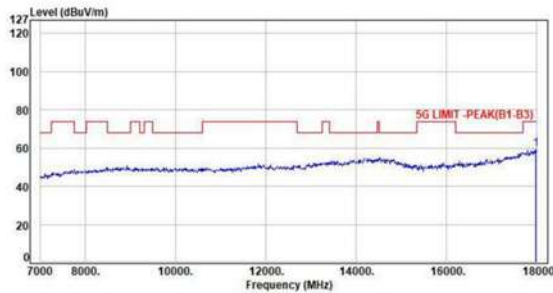

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	44.22	59.32	74.00	-14.68	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Average

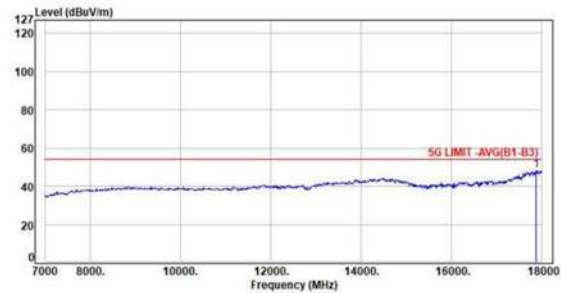

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	33.39	48.06	54.00	-5.94	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

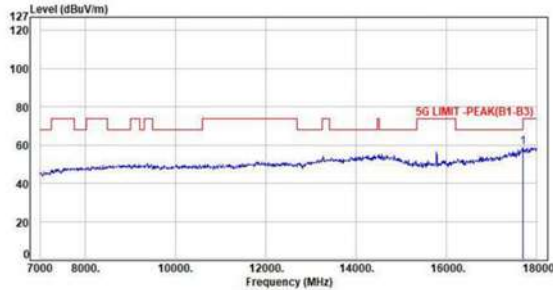

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	45.41	58.98	68.20	-9.22	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Average

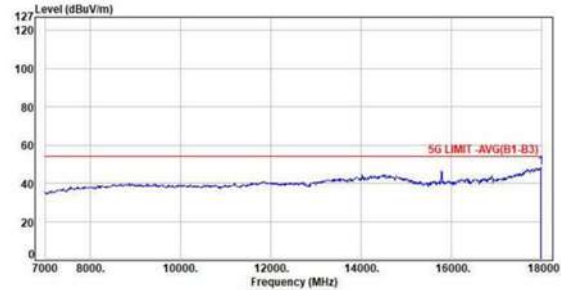

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	33.14	48.24	54.00	-5.76	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

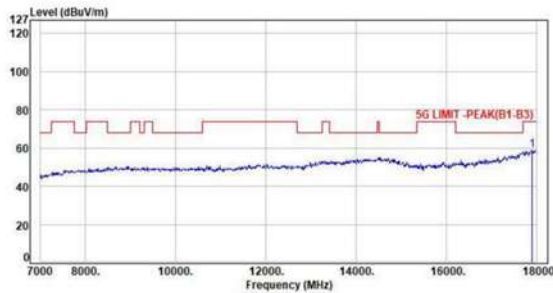

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17890.00	14.71	44.32	59.03	74.00	-14.97	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Average

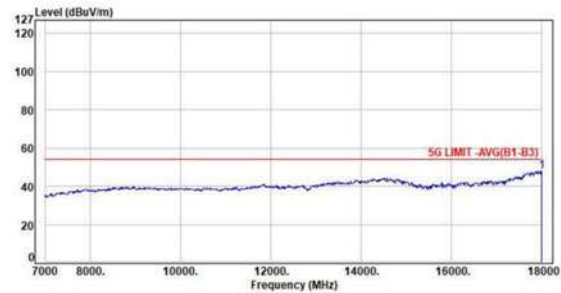

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.64	47.78	54.00	-6.22	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Peak

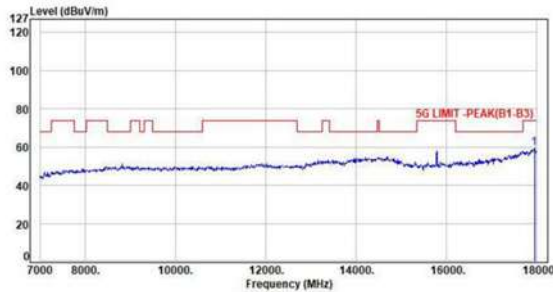

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.48	59.45	74.00	-14.55	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Average

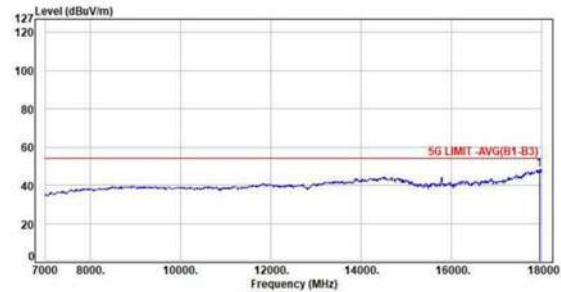

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	33.19	48.16	54.00	-5.84	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Peak

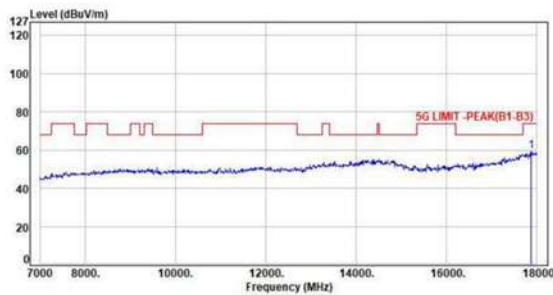

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	44.58	59.25	74.00	-14.75	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Average

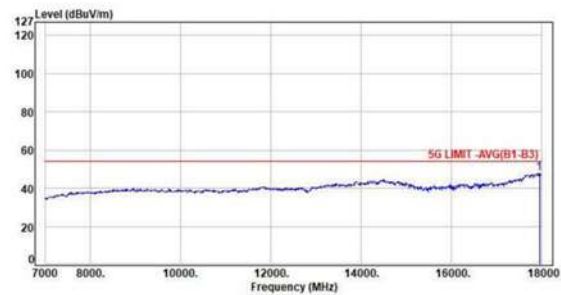

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.93	47.90	54.00	-6.10	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Peak

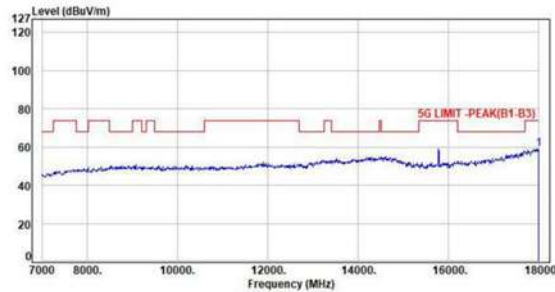

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	43.94	59.08	74.00	-14.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Average

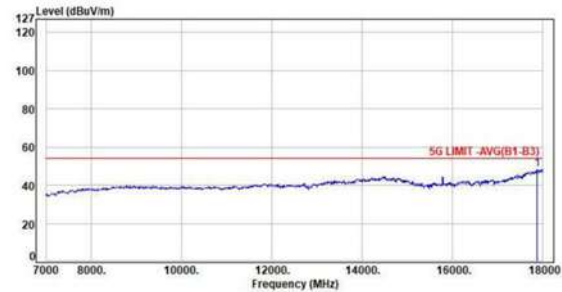

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	33.58	48.25	54.00	-5.75	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Peak

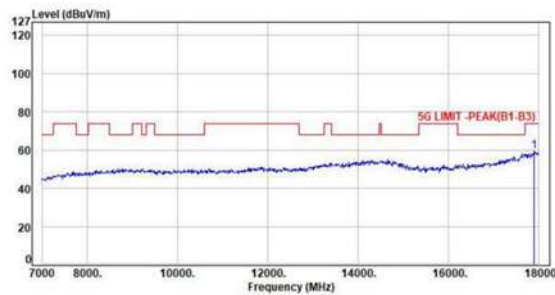

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	14.72	44.47	59.19	74.00	-14.81	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Average

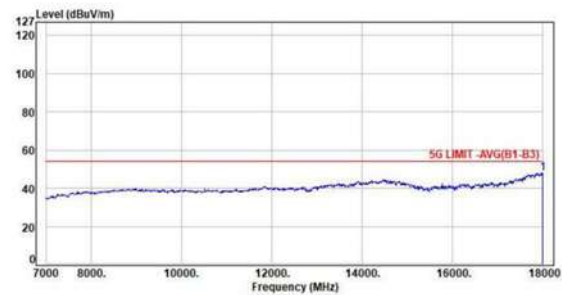

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.74	47.88	54.00	-6.12	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

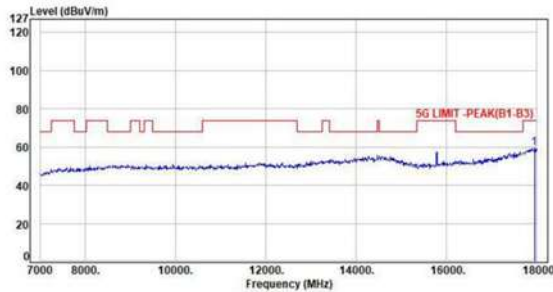

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.63	59.60	74.00	-14.40	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Average

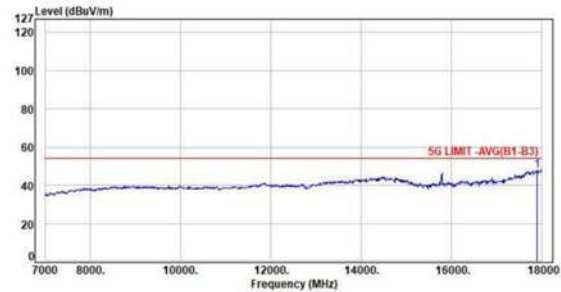

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	14.72	33.08	47.80	54.00	-6.20	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

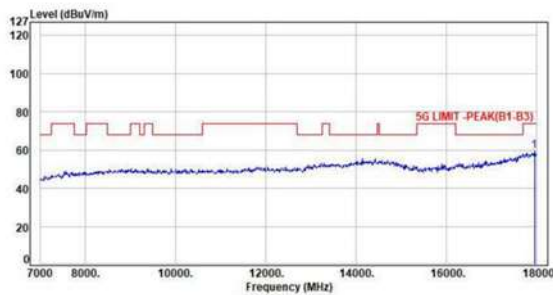

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.42	59.39	74.00	-14.61	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Average

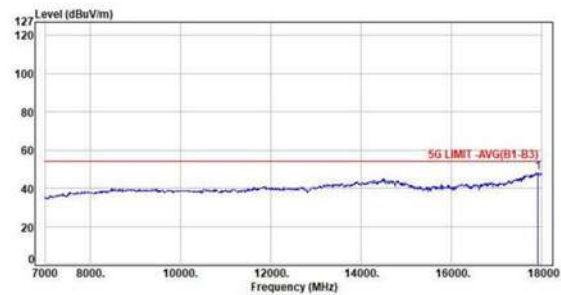

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17912.00	14.78	33.47	48.25	54.00	-5.75	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

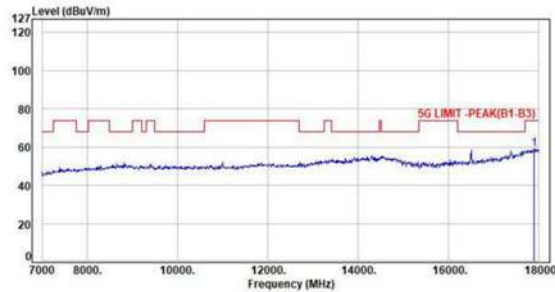

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	14.72	44.09	58.81	74.00	-15.19	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Average

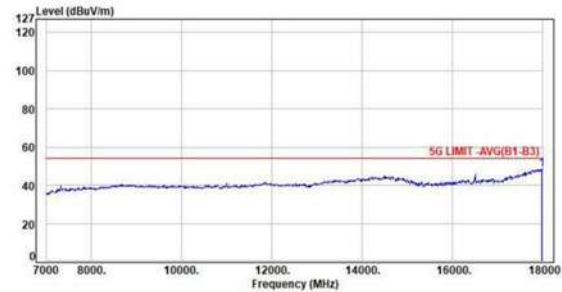

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	33.27	48.37	54.00	-5.63	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

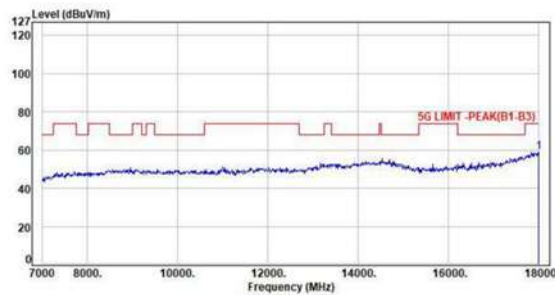

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	43.64	58.78	74.00	-15.22	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Average

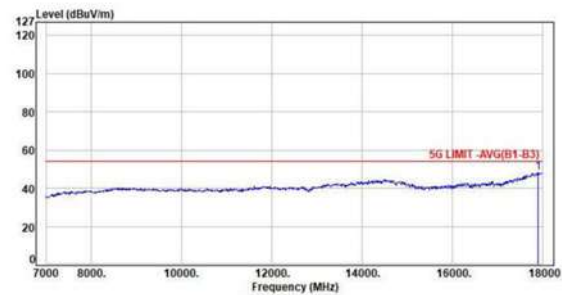

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	14.72	33.35	48.07	54.00	-5.93	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Peak

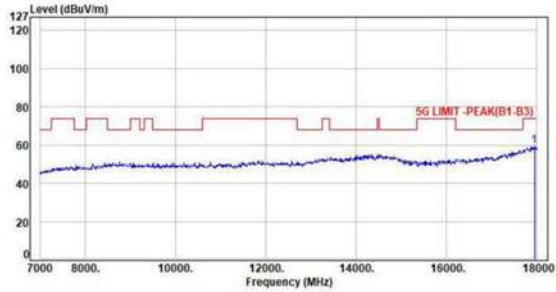

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.39	59.36	74.00	-14.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Vertical

Detector : Average

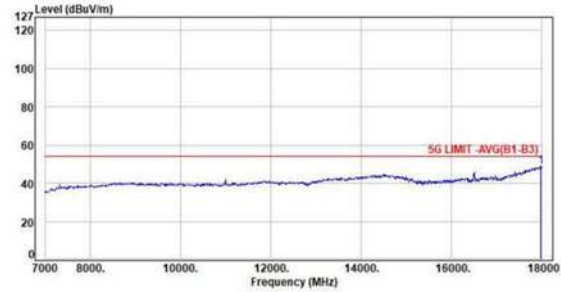

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	33.49	48.59	54.00	-5.41	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Peak

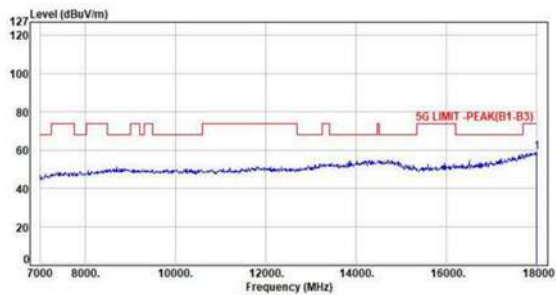

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	43.63	58.77	74.00	-15.23	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH116 6Mbps

Pol : Horizontal

Detector : Average

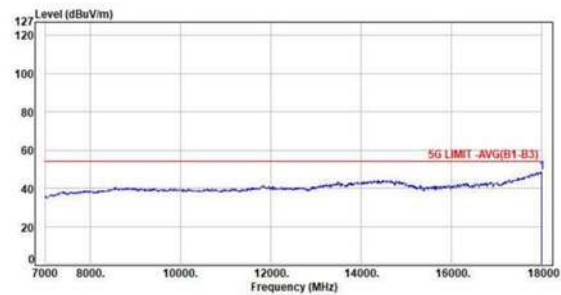

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	33.32	48.46	54.00	-5.54	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

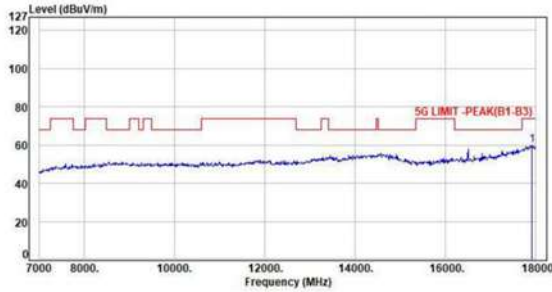

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17912.00	14.78	45.23	60.01	74.00	-13.99	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

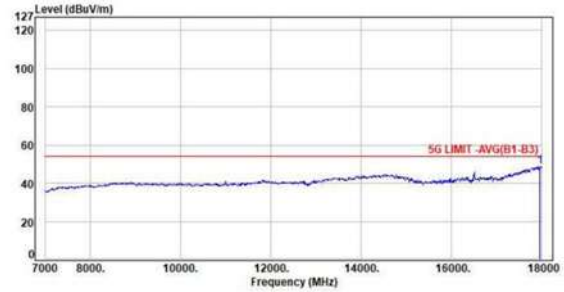

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	33.59	48.61	54.00	-5.39	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

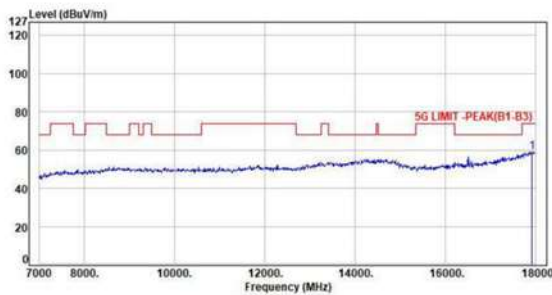

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	14.85	44.06	58.91	74.00	-15.09	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

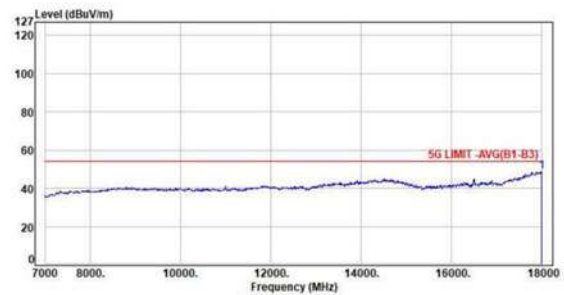

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	33.74	48.88	54.00	-5.12	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

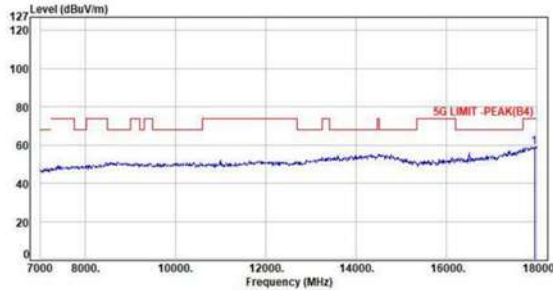

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.04	59.01	74.00	-14.99	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Average

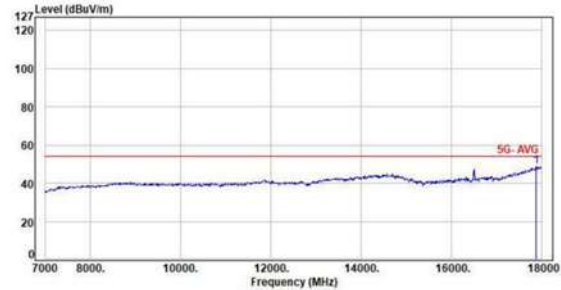

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	33.86	48.53	54.00	-5.47	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

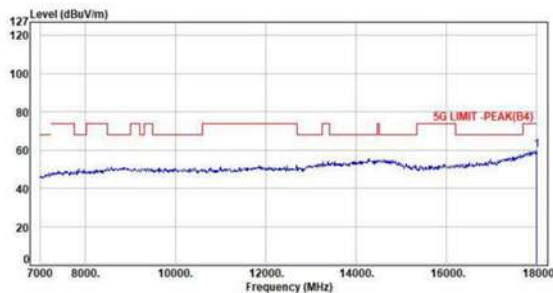

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	44.61	59.75	74.00	-14.25	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Average

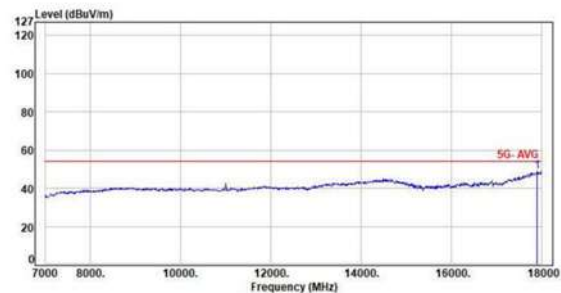

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	14.72	34.18	48.90	54.00	-5.10	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

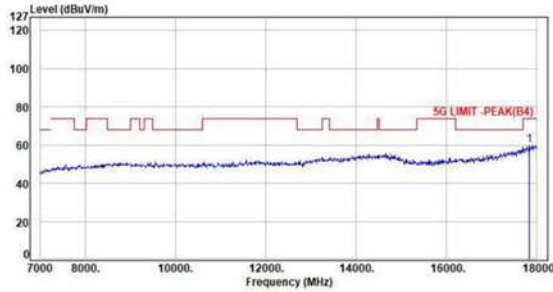

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17835.00	14.59	45.41	60.00	74.00	-14.00	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Average

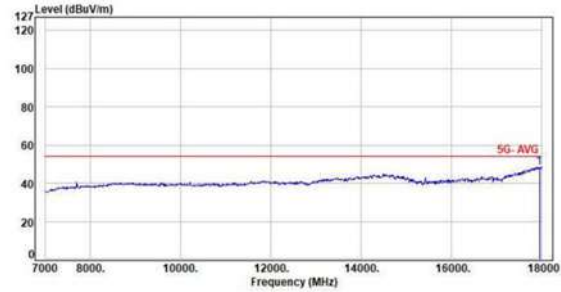

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	33.55	48.52	54.00	-5.48	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

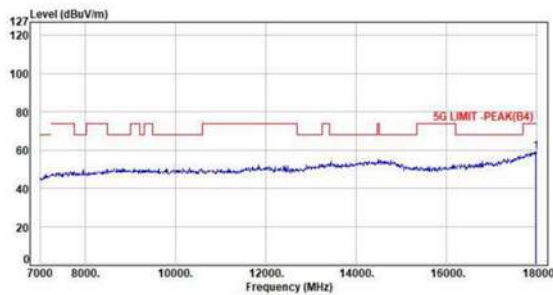

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	43.61	58.71	74.00	-15.29	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Average

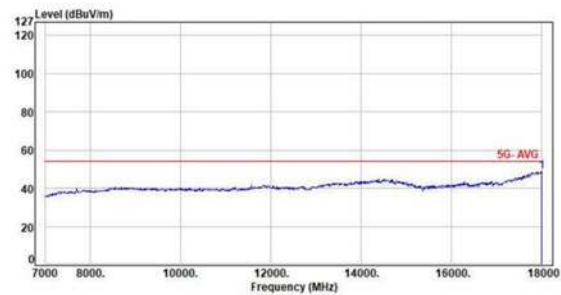

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	33.52	48.66	54.00	-5.34	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

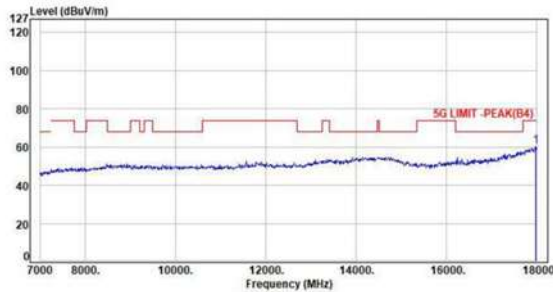

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	45.16	60.26	74.00	-13.74	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Average

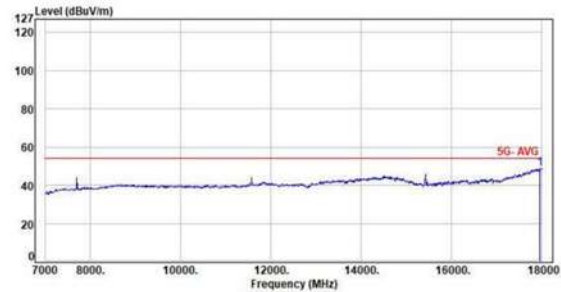

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	33.65	48.67	54.00	-5.33	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

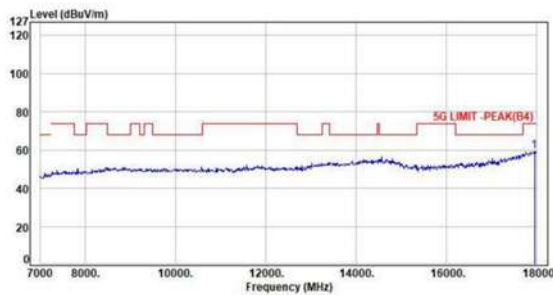

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.46	59.43	74.00	-14.57	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Average

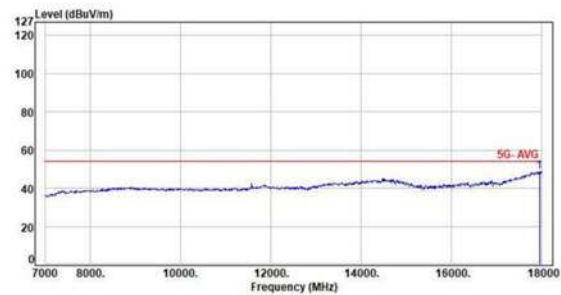

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	33.73	48.70	54.00	-5.30	Average	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




For M/B with AMD CPU -MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Vertical

Detector : Peak

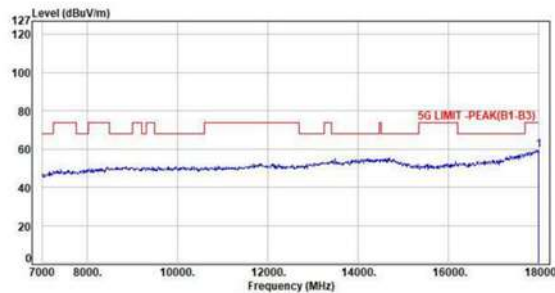

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	44.19	59.33	74.00	-14.67	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Vertical

Detector : Average

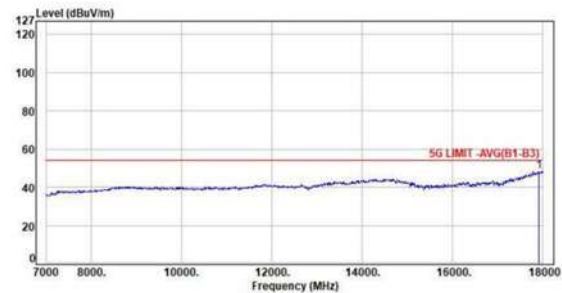

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17912.00	14.78	33.44	48.22	54.00	-5.78	Average	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Horizontal

Detector : Peak

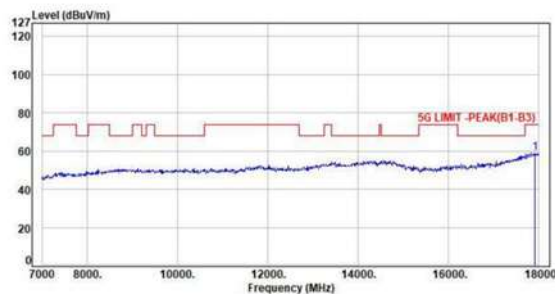

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17912.00	14.78	44.13	58.91	74.00	-15.09	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH36 NSS1 MCS0

Pol : Horizontal

Detector : Average

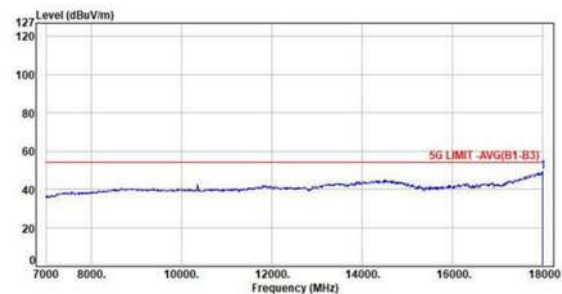

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	34.14	49.28	54.00	-4.72	Average	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Peak

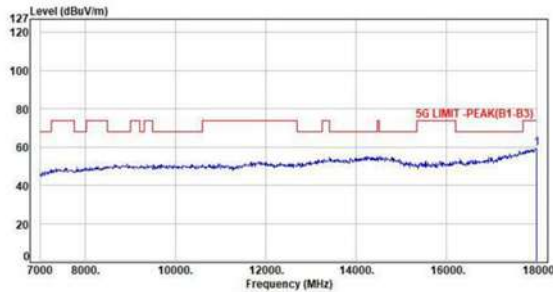

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	44.37	59.51	74.00	-14.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Vertical Detector : Average

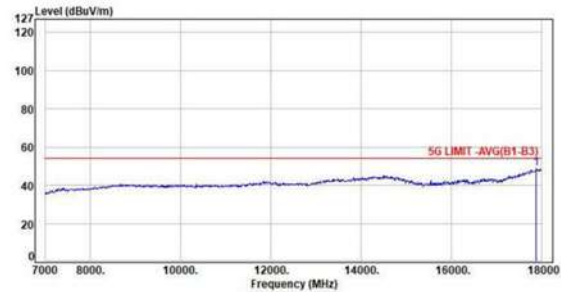

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17879.00	14.70	34.11	48.81	54.00	-5.19	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Peak

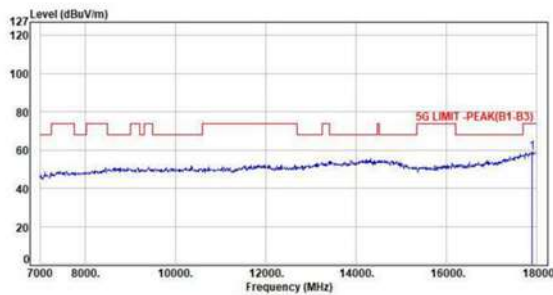

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	14.72	44.35	59.07	74.00	-14.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Pol : Horizontal Detector : Average

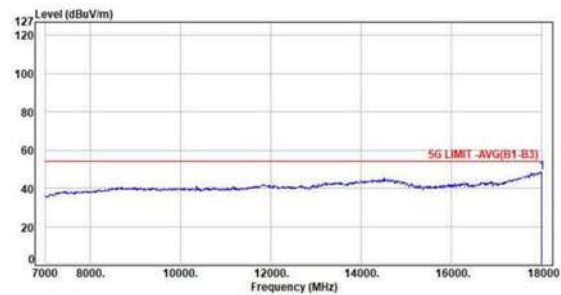


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	33.09	48.23	54.00	-5.77	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Peak

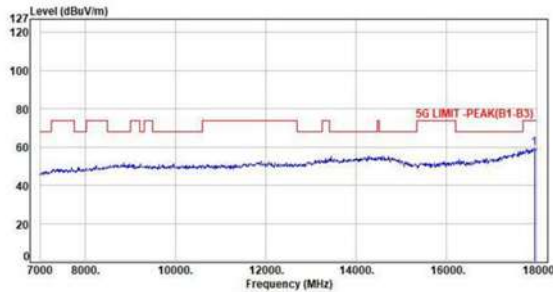

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	44.35	59.32	74.00	-14.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Vertical Detector : Average

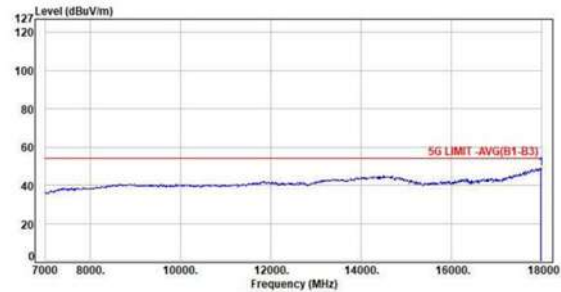

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	33.60	48.70	54.00	-5.30	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Peak

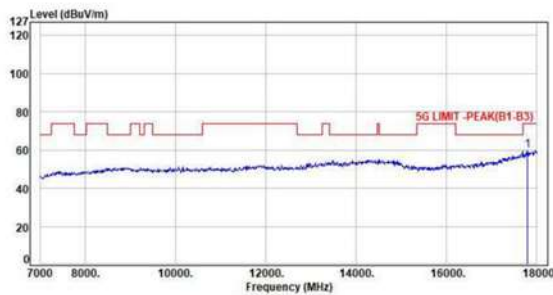

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17791.00	14.40	45.43	59.83	74.00	-14.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Pol : Horizontal Detector : Average

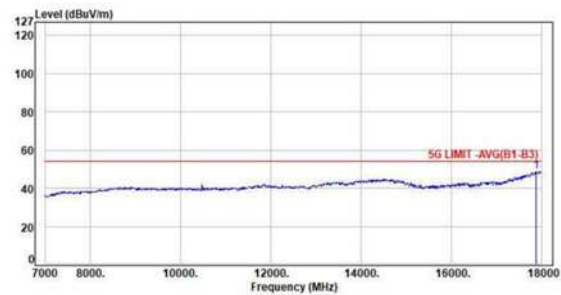


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	34.21	48.88	54.00	-5.12	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Peak

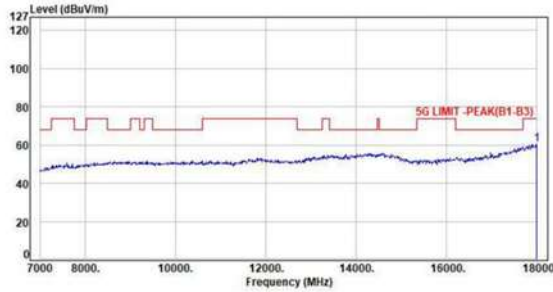

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	45.11	60.25	74.00	-13.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Average

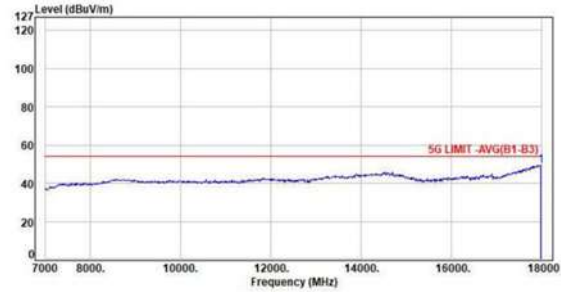

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	34.39	49.49	54.00	-4.51	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Peak

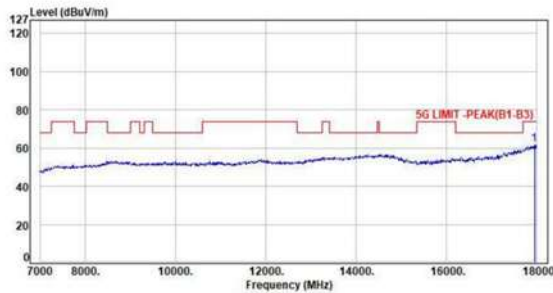

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	46.91	61.88	74.00	-12.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Average

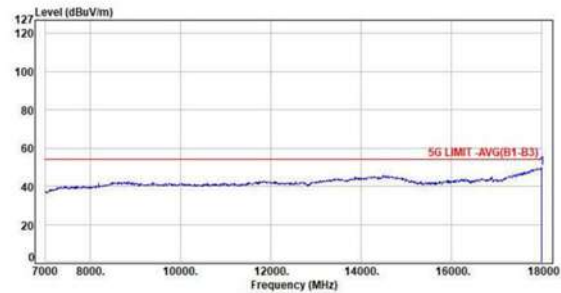


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	34.61	49.75	54.00	-4.25	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Peak

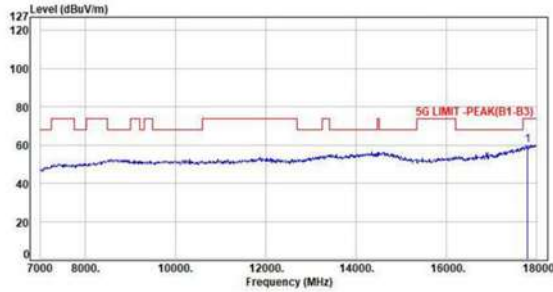

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17791.00	14.40	45.69	60.09	74.00	-13.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Average

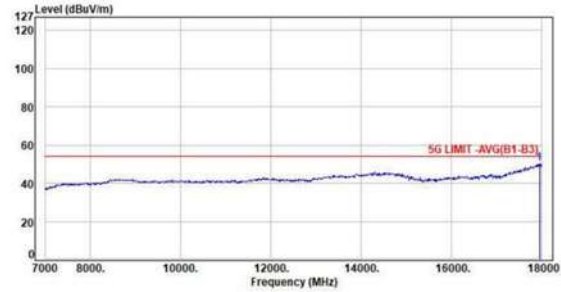

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	35.36	50.33	54.00	-3.67	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Peak

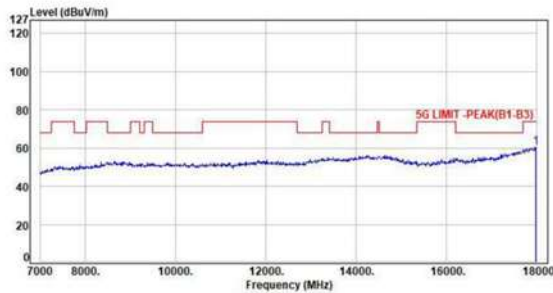

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	45.21	60.31	74.00	-13.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Average

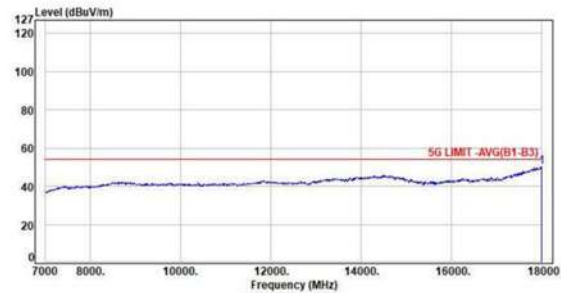


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	34.88	50.02	54.00	-3.98	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Peak

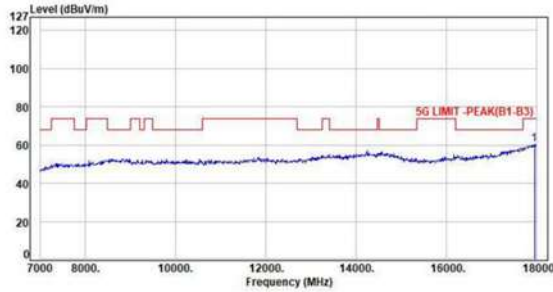

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	45.21	60.18	74.00	-13.82	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Vertical Detector : Average

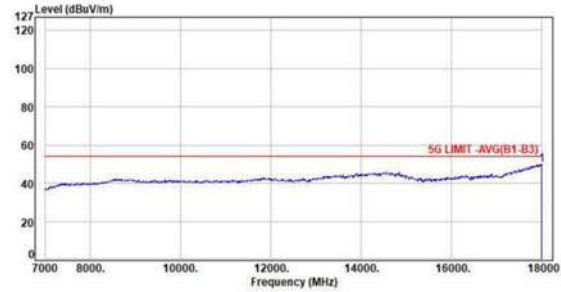

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	34.83	49.97	54.00	-4.03	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Peak

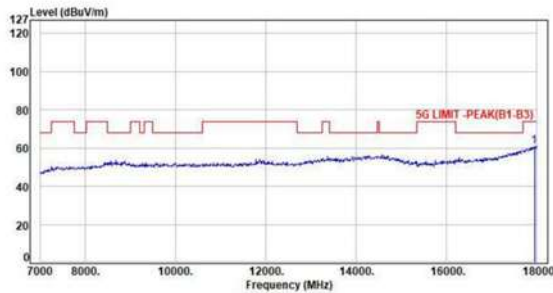

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	45.97	60.94	74.00	-13.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Average

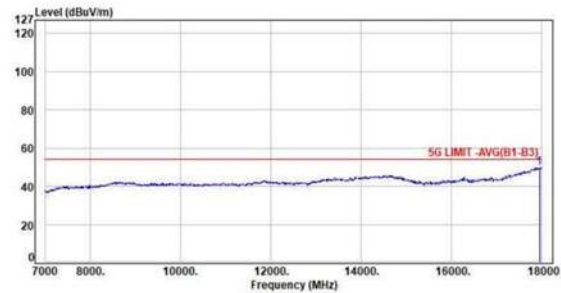


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	34.90	49.87	54.00	-4.13	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Peak

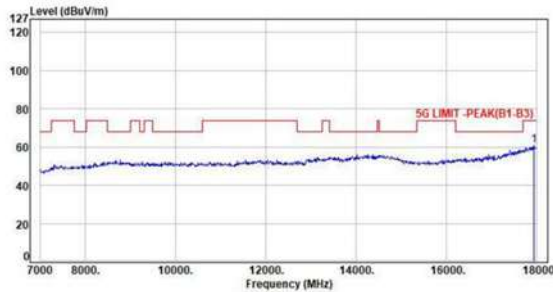

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	14.91	45.99	60.90	74.00	-13.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Average

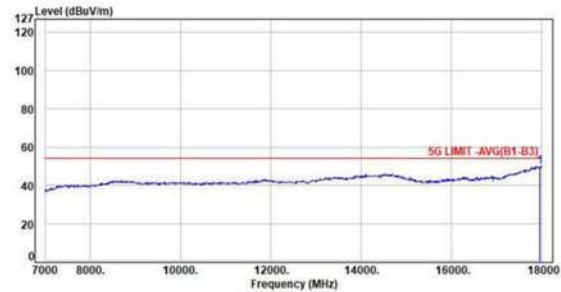

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	34.93	49.95	54.00	-4.05	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Peak

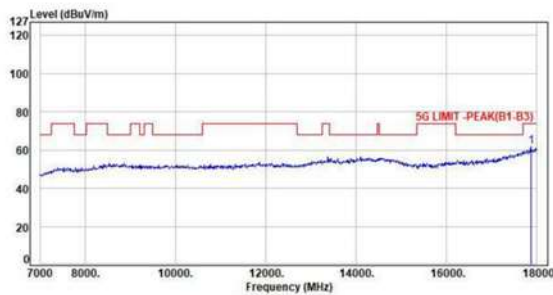

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	46.91	61.58	74.00	-12.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Average

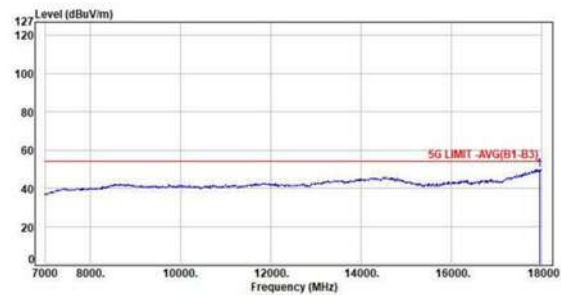


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	34.91	49.88	54.00	-4.12	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Peak

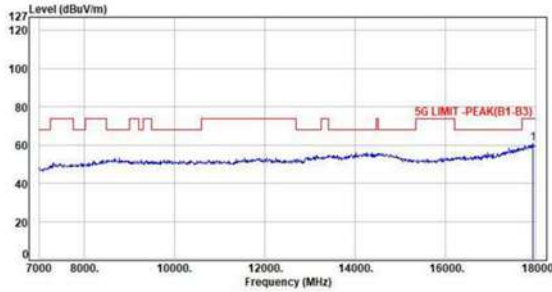

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	14.91	45.99	60.90	74.00	-13.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Average

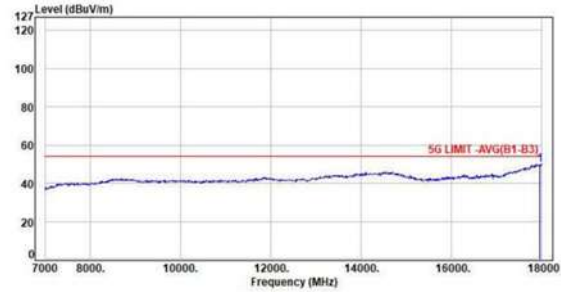

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	34.93	49.95	54.00	-4.05	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Peak

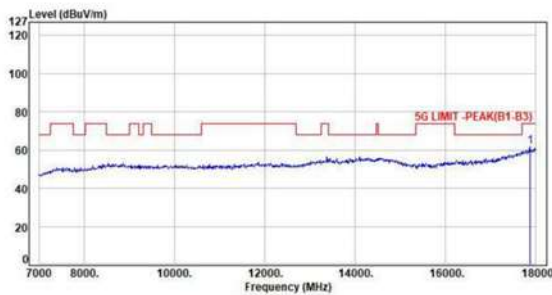

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	46.91	61.58	74.00	-12.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Average

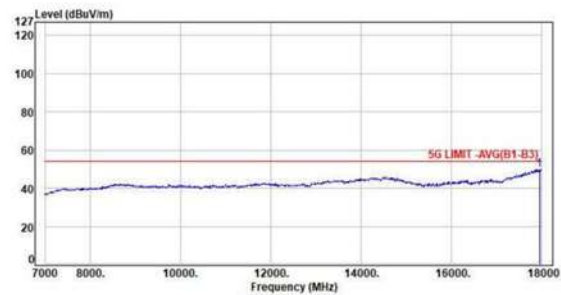


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	34.91	49.88	54.00	-4.12	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Peak

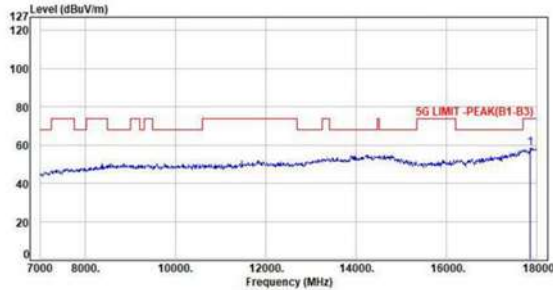

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17857.00	14.66	43.74	58.40	74.00	-15.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Vertical Detector : Average

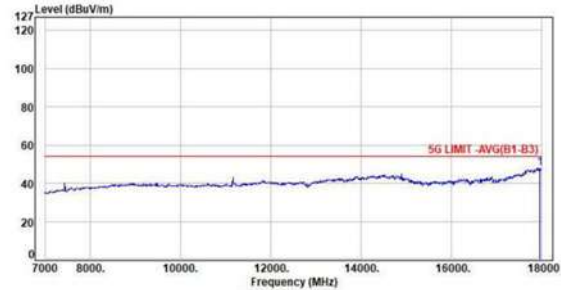

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	32.76	47.78	54.00	-6.22	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Peak

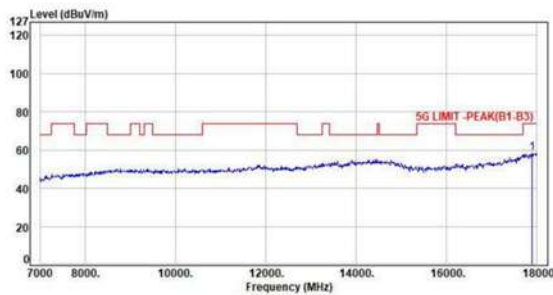

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17890.00	14.71	43.72	58.43	74.00	-15.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH116 NSS1 MCS0
Pol : Horizontal Detector : Average

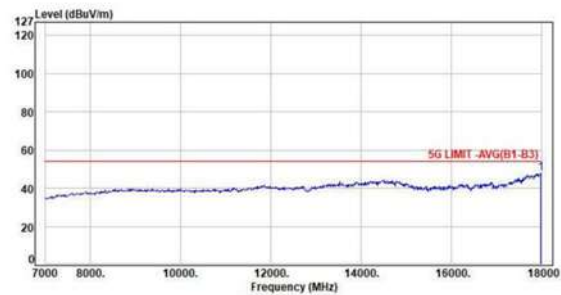


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.51	47.61	54.00	-6.39	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Peak

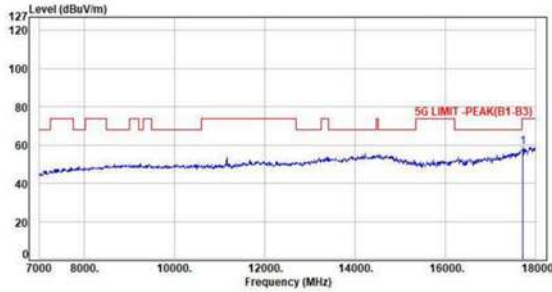

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17714.00	13.75	45.12	58.87	74.00	-15.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Average

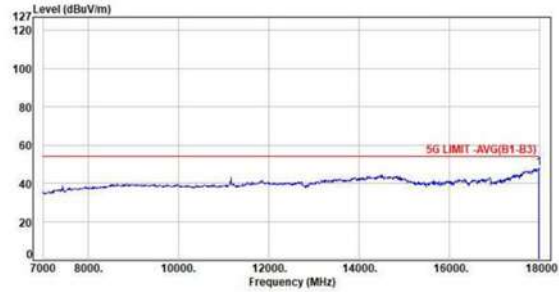

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.85	47.95	54.00	-6.05	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Peak

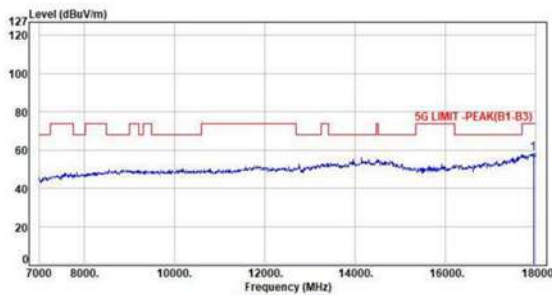

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	43.42	58.39	74.00	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Average

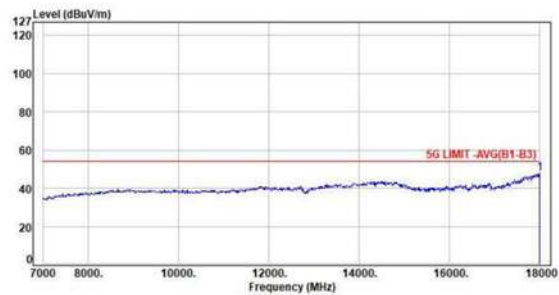


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.56	47.70	54.00	-6.30	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Peak

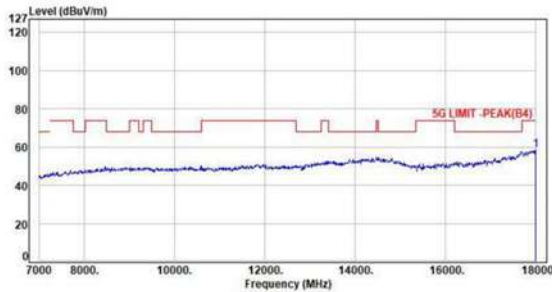

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	43.30	58.44	74.00	-15.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Average

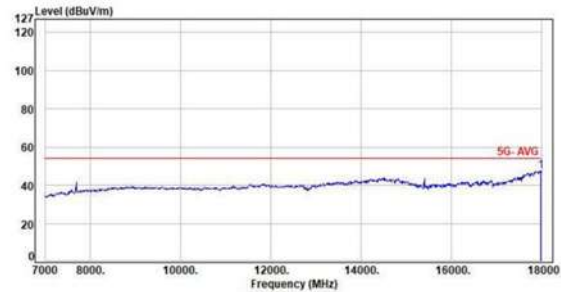

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.40	47.50	54.00	-6.50	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Peak

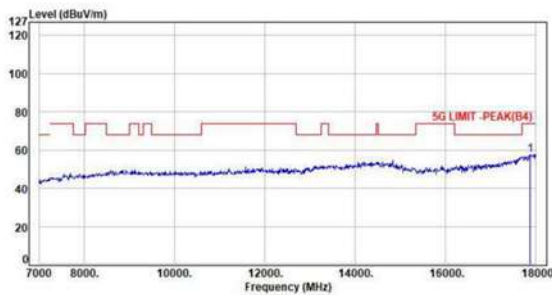

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	43.02	57.69	74.00	-16.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Average

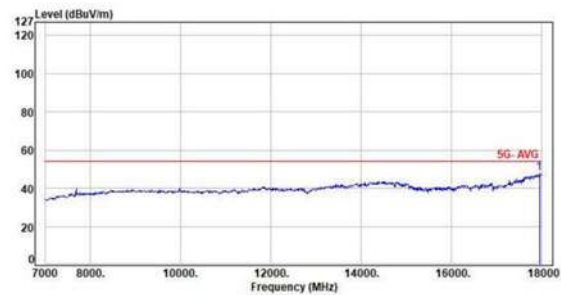


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.65	47.62	54.00	-6.38	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Vertical Detector : Peak

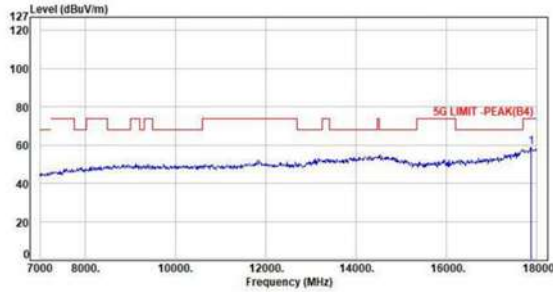

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	44.25	58.92	74.00	-15.08	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Vertical Detector : Average

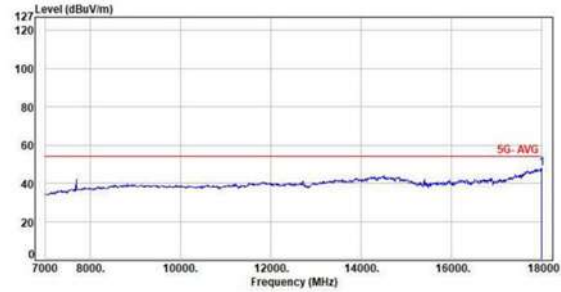

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.47	47.61	54.00	-6.39	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Peak

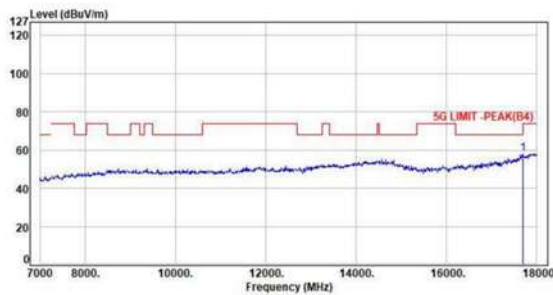

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	13.57	44.61	58.18	68.20	-10.02	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Average

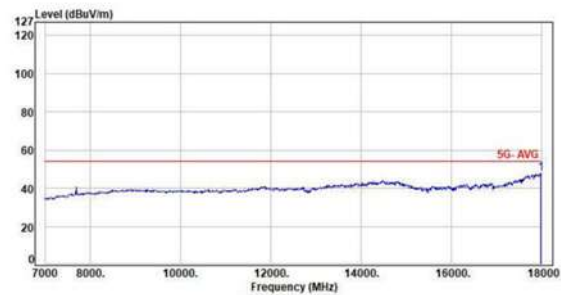


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	32.65	47.75	54.00	-6.25	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Vertical Detector : Peak

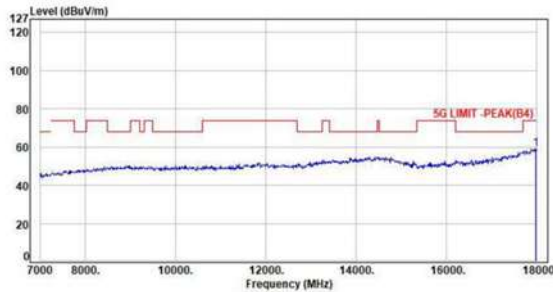

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	43.89	58.99	74.00	-15.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Vertical Detector : Average

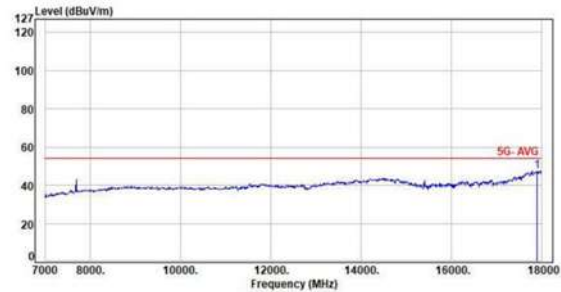

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	14.72	32.79	47.51	54.00	-6.49	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Peak

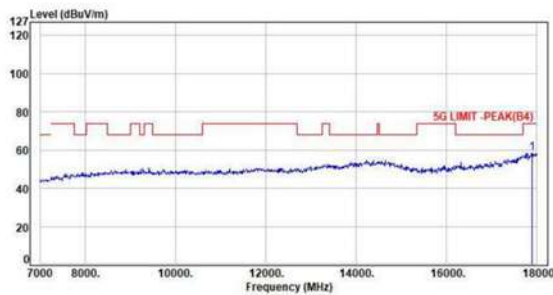

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17890.00	14.71	43.75	58.46	74.00	-15.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Average

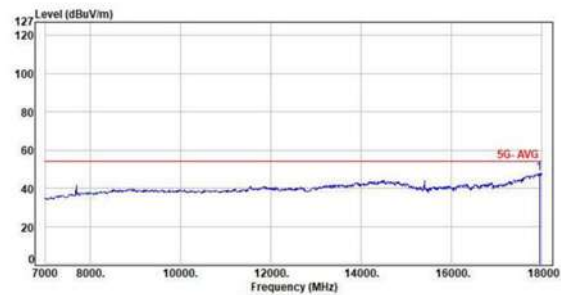


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	32.99	47.96	54.00	-6.04	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Peak

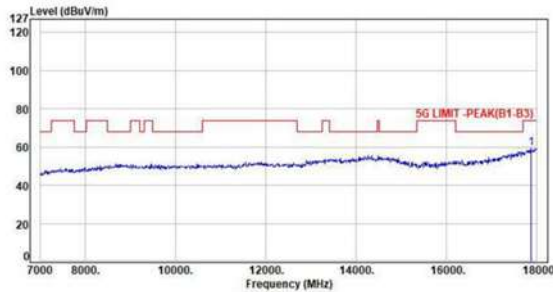

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17868.00	14.67	44.61	59.28	74.00	-14.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Vertical Detector : Average

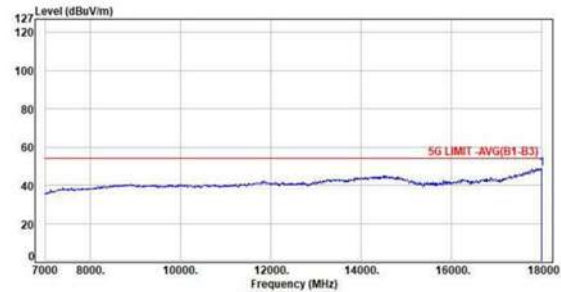

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	33.75	48.89	54.00	-5.11	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Peak

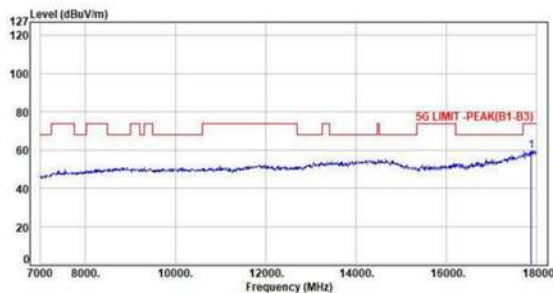

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17879.00	14.70	44.77	59.47	74.00	-14.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Pol : Horizontal Detector : Average

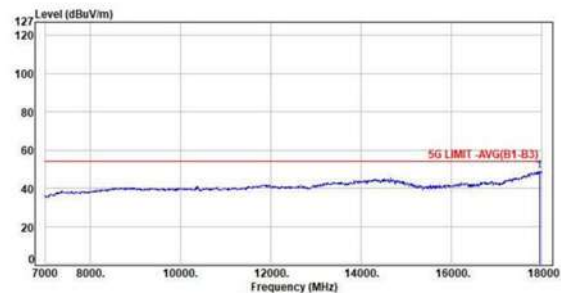


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	33.71	48.68	54.00	-5.32	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Peak

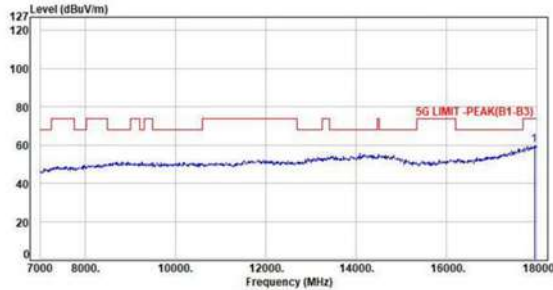

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	45.12	60.09	74.00	-13.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Vertical Detector : Average

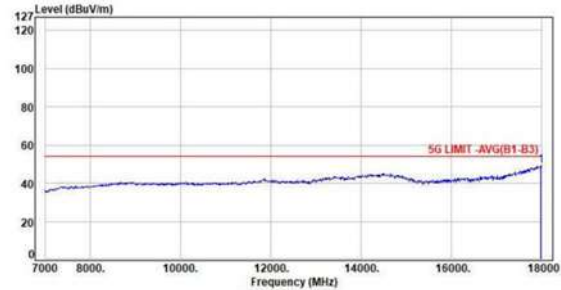

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	34.02	49.12	54.00	-4.88	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Peak

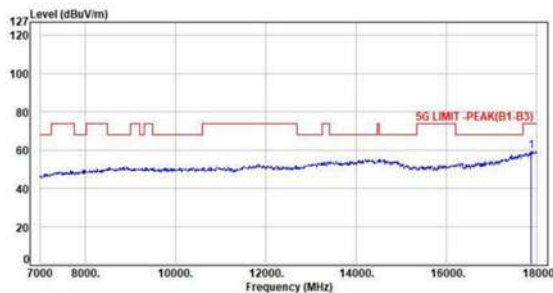

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17879.00	14.70	44.88	59.58	74.00	-14.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Pol : Horizontal Detector : Average

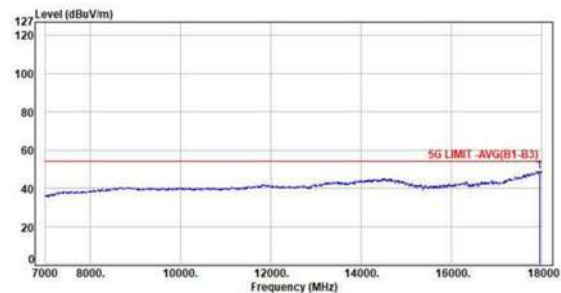


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17945.00	14.97	33.71	48.68	54.00	-5.32	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Peak

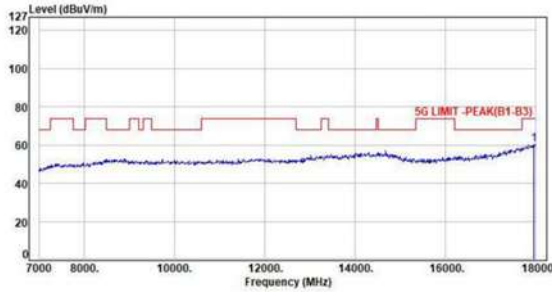

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	45.52	60.54	74.00	-13.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Vertical Detector : Average

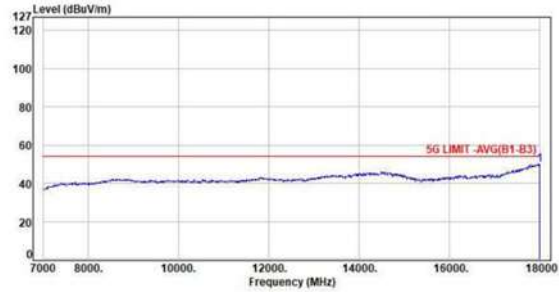

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	34.65	49.79	54.00	-4.21	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Peak

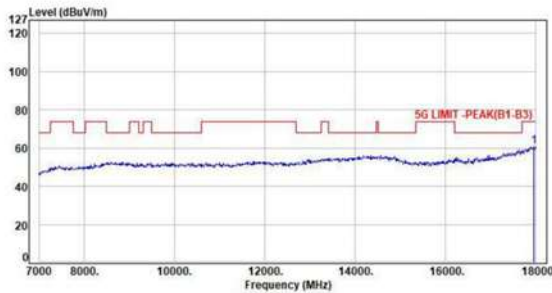

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	15.02	45.62	60.64	74.00	-13.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Average

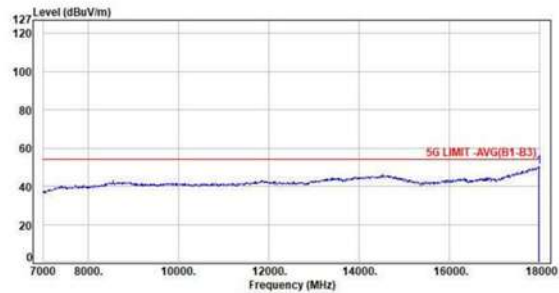


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	34.90	50.00	54.00	-4.00	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Peak

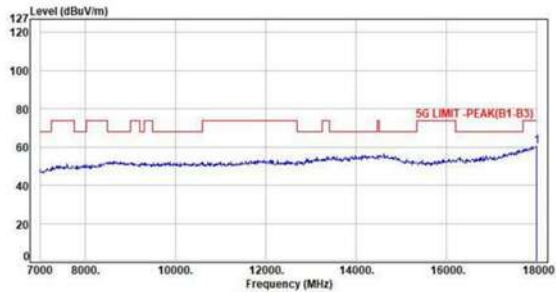

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	45.43	60.57	74.00	-13.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Vertical Detector : Average

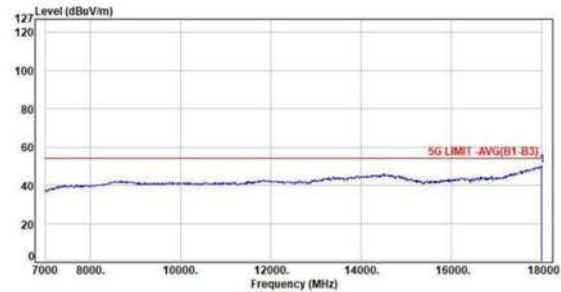

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	35.18	50.32	54.00	-3.68	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Peak

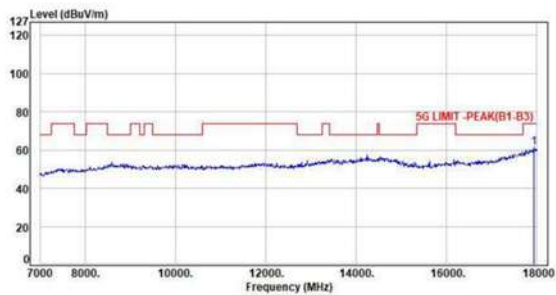

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	14.91	46.28	61.19	74.00	-12.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Average

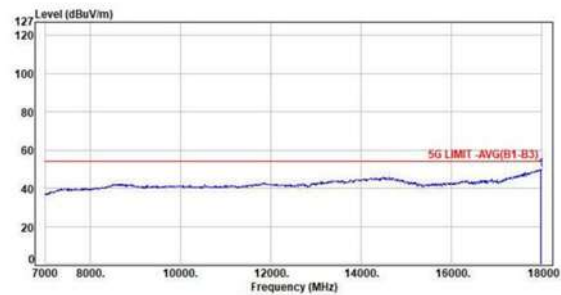


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17978.00	15.10	34.74	49.84	54.00	-4.16	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Peak

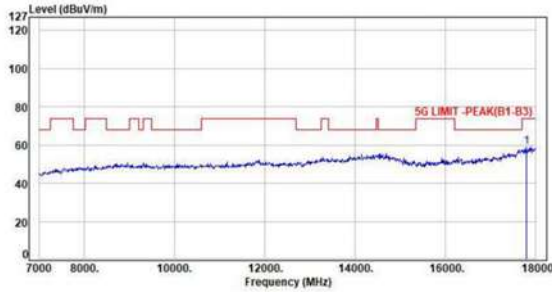

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17791.00	14.40	44.70	59.10	74.00	-14.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Vertical Detector : Average

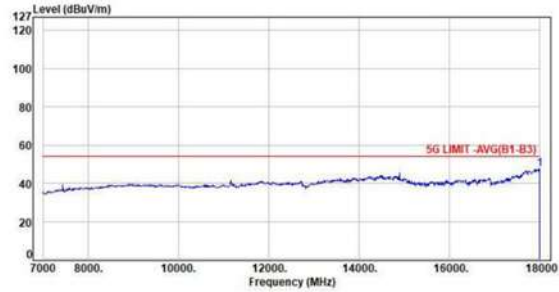

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.41	47.55	54.00	-6.45	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Peak

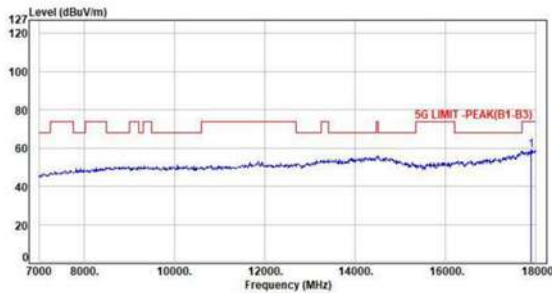

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	14.72	44.42	59.14	74.00	-14.86	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Average

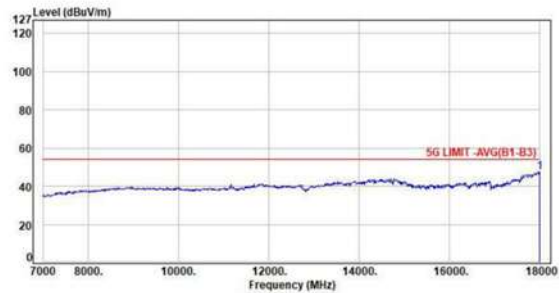

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17989.00	15.14	32.28	47.42	54.00	-6.58	Average	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor