



Power NVNT n20 5240MHz Ant1

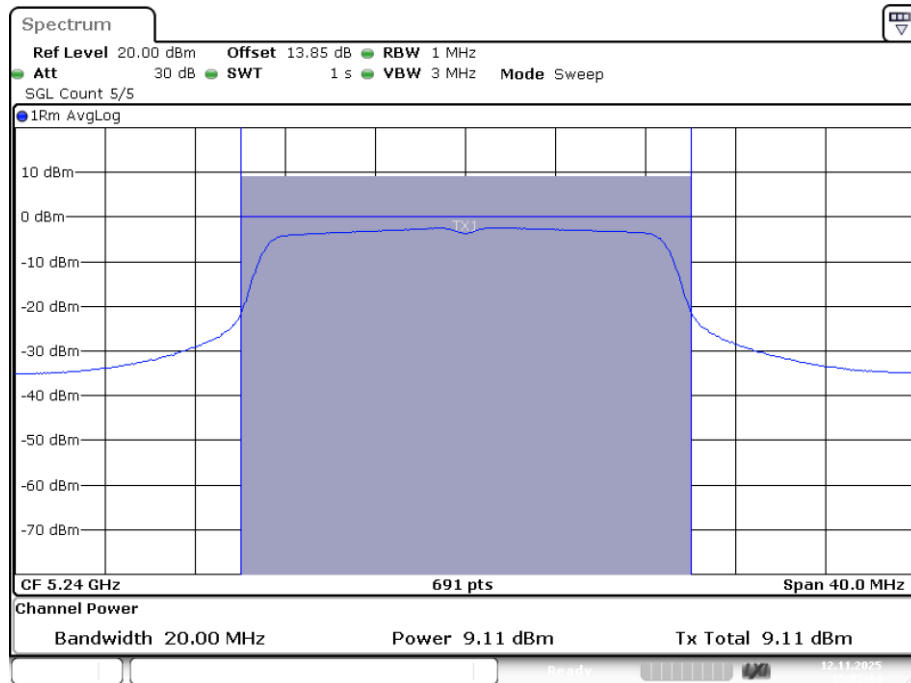


Date: 12.NOV.2025 15:05:13

Power NVNT n40 5190MHz Ant1

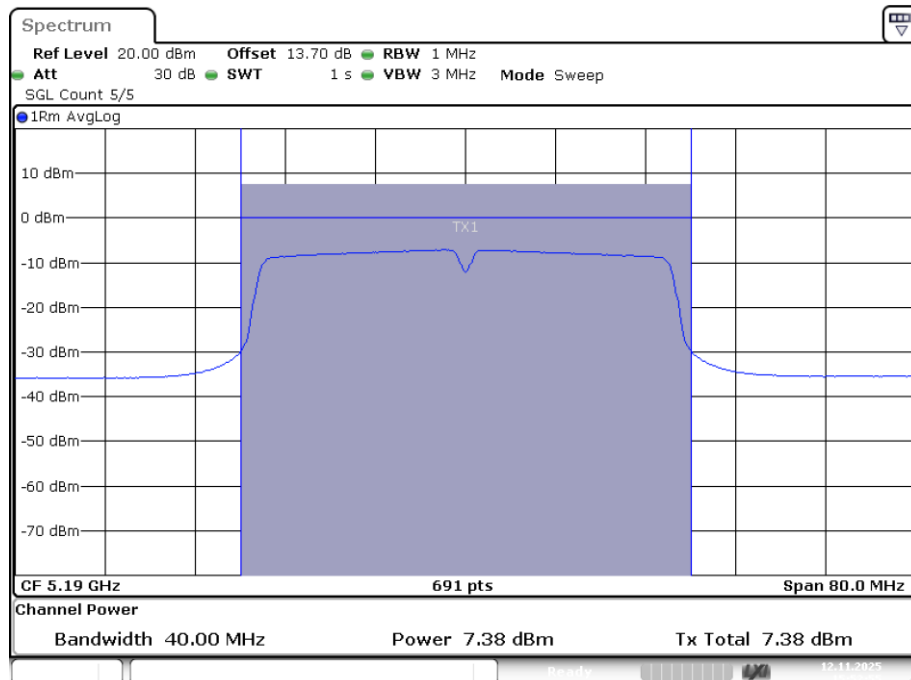

Date: 12.NOV.2025 15:52:54

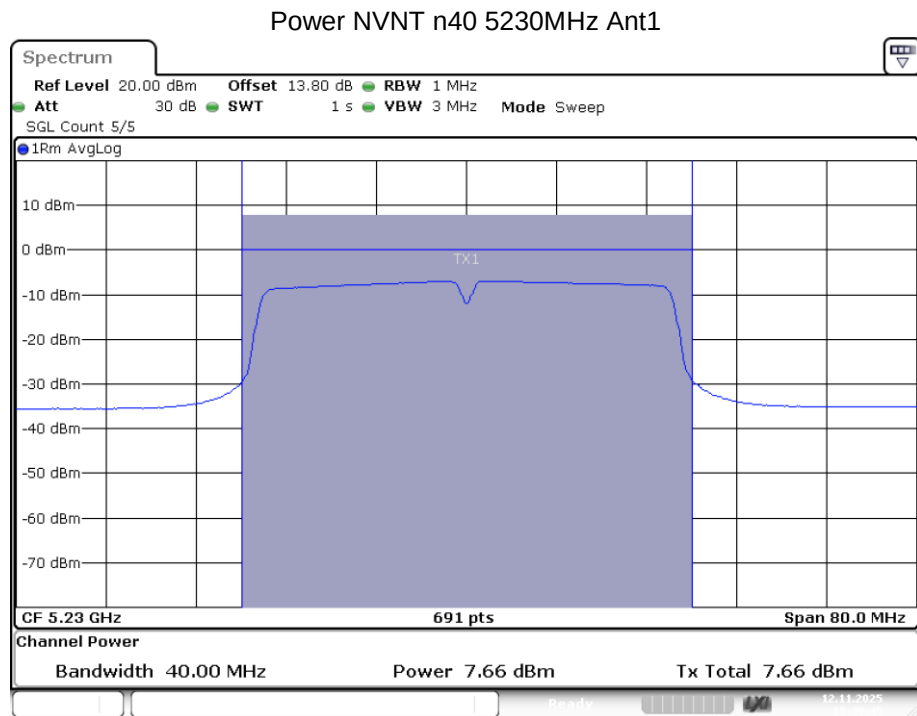

Date: 12.NOV.2025 15:49:45


Note: offset=cable factor

Band 2 (5250 -5350 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Cycle Factor (dB)	Ant Gain (dBi)	EIRP (dBm)	FCC Limit (dBm)	IC Limit (dBm)	Verdict
NVNT	a	5260	Ant1	7.852	0.28	7.16	15.29	22.82	22.82	Pass
NVNT	a	5280	Ant1	8.563	0.08	7.16	15.80	22.82	22.78	Pass
NVNT	a	5320	Ant1	8.643	0.08	7.16	15.88	22.82	22.82	Pass
NVNT	ac20	5260	Ant1	7.749	0.36	7.16	15.27	22.82	22.82	Pass
NVNT	ac20	5280	Ant1	7.528	0.3	7.16	14.99	22.82	22.82	Pass
NVNT	ac20	5320	Ant1	7.274	0.3	7.16	14.73	22.82	22.82	Pass
NVNT	ac40	5270	Ant1	7.392	0.03	7.16	14.58	22.82	22.82	Pass
NVNT	ac40	5310	Ant1	7.246	0.02	7.16	14.43	22.82	22.82	Pass
NVNT	ax20	5260	Ant1	5.086	0.82	7.16	13.07	22.82	22.82	Pass
NVNT	ax20	5280	Ant1	5.774	0.39	7.16	13.32	22.82	22.82	Pass
NVNT	ax20	5320	Ant1	5.348	0.39	7.16	12.90	22.82	22.82	Pass
NVNT	ax40	5270	Ant1	5.152	0.7	7.16	13.01	22.82	22.82	Pass
NVNT	ax40	5310	Ant1	4.251	0.7	7.16	12.11	22.82	22.82	Pass
NVNT	n20	5260	Ant1	7.067	0	7.16	14.23	22.82	22.82	Pass
NVNT	n20	5280	Ant1	7.239	0.01	7.16	14.41	22.82	22.82	Pass
NVNT	n20	5320	Ant1	7.756	0.01	7.16	14.93	22.82	22.82	Pass
NVNT	n40	5270	Ant1	7.369	0.08	7.16	14.61	22.82	22.82	Pass
NVNT	n40	5310	Ant1	7.47	0.02	7.16	14.65	22.82	22.82	Pass


Note: 1. Directional gain=7.16dBi, so the Conducted Power Limit need to reduce 1.16.

Power NVNT a 5260MHz Ant1

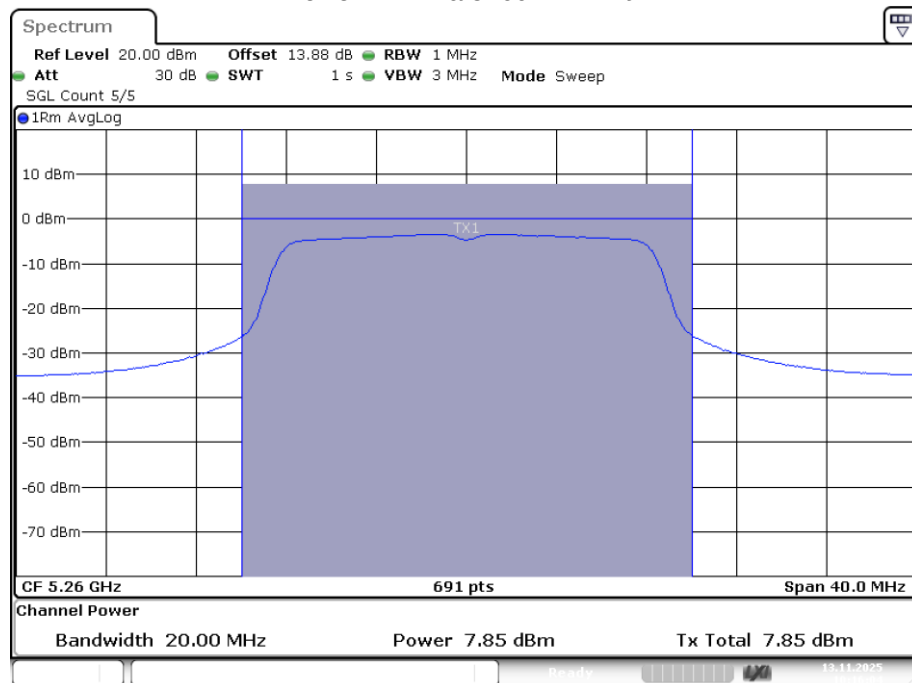


Date: 13.NOV.2025 10:16:04


Power NVNT a 5280MHz Ant1

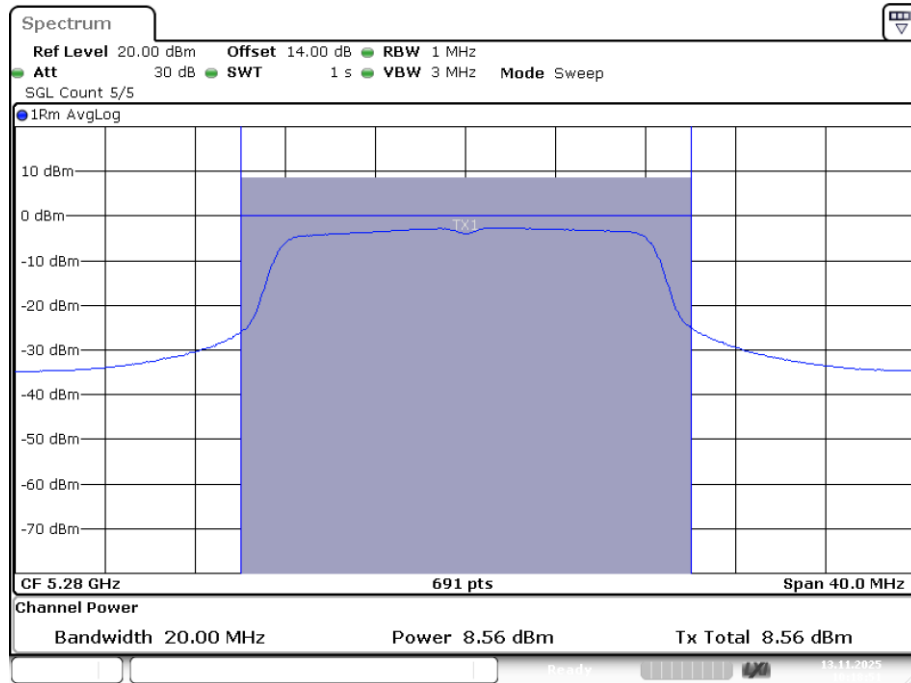


Power NVNT a 5320MHz Ant1

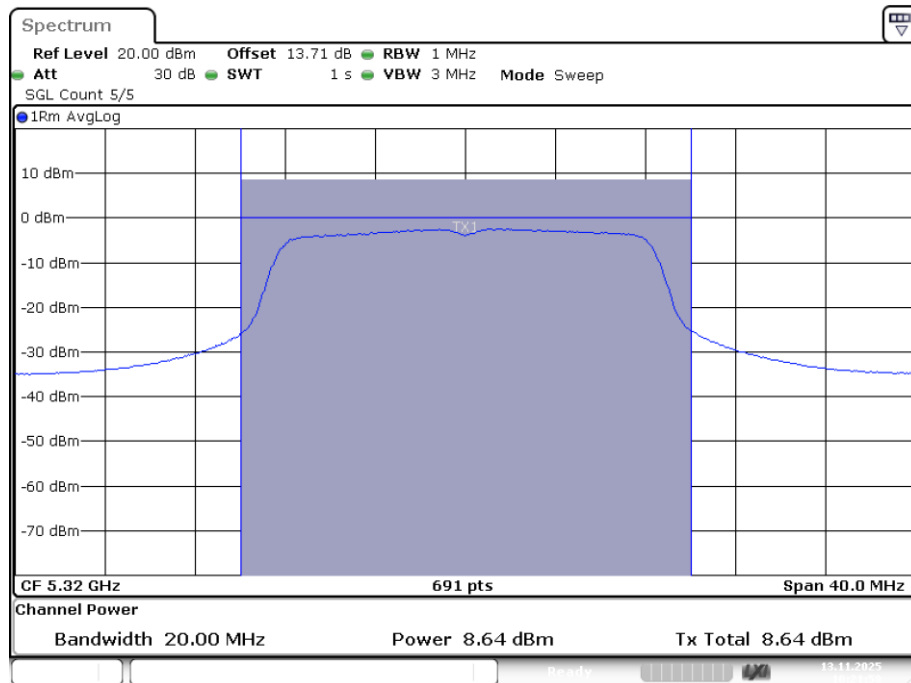


Power NVNT ac20 5260MHz Ant1

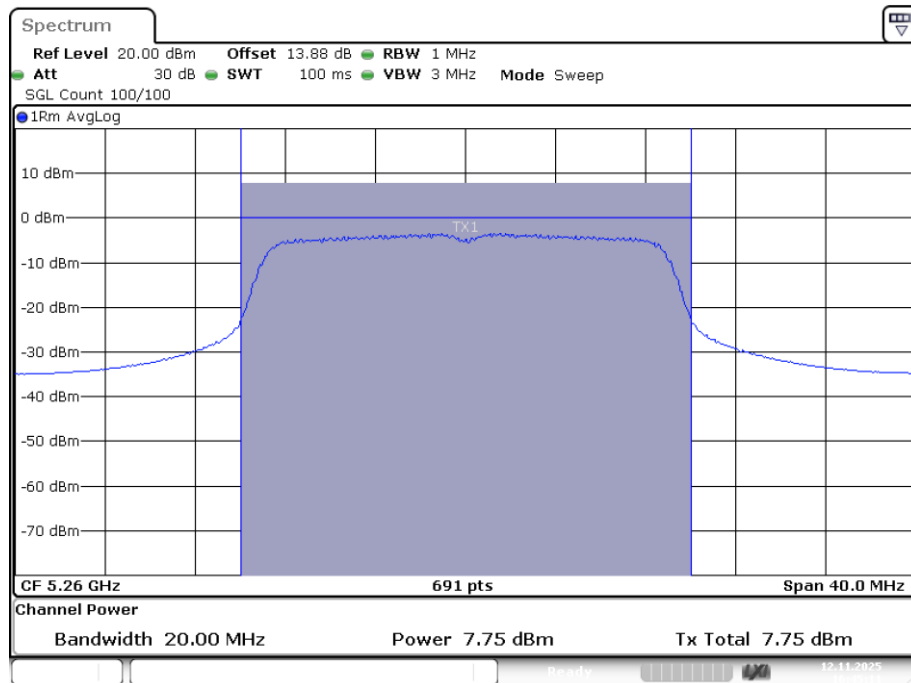


Power NVNT ac20 5280MHz Ant1

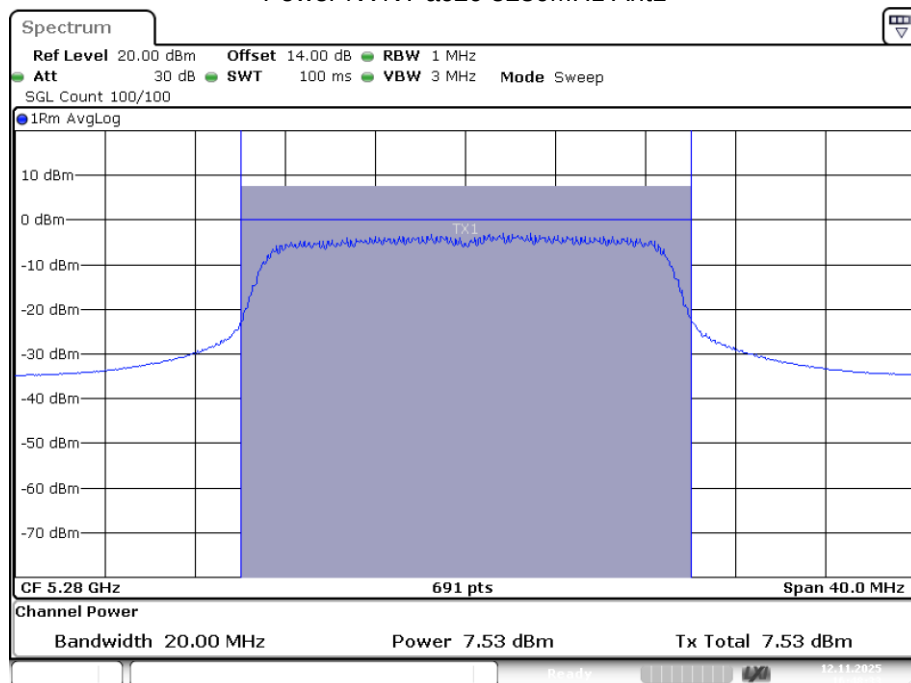


Power NVNT ac20 5320MHz Ant1

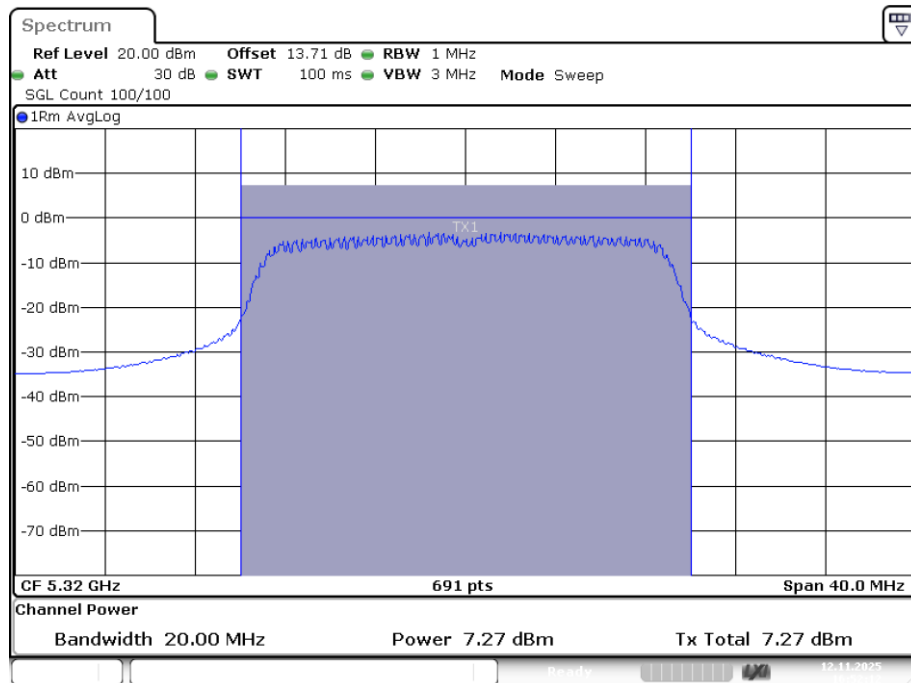


Power NVNT ac40 5270MHz Ant1

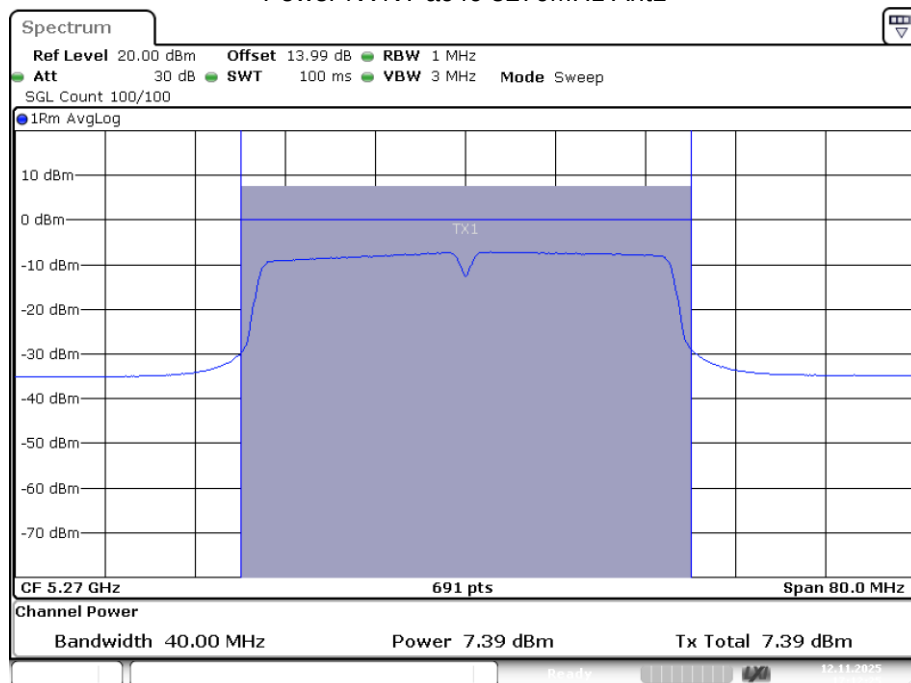


Power NVNT ac40 5310MHz Ant1

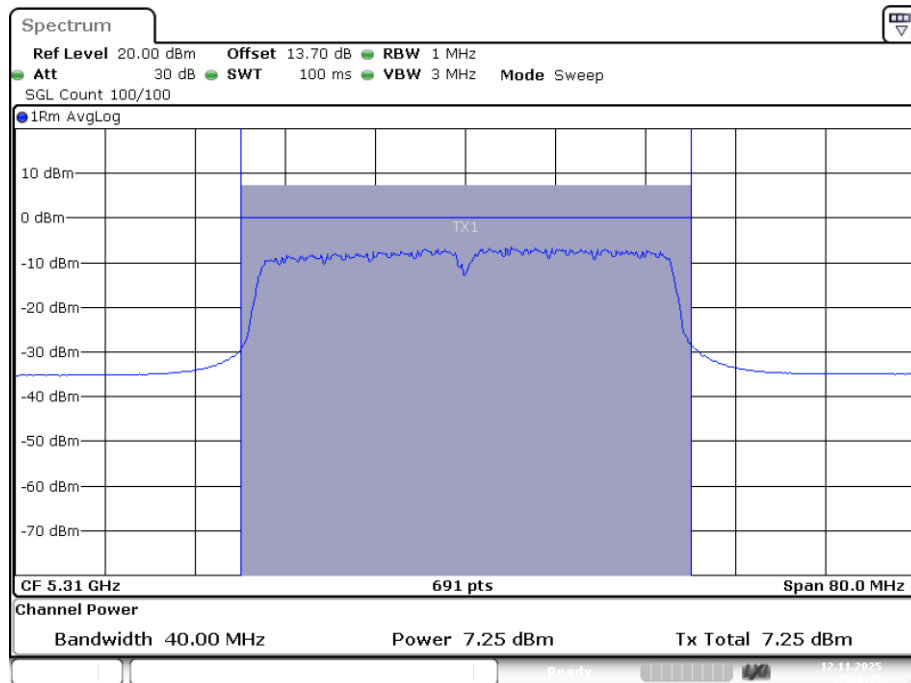


Power NVNT ax20 5260MHz Ant1

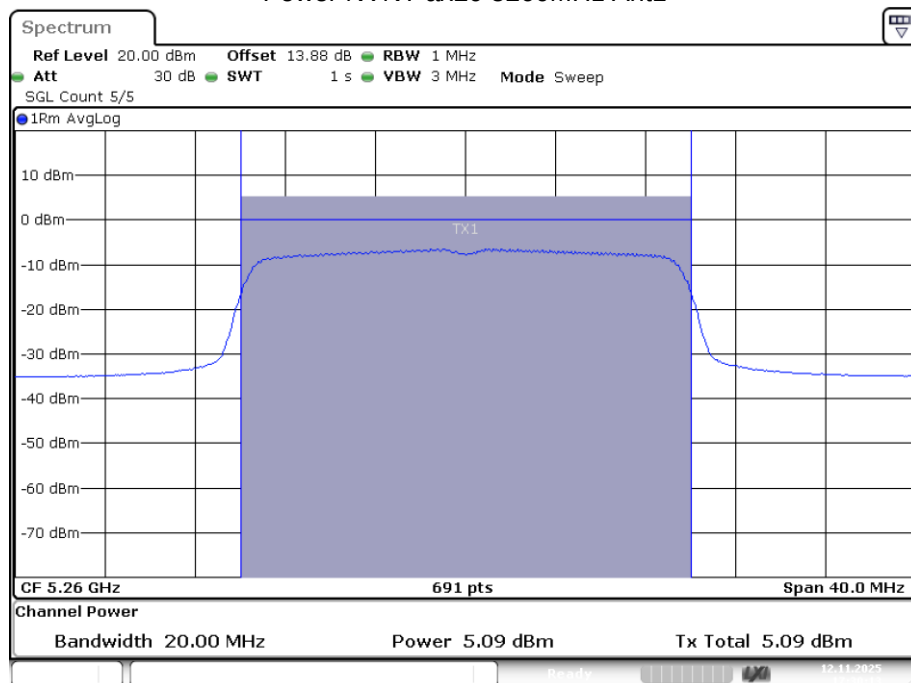


Power NVNT ax20 5280MHz Ant1

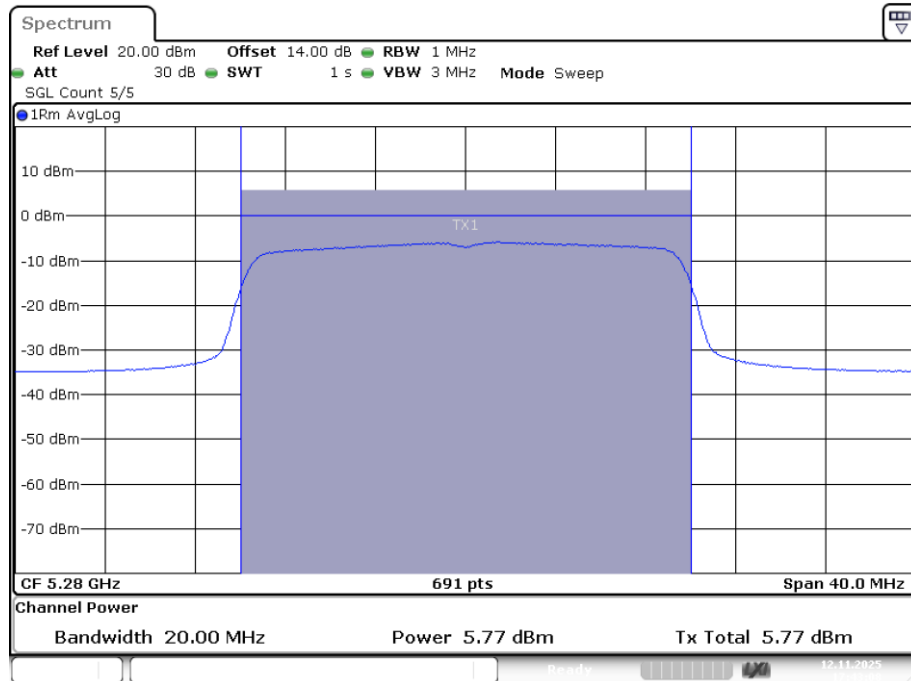


Power NVNT ax20 5320MHz Ant1

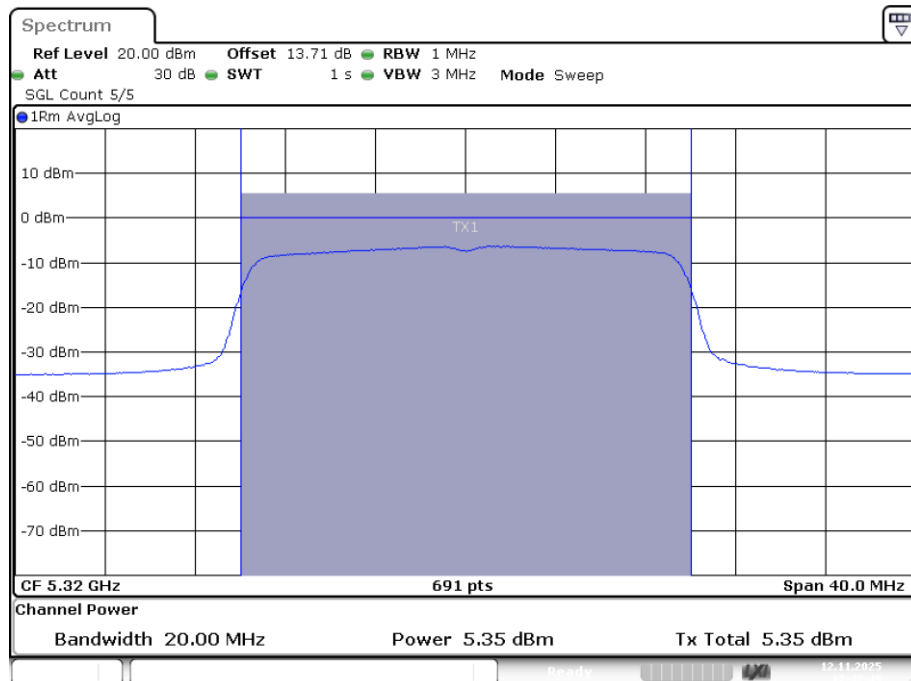


Power NVNT ax40 5270MHz Ant1

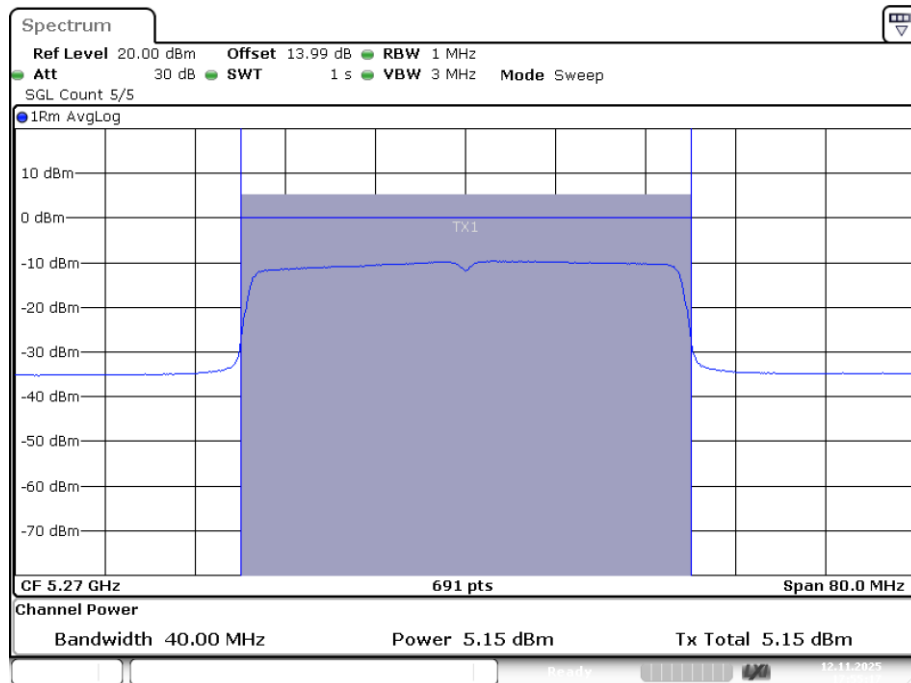


Power NVNT ax40 5310MHz Ant1

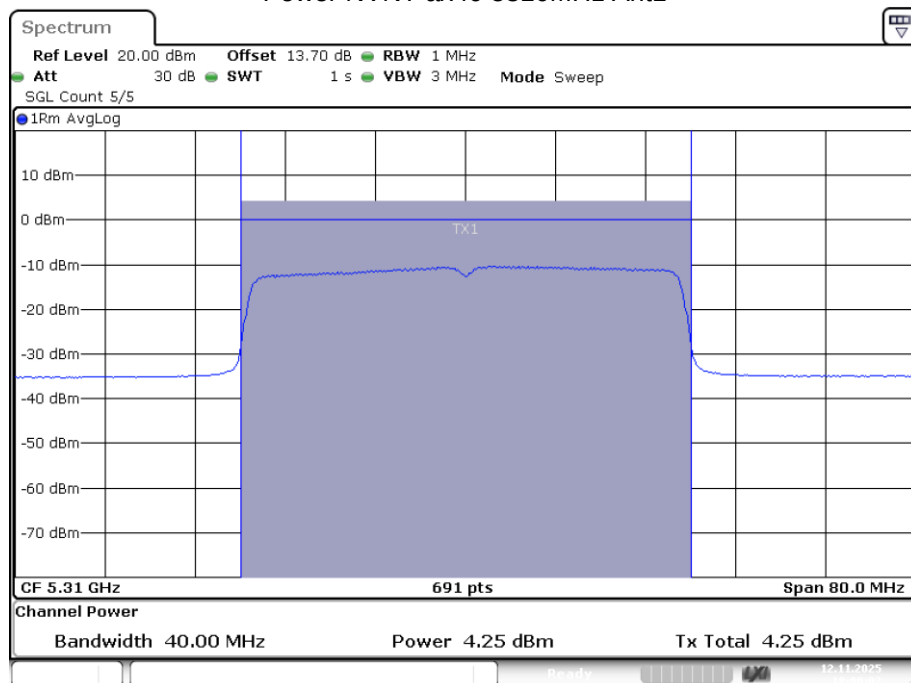


Power NVNT n20 5260MHz Ant1

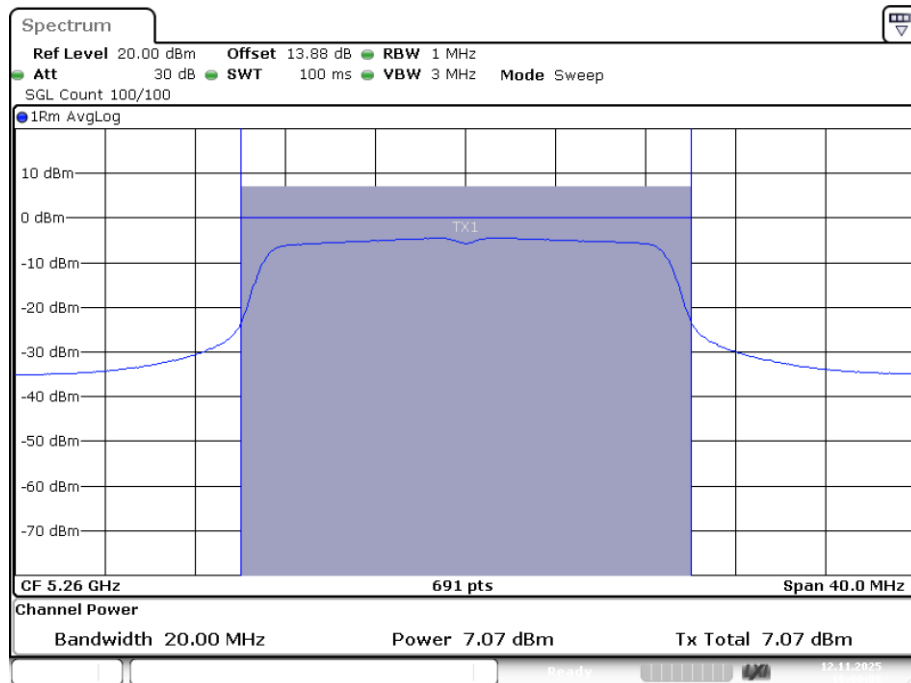


Power NVNT n20 5280MHz Ant1

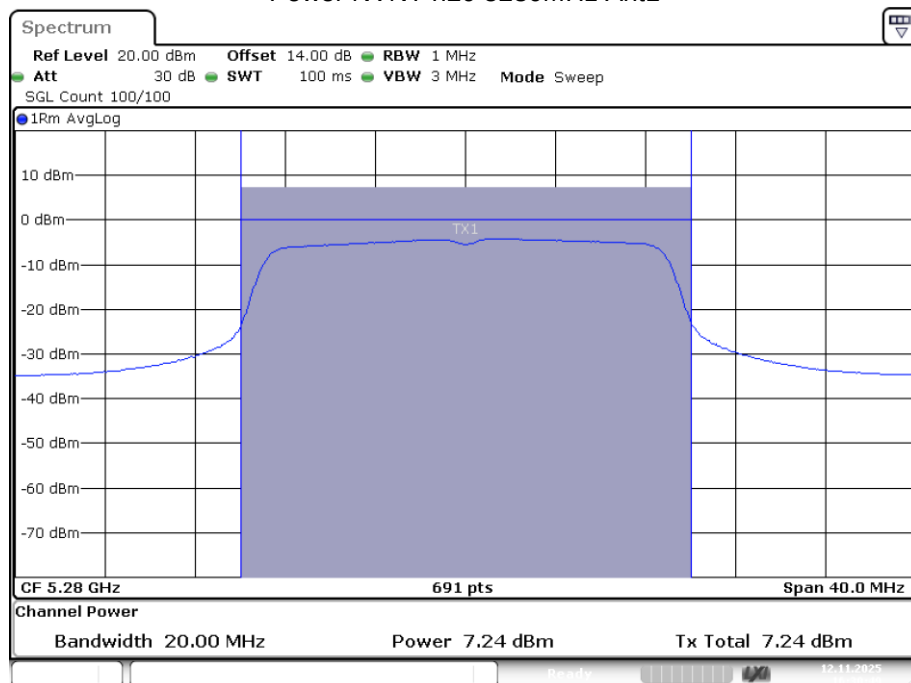


Power NVNT n20 5320MHz Ant1

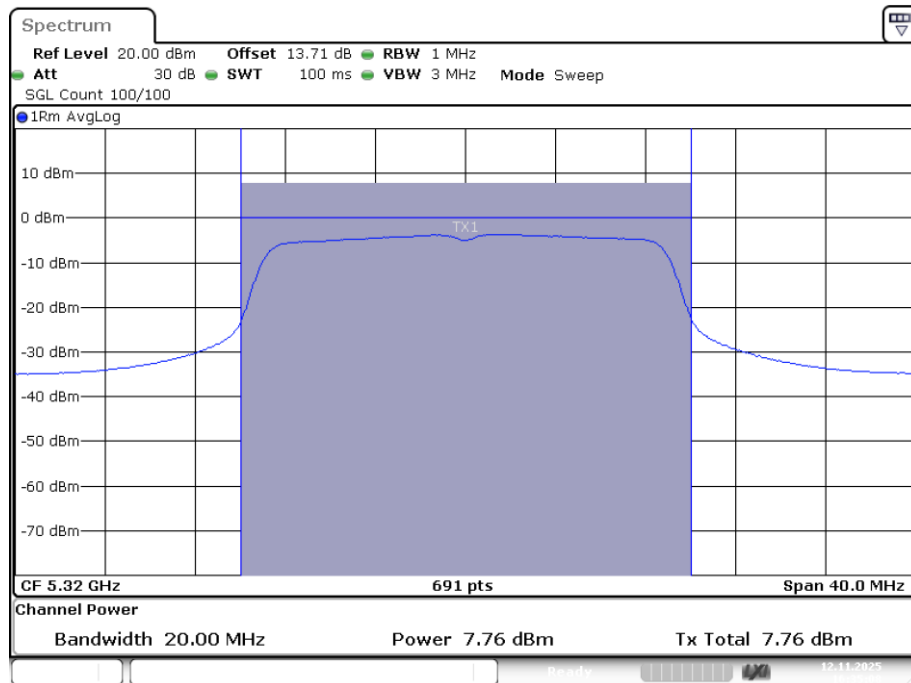

Power NVNT n40 5270MHz Ant1

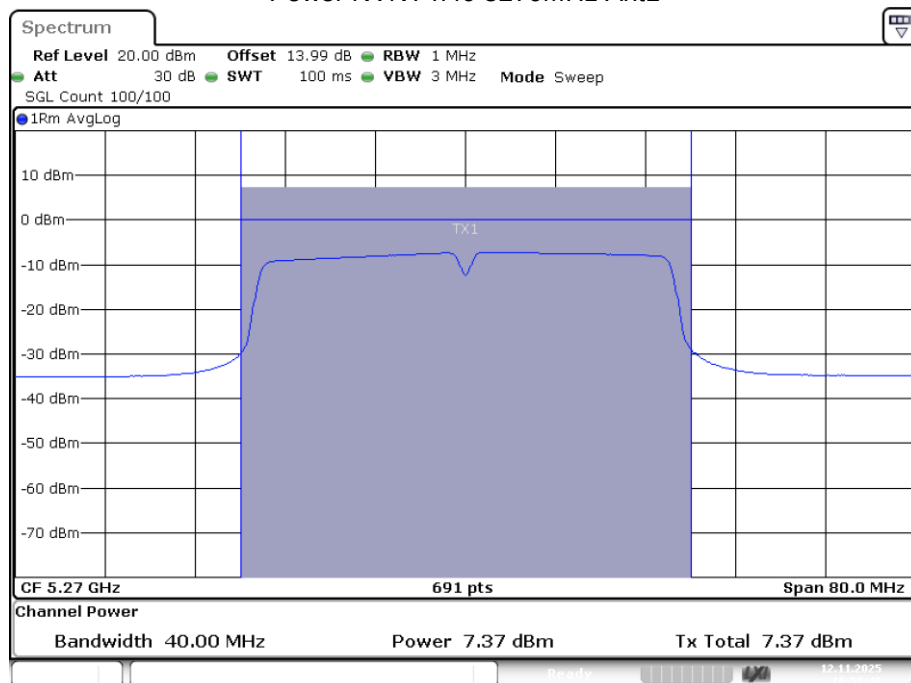

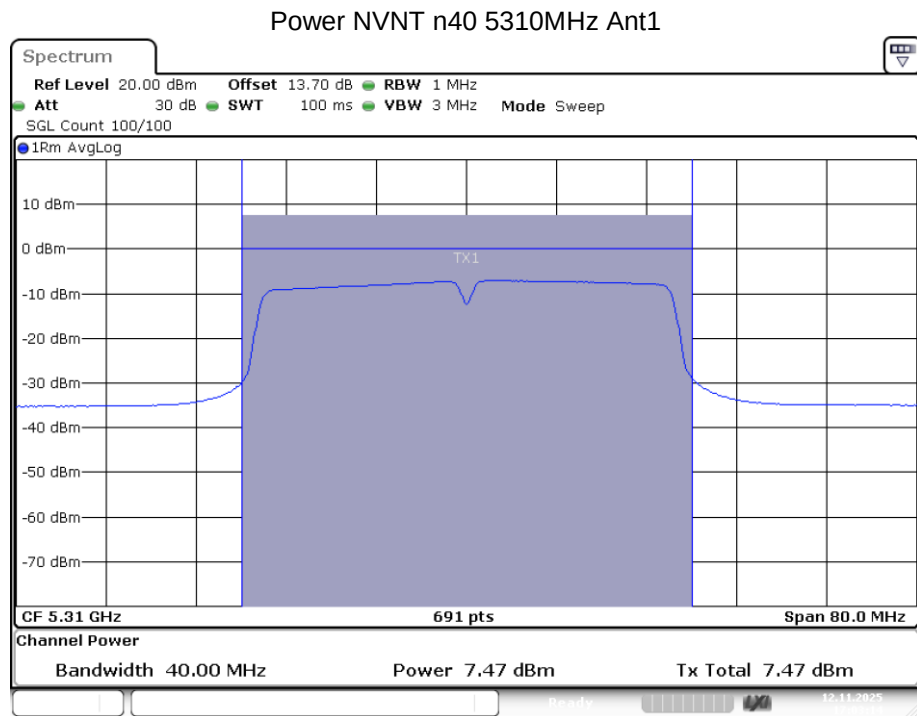


Note: offset=cable factor

Band 3 (5470 -5725 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Cycle Factor (dB)	Ant Gain (dBi)	EIRP (dBm)	FCC Limit (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	8.3	0.28	7.16	15.74	22.82	22.82	Pass
NVNT	a	5580	Ant1	8.228	0.26	7.16	15.65	22.82	22.82	Pass
NVNT	a	5700	Ant1	7.818	0.29	7.16	15.27	22.82	22.75	Pass
NVNT	ac20	5500	Ant1	6.92	0.31	7.16	14.39	22.82	22.82	Pass
NVNT	ac20	5580	Ant1	7.411	0.31	7.16	14.88	22.82	22.82	Pass
NVNT	ac20	5700	Ant1	7.824	0.3	7.16	15.28	22.82	22.82	Pass
NVNT	ac40	5510	Ant1	7.693	0.17	7.16	15.02	22.82	22.82	Pass
NVNT	ac40	5670	Ant1	6.414	0.58	7.16	14.15	22.82	22.82	Pass
NVNT	ax20	5500	Ant1	4.779	0.12	7.16	12.06	22.82	22.82	Pass
NVNT	ax20	5580	Ant1	4.475	0.39	7.16	12.03	22.82	22.82	Pass
NVNT	ax20	5700	Ant1	5.531	0.39	7.16	13.08	22.82	22.82	Pass
NVNT	ax40	5510	Ant1	5.139	0.22	7.16	12.52	22.82	22.82	Pass
NVNT	ax40	5670	Ant1	4.359	0.7	7.16	12.22	22.82	22.82	Pass
NVNT	n20	5500	Ant1	7.635	0.31	7.16	15.11	22.82	22.82	Pass
NVNT	n20	5580	Ant1	7.396	0.33	7.16	14.89	22.82	22.45	Pass
NVNT	n20	5700	Ant1	7.54	0.31	7.16	15.01	22.82	22.82	Pass
NVNT	n40	5510	Ant1	8.671	0.18	7.16	16.01	22.82	22.82	Pass
NVNT	n40	5670	Ant1	7.989	0.27	7.16	15.42	22.82	22.82	Pass


Note: 1. Directional gain=7.16dBi, so the Conducted Power Limit need to reduce 1.16.

Power NVNT a 5500MHz Ant1

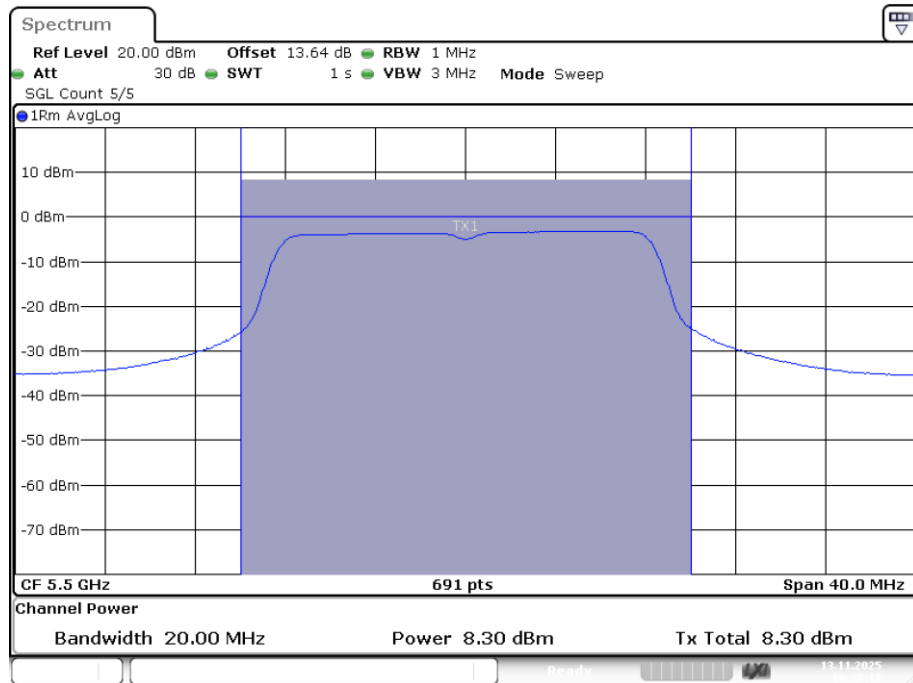


Date: 13.NOV.2025 10:27:17

Power NVNT a 5580MHz Ant1

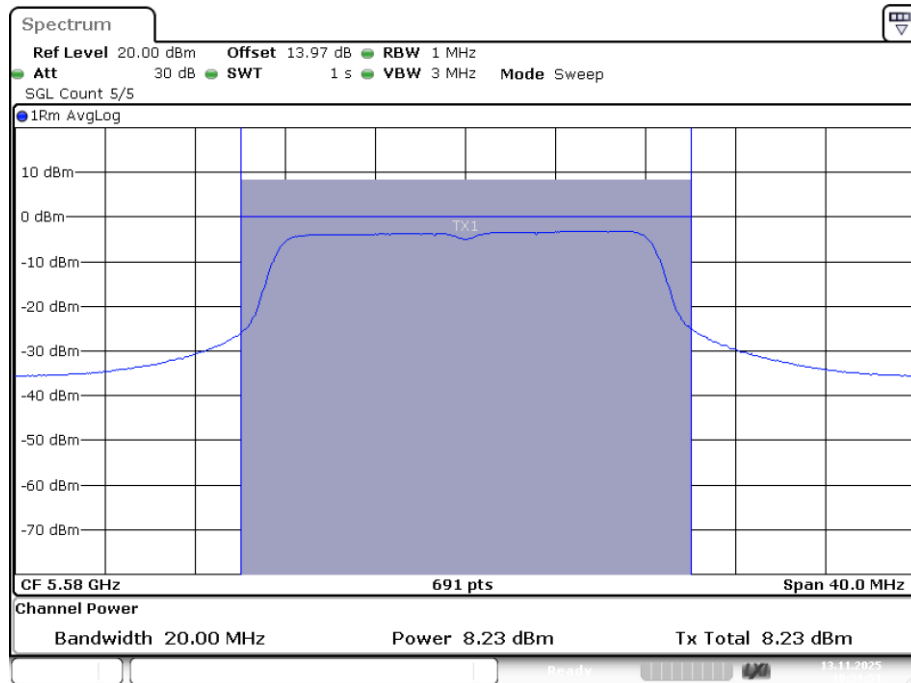


Date: 13.NOV.2025 10:31:51

Power NVNT a 5700MHz Ant1

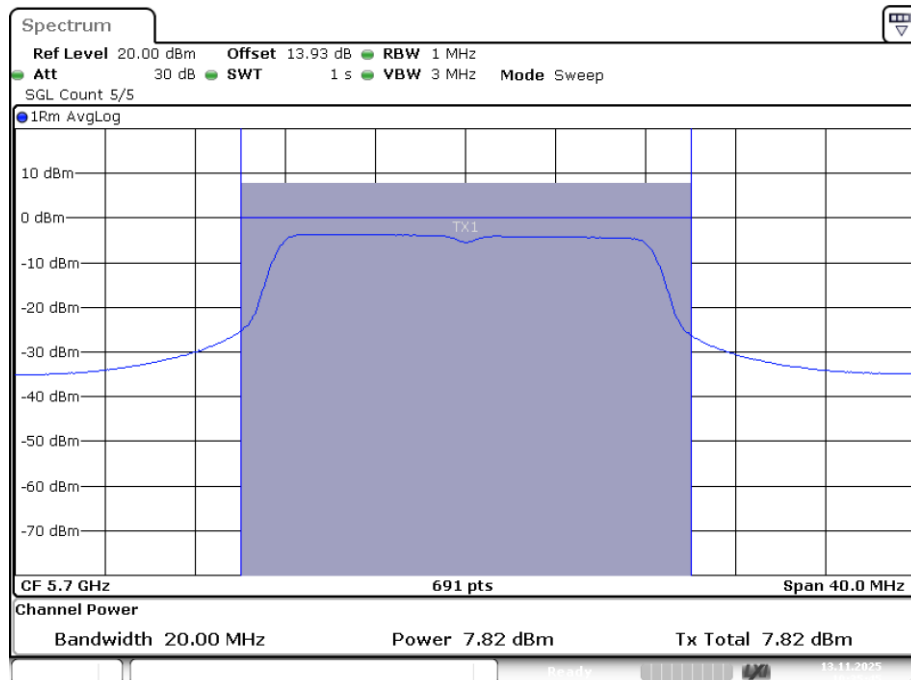


Date: 13.NOV.2025 10:35:45

Power NVNT ac20 5500MHz Ant1

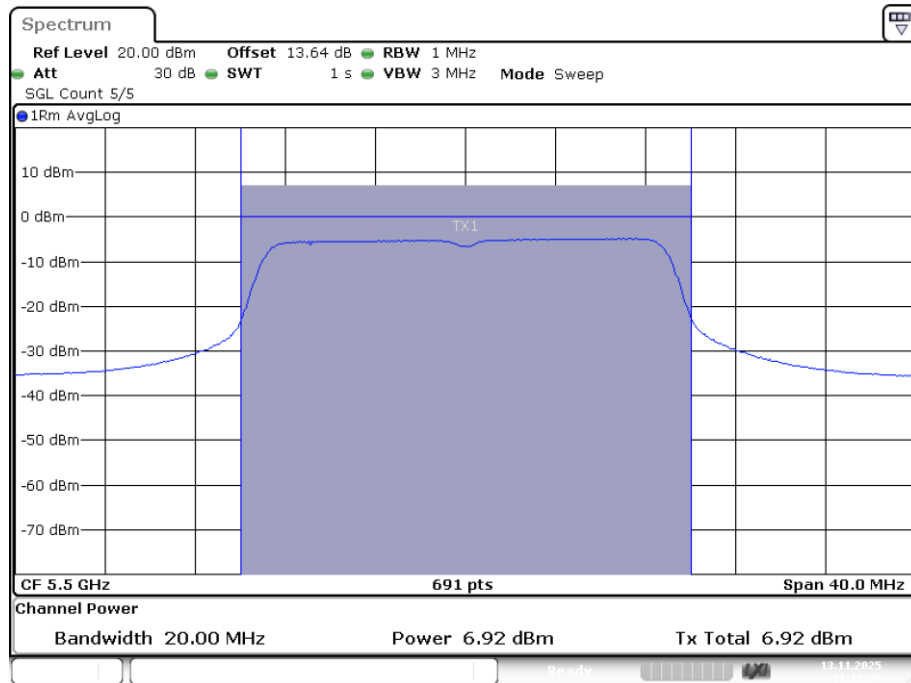


Date: 13.NOV.2025 11:12:56

Power NVNT ac20 5580MHz Ant1

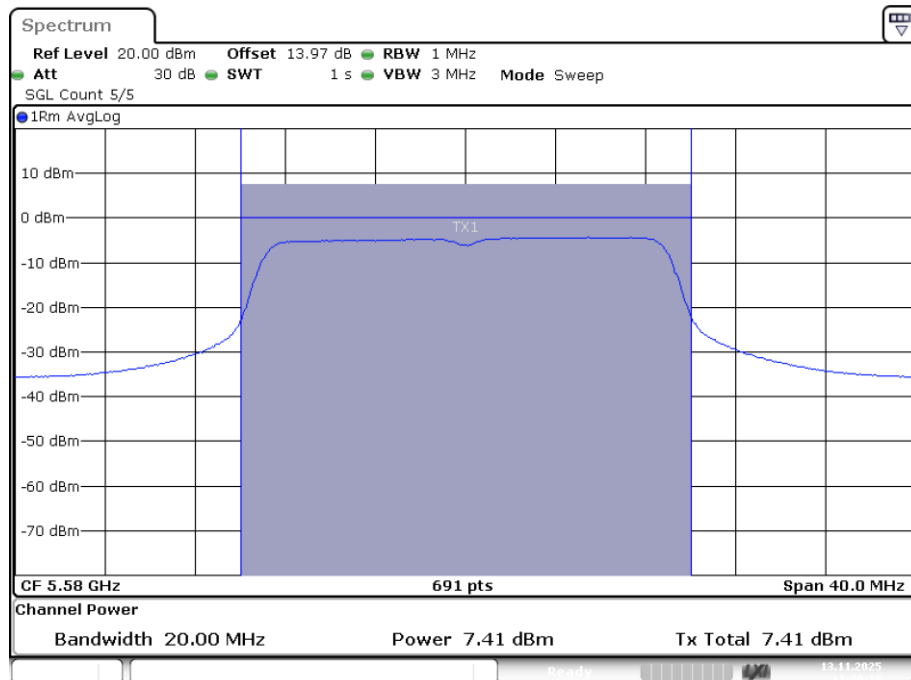


Date: 13.NOV.2025 11:20:15

Power NVNT ac20 5700MHz Ant1

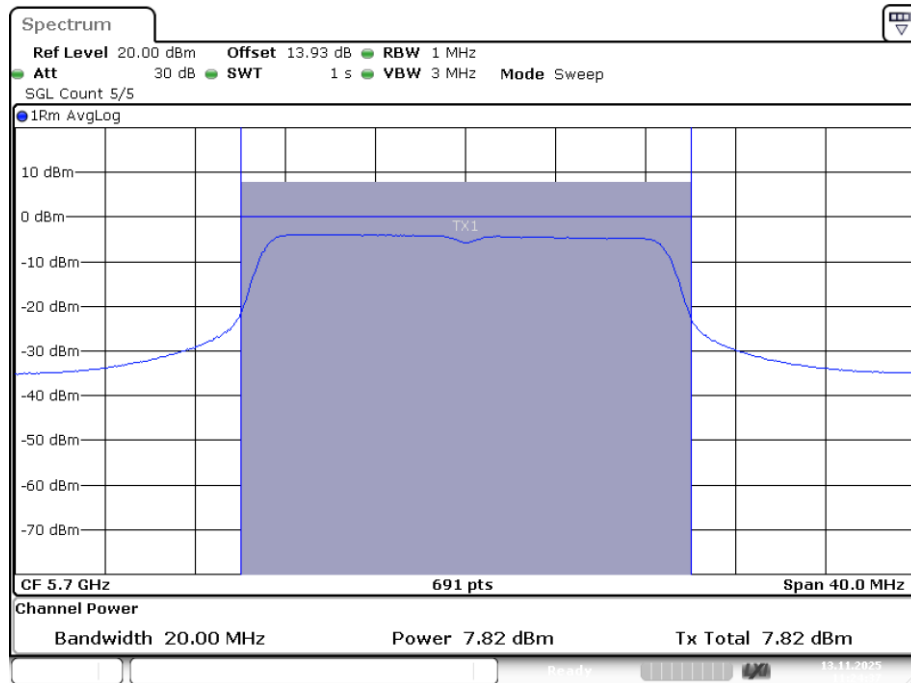


Date: 13.NOV.2025 11:24:37

Power NVNT ac40 5510MHz Ant1

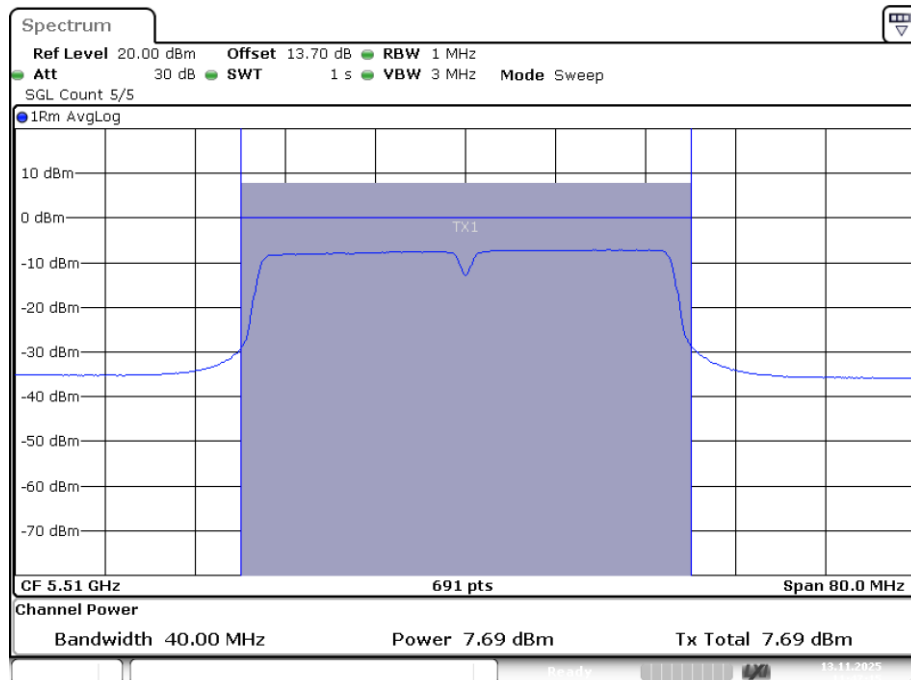


Date: 13.NOV.2025 11:47:15


Power NVNT ac40 5670MHz Ant1

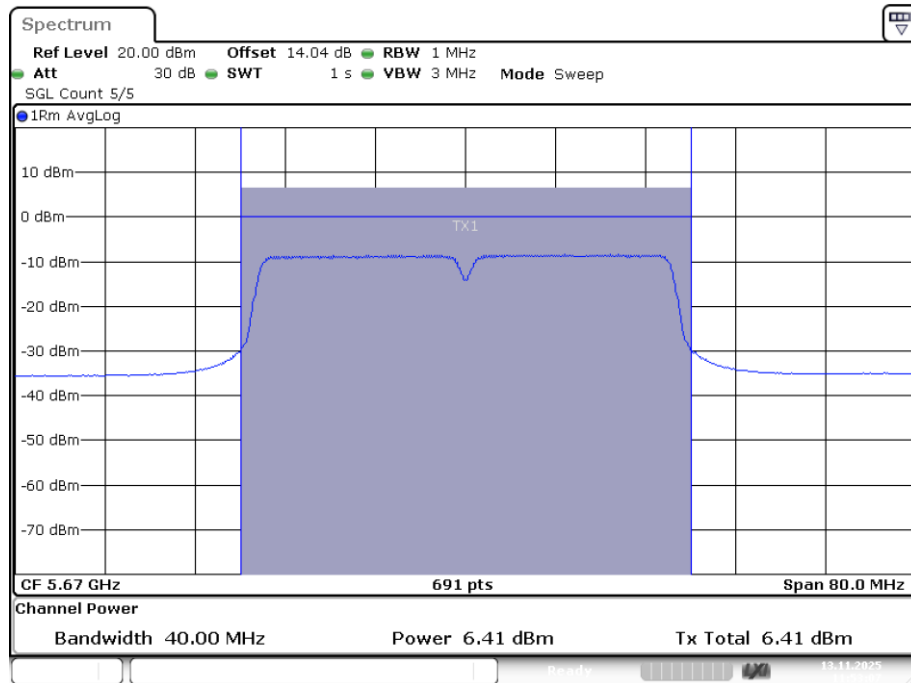

Power NVNT ax20 5500MHz Ant1

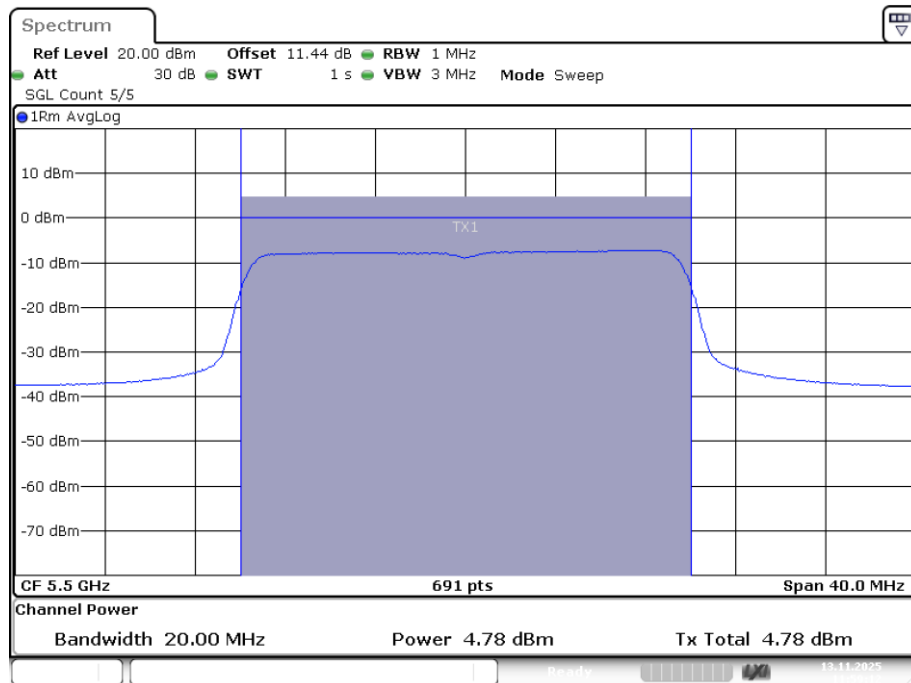


Power NVNT ax20 5580MHz Ant1

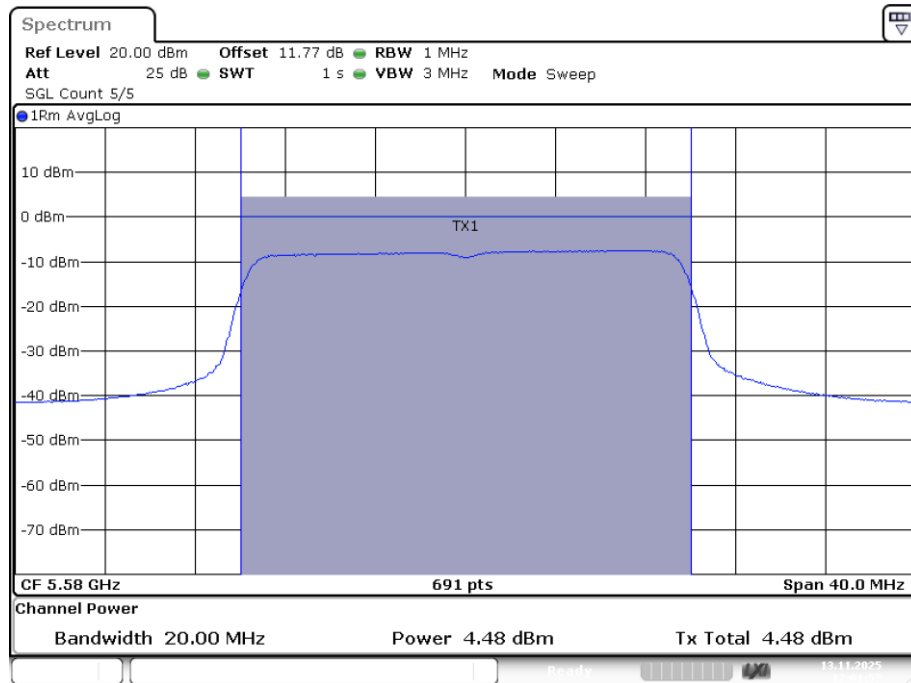


Date: 13.NOV.2025 12:01:57

Power NVNT ax20 5700MHz Ant1

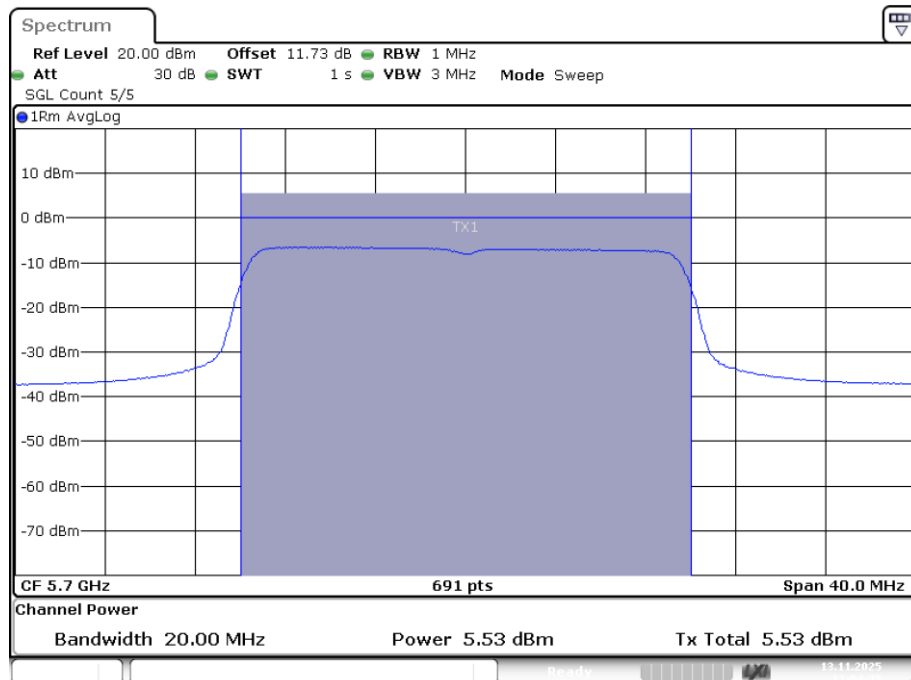


Date: 13.NOV.2025 12:04:35

Power NVNT ax40 5510MHz Ant1

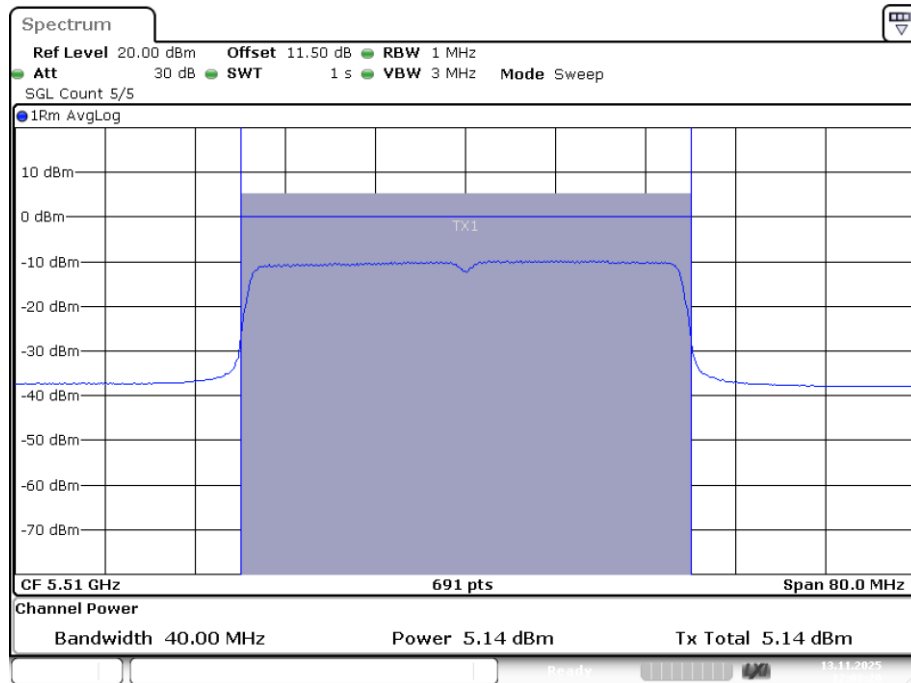


Date: 13.NOV.2025 12:08:21

Power NVNT ax40 5670MHz Ant1

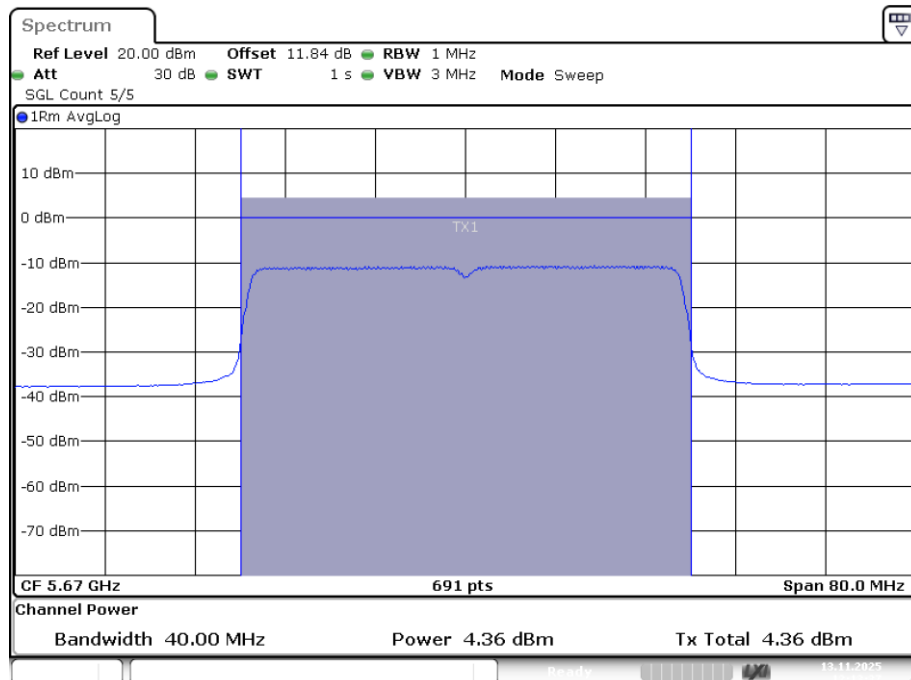


Date: 13.NOV.2025 12:13:37

Power NVNT n20 5500MHz Ant1

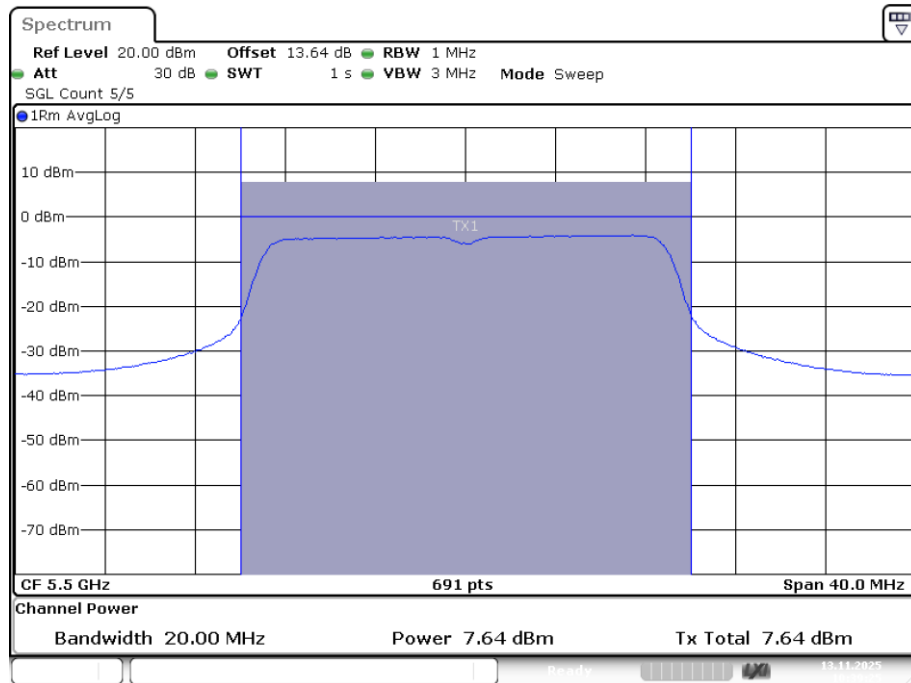


Date: 13.NOV.2025 10:39:24

Power NVNT n20 5580MHz Ant1

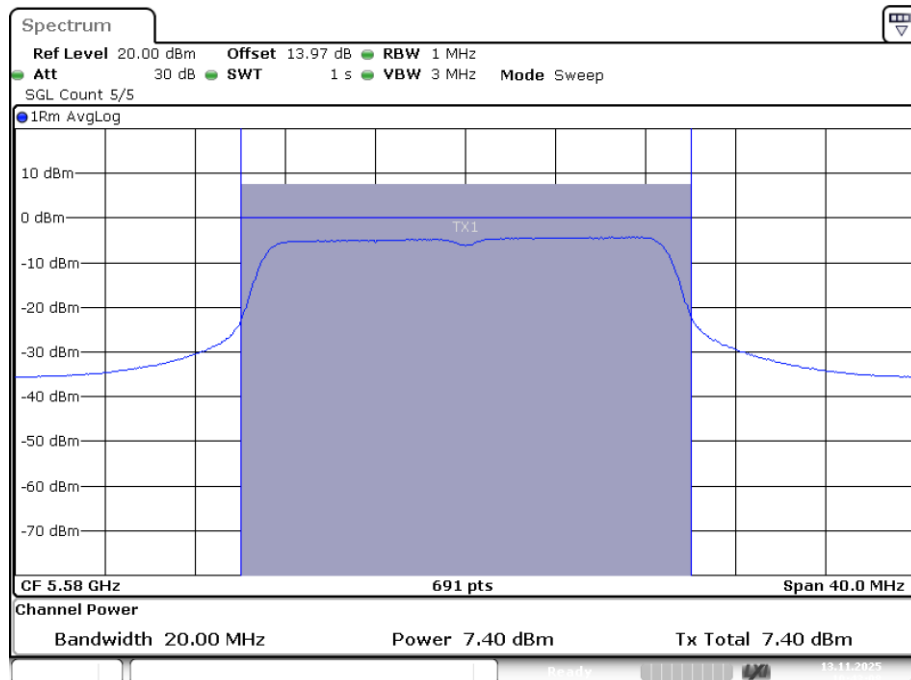


Date: 13.NOV.2025 10:43:07

Power NVNT n20 5700MHz Ant1

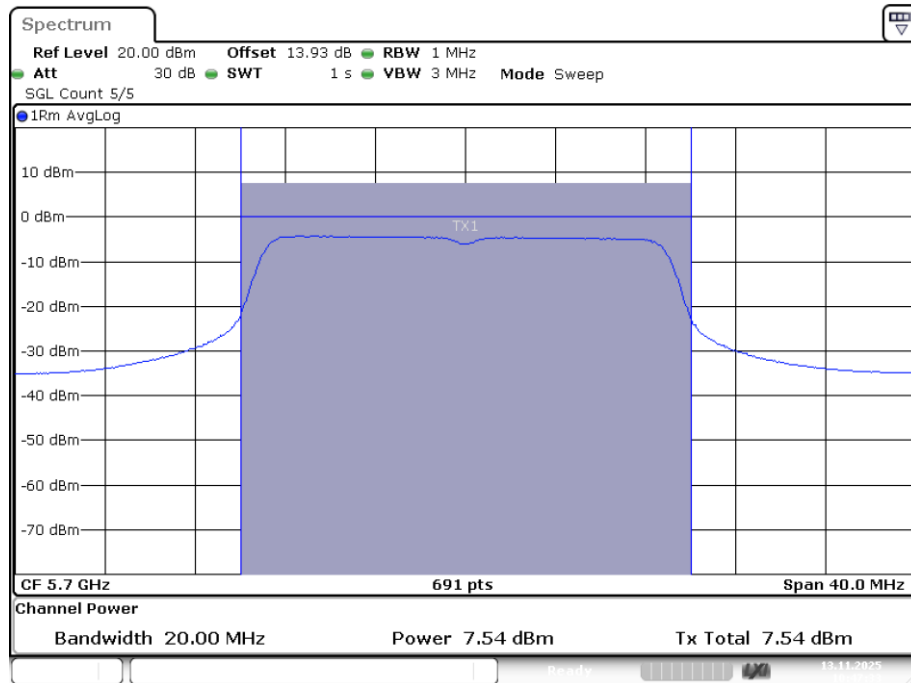


Date: 13.NOV.2025 10:47:33

Power NVNT n40 5510MHz Ant1

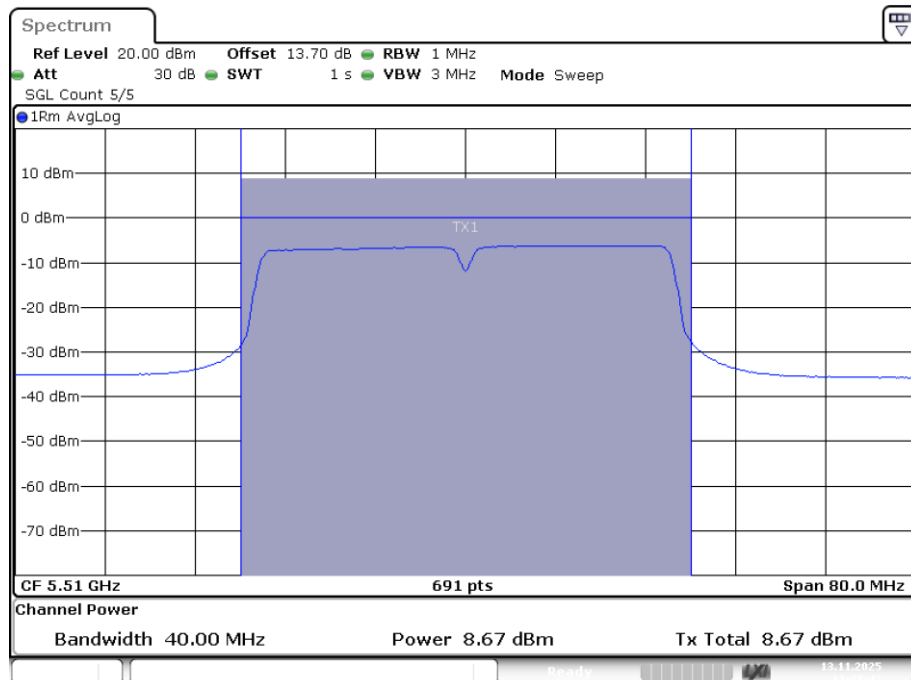

Date: 13.NOV.2025 11:37:42

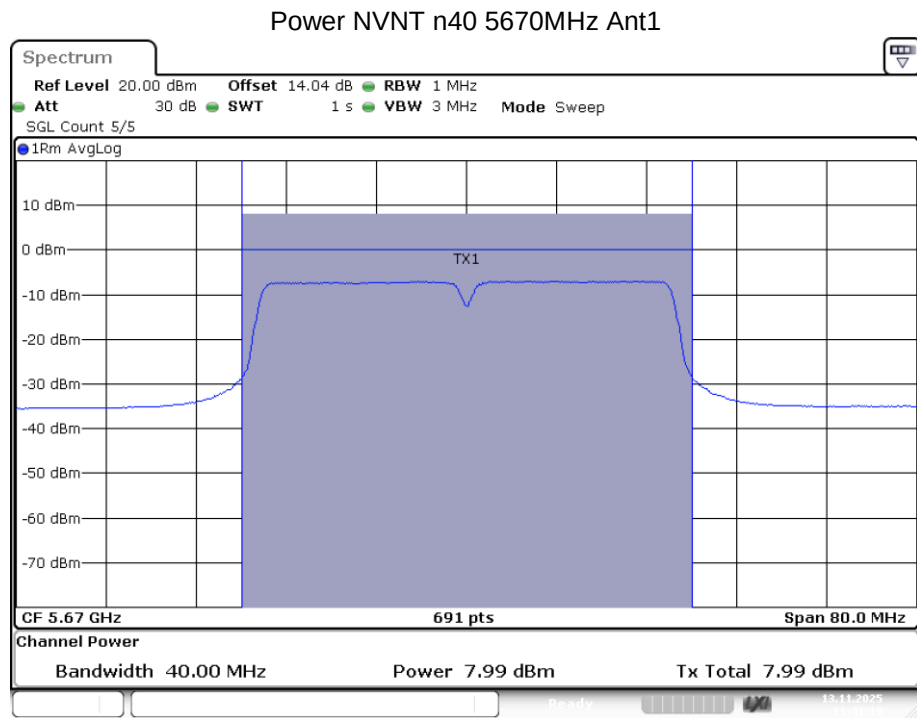


Note: offset=cable factor

Band 4 (5725 – 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Cycle Factor (dB)	Ant Gain (dBi)	EIRP (dBm)	FCC Limit (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	7.019	0.81	7.16	14.99	28.84	28.84	Pass
NVNT	a	5785	Ant1	7.429	0.29	7.16	14.88	28.84	28.84	Pass
NVNT	a	5825	Ant1	7.506	0.29	7.16	14.96	28.84	28.84	Pass
NVNT	ac20	5745	Ant1	6.038	0.66	7.16	13.86	28.84	28.84	Pass
NVNT	ac20	5785	Ant1	7.574	0.32	7.16	15.05	28.84	28.84	Pass
NVNT	ac20	5825	Ant1	7.011	0.32	7.16	14.49	28.84	28.84	Pass
NVNT	ac40	5755	Ant1	7.018	0.17	7.16	14.35	28.84	28.84	Pass
NVNT	ac40	5795	Ant1	7.234	0.58	7.16	14.97	28.84	28.84	Pass
NVNT	ax20	5745	Ant1	5.042	0.12	7.16	12.32	28.84	28.84	Pass
NVNT	ax20	5785	Ant1	5.278	0.39	7.16	12.83	28.84	28.84	Pass
NVNT	ax20	5825	Ant1	5.122	0.39	7.16	12.67	28.84	28.84	Pass
NVNT	ax40	5755	Ant1	4.796	0.21	7.16	12.17	28.84	28.84	Pass
NVNT	ax40	5795	Ant1	4.505	0.71	7.16	12.38	28.84	28.84	Pass
NVNT	n20	5745	Ant1	7.617	0.31	7.16	15.09	28.84	28.84	Pass
NVNT	n20	5785	Ant1	7.603	0.31	7.16	15.07	28.84	28.84	Pass
NVNT	n20	5825	Ant1	7.02	0.31	7.16	14.49	28.84	28.84	Pass
NVNT	n40	5755	Ant1	8.415	0.18	7.16	15.76	28.84	28.84	Pass
NVNT	n40	5795	Ant1	7.94	0.59	7.16	15.69	28.84	28.84	Pass


Note: 1. Directional gain=7.16dBi, so the Conducted Power Limit need to reduce 1.16.

Power NVNT a 5745MHz Ant1

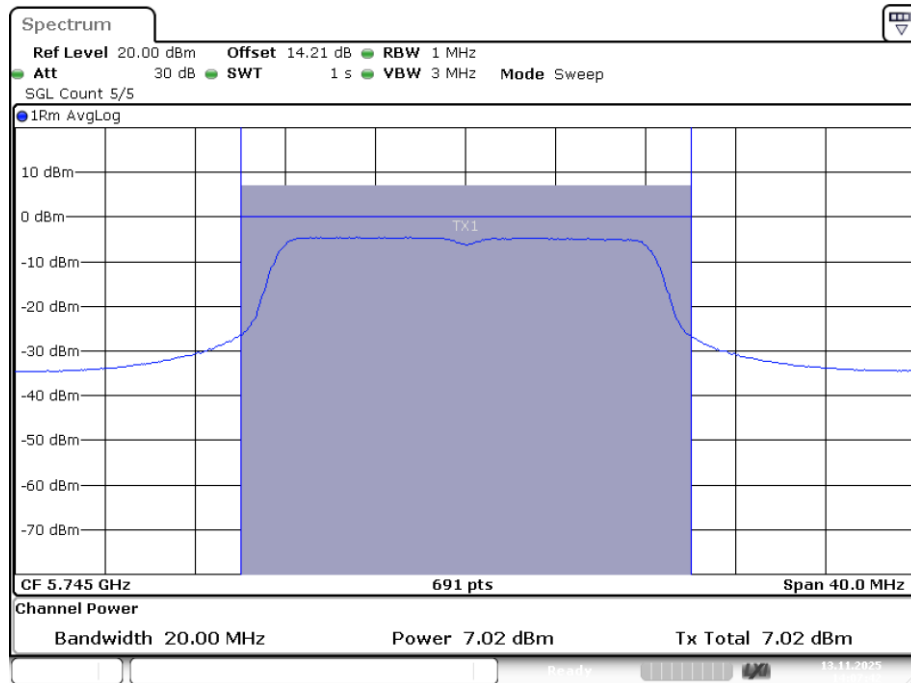


Date: 13.NOV.2025 14:07:42

Power NVNT a 5785MHz Ant1

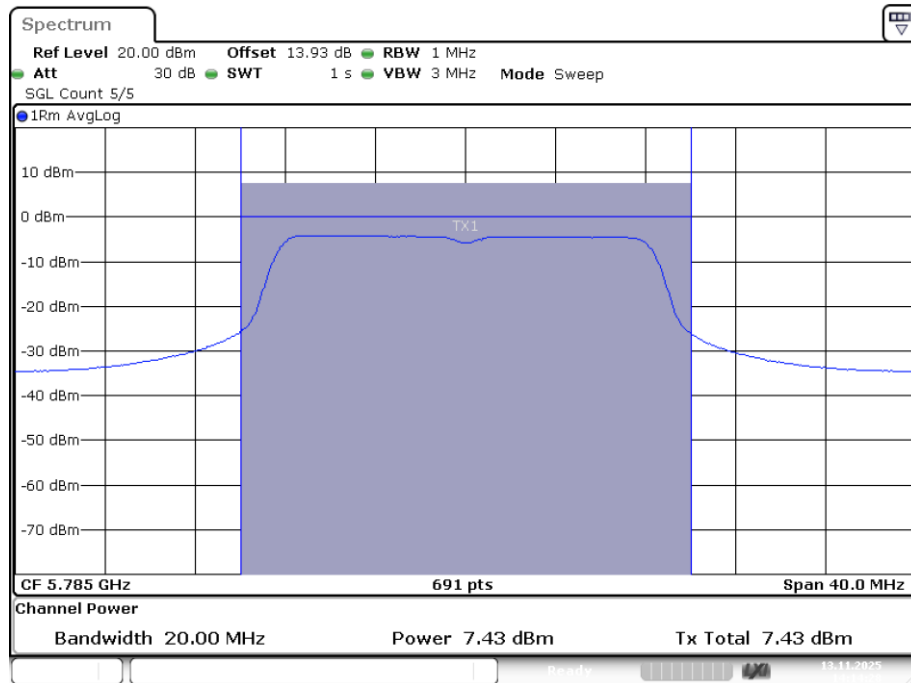


Date: 13.NOV.2025 14:14:27

Power NVNT a 5825MHz Ant1

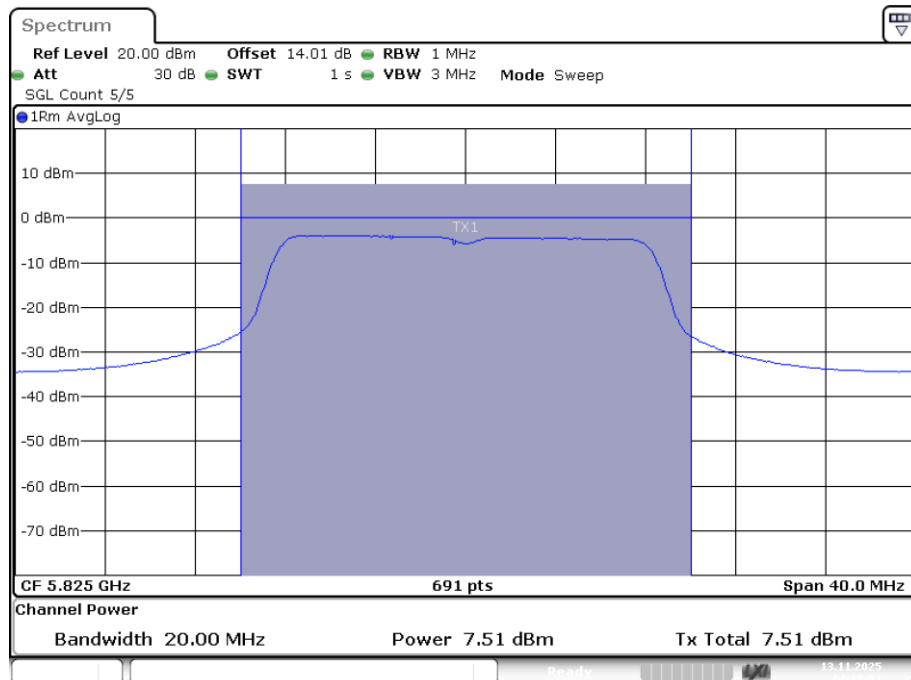


Date: 13.NOV.2025 14:17:03

Power NVNT ac20 5745MHz Ant1

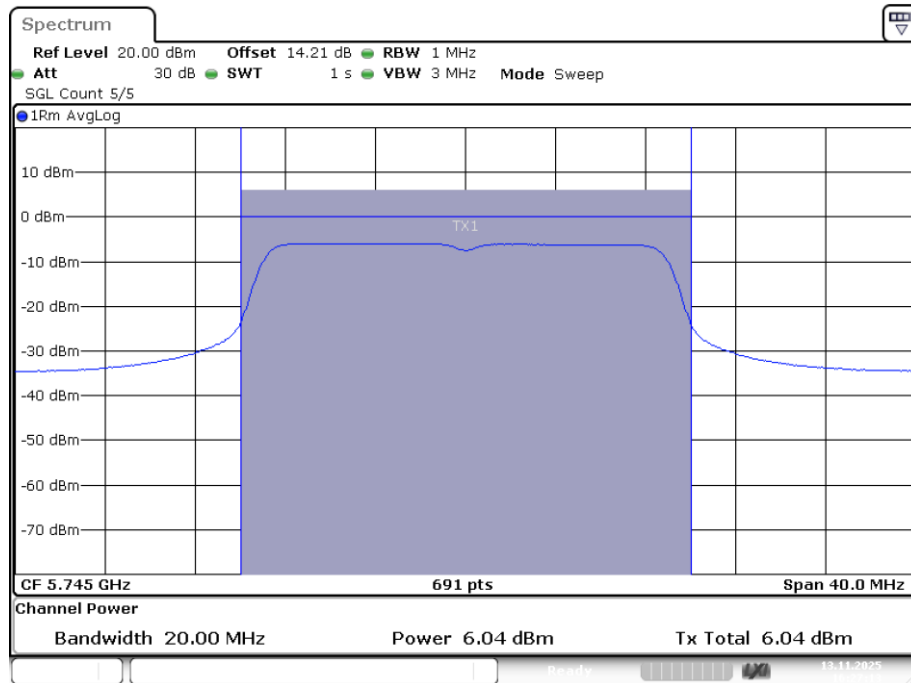


Date: 13.NOV.2025 16:27:13

Power NVNT ac20 5785MHz Ant1

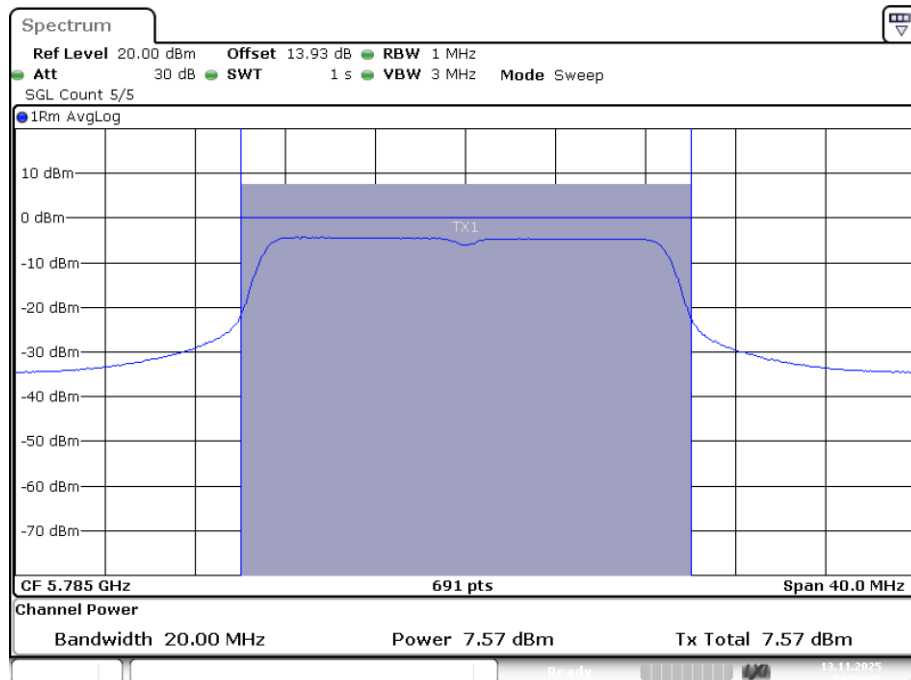


Date: 13.NOV.2025 14:54:45

Power NVNT ac20 5825MHz Ant1

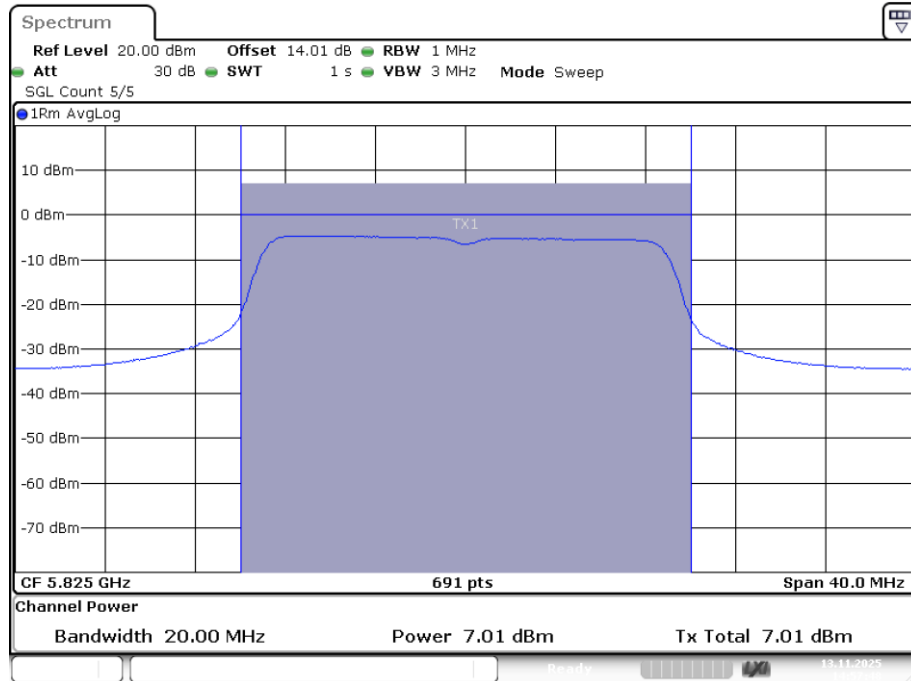


Date: 13.NOV.2025 14:57:47

Power NVNT ac40 5755MHz Ant1

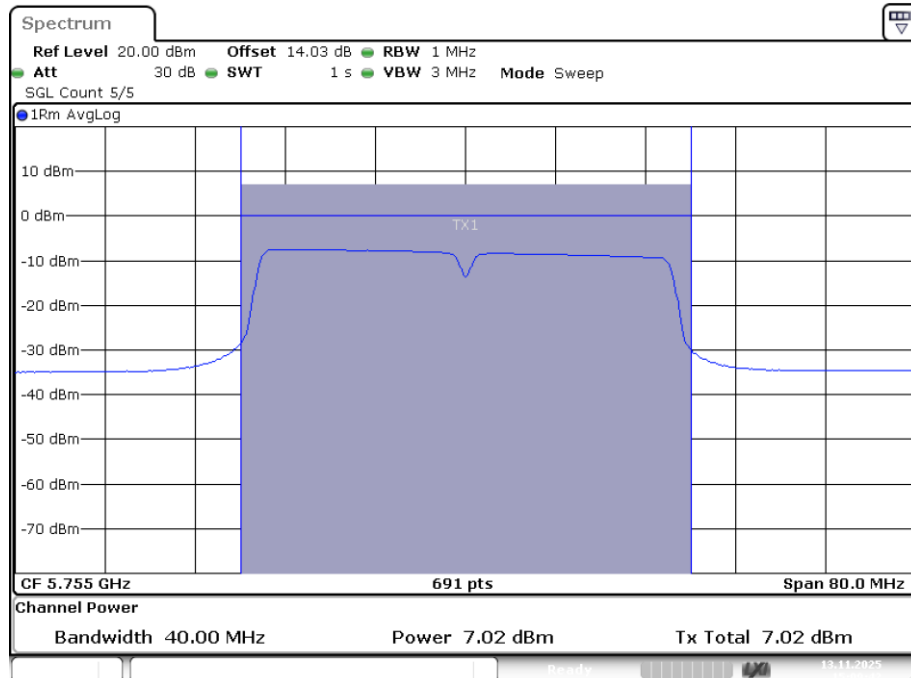


Date: 13.NOV.2025 15:09:42

Power NVNT ac40 5795MHz Ant1

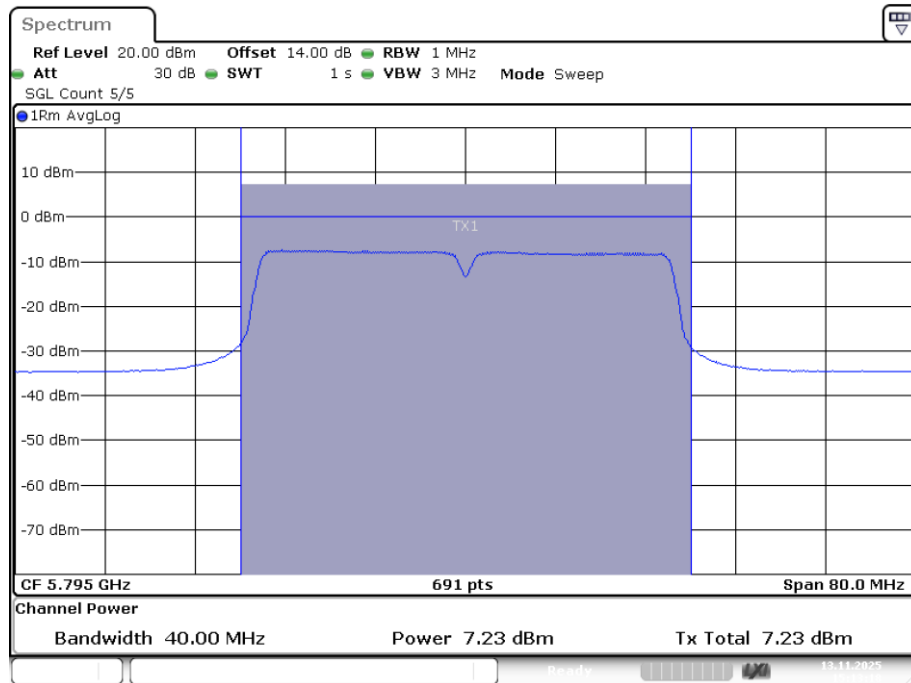


Date: 13.NOV.2025 15:13:18

Power NVNT ax20 5745MHz Ant1

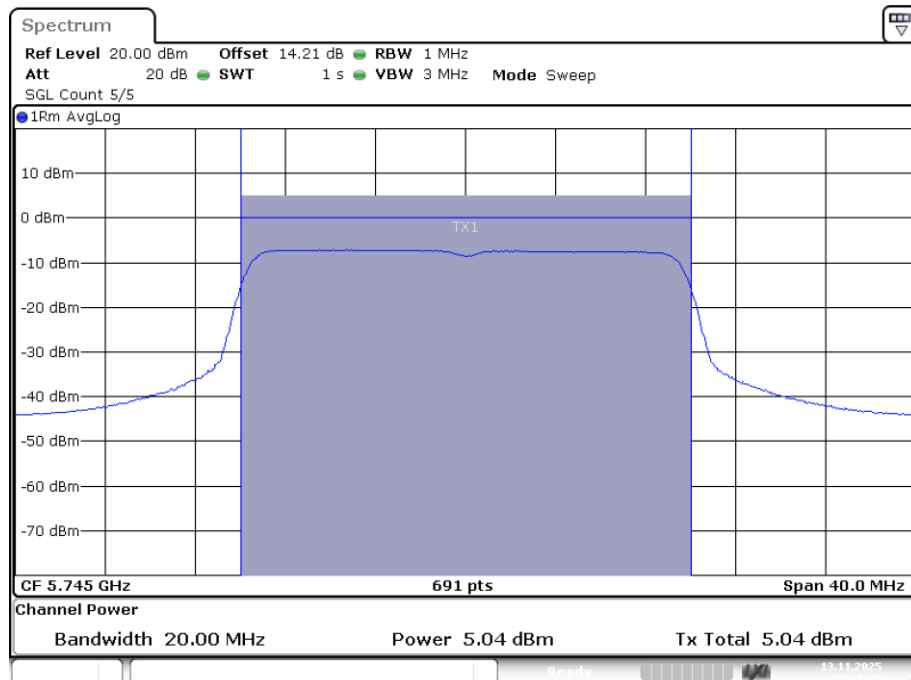


Date: 13.NOV.2025 15:17:39

Power NVNT ax20 5785MHz Ant1

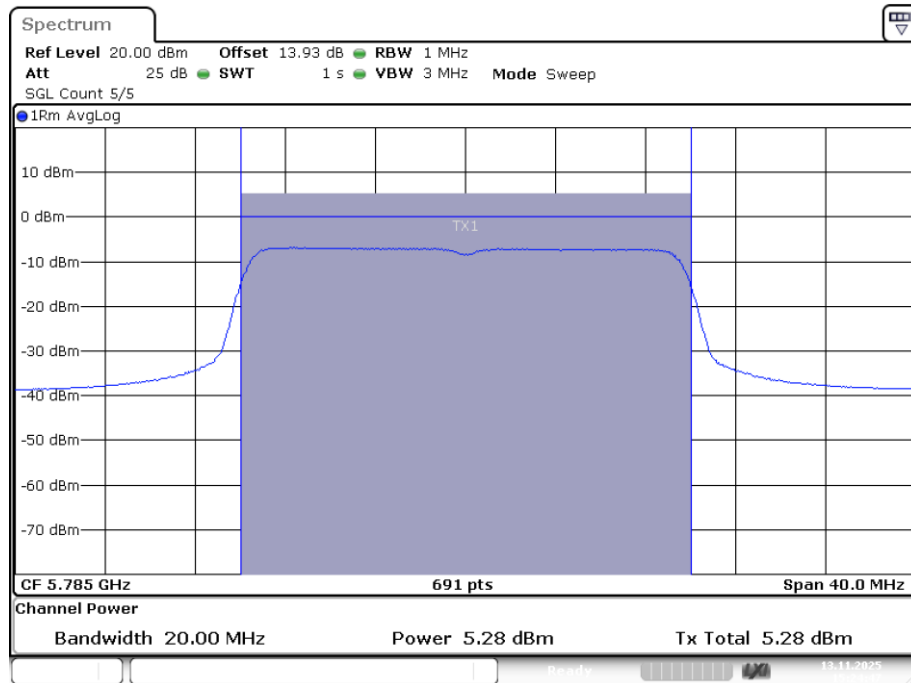


Date: 13.NOV.2025 15:24:47

Power NVNT ax20 5825MHz Ant1

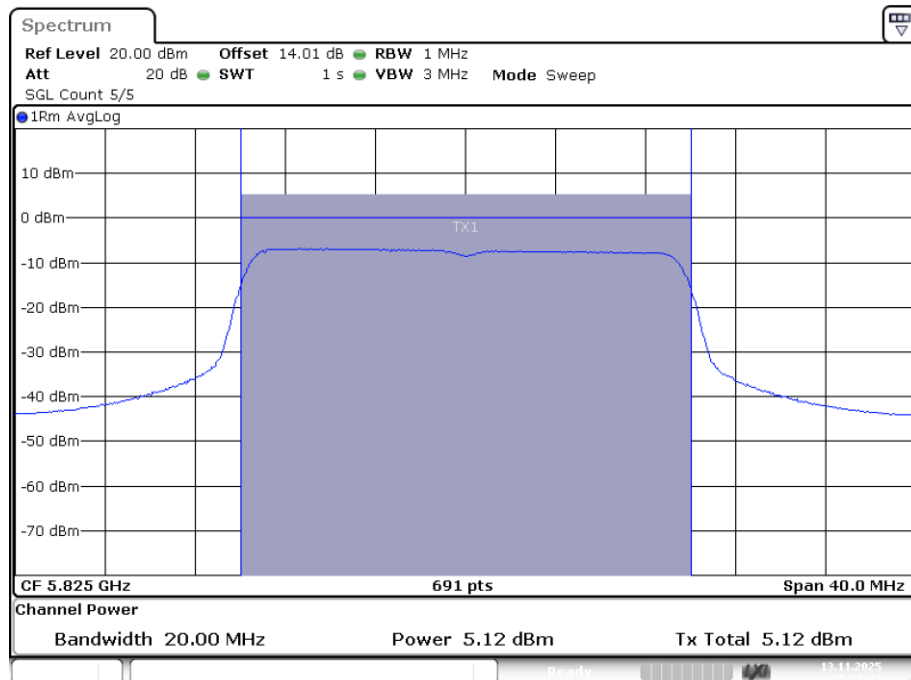


Date: 13.NOV.2025 15:28:02

Power NVNT ax40 5755MHz Ant1

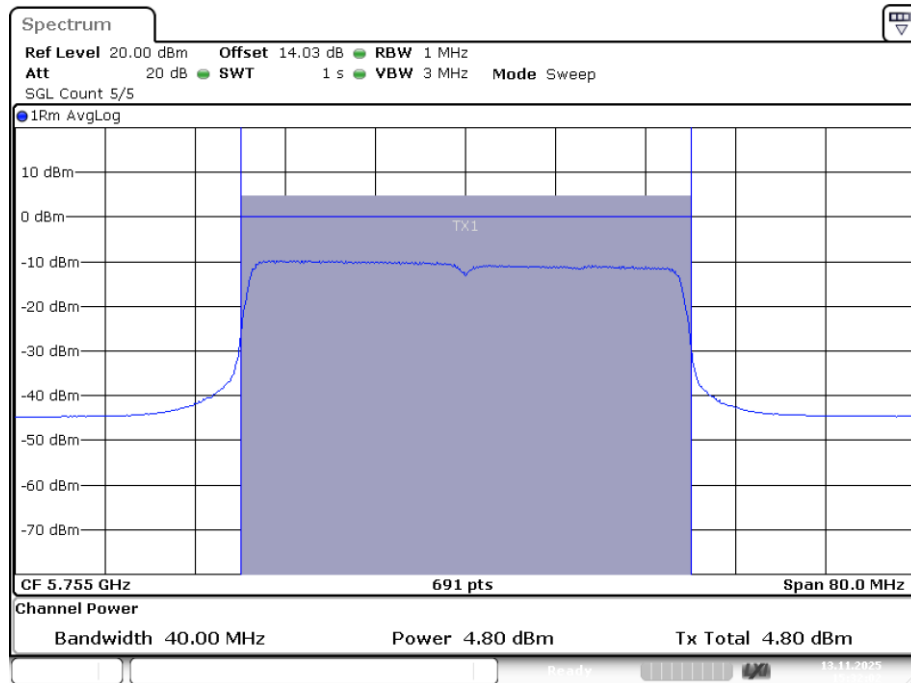


Date: 13.NOV.2025 15:32:02

Power NVNT ax40 5795MHz Ant1

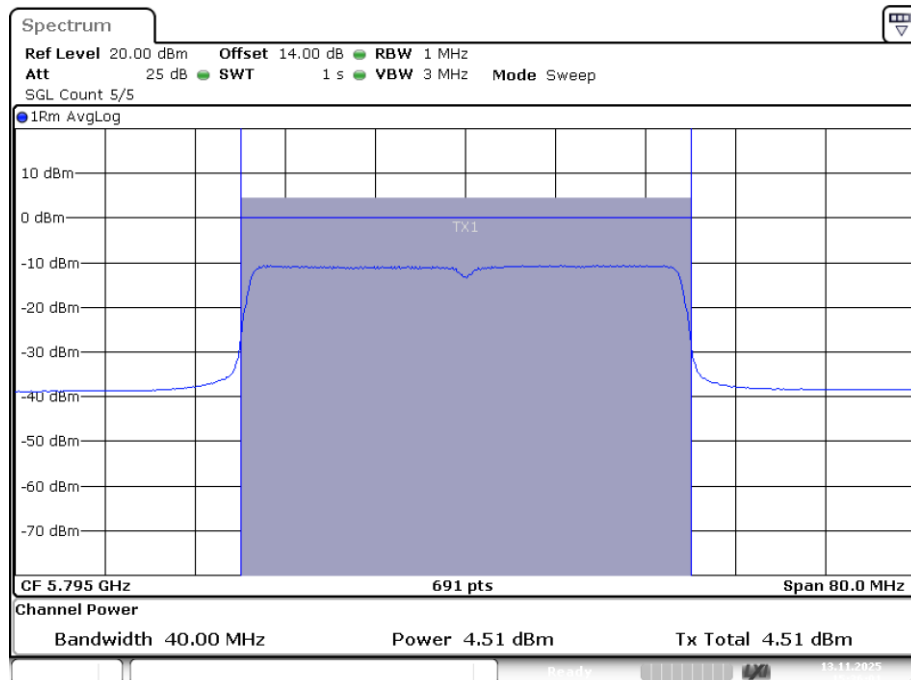


Date: 13.NOV.2025 15:36:01

Power NVNT n20 5745MHz Ant1

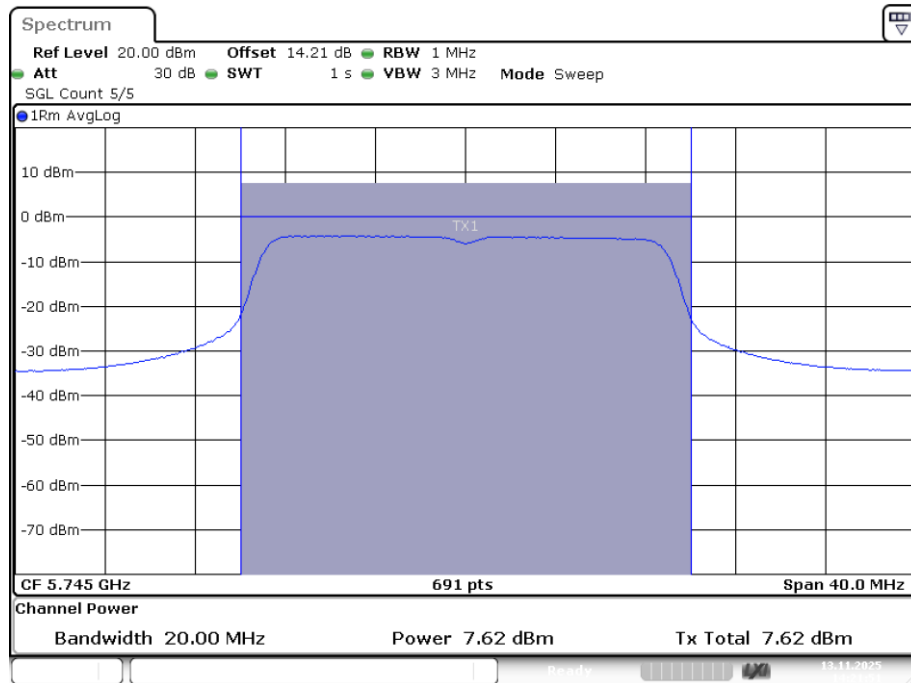


Date: 13.NOV.2025 14:21:50

Power NVNT n20 5785MHz Ant1

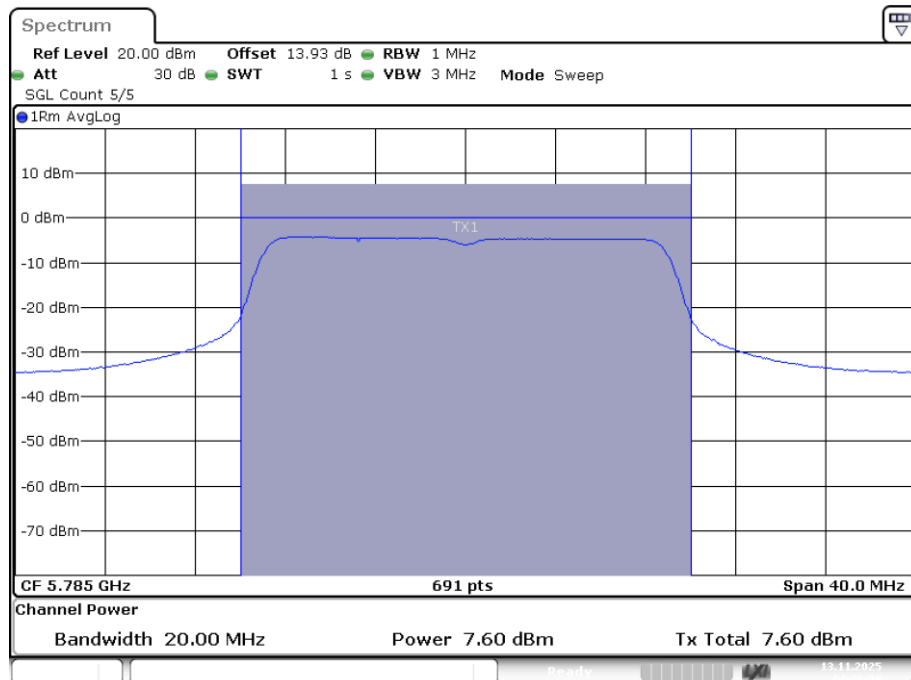


Date: 13.NOV.2025 14:25:59

Power NVNT n20 5825MHz Ant1

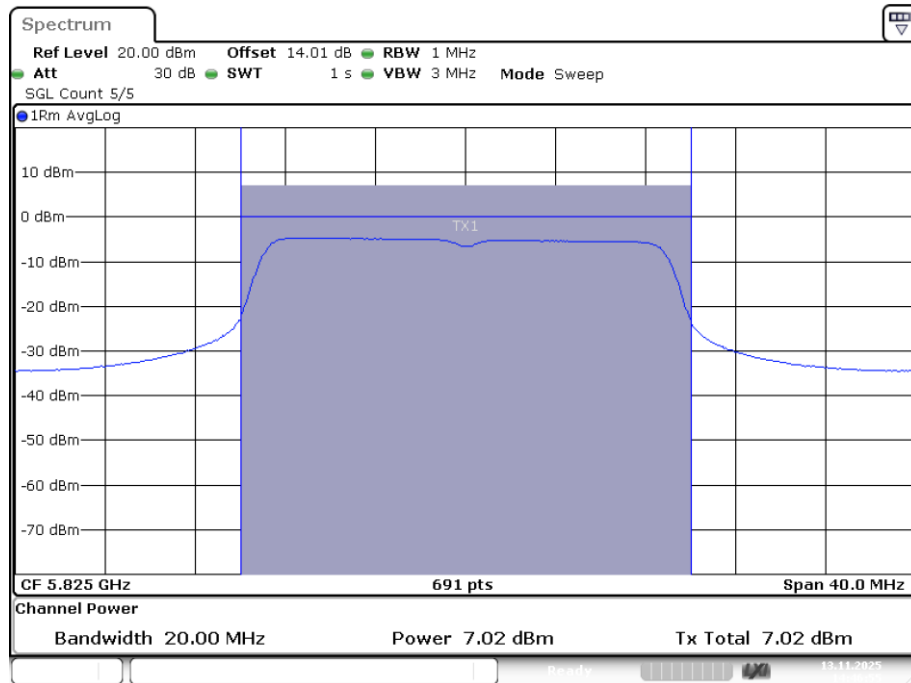


Date: 13.NOV.2025 14:46:54

Power NVNT n40 5755MHz Ant1

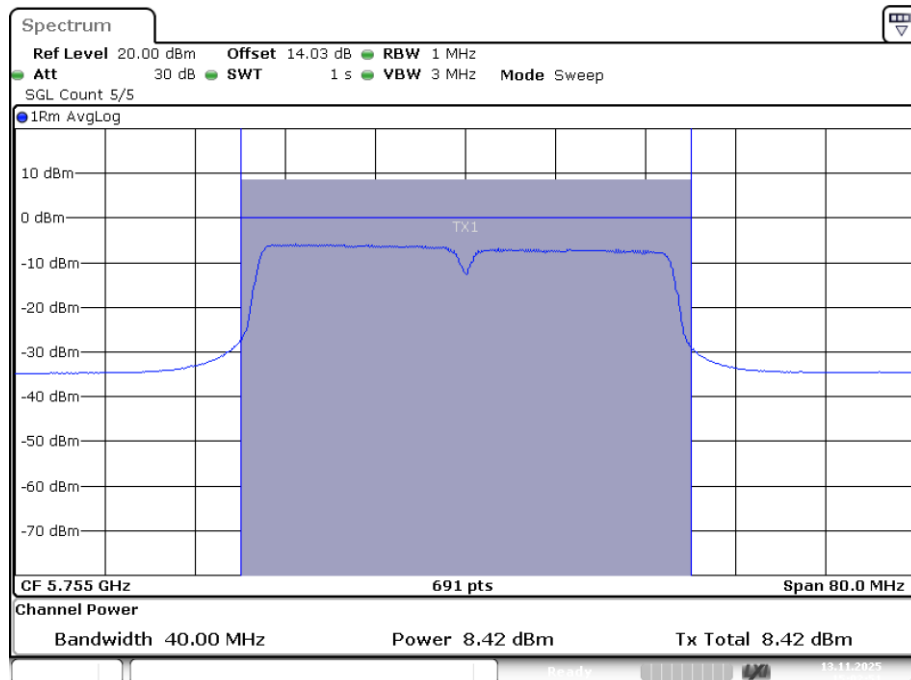


Date: 13.NOV.2025 15:02:51

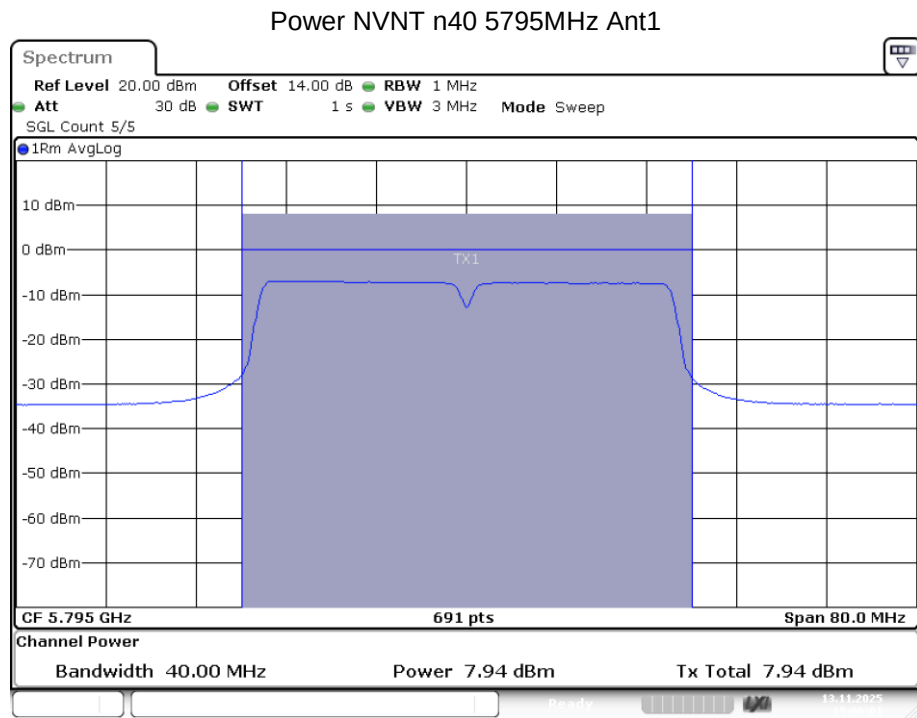

Date: 13.NOV.2025 15:06:02

Note: offset=cable factor

4.5 Power Spectral Density

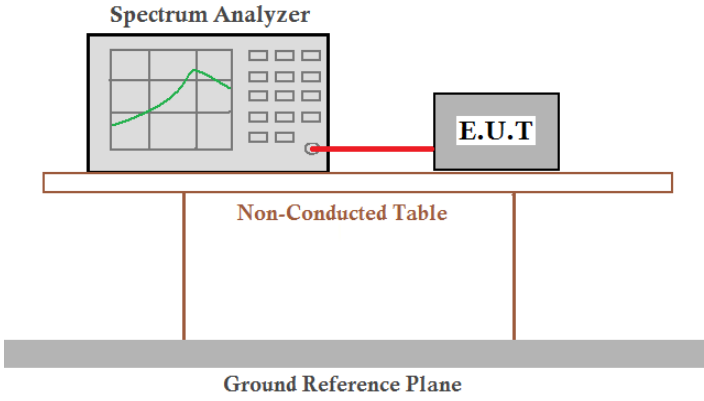
Test Requirement:	FCC Part15 E Section 15.407, RSS-247 Issue 3
Test Method:	ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Limit:	FCC: 1. $\leq 11.00\text{dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz 2. $\leq 30.00\text{dBm/500KHz}$ for 5725MHz-5850MHz IC: 1. For the 5.15-5.25 GHz, The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. 2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. 3. For 5725MHz-5850MHz, the output power spectral density shall not exceed 30 dBm in any 500 kHz band.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	Refer to ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Cycle Factor (dB)	Ant Gain (dBi)	EIRP PSD (dBm)	FCC Limit (dBm)	IC Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-2.725	0.27	7.16	4.71	9.84	8.84	Pass
NVNT	a	5200	Ant1	-2.954	0.08	7.16	4.29	9.84	8.84	Pass
NVNT	a	5240	Ant1	-2.21	0.62	7.16	5.57	9.84	8.84	Pass
NVNT	ac20	5180	Ant1	-3.975	0.09	7.16	3.28	9.84	8.84	Pass
NVNT	ac20	5200	Ant1	-4.314	0.31	7.16	3.16	9.84	8.84	Pass
NVNT	ac20	5240	Ant1	-3.568	0.09	7.16	3.68	9.84	8.84	Pass
NVNT	ac40	5190	Ant1	-7.116	0.19	7.16	0.23	9.84	8.84	Pass
NVNT	ac40	5230	Ant1	-6.947	0.17	7.16	0.38	9.84	8.84	Pass
NVNT	ax20	5180	Ant1	-6.126	0.12	7.16	1.15	9.84	8.84	Pass
NVNT	ax20	5200	Ant1	-6.383	0.16	7.16	0.94	9.84	8.84	Pass
NVNT	ax20	5240	Ant1	-7.112	0.11	7.16	0.16	9.84	8.84	Pass
NVNT	ax40	5190	Ant1	-9.397	0.24	7.16	-2.00	9.84	8.84	Pass
NVNT	ax40	5230	Ant1	-9.062	0.21	7.16	-1.69	9.84	8.84	Pass
NVNT	n20	5180	Ant1	-2.69	0.01	7.16	4.48	9.84	8.84	Pass
NVNT	n20	5200	Ant1	-3.213	0.04	7.16	3.99	9.84	8.84	Pass
NVNT	n20	5240	Ant1	-2.397	0.01	7.16	4.77	9.84	8.84	Pass
NVNT	n40	5190	Ant1	-6.626	0.01	7.16	0.54	9.84	8.84	Pass
NVNT	n40	5230	Ant1	-5.858	0	7.16	1.30	9.84	8.84	Pass

Note: 1. Directional gain=7.16dBi, so the Conducted Power Limit need to reduce 1.16.

PSD NVNT a 5180MHz Ant1

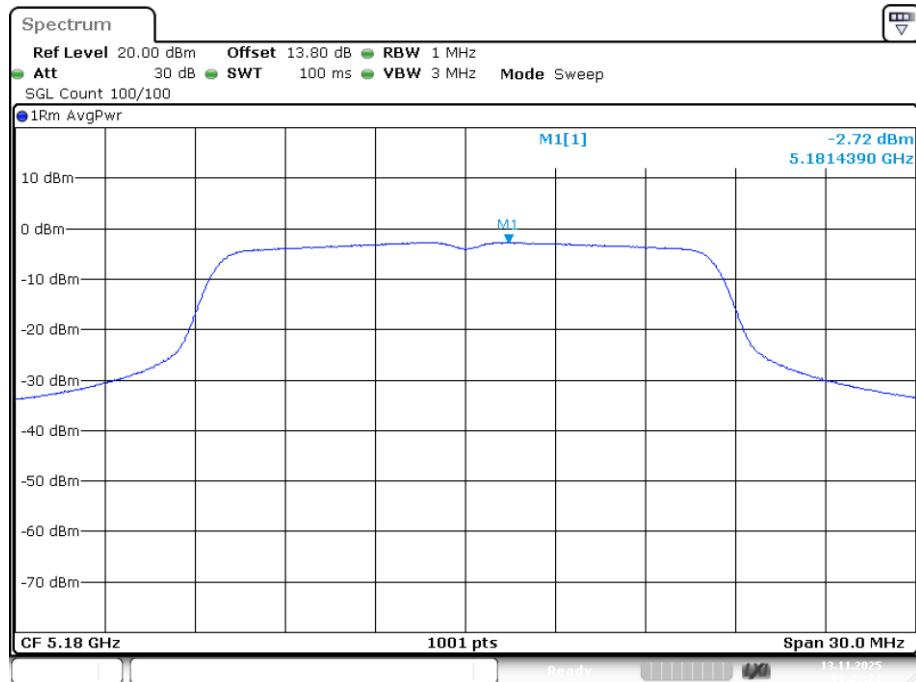


PSD NVNT a 5200MHz Ant1

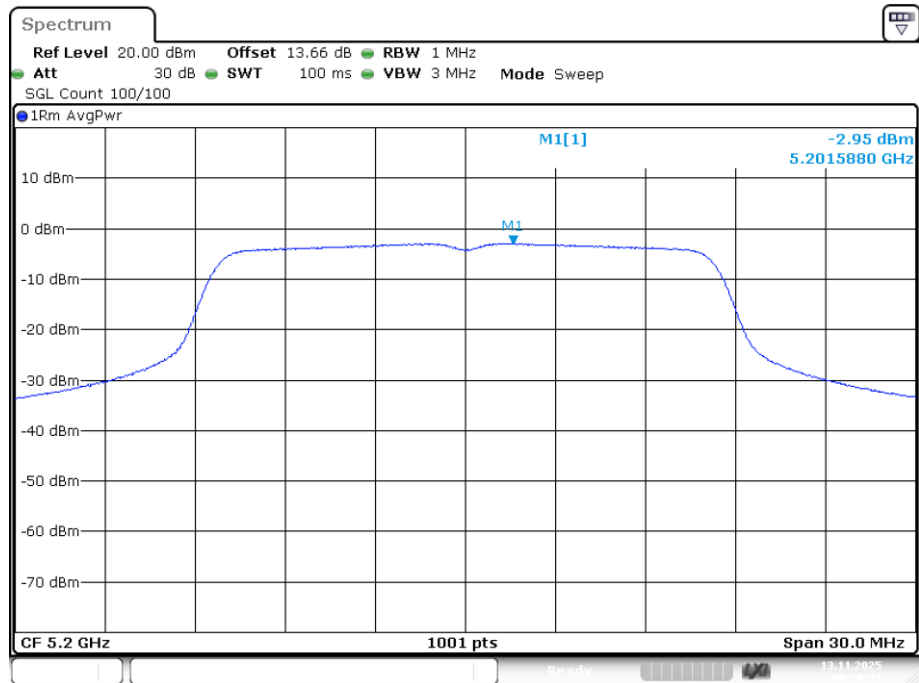


Date: 13.NOV.2025 09:26:53

PSD NVNT a 5240MHz Ant1

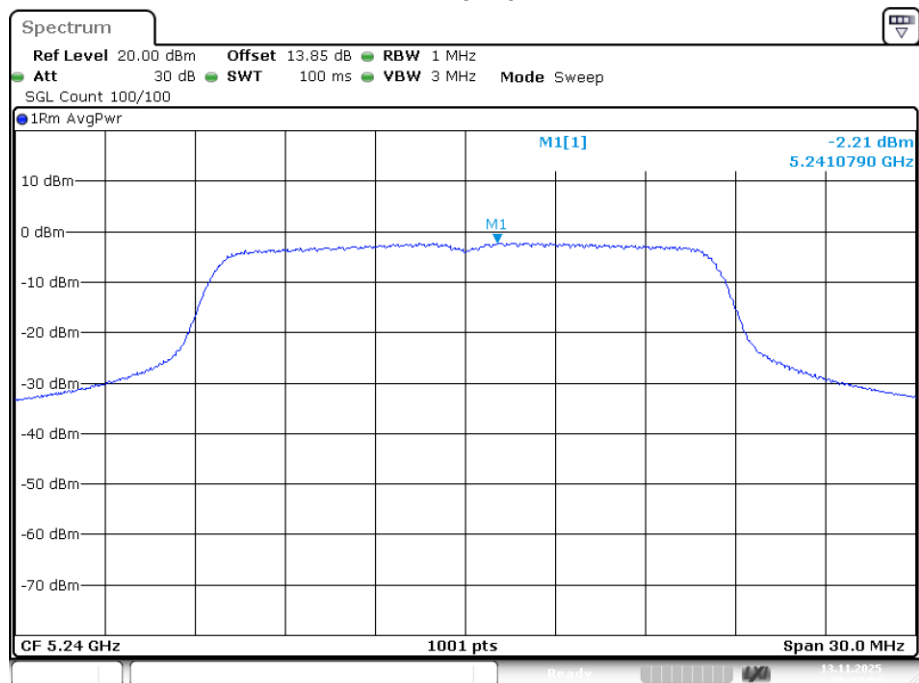


Date: 13.NOV.2025 09:23:54

PSD NVNT ac20 5180MHz Ant1

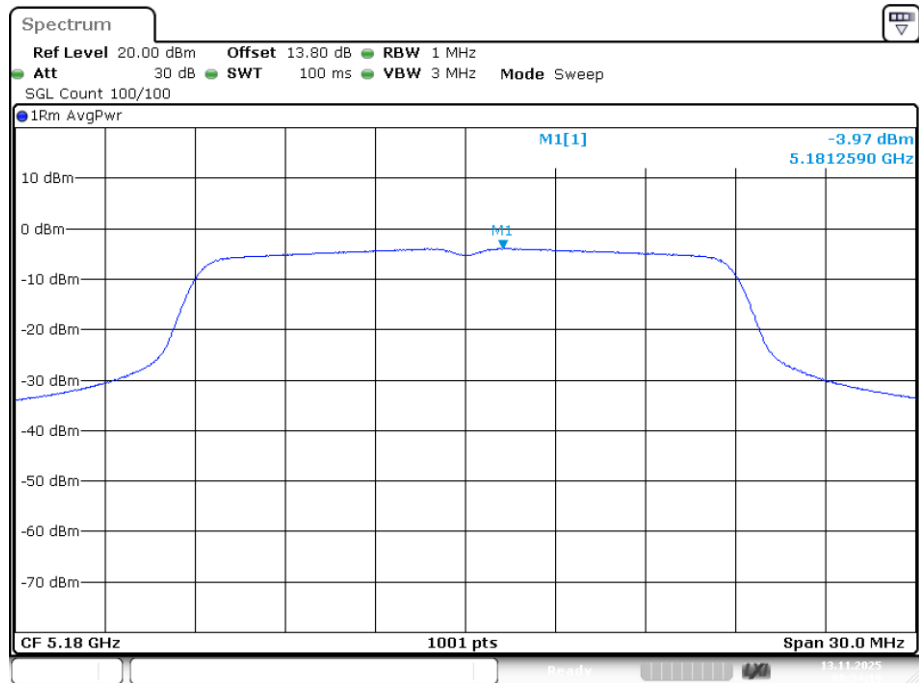


Date: 13.NOV.2025 09:34:18

PSD NVNT ac20 5200MHz Ant1

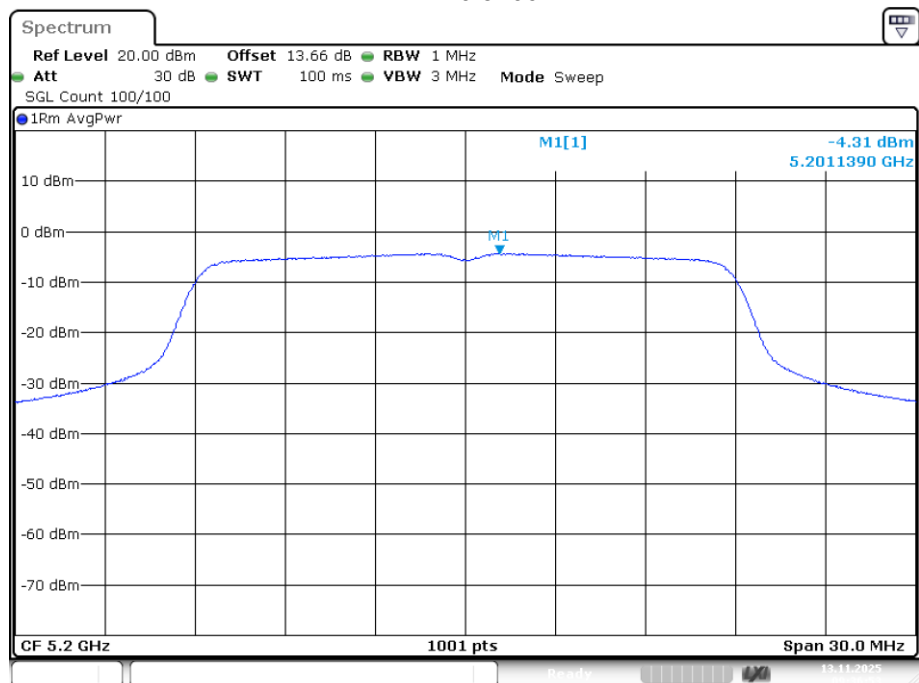


Date: 13.NOV.2025 09:36:52

PSD NVNT ac20 5240MHz Ant1

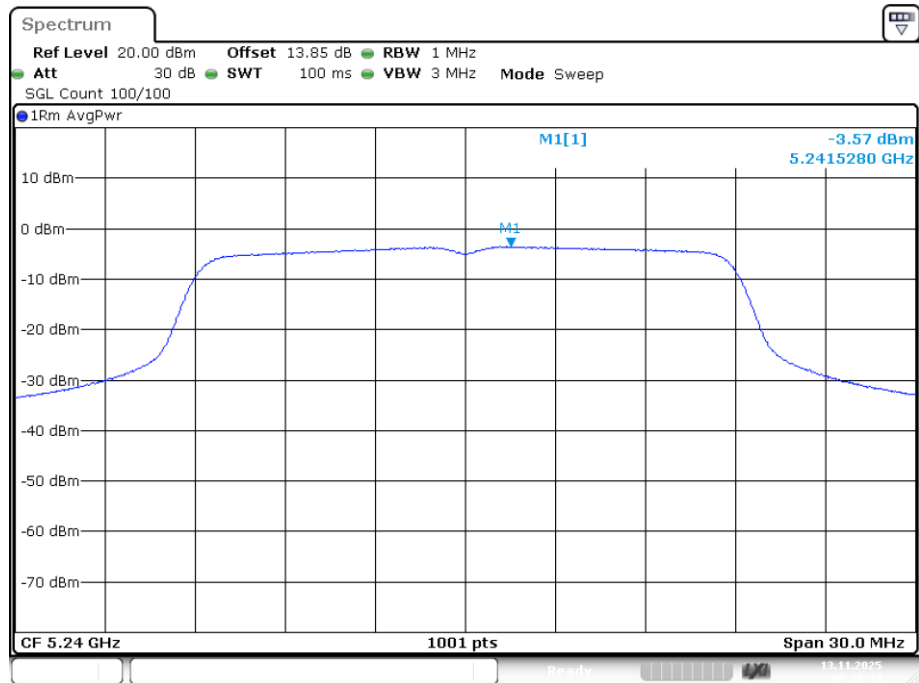


Date: 13.NOV.2025 09:39:24

PSD NVNT ac40 5190MHz Ant1

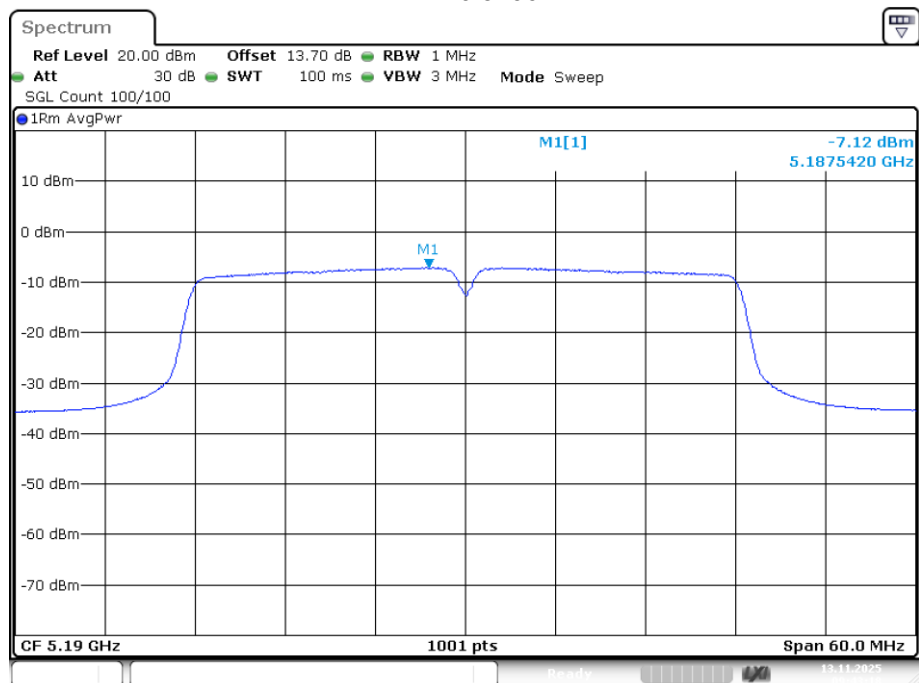


Date: 13.NOV.2025 09:43:18

PSD NVNT ac40 5230MHz Ant1

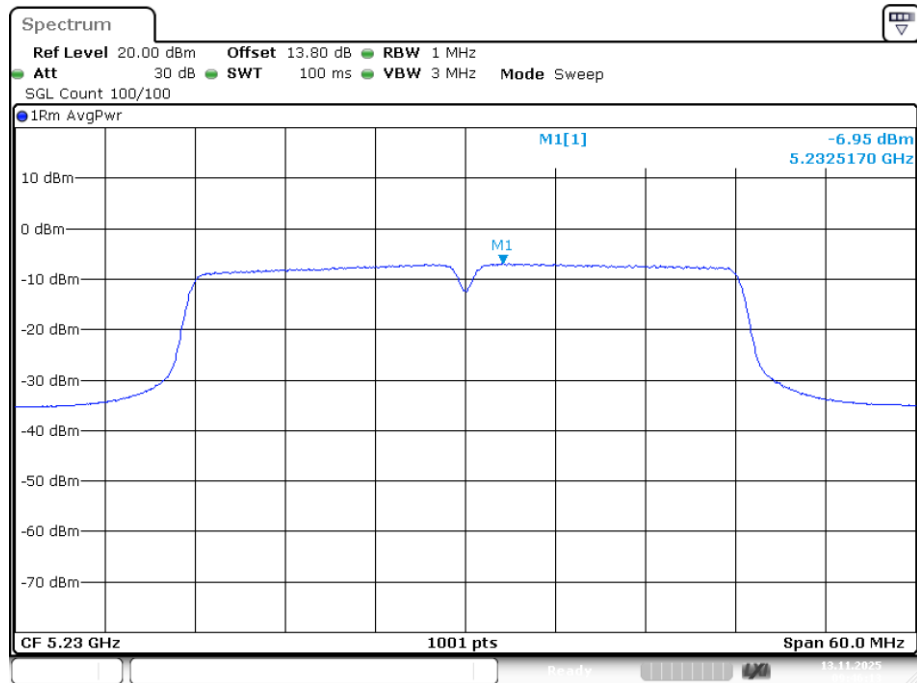


Date: 13.NOV.2025 09:46:13

PSD NVNT ax20 5180MHz Ant1

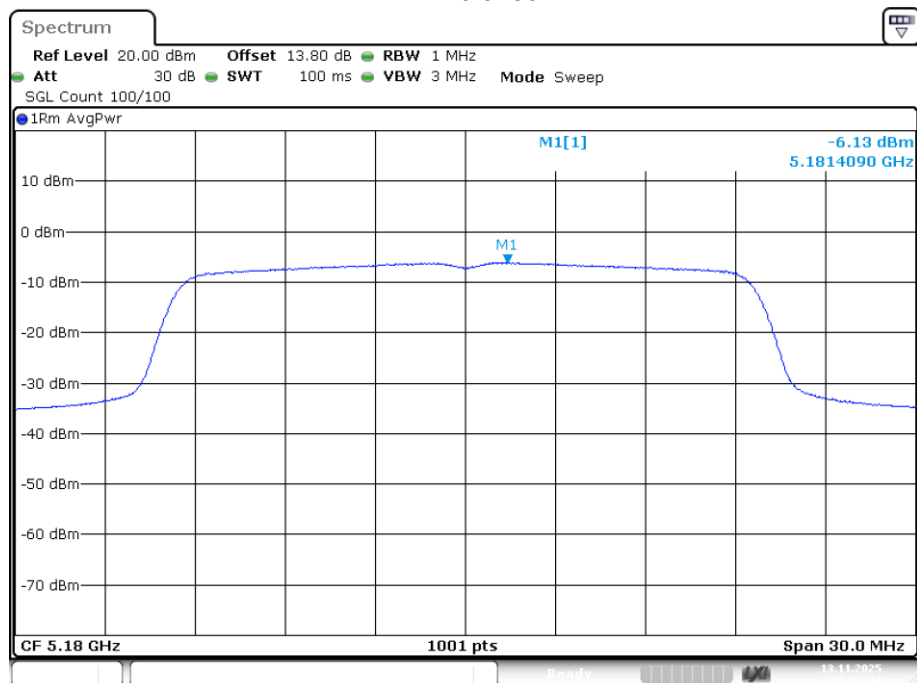


Date: 13.NOV.2025 09:51:46

PSD NVNT ax20 5200MHz Ant1

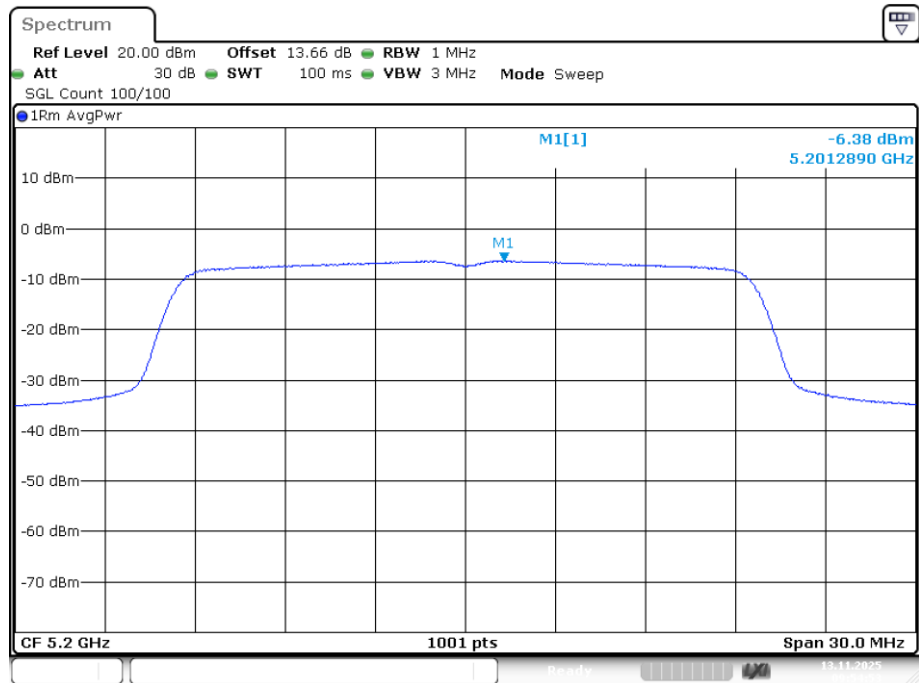


Date: 13.NOV.2025 09:54:52

PSD NVNT ax20 5240MHz Ant1

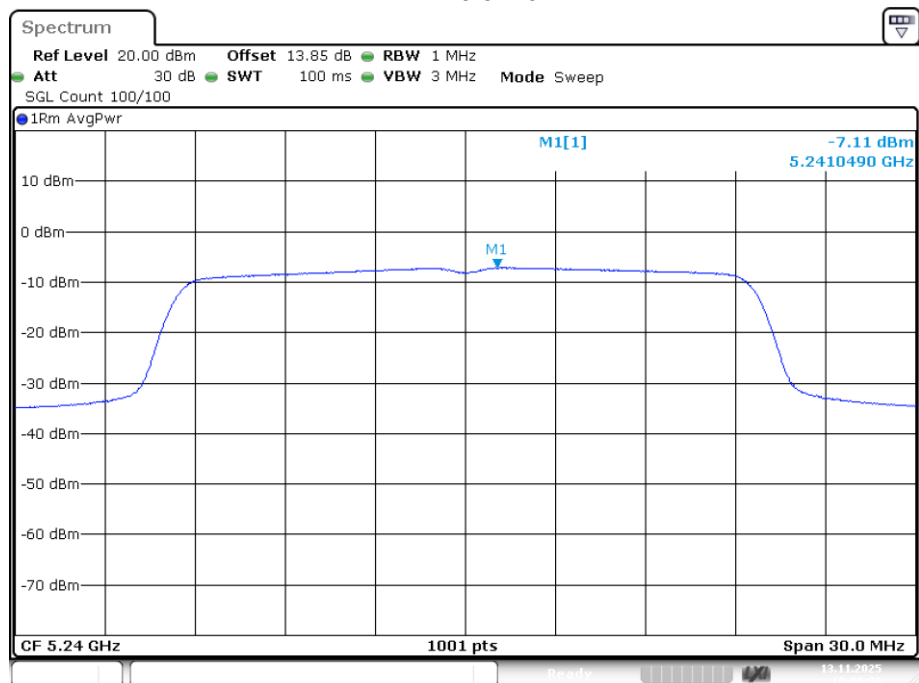


Date: 13.NOV.2025 10:00:00

PSD NVNT ax40 5190MHz Ant1

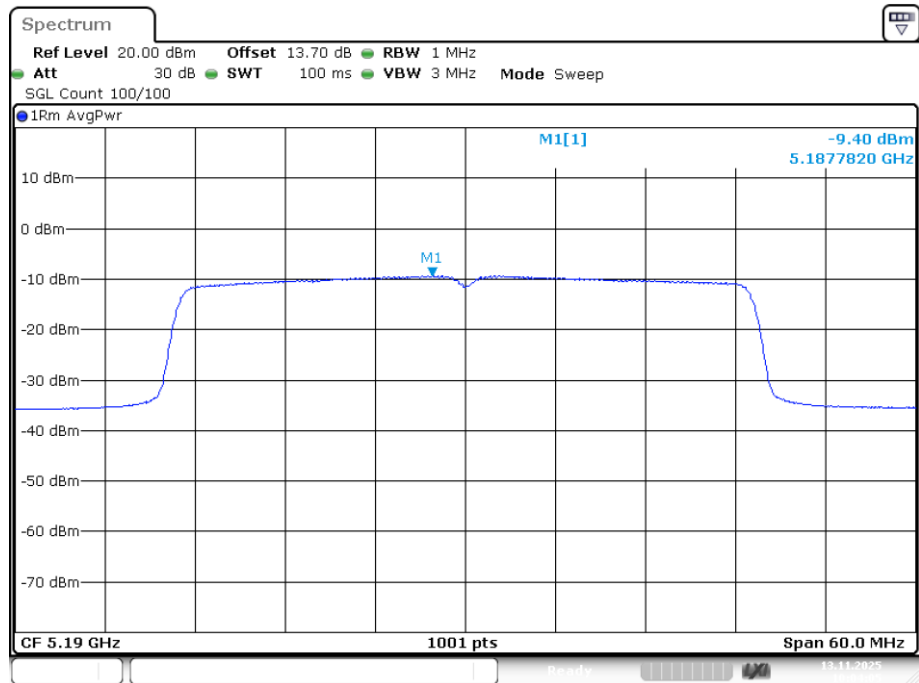


Date: 13.NOV.2025 10:04:05

PSD NVNT ax40 5230MHz Ant1

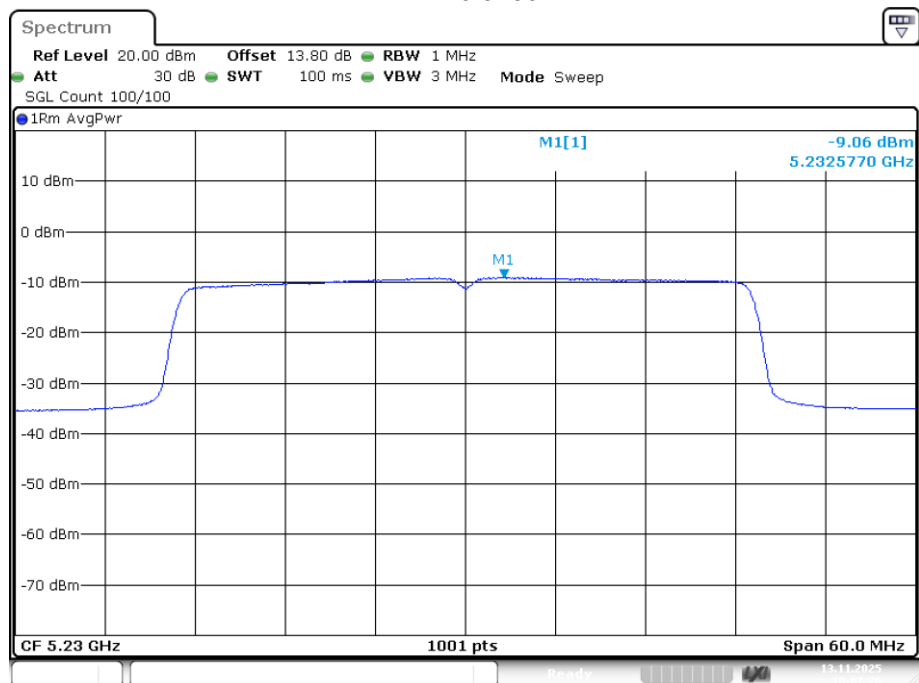


Date: 13.NOV.2025 10:07:26

PSD NVNT n20 5180MHz Ant1

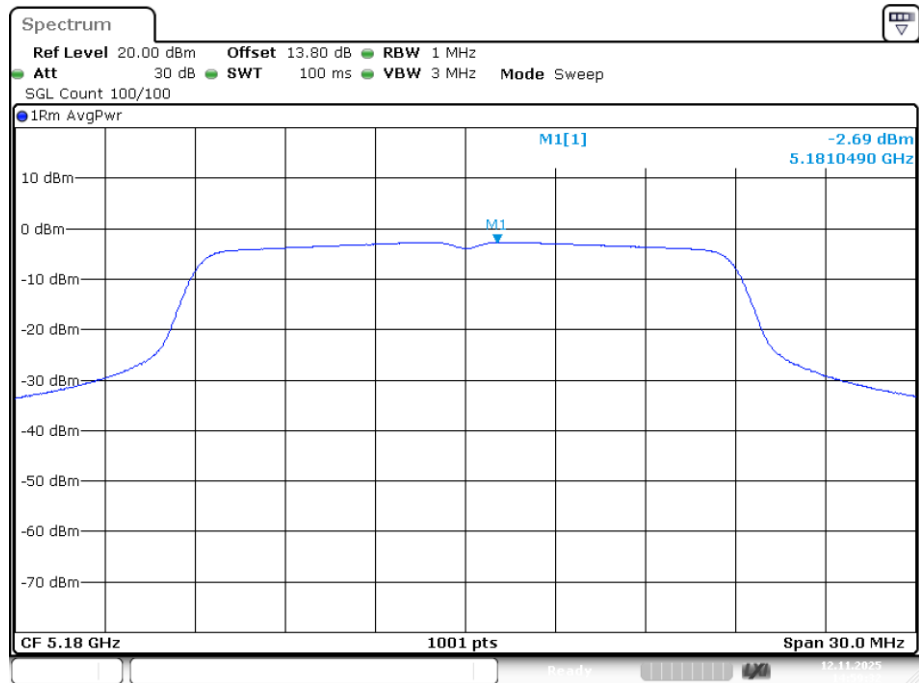


Date: 12.NOV.2025 14:59:31

PSD NVNT n20 5200MHz Ant1

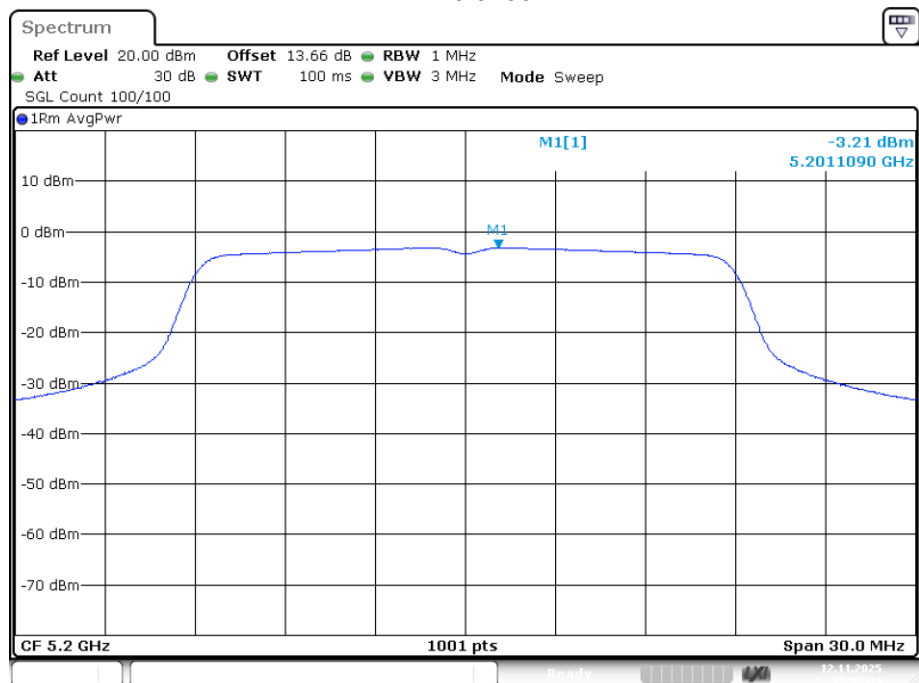


Date: 12.NOV.2025 15:03:04


PSD NVNT n20 5240MHz Ant1

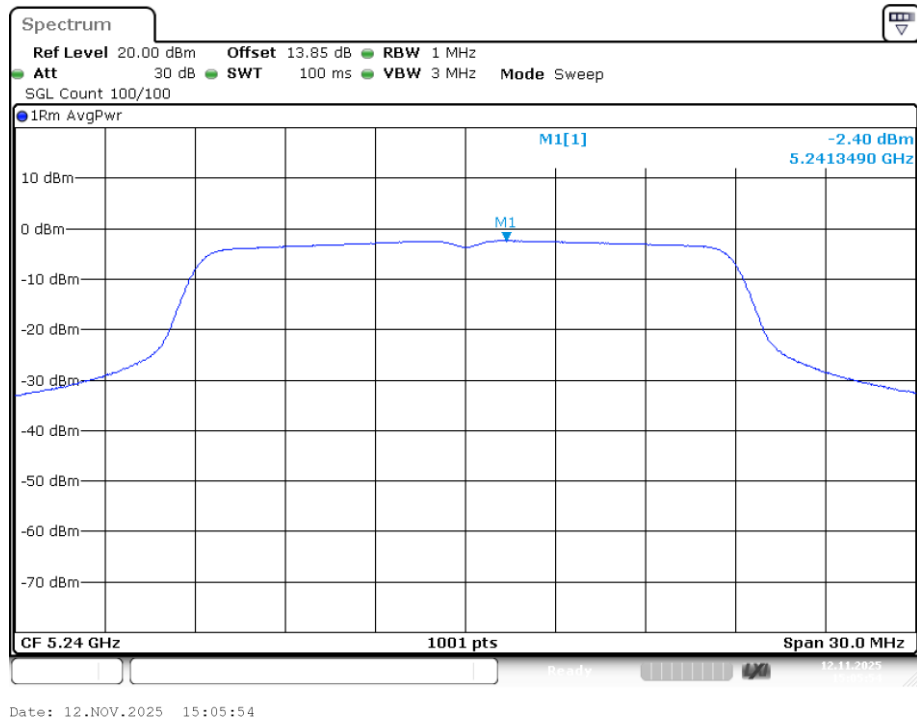

PSD NVNT n40 5190MHz Ant1

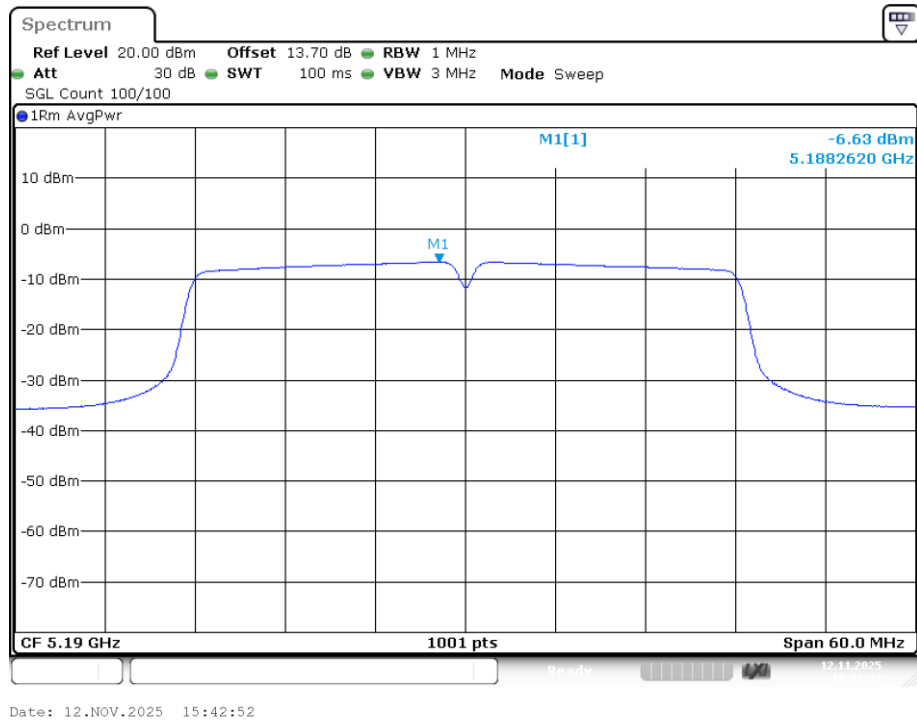

PSD NVNT n40 5230MHz Ant1

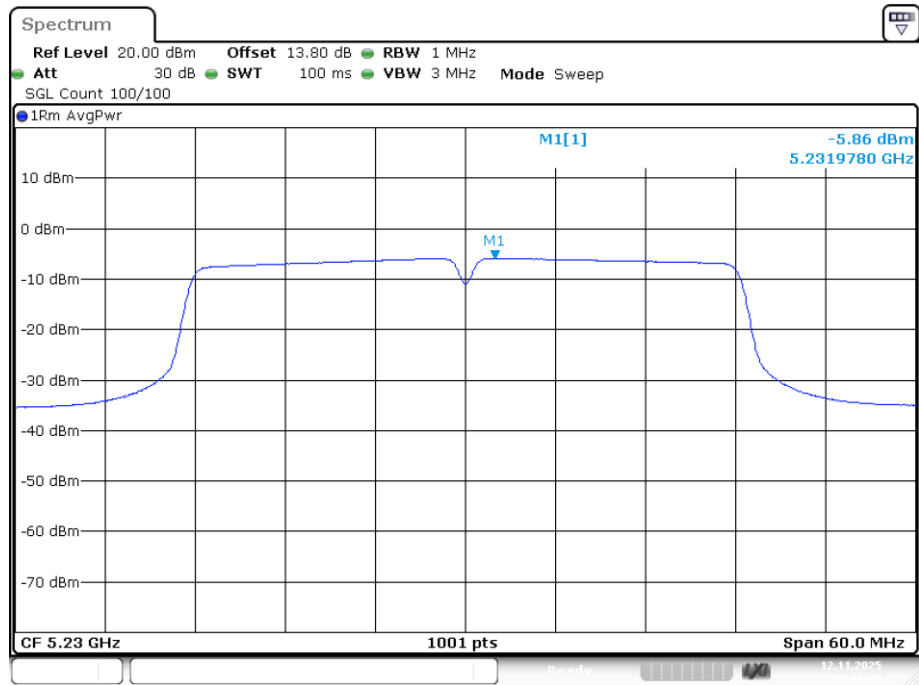

Date: 12.NOV.2025 15:46:28


Note: offset=cable factor

Band 2 (5250 -5350 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Cycle Factor (dB)	Ant Gain (dBi)	EIRP PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	-3.648	0.28	7.16	3.79	9.84	Pass
NVNT	a	5280	Ant1	-2.569	0.08	7.16	4.67	9.84	Pass
NVNT	a	5320	Ant1	-2.223	0.08	7.16	5.02	9.84	Pass
NVNT	ac20	5260	Ant1	-3.32	0.36	7.16	4.20	9.84	Pass
NVNT	ac20	5280	Ant1	-2.49	0.3	7.16	4.97	9.84	Pass
NVNT	ac20	5320	Ant1	-2.424	0.3	7.16	5.04	9.84	Pass
NVNT	ac40	5270	Ant1	-6.958	0.03	7.16	0.23	9.84	Pass
NVNT	ac40	5310	Ant1	-6.139	0.02	7.16	1.04	9.84	Pass
NVNT	ax20	5260	Ant1	-5.923	0	7.16	1.24	9.84	Pass
NVNT	ax20	5280	Ant1	-4.761	0.39	7.16	2.79	9.84	Pass
NVNT	ax20	5320	Ant1	-6.915	0.39	7.16	0.64	9.84	Pass
NVNT	ax40	5270	Ant1	-9.53	0.7	7.16	-1.67	9.84	Pass
NVNT	ax40	5310	Ant1	-9.315	0.7	7.16	-1.46	9.84	Pass
NVNT	n20	5260	Ant1	-4.402	0.01	7.16	2.77	9.84	Pass
NVNT	n20	5280	Ant1	-4.31	0.01	7.16	2.86	9.84	Pass
NVNT	n20	5320	Ant1	-3.64	0.01	7.16	3.53	9.84	Pass
NVNT	n40	5270	Ant1	-7.148	0.08	7.16	0.09	9.84	Pass
NVNT	n40	5310	Ant1	-7.205	0.02	7.16	-0.03	9.84	Pass


Note: 1. Directional gain=7.16dBi, so the Conducted Power Limit need to reduce 1.16.

PSD NVNT a 5260MHz Ant1

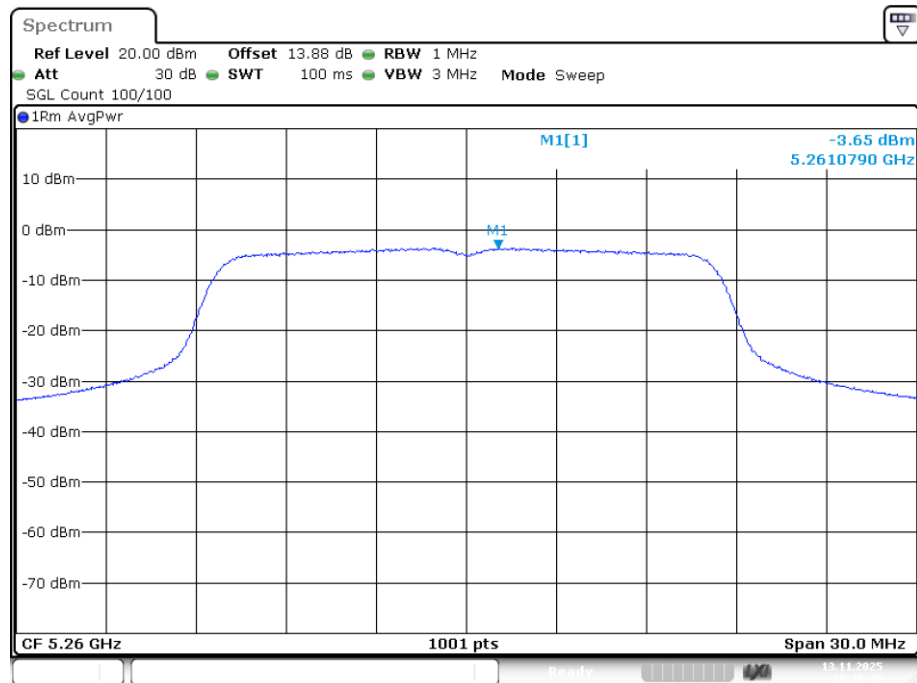


Date: 13.NOV.2025 10:16:45

PSD NVNT a 5280MHz Ant1

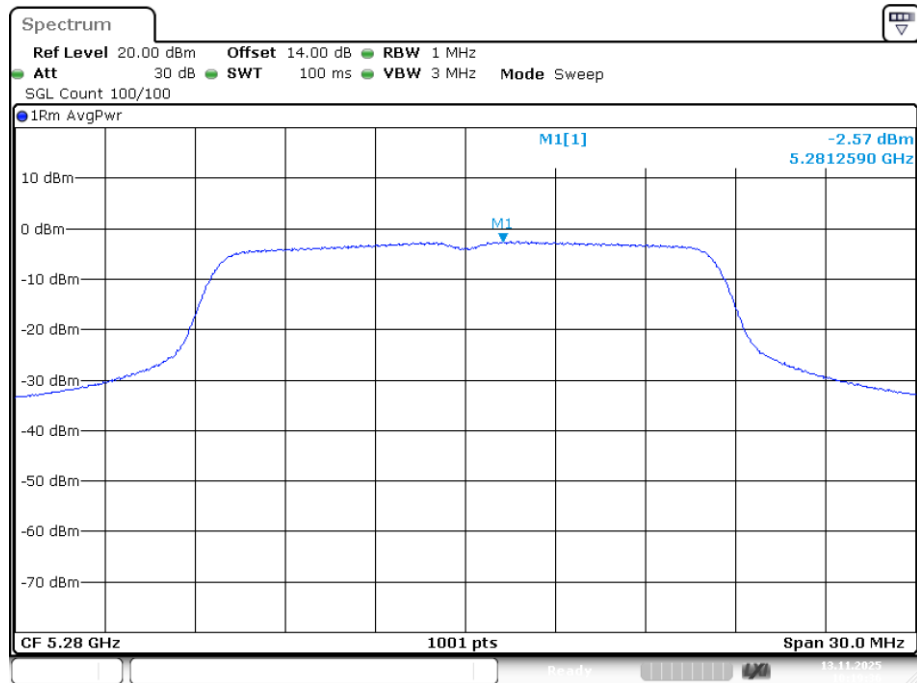


Date: 13.NOV.2025 10:19:35

PSD NVNT a 5320MHz Ant1

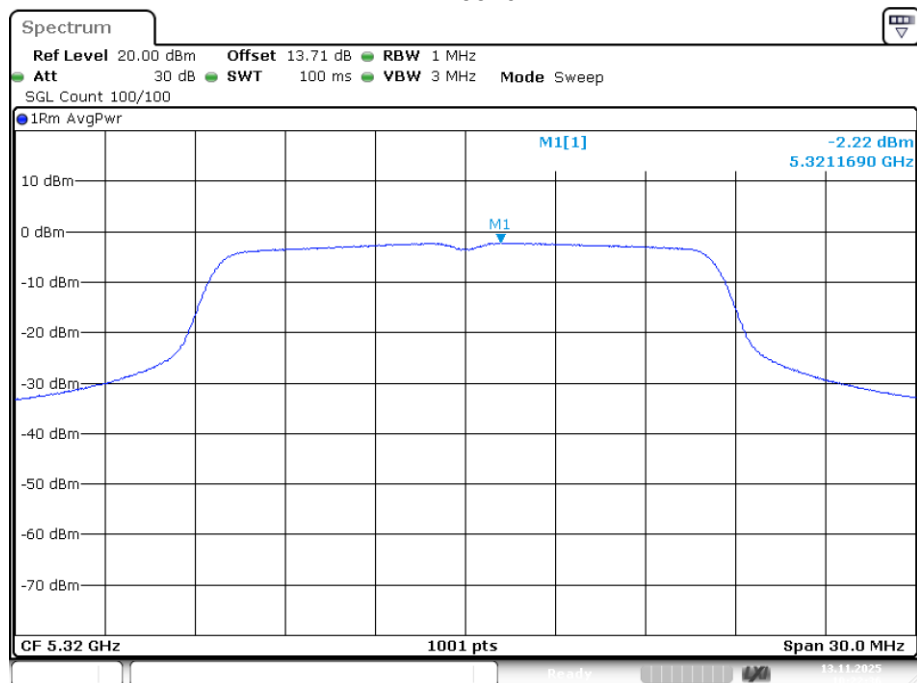


Date: 13.NOV.2025 10:22:36

PSD NVNT ac20 5260MHz Ant1

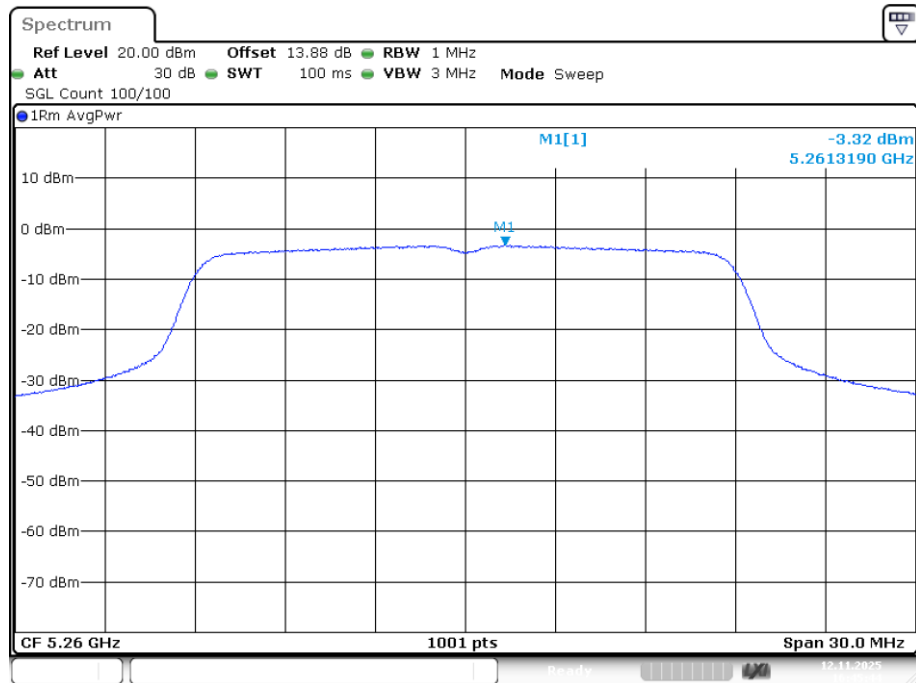


Date: 12.NOV.2025 16:45:44

PSD NVNT ac20 5280MHz Ant1

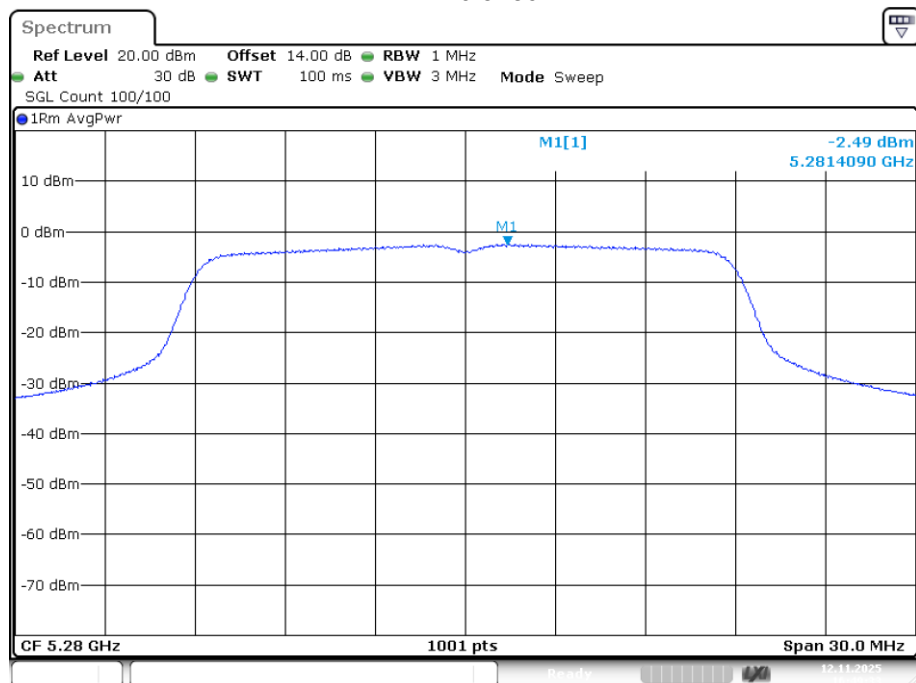


Date: 12.NOV.2025 16:49:33


PSD NVNT ac20 5320MHz Ant1

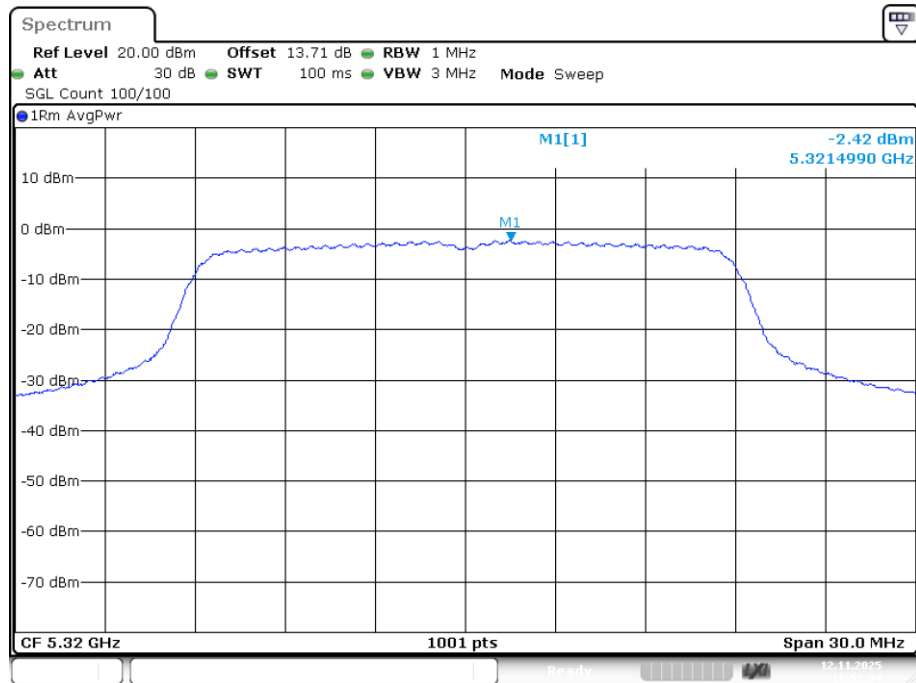


PSD NVNT ac40 5270MHz Ant1

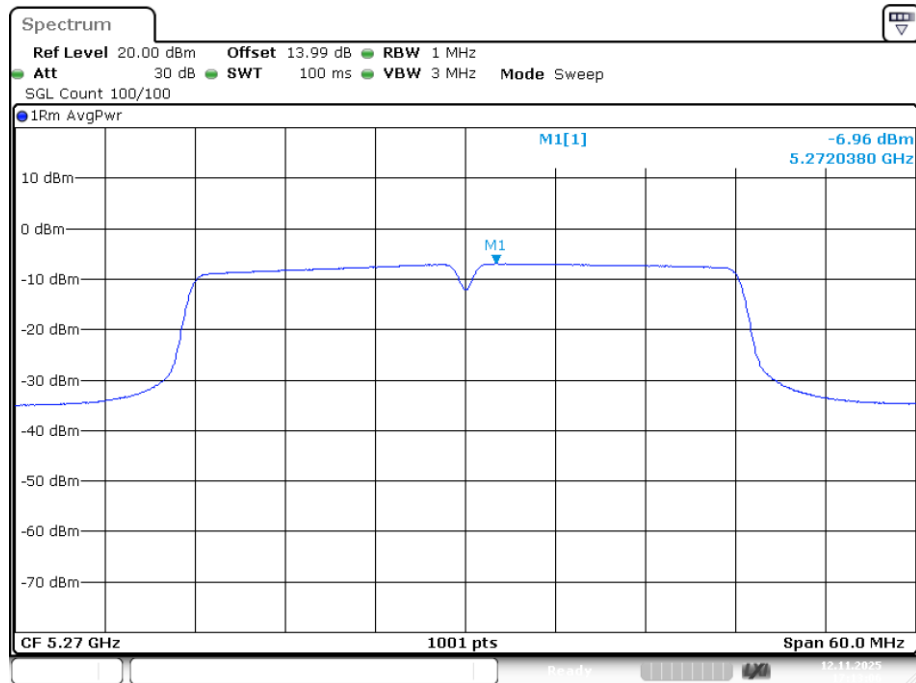


PSD NVNT ac40 5310MHz Ant1

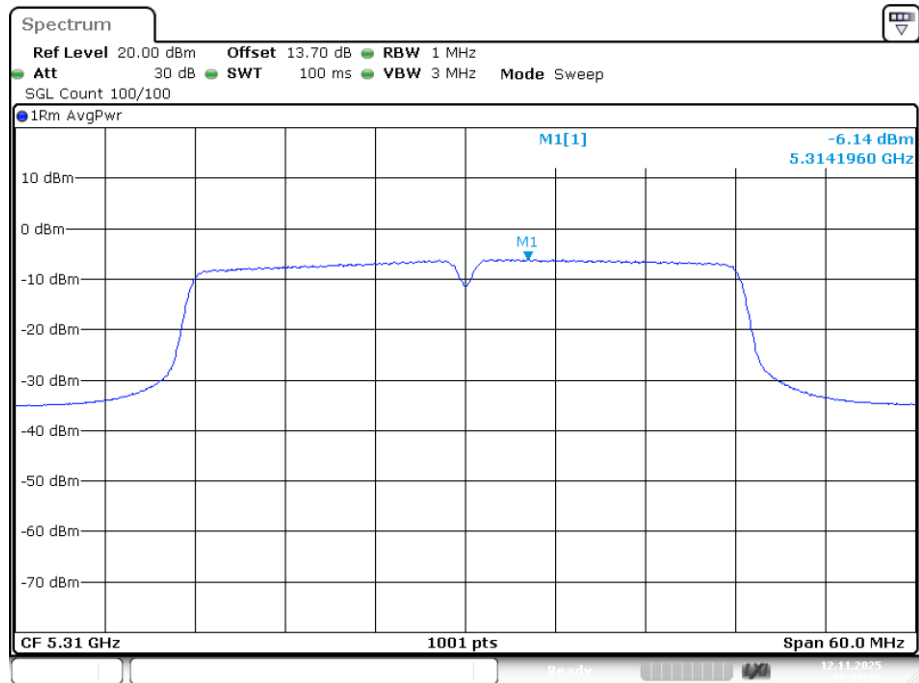


PSD NVNT ax20 5260MHz Ant1

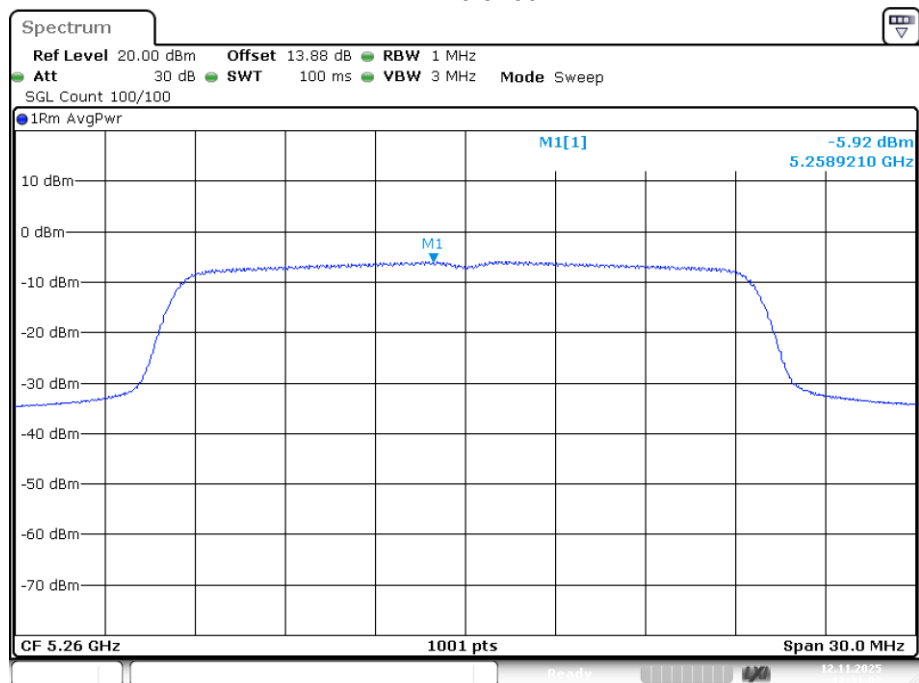


PSD NVNT ax20 5280MHz Ant1

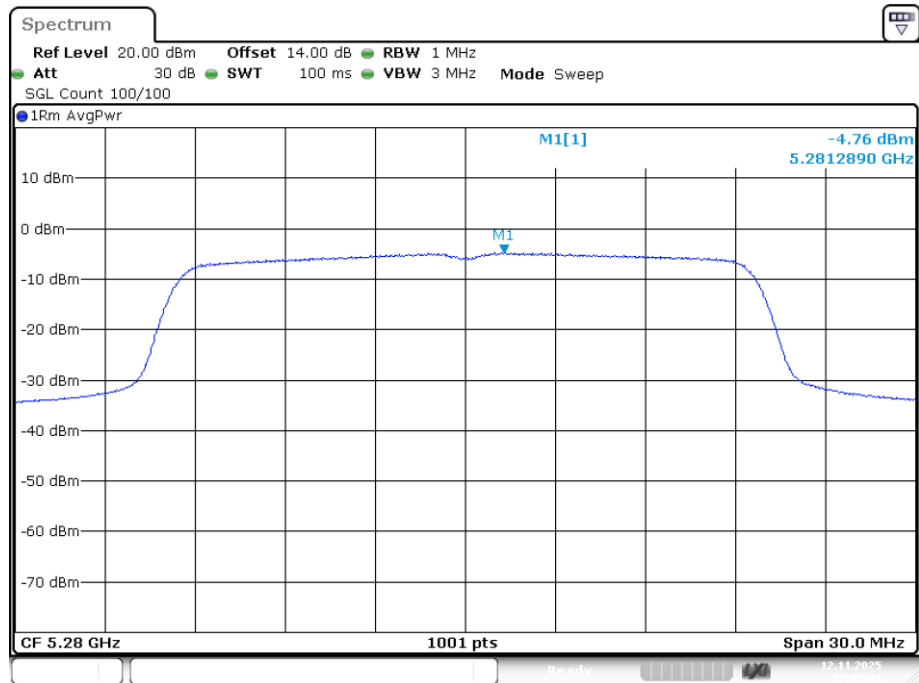

PSD NVNT ax20 5320MHz Ant1

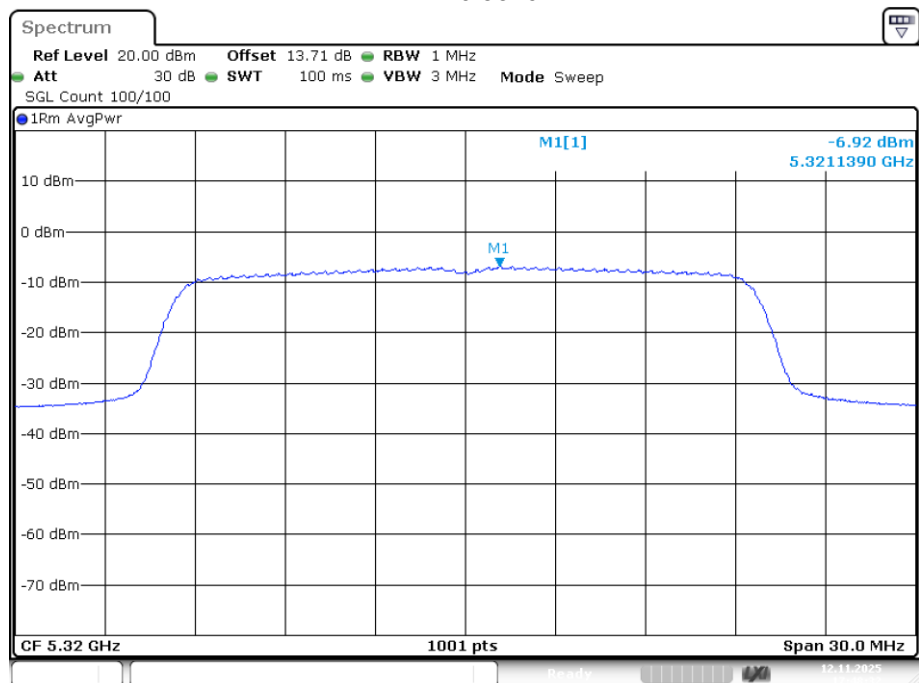


PSD NVNT ax40 5270MHz Ant1

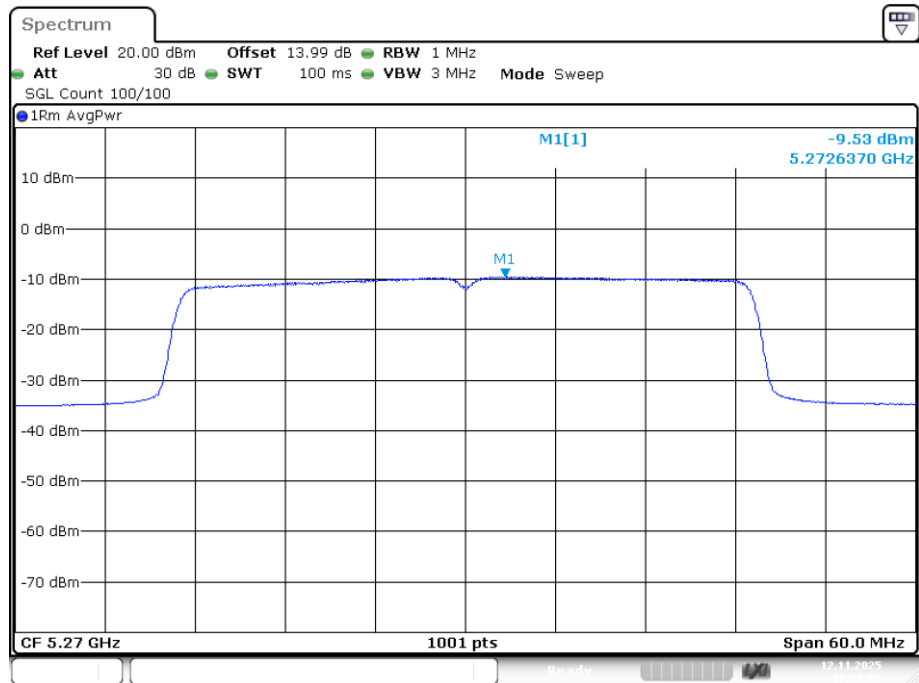


Date: 12.NOV.2025 17:56:05

PSD NVNT ax40 5310MHz Ant1

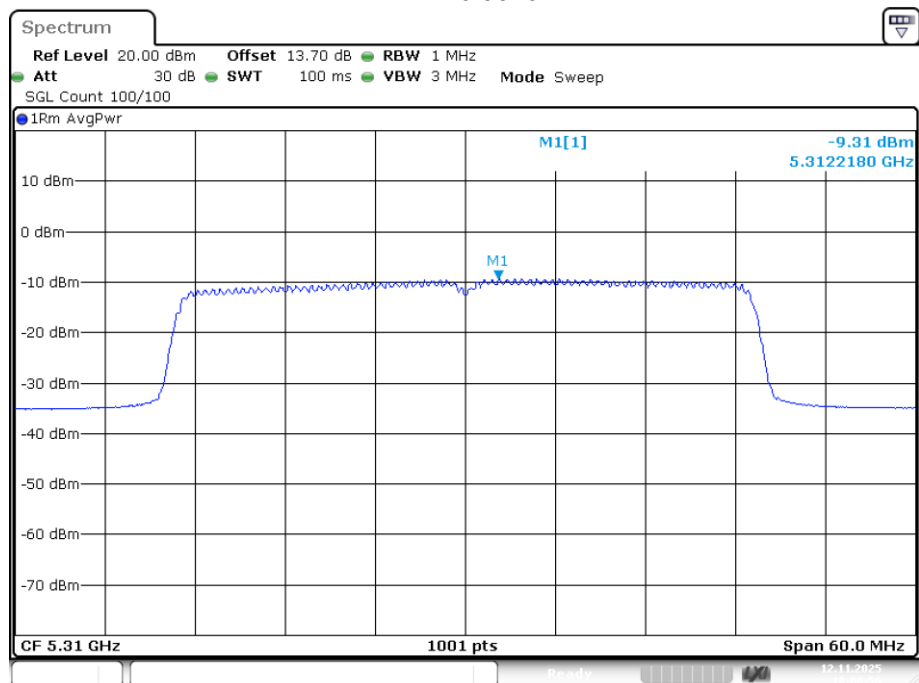


Date: 12.NOV.2025 18:00:56


PSD NVNT n20 5260MHz Ant1

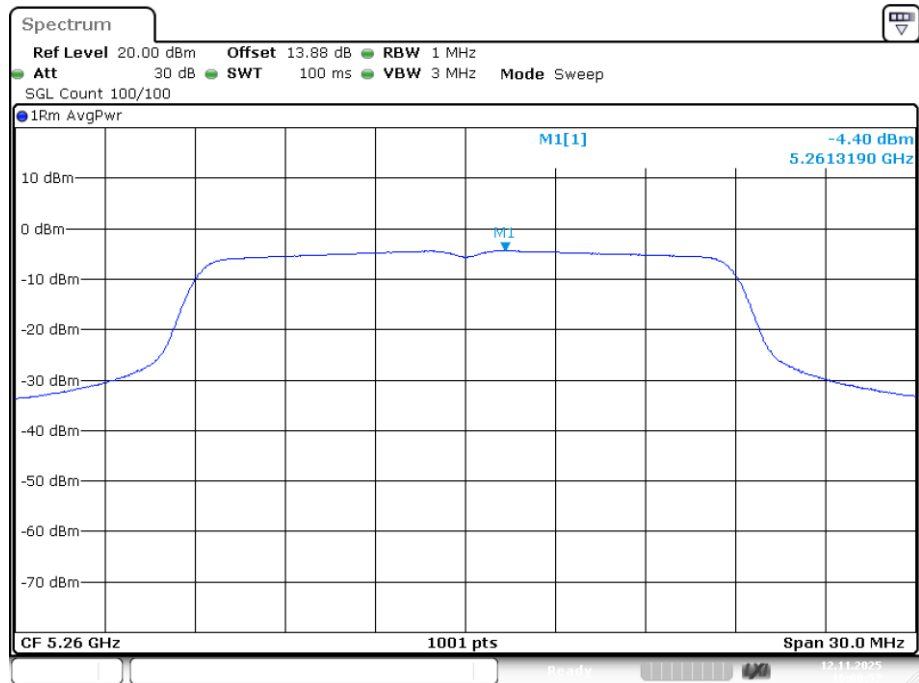

PSD NVNT n20 5280MHz Ant1

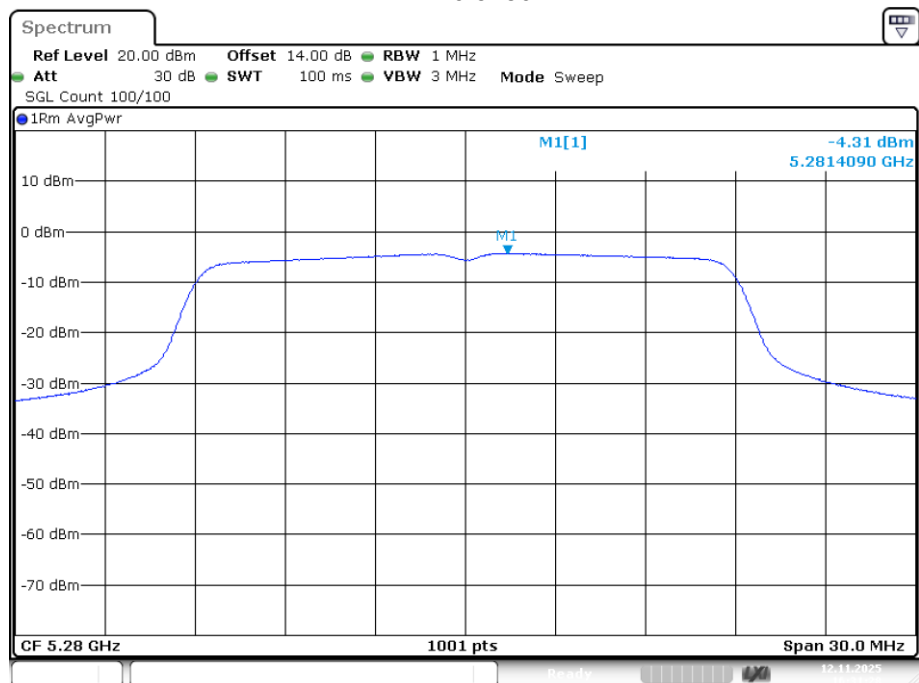


PSD NVNT n20 5320MHz Ant1

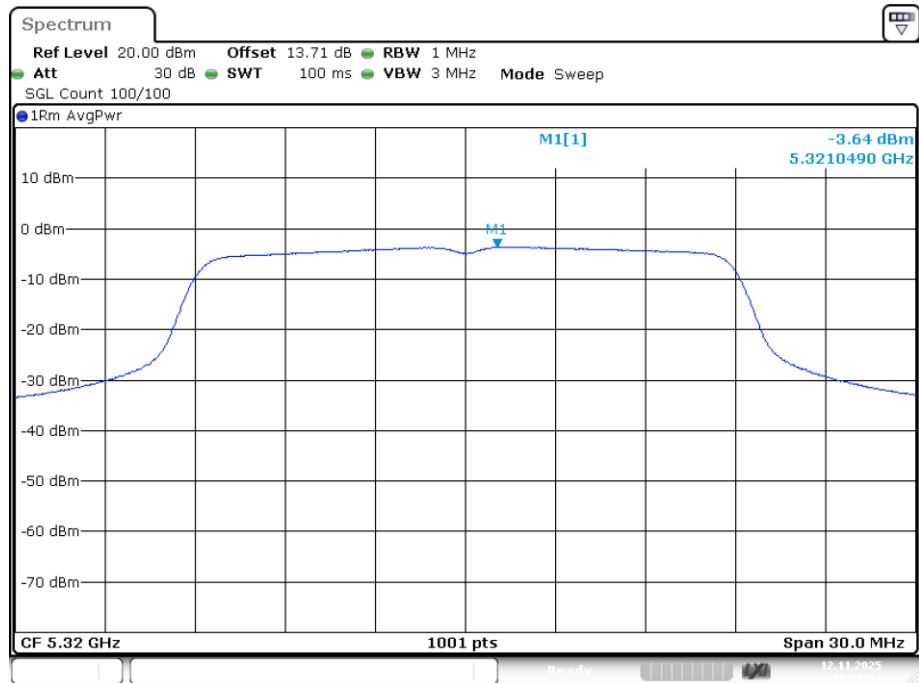


Date: 12.NOV.2025 16:35:54

PSD NVNT n40 5270MHz Ant1

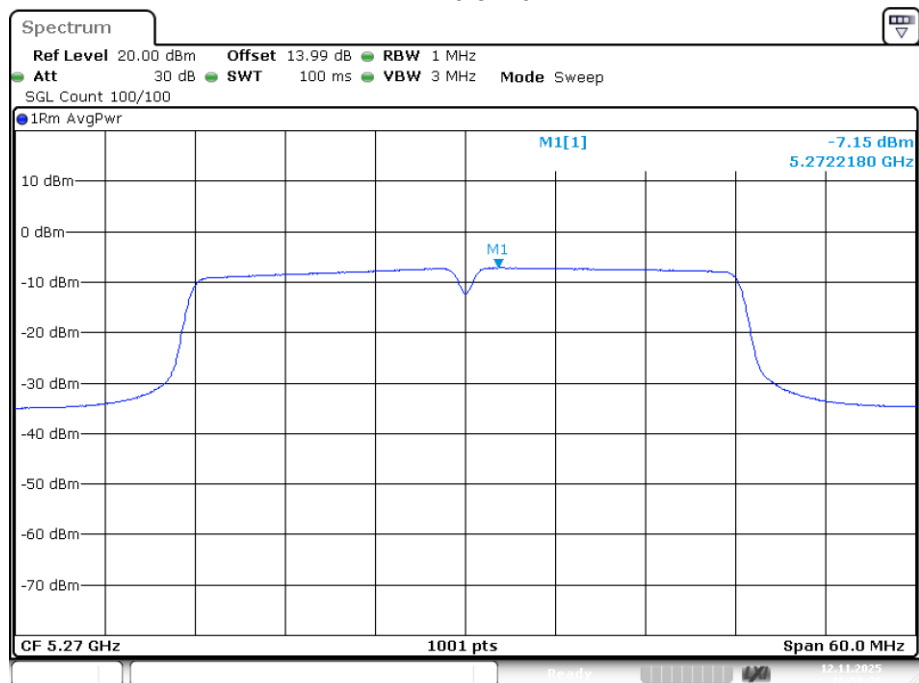

Date: 12.NOV.2025 16:59:20

PSD NVNT n40 5310MHz Ant1

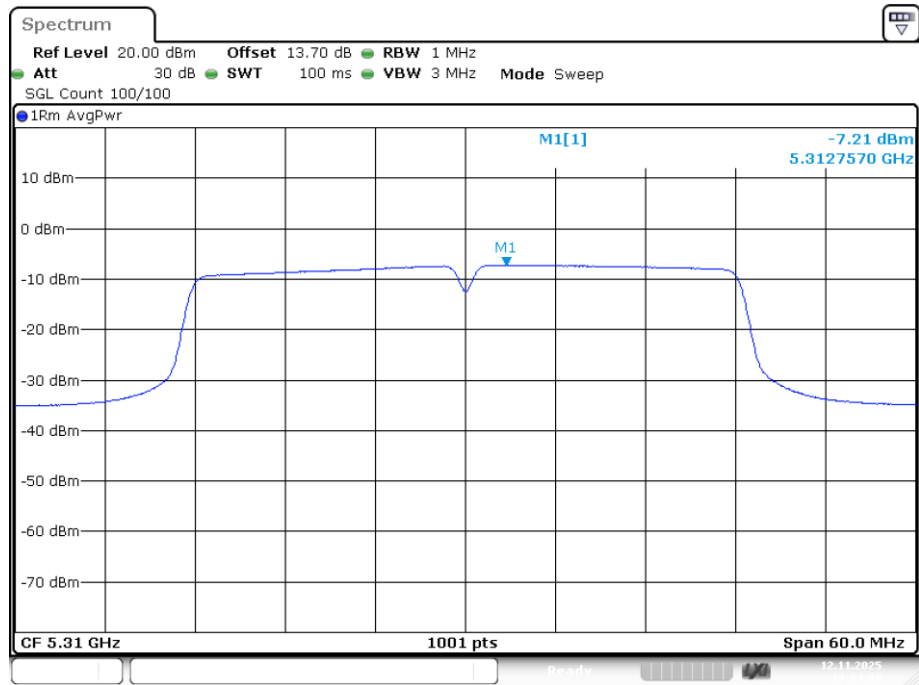

Date: 12.NOV.2025 17:03:59


Note: offset=cable factor

Band 3 (5470 -5725 MHz)


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Cycle Factor (dB)	Ant Gain (dBi)	EIRP PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	-2.933	0.28	7.16	4.51	9.84	Pass
NVNT	a	5580	Ant1	-2.995	0.26	7.16	4.43	9.84	Pass
NVNT	a	5700	Ant1	-3.672	0.29	7.16	3.78	9.84	Pass
NVNT	ac20	5500	Ant1	-4.749	0.31	7.16	2.72	9.84	Pass
NVNT	ac20	5580	Ant1	-4.174	0.31	7.16	3.30	9.84	Pass
NVNT	ac20	5700	Ant1	-3.799	0.3	7.16	3.66	9.84	Pass
NVNT	ac40	5510	Ant1	-7.82	0.17	7.16	-0.49	9.84	Pass
NVNT	ac40	5670	Ant1	-6.855	0.58	7.16	0.89	9.84	Pass
NVNT	ax20	5500	Ant1	-6.714	0.12	7.16	0.57	9.84	Pass
NVNT	ax20	5580	Ant1	-6.846	0.39	7.16	0.70	9.84	Pass
NVNT	ax20	5700	Ant1	-6.308	0.39	7.16	1.24	9.84	Pass
NVNT	ax40	5510	Ant1	-8.959	0.22	7.16	-1.58	9.84	Pass
NVNT	ax40	5670	Ant1	-9.79	0.7	7.16	-1.93	9.84	Pass
NVNT	n20	5500	Ant1	-4.018	0.31	7.16	3.45	9.84	Pass
NVNT	n20	5580	Ant1	-4.143	0.33	7.16	3.35	9.84	Pass
NVNT	n20	5700	Ant1	-3.972	0.31	7.16	3.50	9.84	Pass
NVNT	n40	5510	Ant1	-6.596	0.18	7.16	0.74	9.84	Pass
NVNT	n40	5670	Ant1	-6.144	0.27	7.16	1.29	9.84	Pass

Note: 1. Directional gain=7.16dBi, so the Conducted Power Limit need to reduce 1.16.

PSD NVNT a 5500MHz Ant1

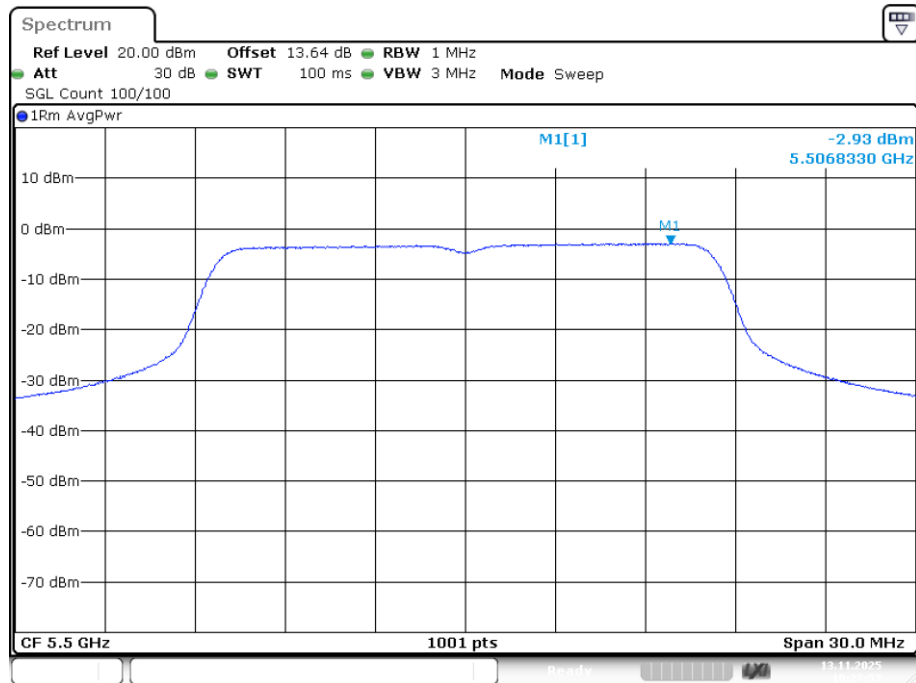


PSD NVNT a 5580MHz Ant1

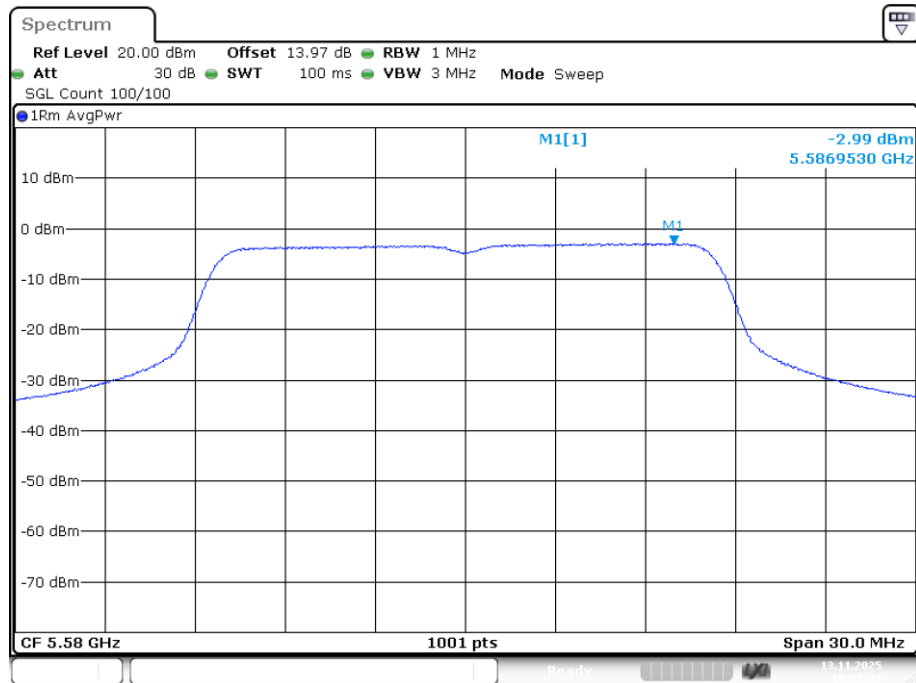


Date: 13.NOV.2025 10:32:33

PSD NVNT a 5700MHz Ant1

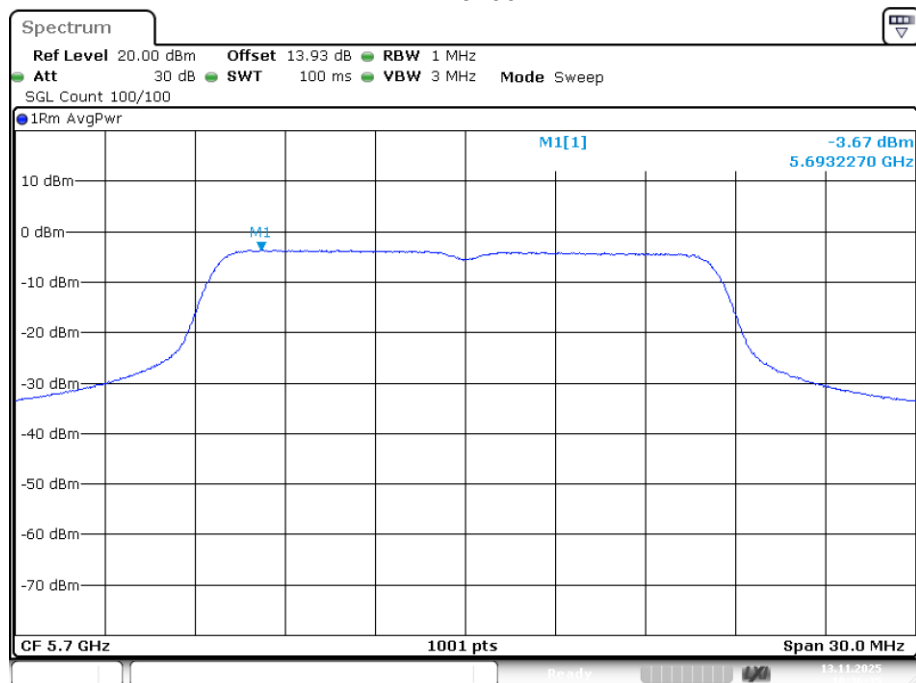


Date: 13.NOV.2025 10:36:34

PSD NVNT ac20 5500MHz Ant1

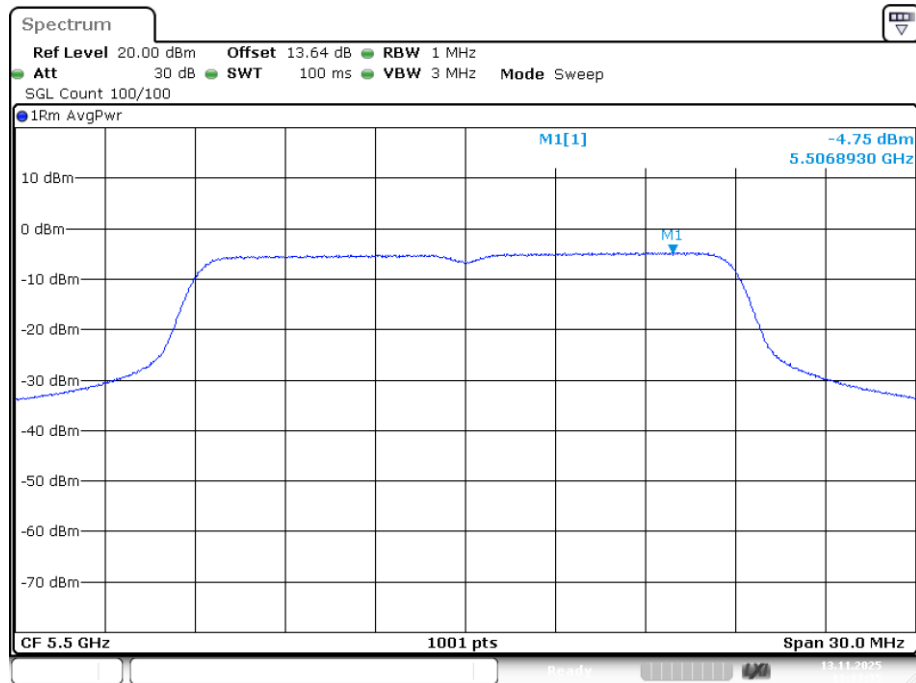

Date: 13.NOV.2025 11:13:35

PSD NVNT ac20 5580MHz Ant1

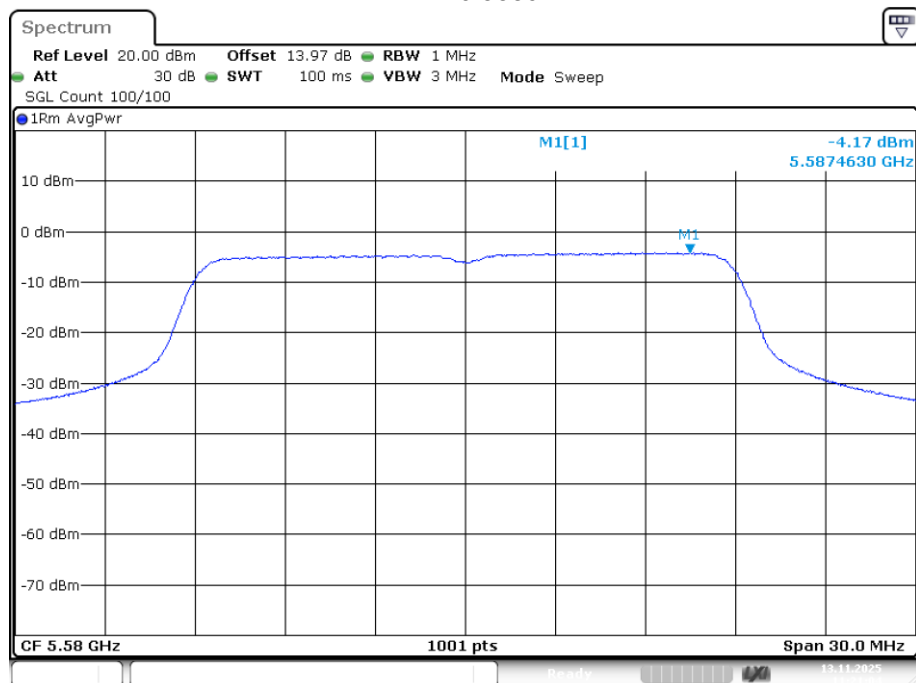

Date: 13.NOV.2025 11:21:04

PSD NVNT ac20 5700MHz Ant1