

TEST REPORT

Reference No..... : WTX25X04108447W001
FCC ID : 2AATL-N280A-SRL
Applicant : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone,
Changsha, Hunan, CHINA
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Combo Module
Model No..... : N280A-SRL
Standards : FCC Part 15.407
Date of Receipt sample : 2025-04-27
Date of Test..... : 2025-04-27 to 2025-09-25
Date of Issue : 2025-09-25
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi/Project Engineer

Approved by:



Silin Chen/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	6
1.5 EUT OPERATING DURING TEST.....	8
1.6 TEST FACILITY	8
1.7 EUT SETUP AND TEST MODE	9
1.8 MEASUREMENT UNCERTAINTY	11
1.9 TEST EQUIPMENT LIST AND DETAILS	12
2. SUMMARY OF TEST RESULTS.....	16
3. ANTENNA REQUIREMENT.....	17
3.1 STANDARD APPLICABLE	17
3.2 EVALUATION INFORMATION	17
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	18
4.1 STANDARD APPLICABLE	18
4.2 SUMMARY OF TEST RESULTS.....	18
5. POWER SPECTRAL DENSITY	19
5.1 STANDARD APPLICABLE	19
5.2 TEST PROCEDURE	19
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	20
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	21
6.1 STANDARD APPLICABLE	21
6.2 TEST PROCEDURE	21
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	23
7. MAXIMUM CONDUCTED OUTPUT POWER	24
7.1 STANDARD APPLICABLE	24
7.2 TEST PROCEDURE	24
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	25
8. RADIATED SPURIOUS EMISSIONS	26
8.1 STANDARD APPLICABLE	26
8.2 TEST PROCEDURE	26
8.3 TEST RECEIVER SETUP	28
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	28
8.5 SUMMARY OF TEST RESULTS/PLOTS.....	28
9. FREQUENCY STABILITY	82
9.1 STANDARD APPLICABLE	82
9.2 TEST PROCEDURE	82
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	82
10. CONDUCTED EMISSIONS	83
10.1 TEST PROCEDURE.....	83
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	83
10.3 TEST RECEIVER SETUP	83
10.4 SUMMARY OF TEST RESULTS/PLOTS	83
APPENDIX SUMMARY	86
APPENDIX A1: EMISSION BANDWIDTH	87
APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH	119
APPENDIX A3: MIN EMISSION BANDWIDTH.....	151
APPENDIX B: DUTY CYCLE	160
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	192
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	224

Reference No.: WTX25X04108447W001

APPENDIX E: FREQUENCY STABILITY 255

APPENDIX PHOTOGRAPHS.....295

Report version

Version No.	Date of issue	Description
Rev.00	2025-09-25	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Combo Module
Trade Name:	/
Model No.:	N280A-SRL
Adding Model(s):	/
Rated Voltage:	DC3.3V
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT20/40/80, 802.11ax-HE20/40/80
Frequency Range:	5180-5240MHz, 5260-5320MHz 5500-5700MHz, 5745-5825MHz
Max. RF Output Power:	15.33dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM,256QAM,1024QAM
Type of Antenna:	External Antenna
Antenna Gain:	5.52dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Run commands and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level.

Mode	Test Frequency (MHz)											
	NCB: 20MHz											
	5180	5200	5240	5260	5280	5320	5500	5580	5700	5745	5785	5825
802.11a	13	13	13	13	13	13	13	13	13	13	13	13
802.11n-HT20	11	11	11	11	11	11	11	11	11	11	11	11
802.11ac-VHT 20	11	11	11	11	11	11	11	11	11	11	11	11
802.11ax-HE2 0	10	10	10	10	10	10	10	10	10	10	10	10
Mode	NCB: 40MHz											
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795		
802.11n-HT40	11	11	11	11	11	11	11	11	11	11	11	11
802.11ac-VHT 40	11	11	11	11	11	11	11	11	11	11	11	11
802.11ax-HE4 0	10	10	10	10	10	10	10	10	10	10	10	10
Mode	NCB: 80MHz											

Reference No.: WTX25X04108447W001

	5210	5290	5530	5610	5775
802.11ac-VH8 0	11	11	11	11	11
802.11ax-HE8 0	10	10	10	10	10

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5580MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5580MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11ac-VHT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5580MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM4	802.11ax-HE20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5580MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM5	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5550MHz,5670MHz,5755MHz,5795MHz
TM6	802.11ac-VHT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5550MHz,5670MHz,5755MHz,5795MHz
TM7	802.11ax-HE40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5550MHz,5670MHz,5755MHz,5795MHz
TM8	802.11ac-VH80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz
TM9	802.11ax-HE80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz
Note 1: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		
Note 2: 802.11ax mode only support full RU.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~75 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	L13 Yoga	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	0.57dB
Occupied Bandwidth	Conducted	0.015MHz
Power Spectral Density	Conducted	1.8dB
Conducted Spurious Emission	Conducted	2.17dB
Conducted Emissions	Conducted	9-150kHz, 3.74dB
		0.15-30MHz, 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz, 4.52dB
		0.2-1GHz 5.56dB
		1-6GHz, 3.84dB
		6-18GHz, 3.92dB

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2025-02-23	2026-02-22
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2025-02-23	2026-02-22
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2025-02-23	2026-02-22
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2025-02-23	2026-02-22
WTXW1105A 1010	Spectrum Analyzer	KEYSIGHT	N9020A	MY512856 77	2025-02-23	2026-02-22
WTXE1105A 1008	RF Control Unit	Tonscend	JS0806-2	24F80620 870	2025-02-23	2026-02-22
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2025-02-23	2026-02-22
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2025-02-23	2026-02-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2025-02-23	2026-02-22
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2025-02-23	2026-02-22
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22

WTXE1065A 1001	Amplifier	C&D	PAP-1.0G18	14918	2025-02-23	2026-02-22
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2025-02-23	2026-02-22
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2025-02-23	2026-02-22
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2025-02-23	2026-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2025-02-23	2026-02-22
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22

WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
					2025-06-13	2027-06-12
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2024-12-08	2025-12-07
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2025-02-23	2026-02-22
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2025-02-23	2026-02-22
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2025-02-23	2026-02-22
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2025-02-23	2026-02-22
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
EMI Test Software (Conducted Emission Room 1#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
EMI Test Software (Conducted Emission Room 2#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
RF Test System	Tonscend	JS1120-3	V3.5.39

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.209; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an External antenna, and the antenna connector is reverse screw connector. Fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix D

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX25X04108447W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix A1&A2&A3

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or 11dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:


- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

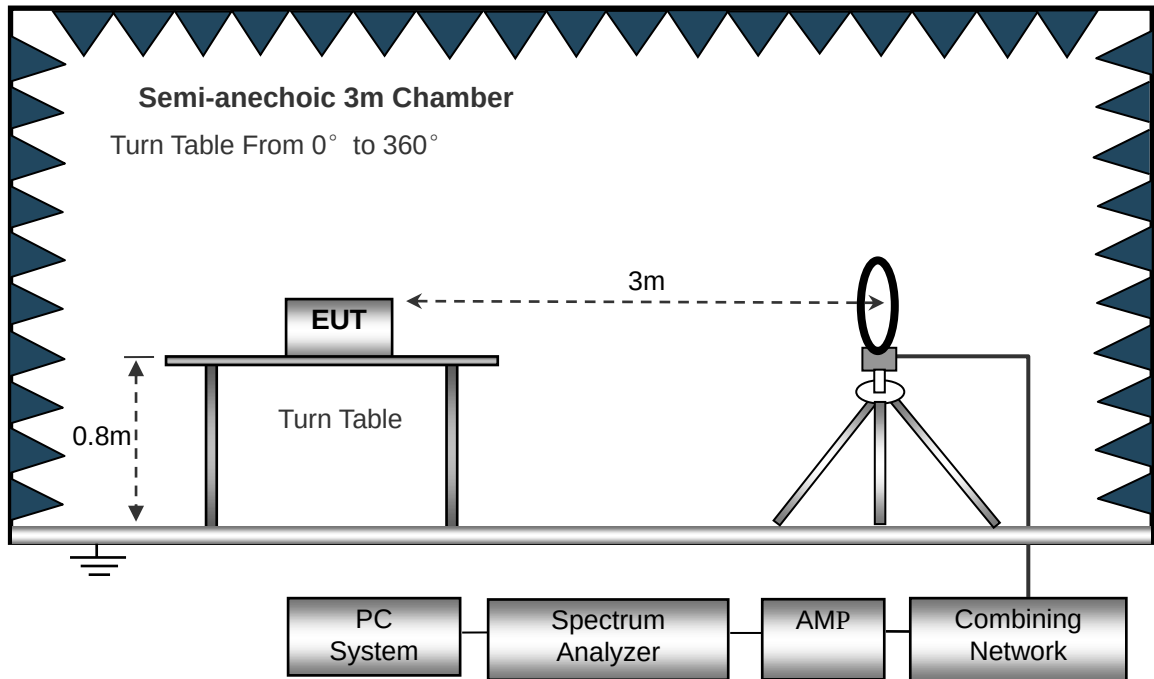

The test setup for emission measurement from 30MHz to 1GHz.

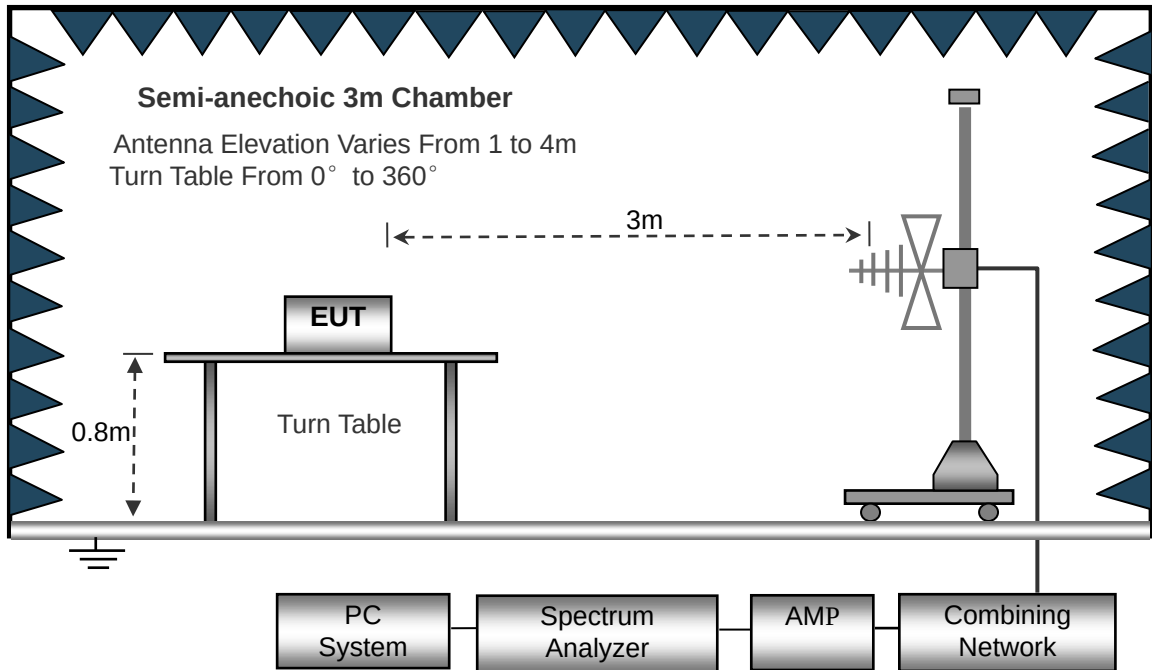

The test setup for emission measurement above 1GHz.

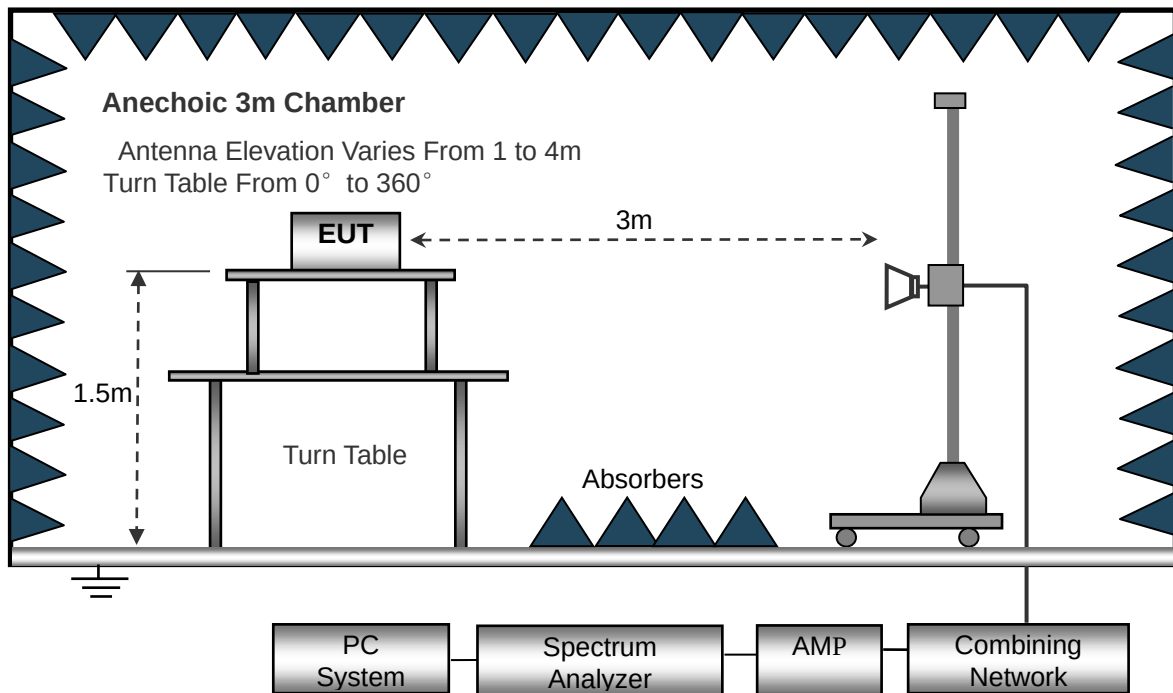

8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(worst case)			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

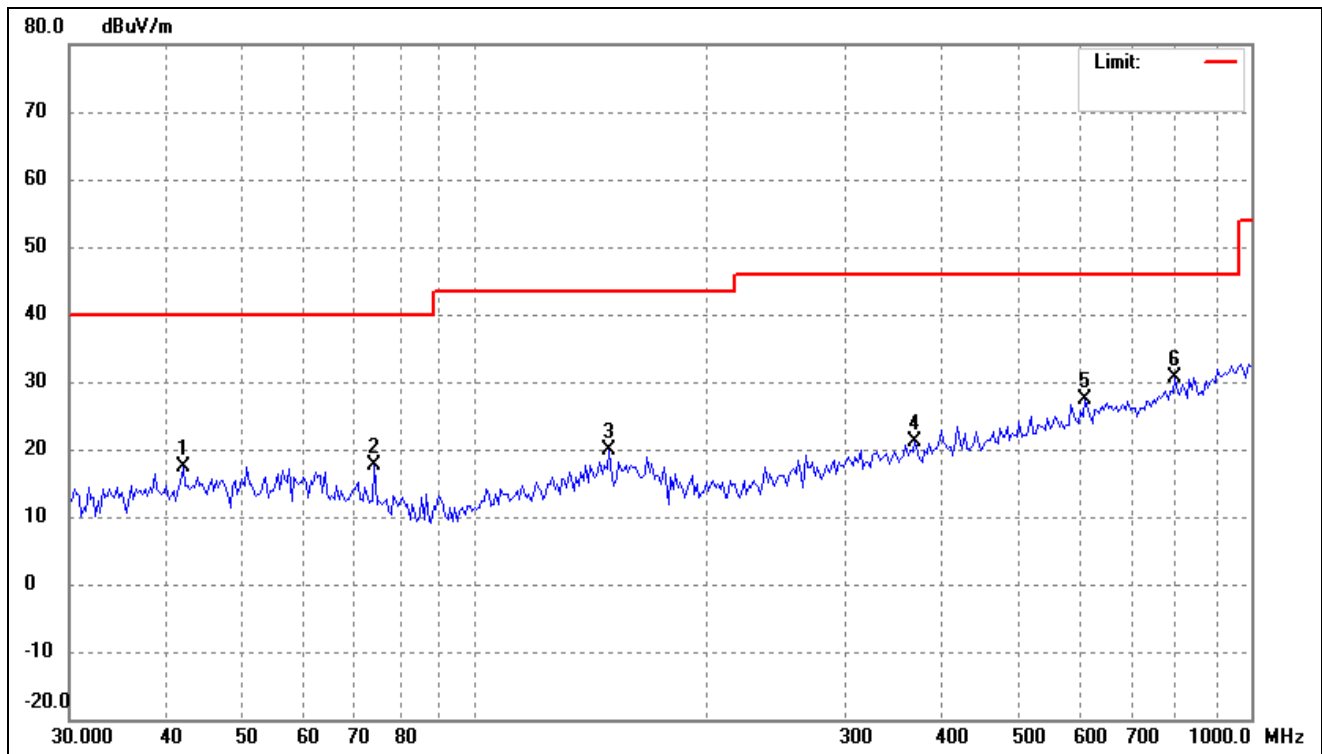

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0350	26.84	-9.39	17.45	40.00	-22.55	-	-	peak
2	74.2696	29.62	-11.92	17.70	40.00	-22.30	-	-	peak
3	148.9175	28.71	-8.91	19.80	43.50	-23.70	-	-	peak
4	368.6682	27.87	-6.70	21.17	46.00	-24.83	-	-	peak
5	611.4623	29.41	-2.09	27.32	46.00	-18.68	-	-	peak
6	798.6205	29.58	0.99	30.57	46.00	-15.43	-	-	peak

802.11a(worst case)			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

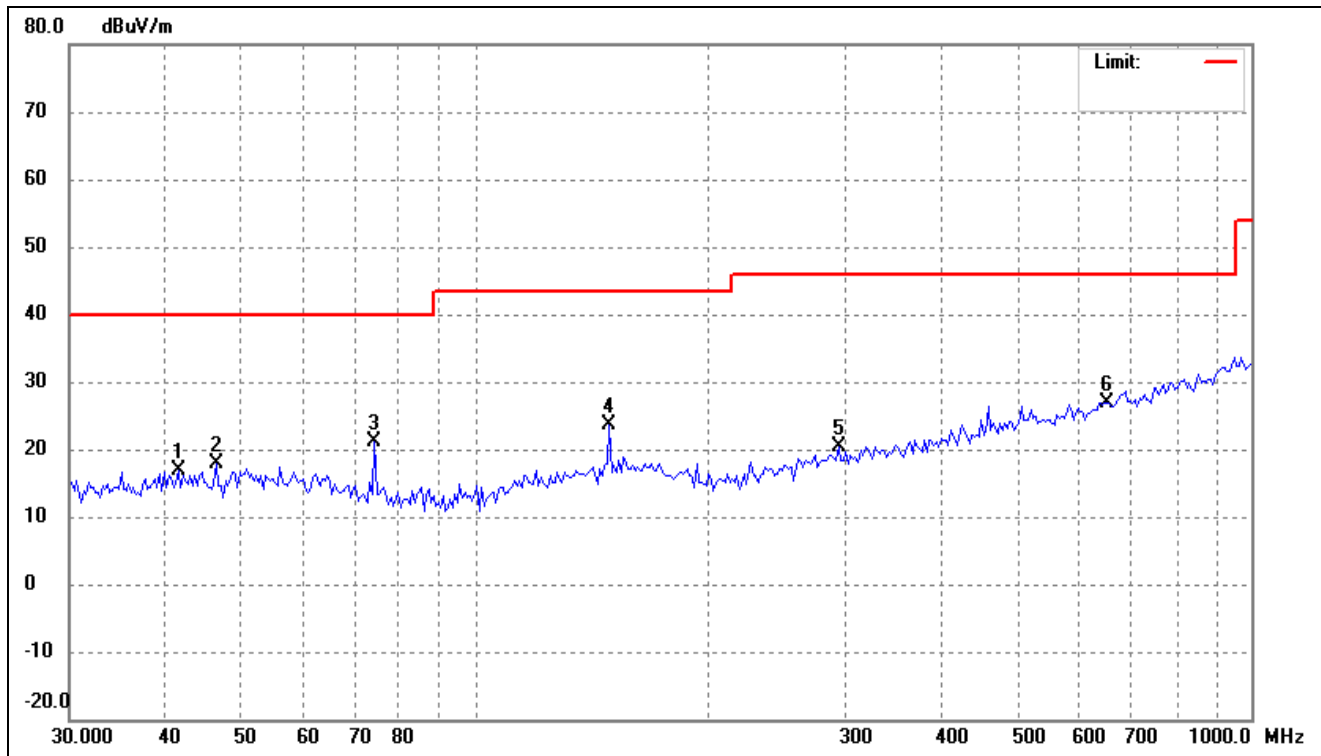


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4483	26.24	-9.45	16.79	40.00	-23.21	-	-	peak
2	46.3806	26.79	-9.02	17.77	40.00	-22.23	-	-	peak
3	74.2696	32.93	-11.92	21.01	40.00	-18.99	-	-	peak
4	148.9175	32.64	-8.91	23.73	43.50	-19.77	-	-	peak
5	294.4260	28.10	-7.84	20.26	46.00	-25.74	-	-	peak
6	651.3831	28.29	-1.33	26.96	46.00	-19.04	-	-	peak

➤ 5250-5350MHz


802.11a(worst case)

Test Channel	5320MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

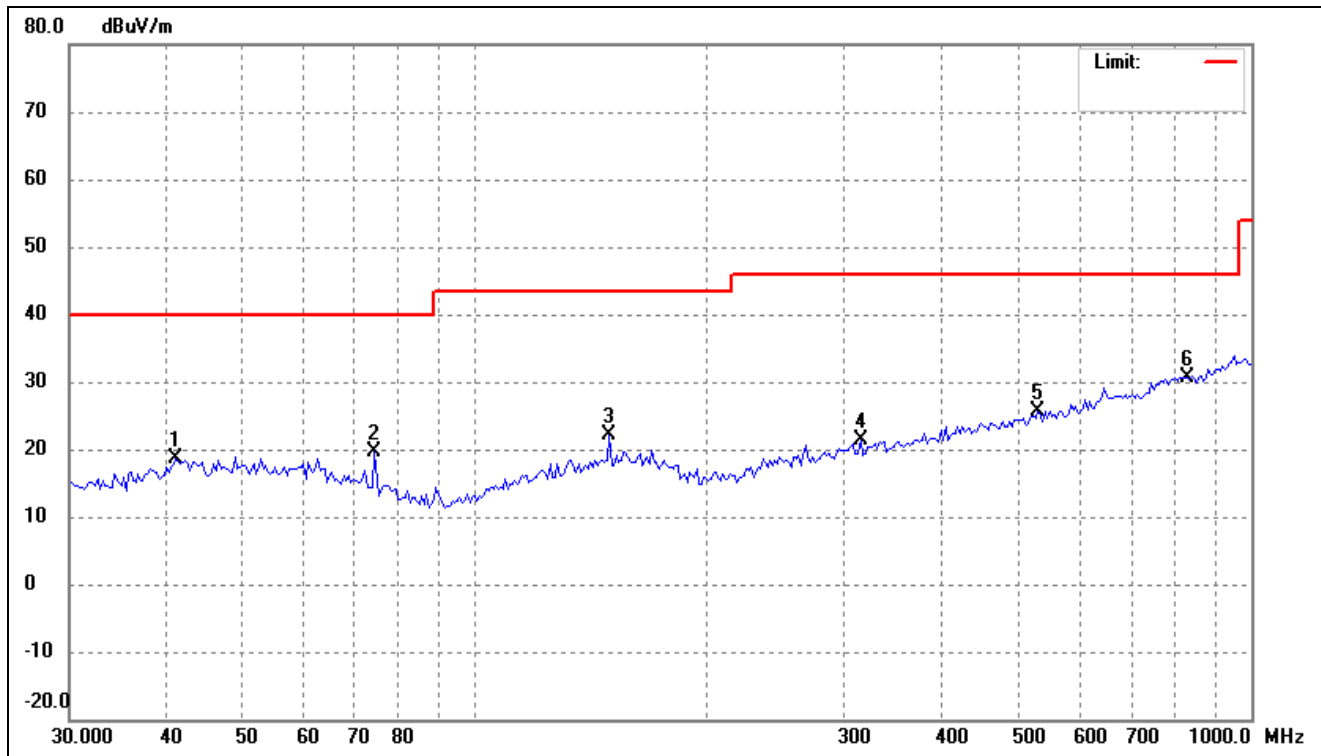

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.1581	28.05	-9.48	18.57	40.00	-21.43	-	-	peak
2	74.2696	31.63	-11.92	19.71	40.00	-20.29	-	-	peak
3	148.9175	31.14	-8.91	22.23	43.50	-21.27	-	-	peak
4	313.6483	28.84	-7.44	21.40	46.00	-24.60	-	-	peak
5	531.2910	29.49	-3.80	25.69	46.00	-20.31	-	-	peak
6	827.1795	29.70	0.98	30.68	46.00	-15.32	-	-	peak

802.11a(worst case)			
Test Channel	5320MHz(worst case)	Polarity:	Vertical

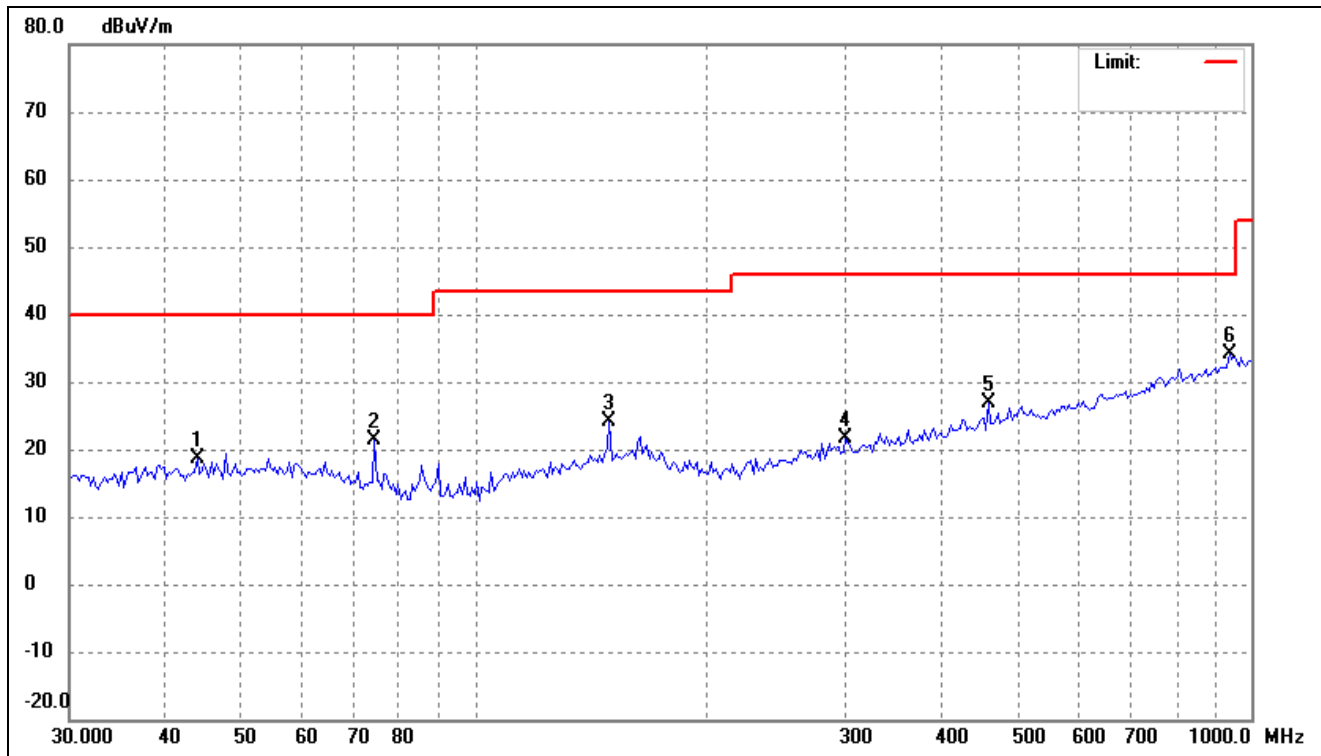


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.8452	27.91	-9.16	18.75	40.00	-21.25	-	-	peak
2	74.2696	33.34	-11.92	21.42	40.00	-18.58	-	-	peak
3	148.9175	33.07	-8.91	24.16	43.50	-19.34	-	-	peak
4	300.6988	29.37	-7.73	21.64	46.00	-24.36	-	-	peak
5	458.3987	31.91	-4.93	26.98	46.00	-19.02	-	-	peak
6	938.7139	31.50	2.72	34.22	46.00	-11.78	-	-	peak

➤ 5470-5725MHz


802.11a(worst case)

Test Channel	5500MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

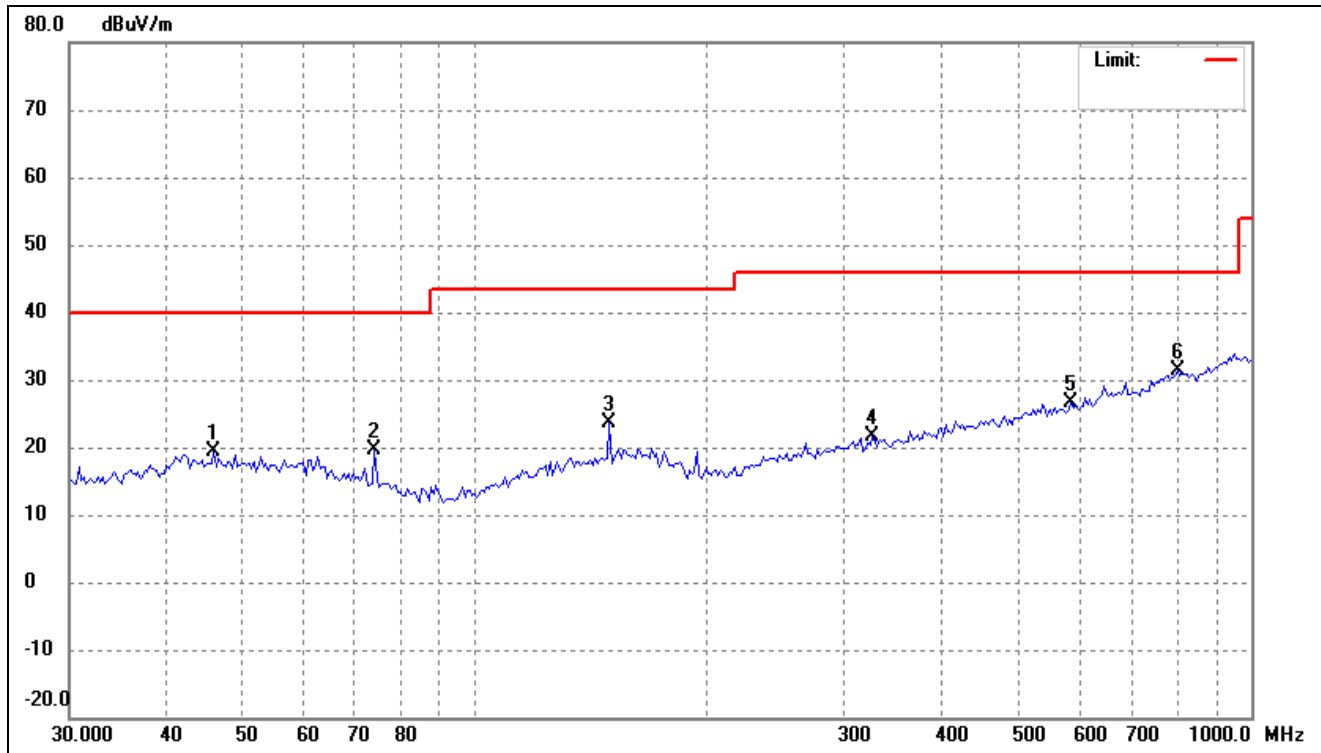


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0558	28.35	-9.03	19.32	40.00	-20.68	-	-	peak
2	74.2696	31.63	-11.92	19.71	40.00	-20.29	-	-	peak
3	148.9175	32.53	-8.91	23.62	43.50	-19.88	-	-	peak
4	324.8645	28.71	-7.18	21.53	46.00	-24.47	-	-	peak
5	586.2172	29.01	-2.48	26.53	46.00	-19.47	-	-	peak
6	804.2523	30.29	1.01	31.30	46.00	-14.70	-	-	peak

802.11a(worst case)			
Test Channel	5500MHz	Polarity:	Vertical

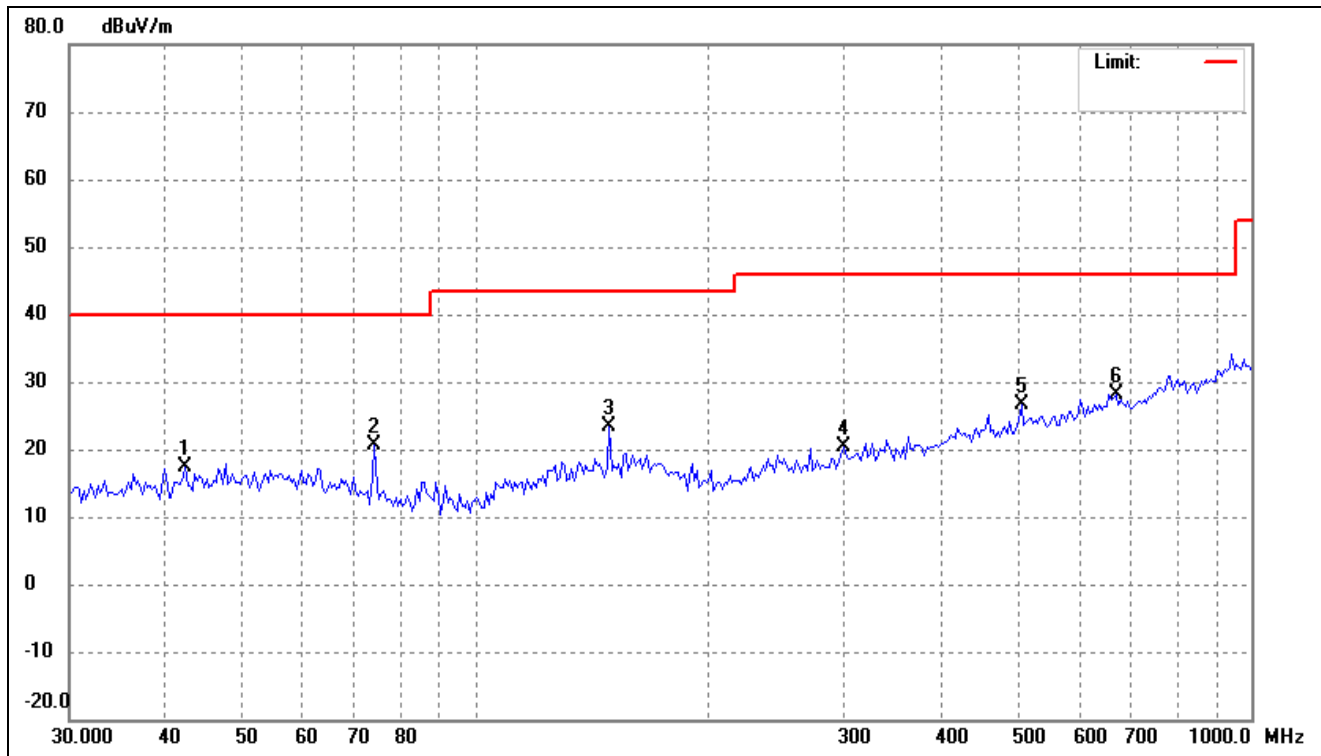


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.3314	26.78	-9.34	17.44	40.00	-22.56	-	-	peak
2	74.2696	32.51	-11.92	20.59	40.00	-19.41	-	-	peak
3	148.9175	32.38	-8.91	23.47	43.50	-20.03	-	-	peak
4	298.5932	28.24	-7.76	20.48	46.00	-25.52	-	-	peak
5	505.7891	30.89	-4.23	26.66	46.00	-19.34	-	-	peak
6	669.9523	29.29	-1.19	28.10	46.00	-17.90	-	-	peak

802.11a(worst case)			
Test Channel	5700MHz	Polarity:	Horizontal

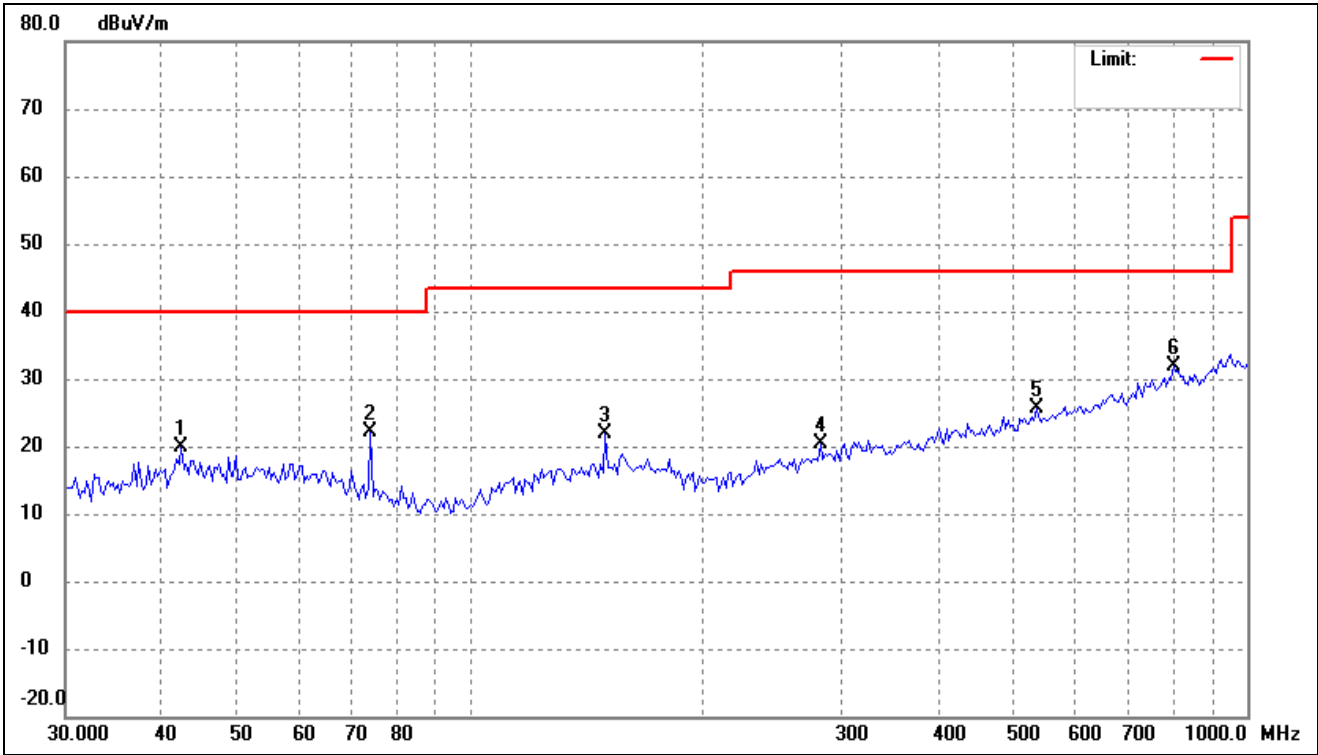

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.3314	29.29	-9.34	19.95	40.00	-20.05	-	-	peak
2	74.2696	33.97	-11.92	22.05	40.00	-17.95	-	-	peak
3	148.9175	30.75	-8.91	21.84	43.50	-21.66	-	-	peak
4	282.2702	28.53	-8.22	20.31	46.00	-25.69	-	-	peak
5	535.0377	29.47	-3.80	25.67	46.00	-20.33	-	-	peak
6	804.2523	30.76	1.01	31.77	46.00	-14.23	-	-	peak

802.11a(worst case)			
Test Channel	5700MHz	Polarity:	Vertical

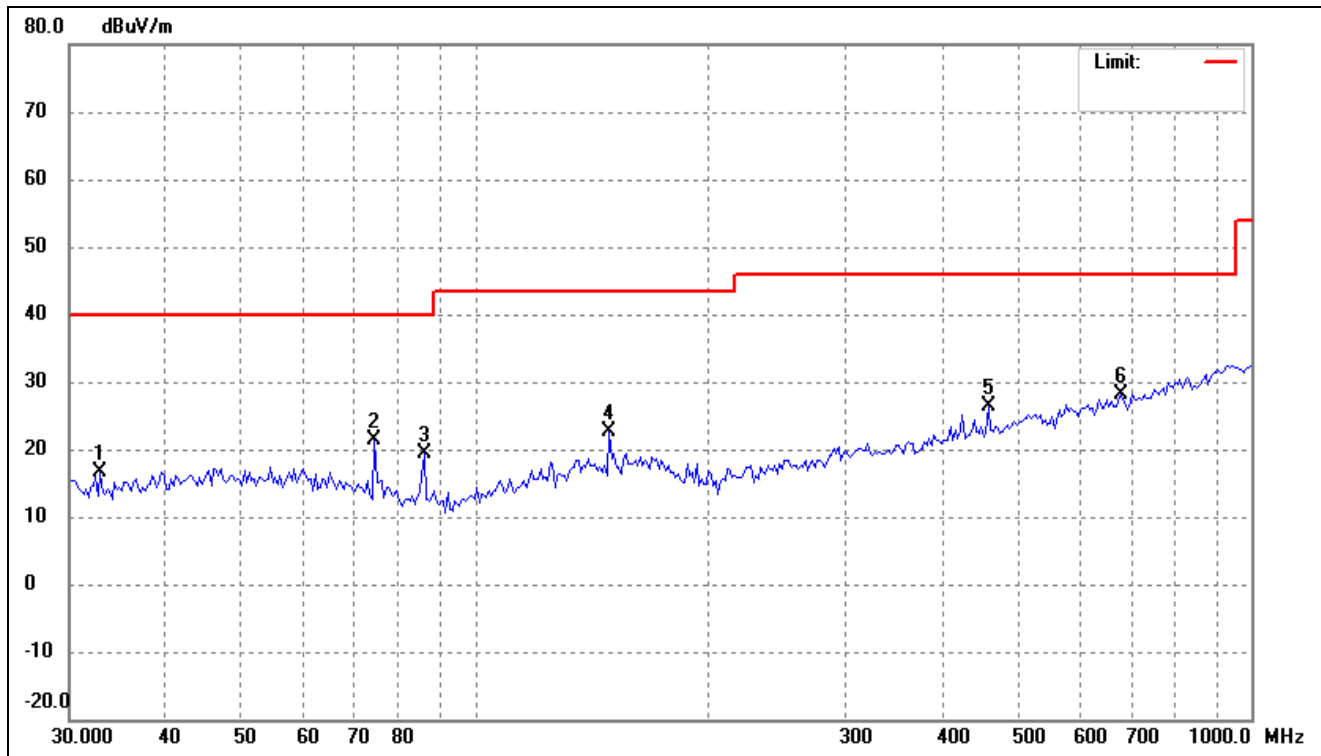


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.8697	26.95	-10.37	16.58	40.00	-23.42	-	-	peak
2	74.2696	33.23	-11.92	21.31	40.00	-18.69	-	-	peak
3	86.0796	33.41	-14.07	19.34	40.00	-20.66	-	-	peak
4	148.9175	31.49	-8.91	22.58	43.50	-20.92	-	-	peak
5	458.3987	31.31	-4.93	26.38	46.00	-19.62	-	-	peak
6	679.4346	29.27	-1.11	28.16	46.00	-17.84	-	-	peak

➤ 5725-5850MHz

802.11a(worst case)


Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

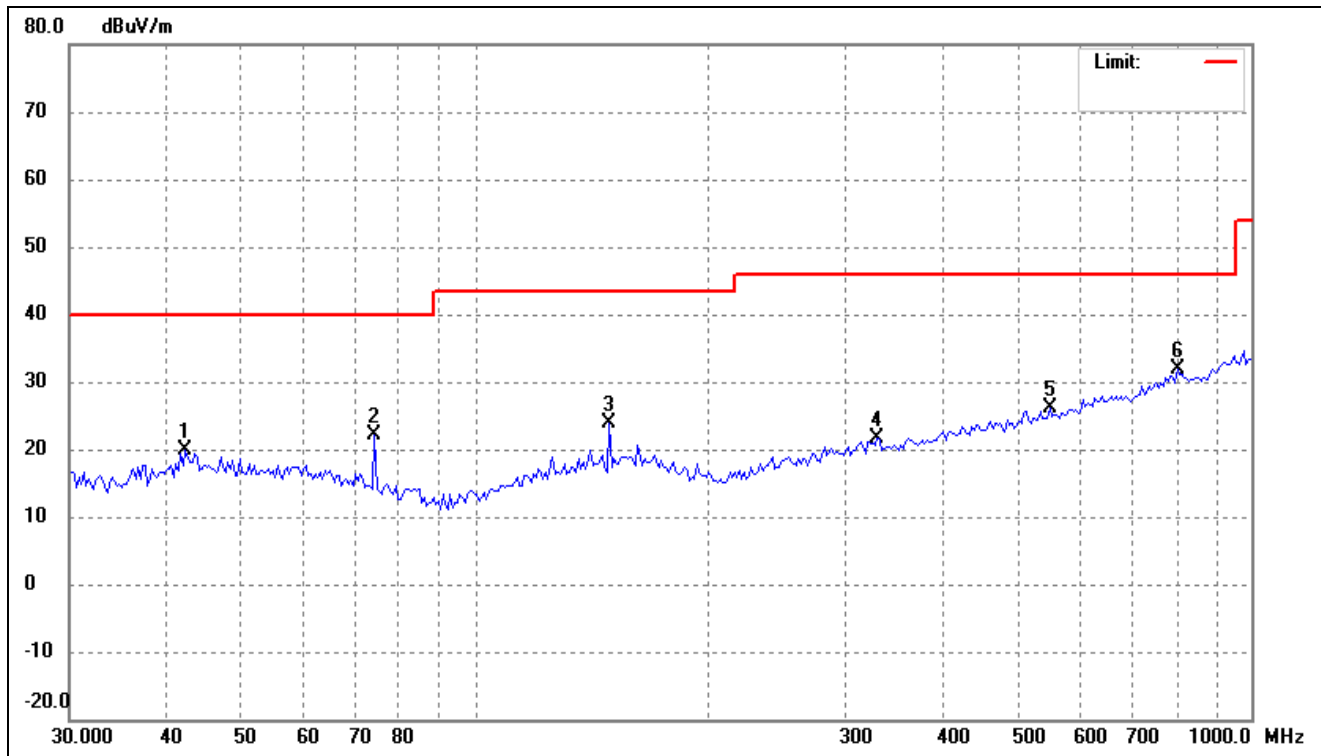

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.3314	29.29	-9.34	19.95	40.00	-20.05	-	-	peak
2	74.2696	33.97	-11.92	22.05	40.00	-17.95	-	-	peak
3	148.9175	32.69	-8.91	23.78	43.50	-19.72	-	-	peak
4	329.4625	28.78	-7.12	21.66	46.00	-24.34	-	-	peak
5	550.2902	29.93	-3.78	26.15	46.00	-19.85	-	-	peak
6	804.2523	30.76	1.01	31.77	46.00	-14.23	-	-	peak


802.11a(worst case)

Test Channel	5745MHz	Polarity:	Vertical
--------------	---------	-----------	----------

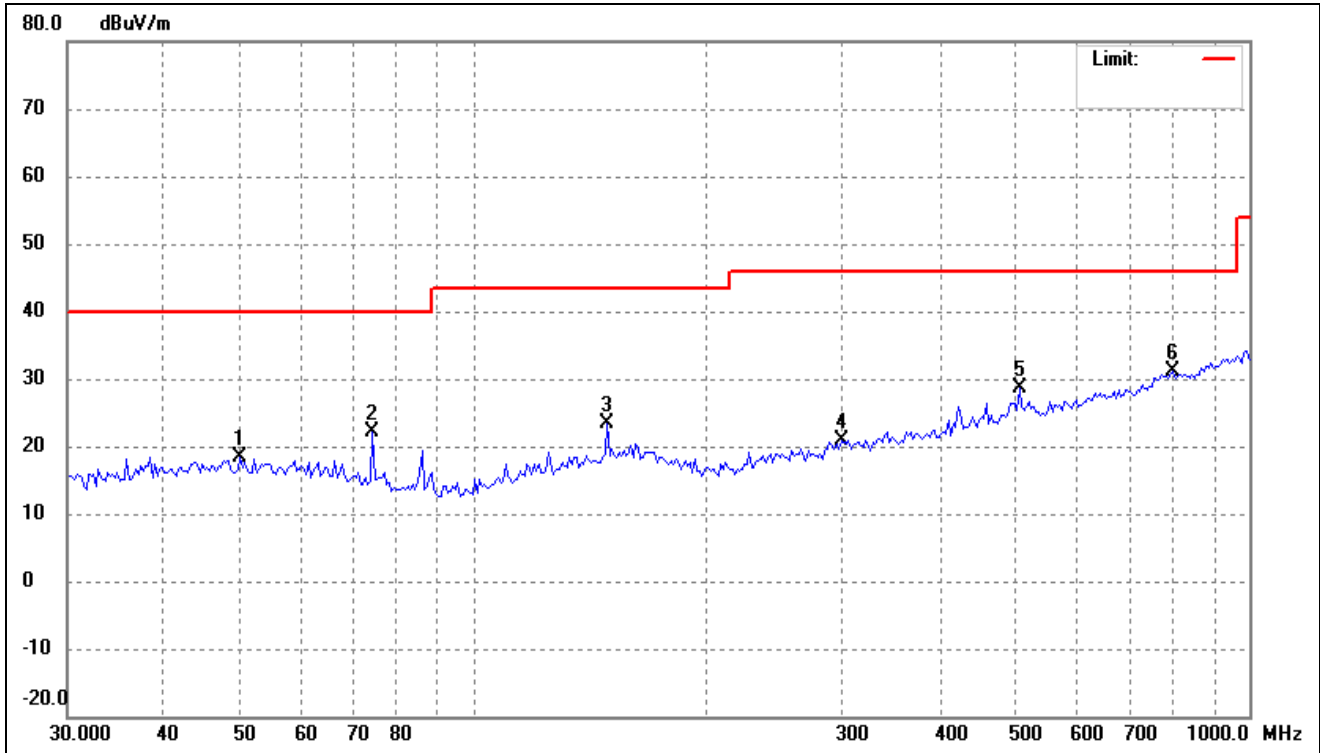


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.1080	27.27	-8.98	18.29	40.00	-21.71	-	-	peak
2	74.2696	33.99	-11.92	22.07	40.00	-17.93	-	-	peak
3	148.9175	32.40	-8.91	23.49	43.50	-20.01	-	-	peak
4	298.5932	28.62	-7.76	20.86	46.00	-25.14	-	-	peak
5	505.7891	32.85	-4.23	28.62	46.00	-17.38	-	-	peak
6	798.6205	30.08	0.99	31.07	46.00	-14.93	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

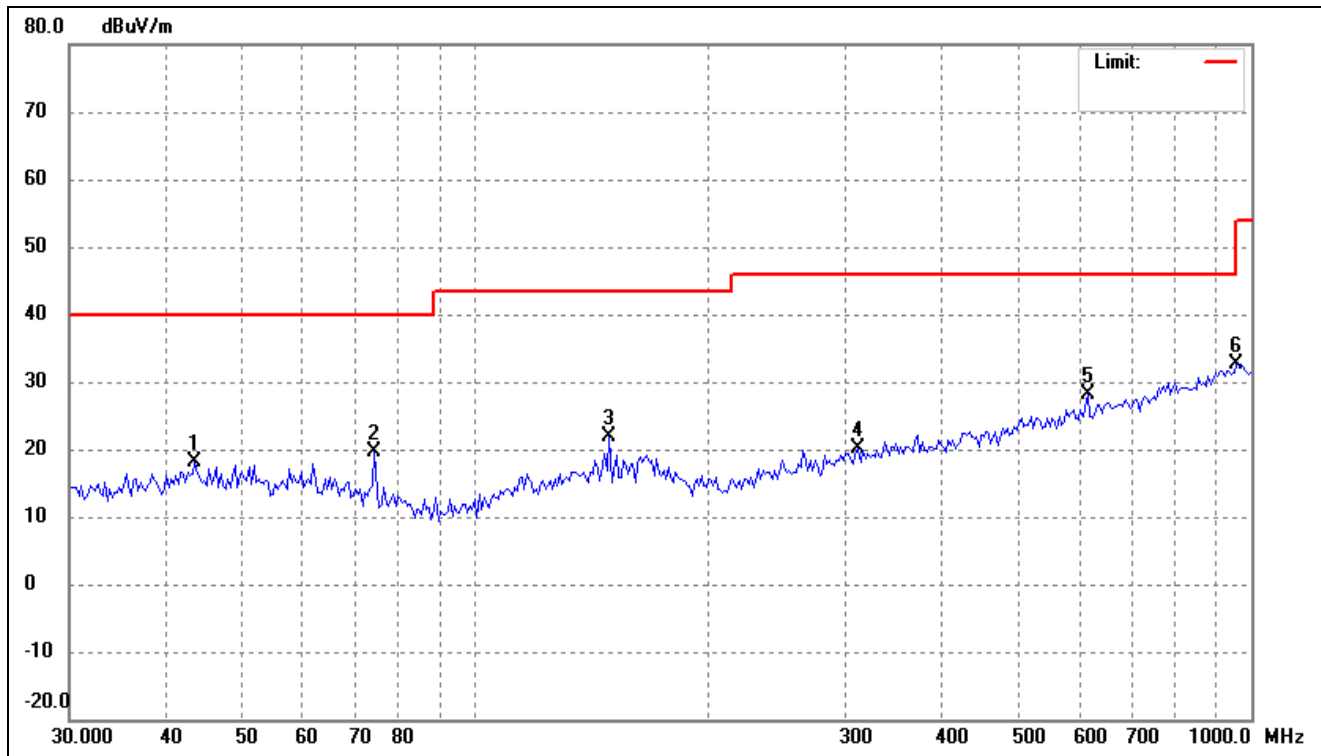

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5381	27.40	-9.20	18.20	40.00	-21.80	-	-	peak
2	74.2696	31.65	-11.92	19.73	40.00	-20.27	-	-	peak
3	148.9175	30.72	-8.91	21.81	43.50	-21.69	-	-	peak
4	311.4519	27.66	-7.48	20.18	46.00	-25.82	-	-	peak
5	615.7743	30.13	-2.11	28.02	46.00	-17.98	-	-	peak
6	958.7135	29.54	2.97	32.51	46.00	-13.49	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

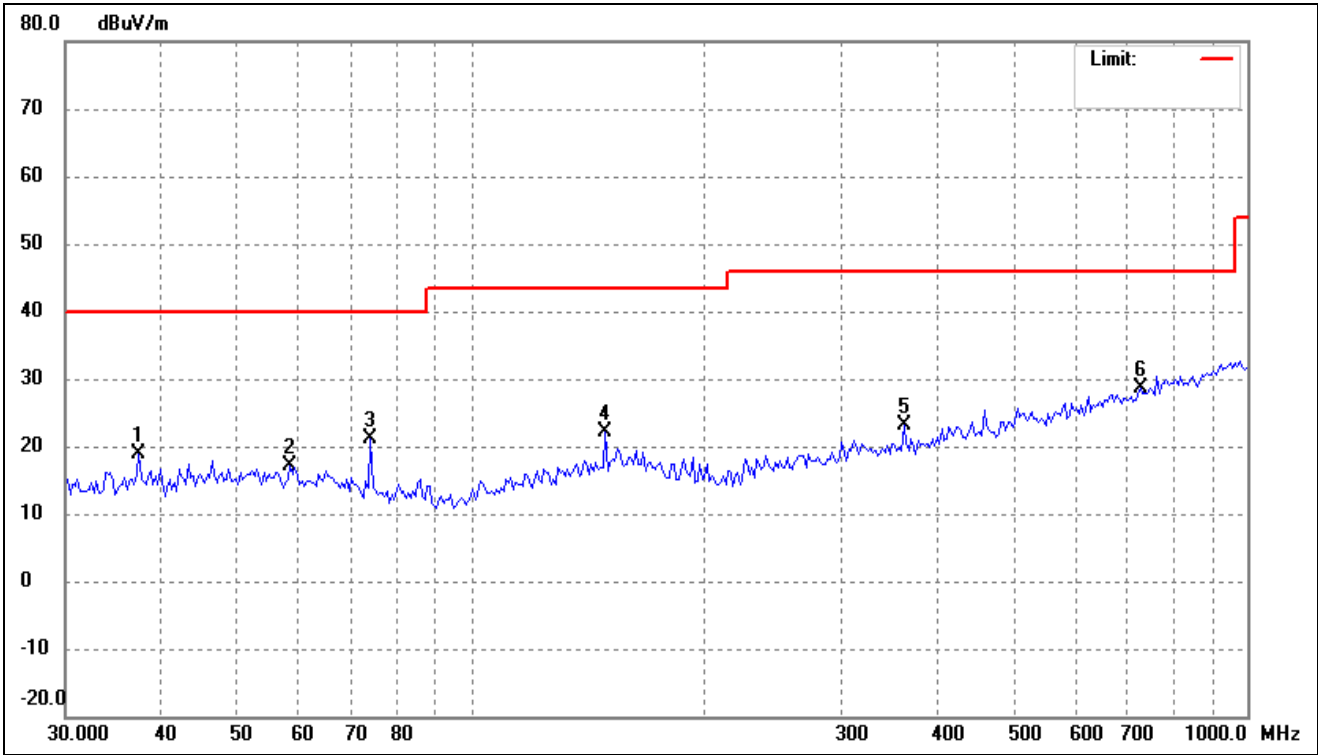


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.3017	28.74	-9.90	18.84	40.00	-21.16	-	-	peak
2	58.4855	26.46	-9.41	17.05	40.00	-22.95	-	-	peak
3	74.2696	32.98	-11.92	21.06	40.00	-18.94	-	-	peak
4	148.9175	31.09	-8.91	22.18	43.50	-21.32	-	-	peak
5	360.9775	30.04	-6.84	23.20	46.00	-22.80	-	-	peak
6	728.8971	29.04	-0.30	28.74	46.00	-17.26	-	-	peak

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

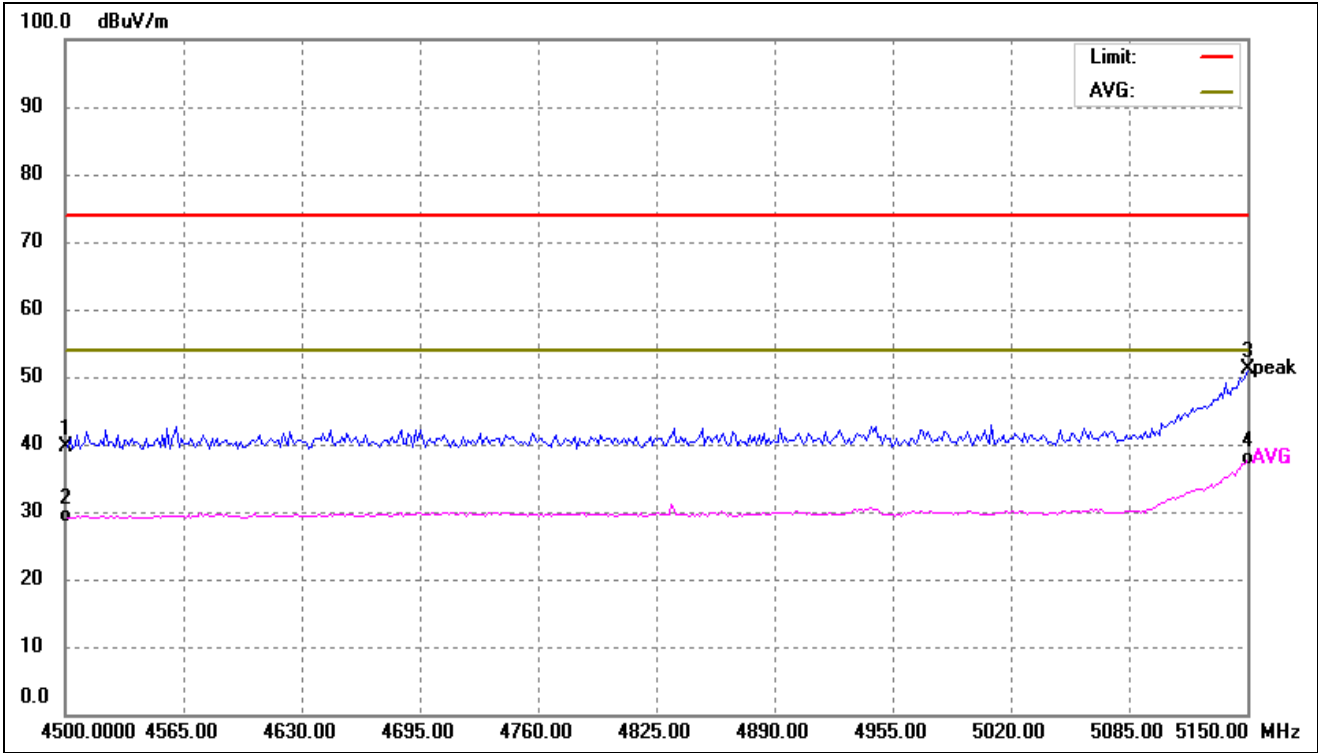


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	53.32	-13.60	39.72	74.00	-34.28	-	-	peak
2	4500.000	43.02	-13.60	29.42	54.00	-24.58	-	-	AVG
3	5150.000	63.36	-12.21	51.15	74.00	-22.85	-	-	peak
4	5150.000	50.02	-12.21	37.81	54.00	-16.19	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

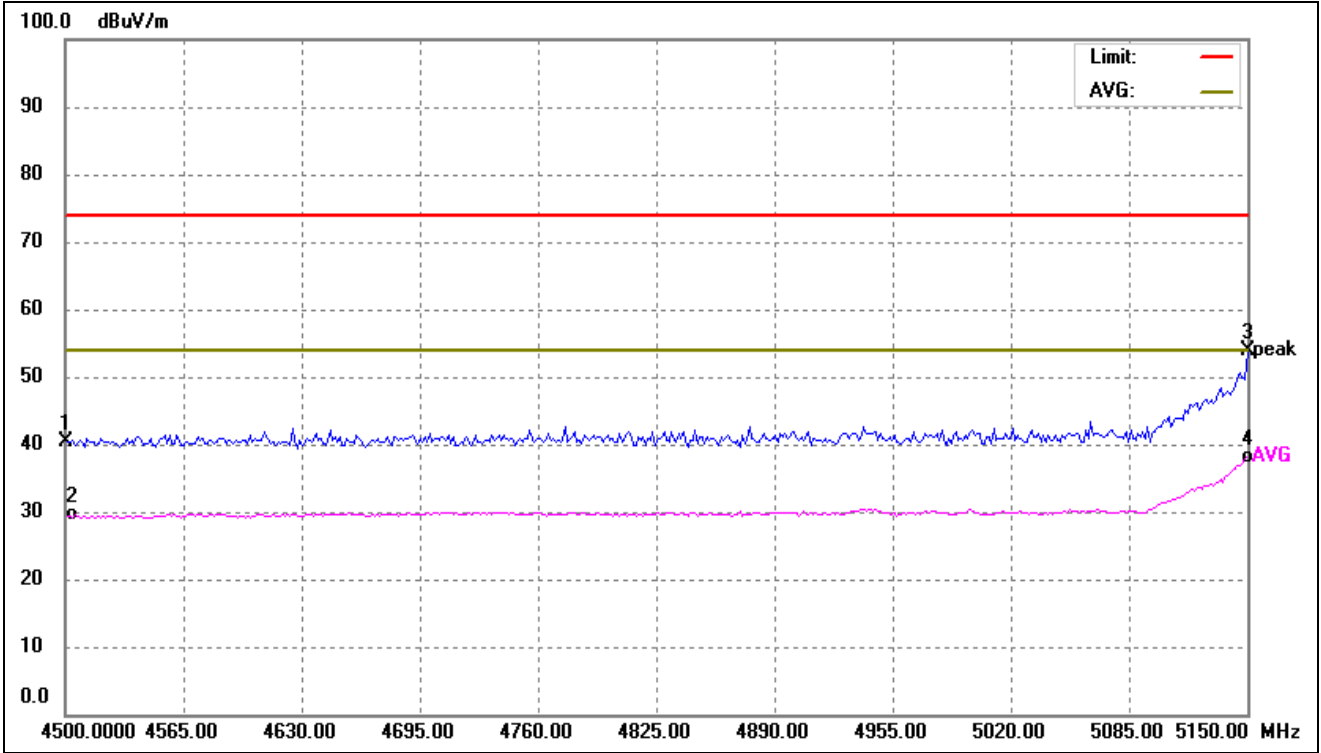


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	54.03	-13.60	40.43	74.00	-33.57	-	-	peak
2	4500.000	43.13	-13.60	29.53	54.00	-24.47	-	-	AVG
3	5150.000	66.11	-12.21	53.90	74.00	-20.10	-	-	peak
4	5150.000	50.33	-12.21	38.12	54.00	-15.88	-	-	AVG

802.11ax-HE20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

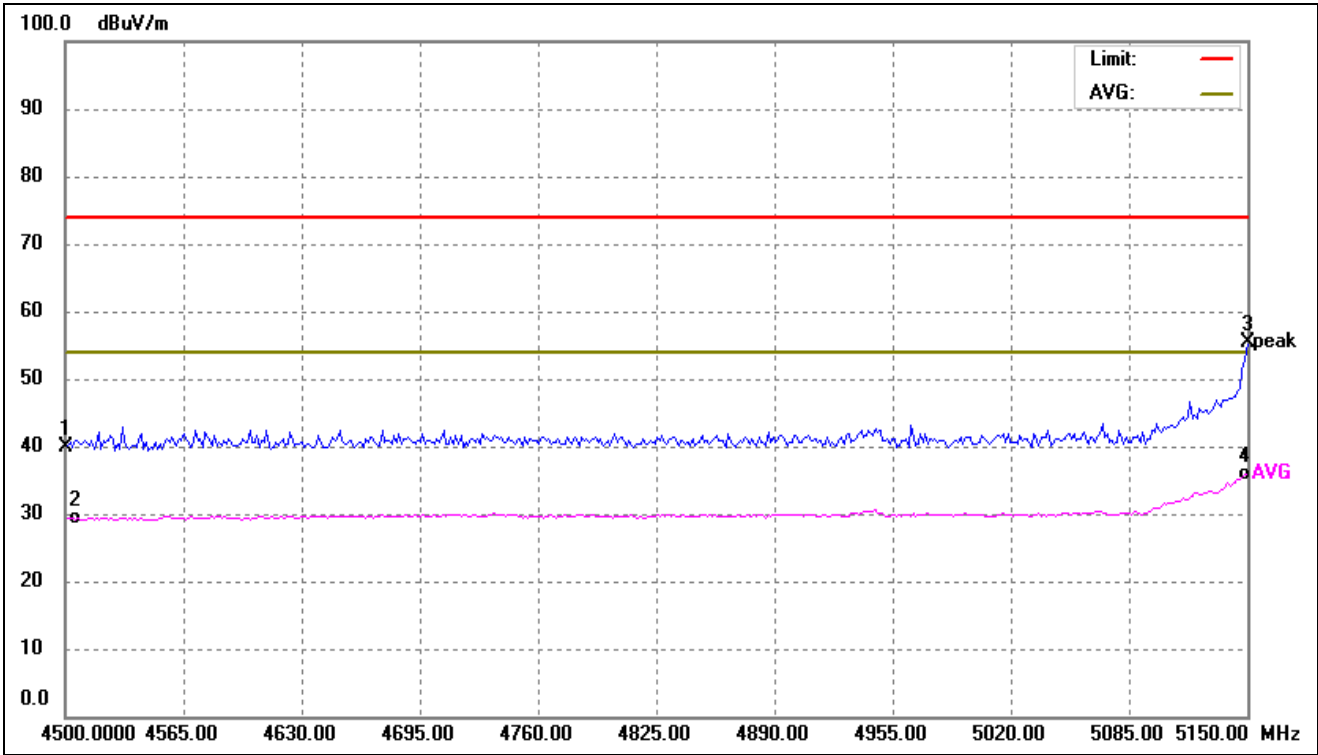


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	53.47	-13.60	39.87	74.00	-34.13	-	-	peak
2	4500.000	43.02	-13.60	29.42	54.00	-24.58	-	-	AVG
3	5150.000	67.55	-12.21	55.34	74.00	-18.66	-	-	peak
4	5150.000	48.08	-12.21	35.87	54.00	-18.13	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

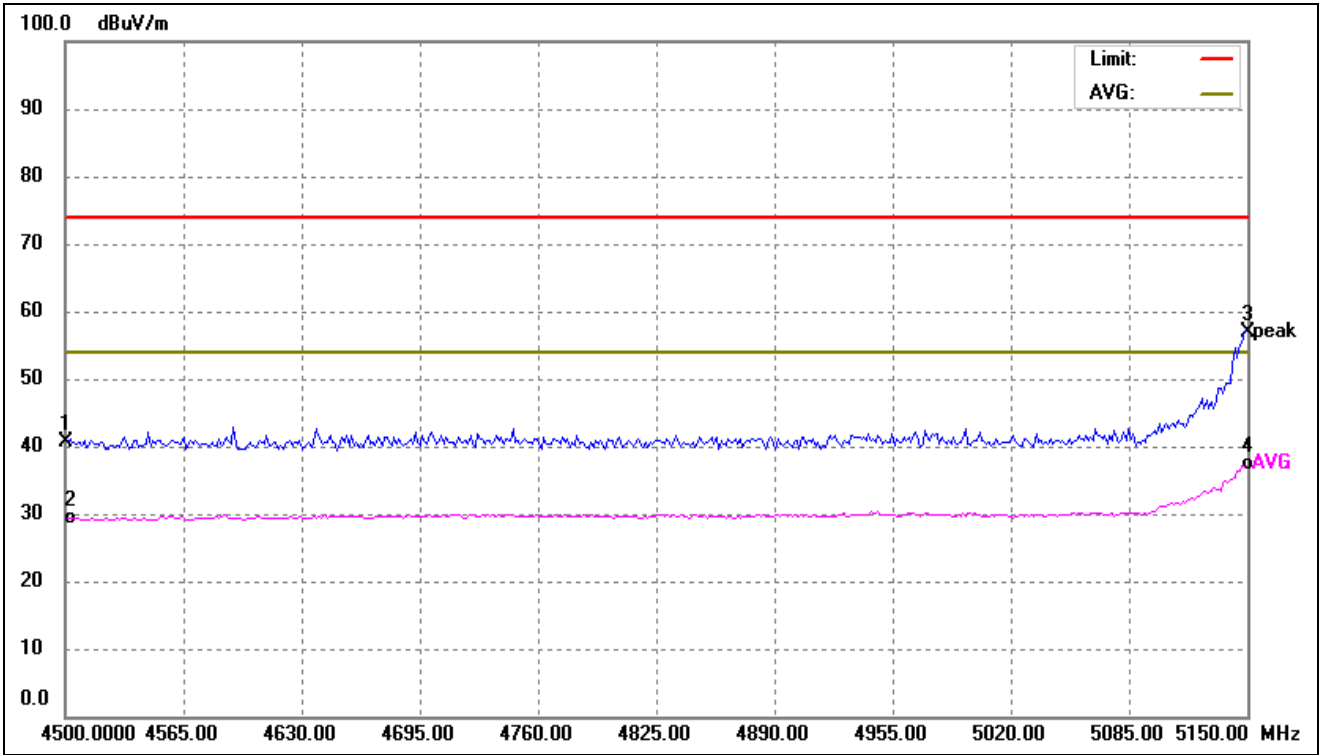

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	54.29	-13.60	40.69	74.00	-33.31	-	-	peak
2	4500.000	43.03	-13.60	29.43	54.00	-24.57	-	-	AVG
3	5150.000	69.18	-12.21	56.97	74.00	-17.03	-	-	peak
4	5150.000	49.47	-12.21	37.26	54.00	-16.74	-	-	AVG

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

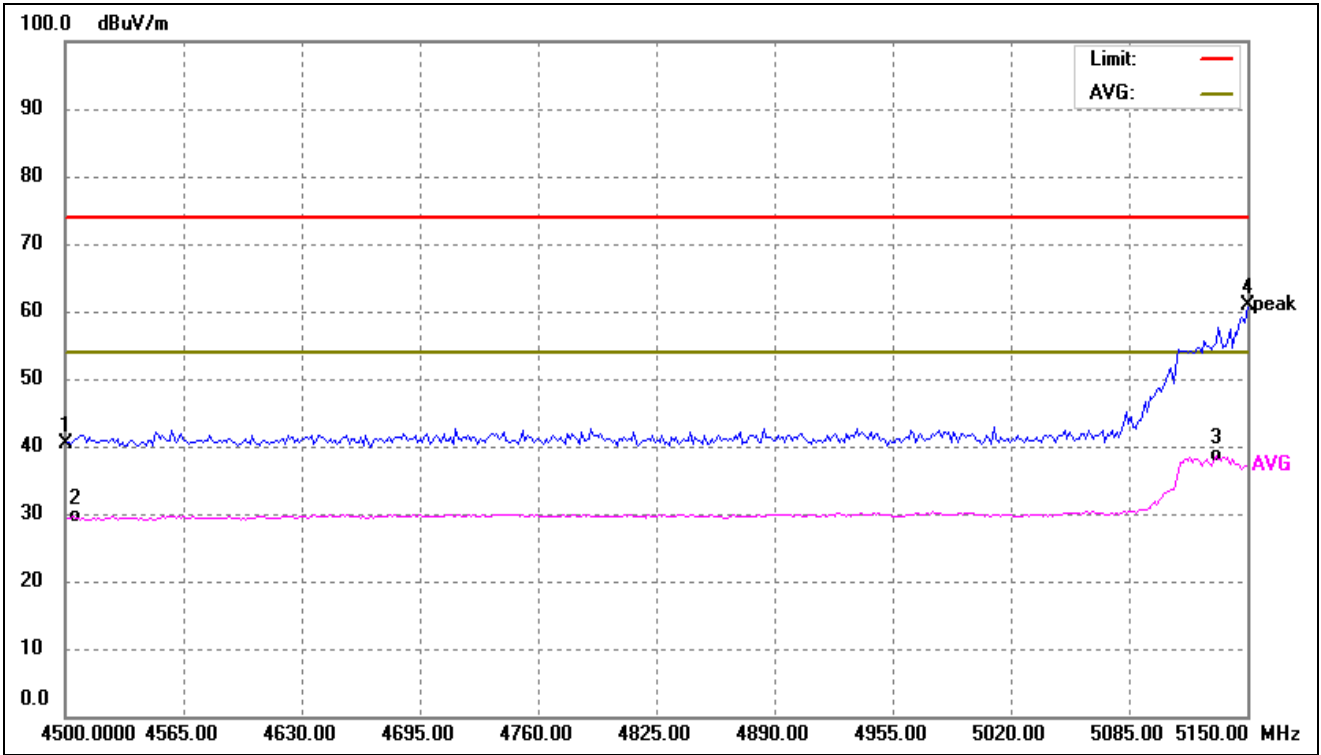


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	54.03	-13.60	40.43	74.00	-33.57	-	-	peak
2	4500.000	43.23	-13.60	29.63	54.00	-24.37	-	-	AVG
3	5133.066	50.86	-12.31	38.55	54.00	-15.45	-	-	AVG
4	5150.000	73.17	-12.21	60.96	74.00	-13.04	-	-	peak

Band 2


802.11a- Restricted Bandedge

Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------

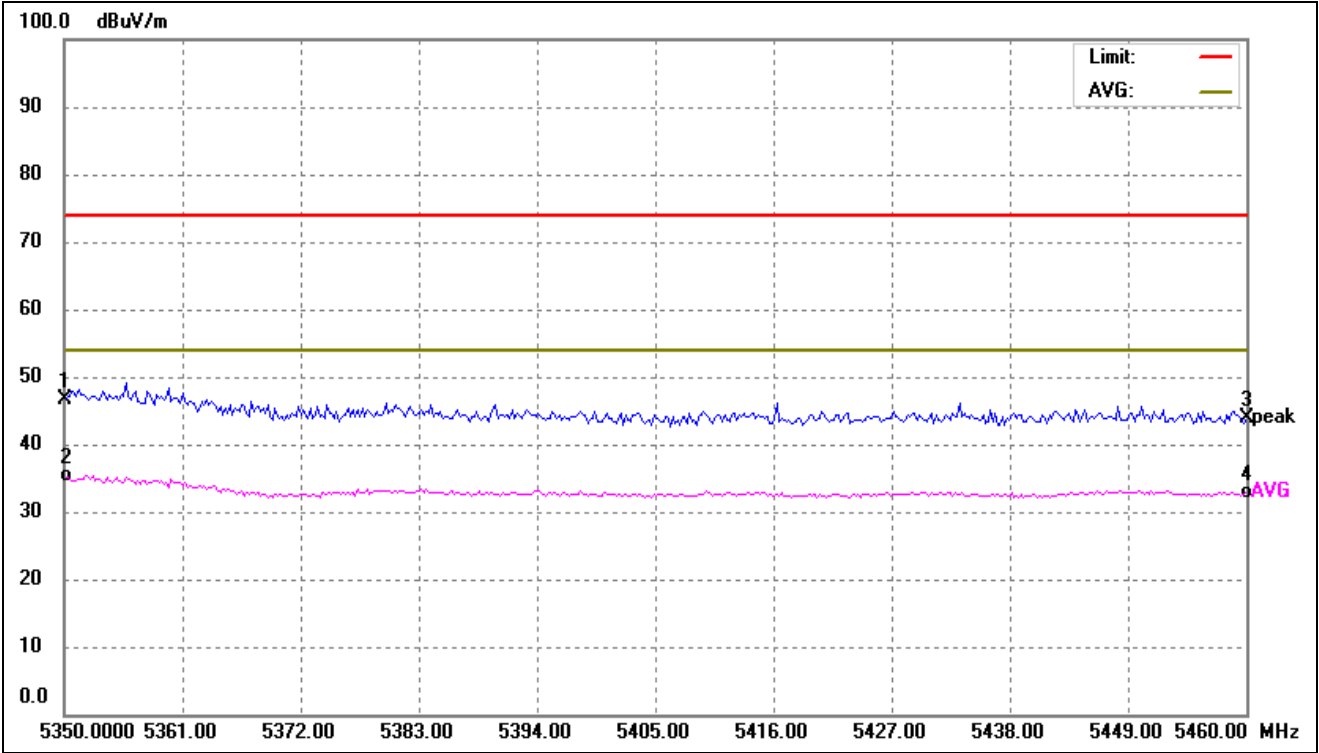


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	57.76	-11.17	46.59	74.00	-27.41	-	-	peak
2	5350.000	46.59	-11.17	35.42	54.00	-18.58	-	-	AVG
3	5460.000	54.51	-10.61	43.90	74.00	-30.10	-	-	peak
4	5460.000	43.42	-10.61	32.81	54.00	-21.19	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

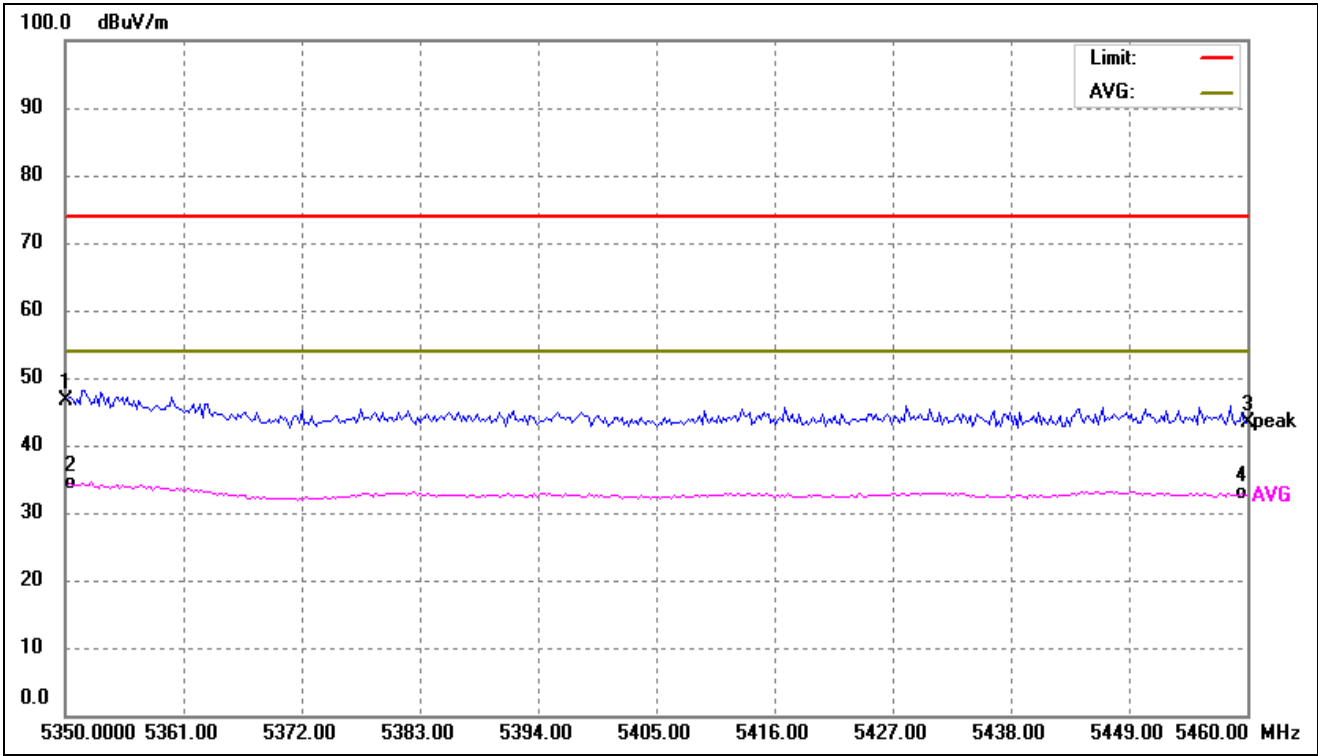


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	57.91	-11.17	46.74	74.00	-27.26	-	-	peak
2	5350.000	45.64	-11.17	34.47	54.00	-19.53	-	-	AVG
3	5460.000	53.98	-10.61	43.37	74.00	-30.63	-	-	peak
4	5460.000	43.51	-10.61	32.90	54.00	-21.10	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

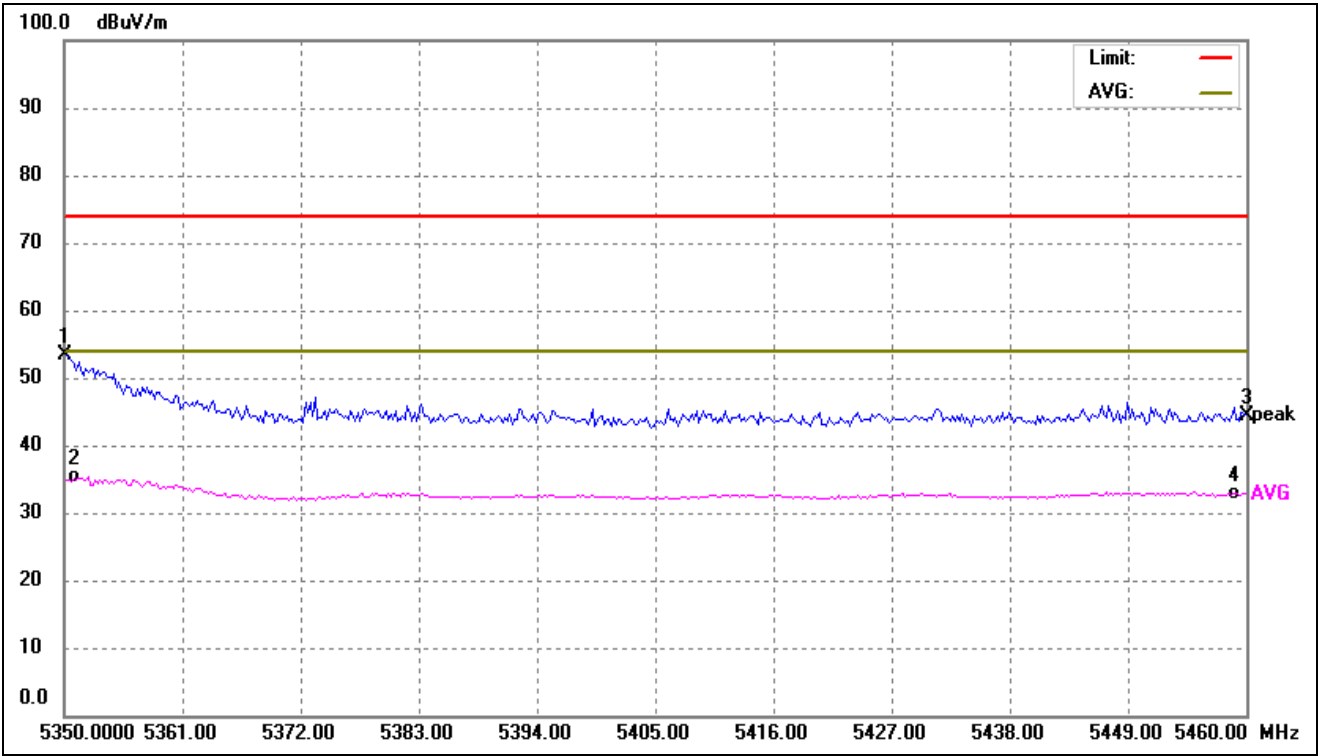


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5350.000	64.66	-11.17	53.49	74.00	-20.51	-	-	peak
2	5350.000	46.45	-11.17	35.28	54.00	-18.72	-	-	AVG
3	5460.000	55.09	-10.61	44.48	74.00	-29.52	-	-	peak
4	5460.000	43.61	-10.61	33.00	54.00	-21.00	-	-	AVG

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

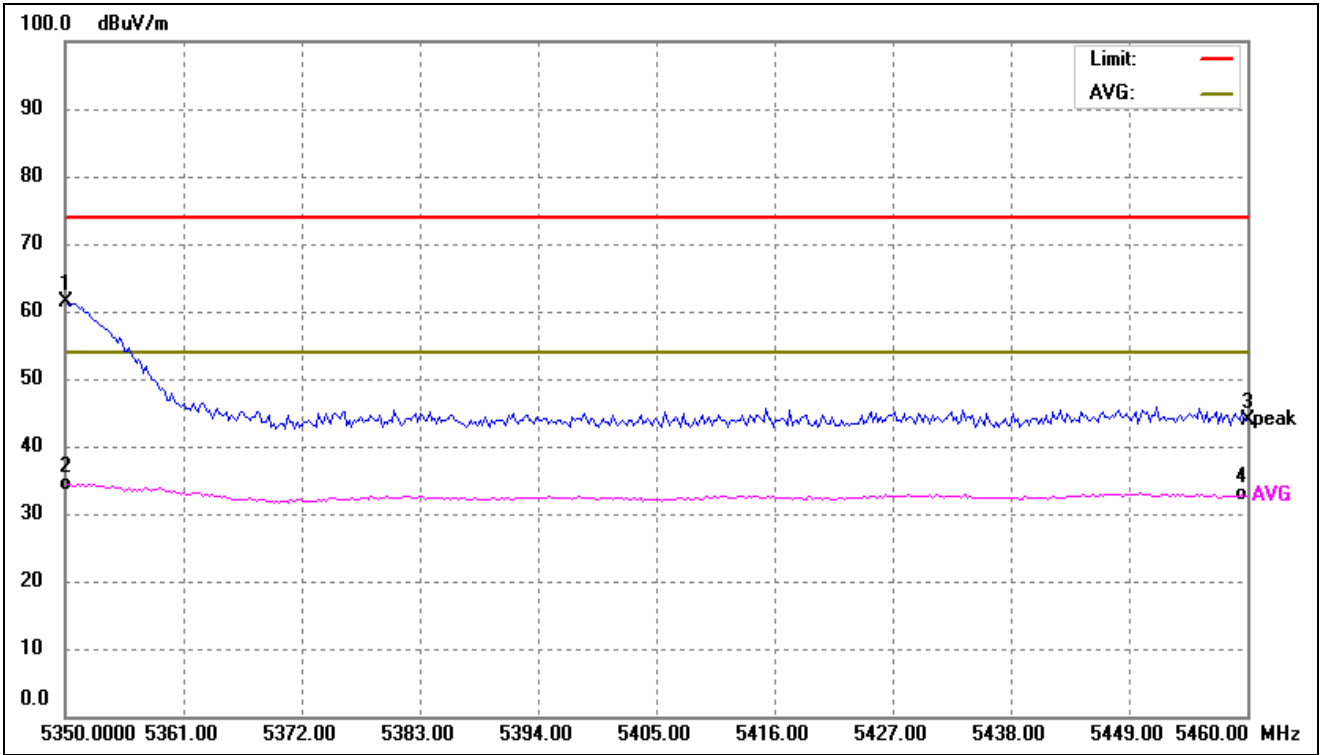

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	72.48	-11.17	61.31	74.00	-12.69	-	-	peak
2	5350.000	45.65	-11.17	34.48	54.00	-19.52	-	-	AVG
3	5460.000	54.43	-10.61	43.82	74.00	-30.18	-	-	peak
4	5460.000	43.42	-10.61	32.81	54.00	-21.19	-	-	AVG

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

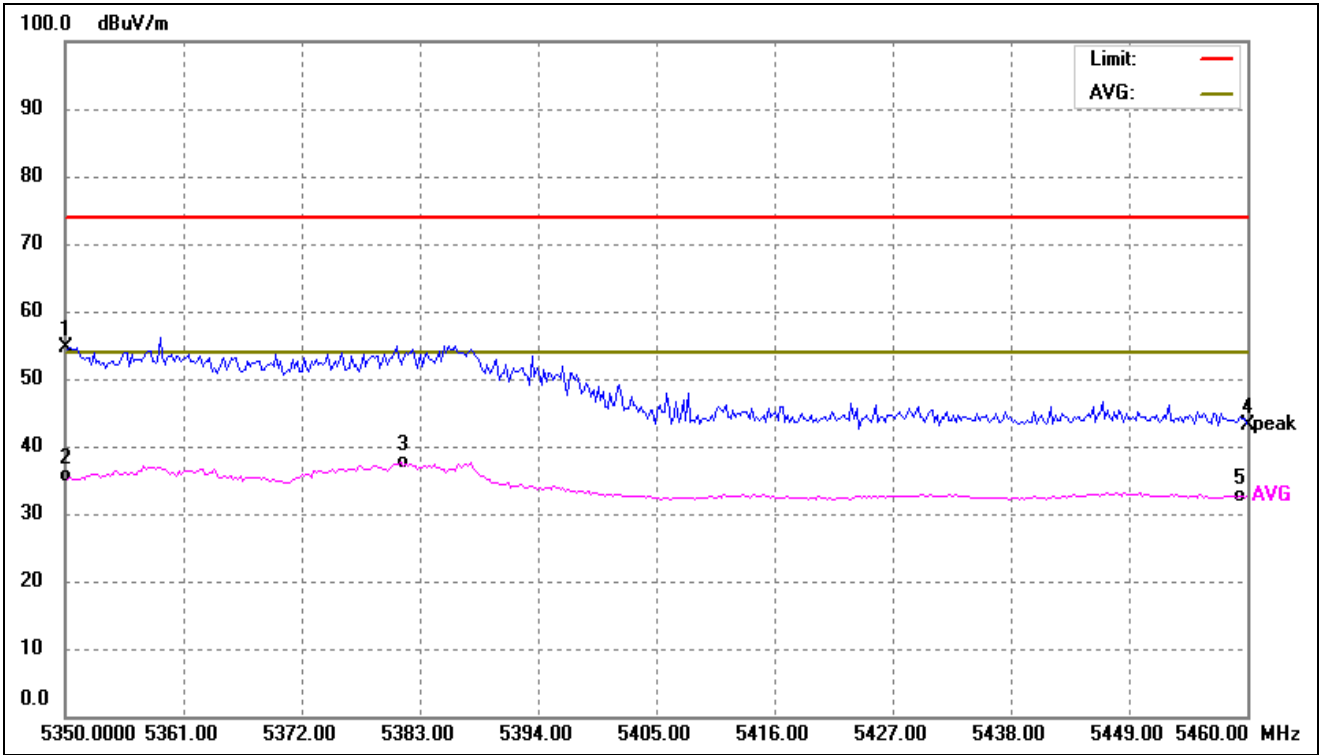


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	65.92	-11.17	54.75	74.00	-19.25	-	-	peak
2	5350.000	46.92	-11.17	35.75	54.00	-18.25	-	-	AVG
3	5381.303	48.57	-11.01	37.56	54.00	-16.44	-	-	AVG
4	5460.000	53.83	-10.61	43.22	74.00	-30.78	-	-	peak
5	5460.000	43.23	-10.61	32.62	54.00	-21.38	-	-	AVG

Band 3


802.11a- Restricted Bandedge

Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------

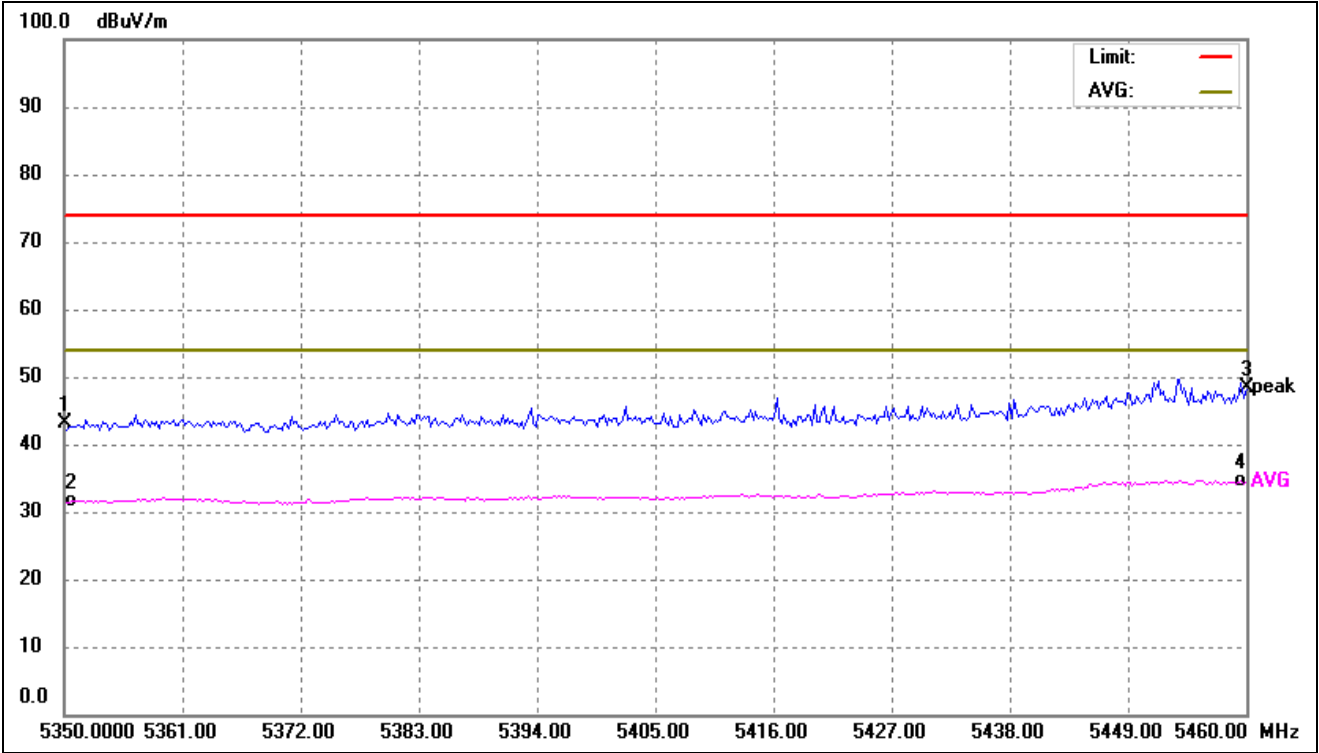


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	54.34	-11.17	43.17	74.00	-30.83	-	-	peak
2	5350.000	42.92	-11.17	31.75	54.00	-22.25	-	-	AVG
3	5460.000	59.04	-10.61	48.43	74.00	-25.57	-	-	peak
4	5460.000	45.26	-10.61	34.65	54.00	-19.35	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

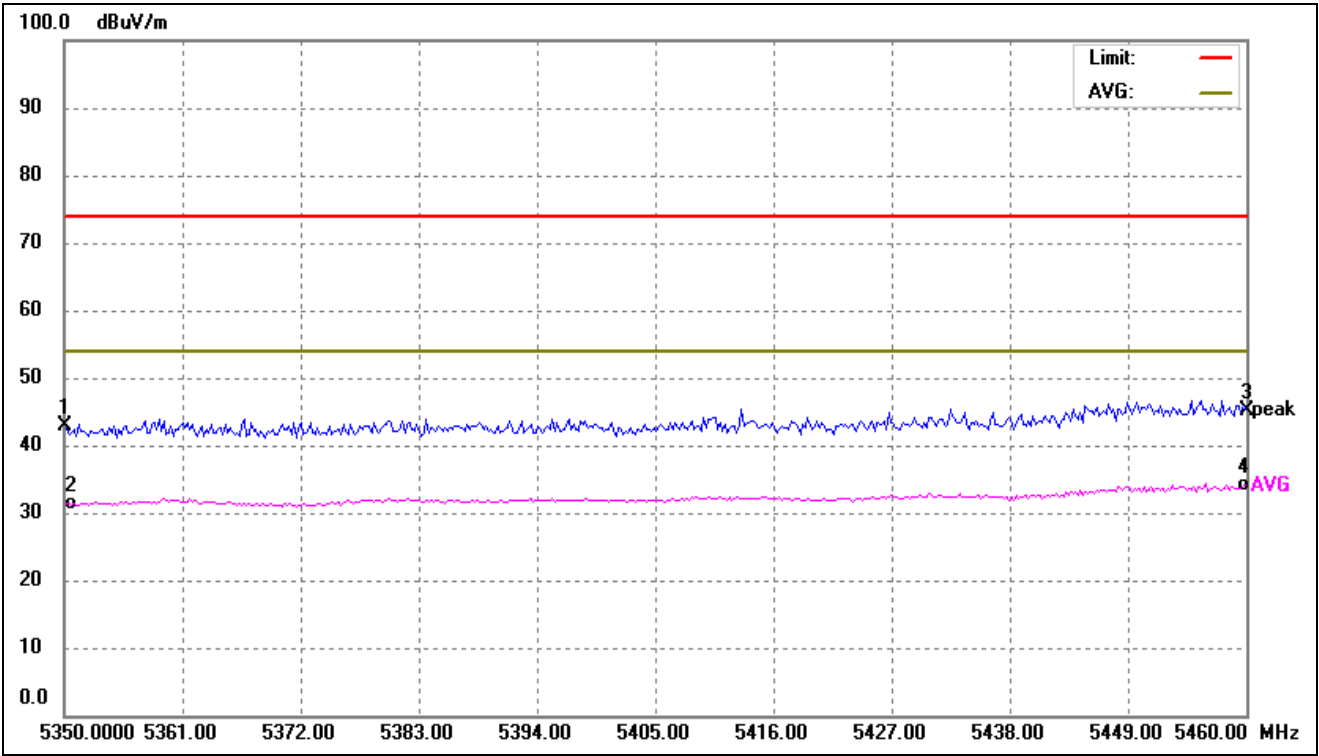


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	53.94	-11.17	42.77	74.00	-31.23	-	-	peak
2	5350.000	42.61	-11.17	31.44	54.00	-22.56	-	-	AVG
3	5460.000	55.68	-10.61	45.07	74.00	-28.93	-	-	peak
4	5460.000	44.69	-10.61	34.08	54.00	-19.92	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

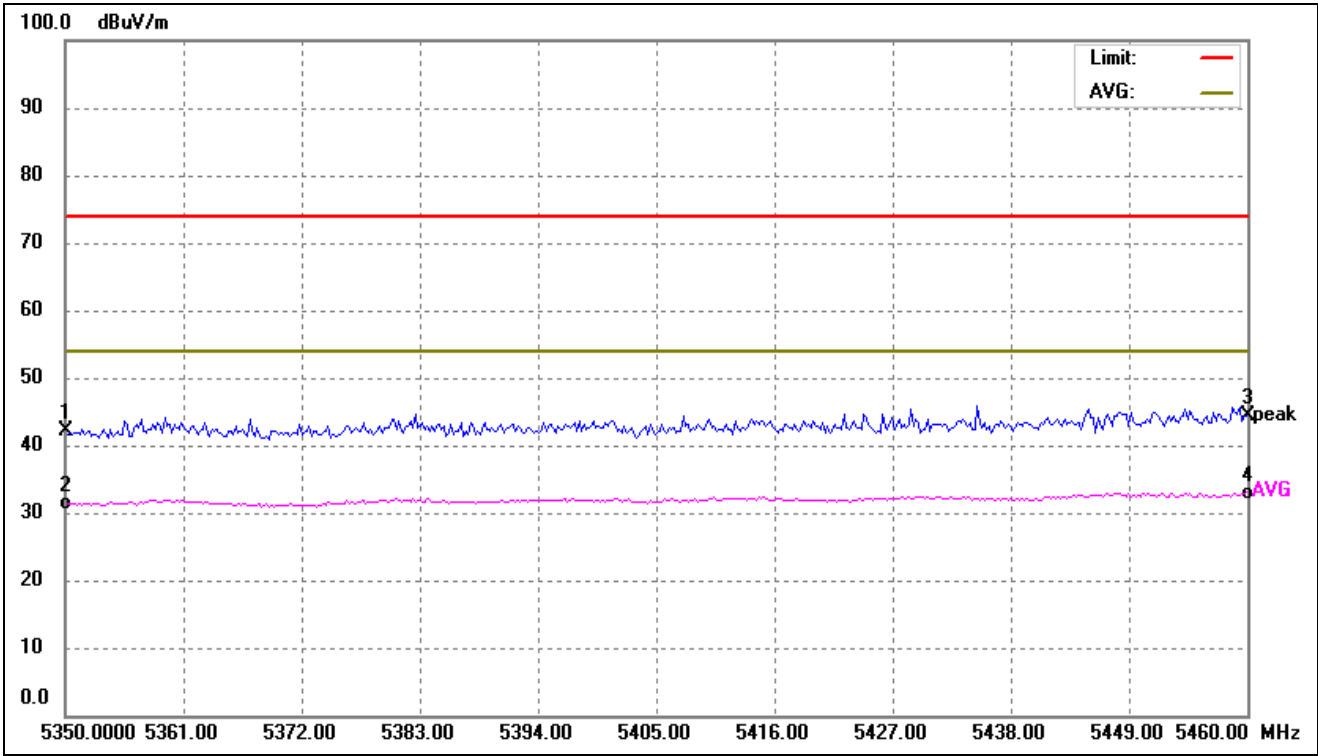


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	53.25	-11.17	42.08	74.00	-31.92	-	-	peak
2	5350.000	42.50	-11.17	31.33	54.00	-22.67	-	-	AVG
3	5460.000	54.99	-10.61	44.38	74.00	-29.62	-	-	peak
4	5460.000	43.42	-10.61	32.81	54.00	-21.19	-	-	AVG

802.11ax-HE40- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

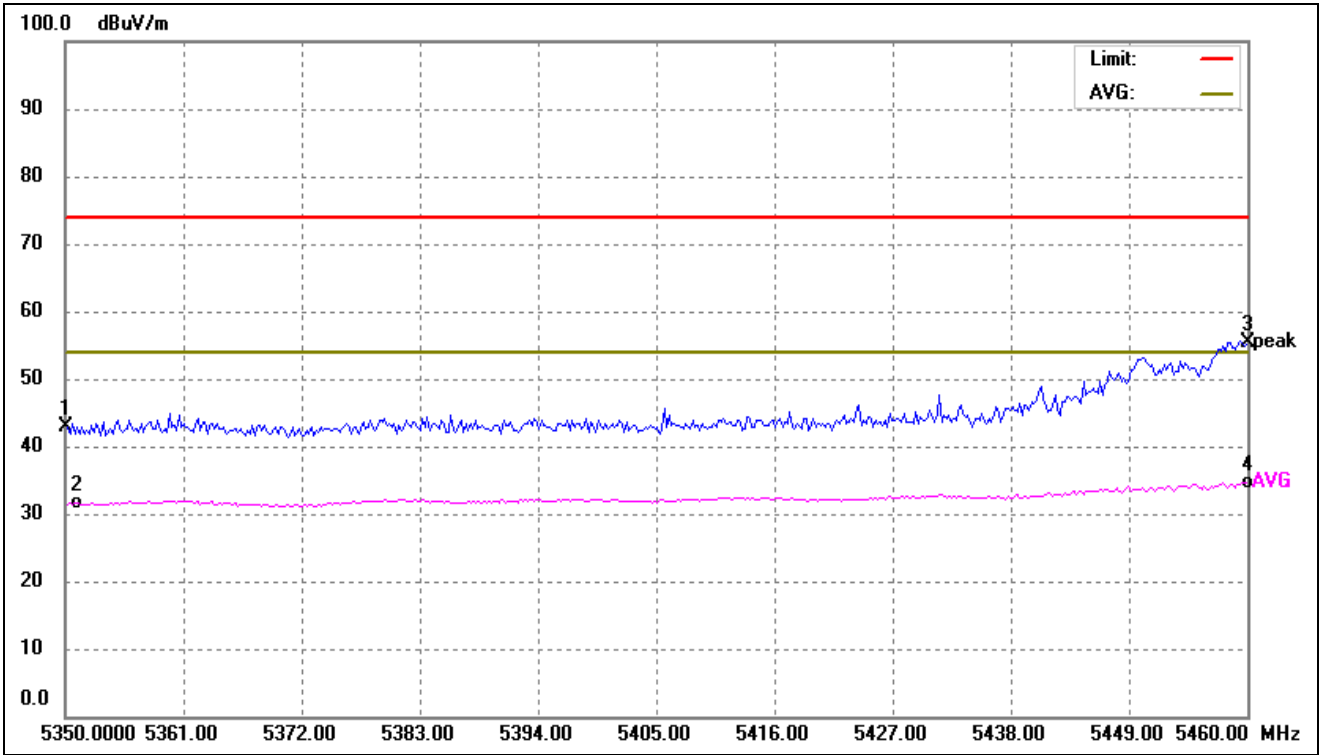

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	54.06	-11.17	42.89	74.00	-31.11	-	-	peak
2	5350.000	42.92	-11.17	31.75	54.00	-22.25	-	-	AVG
3	5460.000	65.90	-10.61	55.29	74.00	-18.71	-	-	peak
4	5460.000	45.34	-10.61	34.73	54.00	-19.27	-	-	AVG

802.11ax-HE80- Restricted Bandedge			
Test Channel	band 5.35-5.47GHz	Polarity:	Vertical(worst case)

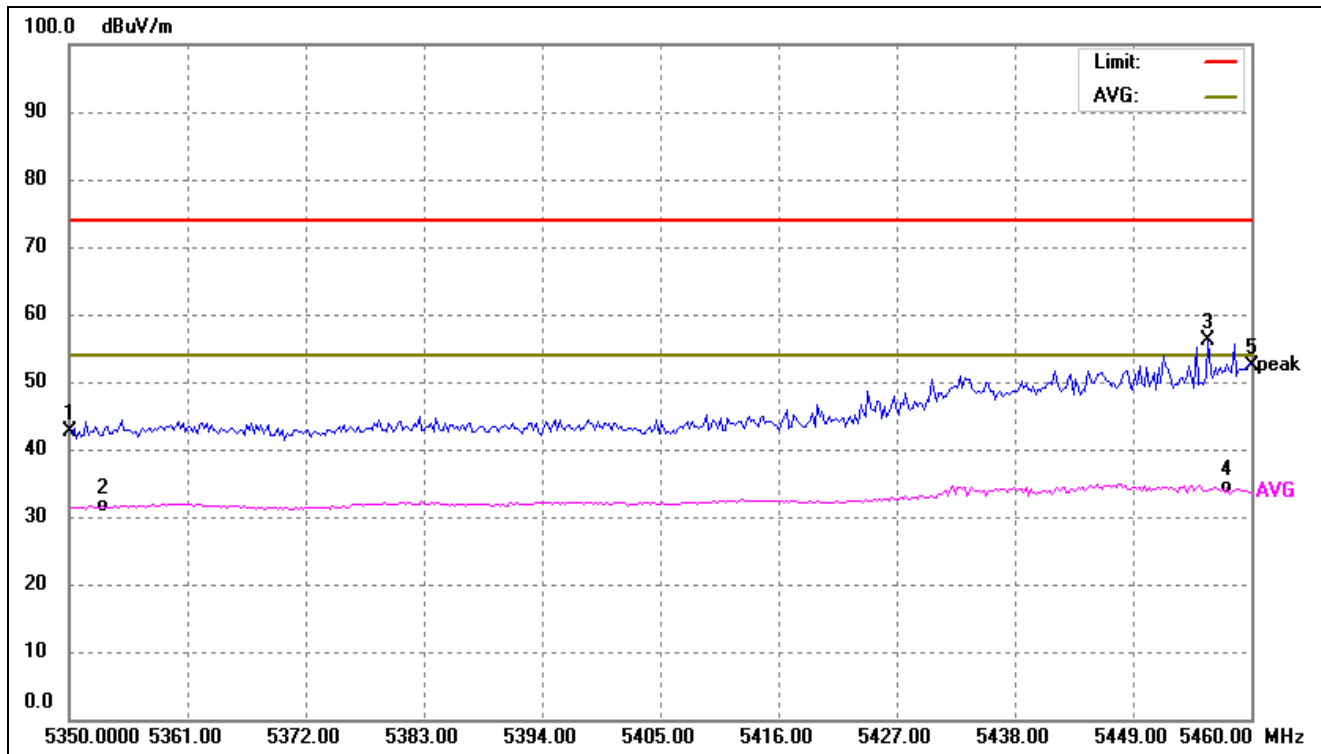

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	53.91	-11.17	42.74	74.00	-31.26	-	-	peak
2	5353.086	42.71	-11.16	31.55	54.00	-22.45	-	-	AVG
3	5456.032	66.69	-10.62	56.07	74.00	-17.93	-	-	peak
4	5457.796	44.94	-10.62	34.32	54.00	-19.68	-	-	AVG
5	5460.000	62.95	-10.61	52.34	74.00	-21.66	-	-	peak

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	48.24	-4.22	44.02	74	-29.98	H	PK
10360	45.57	-4.22	41.35	54	-12.65	H	AV
10360	52.58	-4.22	48.36	74	-25.64	V	PK
10360	50.58	-4.22	46.36	54	-7.64	V	AV
Middle Channel (5200MHz)							
10400	47.76	-4.19	43.57	74	-30.43	H	PK
10400	45.70	-4.19	41.51	54	-12.49	H	AV
10400	54.48	-4.19	50.29	74	-23.71	V	PK
10400	50.96	-4.19	46.77	54	-7.23	V	AV
High Channel (5240MHz)							
10480	49.56	-4.16	45.40	74	-28.60	H	PK
10480	47.74	-4.16	43.58	54	-10.42	H	AV
10480	54.56	-4.16	50.40	74	-23.60	V	PK
10480	50.91	-4.16	46.75	54	-7.25	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5260MHz)							
10520	48.46	-4.14	44.32	74	-29.68	H	PK
10520	45.24	-4.14	41.10	54	-12.90	H	AV
10520	52.21	-4.14	48.07	74	-25.93	V	PK
10520	49.48	-4.14	45.34	54	-8.66	V	AV
Middle Channel (5280MHz)							
10560	47.12	-4.12	43.00	74	-31.00	H	PK
10560	44.94	-4.12	40.82	54	-13.18	H	AV
10560	54.14	-4.12	50.02	74	-23.98	V	PK
10560	51.23	-4.12	47.11	54	-6.89	V	AV
High Channel (5320MHz)							
10640	46.89	-4.10	42.79	74	-31.21	H	PK
10640	45.08	-4.10	40.98	54	-13.02	H	AV
10640	54.91	-4.10	50.81	74	-23.19	V	PK
10640	51.74	-4.10	47.64	54	-6.36	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	48.24	-3.96	44.28	74	-29.72	H	PK
11000	45.18	-3.96	41.22	54	-12.78	H	AV
11000	53.93	-3.96	49.97	74	-24.03	V	PK
11000	49.55	-3.96	45.59	54	-8.41	V	AV
Middle Channel (5580MHz)							
11160	47.49	-3.40	44.09	74	-29.91	H	PK
11160	45.17	-3.40	41.77	54	-12.23	H	AV
11160	53.86	-3.40	50.46	74	-23.54	V	PK
11160	50.94	-3.40	47.54	54	-6.46	V	AV
High Channel (5700MHz)							
11400	48.58	-2.56	46.02	74	-27.98	H	PK
11400	45.69	-2.56	43.13	54	-10.87	H	AV
11400	52.61	-2.56	50.05	74	-23.95	V	PK
11400	50.38	-2.56	47.82	54	-6.18	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	48.17	-2.24	45.93	74	-28.07	H	PK
11490	45.57	-2.24	43.33	54	-10.67	H	AV
11490	52.70	-2.24	50.46	74	-23.54	V	PK
11490	49.57	-2.24	47.33	54	-6.67	V	AV
Middle Channel (5785MHz)							
11570	46.57	-1.79	44.78	74	-29.22	H	PK
11570	44.81	-1.79	43.02	54	-10.98	H	AV
11570	52.23	-1.79	50.44	74	-23.56	V	PK
11570	49.45	-1.79	47.66	54	-6.34	V	AV
High Channel (5825MHz)							
11650	48.02	-1.52	46.50	74	-27.50	H	PK
11650	44.41	-1.52	42.89	54	-11.11	H	AV
11650	51.66	-1.52	50.14	74	-23.86	V	PK
11650	49.94	-1.52	48.42	54	-5.58	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-33.63	-27
Highest	Above 5350	-40.33	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.42	-27
Highest	Above 5350	-34.36	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-34.49	-27
Highest	Above 5725	-37.52	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.29	-27
	5650 to 5700	-37.48	-27 to -17
	5700 to 5720	-29.89	-17 to 15.6
	5720 to 5725	-17.77	15.6 to 27
Highest	5850 to 5855	-13.75	27 to 15.6
	5855 to 5875	-26.80	15.6 to -17
	5875 to 5925	-37.02	-17 to -27
	Above 5925	-42.75	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz, 5.850-5.895GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	47.24	-4.22	43.02	74	-30.98	H	PK
10360	44.60	-4.22	40.38	54	-13.62	H	AV
10360	52.79	-4.22	48.57	74	-25.43	V	PK
10360	49.20	-4.22	44.98	54	-9.02	V	AV
Middle Channel (5200MHz)							
10400	47.17	-4.19	42.98	74	-31.02	H	PK
10400	45.16	-4.19	40.97	54	-13.03	H	AV
10400	52.01	-4.19	47.82	74	-26.18	V	PK
10400	49.63	-4.19	45.44	54	-8.56	V	AV
High Channel (5240MHz)							
10480	47.18	-4.16	43.02	74	-30.98	H	PK
10480	44.83	-4.16	40.67	54	-13.33	H	AV
10480	52.55	-4.16	48.39	74	-25.61	V	PK
10480	49.86	-4.16	45.70	54	-8.30	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	47.24	-4.14	43.10	74	-30.90	H	PK
10520	44.82	-4.14	40.68	54	-13.32	H	AV
10520	52.43	-4.14	48.29	74	-25.71	V	PK
10520	49.26	-4.14	45.12	54	-8.88	V	AV
Middle Channel (5280MHz)							
10560	47.43	-4.12	43.31	74	-30.69	H	PK
10560	44.20	-4.12	40.08	54	-13.92	H	AV
10560	52.14	-4.12	48.02	74	-25.98	V	PK
10560	48.84	-4.12	44.72	54	-9.28	V	AV
High Channel (5320MHz)							
10640	46.96	-4.10	42.86	74	-31.14	H	PK
10640	44.96	-4.10	40.86	54	-13.14	H	AV
10640	51.92	-4.10	47.82	74	-26.18	V	PK
10640	50.40	-4.10	46.30	54	-7.70	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	46.58	-3.96	42.62	74	-31.38	H	PK
11000	45.02	-3.96	41.06	54	-12.94	H	AV
11000	52.28	-3.96	48.32	74	-25.68	V	PK
11000	49.85	-3.96	45.89	54	-8.11	V	AV
Middle Channel (5580MHz)							
11160	47.51	-3.40	44.11	74	-29.89	H	PK
11160	44.67	-3.40	41.27	54	-12.73	H	AV
11160	51.83	-3.40	48.43	74	-25.57	V	PK
11160	49.97	-3.40	46.57	54	-7.43	V	AV
High Channel (5700MHz)							
11400	45.68	-2.56	43.12	74	-30.88	H	PK
11400	43.39	-2.56	40.83	54	-13.17	H	AV
11400	51.04	-2.56	48.48	74	-25.52	V	PK
11400	48.15	-2.56	45.59	54	-8.41	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	46.11	-2.24	43.87	74	-30.13	H	PK
11490	44.28	-2.24	42.04	54	-11.96	H	AV
11490	51.06	-2.24	48.82	74	-25.18	V	PK
11490	48.11	-2.24	45.87	54	-8.13	V	AV
Middle Channel (5785MHz)							
11570	45.42	-1.79	43.63	74	-30.37	H	PK
11570	43.97	-1.79	42.18	54	-11.82	H	AV
11570	51.04	-1.79	49.25	74	-24.75	V	PK
11570	48.29	-1.79	46.50	54	-7.50	V	AV
High Channel (5825MHz)							
11650	46.37	-1.52	44.85	74	-29.15	H	PK
11650	44.24	-1.52	42.72	54	-11.28	H	AV
11650	51.89	-1.52	50.37	74	-23.63	V	PK
11650	48.54	-1.52	47.02	54	-6.98	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.21	-27
Highest	Above 5350	-40.95	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.02	-27
Highest	Above 5350	-33.76	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-31.69	-27
Highest	Above 5725	-35.53	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-43.72	-27
	5650 to 5700	-32.44	-27 to -17
	5700 to 5720	-28.52	-17 to 15.6
	5720 to 5725	-18.93	15.6 to 27
Highest	5850 to 5855	-15.04	27 to 15.6
	5855 to 5875	-28.34	15.6 to -17
	5875 to 5925	-34.56	-17 to -27
	Above 5925	-40.76	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz(802.11ac VHT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	47.30	-4.22	43.08	74	-30.92	H	PK
10360	45.05	-4.22	40.83	54	-13.17	H	AV
10360	51.80	-4.22	47.58	74	-26.42	V	PK
10360	49.32	-4.22	45.10	54	-8.90	V	AV
Middle Channel (5200MHz)							
10400	47.09	-4.19	42.90	74	-31.10	H	PK
10400	44.75	-4.19	40.56	54	-13.44	H	AV
10400	52.39	-4.19	48.20	74	-25.80	V	PK
10400	48.74	-4.19	44.55	54	-9.45	V	AV
High Channel (5240MHz)							
10480	46.95	-4.16	42.79	74	-31.21	H	PK
10480	44.84	-4.16	40.68	54	-13.32	H	AV
10480	52.68	-4.16	48.52	74	-25.48	V	PK
10480	49.96	-4.16	45.80	54	-8.20	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	47.30	-4.14	43.16	74	-30.84	H	PK
10520	45.43	-4.14	41.29	54	-12.71	H	AV
10520	52.57	-4.14	48.43	74	-25.57	V	PK
10520	49.95	-4.14	45.81	54	-8.19	V	AV
Middle Channel (5280MHz)							
10560	47.31	-4.12	43.19	74	-30.81	H	PK
10560	45.29	-4.12	41.17	54	-12.83	H	AV
10560	51.74	-4.12	47.62	74	-26.38	V	PK
10560	49.14	-4.12	45.02	54	-8.98	V	AV
High Channel (5320MHz)							
10640	47.19	-4.10	43.09	74	-30.91	H	PK
10640	45.04	-4.10	40.94	54	-13.06	H	AV
10640	52.78	-4.10	48.68	74	-25.32	V	PK
10640	50.03	-4.10	45.93	54	-8.07	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	47.10	-3.96	43.14	74	-30.86	H	PK
11000	44.49	-3.96	40.53	54	-13.47	H	AV
11000	51.60	-3.96	47.64	74	-26.36	V	PK
11000	49.67	-3.96	45.71	54	-8.29	V	AV
Middle Channel (5580MHz)							
11160	46.08	-3.40	42.68	74	-31.32	H	PK
11160	43.69	-3.40	40.29	54	-13.71	H	AV
11160	51.95	-3.40	48.55	74	-25.45	V	PK
11160	48.52	-3.40	45.12	54	-8.88	V	AV
High Channel (5700MHz)							
11400	45.46	-2.56	42.90	74	-31.10	H	PK
11400	43.88	-2.56	41.32	54	-12.68	H	AV
11400	51.14	-2.56	48.58	74	-25.42	V	PK
11400	48.07	-2.56	45.51	54	-8.49	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	46.08	-2.24	43.84	74	-30.16	H	PK
11490	43.65	-2.24	41.41	54	-12.59	H	AV
11490	51.68	-2.24	49.44	74	-24.56	V	PK
11490	48.90	-2.24	46.66	54	-7.34	V	AV
Middle Channel (5785MHz)							
11570	45.12	-1.79	43.33	74	-30.67	H	PK
11570	42.16	-1.79	40.37	54	-13.63	H	AV
11570	50.66	-1.79	48.87	74	-25.13	V	PK
11570	46.79	-1.79	45.00	54	-9.00	V	AV
High Channel (5825MHz)							
11650	44.79	-1.52	43.27	74	-30.73	H	PK
11650	42.84	-1.52	41.32	54	-12.68	H	AV
11650	50.92	-1.52	49.40	74	-24.60	V	PK
11650	46.68	-1.52	45.16	54	-8.84	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.92	-27
Highest	Above 5350	-38.33	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.62	-27
Highest	Above 5350	-33.64	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-33.97	-27
Highest	Above 5725	-36.26	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-41.33	-27
	5650 to 5700	-34.00	-27 to -17
	5700 to 5720	-26.14	-17 to 15.6
	5720 to 5725	-15.23	15.6 to 27
Highest	5850 to 5855	-12.41	27 to 15.6
	5855 to 5875	-24.64	15.6 to -17
	5875 to 5925	-32.13	-17 to -27
	Above 5925	-36.73	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz, 5.850-5.895GHz (802.11ax HE20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	46.27	-4.22	42.05	74	-31.95	H	PK
10360	43.76	-4.22	39.54	54	-14.46	H	AV
10360	52.16	-4.22	47.94	74	-26.06	V	PK
10360	48.92	-4.22	44.70	54	-9.30	V	AV
Middle Channel (5200MHz)							
10400	45.66	-4.19	41.47	74	-32.53	H	PK
10400	43.74	-4.19	39.55	54	-14.45	H	AV
10400	51.48	-4.19	47.29	74	-26.71	V	PK
10400	48.58	-4.19	44.39	54	-9.61	V	AV
High Channel (5240MHz)							
10480	46.19	-4.16	42.03	74	-31.97	H	PK
10480	43.66	-4.16	39.50	54	-14.50	H	AV
10480	51.42	-4.16	47.26	74	-26.74	V	PK
10480	48.01	-4.16	43.85	54	-10.15	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	45.02	-4.14	40.88	74	-33.12	H	PK
10520	43.09	-4.14	38.95	54	-15.05	H	AV
10520	50.87	-4.14	46.73	74	-27.27	V	PK
10520	48.06	-4.14	43.92	54	-10.08	V	AV
Middle Channel (5280MHz)							
10560	45.31	-4.12	41.19	74	-32.81	H	PK
10560	43.38	-4.12	39.26	54	-14.74	H	AV
10560	51.73	-4.12	47.61	74	-26.39	V	PK
10560	48.47	-4.12	44.35	54	-9.65	V	AV
High Channel (5320MHz)							
10640	45.38	-4.10	41.28	74	-32.72	H	PK
10640	43.01	-4.10	38.91	54	-15.09	H	AV
10640	50.63	-4.10	46.53	74	-27.47	V	PK
10640	48.28	-4.10	44.18	54	-9.82	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	46.58	-3.96	42.62	74	-31.38	H	PK
11000	44.12	-3.96	40.16	54	-13.84	H	AV
11000	51.08	-3.96	47.12	74	-26.88	V	PK
11000	48.74	-3.96	44.78	54	-9.22	V	AV
Middle Channel (5580MHz)							
11160	46.05	-3.40	42.65	74	-31.35	H	PK
11160	43.88	-3.40	40.48	54	-13.52	H	AV
11160	51.43	-3.40	48.03	74	-25.97	V	PK
11160	48.34	-3.40	44.94	54	-9.06	V	AV
High Channel (5700MHz)							
11400	46.67	-2.56	44.11	74	-29.89	H	PK
11400	43.94	-2.56	41.38	54	-12.62	H	AV
11400	51.40	-2.56	48.84	74	-25.16	V	PK
11400	47.81	-2.56	45.25	54	-8.75	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	45.35	-2.24	43.11	74	-30.89	H	PK
11490	42.92	-2.24	40.68	54	-13.32	H	AV
11490	50.19	-2.24	47.95	74	-26.05	V	PK
11490	48.01	-2.24	45.77	54	-8.23	V	AV
Middle Channel (5785MHz)							
11570	44.74	-1.79	42.95	74	-31.05	H	PK
11570	42.14	-1.79	40.35	54	-13.65	H	AV
11570	50.26	-1.79	48.47	74	-25.53	V	PK
11570	46.83	-1.79	45.04	54	-8.96	V	AV
High Channel (5825MHz)							
11650	44.45	-1.52	42.93	74	-31.07	H	PK
11650	42.35	-1.52	40.83	54	-13.17	H	AV
11650	50.22	-1.52	48.70	74	-25.30	V	PK
11650	47.00	-1.52	45.48	54	-8.52	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-33.92	-27
Highest	Above 5350	-42.03	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.53	-27
Highest	Above 5350	-32.32	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-33.31	-27
Highest	Above 5725	-34.78	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-43.13	-27
	5650 to 5700	-33.50	-27 to -17
	5700 to 5720	-27.66	-17 to 15.6
	5720 to 5725	-18.50	15.6 to 27
Highest	5850 to 5855	-15.37	27 to 15.6
	5855 to 5875	-27.54	15.6 to -17
	5875 to 5925	-34.70	-17 to -27
	Above 5925	-39.91	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz(802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	45.43	-4.21	41.22	74	-32.78	H	PK
10380	42.28	-4.21	38.07	54	-15.93	H	AV
10380	50.29	-4.21	46.08	74	-27.92	V	PK
10380	47.41	-4.21	43.20	54	-10.80	V	AV
High Channel (5230MHz)							
10460	45.51	-4.17	41.34	74	-32.66	H	PK
10460	42.12	-4.17	37.95	54	-16.05	H	AV
10460	50.09	-4.17	45.92	74	-28.08	V	PK
10460	47.85	-4.17	43.68	54	-10.32	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	45.16	-4.14	41.02	74	-32.98	H	PK
10540	43.21	-4.14	39.07	54	-14.93	H	AV
10540	49.97	-4.14	45.83	74	-28.17	V	PK
10540	47.55	-4.14	43.41	54	-10.59	V	AV
High Channel (5310MHz)							
10620	45.48	-4.10	41.38	74	-32.62	H	PK
10620	43.37	-4.10	39.27	54	-14.73	H	AV
10620	50.83	-4.10	46.73	74	-27.27	V	PK
10620	47.67	-4.10	43.57	54	-10.43	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	45.67	-3.89	41.78	74	-32.22	H	PK
11020	42.88	-3.89	38.99	54	-15.01	H	AV
11020	50.83	-3.89	46.94	74	-27.06	V	PK
11020	47.35	-3.89	43.46	54	-10.54	V	AV
Middle Channel (5550MHz)							
11100	45.20	-3.61	41.59	74	-32.41	H	PK
11100	43.11	-3.61	39.50	54	-14.50	H	AV
11100	50.82	-3.61	47.21	74	-26.79	V	PK
11100	47.80	-3.61	44.19	54	-9.81	V	AV
High Channel (5670MHz)							
11340	44.10	-2.77	41.33	74	-32.67	H	PK
11340	43.03	-2.77	40.26	54	-13.74	H	AV
11340	49.64	-2.77	46.87	74	-27.13	V	PK
11340	47.57	-2.77	44.80	54	-9.20	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	44.34	-2.19	42.15	74	-31.85	H	PK
11510	42.67	-2.19	40.48	54	-13.52	H	AV
11510	48.83	-2.19	46.64	74	-27.36	V	PK
11510	46.21	-2.19	44.02	54	-9.98	V	AV
High Channel (5795MHz)							
11590	44.31	-2.03	42.28	74	-31.72	H	PK
11590	41.74	-2.03	39.71	54	-14.29	H	AV
11590	49.83	-2.03	47.80	74	-26.20	V	PK
11590	46.66	-2.03	44.63	54	-9.37	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-33.02	-27
Highest	Above 5350	-38.97	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.42	-27
Highest	Above 5350	-32.94	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-31.34	-27
Highest	Above 5725	-33.87	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-41.71	-27
	5650 to 5700	-31.83	-27 to -17
	5700 to 5720	-22.94	-17 to 15.6
	5720 to 5725	-14.31	15.6 to 27
Highest	5850 to 5855	-10.28	27 to 15.6
	5855 to 5875	-23.25	15.6 to -17
	5875 to 5925	-28.47	-17 to -27
	Above 5925	-34.61	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz(802.11ac VHT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	44.80	-4.21	40.59	74	-33.41	H	PK
10380	42.31	-4.21	38.10	54	-15.90	H	AV
10380	50.09	-4.21	45.88	74	-28.12	V	PK
10380	47.01	-4.21	42.80	54	-11.20	V	AV
High Channel (5230MHz)							
10460	45.03	-4.17	40.86	74	-33.14	H	PK
10460	42.58	-4.17	38.41	54	-15.59	H	AV
10460	49.90	-4.17	45.73	74	-28.27	V	PK
10460	47.32	-4.17	43.15	54	-10.85	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	44.51	-4.14	40.37	74	-33.63	H	PK
10540	42.62	-4.14	38.48	54	-15.52	H	AV
10540	50.84	-4.14	46.70	74	-27.30	V	PK
10540	47.33	-4.14	43.19	54	-10.81	V	AV
High Channel (5310MHz)							
10620	45.85	-4.10	41.75	74	-32.25	H	PK
10620	43.04	-4.10	38.94	54	-15.06	H	AV
10620	50.91	-4.10	46.81	74	-27.19	V	PK
10620	47.00	-4.10	42.90	54	-11.10	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	45.14	-3.89	41.25	74	-32.75	H	PK
11020	43.15	-3.89	39.26	54	-14.74	H	AV
11020	51.00	-3.89	47.11	74	-26.89	V	PK
11020	46.75	-3.89	42.86	54	-11.14	V	AV
Middle Channel (5550MHz)							
11100	44.27	-3.61	40.66	74	-33.34	H	PK
11100	41.17	-3.61	37.56	54	-16.44	H	AV
11100	48.85	-3.61	45.24	74	-28.76	V	PK
11100	46.08	-3.61	42.47	54	-11.53	V	AV
High Channel (5670MHz)							
11340	43.67	-2.77	40.90	74	-33.10	H	PK
11340	41.98	-2.77	39.21	54	-14.79	H	AV
11340	49.44	-2.77	46.67	74	-27.33	V	PK
11340	46.78	-2.77	44.01	54	-9.99	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	44.26	-2.19	42.07	74	-31.93	H	PK
11510	41.03	-2.19	38.84	54	-15.16	H	AV
11510	48.98	-2.19	46.79	74	-27.21	V	PK
11510	46.03	-2.19	43.84	54	-10.16	V	AV
High Channel (5795MHz)							
11590	44.62	-2.03	42.59	74	-31.41	H	PK
11590	41.77	-2.03	39.74	54	-14.26	H	AV
11590	49.13	-2.03	47.10	74	-26.90	V	PK
11590	46.71	-2.03	44.68	54	-9.32	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-31.27	-27
Highest	Above 5350	-38.74	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.08	-27
Highest	Above 5350	-32.94	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-32.70	-27
Highest	Above 5725	-34.52	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-42.25	-27
	5650 to 5700	-32.48	-27 to -17
	5700 to 5720	-22.49	-17 to 15.6
	5720 to 5725	-15.55	15.6 to 27
Highest	5850 to 5855	-11.97	27 to 15.6
	5855 to 5875	-21.34	15.6 to -17
	5875 to 5925	-28.59	-17 to -27
	Above 5925	-35.24	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz(802.11ax HE40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	43.90	-4.21	39.69	74	-34.31	H	PK
10380	42.47	-4.21	38.26	54	-15.74	H	AV
10380	49.94	-4.21	45.73	74	-28.27	V	PK
10380	46.95	-4.21	42.74	54	-11.26	V	AV
High Channel (5230MHz)							
10460	43.74	-4.17	39.57	74	-34.43	H	PK
10460	42.24	-4.17	38.07	54	-15.93	H	AV
10460	49.49	-4.17	45.32	74	-28.68	V	PK
10460	46.58	-4.17	42.41	54	-11.59	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	43.80	-4.14	39.66	74	-34.34	H	PK
10540	41.24	-4.14	37.10	54	-16.90	H	AV
10540	48.68	-4.14	44.54	74	-29.46	V	PK
10540	46.31	-4.14	42.17	54	-11.83	V	AV
High Channel (5310MHz)							
10620	44.33	-4.10	40.23	74	-33.77	H	PK
10620	42.08	-4.10	37.98	54	-16.02	H	AV
10620	49.26	-4.10	45.16	74	-28.84	V	PK
10620	45.88	-4.10	41.78	54	-12.22	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	43.61	-3.89	39.72	74	-34.28	H	PK
11020	41.94	-3.89	38.05	54	-15.95	H	AV
11020	49.20	-3.89	45.31	74	-28.69	V	PK
11020	46.83	-3.89	42.94	54	-11.06	V	AV
Middle Channel (5550MHz)							
11100	44.06	-3.61	40.45	74	-33.55	H	PK
11100	42.41	-3.61	38.80	54	-15.20	H	AV
11100	49.28	-3.61	45.67	74	-28.33	V	PK
11100	46.90	-3.61	43.29	54	-10.71	V	AV
High Channel (5670MHz)							
11340	44.06	-2.77	41.29	74	-32.71	H	PK
11340	41.73	-2.77	38.96	54	-15.04	H	AV
11340	48.83	-2.77	46.06	74	-27.94	V	PK
11340	46.15	-2.77	43.38	54	-10.62	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	44.19	-2.19	42.00	74	-32.00	H	PK
11510	42.73	-2.19	40.54	54	-13.46	H	AV
11510	48.49	-2.19	46.30	74	-27.70	V	PK
11510	45.76	-2.19	43.57	54	-10.43	V	AV
High Channel (5795MHz)							
11590	43.48	-2.03	41.45	74	-32.55	H	PK
11590	41.39	-2.03	39.36	54	-14.64	H	AV
11590	49.07	-2.03	47.04	74	-26.96	V	PK
11590	47.32	-2.03	45.29	54	-8.71	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.46	-27
Highest	Above 5350	-36.01	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.19	-27
Highest	Above 5350	-31.73	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-31.37	-27
Highest	Above 5725	-34.46	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-41.51	-27
	5650 to 5700	-34.37	-27 to -17
	5700 to 5720	-24.49	-17 to 15.6
	5720 to 5725	-16.65	15.6 to 27
Highest	5850 to 5855	-10.75	27 to 15.6
	5855 to 5875	-23.91	15.6 to -17
	5875 to 5925	-30.38	-17 to -27
	Above 5925	-37.14	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz(802.11ac VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	44.81	-4.19	40.62	74	-33.38	H	PK
10420	40.70	-4.19	36.51	54	-17.49	H	AV
10420	49.88	-4.19	45.69	74	-28.31	H	PK
10420	45.10	-4.19	40.91	54	-13.09	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5290MHz							
10580	43.83	-4.12	39.71	74	-34.29	H	PK
10580	40.21	-4.12	36.09	54	-17.91	H	AV
10580	49.33	-4.12	45.21	74	-28.79	V	PK
10580	45.49	-4.12	41.37	54	-12.63	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5530MHz)							
11060	44.16	-3.75	40.41	74	-33.59	H	PK
11060	40.82	-3.75	37.07	54	-16.93	H	AV
11060	49.10	-3.75	45.35	74	-28.65	V	PK
11060	44.99	-3.75	41.24	54	-12.76	V	AV
High Channel (5610MHz)							
11220	43.94	-3.19	40.75	74	-33.25	H	PK
11220	40.26	-3.19	37.07	54	-16.93	H	AV
11220	49.13	-3.19	45.94	74	-28.06	V	PK
11220	46.03	-3.19	42.84	54	-11.16	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	43.75	-2.11	41.64	74	-32.36	H	PK
11550	41.53	-2.11	39.42	54	-14.58	H	AV
11550	49.47	-2.11	47.36	74	-26.64	V	PK
11550	45.87	-2.11	43.76	54	-10.24	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.43	-27
Highest	Above 5350	-37.67	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.26	-27
Highest	Above 5350	-32.95	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-36.90	-27
Highest	Above 5725	-34.42	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-41.98	-27
	5650 to 5700	-32.78	-27 to -17
	5700 to 5720	-25.34	-17 to 15.6
	5720 to 5725	-16.79	15.6 to 27
Highest	5850 to 5855	-11.77	27 to 15.6
	5855 to 5875	-25.13	15.6 to -17
	5875 to 5925	-31.83	-17 to -27
	Above 5925	-37.98	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz(802.11ax HE80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	43.58	-4.19	39.39	74	-34.61	H	PK
10420	40.91	-4.19	36.72	54	-17.28	H	AV
10420	49.04	-4.19	44.85	74	-29.15	H	PK
10420	45.54	-4.19	41.35	54	-12.65	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5290MHz							
10580	43.94	-4.12	39.82	74	-34.18	H	PK
10580	41.16	-4.12	37.04	54	-16.96	H	AV
10580	48.71	-4.12	44.59	74	-29.41	V	PK
10580	45.49	-4.12	41.37	54	-12.63	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5530MHz)							
11060	43.81	-3.75	40.06	74	-33.94	H	PK
11060	41.07	-3.75	37.32	54	-16.68	H	AV
11060	48.48	-3.75	44.73	74	-29.27	V	PK
11060	45.29	-3.75	41.54	54	-12.46	V	AV
High Channel (5610MHz)							
11220	44.71	-3.19	41.52	74	-32.48	H	PK
11220	40.45	-3.19	37.26	54	-16.74	H	AV
11220	49.10	-3.19	45.91	74	-28.09	V	PK
11220	46.28	-3.19	43.09	54	-10.91	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	43.27	-2.11	41.16	74	-32.84	H	PK
11550	41.37	-2.11	39.26	54	-14.74	H	AV
11550	49.78	-2.11	47.67	74	-26.33	V	PK
11550	46.30	-2.11	44.19	54	-9.81	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.72	-27
Highest	Above 5350	-37.31	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.09	-27
Highest	Above 5350	-33.32	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-35.87	-27
Highest	Above 5725	-34.06	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-42.08	-27
	5650 to 5700	-31.84	-27 to -17
	5700 to 5720	-25.21	-17 to 15.6
	5720 to 5725	-15.54	15.6 to 27
Highest	5850 to 5855	-11.01	27 to 15.6
	5855 to 5875	-24.73	15.6 to -17
	5875 to 5925	-33.38	-17 to -27
	Above 5925	-37.74	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix E


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram

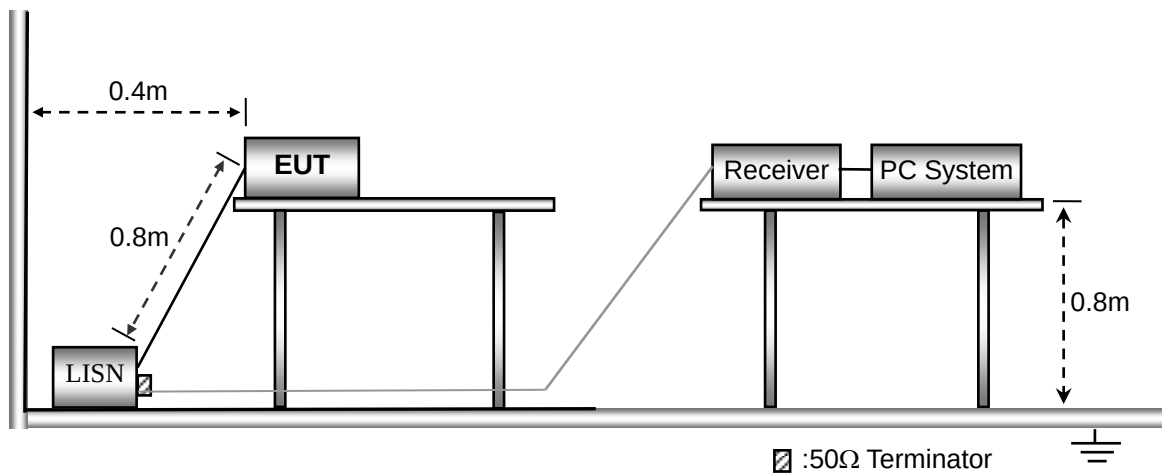


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

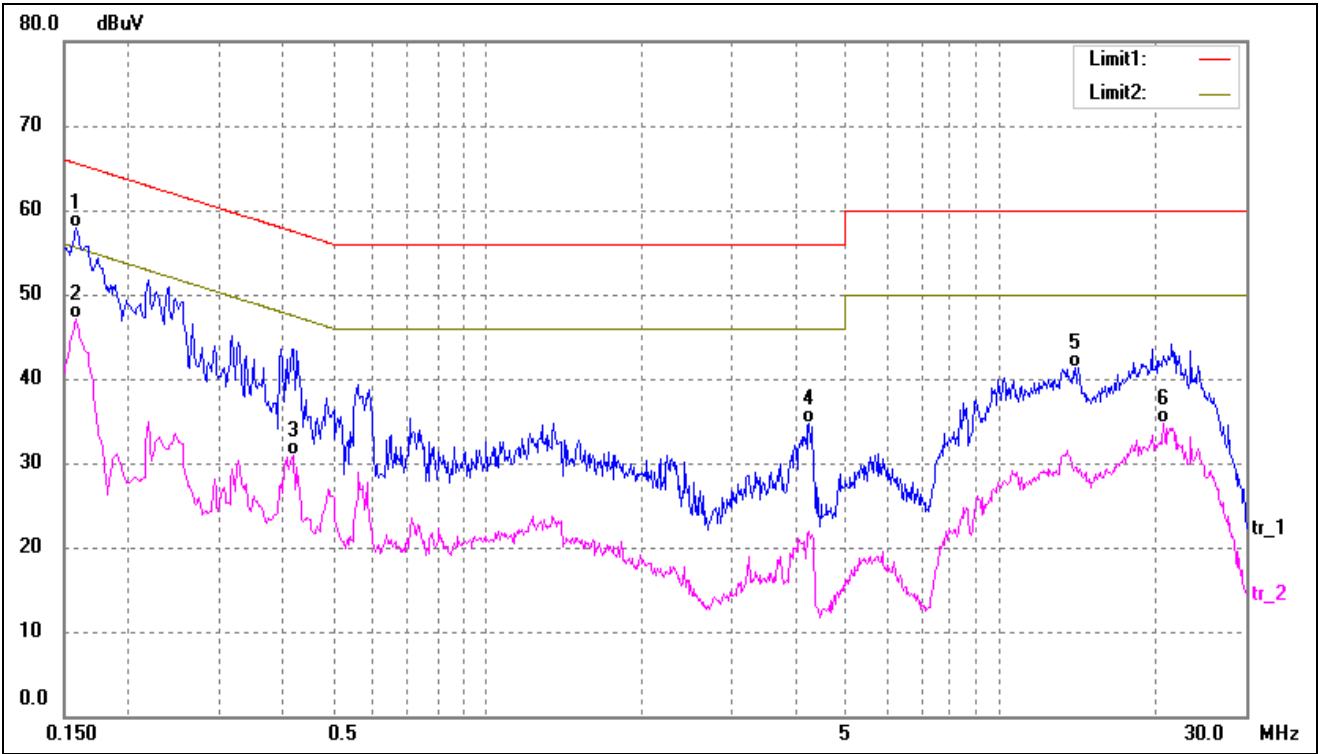

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	48.39	9.46	57.85	65.57	-7.72	QP
2	0.1580	37.59	9.46	47.05	55.57	-8.52	AVG
3	0.4180	21.18	9.64	30.82	47.49	-16.67	AVG
4	4.2260	25.13	9.48	34.61	56.00	-21.39	QP
5	14.1660	31.71	9.56	41.27	60.00	-18.73	QP
6	20.7420	25.18	9.54	34.72	50.00	-15.28	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

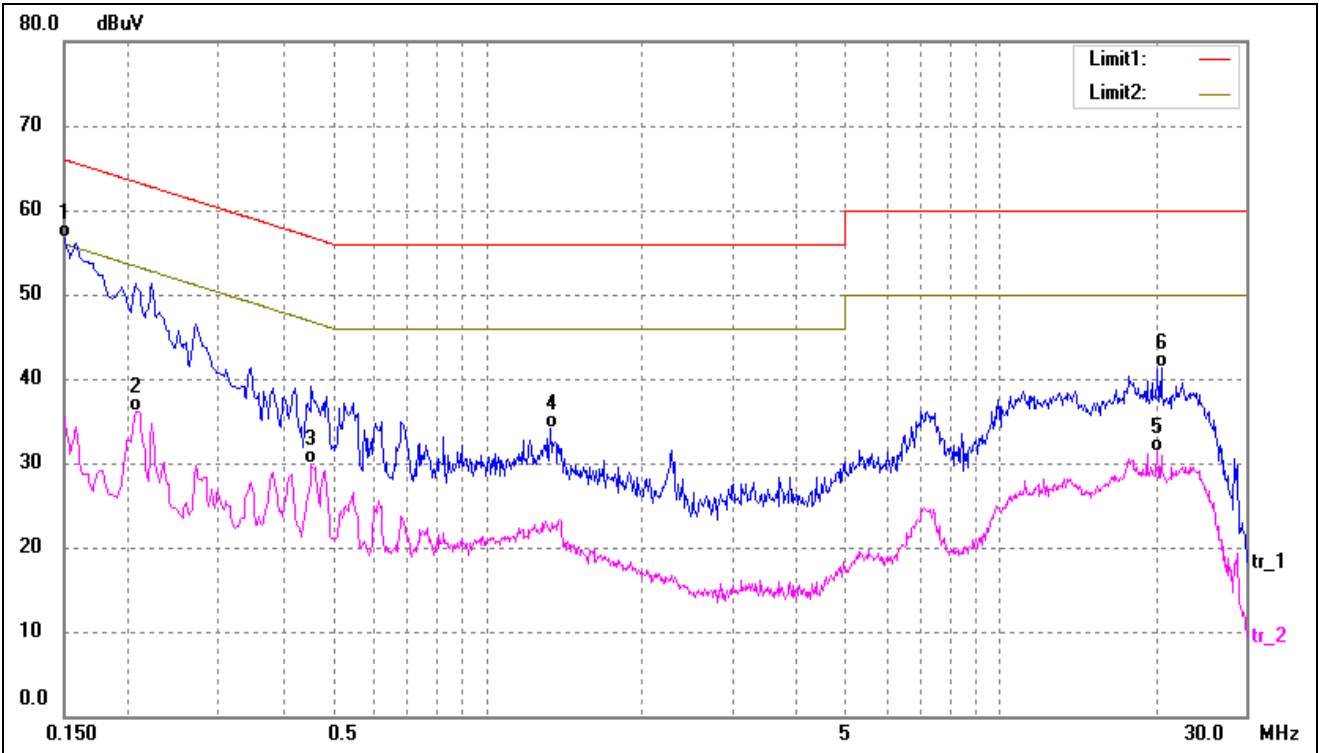

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	47.29	9.43	56.72	66.00	-9.28	QP
2	0.2060	26.53	9.63	36.16	53.37	-17.21	AVG
3	0.4540	20.30	9.65	29.95	46.80	-16.85	AVG
4	1.3300	24.55	9.63	34.18	56.00	-21.82	QP
5	20.1700	21.71	9.54	31.25	50.00	-18.75	AVG
6	20.4980	31.76	9.54	41.30	60.00	-18.70	QP

APPENDIX SUMMARY

Project No.	WTX25X04108447W001	Test Engineer	BAl di zhong
Start date	2025-04-30	Finish date	2025-09-16
Temperature	23℃	Humidity	56%
RF specifications	WIFI-5GHz		

APPENDIX	Description of Test Item	Result
A1	Emission Bandwidth	Compliant
A2	Occupied channel bandwidth	Compliant
A3	Min emission bandwidth	Compliant
B	Duty Cycle	Compliant
C	Maximum conducted output power	Compliant
D	Maximum power spectral density	Compliant
E	Frequency Stability	Compliant

Appendix A1: Emission Bandwidth**Test Result**


TestMode	Antenna	Frequency [MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	23.200	5168.680	5191.880	---	---
11A	Ant1	5200	23.600	5188.440	5212.040	---	---
11A	Ant1	5240	23.000	5228.360	5251.360	---	---
11A	Ant1	5260	22.960	5248.480	5271.440	---	---
11A	Ant1	5280	23.120	5268.560	5291.680	---	---
11A	Ant1	5320	23.440	5308.640	5332.080	---	---
11A	Ant1	5500	23.800	5488.320	5512.120	---	---
11A	Ant1	5580	23.000	5568.600	5591.600	---	---
11A	Ant1	5700	23.840	5688.320	5712.160	---	---
11A	Ant1	5745	23.760	5733.200	5756.960	---	---
11A	Ant1	5785	23.880	5773.480	5797.360	---	---
11A	Ant1	5825	23.720	5813.480	5837.200	---	---
11N20SISO	Ant1	5180	25.000	5167.560	5192.560	---	---
11N20SISO	Ant1	5200	24.640	5188.200	5212.840	---	---
11N20SISO	Ant1	5240	24.800	5227.920	5252.720	---	---
11N20SISO	Ant1	5260	24.040	5247.760	5271.800	---	---
11N20SISO	Ant1	5280	25.080	5267.880	5292.960	---	---
11N20SISO	Ant1	5320	24.400	5308.120	5332.520	---	---
11N20SISO	Ant1	5500	25.080	5487.760	5512.840	---	---
11N20SISO	Ant1	5580	26.040	5567.000	5593.040	---	---
11N20SISO	Ant1	5700	25.040	5687.520	5712.560	---	---
11N20SISO	Ant1	5745	26.120	5732.040	5758.160	---	---
11N20SISO	Ant1	5785	25.040	5772.760	5797.800	---	---
11N20SISO	Ant1	5825	24.680	5812.920	5837.600	---	---
11N40SISO	Ant1	5190	44.880	5167.840	5212.720	---	---
11N40SISO	Ant1	5230	45.440	5208.240	5253.680	---	---
11N40SISO	Ant1	5270	44.720	5247.920	5292.640	---	---
11N40SISO	Ant1	5310	45.680	5288.160	5333.840	---	---
11N40SISO	Ant1	5510	45.440	5488.080	5533.520	---	---
11N40SISO	Ant1	5550	45.280	5527.680	5572.960	---	---
11N40SISO	Ant1	5670	44.800	5648.000	5692.800	---	---
11N40SISO	Ant1	5755	45.600	5732.440	5778.040	---	---
11N40SISO	Ant1	5795	44.480	5772.840	5817.320	---	---
11AC20SISO	Ant1	5180	24.400	5168.080	5192.480	---	---
11AC20SISO	Ant1	5200	25.280	5187.440	5212.720	---	---
11AC20SISO	Ant1	5240	24.200	5228.200	5252.400	---	---


11AC20SISO	Ant1	5260	24.320	5248.120	5272.440	---	---
11AC20SISO	Ant1	5280	25.240	5267.720	5292.960	---	---
11AC20SISO	Ant1	5320	24.080	5308.200	5332.280	---	---
11AC20SISO	Ant1	5500	26.120	5487.080	5513.200	---	---
11AC20SISO	Ant1	5580	25.760	5567.800	5593.560	---	---
11AC20SISO	Ant1	5700	24.480	5687.880	5712.360	---	---
11AC20SISO	Ant1	5745	25.360	5732.400	5757.760	---	---
11AC20SISO	Ant1	5785	25.000	5772.600	5797.600	---	---
11AC20SISO	Ant1	5825	25.400	5812.160	5837.560	---	---
11AC40SISO	Ant1	5190	43.600	5168.320	5211.920	---	---
11AC40SISO	Ant1	5230	44.400	5207.680	5252.080	---	---
11AC40SISO	Ant1	5270	43.920	5248.000	5291.920	---	---
11AC40SISO	Ant1	5310	44.240	5288.000	5332.240	---	---
11AC40SISO	Ant1	5510	44.800	5488.080	5532.880	---	---
11AC40SISO	Ant1	5550	45.200	5527.600	5572.800	---	---
11AC40SISO	Ant1	5670	45.440	5647.200	5692.640	---	---
11AC40SISO	Ant1	5755	44.960	5732.280	5777.240	---	---
11AC40SISO	Ant1	5795	46.240	5771.400	5817.640	---	---
11AC80SISO	Ant1	5210	87.520	5167.280	5254.800	---	---
11AC80SISO	Ant1	5290	87.520	5246.800	5334.320	---	---
11AC80SISO	Ant1	5530	87.840	5486.320	5574.160	---	---
11AC80SISO	Ant1	5610	87.040	5566.480	5653.520	---	---
11AC80SISO	Ant1	5775	94.240	5725.400	5819.640	---	---
11AX20SISO	Ant1	5180	26.440	5168.080	5194.520	---	---
11AX20SISO	Ant1	5200	24.880	5188.160	5213.040	---	---
11AX20SISO	Ant1	5240	25.320	5227.920	5253.240	---	---
11AX20SISO	Ant1	5260	24.600	5248.320	5272.920	---	---
11AX20SISO	Ant1	5280	24.560	5268.160	5292.720	---	---
11AX20SISO	Ant1	5320	24.800	5308.120	5332.920	---	---
11AX20SISO	Ant1	5500	27.520	5487.520	5515.040	---	---
11AX20SISO	Ant1	5580	27.160	5567.640	5594.800	---	---
11AX20SISO	Ant1	5700	25.840	5687.560	5713.400	---	---
11AX20SISO	Ant1	5745	25.920	5732.360	5758.280	---	---
11AX20SISO	Ant1	5785	25.640	5772.760	5798.400	---	---
11AX20SISO	Ant1	5825	25.520	5812.760	5838.280	---	---
11AX40SISO	Ant1	5190	44.560	5168.160	5212.720	---	---
11AX40SISO	Ant1	5230	44.640	5207.920	5252.560	---	---
11AX40SISO	Ant1	5270	44.000	5248.160	5292.160	---	---
11AX40SISO	Ant1	5310	43.680	5288.240	5331.920	---	---
11AX40SISO	Ant1	5510	46.240	5487.360	5533.600	---	---
11AX40SISO	Ant1	5550	46.080	5527.680	5573.760	---	---

Reference No.: WTX25X04108447W001


11AX40SISO	Ant1	5670	44.400	5648.160	5692.560	---	---
11AX40SISO	Ant1	5755	46.400	5732.120	5778.520	---	---
11AX40SISO	Ant1	5795	46.240	5772.280	5818.520	---	---
11AX80SISO	Ant1	5210	84.960	5167.920	5252.880	---	---
11AX80SISO	Ant1	5290	87.360	5245.840	5333.200	---	---
11AX80SISO	Ant1	5530	86.240	5487.600	5573.840	---	---
11AX80SISO	Ant1	5610	87.360	5566.960	5654.320	---	---
11AX80SISO	Ant1	5775	86.560	5731.960	5818.520	---	---

Test Graphs

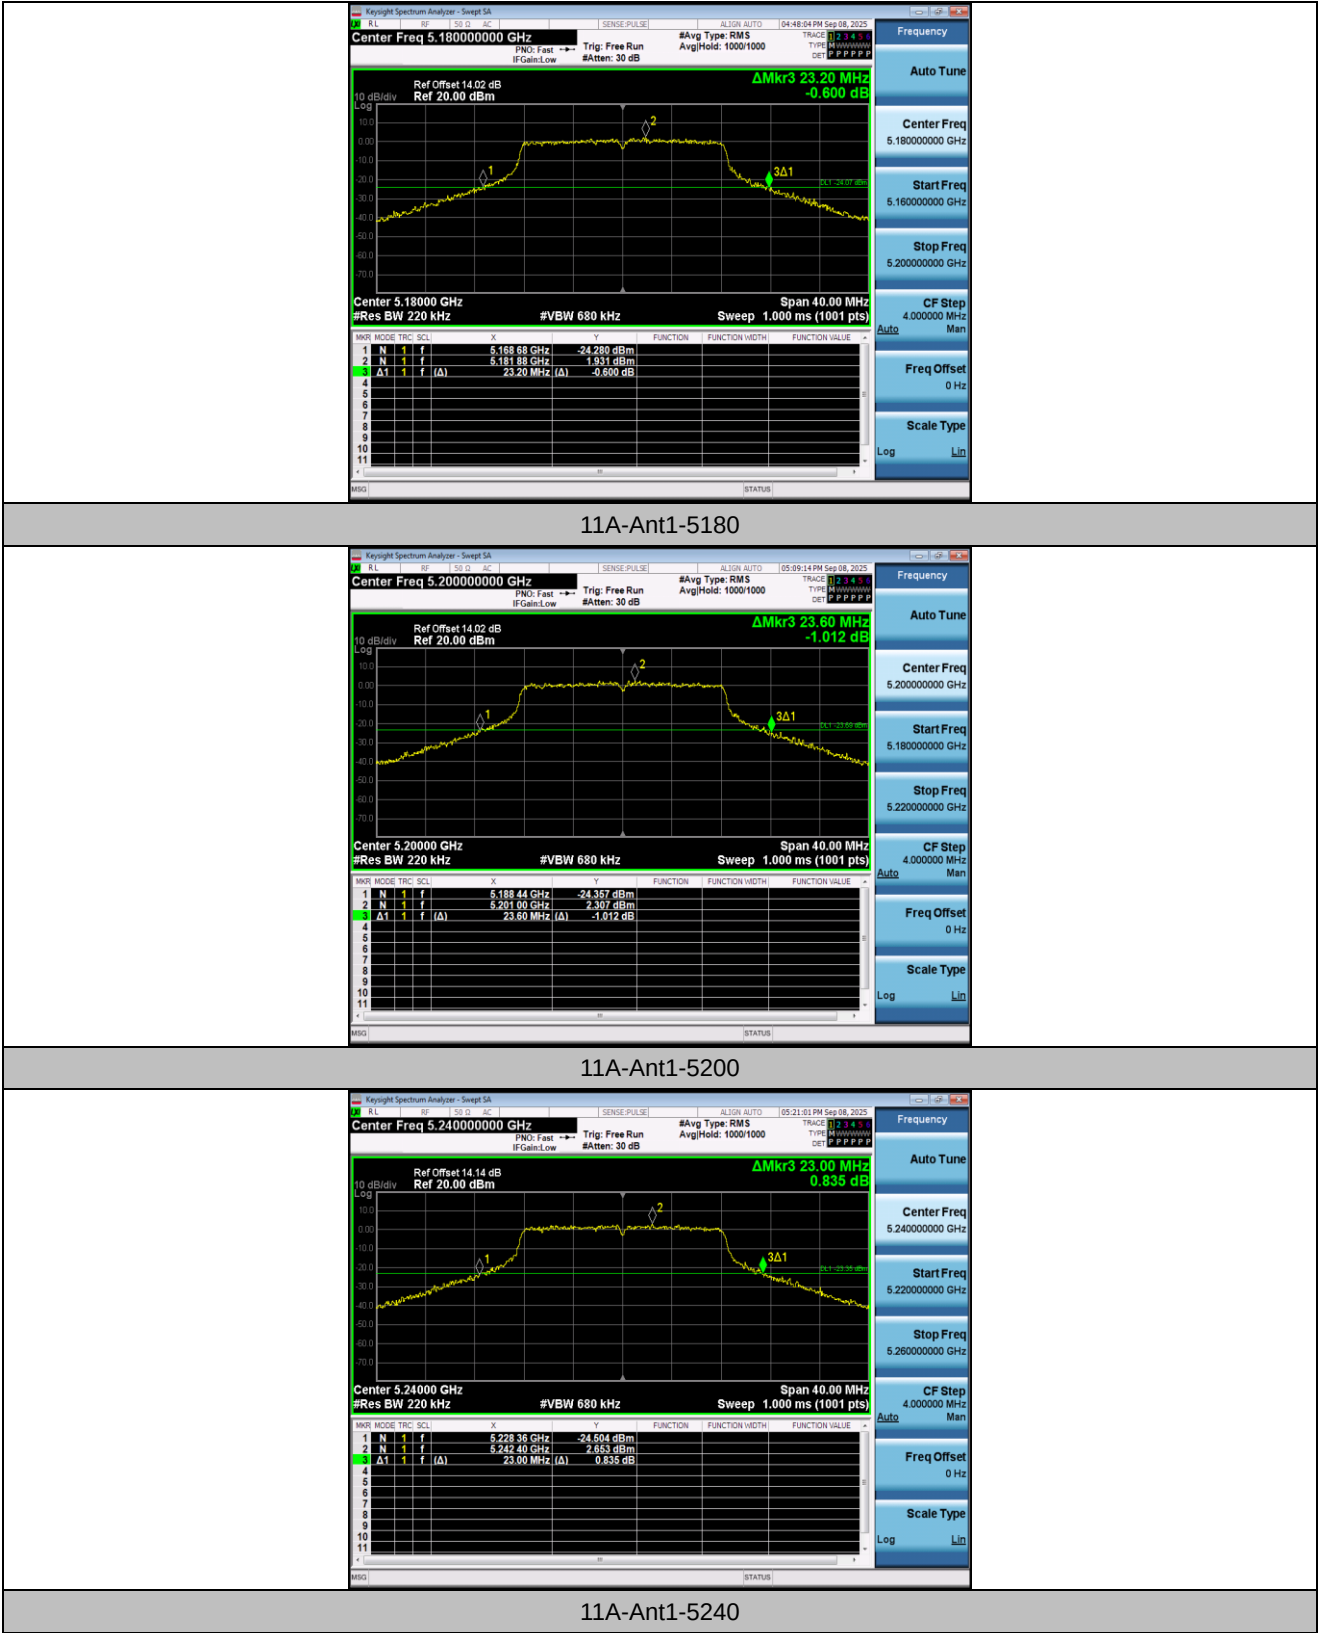


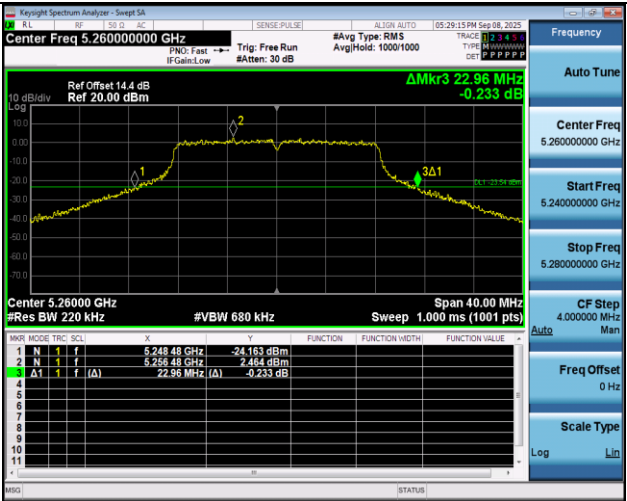


11A-Ant1-5260

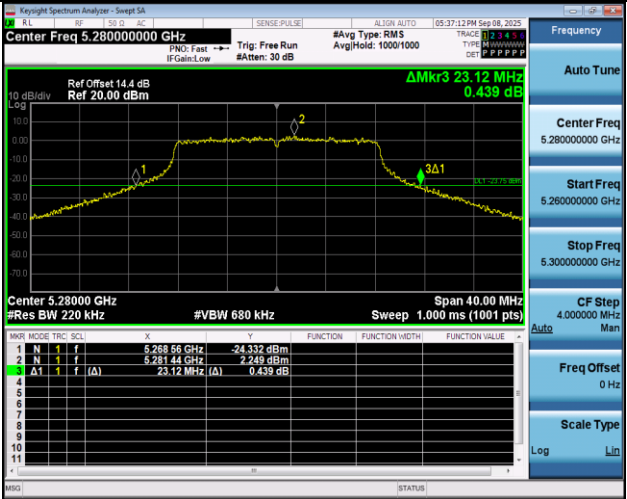


11A-Ant1-5280

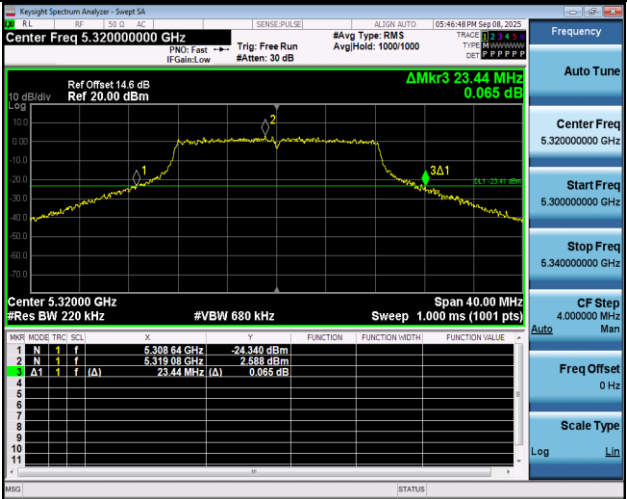


11A-Ant1-5320

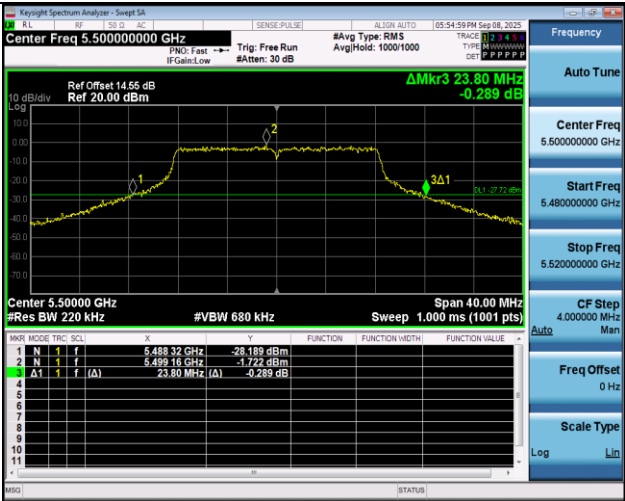


11A-Ant1-5500

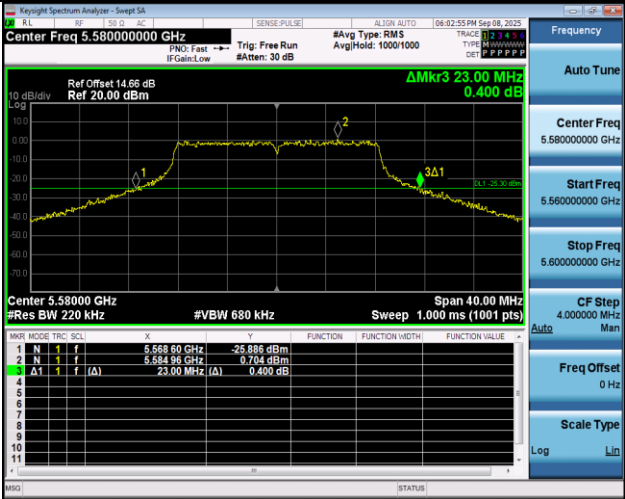


11A-Ant1-5580

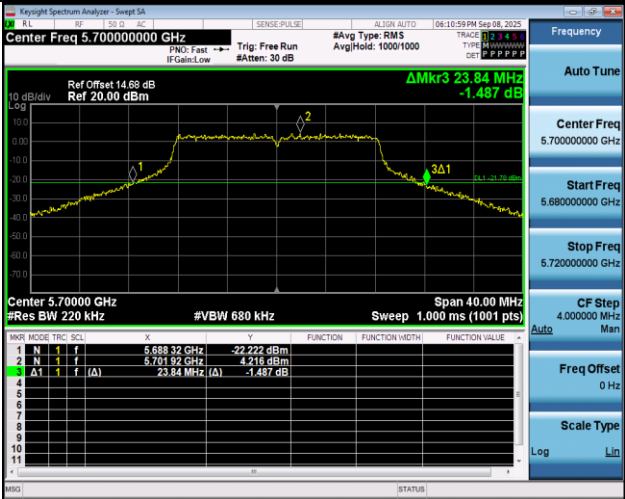


11A-Ant1-5700

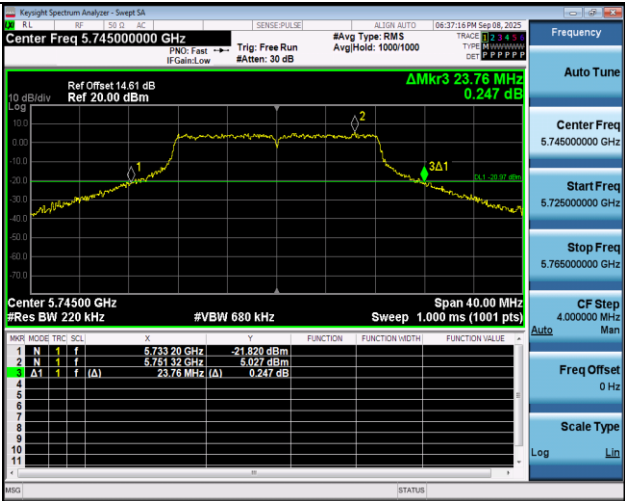


11A-Ant1-5745

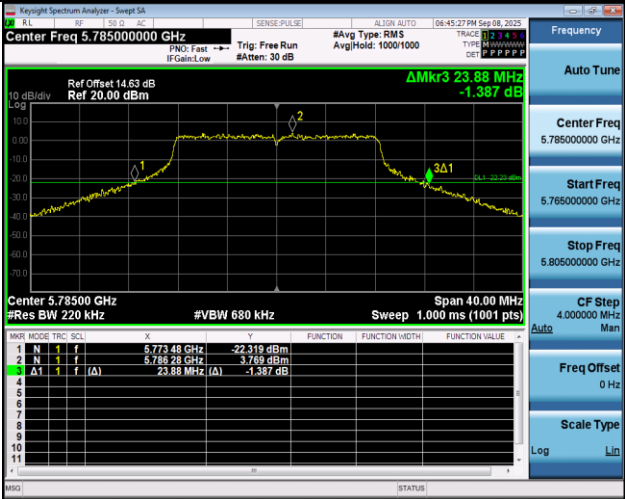

11A-Ant1-5785

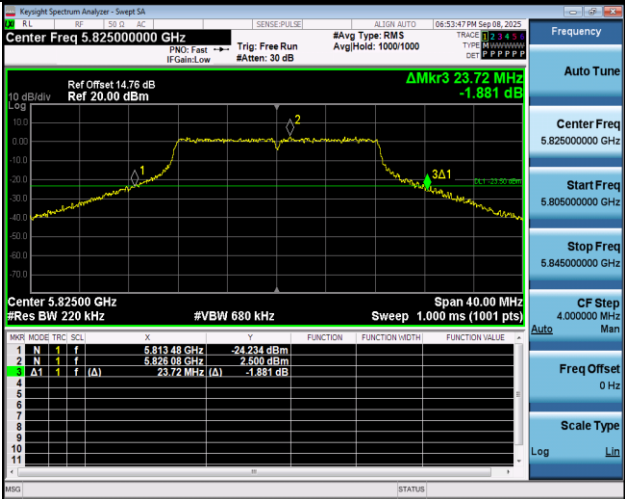


11A-Ant1-5825

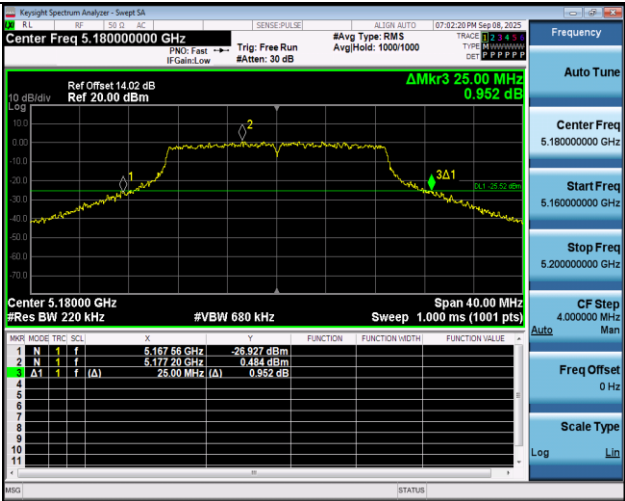

11N20SISO-Ant1-5180




11N20SISO-Ant1-5200

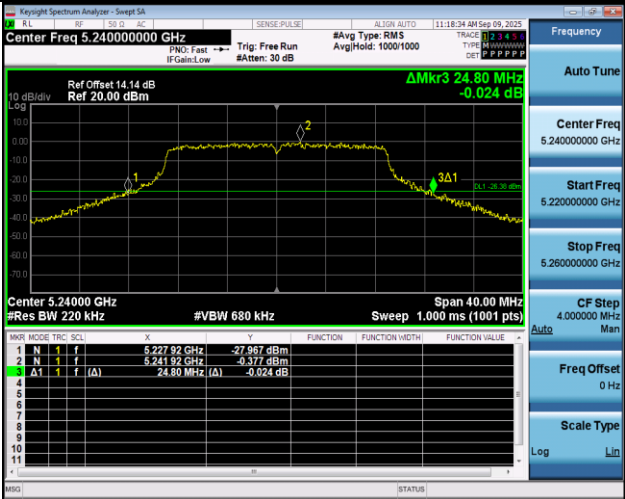


11N20SISO-Ant1-5240




11N20SISO-Ant1-5260

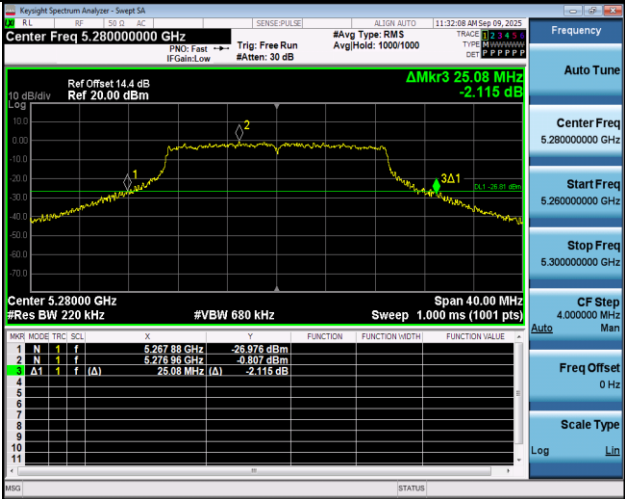


11N20SISO-Ant1-5280

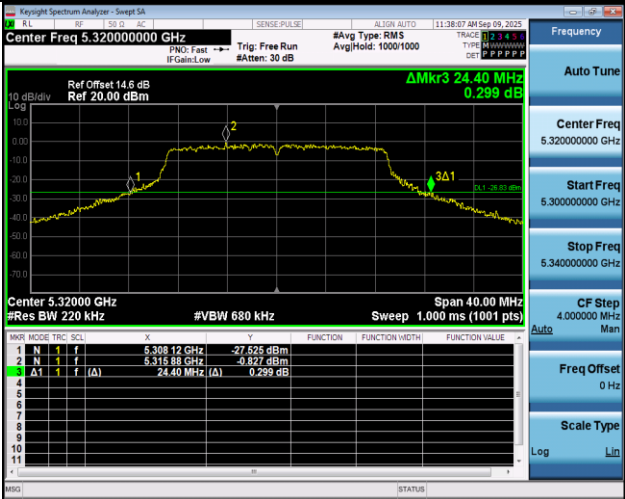


11N20SISO-Ant1-5320

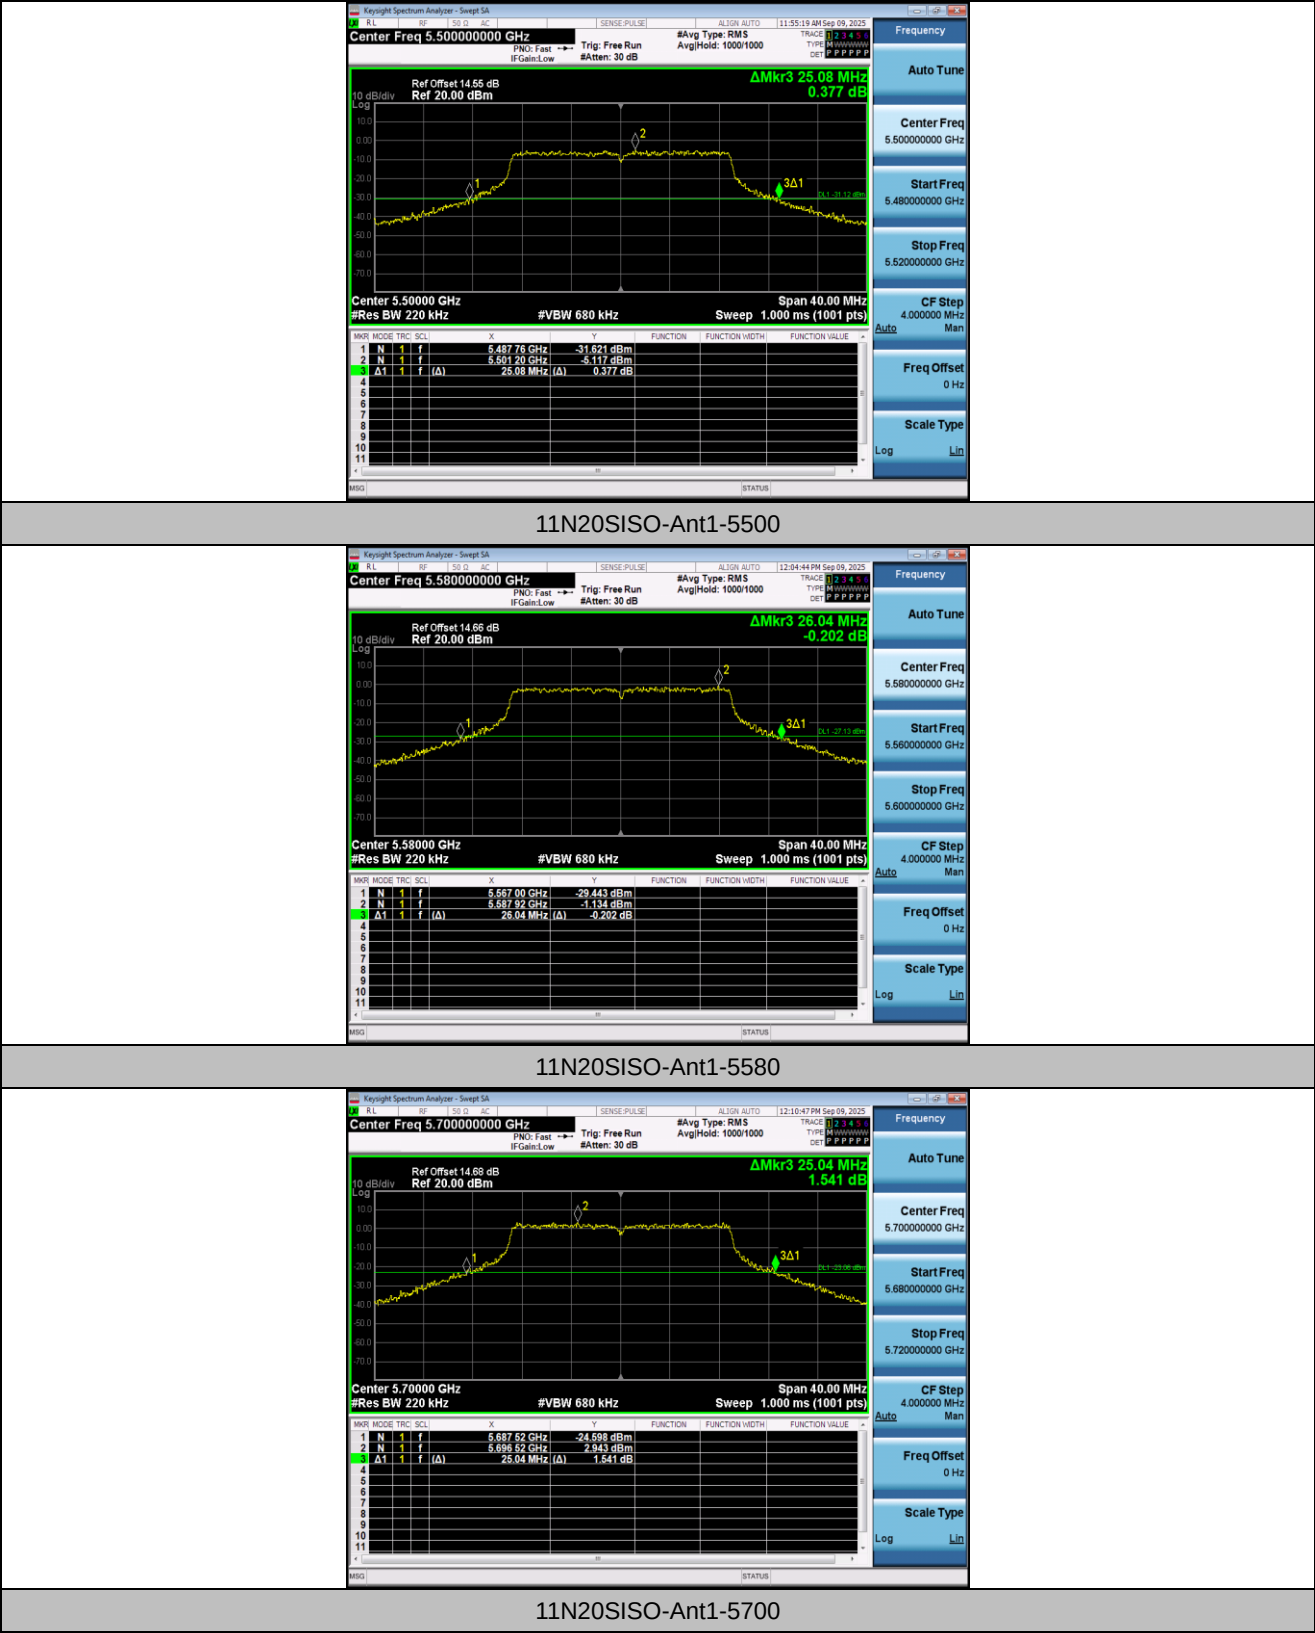


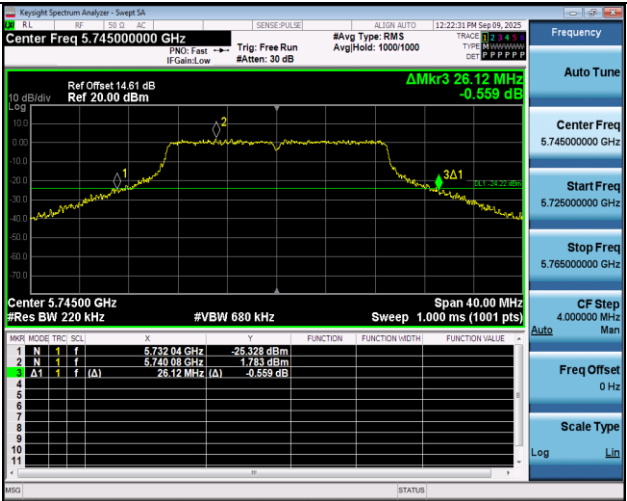

11N20SISO-Ant1-5745

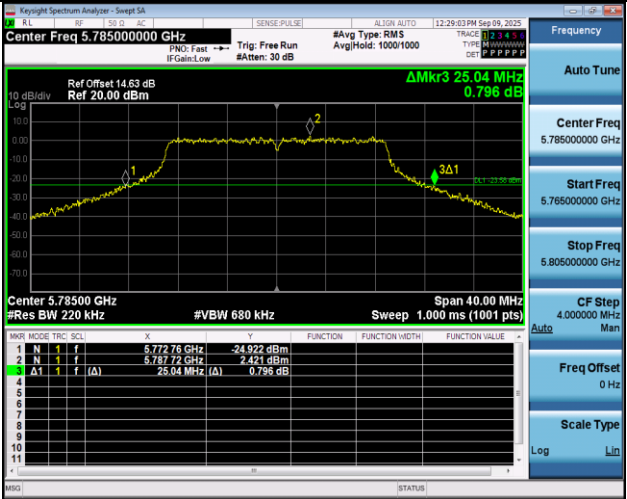


11N20SISO-Ant1-5785

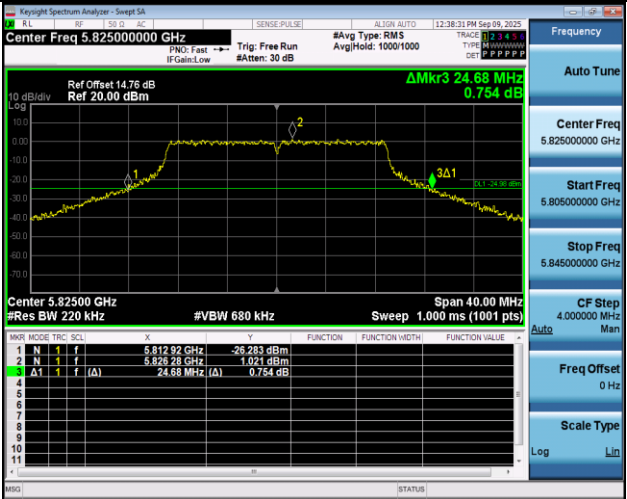

11N20SISO-Ant1-5825



11N40SISO-Ant1-5190

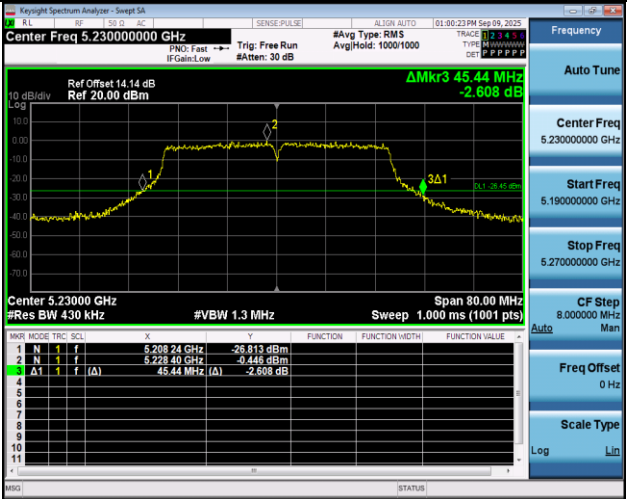

11N40SISO-Ant1-5230



11N40SISO-Ant1-5270



11N40SISO-Ant1-5310




11N40SISO-Ant1-5510



11N40SISO-Ant1-5550




11N40SISO-Ant1-5670

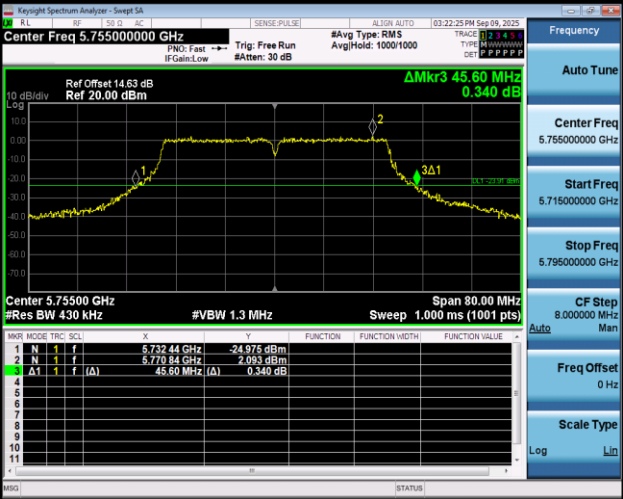


11N40SISO-Ant1-5755




11N40SISO-Ant1-5795

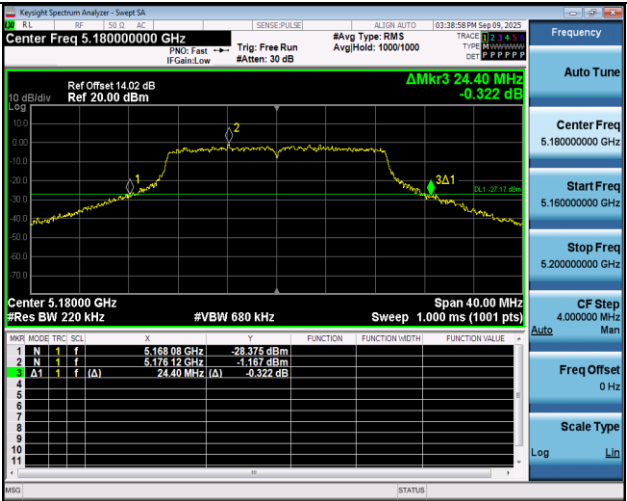

11AC20SISO-Ant1-5180

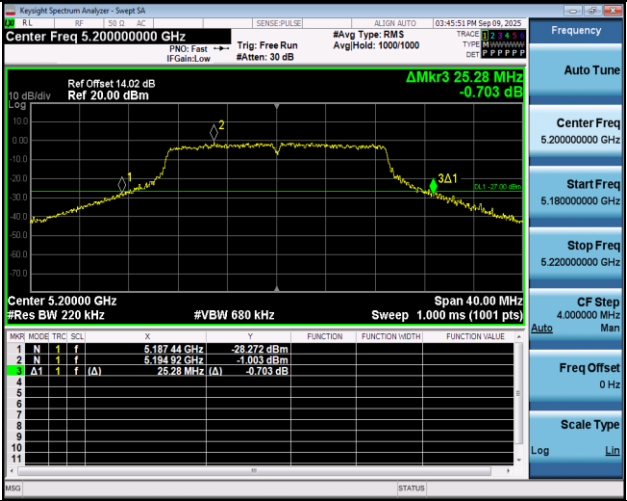

11AC20SISO-Ant1-5200

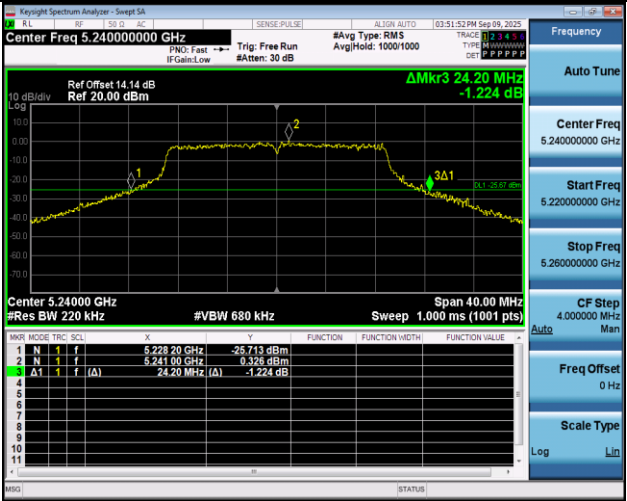

11AC20SISO-Ant1-5240