

RADIO TEST REPORT

FCC ID: 2AAU7-AH3S

Product : Alloy Hub v3s

Trade Mark : Alloy SmartHome

Model Name : ah3s.zw8us.4G

Family Model : N/A

Report No. : N25080806910E

Prepared for

Tri plus grupa d.o.o.

Banjavciceva 11, 10000 Zagreb, Croatia

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan
District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-2320 0050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**: Tri plus grupa d.o.o.

Address: Banjavciceva 11, 10000 Zagreb, Croatia

Manufacturer's Name.....: Tri plus grupa d.o.o.

Address: Banjavciceva 11, 10000 Zagreb, Croatia

Product description

Product name: Alloy Hub v3s

Trademark: Alloy SmartHome

Model and/or type reference ..: ah3s.zw8us.4G

Family Model: N/A

Standards: FCC Part15.249

Test procedure ANSI C63.10-2020+COR.1-2023

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number.....: S2508140066-1#**Date of Test**

Date (s) of performance of tests: Aug. 14, 2025 ~ Nov. 07, 2025

Date of Issue: Nov. 07, 2025

Test Result.....: **Pass**

Prepared By: Allen Liu
Allen Liu
(Project Engineer)

Reviewed By: Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By: Alex Li
Alex Li
(Manager)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	13
3.1 STANDARD REQUIREMENT	13
3.2 EUT ANTENNA	13
3.3 CONDUCTED EMISSION MEASUREMENT	14
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.3.2 TEST PROCEDURE	15
3.3.3 DEVIATION FROM TEST STANDARD	15
3.3.4 TEST SETUP	15
3.2.5 TEST RESULT	16
3.3.6 RADIATED EMISSION LIMITS	18
3.3.7 TEST PROCEDURE	19
3.3.8 DEVIATION FROM TEST STANDARD	19
3.3.9 TEST RESULTS (BELOW 30MHZ)	21
3.3.10 TEST RESULTS (BELOW 1000 MHZ)	22
3.3.11 TEST RESULTS (ABOVE 1000 MHZ)	30
3.3.12 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	38
4. BANDWIDTH TEST	46
4.1 TEST PROCEDURE	46
4.2 DEVIATION FROM STANDARD	46
4.3 TEST SETUP	46
6. TEST RESULTS	47

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.249)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249 15.209	Radiated Spurious Emission	Pass	
15.249(2)	Frequency Tolerance	N/A	
15.249(a)	Fundamental Measurement	Pass	
15.205	Band Edge Emission	Pass	
15.215	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd
 Add. : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,
 Shenzhen, Guangdong, People's Republic of China.
 FCC FRN Registration No.:463705; IC Registration No.:9270A
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	Occupied bandwidth	$\pm 3.7\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Alloy Hub v3s	
Trade Mark	Alloy SmartHome	
Model Name	ah3s.zw8us.4G	
Family Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Alloy Hub v3s	
	Operation Frequency:	908.4-916MHz
	Modulation Type:	GFSK
	Antenna Designation:	stamped metal antenna
	Antenna Gain(Peak)	-0.9 dBi
Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.		
Channel List	Please refer to the Note 2.	
Adapter	MODEL: KA1801A-1201500USL	
	INPUT: 100-240V~50/60Hz 0.55A Max	
	OUTPUT: 12.0V---1500mAh	
Battery	N/A	
Power Rating	DC 12V from Adapter	
Hardware Version	ah+.main.pcb_v0.8.8	
Firmware version	smartrent_hub-v1.26.11	
Software version	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency(MHz)
01	908.4
02	908.42
03	912
04	916

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	stamped metal antenna	N/A	-0.9	Antenna

4. The EUT contains a LTE Module that has applied FCC certification,
FCC ID: XMR202008EG91NAXD

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01/02/03/04
Mode 2	Normal link

For Radiated Spurious Emission


Pretest Mode	Description
Mode 1	CH01/02/03/04

For Conducted Emission


Final Test Mode	Description
Mode 1	CH01/02/03/04
Mode 2	Normal link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission Mode

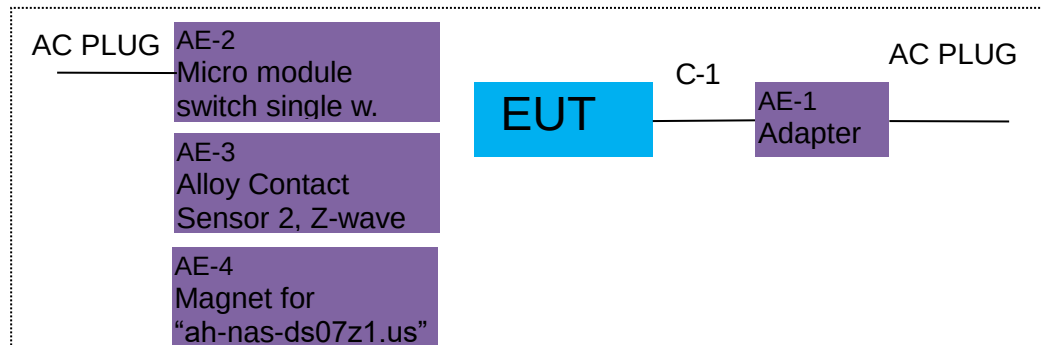

Radiated Spurious Emission Test

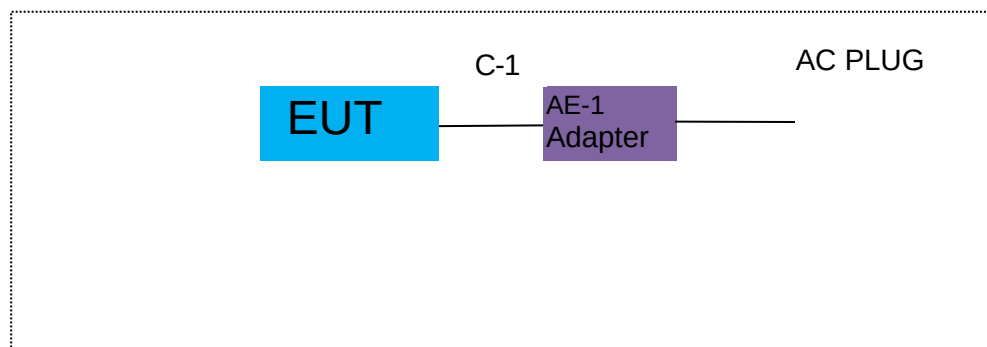

For Conducted Test Cases

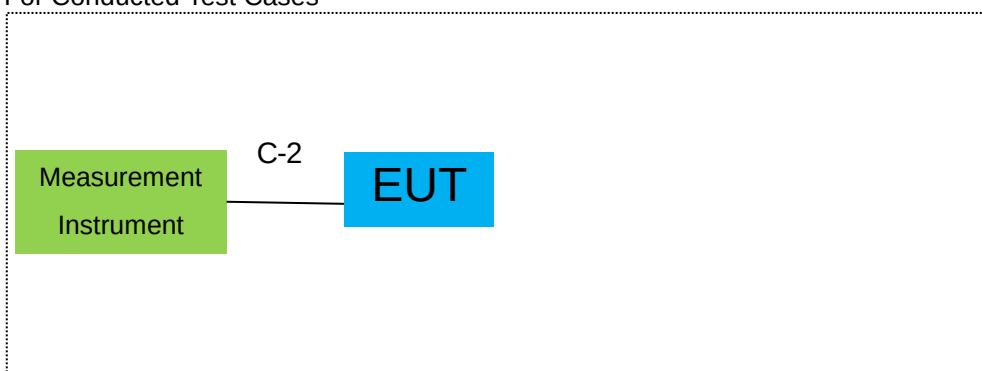

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	KA1801A-1201500USL	N/A	Peripherals
AE-2	Magnet for "ah-nas-ds07z1.us"	ah-nas-ds07z1.us	N/A	Peripherals
AE-3	Alloy Contact Sensor 2, Z-wave 700 (3in1)	ah-nas-ds07z1.us	N/A	Peripherals
AE-4	Micro module switch single w. meter US	ph-pan03.us	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.4m	
C-2	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2025.04.24	2026.04.23	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025.04.17	2026.04.16	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2025.04.17	2026.04.16	1 year
4	Test Receiver	R&S	ESPI7	101318	2025.04.17	2026.04.16	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2025.04.17	2026.04.16	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2025.04.17	2026.04.16	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2025.04.17	2026.04.16	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2023.05.06	2026.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2023.05.06	2026.05.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2023.05.06	2026.05.05	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2023.05.06	2026.05.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2025.04.17	2026.04.16	1 year
2	LISN	R&S	ENV216	101313	2025.04.16	2026.04.15	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2025.04.16	2026.04.15	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is stamped metal Antenna (Gain: -0.9dBi). It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

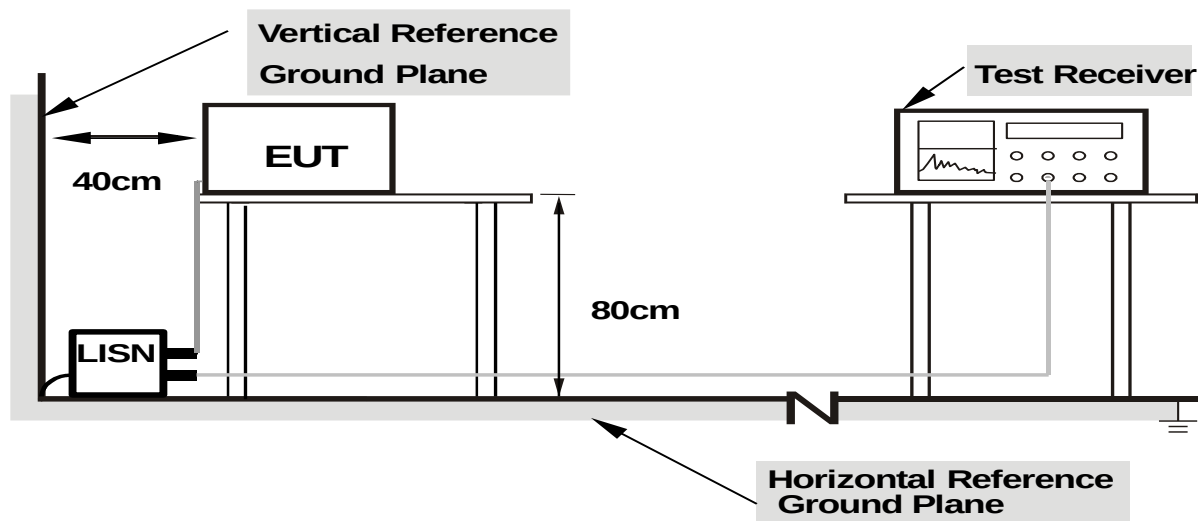

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.2.5 TEST RESULT

EUT :	Alloy Hub v3s	Model Name. :	ah3s.zw8us.4G
Temperature :	21 °C	Relative Humidity :	60%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3700	26.28	19.55	45.83	58.50	-12.67	QP
0.3700	16.32	19.55	35.87	48.50	-12.63	AVG
0.5899	18.13	19.57	37.70	56.00	-18.30	QP
0.5899	8.93	19.57	28.50	46.00	-17.50	AVG
1.2380	15.35	19.60	34.95	56.00	-21.05	QP
1.2380	7.32	19.60	26.92	46.00	-19.08	AVG
1.7380	14.71	19.63	34.34	56.00	-21.66	QP
1.7380	7.10	19.63	26.73	46.00	-19.27	AVG
5.7220	17.42	19.91	37.33	60.00	-22.67	QP
5.7220	7.74	19.91	27.65	50.00	-22.35	AVG
19.7099	25.40	21.67	47.07	60.00	-12.93	QP
19.7099	22.09	21.67	43.76	50.00	-6.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

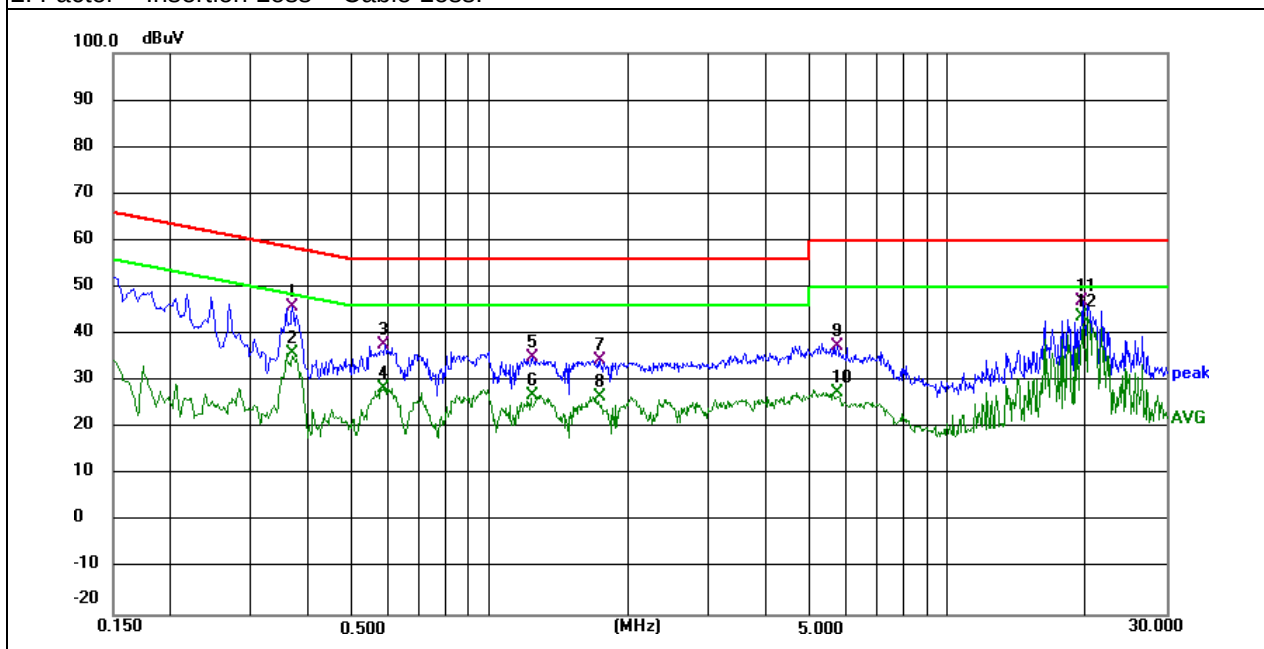


EUT :	Alloy Hub v3s	Model Name. :	ah3s.zw8us.4G
Temperature :	21 °C	Relative Humidity :	60%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	33.28	19.52	52.80	64.40	-11.60	QP
0.1819	12.97	19.52	32.49	54.40	-21.91	AVG
0.3672	27.01	19.54	46.55	58.56	-12.01	QP
0.3672	18.80	19.54	38.34	48.56	-10.22	AVG
0.5740	19.16	19.58	38.74	56.00	-17.26	QP
0.5740	10.47	19.58	30.05	46.00	-15.95	AVG
0.9900	17.29	19.62	36.91	56.00	-19.09	QP
0.9900	9.47	19.62	29.09	46.00	-16.91	AVG
3.0300	15.36	19.75	35.11	56.00	-20.89	QP
3.0300	6.87	19.75	26.62	46.00	-19.38	AVG
20.2580	19.94	21.71	41.65	60.00	-18.35	QP
20.2580	16.19	21.71	37.90	50.00	-12.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

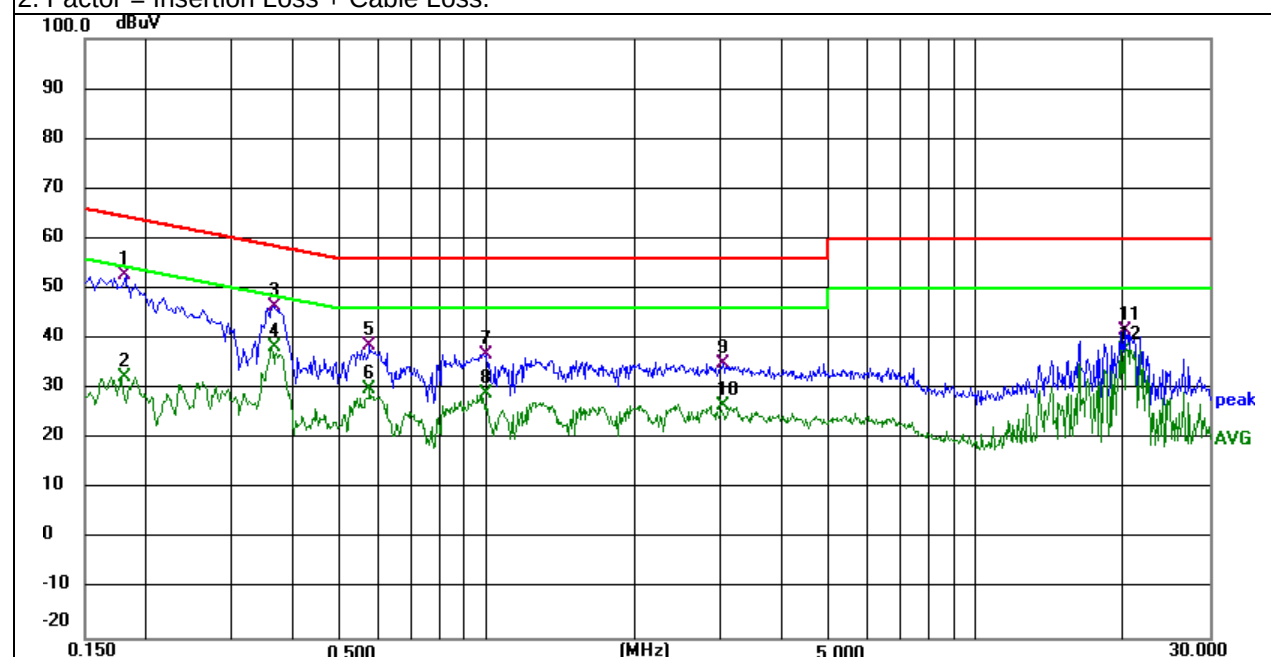

3.3.5 RADIATED EMISSION MEASUREMENT

3.3.6 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
Frequency (MHz)	Limit (dBuV)	
30~88	40	3
88~216	43.5	3
216~960	46	3
960 -10000	54.00	3
*902 - 928	94.00	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) *Note: This is the limit for the fundamental frequency.

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
902-928	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.3.7 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported


3.3.8 DEVIATION FROM TEST STANDARD

No deviation


(A) Radiated Emission Test-Up Frequency Below 30MHz

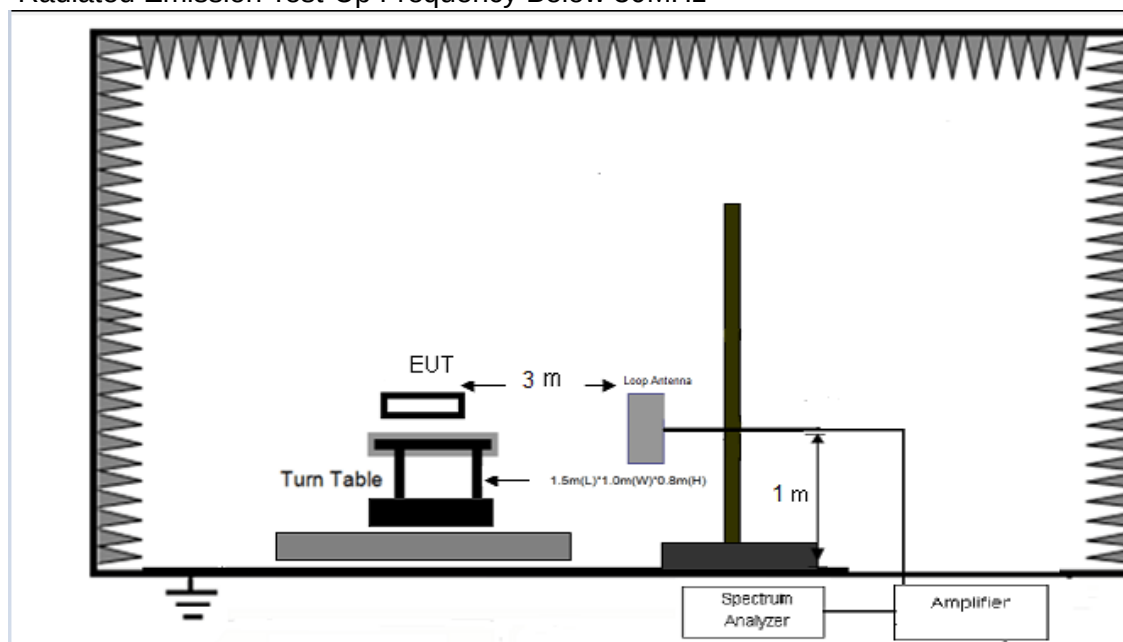

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

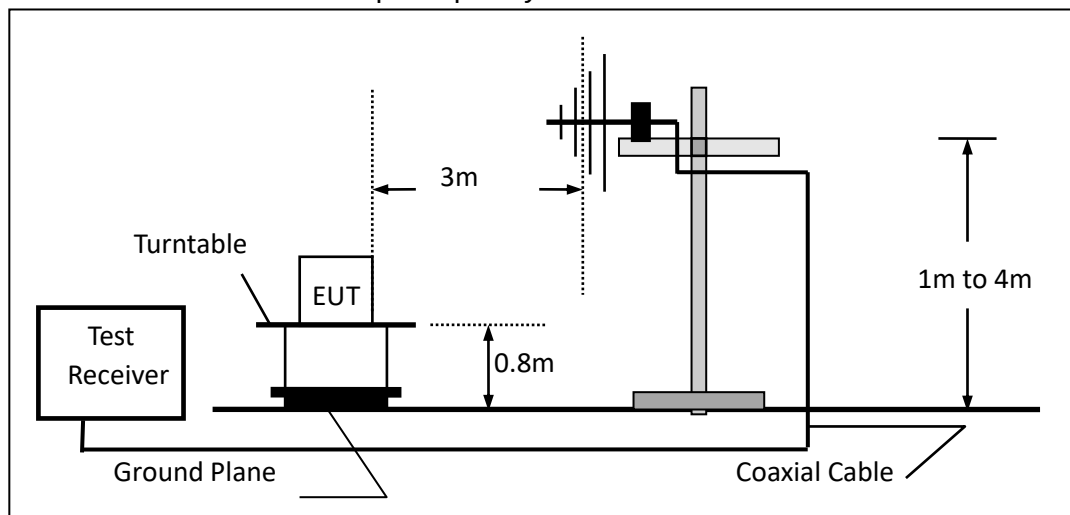

(C) Radiated Emission Test-Up Frequency Above 1GHz

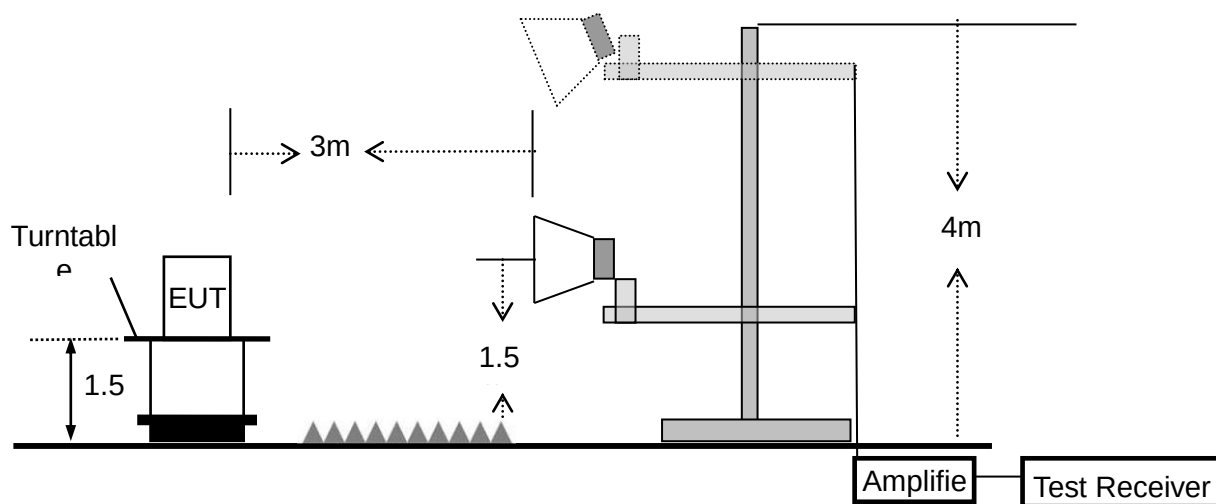

3.3.9 TEST RESULTS (BELOW 30MHz)

EUT :	Alloy Hub v3s	Model Name. :	ah3s.zw8us.4G
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Remark :1. Emission level in dBuV/m= $20 \log (\mu\text{V/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor = $40 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor = $20 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.


3.3.10 TEST RESULTS (BELOW 1000 MHz)

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.4MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
48.1630	9.53	13.89	23.42	40.00	-16.58	QP
120.6990	9.54	12.76	22.30	43.50	-21.20	QP
364.2600	16.06	14.97	31.03	46.00	-14.97	QP
434.0650	26.16	16.15	42.31	46.00	-3.69	QP
801.7859	14.58	22.36	36.94	46.00	-9.06	QP
908.4	68.93	23.45	92.38	94.00	-1.62	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

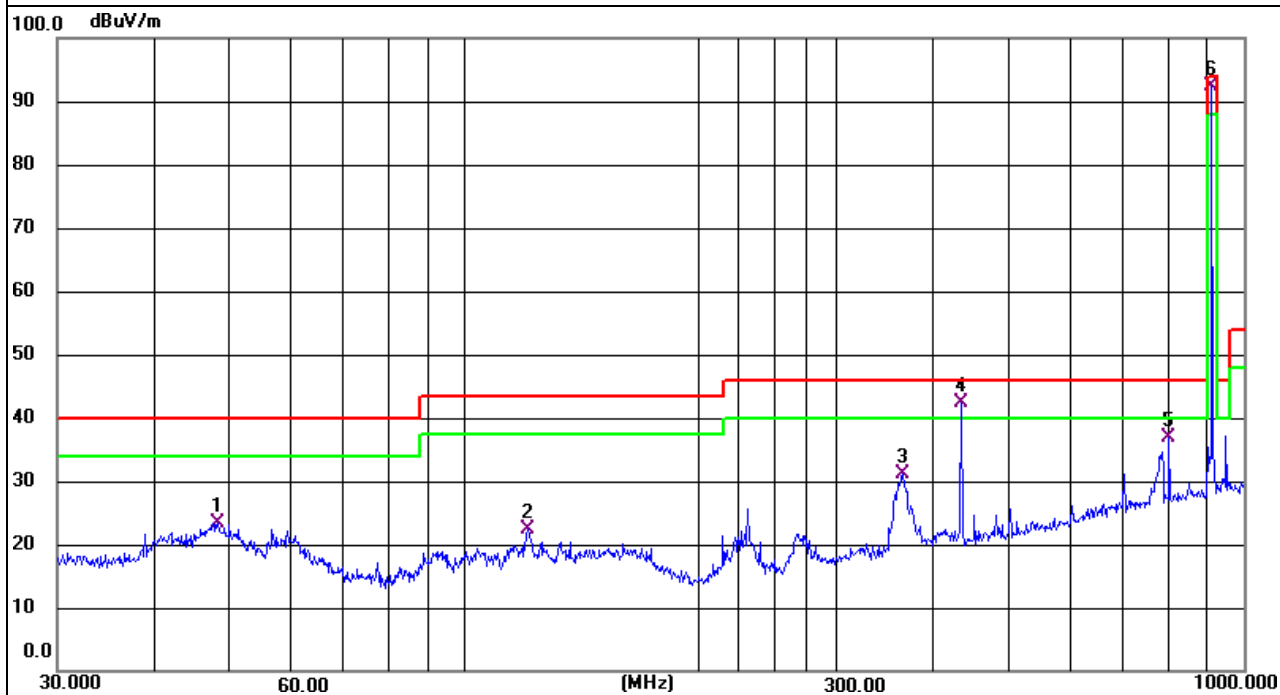


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.4MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
148.4410	5.75	14.59	20.34	43.50	-23.16	QP
225.3080	11.41	11.58	22.99	46.00	-23.01	QP
364.2600	18.91	14.97	33.88	46.00	-12.12	QP
451.1350	12.27	16.40	28.67	46.00	-17.33	QP
801.7859	12.87	22.36	35.23	46.00	-10.77	QP
908.4	69.63	23.45	93.08	94.00	-0.92	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

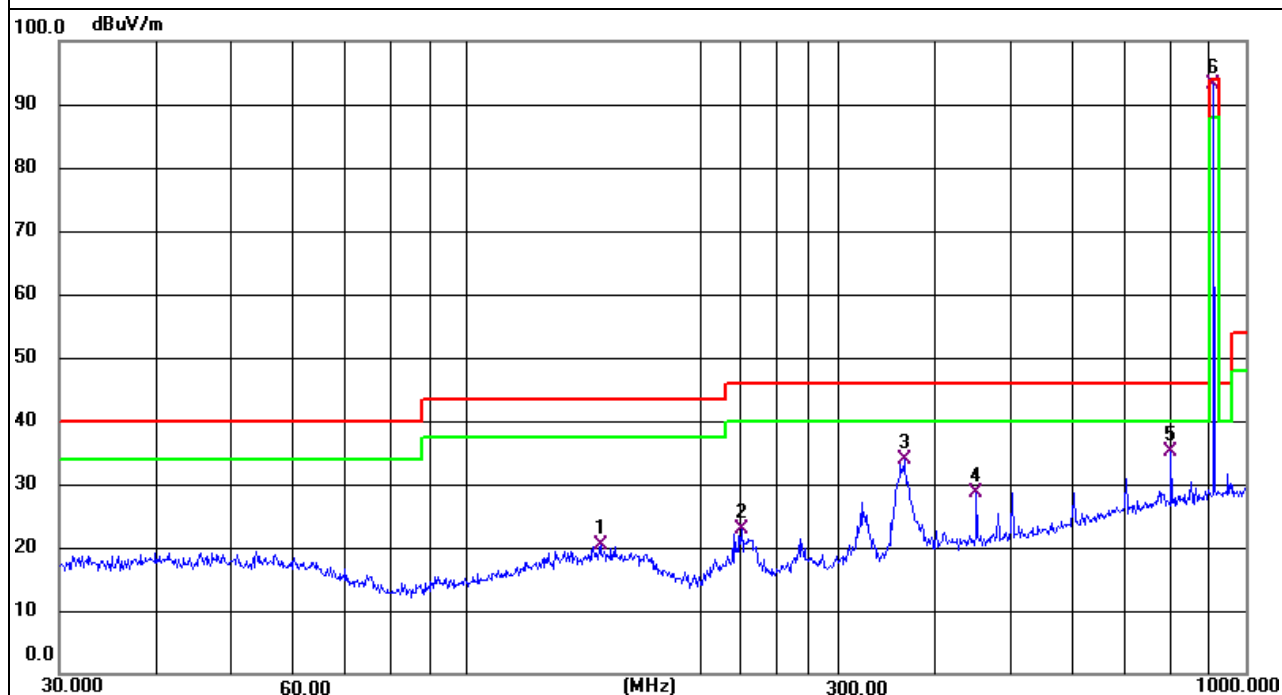


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.42MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
55.8050	16.44	13.43	29.87	40.00	-10.13	QP
167.2370	10.55	14.00	24.55	43.50	-18.95	QP
229.2930	12.96	11.82	24.78	46.00	-21.22	QP
321.0610	12.25	14.12	26.37	46.00	-19.63	QP
801.7859	10.88	22.36	33.24	46.00	-12.76	QP
908.42	68.74	23.45	92.19	94.00	-1.81	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

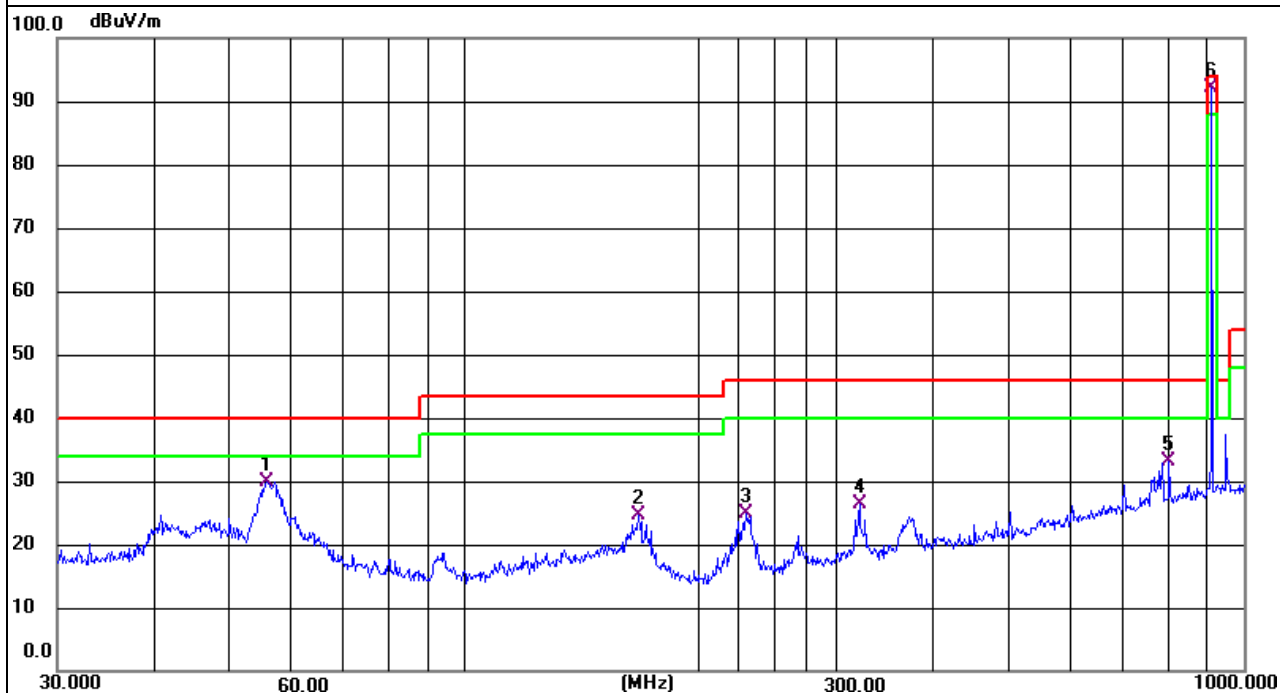


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.42MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
55.8050	8.80	13.43	22.23	40.00	-17.77	QP
126.7720	16.47	13.10	29.57	43.50	-13.93	QP
164.9070	15.52	14.22	29.74	43.50	-13.76	QP
362.9840	16.20	14.94	31.14	46.00	-14.86	QP
801.7859	12.25	22.36	34.61	46.00	-11.39	QP
908.42	69.55	23.45	93.00	94.00	-1.00	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

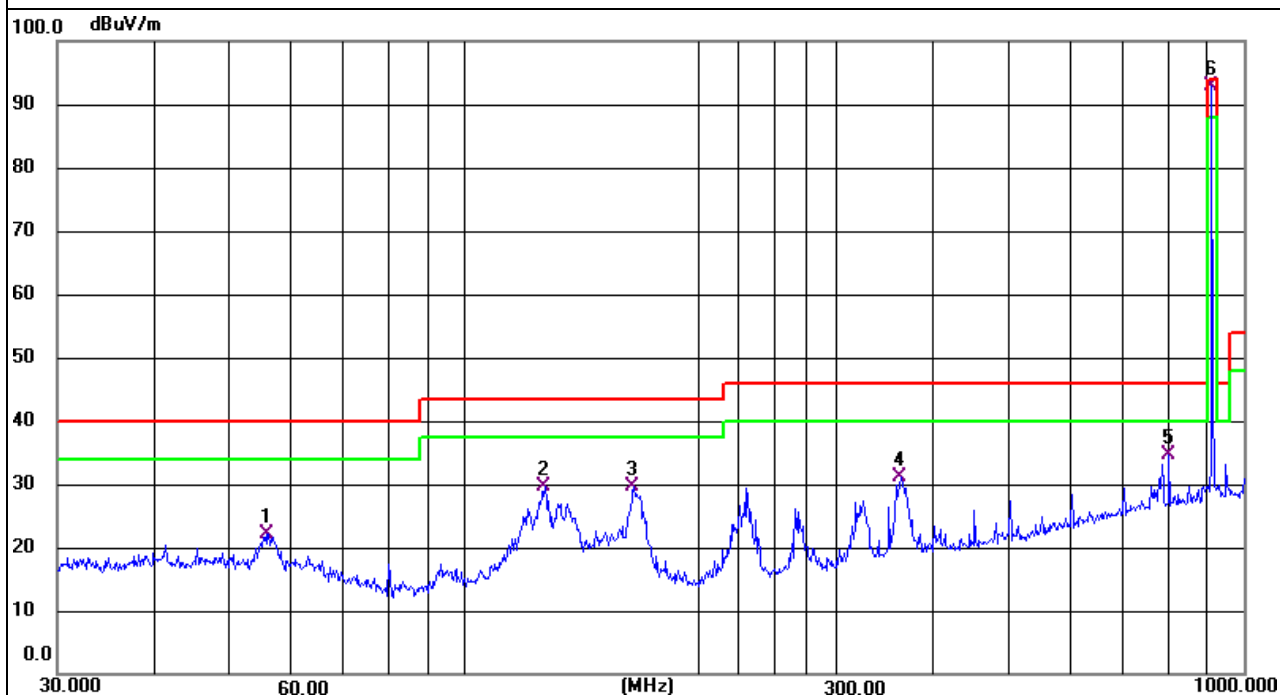


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	912MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
56.5930	16.32	13.37	29.69	40.00	-10.31	QP
165.4870	7.86	14.16	22.02	43.50	-21.48	QP
271.3250	10.80	12.85	23.65	46.00	-22.35	QP
370.7020	12.13	15.11	27.24	46.00	-18.76	QP
776.8780	9.47	22.14	31.61	46.00	-14.39	QP
912.0000	68.83	23.49	92.32	94.00	-1.68	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

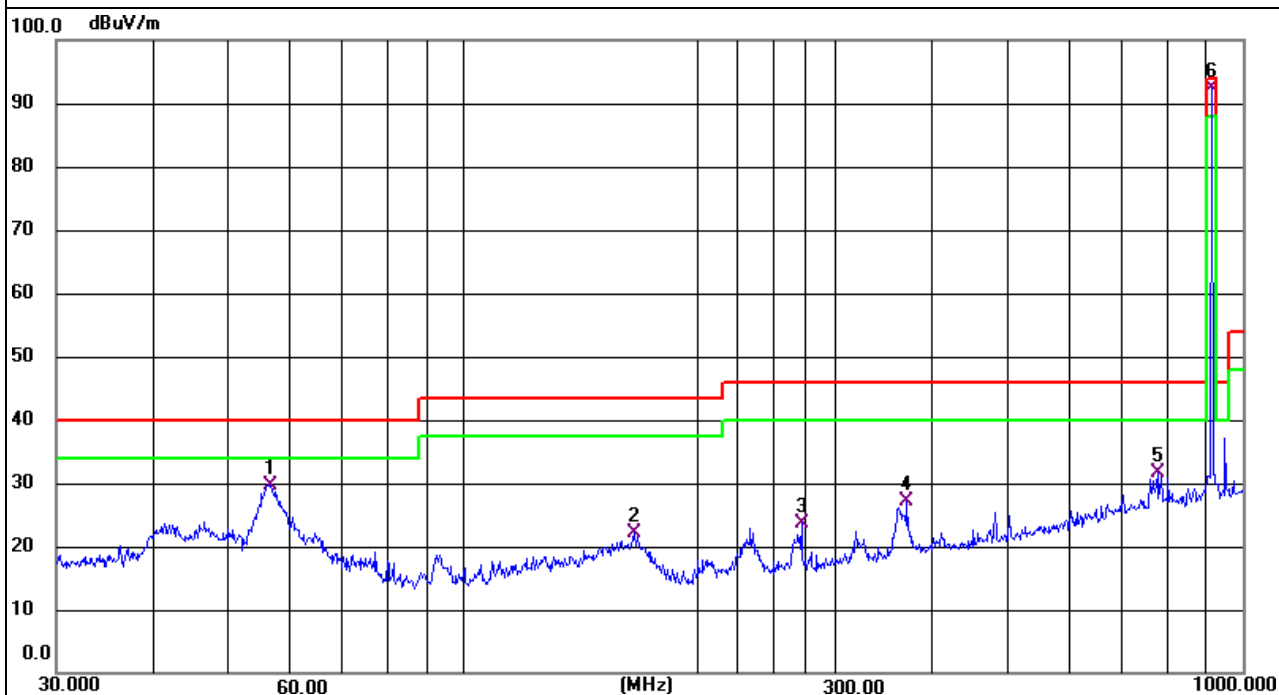


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	912MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
55.6090	8.60	13.45	22.05	40.00	-17.95	QP
132.6850	15.69	13.48	29.17	43.50	-14.33	QP
233.3490	13.58	11.95	25.53	46.00	-20.47	QP
361.7140	15.14	14.92	30.06	46.00	-15.94	QP
801.7859	12.16	22.36	34.52	46.00	-11.48	QP
912.0000	68.61	23.49	92.10	94.00	-1.90	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

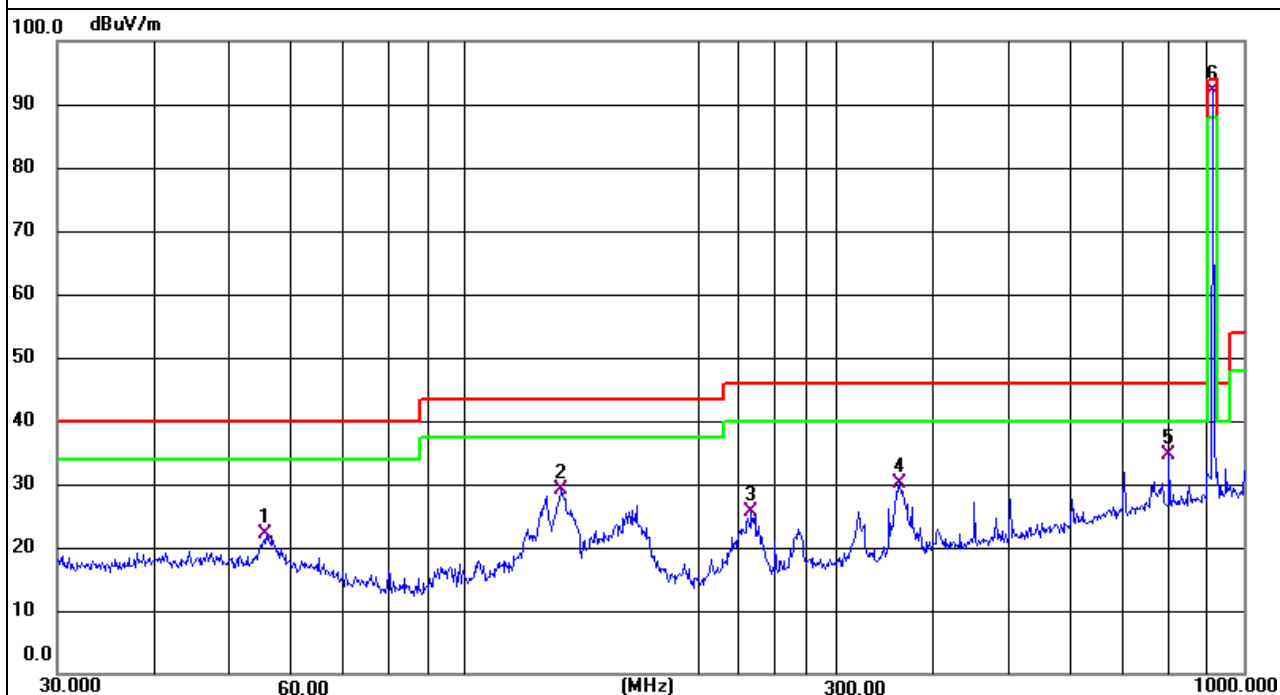


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	916MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
56.0010	16.77	13.42	30.19	40.00	-9.81	QP
93.1130	13.08	10.10	23.18	43.50	-20.32	QP
164.3300	7.72	14.27	21.99	43.50	-21.51	QP
365.5390	10.37	14.99	25.36	46.00	-20.64	QP
776.8780	14.63	22.14	36.77	46.00	-9.23	QP
916.0000	69.06	23.53	92.59	94.00	-1.41	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

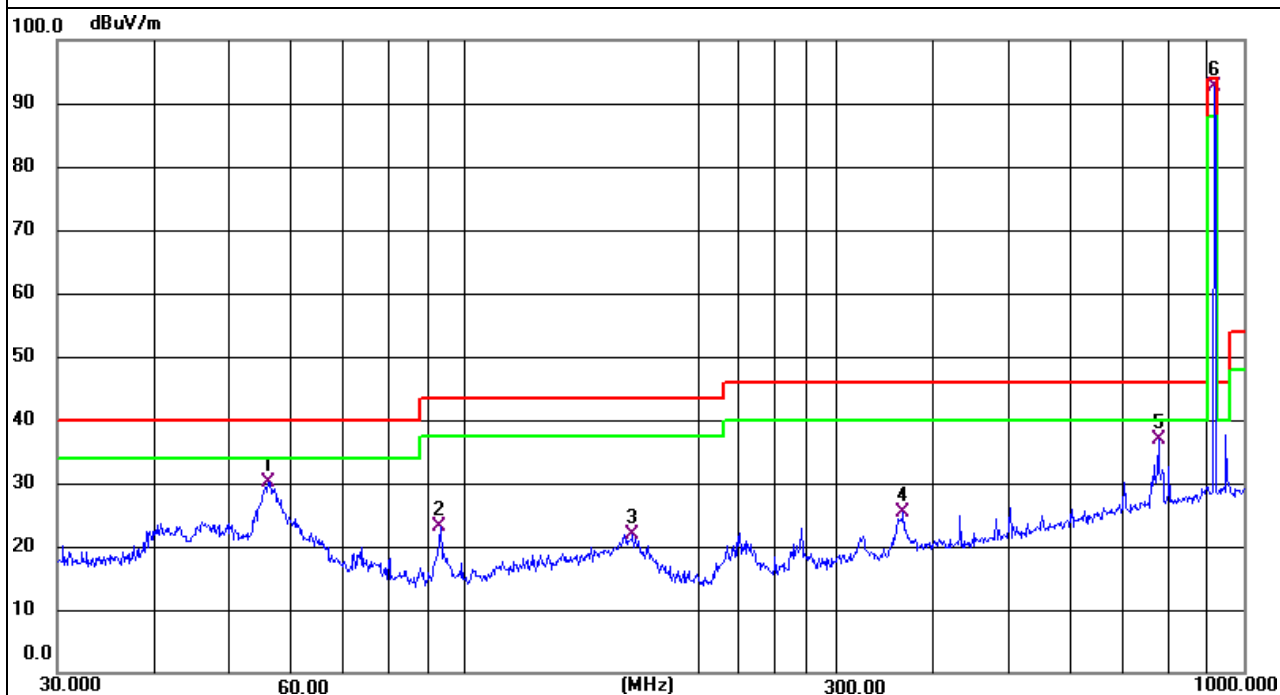


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	916MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
55.6090	8.57	13.45	22.02	40.00	-17.98	QP
127.2180	15.51	13.13	28.64	43.50	-14.86	QP
235.8160	16.67	12.01	28.68	46.00	-17.32	QP
322.1890	16.06	14.15	30.21	46.00	-15.79	QP
434.0650	22.37	16.15	38.52	46.00	-7.48	QP
916.0000	69.11	23.53	92.64	94.00	-1.36	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

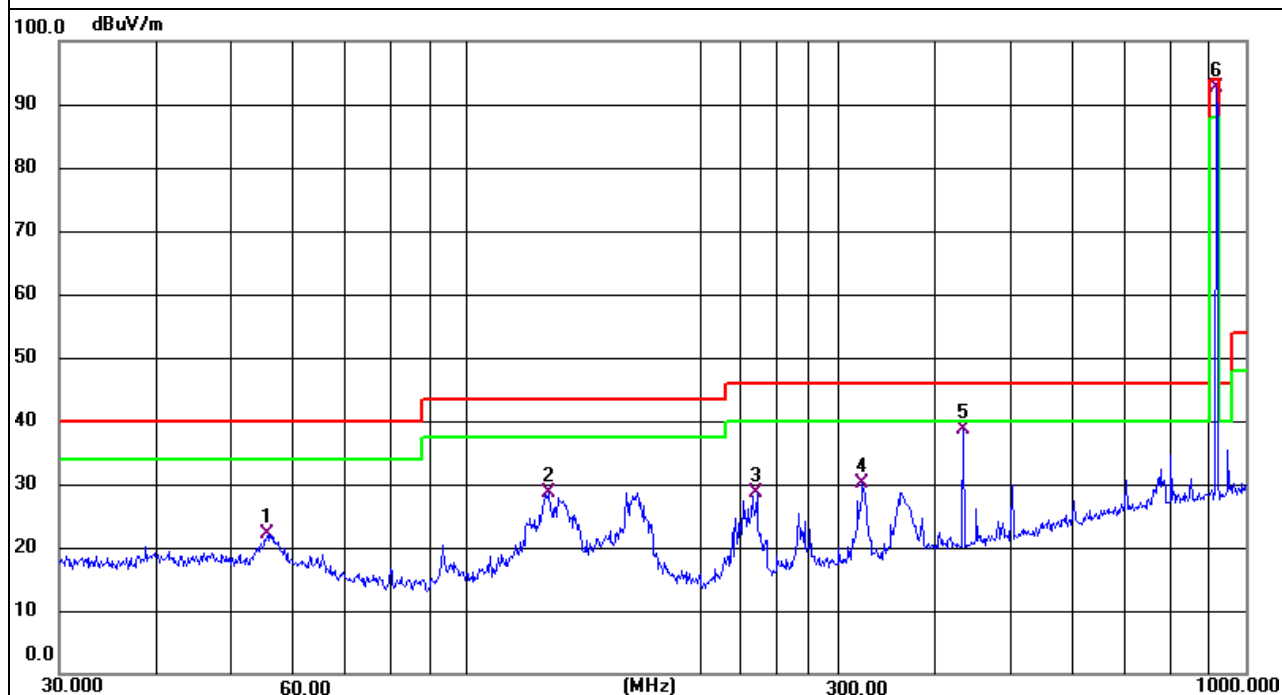


3.3.11 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.4MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1817.275	58.11	-15.94	42.17	74.00	-31.83	peak
1817.275	54.87	-15.94	38.93	54.00	-15.07	AVG
2827.500	54.01	-10.30	43.71	74.00	-30.29	peak
2827.500	47.99	-10.30	37.69	54.00	-16.31	AVG
4542.375	53.93	-7.67	46.26	74.00	-27.74	peak
4542.375	51.61	-7.67	43.94	54.00	-10.06	AVG
6698.400	50.51	-2.86	47.65	74.00	-26.35	peak
6698.400	43.06	-2.86	40.20	54.00	-13.80	AVG
9977.275	48.64	1.06	49.70	74.00	-24.30	peak
9977.275	42.09	1.06	43.15	54.00	-10.85	AVG
14305.475	46.46	5.79	52.25	74.00	-21.75	peak
14305.475	38.55	5.79	44.34	54.00	-9.66	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

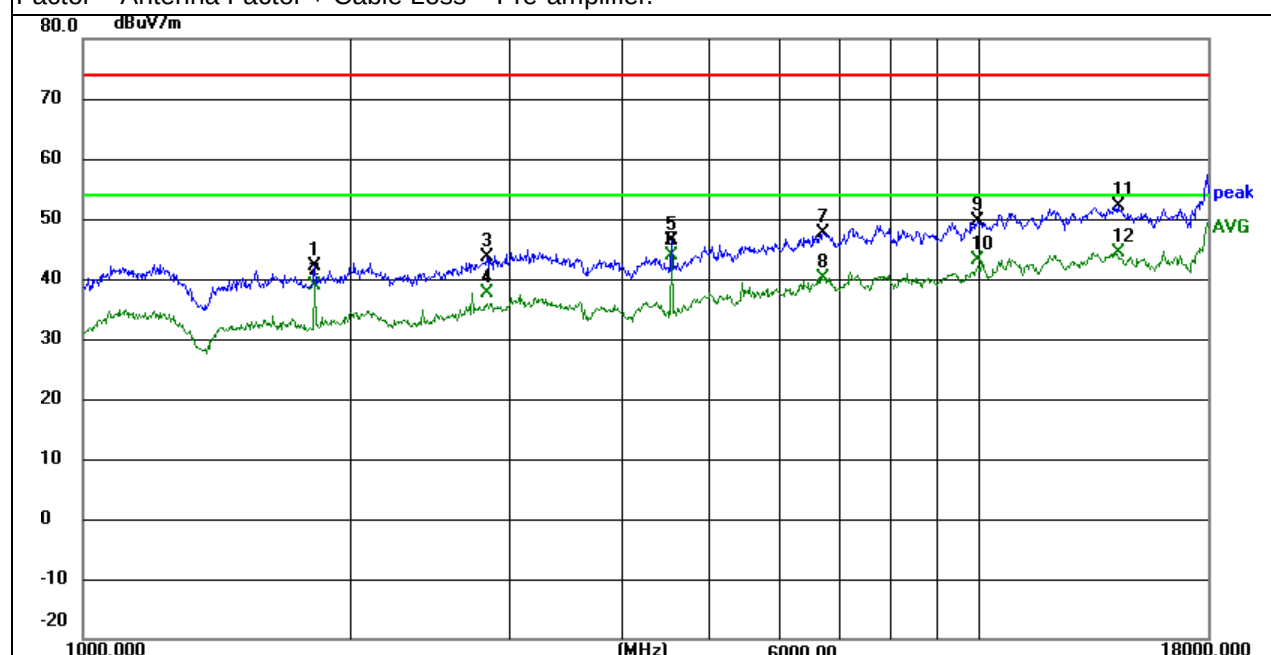


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.4MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1817.275	56.65	-15.94	40.71	74.00	-33.29	peak
1817.275	52.62	-15.94	36.68	54.00	-17.32	AVG
3564.025	52.98	-9.81	43.17	74.00	-30.83	peak
3564.025	48.54	-9.81	38.73	54.00	-15.27	AVG
4542.375	55.97	-7.67	48.30	74.00	-25.70	peak
4542.375	54.02	-7.67	46.35	54.00	-7.65	AVG
7323.150	51.32	-2.08	49.24	74.00	-24.76	peak
7323.150	43.01	-2.08	40.93	54.00	-13.07	AVG
11052.100	47.47	3.65	51.12	74.00	-22.88	peak
11052.100	39.88	3.65	43.53	54.00	-10.47	AVG
16610.675	46.08	6.49	52.57	74.00	-21.43	peak
16610.675	37.56	6.49	44.05	54.00	-9.95	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

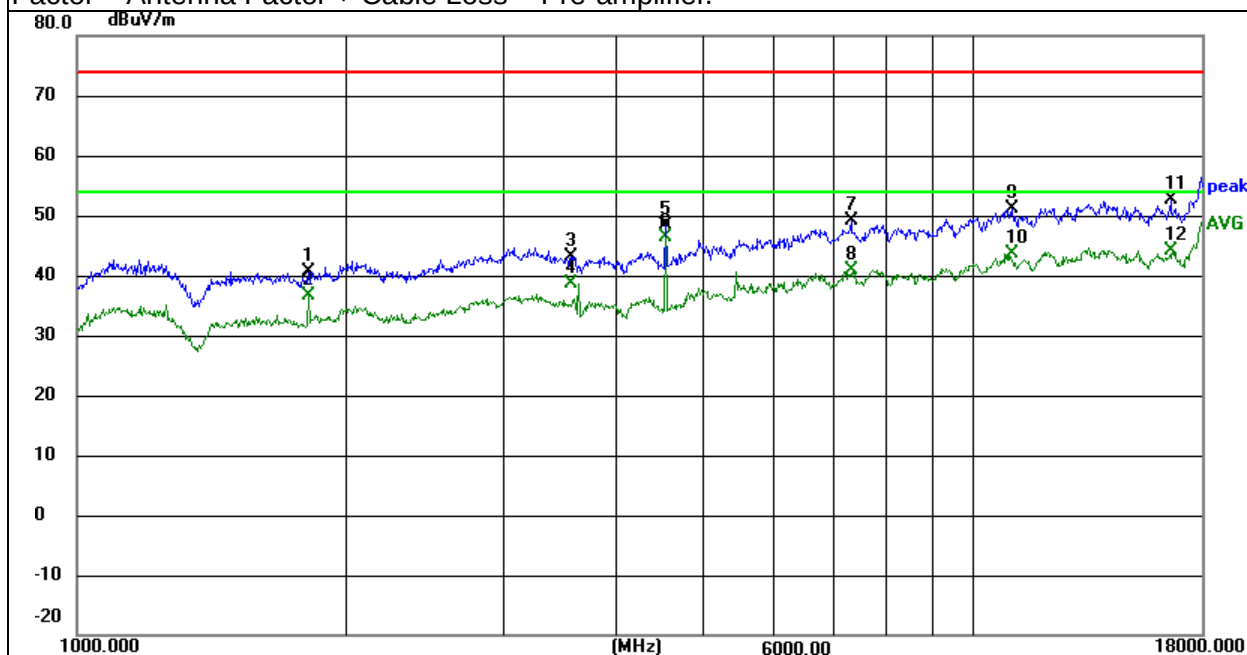

Note:


- 1) EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).
- 2) Since the PEAK test results are below the AV limit, according to 15.31, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.42MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1817.275	57.80	-15.94	41.86	74.00	-32.14	peak
1817.275	54.48	-15.94	38.54	54.00	-15.46	AVG
2725.500	57.70	-11.04	46.66	74.00	-27.34	peak
2725.500	55.65	-11.04	44.61	54.00	-9.39	AVG
3595.475	53.21	-9.14	44.07	74.00	-29.93	peak
3595.475	48.06	-9.14	38.92	54.00	-15.08	AVG
5451.025	52.02	-6.08	45.94	74.00	-28.06	peak
5451.025	49.13	-6.08	43.05	54.00	-10.95	AVG
7786.825	50.68	-1.54	49.14	74.00	-24.86	peak
7786.825	42.44	-1.54	40.90	54.00	-13.10	AVG
14739.825	47.12	5.20	52.32	74.00	-21.68	peak
14739.825	39.36	5.20	44.56	54.00	-9.44	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

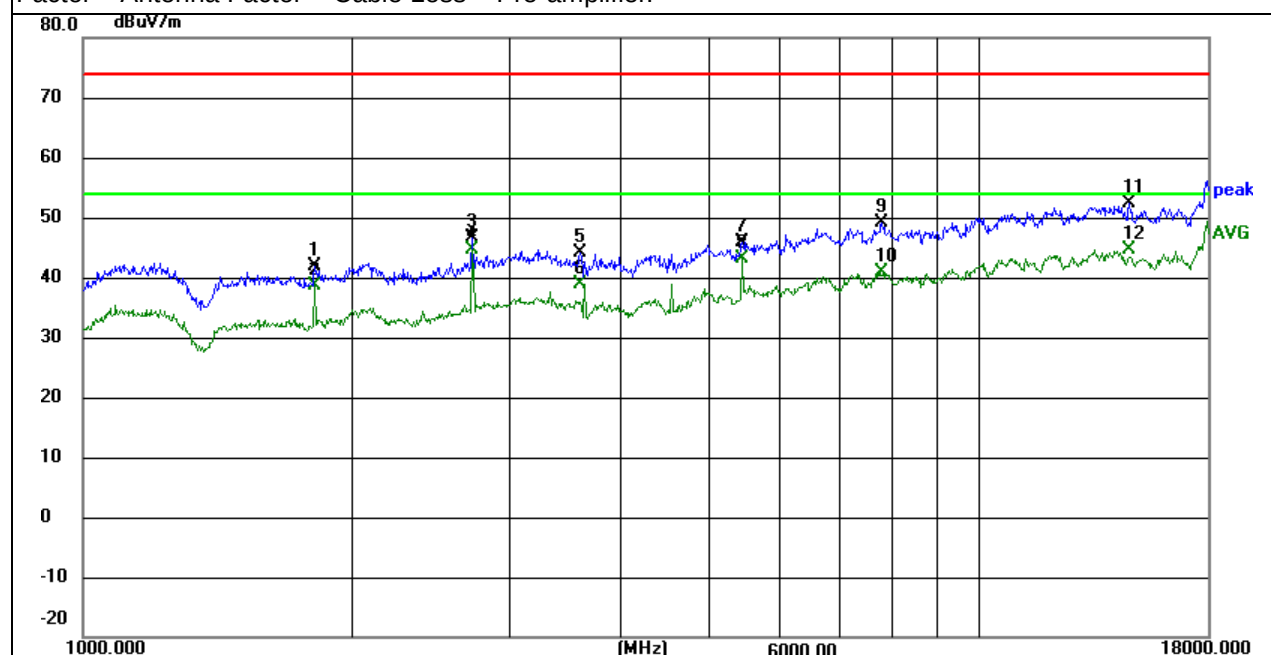


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	908.42MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1989.825	55.79	-13.82	41.97	74.00	-32.03	peak
1989.825	48.71	-13.82	34.89	54.00	-19.11	AVG
2725.500	62.50	-11.04	51.46	74.00	-22.54	peak
2725.500	60.63	-11.04	49.59	54.00	-4.41	AVG
4542.800	57.31	-7.66	49.65	74.00	-24.35	peak
4542.800	55.42	-7.66	47.76	54.00	-6.24	AVG
5451.025	53.89	-6.08	47.81	74.00	-26.19	peak
5451.025	50.36	-6.08	44.28	54.00	-9.72	AVG
9350.400	48.84	0.01	48.85	74.00	-25.15	peak
9350.400	41.01	0.01	41.02	54.00	-12.98	AVG
13999.900	46.26	5.67	51.93	74.00	-22.07	peak
13999.900	38.72	5.67	44.39	54.00	-9.61	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

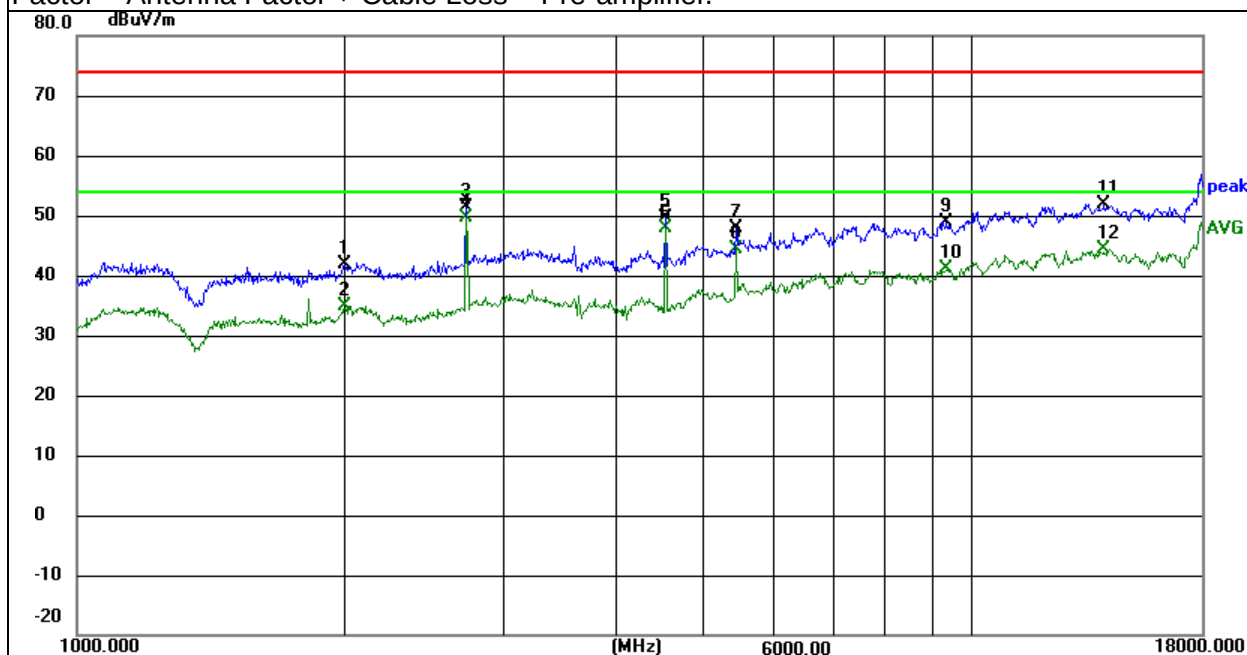

Note:


- 1) EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).
- 2) Since the PEAK test results are below the AV limit, according to 15.31, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	912MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1720.800	58.36	-16.57	41.79	74.00	-32.21	peak
1720.800	53.71	-16.57	37.14	54.00	-16.86	AVG
2812.200	53.72	-10.36	43.36	74.00	-30.64	peak
2812.200	47.38	-10.36	37.02	54.00	-16.98	AVG
4560.225	59.42	-7.73	51.69	74.00	-22.31	peak
4560.225	57.05	-7.73	49.32	54.00	-4.68	AVG
5472.275	55.53	-5.73	49.80	74.00	-24.20	peak
5472.275	52.90	-5.73	47.17	54.00	-6.83	AVG
7717.125	50.61	-1.73	48.88	74.00	-25.12	peak
7717.125	43.52	-1.73	41.79	54.00	-12.21	AVG
13511.150	46.59	5.47	52.06	74.00	-21.94	peak
13511.150	39.08	5.47	44.55	54.00	-9.45	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

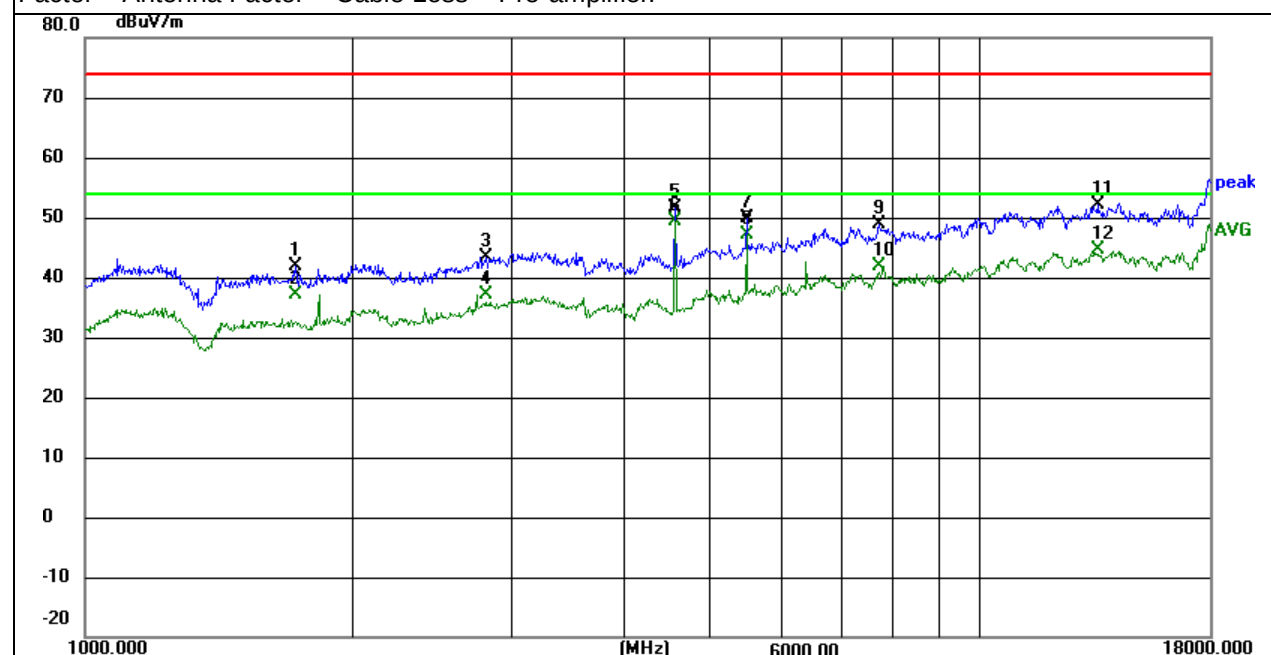


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	912MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1824.075	58.51	-15.76	42.75	74.00	-31.25	peak
1824.075	54.34	-15.76	38.58	54.00	-15.42	AVG
2736.125	63.33	-10.94	52.39	74.00	-21.61	peak
2736.125	60.60	-10.94	49.66	54.00	-4.34	AVG
3648.600	54.14	-10.15	43.99	74.00	-30.01	peak
3648.600	50.65	-10.15	40.50	54.00	-13.50	AVG
4560.225	58.68	-7.73	50.95	74.00	-23.05	peak
4560.225	57.82	-7.73	50.09	54.00	-3.91	AVG
5472.275	54.59	-5.73	48.86	74.00	-25.14	peak
5472.275	52.20	-5.73	46.47	54.00	-7.53	AVG
10057.600	48.90	1.74	50.64	74.00	-23.36	peak
10057.600	40.64	1.74	42.38	54.00	-11.62	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

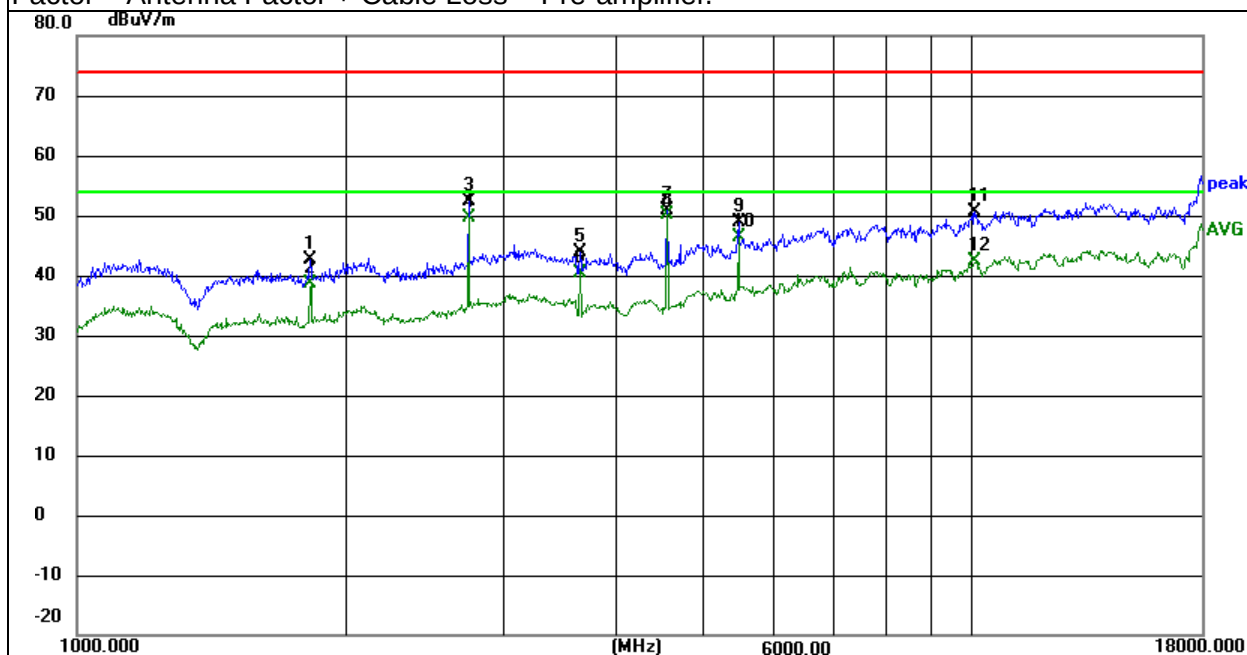

Note:


- 1) EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).
- 2) Since the PEAK test results are below the AV limit, according to 15.31, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	916MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1832.575	61.03	-15.54	45.49	74.00	-28.51	peak
1832.575	58.52	-15.54	42.98	54.00	-11.02	AVG
2748.450	57.17	-10.84	46.33	74.00	-27.67	peak
2748.450	54.22	-10.84	43.38	54.00	-10.62	AVG
4580.200	60.30	-7.90	52.40	74.00	-21.60	peak
4580.200	57.95	-7.90	50.05	54.00	-3.95	AVG
5496.500	56.62	-5.35	51.27	74.00	-22.73	peak
5496.500	54.56	-5.35	49.21	54.00	-4.79	AVG
6412.375	52.99	-4.01	48.98	74.00	-25.02	peak
6412.375	49.38	-4.01	45.37	54.00	-8.63	AVG
12142.225	47.44	4.66	52.10	74.00	-21.90	peak
12142.225	39.16	4.66	43.82	54.00	-10.18	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

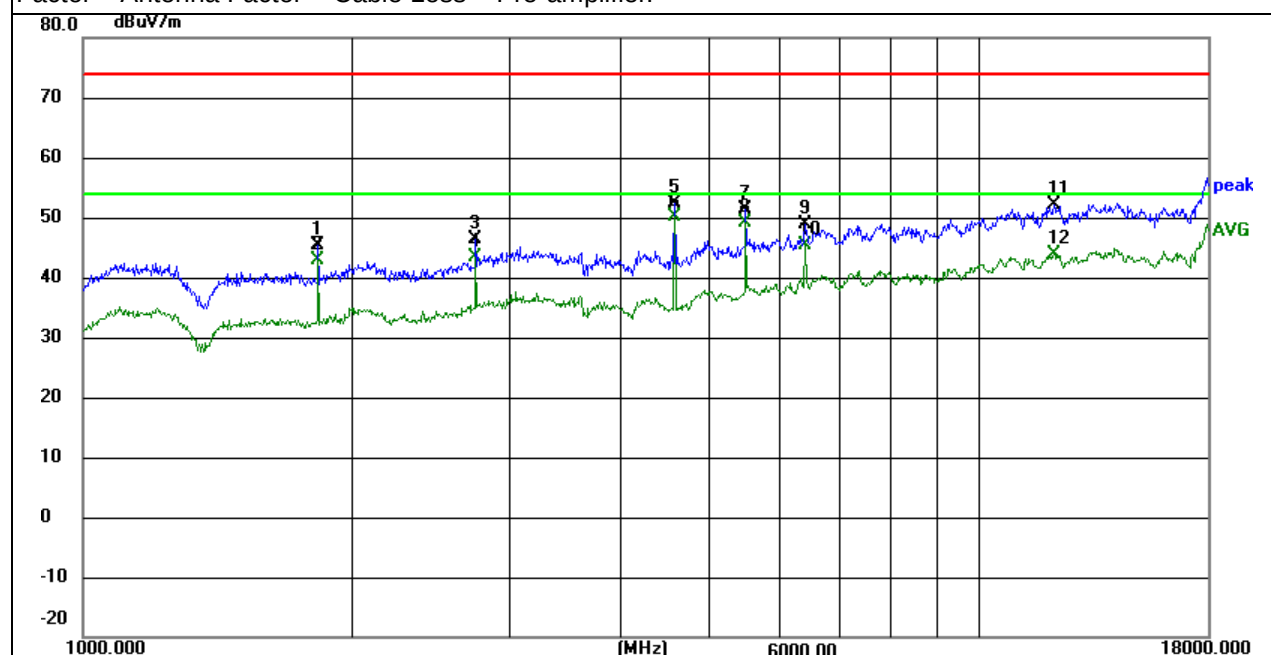


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	916MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1832.150	61.37	-15.55	45.82	74.00	-28.18	peak
1832.150	58.59	-15.55	43.04	54.00	-10.96	AVG
2748.450	58.59	-10.84	47.75	74.00	-26.25	peak
2748.450	56.59	-10.84	45.75	54.00	-8.25	AVG
3664.325	56.79	-9.93	46.86	74.00	-27.14	peak
3664.325	53.62	-9.93	43.69	54.00	-10.31	AVG
4581.050	58.54	-7.91	50.63	74.00	-23.37	peak
4581.050	55.08	-7.91	47.17	54.00	-6.83	AVG
5496.075	56.30	-5.35	50.95	74.00	-23.05	peak
5496.075	54.76	-5.35	49.41	54.00	-4.59	AVG
13348.375	46.57	5.17	51.74	74.00	-22.26	peak
14219.200	38.72	5.72	44.44	54.00	-9.56	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

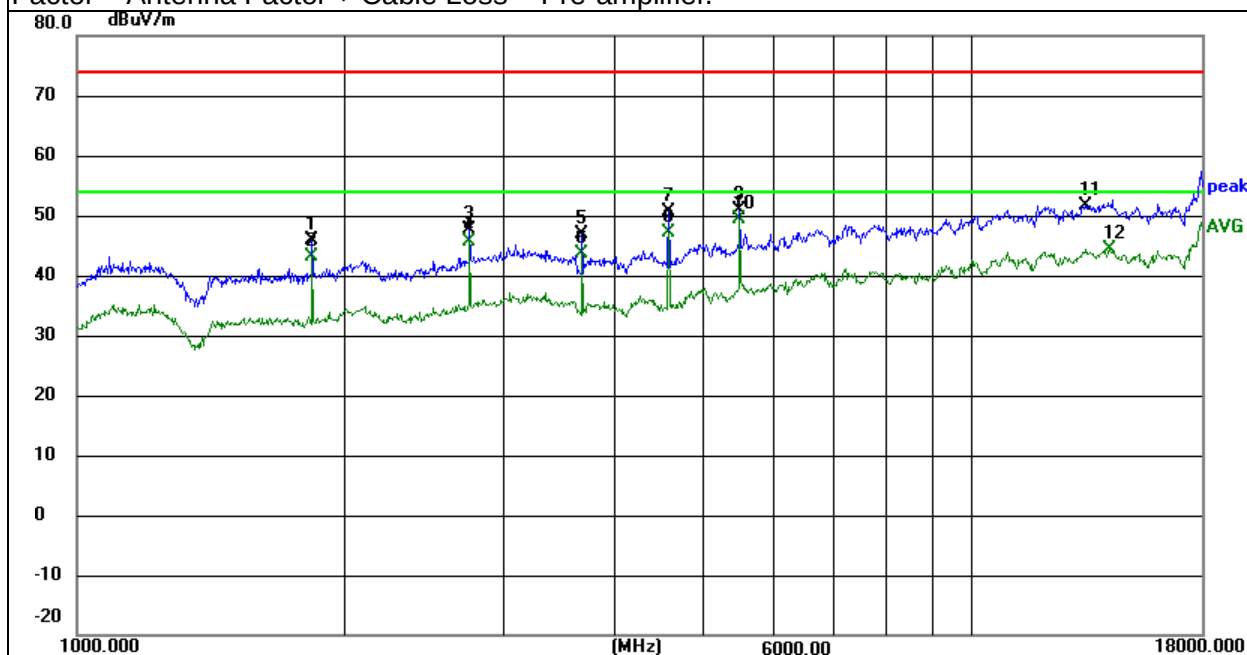

Note:

- 1) EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).
- 2) Since the PEAK test results are below the AV limit, according to 15.31, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.3.12 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-908.4MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-3.66	30.81	27.15	46.00	-18.85	QP
928.0000	-2.79	31.12	28.33	46.00	-17.67	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

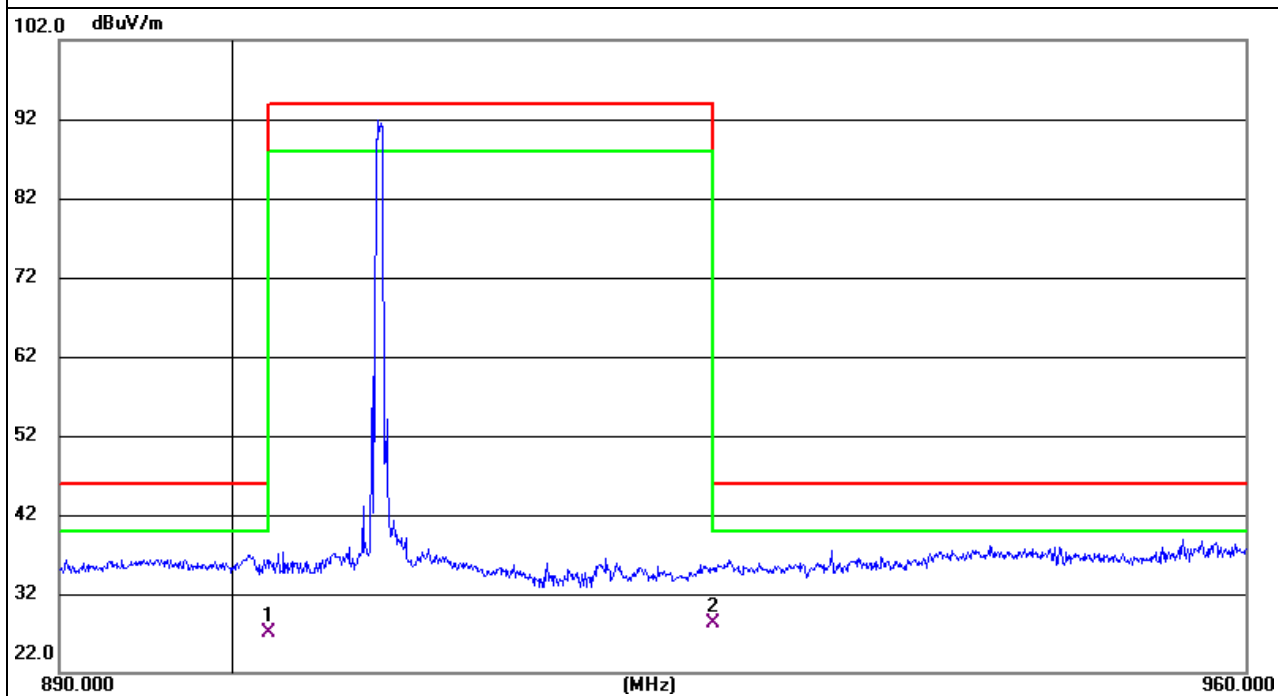


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-908.4MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-1.31	30.81	29.50	46.00	-16.50	QP
928.0000	-2.65	31.12	28.47	46.00	-17.53	QP

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

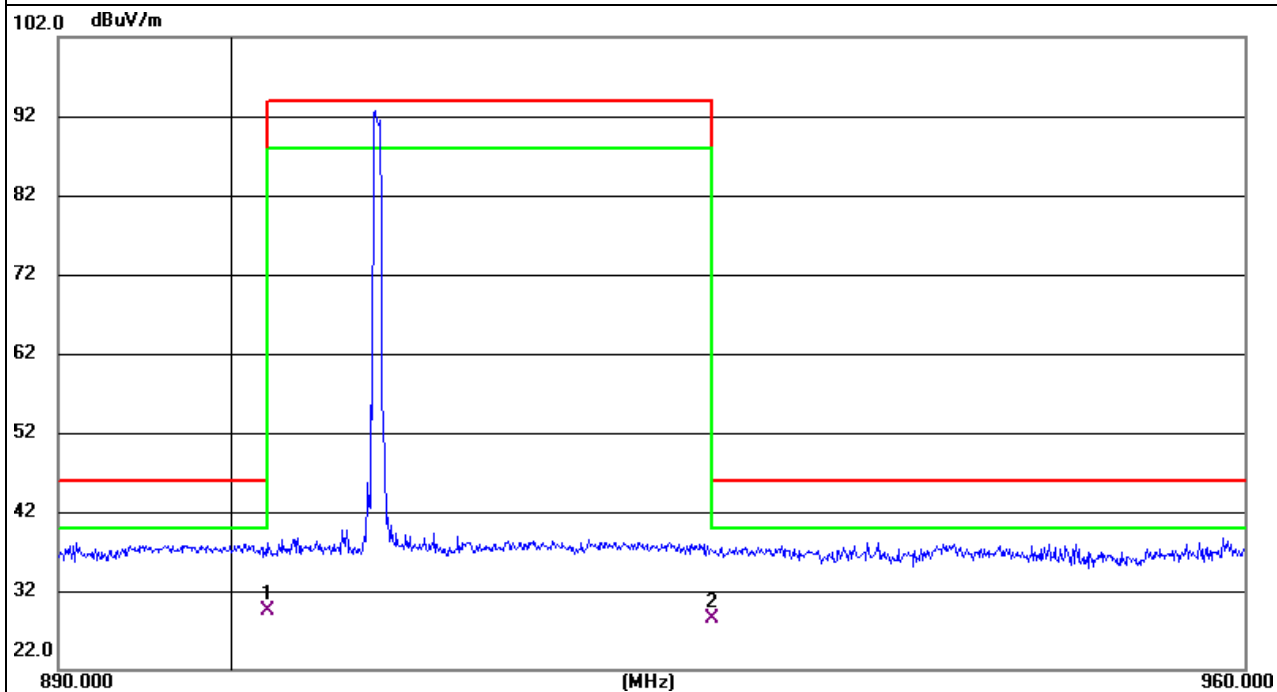

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-908.42MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-2.71	30.81	28.10	46.00	-17.90	QP
928.0000	-3.68	31.12	27.44	46.00	-18.56	QP

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

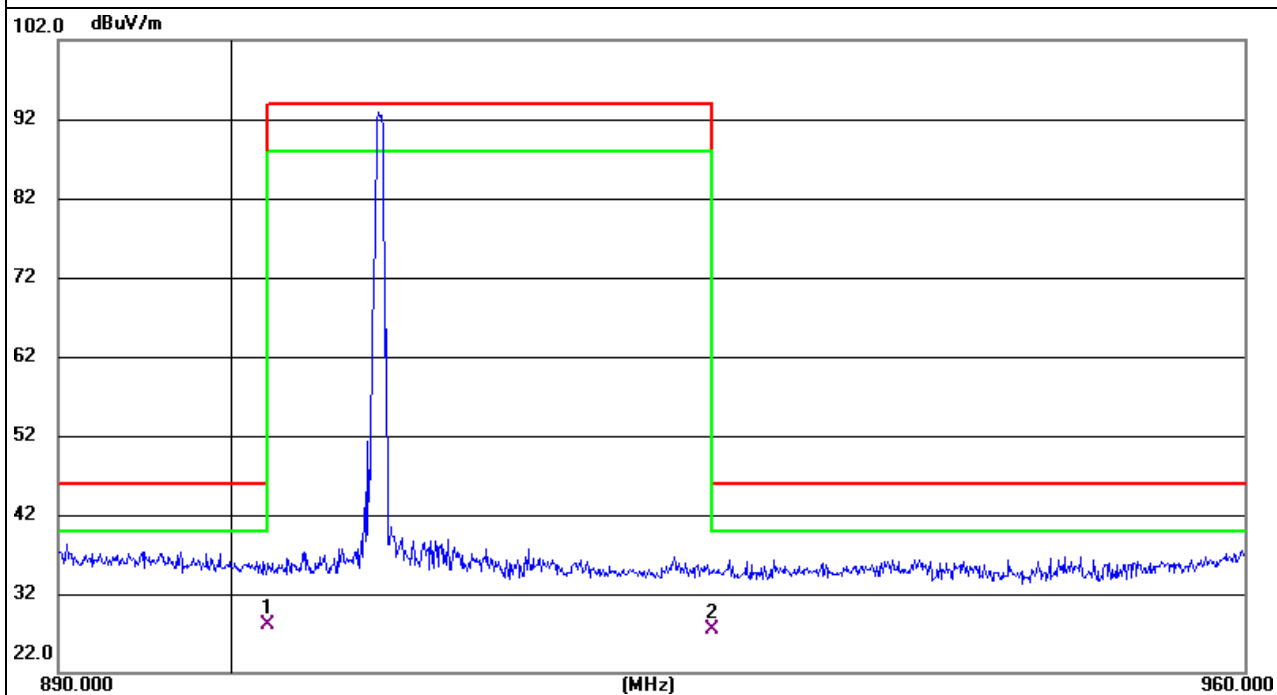


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-908.42MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-2.11	30.81	28.70	46.00	-17.30	QP
928.0000	-4.00	31.12	27.12	46.00	-18.88	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

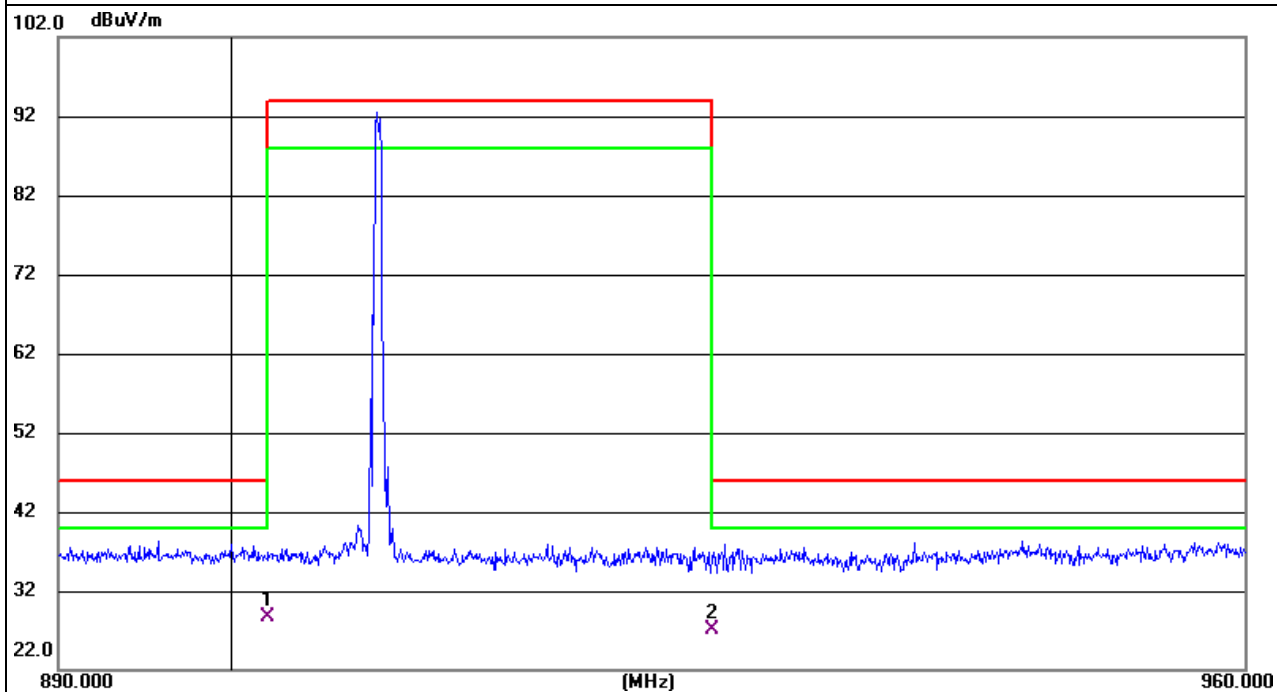


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-912MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-3.93	30.81	26.88	46.00	-19.12	QP
928.0000	-3.97	31.12	27.15	46.00	-18.85	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

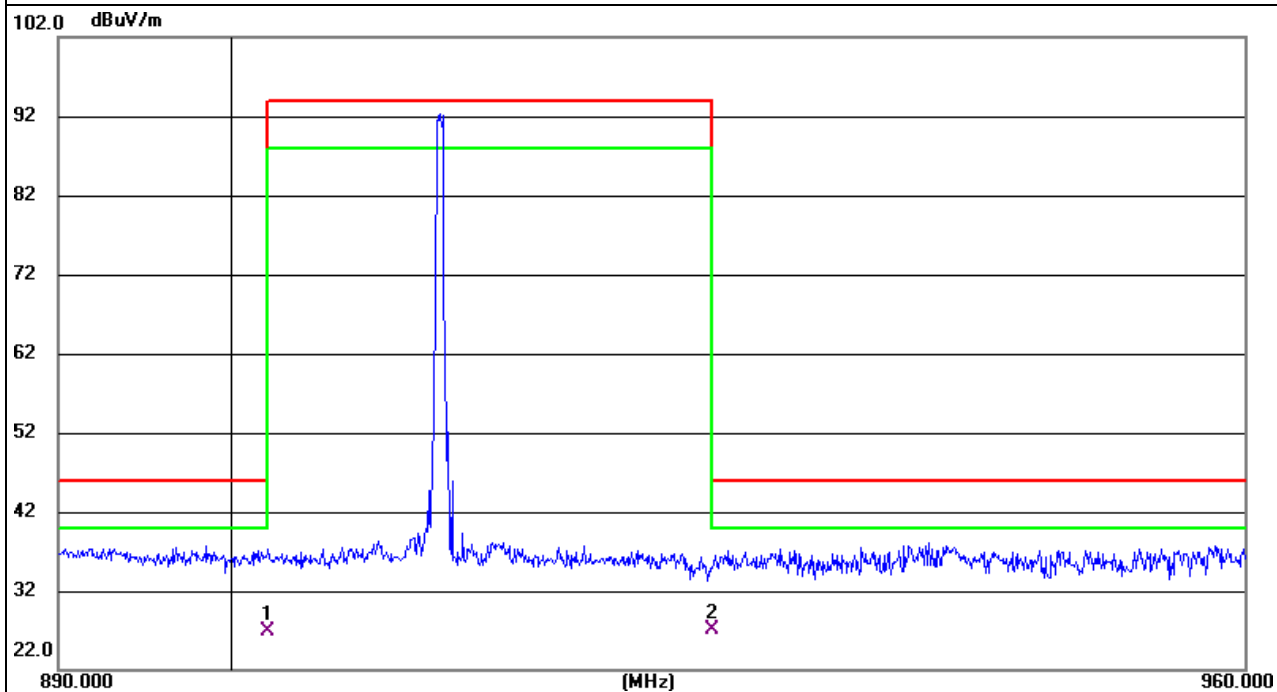


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-912MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-3.26	30.81	27.55	46.00	-18.45	QP
928.0000	-4.35	31.12	26.77	46.00	-19.23	QP

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

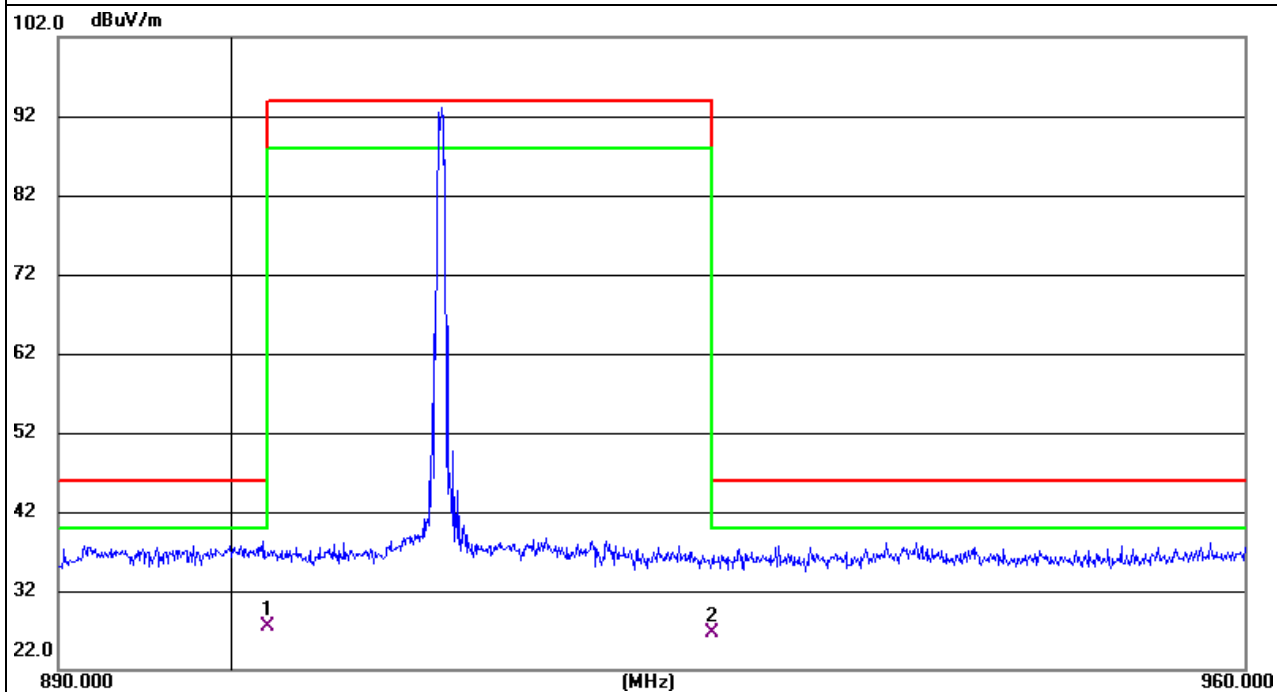

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-916MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-3.90	30.81	26.91	46.00	-19.09	QP
928.0000	-3.90	31.12	27.22	46.00	-18.78	QP

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

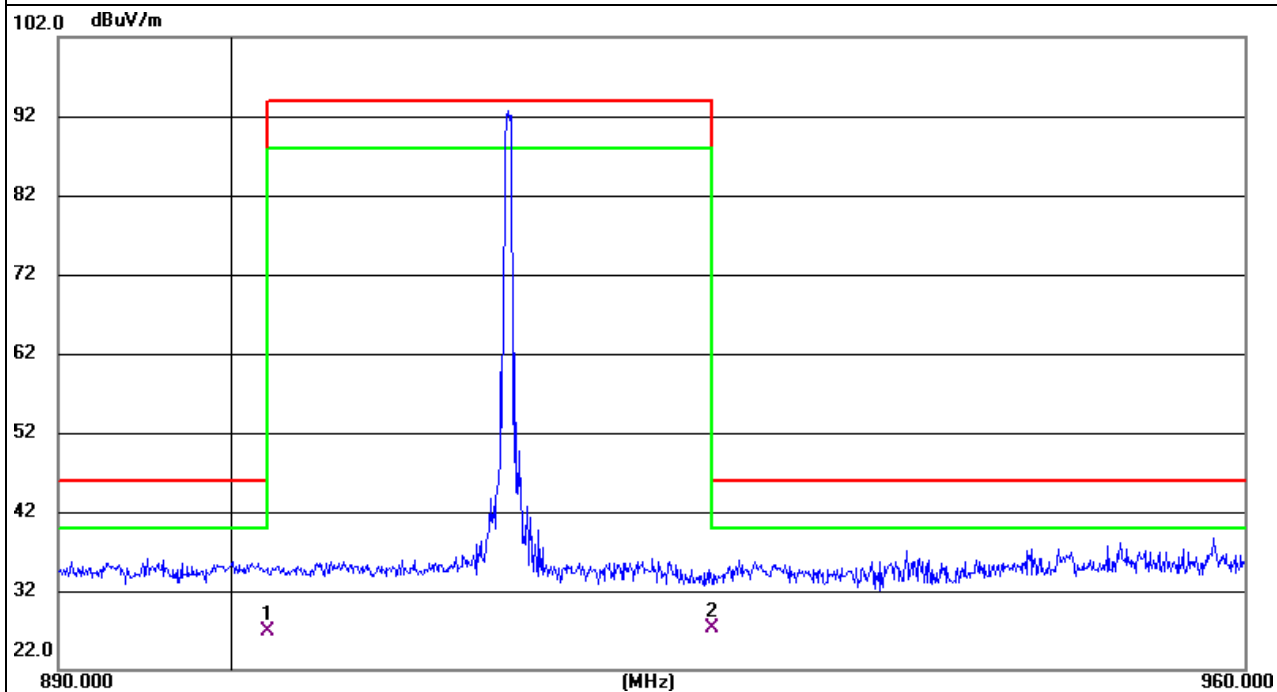


EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX-916MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-3.72	30.81	27.09	46.00	-18.91	QP
928.0000	-4.24	31.12	26.88	46.00	-19.12	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

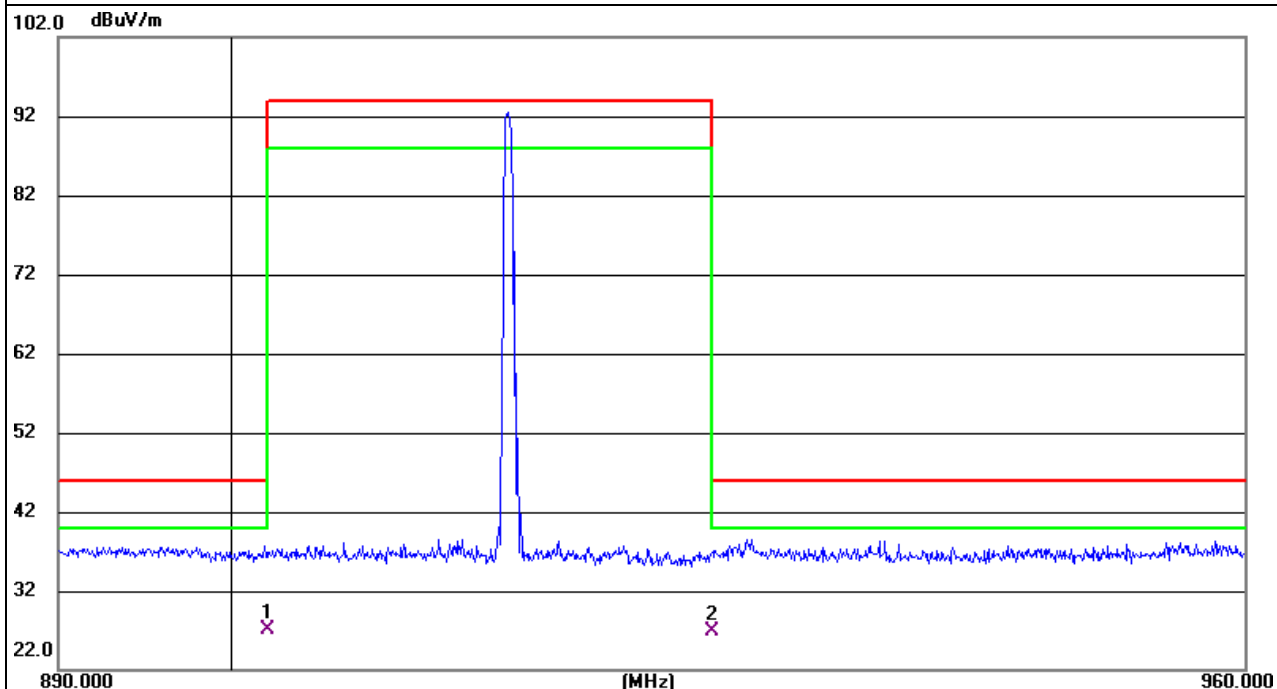

4. BANDWIDTH TEST


4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value., Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP

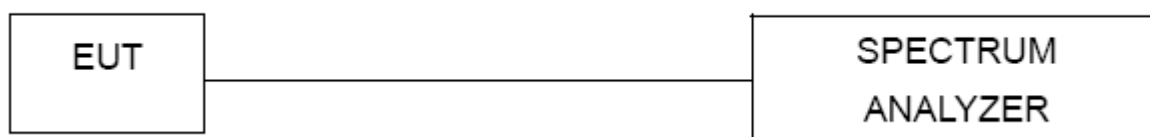


6. TEST RESULTS

EUT :	Alloy Hub v3s	Model Name :	ah3s.zw8us.4G
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 12V
Test Mode :	Mode 1		


Test Channel	Frequency (MHz)	20 dBc Bandwidth (kHz)
CH01	908.4	111.1

908.4 MHz

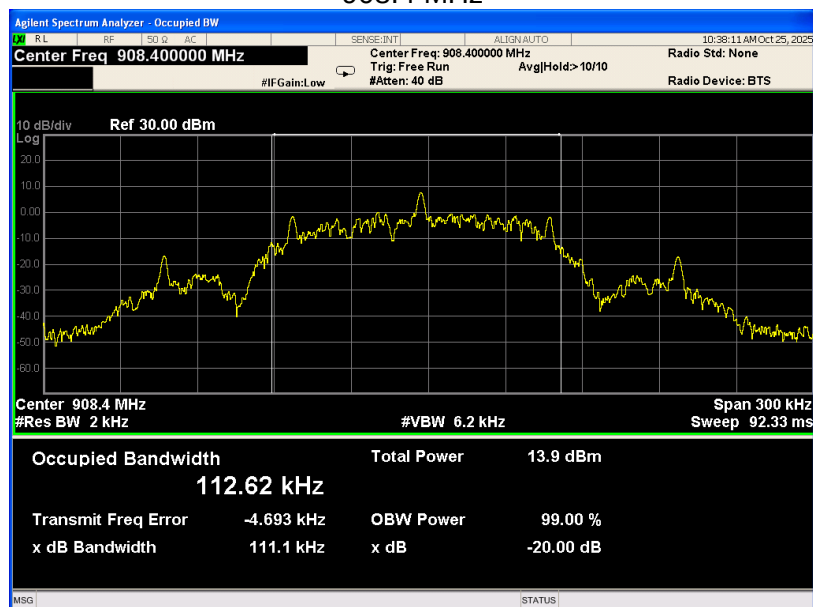


Test Channel	Frequency (MHz)	20 dBc Bandwidth (kHz)
CH02	908.42	110.9

908.42 MHz

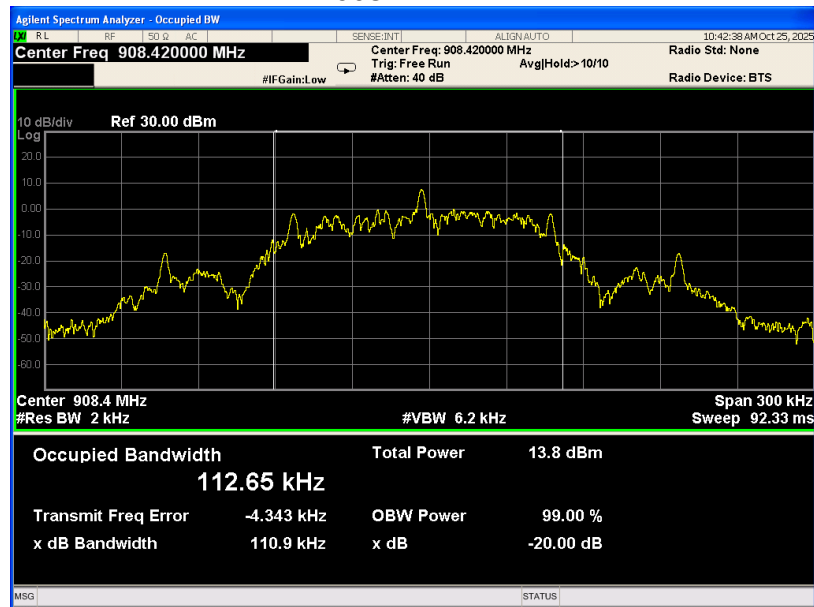


Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)
CH03	912	105.1

912 MHz

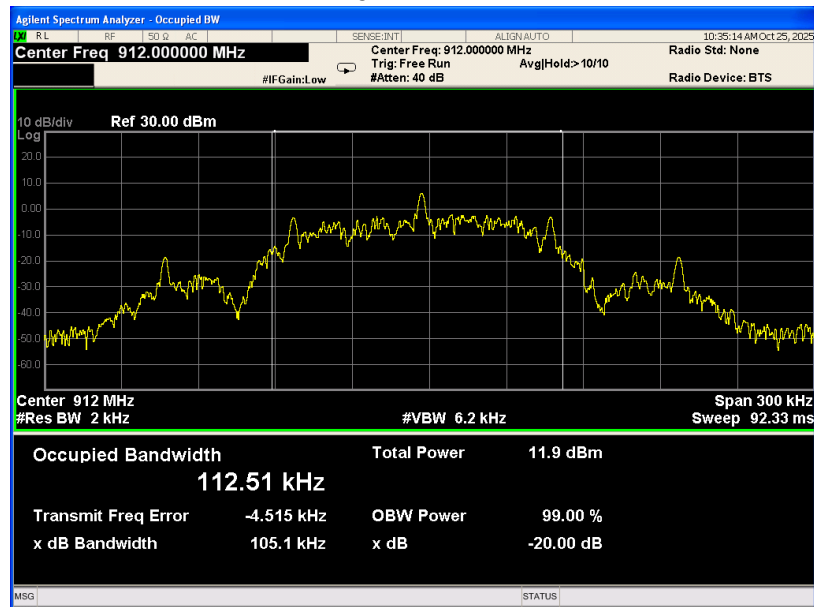

Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)
CH04	916	110.6

916 MHz

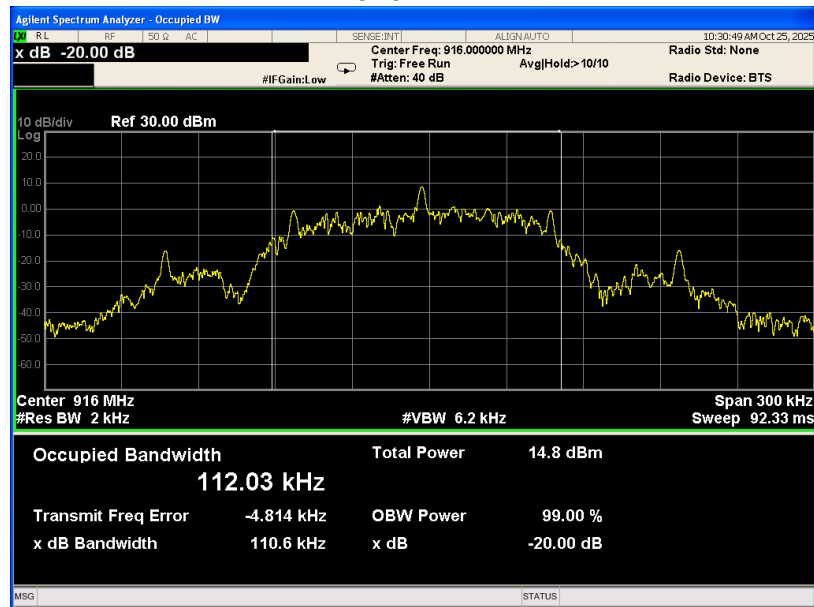

END OF REPORT