

FCC TEST REPORT	
FCC 47 CFR Part 15C ISED RSS-247	
Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No. :	G0M-1612-6168-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	eResearch Technology GmbH
Address	Sieboldstrasse 3 97230 Estenfeld GERMANY
Test specification:	
Standard..... :	47 CFR Part 15C RSS-247, Issue 1, 2015-05
Test scope..... :	partial Radio compliance test
Equipment under test (EUT):	
Product description	Asthma Monitor AM3
Model No.	AM3 Option G+
Additional Model(s)	None
Brand Name(s)	None
Hardware version	1.0
Firmware / Software version	9.40
	FCC-ID: 2AAUFAM3G02 IC: 11335A-AM3G02
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %


Date of receipt of test item : 2016-12-23

Date (s) of performance of tests : 2017-01-23 – 2017-01-24

Compiled by : Sebastian Suckow

Tested by (+ signature) : Sebastian Suckow 

(Responsible for Test)

Approved by (+ signature) : Christian Weber 

(Head of Lab)

Date of issue : 2017-01-31

Total number of pages : 69

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Test case reduction on radiated measurements only is based on the requirements for host integration for full modular approved transmitter modules (KDB 996369 D02) used by the EUT. The EUT uses a module with full modular approval according to FCC and ISED rules. For details about the radio module see EUT description in section 1.

Version History

Version	Issue Date	Remarks	Revised by
01	2017-01-31	Initial Release	

REPORT INDEX


1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment External	7
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	10
1.4	Supporting Equipment Used During Testing	11
1.5	Test Modes	12
1.6	Test Equipment Used During Testing	13
1.7	Sample emission level calculation	14
2	RESULT SUMMARY	15
3	TEST CONDITIONS AND RESULTS	16
3.1	Test Conditions and Results – Occupied Bandwidth	16
3.2	Test Conditions and Results – Transmitter radiated emissions	20
3.3	Test Conditions and Results – Receiver radiated emissions	22
ANNEX A	Transmitter radiated spurious emissions	24
ANNEX B	Receiver radiated spurious emissions	62

1 Equipment (Test item) Description

Description	Asthma Monitor AM3	
Model	AM3 Option G+	
Additional Model(s)	None	
Brand Name(s)	None	
Serial number	None	
Hardware version	1.0	
Software / Firmware version	9.40	
PMN	N/A	
HVIN	AM3 Option G+	
FVIN	N/A	
HMN	N/A	
FCC-ID	2AAUFAM3G02	
IC	11335A-AM3G02	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	Bluetooth 4.0 Low Energy	
Operating frequency range	2402 - 2480 MHz	
Assigned frequency band	2400 - 2483.5 MHz	
Main test frequencies	F _{LOW}	2402 MHz
	F _{MID}	2442 MHz
	F _{HIGH}	2480 MHz
Spreading	Frequency Hopping	
Modulations	GFSK	
Number of channels	40	
Channel spacing	2MHz	
Number of antennas	1	
Radio module	Type	Bluetooth Module
	Model	BT121
	Manufacturer	Silicon Labs (former Blue Giga)
	HW Version	unspecified
	SW Version	unspecified
	FCC-ID	QOQBT121
	IC	5123A-BGTBT121
Antenna	Type	integrated
	Model	BT121
	Manufacturer	Silicon Labs
	Gain	+1 dBi (manufacturer declaration)

Manufacturer	eResearch Technology GmbH Sieboldstrasse 3 97230 Estenfeld GERMANY	
Power supply	V _{NOM}	3.7 VDC
	V _{MIN}	N/R
	V _{MAX}	N/R
AC/DC-Adaptor	Model	WR9QA1200MUNMRVG2773
	Vendor	GlobTek Inc.
	Input	100 - 240
	Output	5.0

1.1 Photos – Equipment External

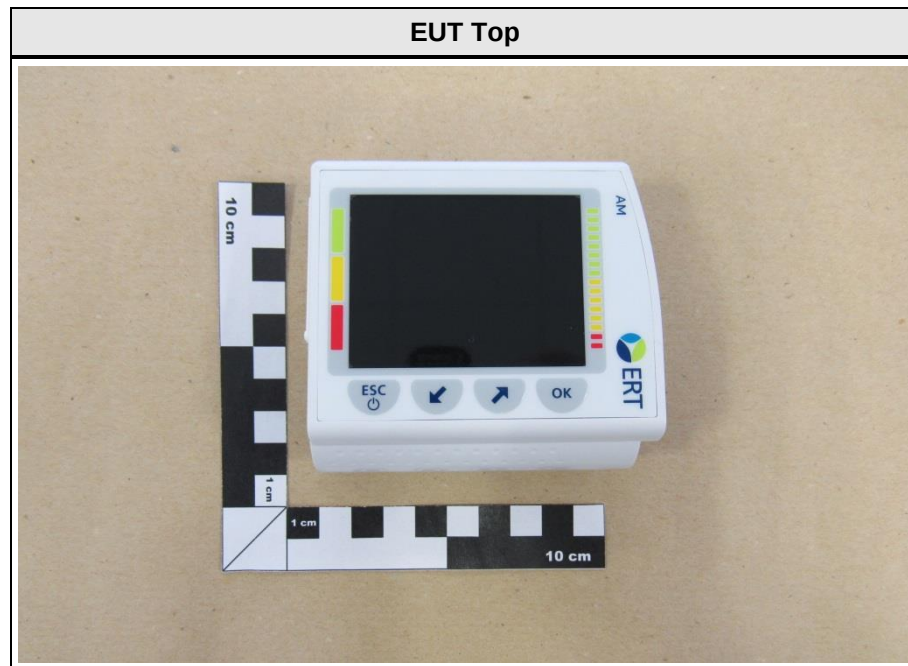



EUT Left side





EUT Right side



1.2 Photos – Equipment internal

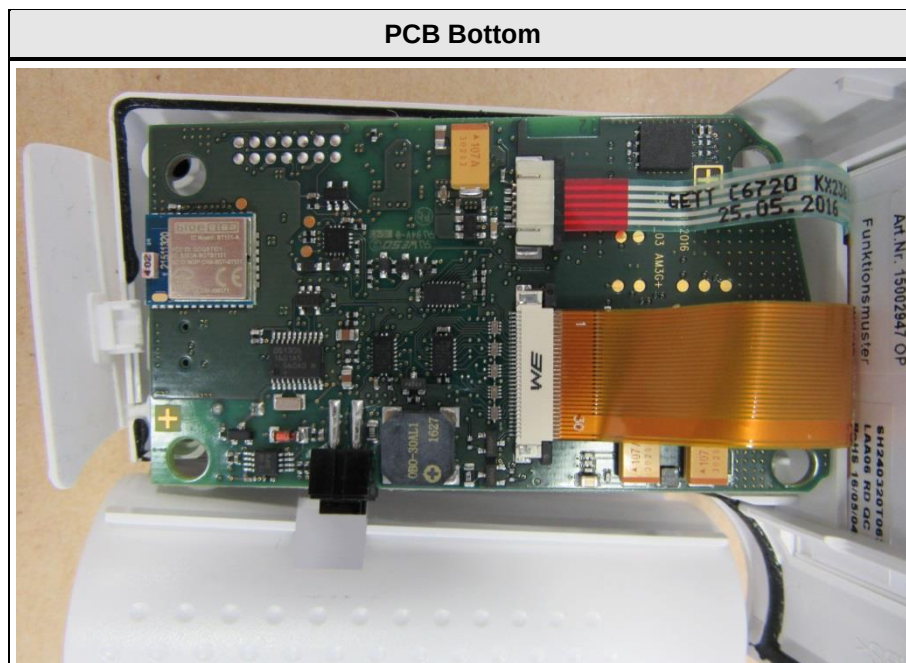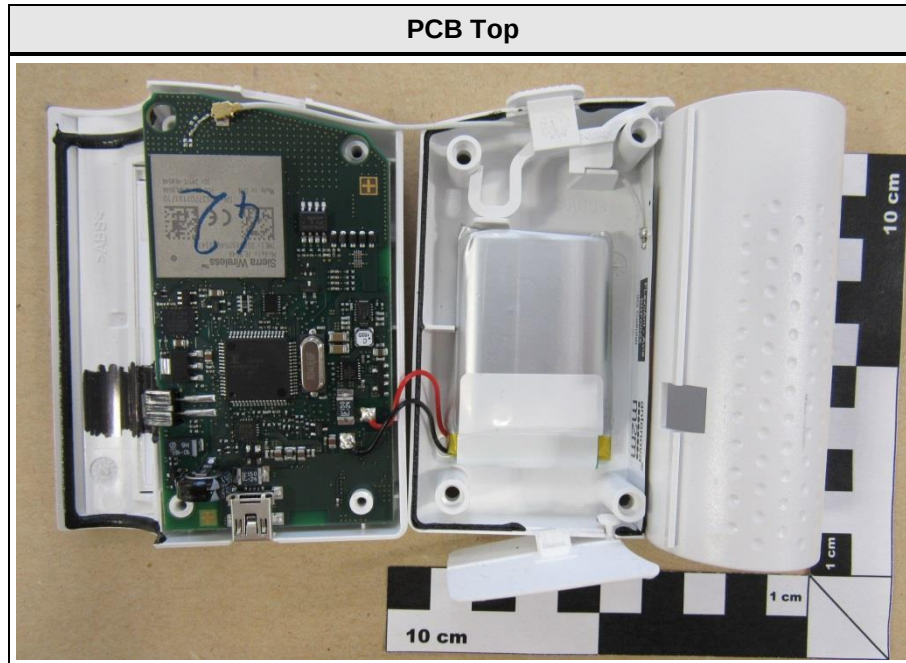

1.3 Photos – Test setup

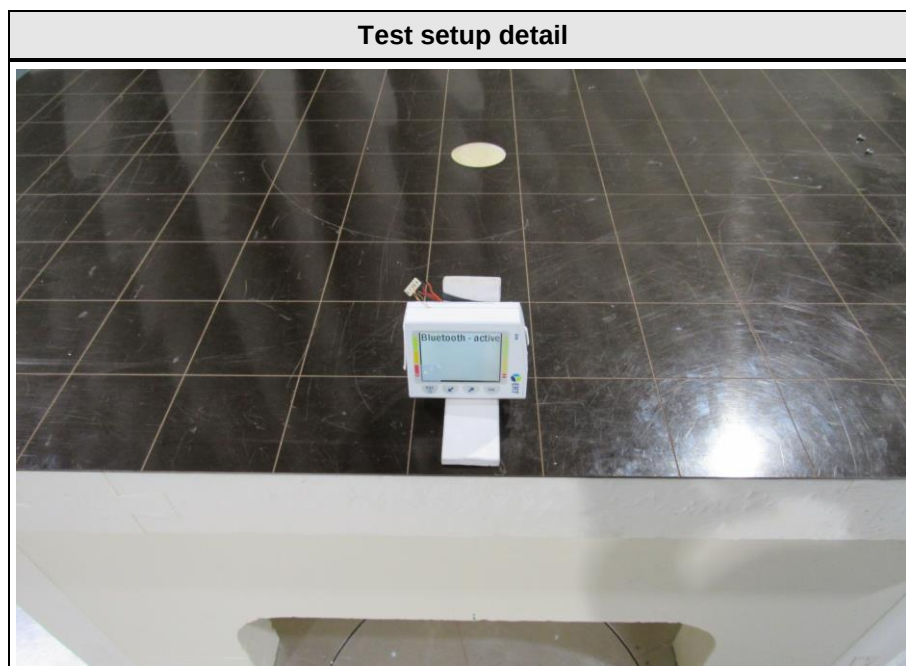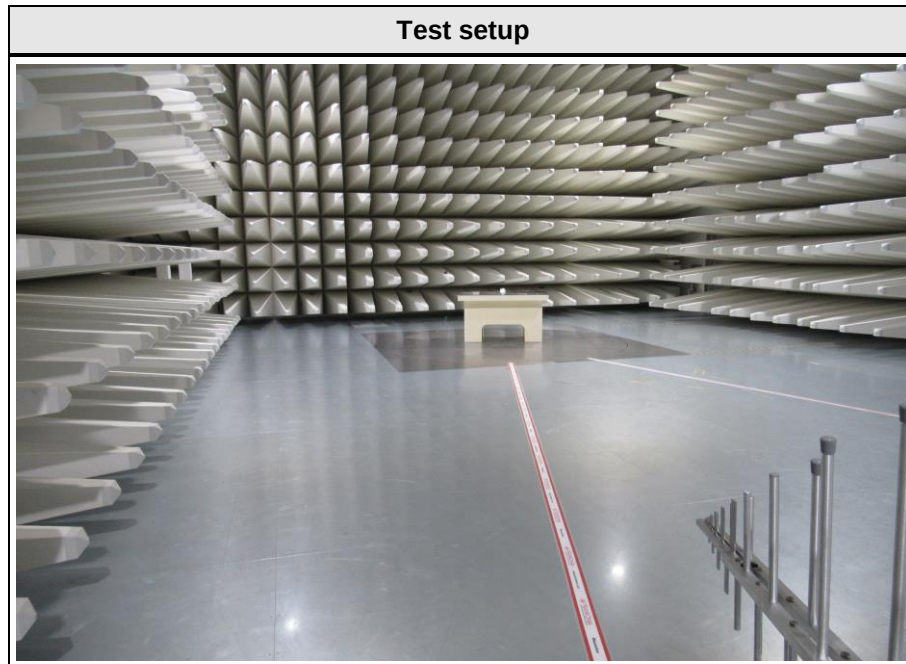

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Notebook	DELL	S/N 2FMM5R1	Used for signaling
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
BTLE	General conditions:	EUT powered by internal battery.
	Radio conditions:	Mode = standalone transmit Modulation = GFSK Power setting = 4 dBm
Receive	General conditions:	EUT powered on
	Radio conditions:	Mode = standalone receive

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 6	EF00899	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2016-04	2017-04
Biconical Antenna	R&S	HK 116	EF00186	2016-02	2018-02
LPD Antenna	R&S	HL 223	EF00202	2016-02	2018-02
Horn Antenna	Schwarzbeck	BBHA9120D	EF01153	2016-07	2017-07

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
21.5 dBμV	+	26 dB	=	47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	=	-9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	ANSI C63.10	N/T	Information only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2	6dB Bandwidth	ANSI C63.10	N/T	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4	Maximum peak conducted power	ANSI C63.10	N/T	
FCC § 15.247(e) ISED RSS-247 § 5.2	Power spectral density	ANSI C63.10	N/T	
47 CFR 15.207 ISED RSS-247 § 3.1	AC power line conducted emissions	ANSI C63.4	N/R	No powered (directly or indirectly) via AC-Mains
FCC § 15.247(d) ISED RSS-247 § 5.5	Band edge compliance	ANSI C63.10	N/T	
FCC § 15.247(d) ISED RSS-247 § 5.5	Conducted spurious emissions	ANSI C63.10	N/T	
FCC § 15.247(d) FCC § 15.209 ISED RSS-247 § 5.5	Transmitter radiated spurious emissions	ANSI C63.10	PASS	
ISED RSS-247 § 3.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth


Occupied Bandwidth acc. to ISSED RSS-Gen				Verdict: PASS
Test according to measurement reference		Reference Method		
		ANSI C63.10		
Test frequency range		Tested frequencies		
		F _{LOW} / F _{MID} / F _{HIGH}		
Limits				
None (Informational only)				
Test setup				
Spectrum Analyzer EUT				
Test procedure				
1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function				
Test results				
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [MHz]	
F _{LOW}	2402	BTLE	0.982	
F _{MID}	2442	BTLE	0.992	
F _{HIGH}	2480	BTLE	0.992	
Comments:				

Occupied Bandwidth – F_{Low}

Occupied Bandwidth

Project Number: G0M-1612-6168

Applicant: eResearch Technology GmbH
EUT Name: Asthma Monitor AM3
Model: AM3 Option G+
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom Vnom
Mode: BT LE 2402 MHz
Test Date: 2017-01-24
Verdict: NONE (INFORMATION ONLY)

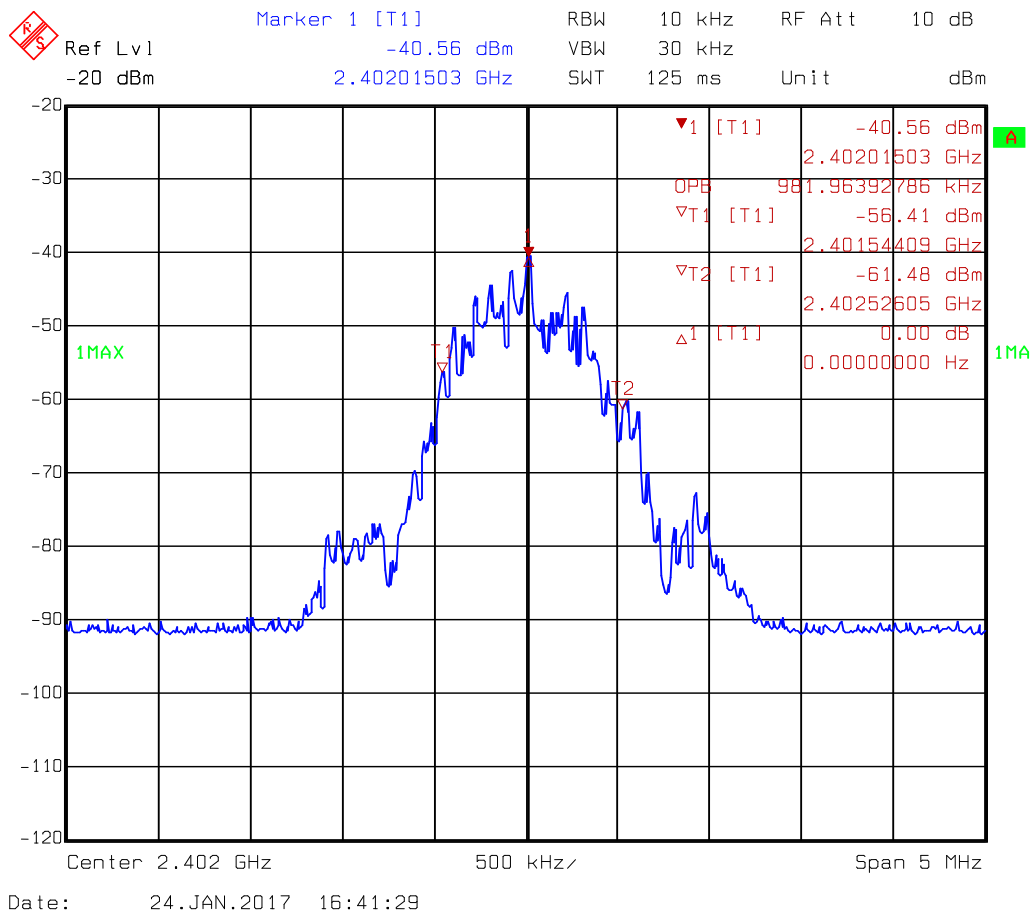


Occupied Bandwidth – F_{MID}

Occupied Bandwidth

Project Number: G0M-1612-6168

Applicant: eResearch Technology GmbH
EUT Name: Asthma Monitor AM3
Model: AM3 Option G+
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom Vnom
Mode: BT LE 2442 MHz
Test Date: 2017-01-24
Verdict: NONE (INFORMATION ONLY)

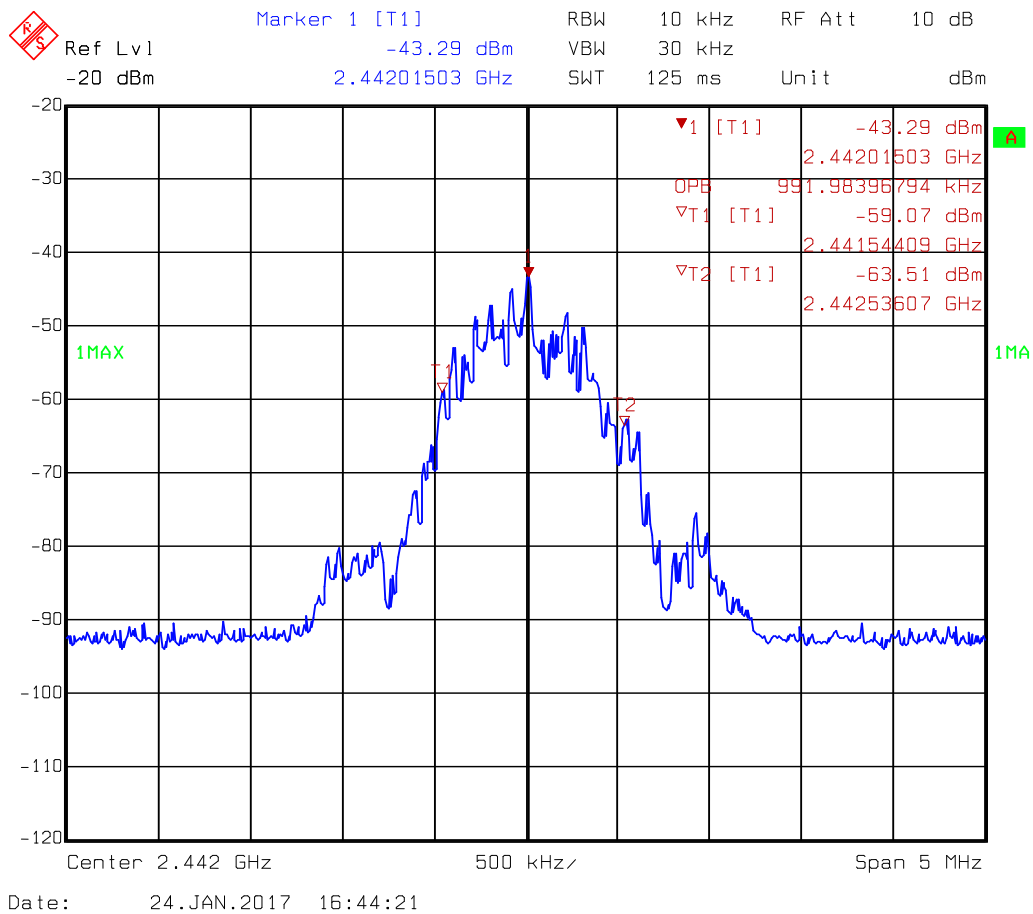


Occupied Bandwidth – F_{HIGH}

Occupied Bandwidth

Project Number: G0M-1612-6168


Applicant: eResearch Technology GmbH
EUT Name: Asthma Monitor AM3
Model: AM3 Option G+
Test Site: Eurofins Product Service GmbH
Operator: Sebastian Suckow
Test Conditions: Tnom Vnom
Mode: BT LE 2480 MHz
Test Date: 2017-01-24
Verdict: NONE (INFORMATION ONLY)

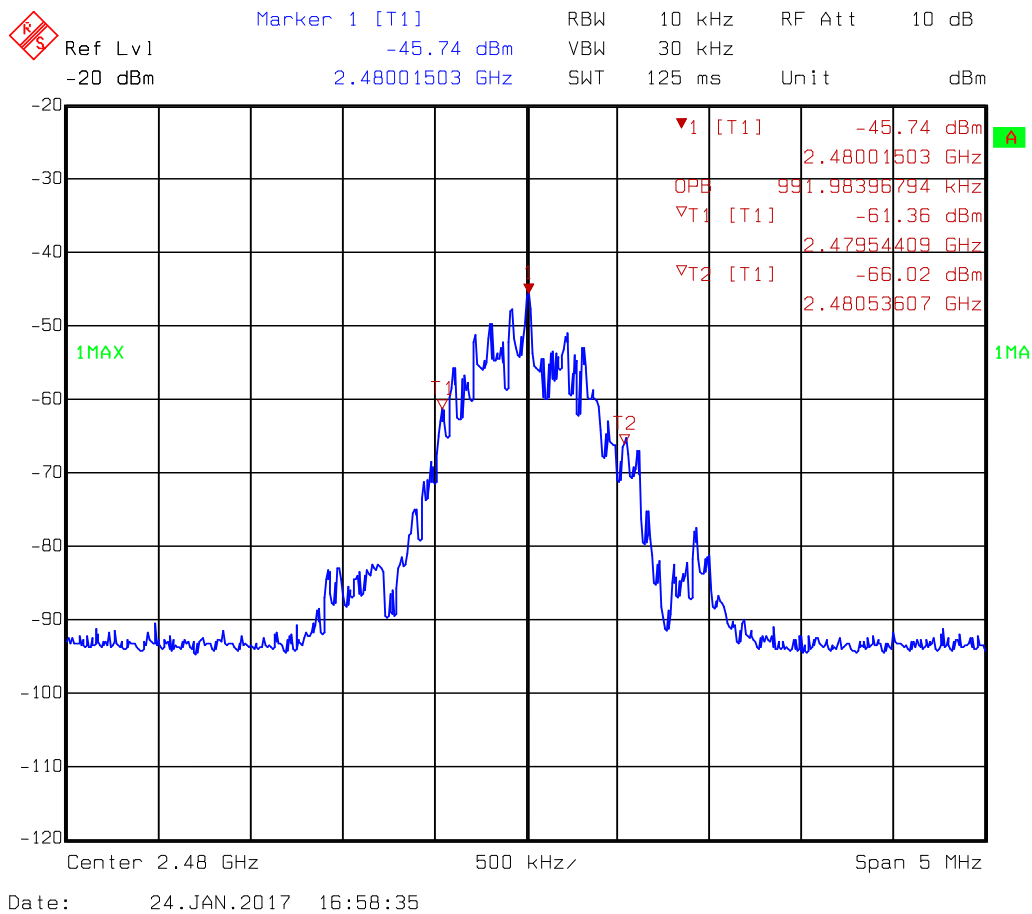

Test Report No.: G0M-1612-6168-TFC247BL-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – Transmitter radiated emissions

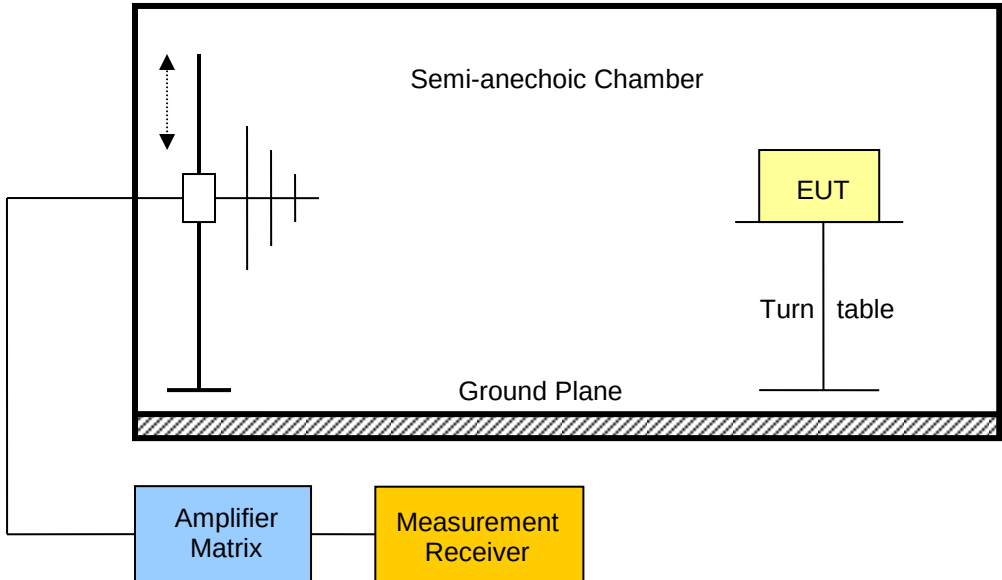Transmitter radiated emissions acc. to FCC 47 CFR 15.247 / ISED RSS-247				Verdict: PASS
Test according referenced standards	Reference Method			
	FCC 15.247(d) / ISED RSS-247 5.5			
Test according to measurement reference	Reference Method			
	ANSI C63.10			
Test frequency range	Tested frequencies			
	30 MHz – 10 th Harmonic			
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.				
Test setup				
				

Test procedure									
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands									
Test results									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Limit dist. [m]*	Margin [dB]
F _{LOW}	2402	BTLE	7336	49.51	pk	ver	74.00	3	-24.49
F _{LOW}	2402	BTLE	7400	49.17	pk	hor	74.00	3	-24.83
F _{LOW}	2402	BTLE	19204	42.72	pk	hor	74.00	3	-31.28
F _{LOW}	2402	BTLE	19204	40.62	pk	ver	74.00	3	-33.38
F _{LOW}	2402	BTLE	21617	42.12	pk	hor	95.00	3	-52.88
F _{MID}	2442	BTLE	2330	49.42	pk	ver	74.00	3	-24.58
F _{MID}	2442	BTLE	2389	51.20	pk	hor	74.00	3	-22.80
F _{MID}	2442	BTLE	2389	54.52	pk	ver	74.00	3	-19.48
F _{HIGH}	2480	BTLE	2330	46.44	pk	hor	74.00	3	-27.56
F _{HIGH}	2480	BTLE	2330	50.11	pk	ver	74.00	3	-23.89
F _{HIGH}	2480	BTLE	2372	48.25	pk	hor	74.00	3	-25.75
F _{HIGH}	2480	BTLE	2374	53.02	pk	ver	74.00	3	-20.98
Comments: * Physical distance between EUT and measurement antenna.									

3.3 Test Conditions and Results – Receiver radiated emissions

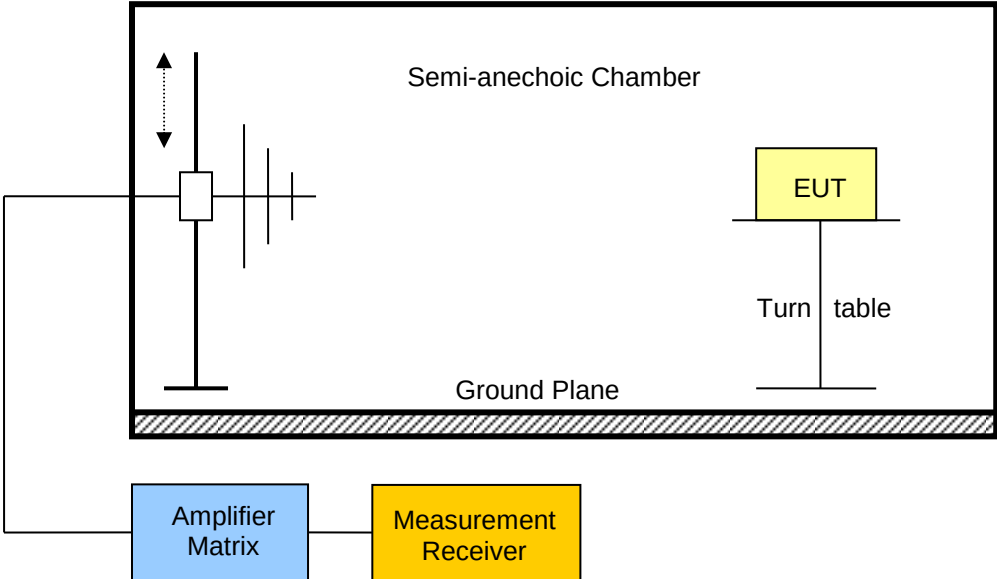Receiver radiated emissions acc. to ISED RSS-247				Verdict: PASS
Test according referenced standards	Reference Method			
	ISED RSS-247 3.1			
Test according to measurement reference	Reference Method			
	ANSI C63.10			
Test frequency range	Tested frequencies			
	30 MHz – 5 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [db μ V/m]	Polarisation	Det.	Limit [db μ V/m]	Margin [db μ V/m]
F _{MID}	2442	7176	51.05	ver	pk	53.98	-2.93 dB
Comments: * Physical distance between EUT and measurement antenna. ** Emission level corresponds to ambient noise floor							


ANNEX A Transmitter radiated spurious emissions

Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Horizontal
Measurement distance:	3 m
Mode:	BT LE 2402 MHz
Test Date:	2017-01-23
Note:	

Index 20

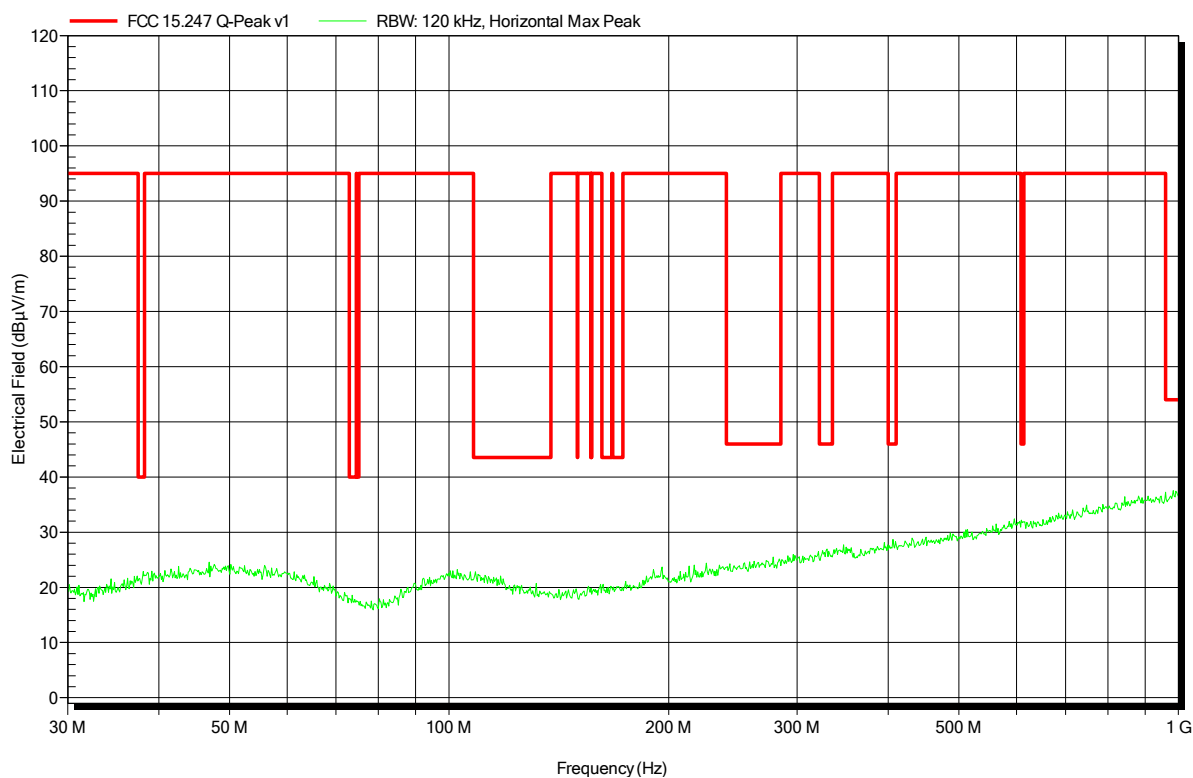


Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Vertical
Measurement distance:	3 m
Mode:	BT LE 2402 MHz
Test Date:	2017-01-23
Note:	

Index 21

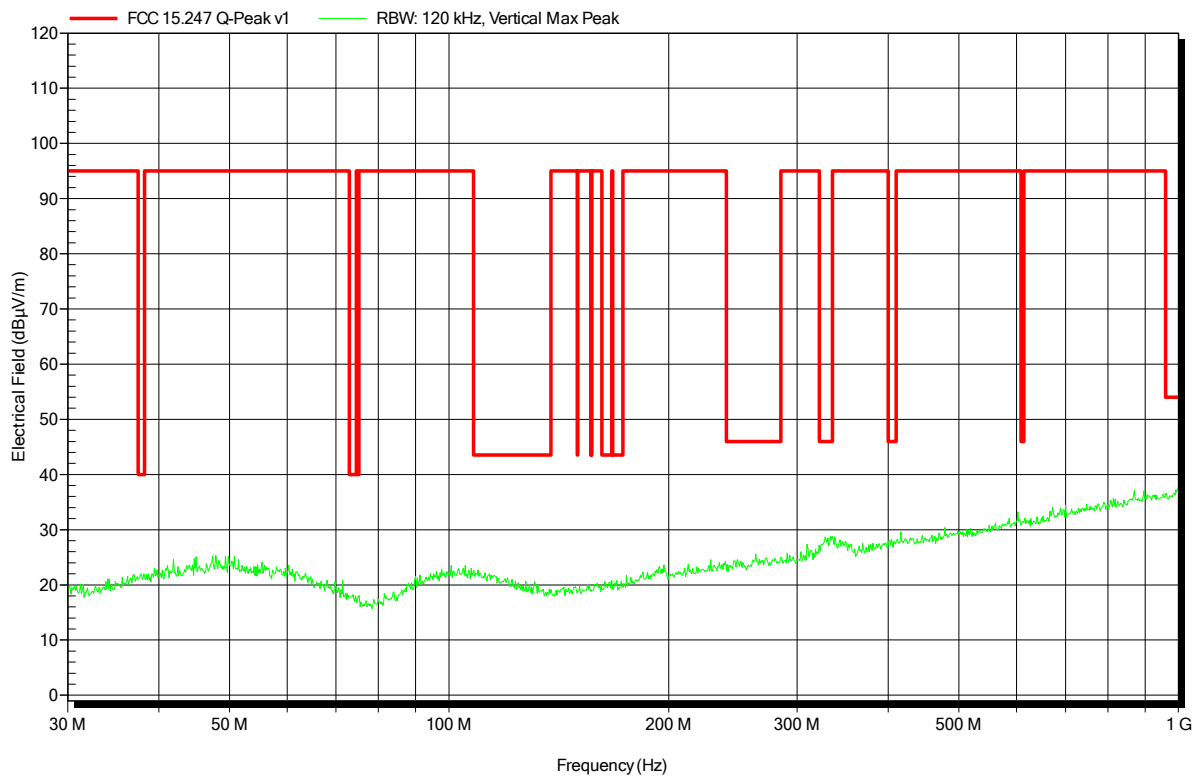


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 25

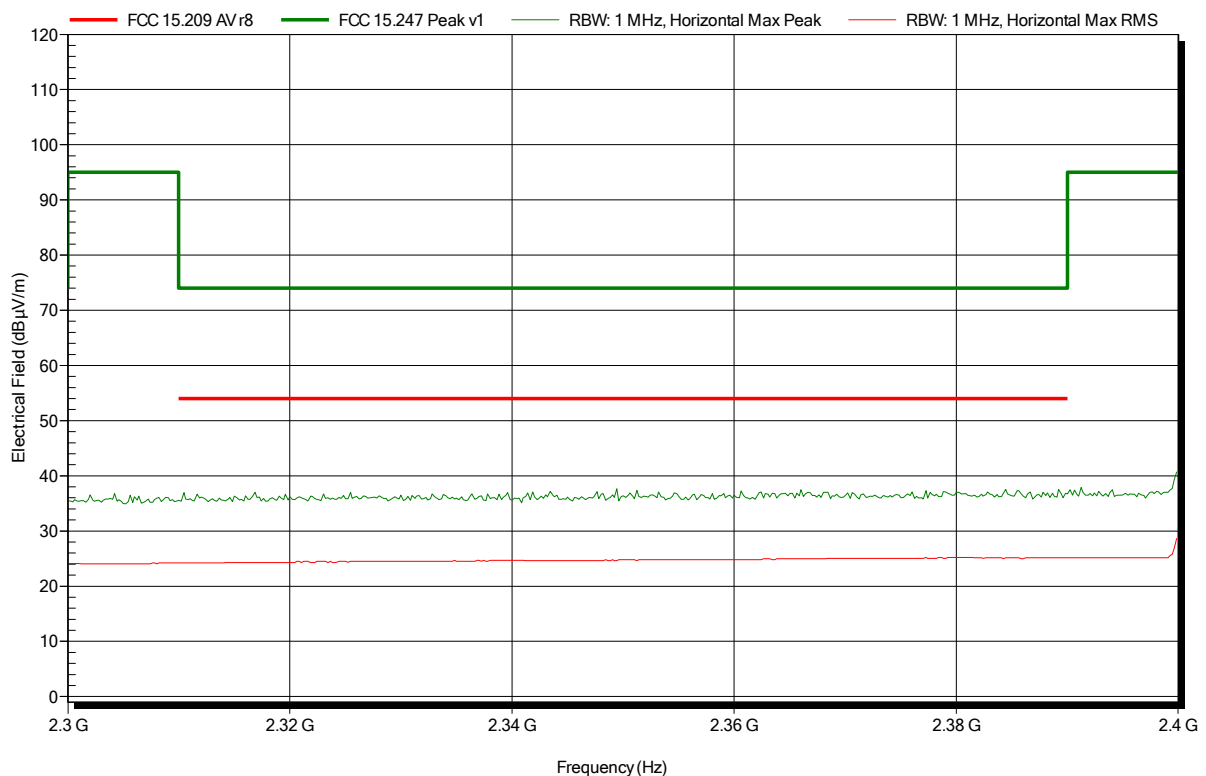


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 31

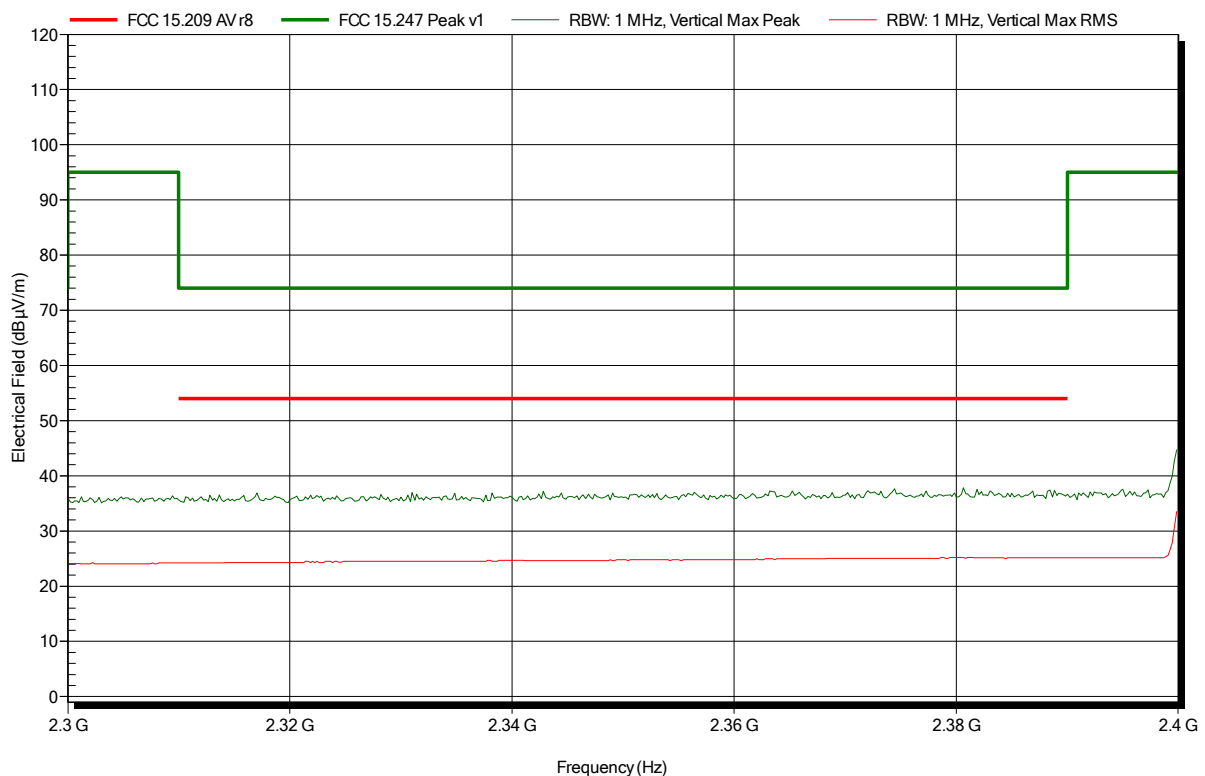


Spurious emissions according to FCC 15.247

Project number: GOM-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 22

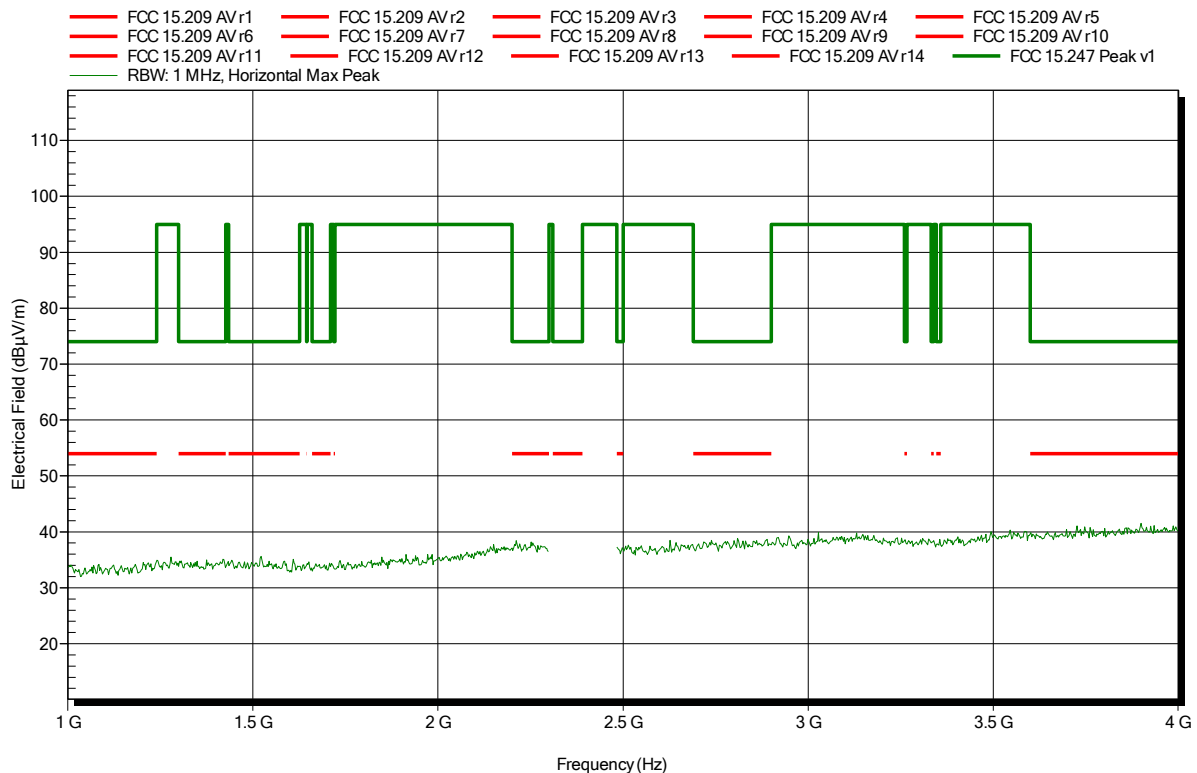


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 28

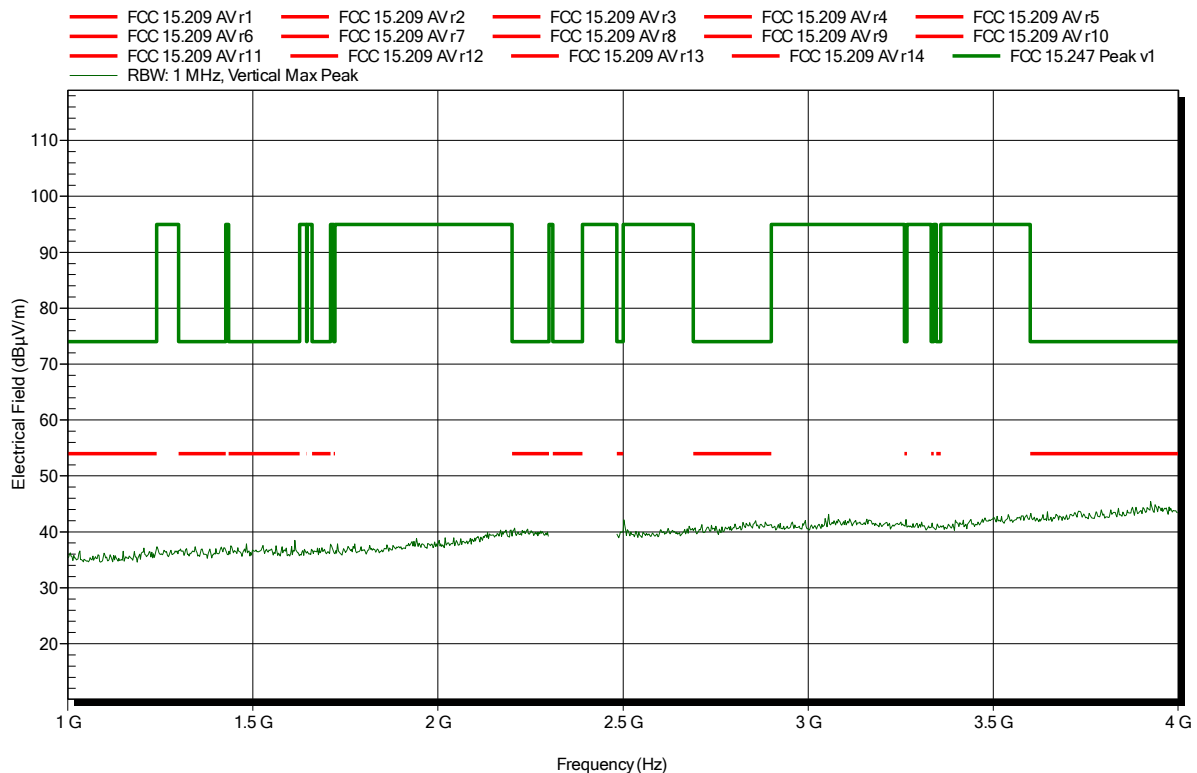


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 24

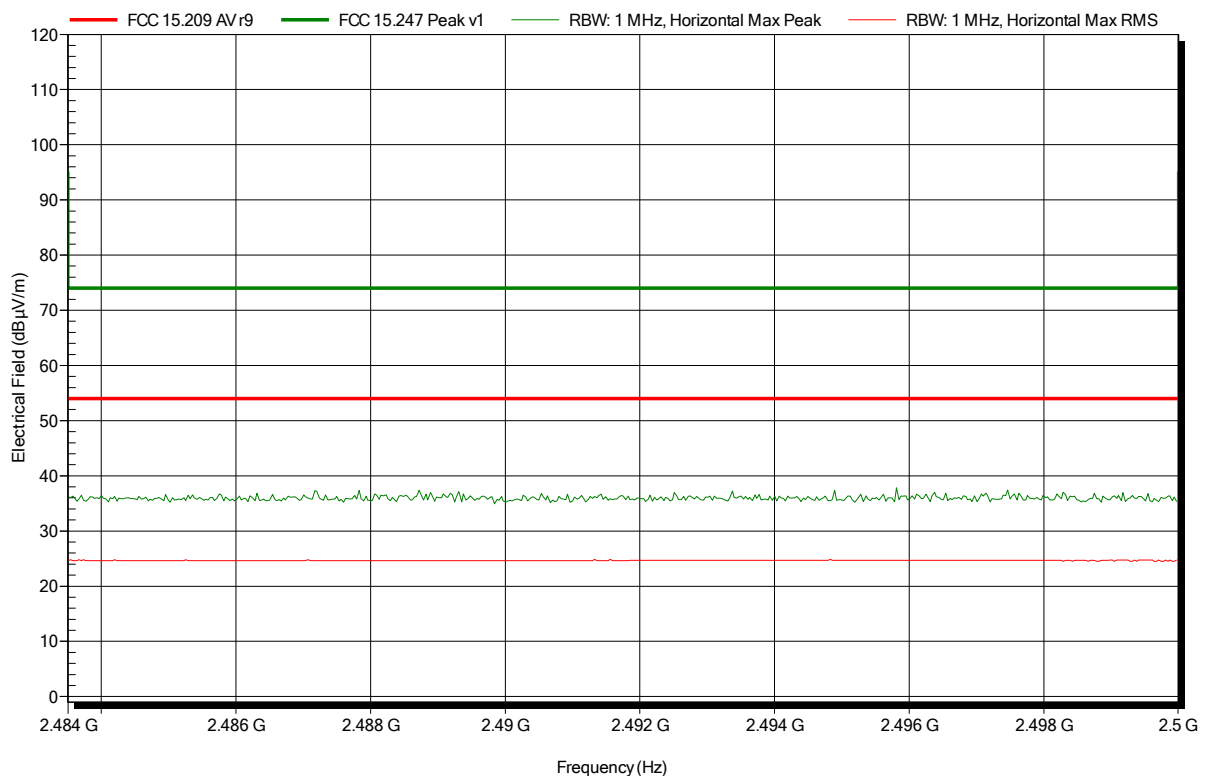


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 30

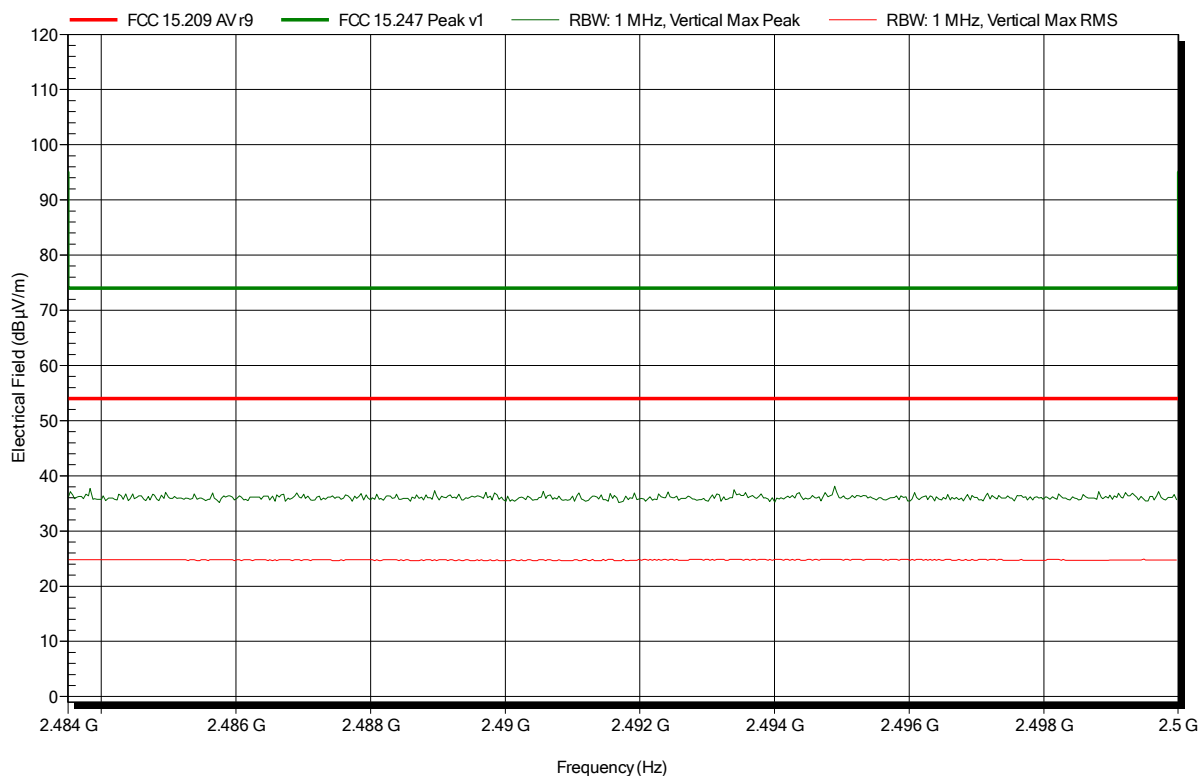


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 26

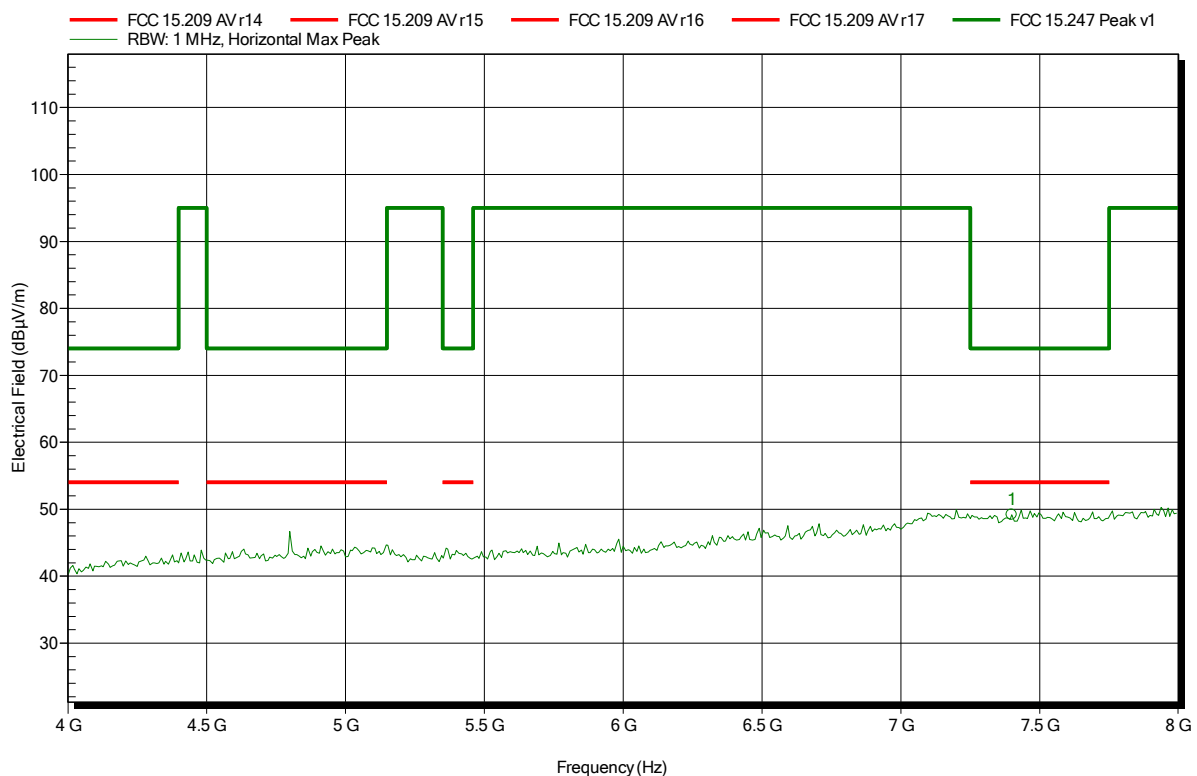


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.4 GHz	49.17 dBµV/m	74 dBµV/m	-24.83 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 27

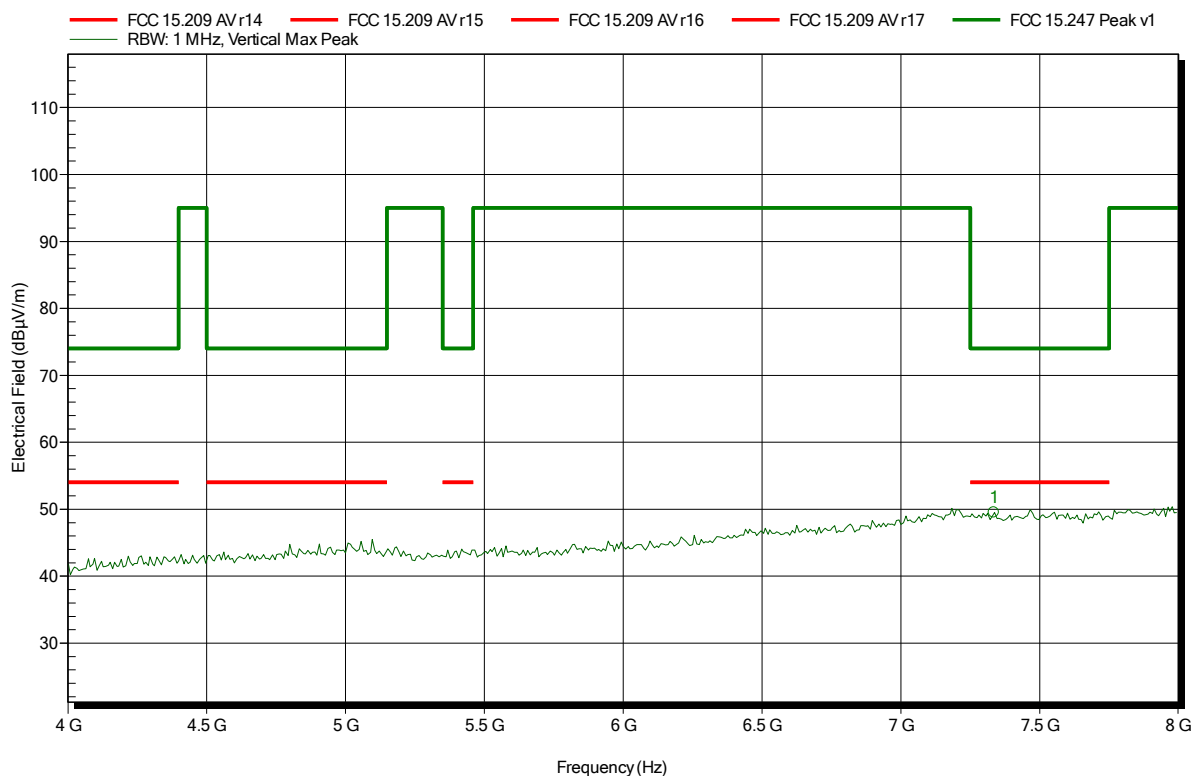


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.336 GHz	49.51 dBµV/m	74 dBµV/m	-24.49 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 51

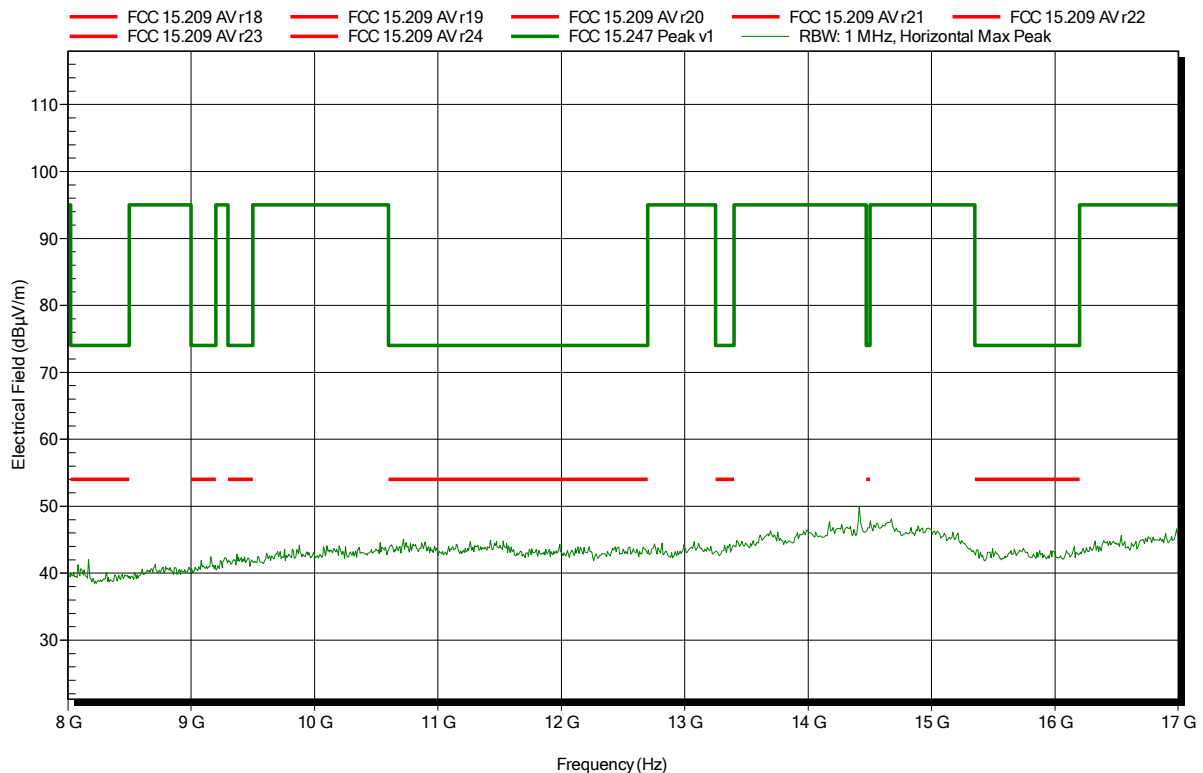


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-23
 Note:

Index 52

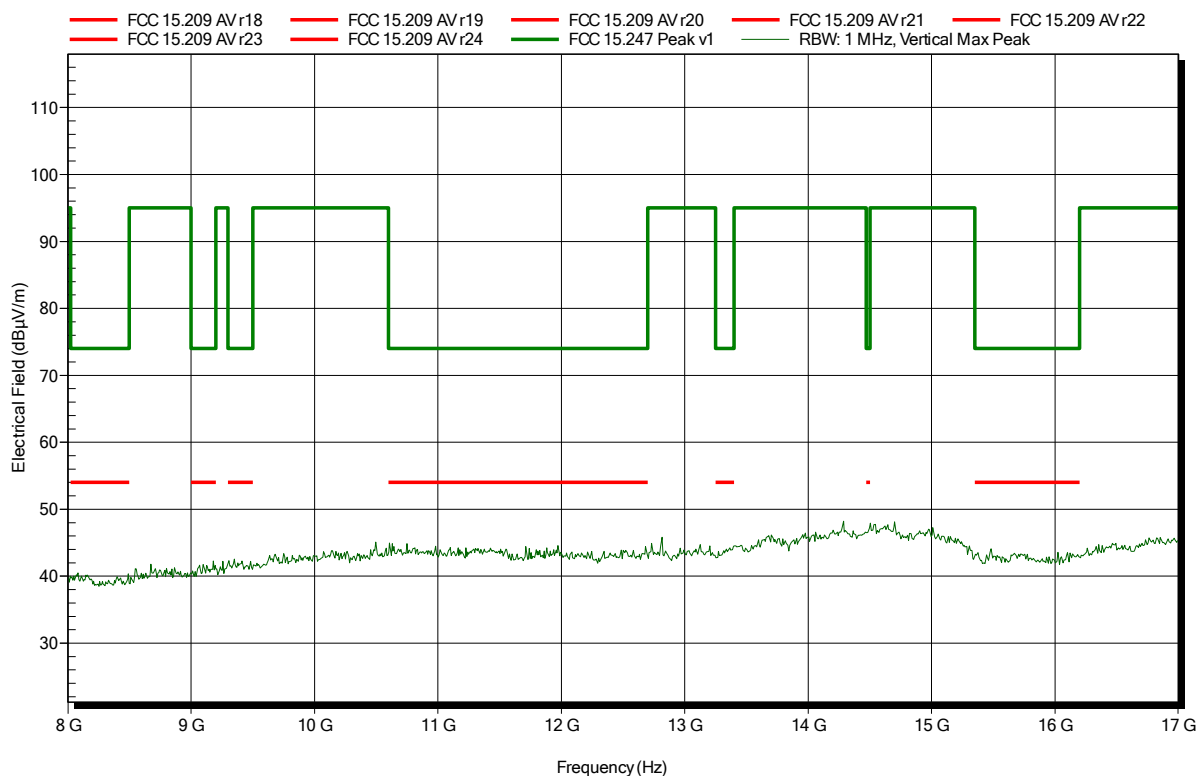


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-24
 Note:

Index 58

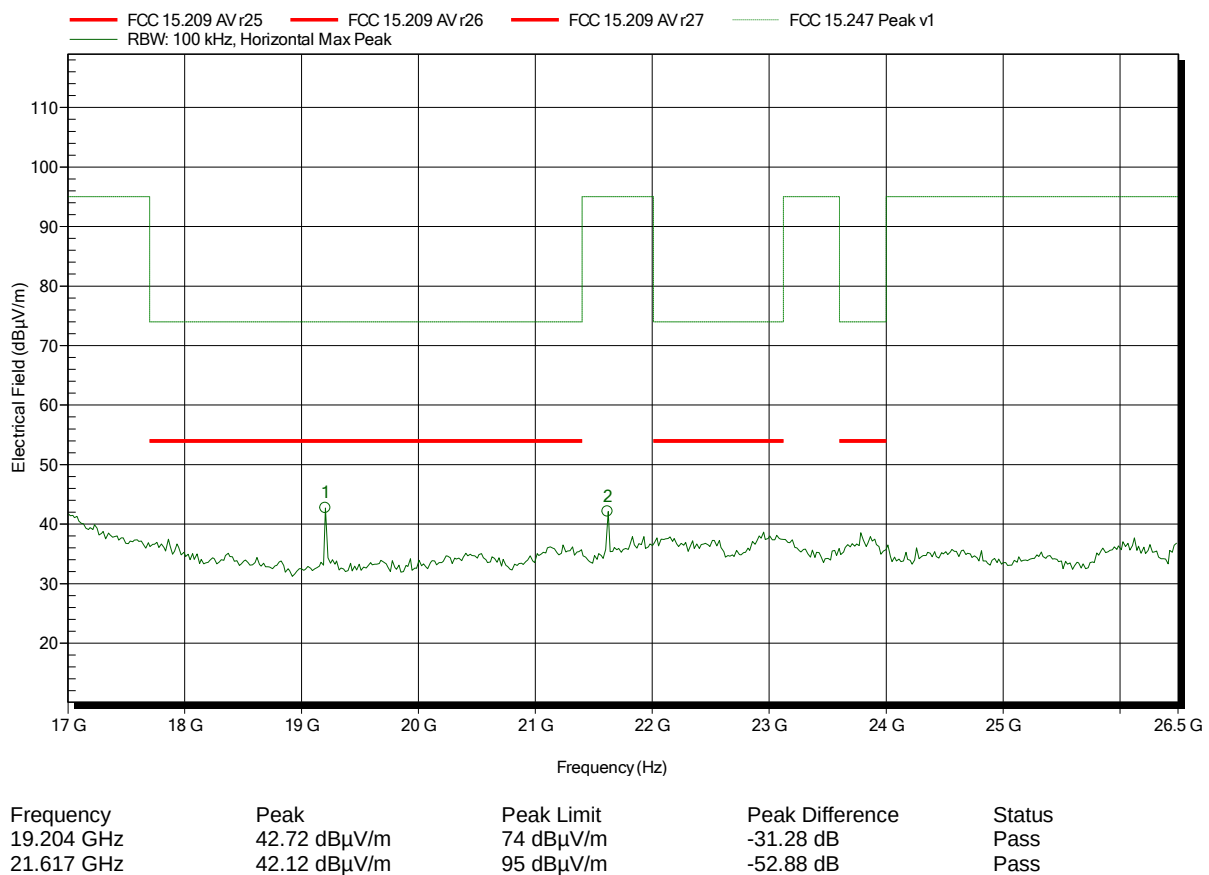


Spurious emissions according to FCC 15.247

Project number: GOM-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2402 MHz
 Test Date: 2017-01-24
 Note:

Index 57

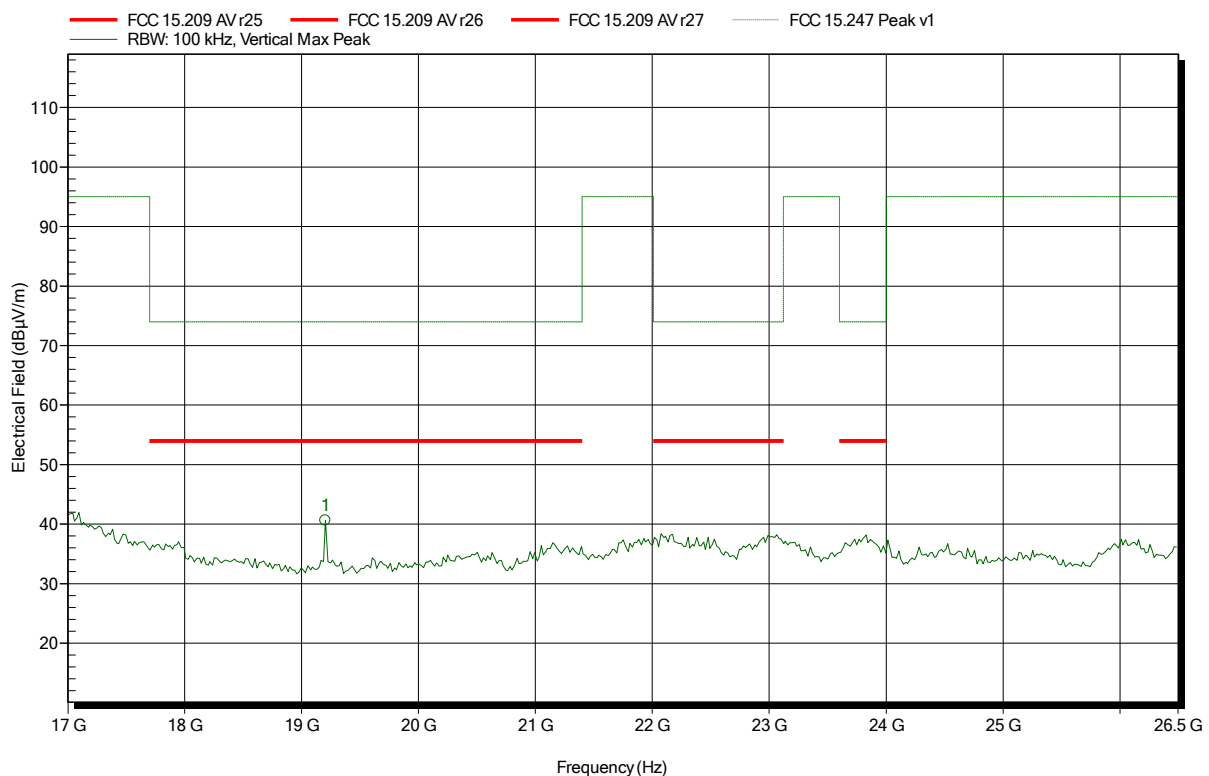


Frequency	Peak	Peak Limit	Peak Difference	Status
19.204 GHz	40.62 dBµV/m	74 dBµV/m	-33.38 dB	Pass

Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Horizontal
Measurement distance:	3 m
Mode:	TX; BT LE 2442 MHz
Test Date:	2017-01-23
Note:	

Index 19

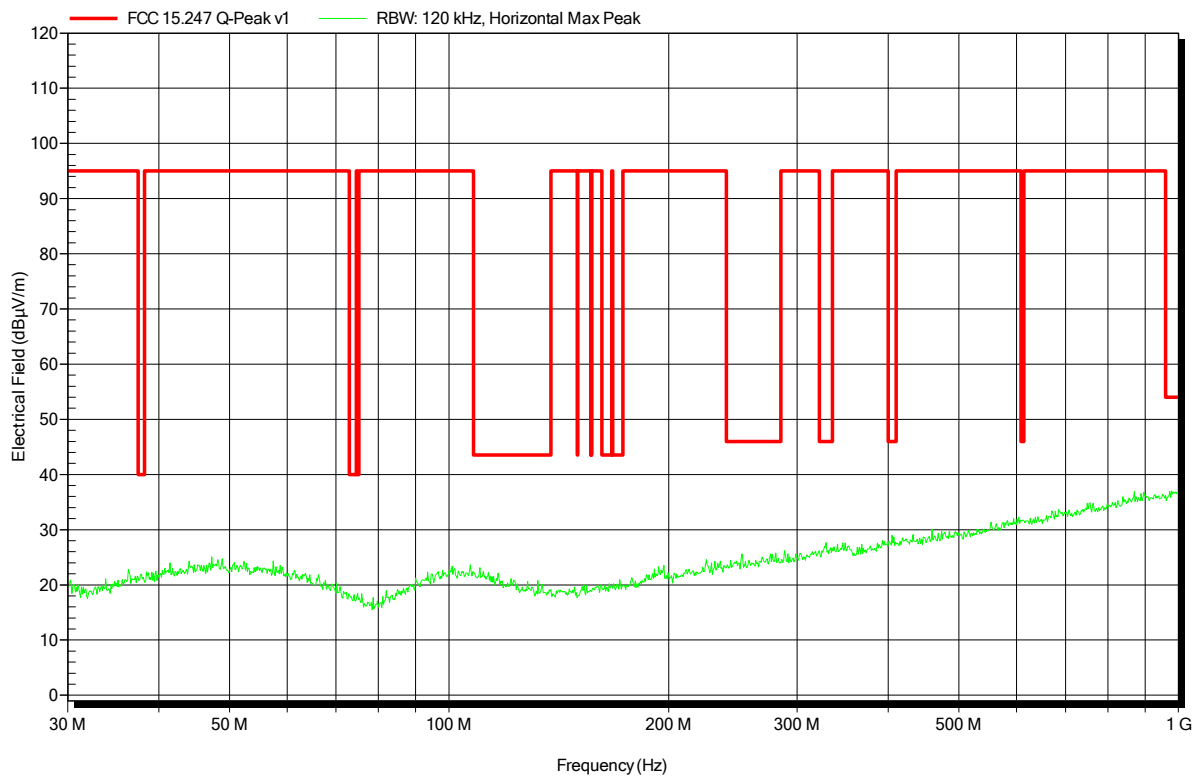


Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Vertical
Measurement distance:	3 m
Mode:	TX; BT LE 2442 MHz
Test Date:	2017-01-23
Note:	

Index 14

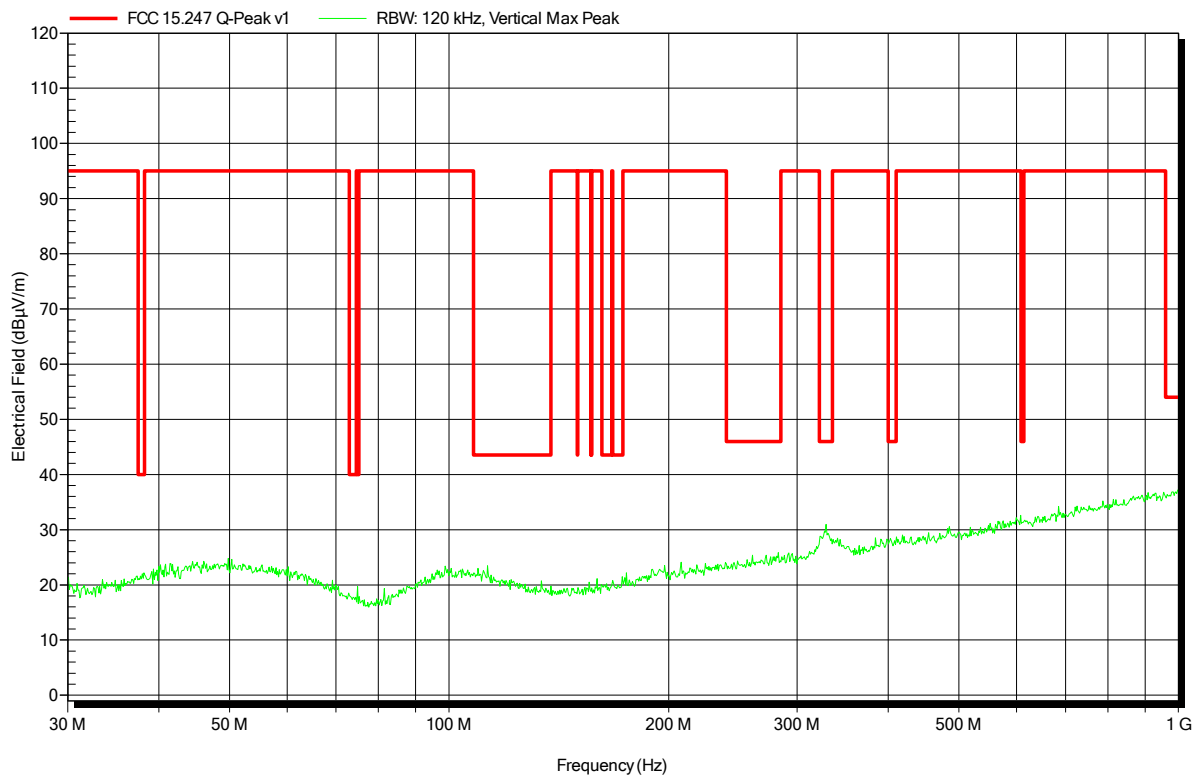


Spurious emissions according to FCC 15.247

Project number: GOM-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 35

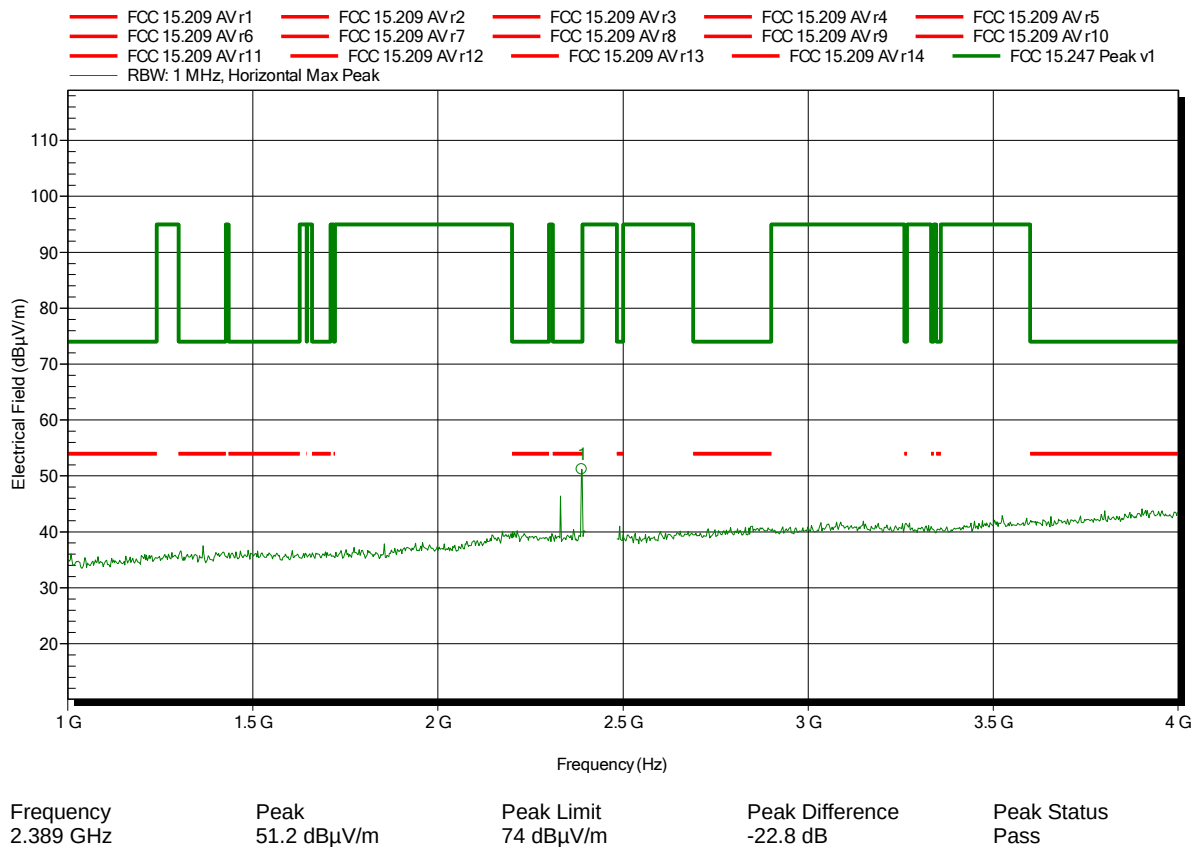


Spurious emissions according to FCC 15.247

Project number: GOM-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 32

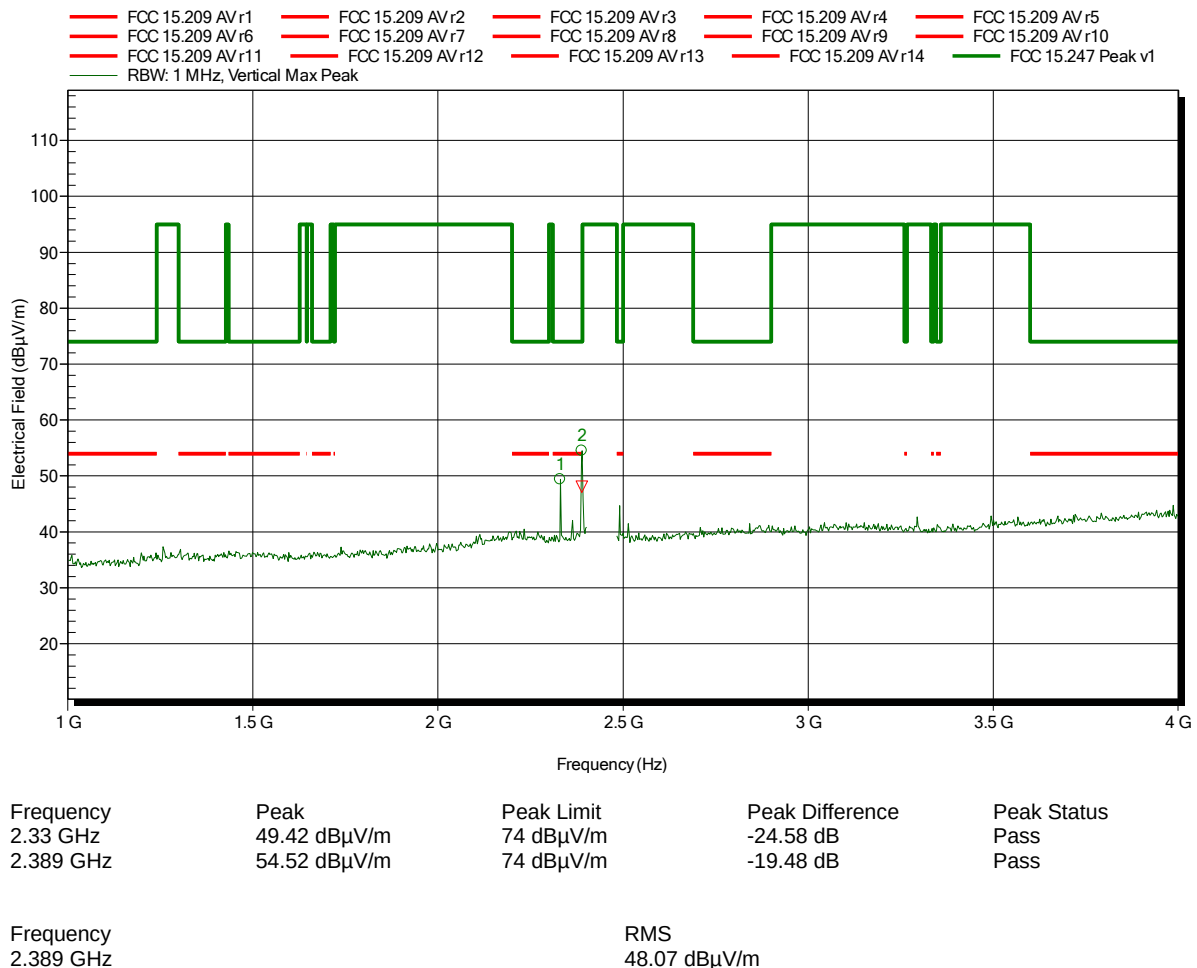


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 34

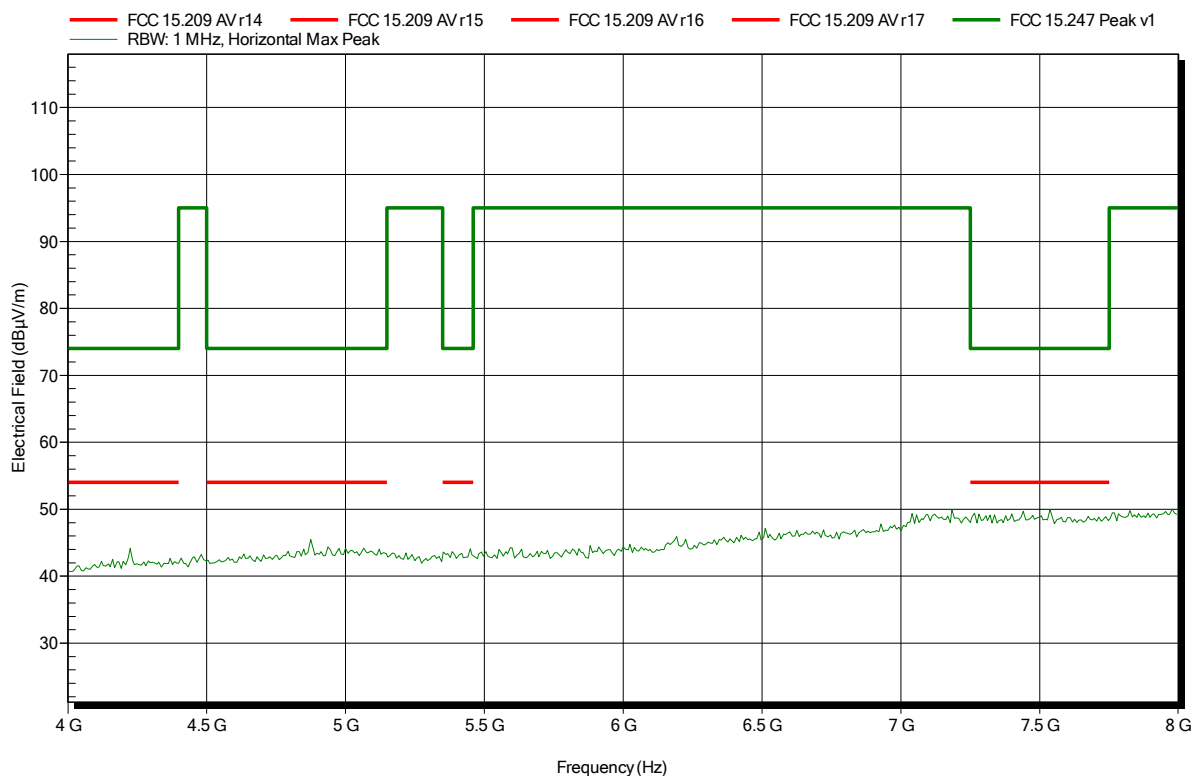


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 33

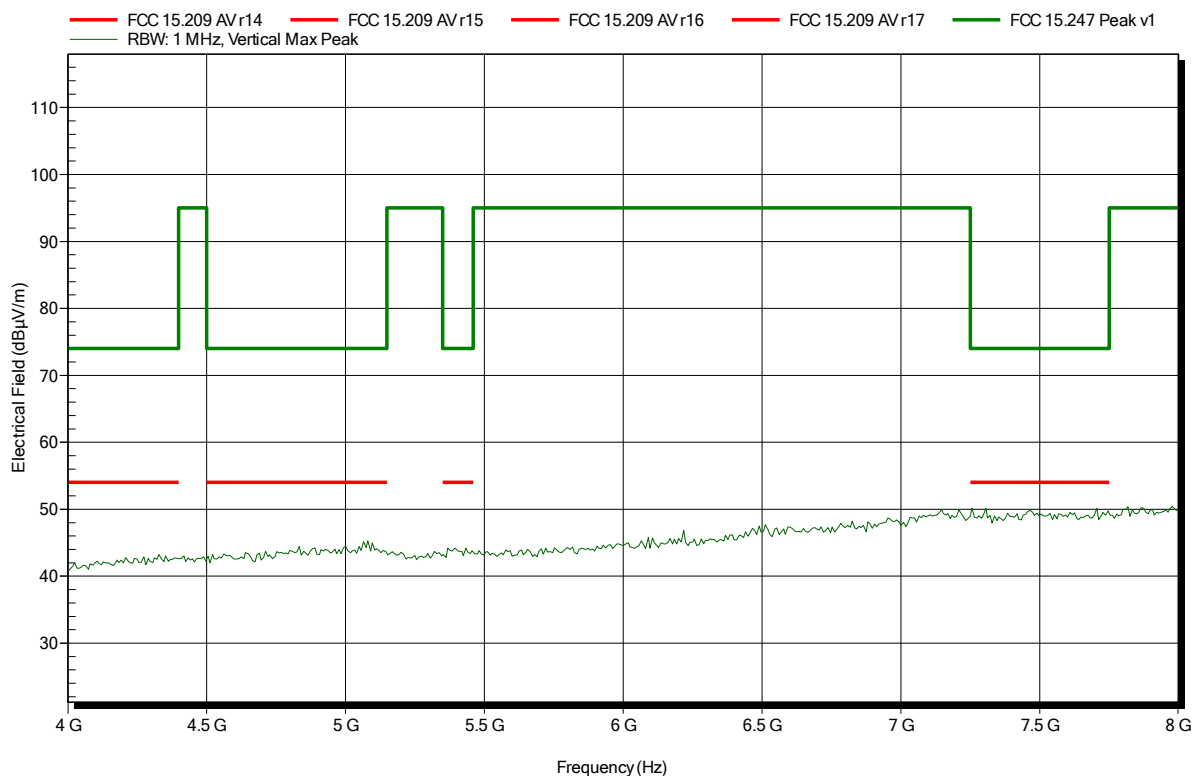


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 54

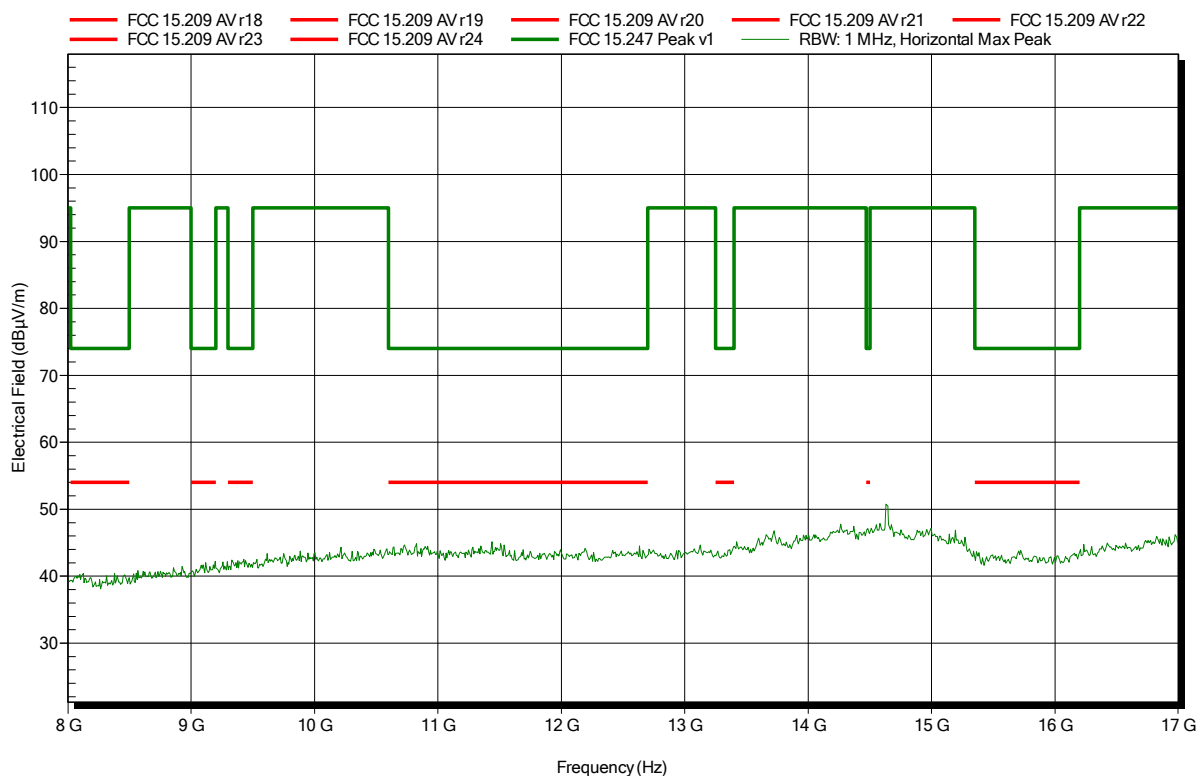


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 53

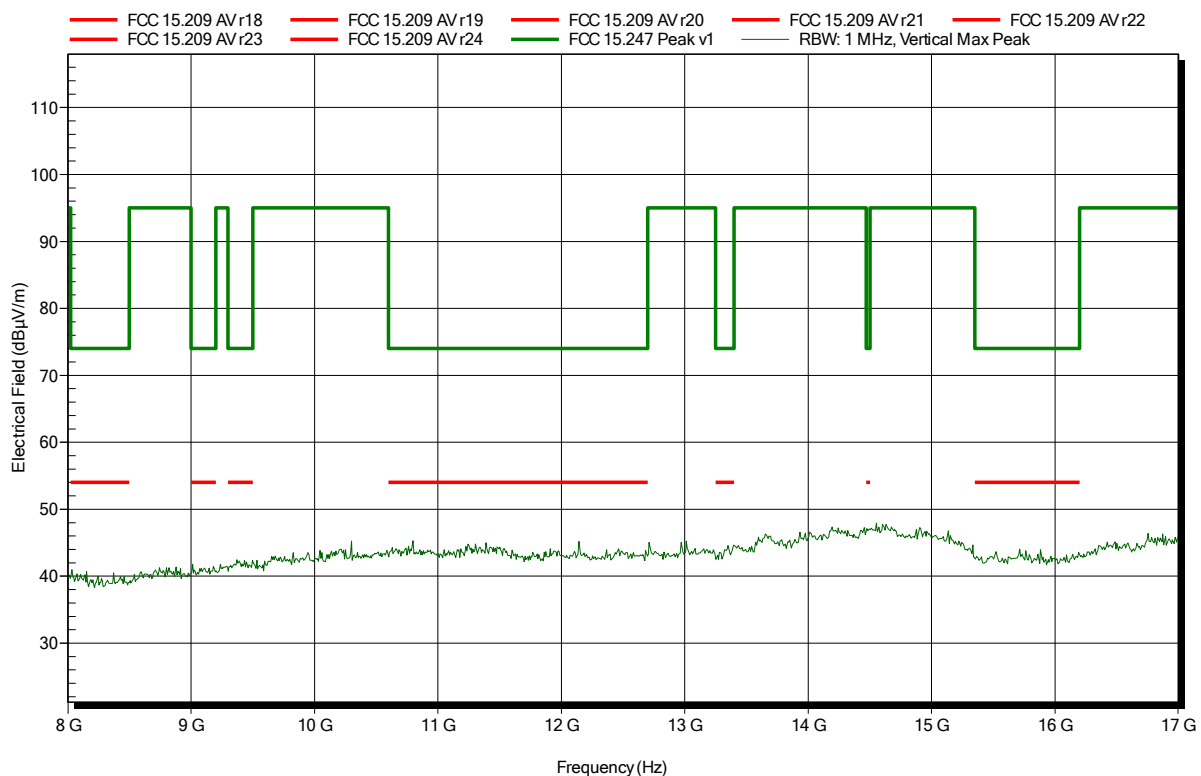


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-24
 Note:

Index 59

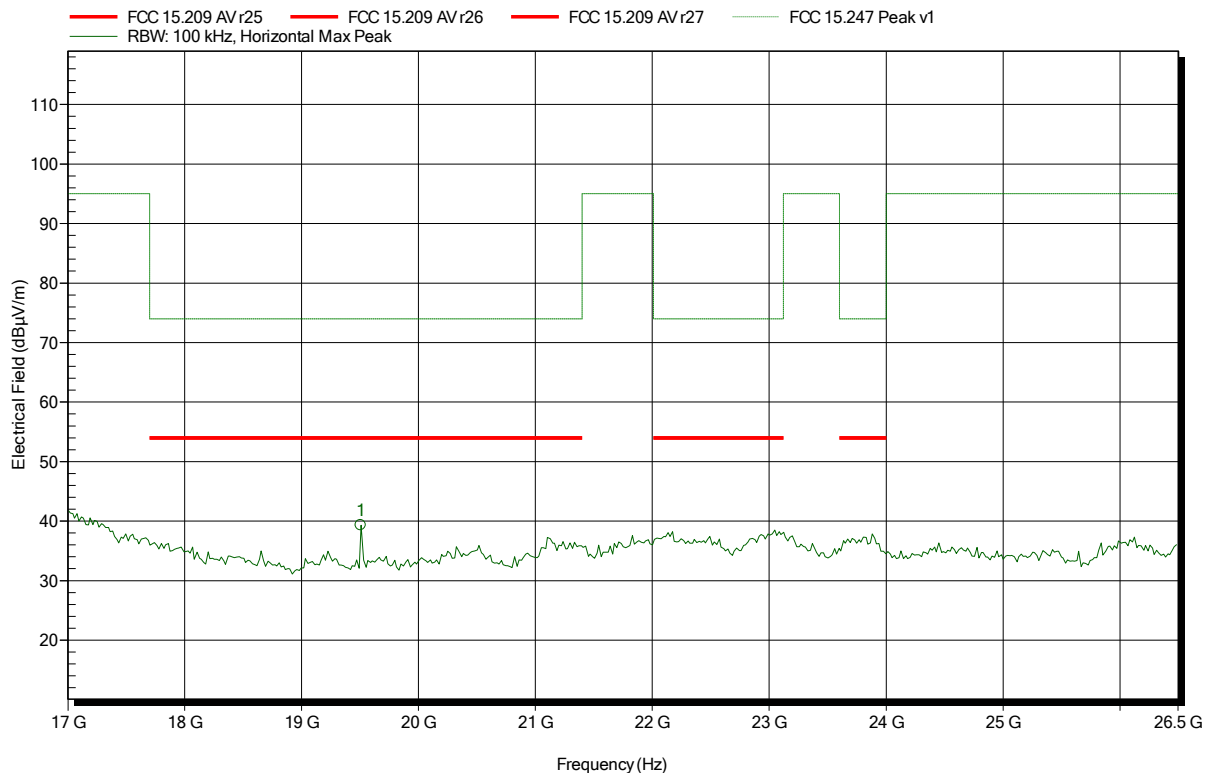


Frequency	Peak	Peak Limit	Peak Difference	Status
19.508 GHz	39.32 dBµV/m	74 dBµV/m	-34.68 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2442 MHz
 Test Date: 2017-01-24
 Note:

Index 60

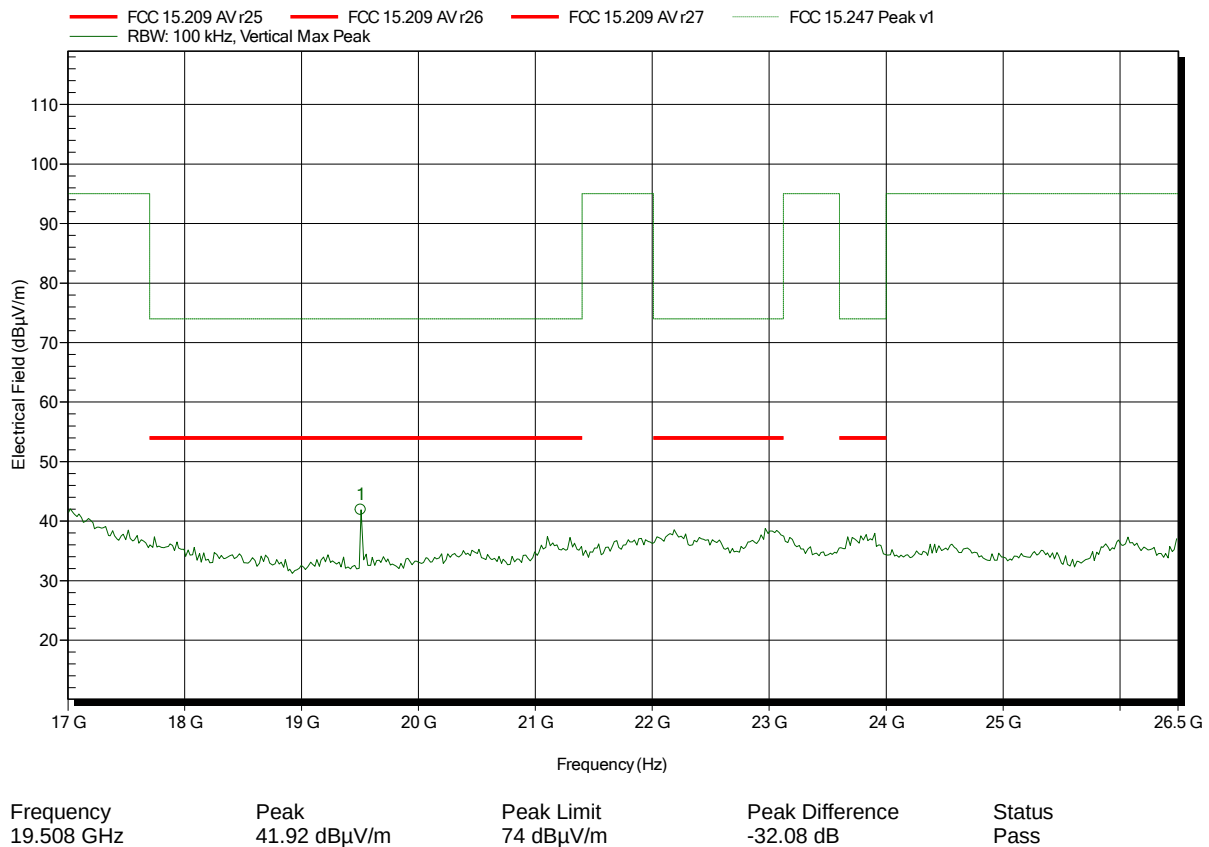


Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Horizontal
Measurement distance:	3 m
Mode:	BT LE 2480 MHz
Test Date:	2017-01-23
Note:	

Index 16

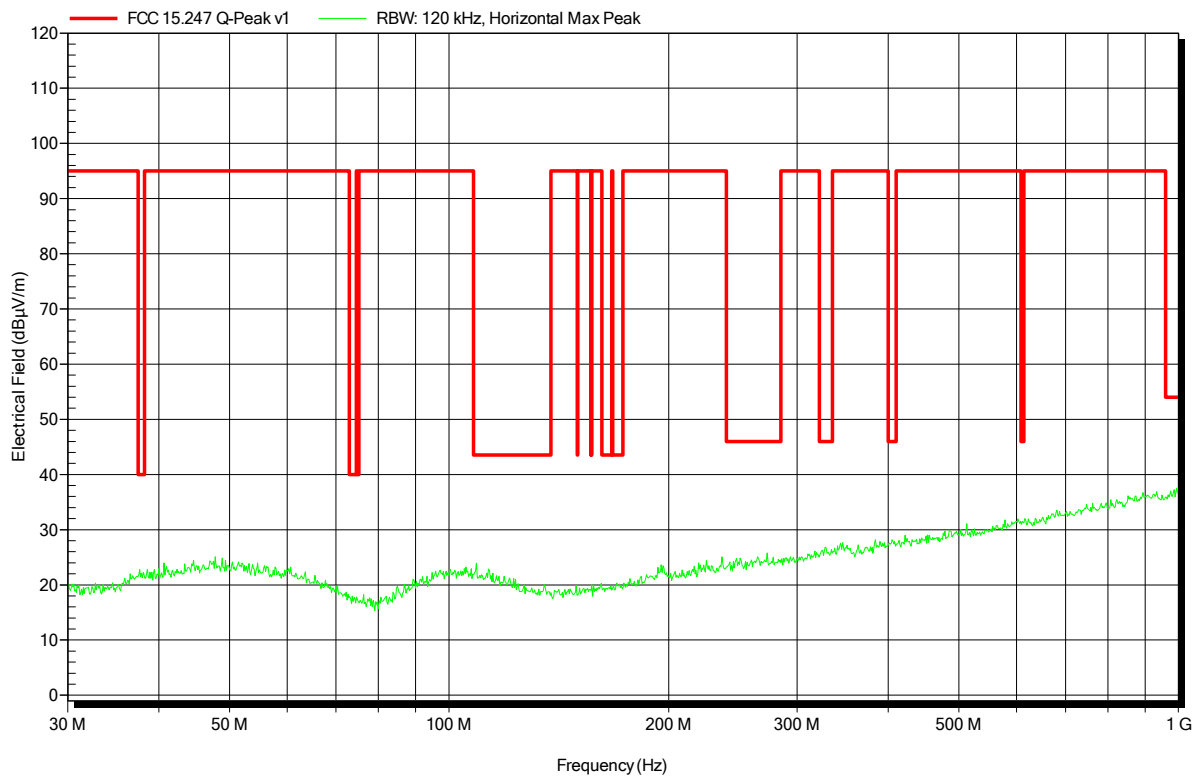


Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Vertical
Measurement distance:	3 m
Mode:	BT LE 2480 MHz
Test Date:	2017-01-23
Note:	

Index 15

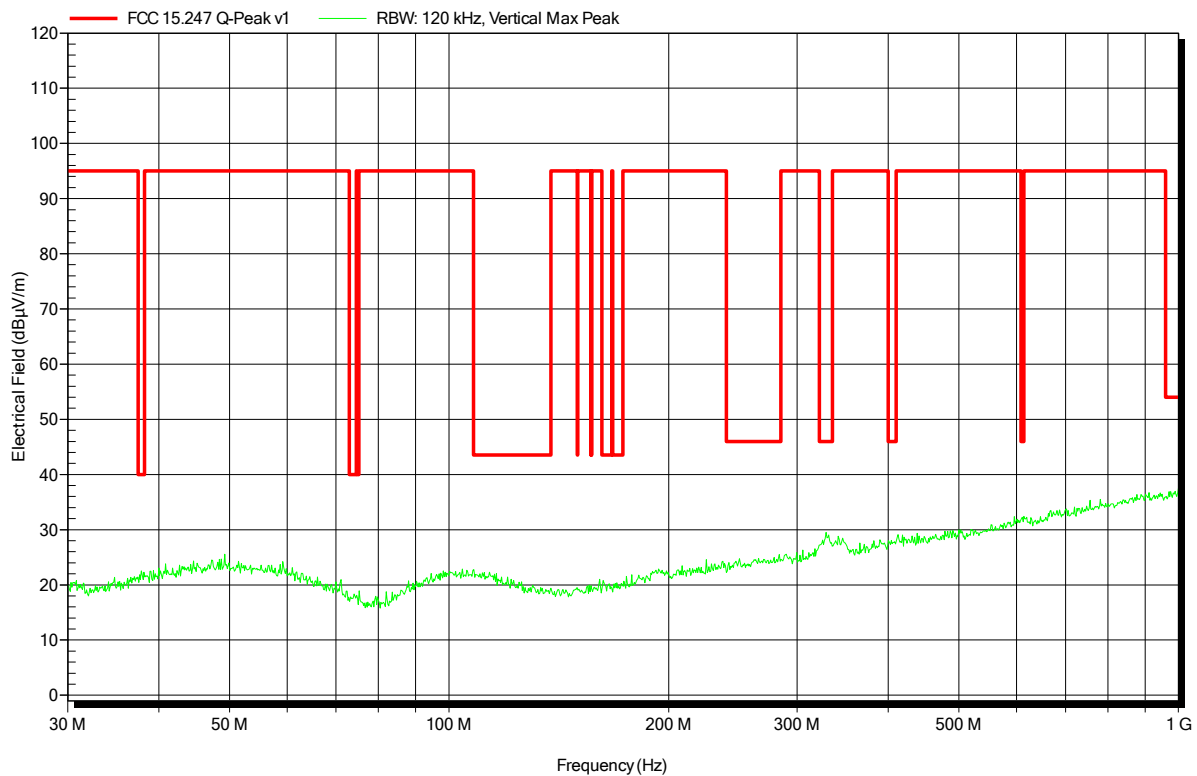


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 44

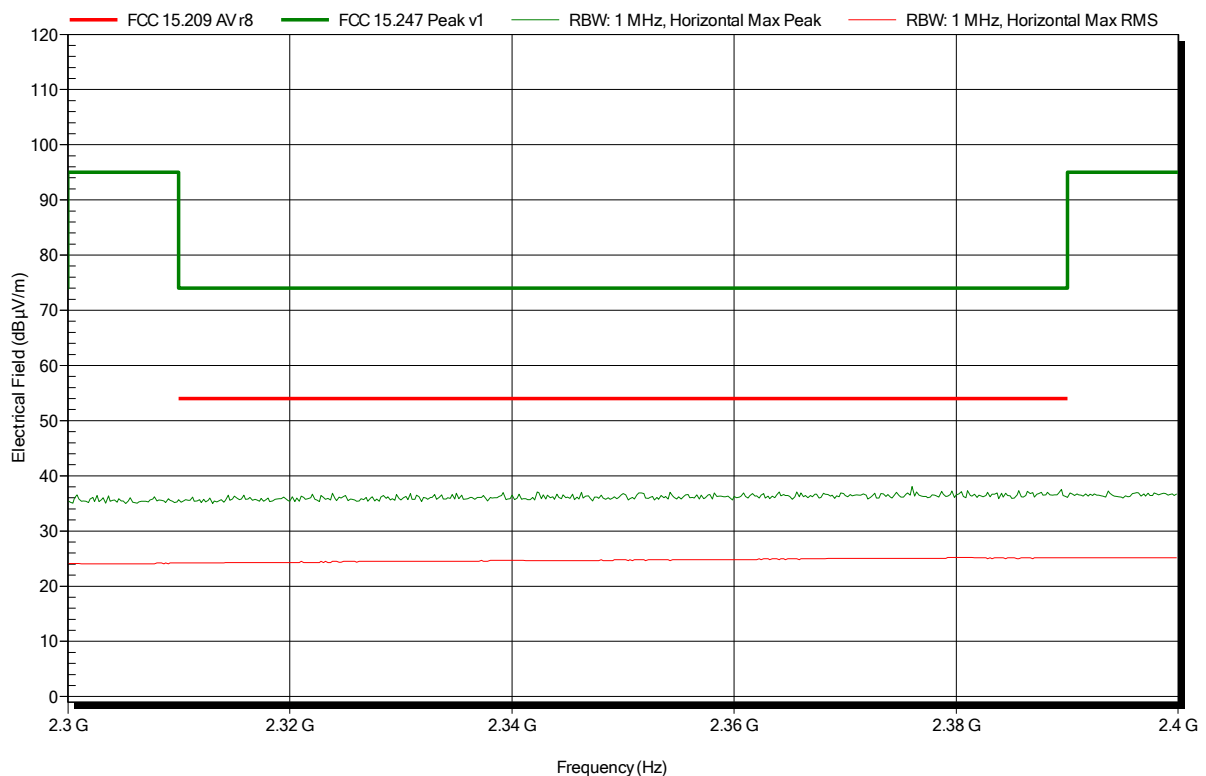


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 38

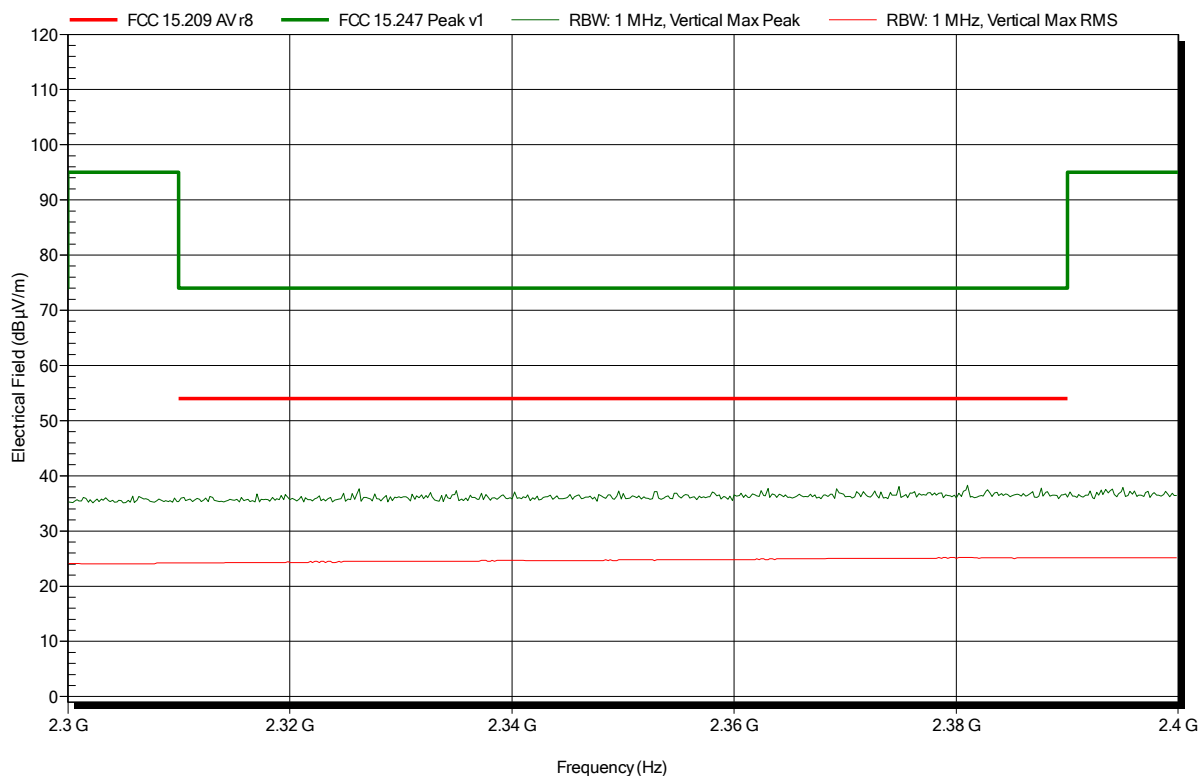


Spurious emissions according to FCC 15.247

Project number: GOM-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 41

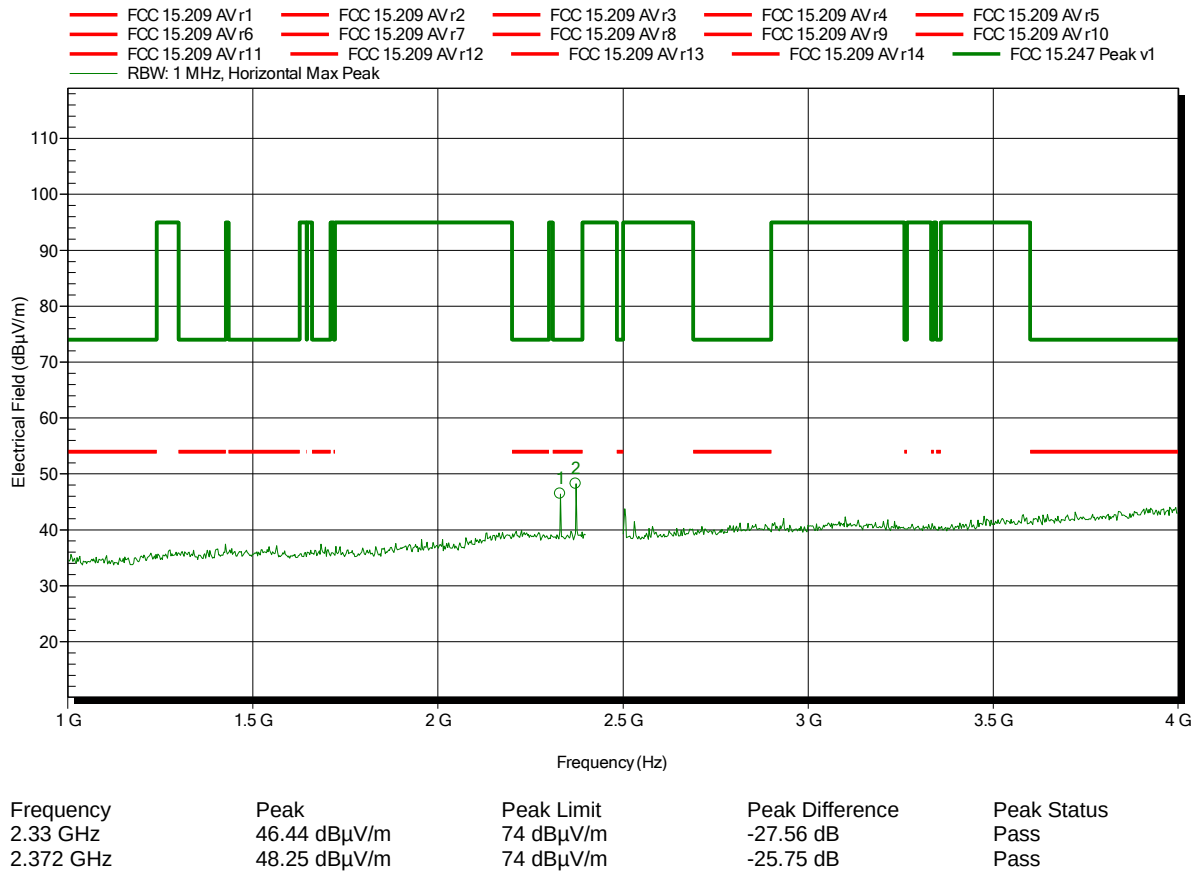


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 36

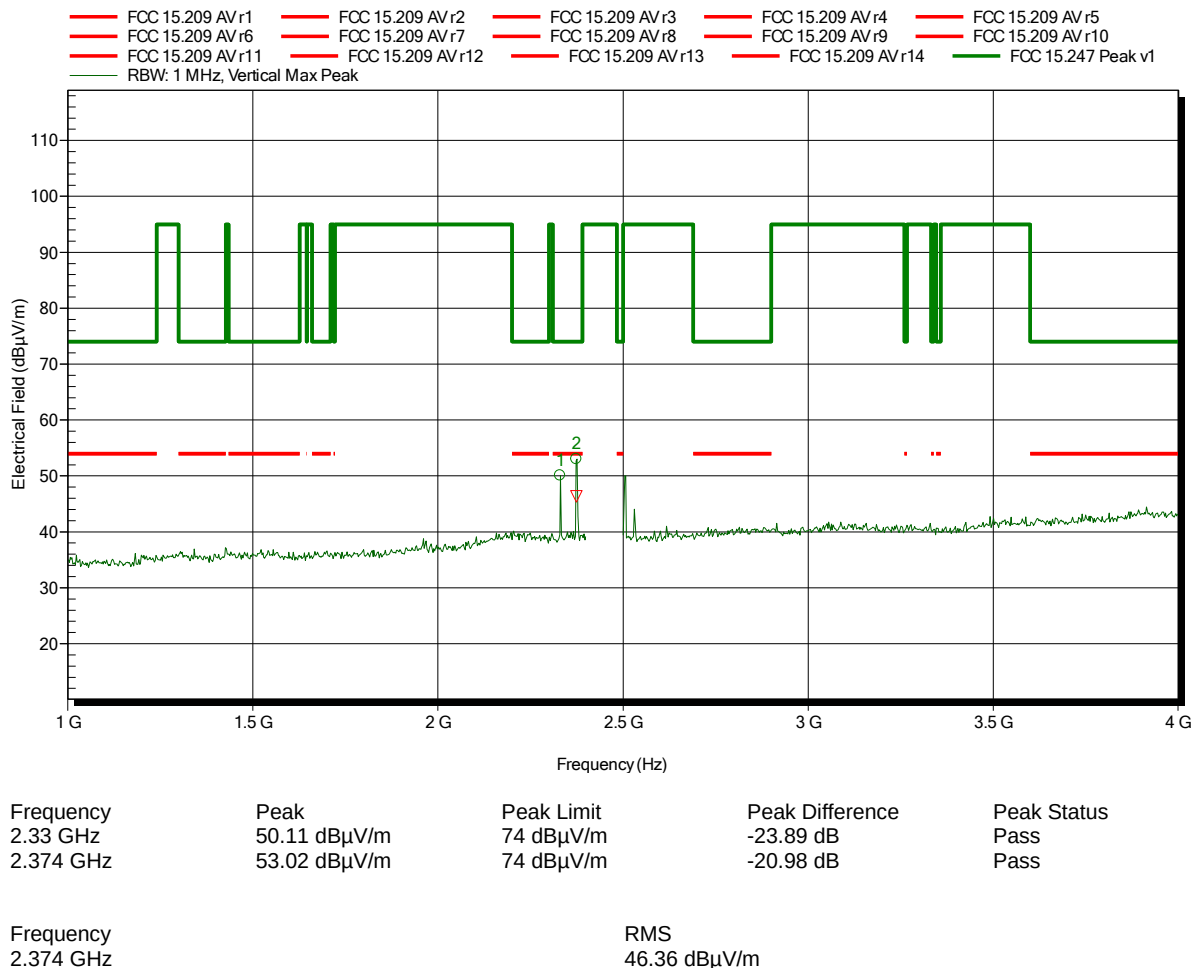


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 43

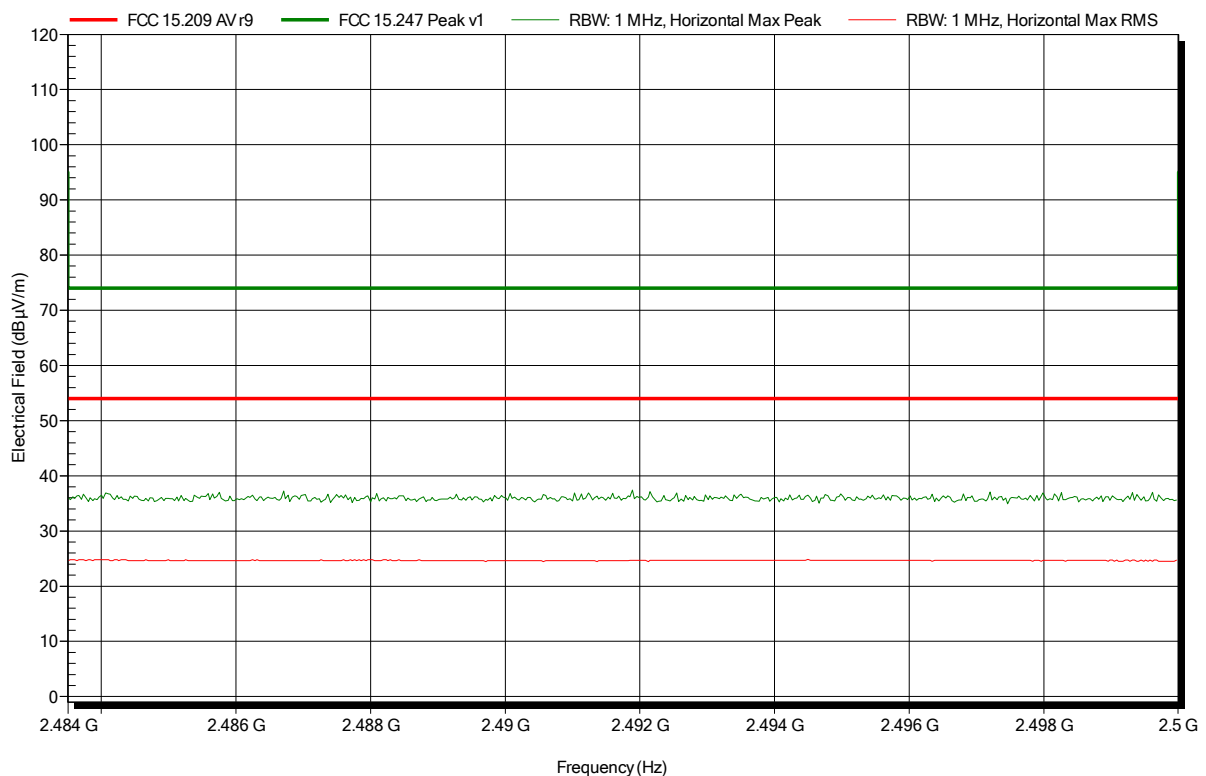


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 37

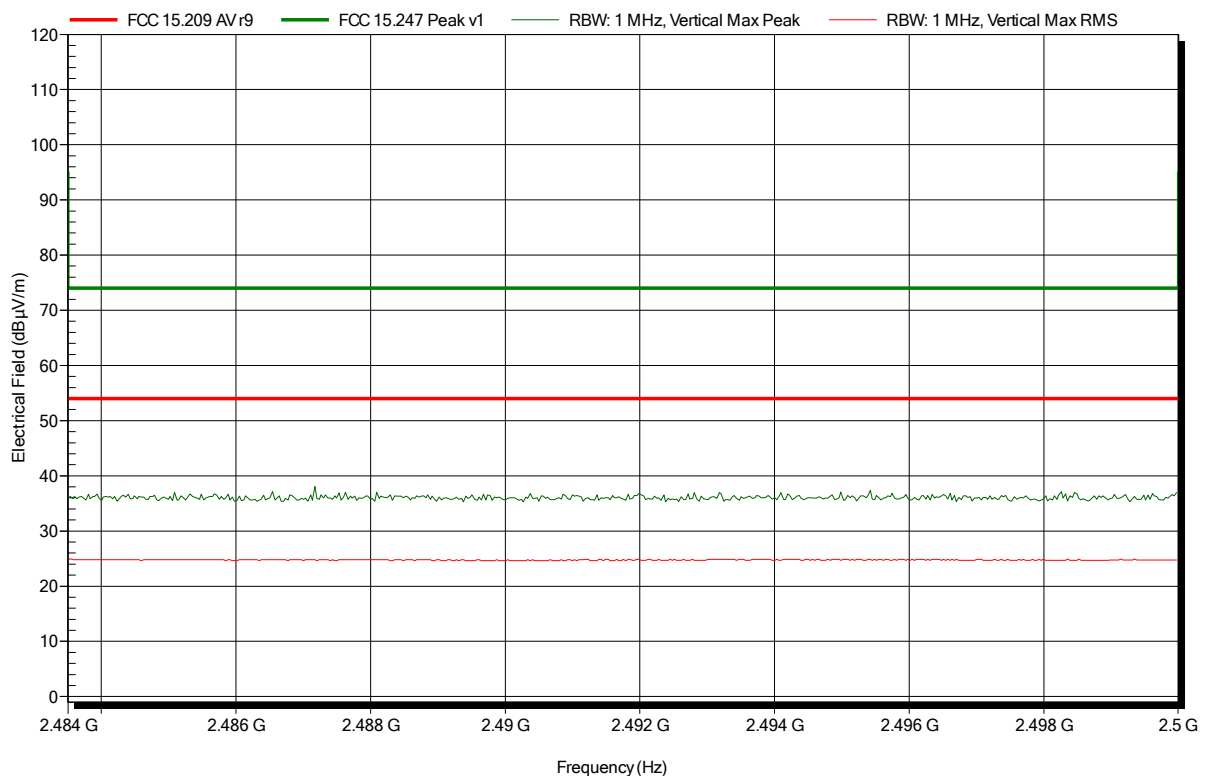


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 40

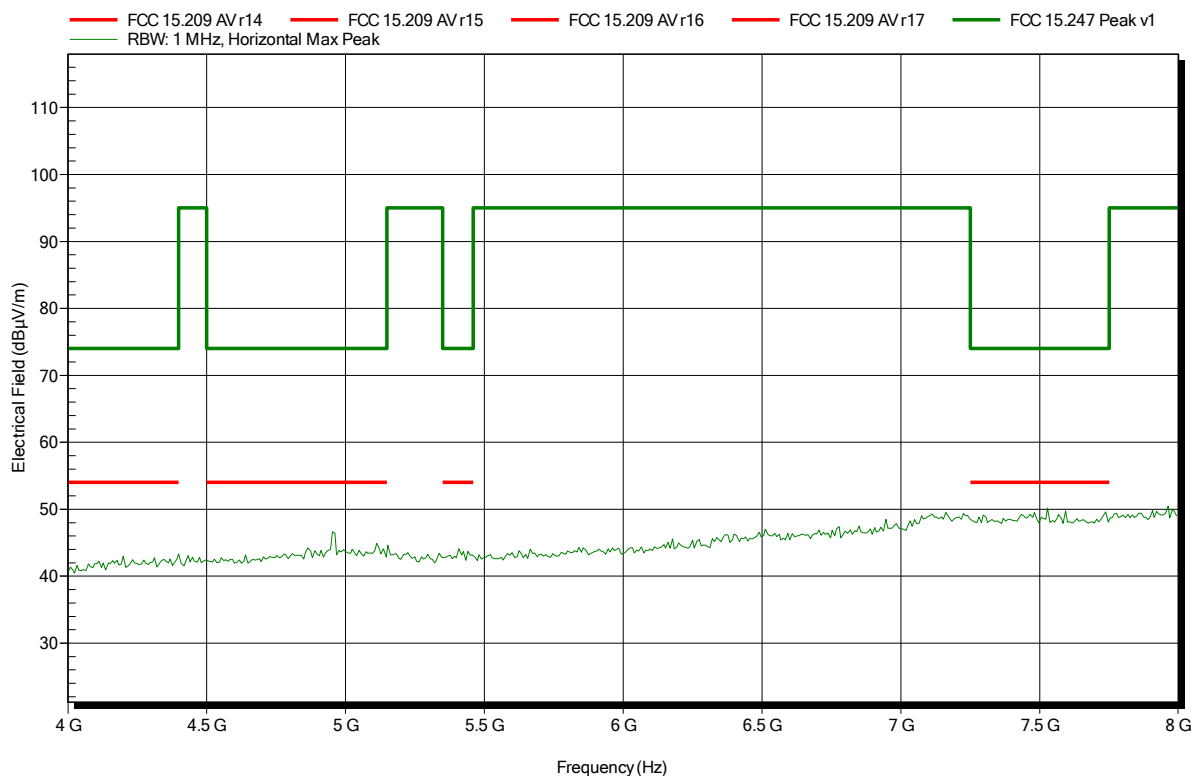


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m converted to 3m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 39

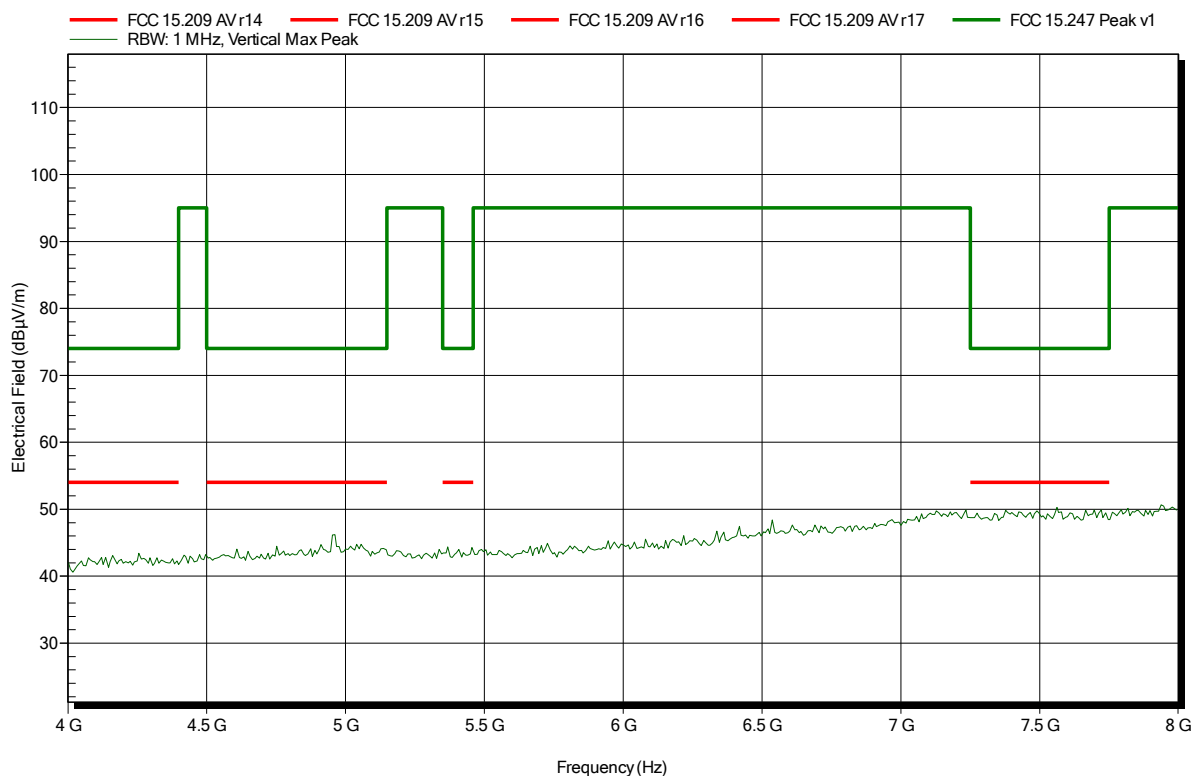


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 55

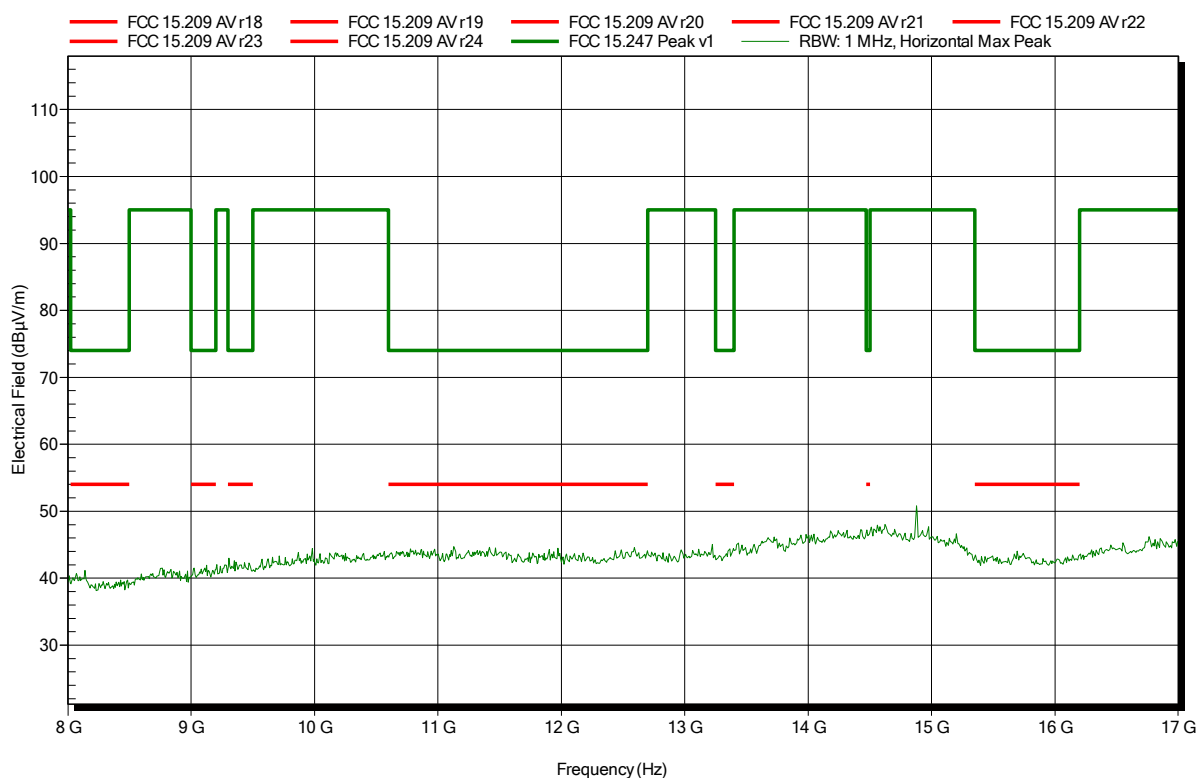


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-23
 Note:

Index 56

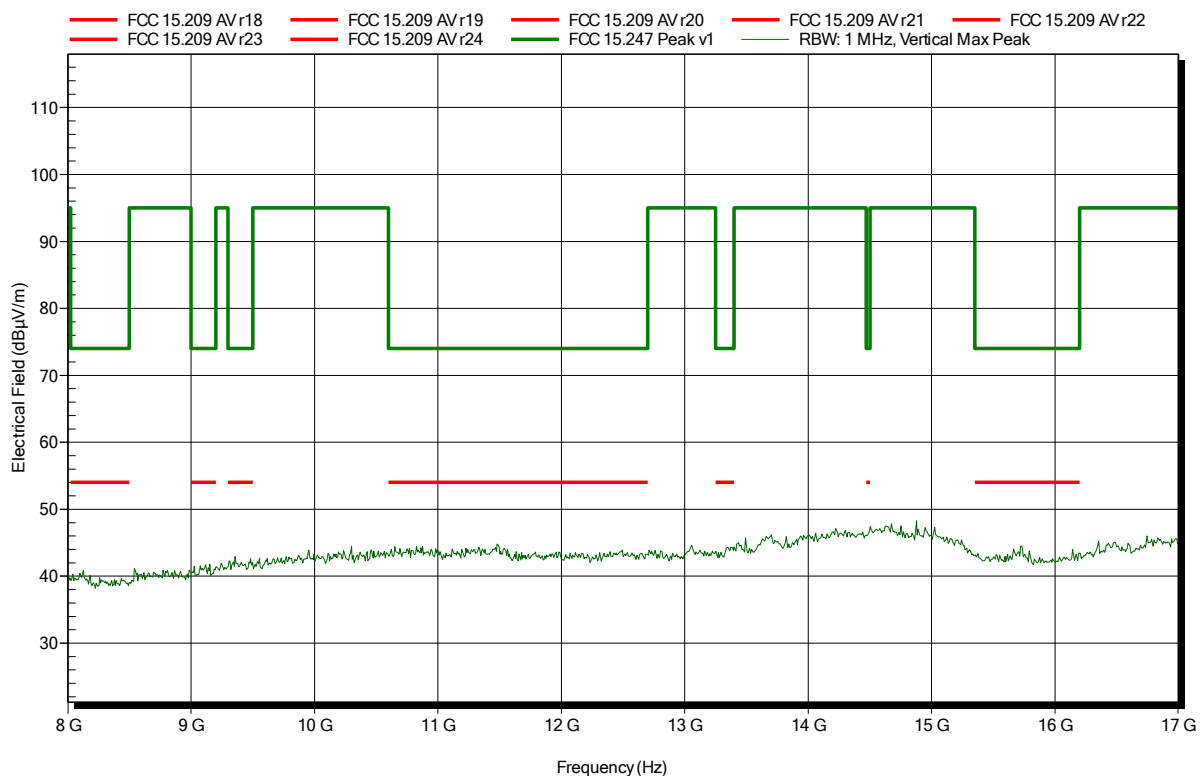


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-24
 Note:

Index 62

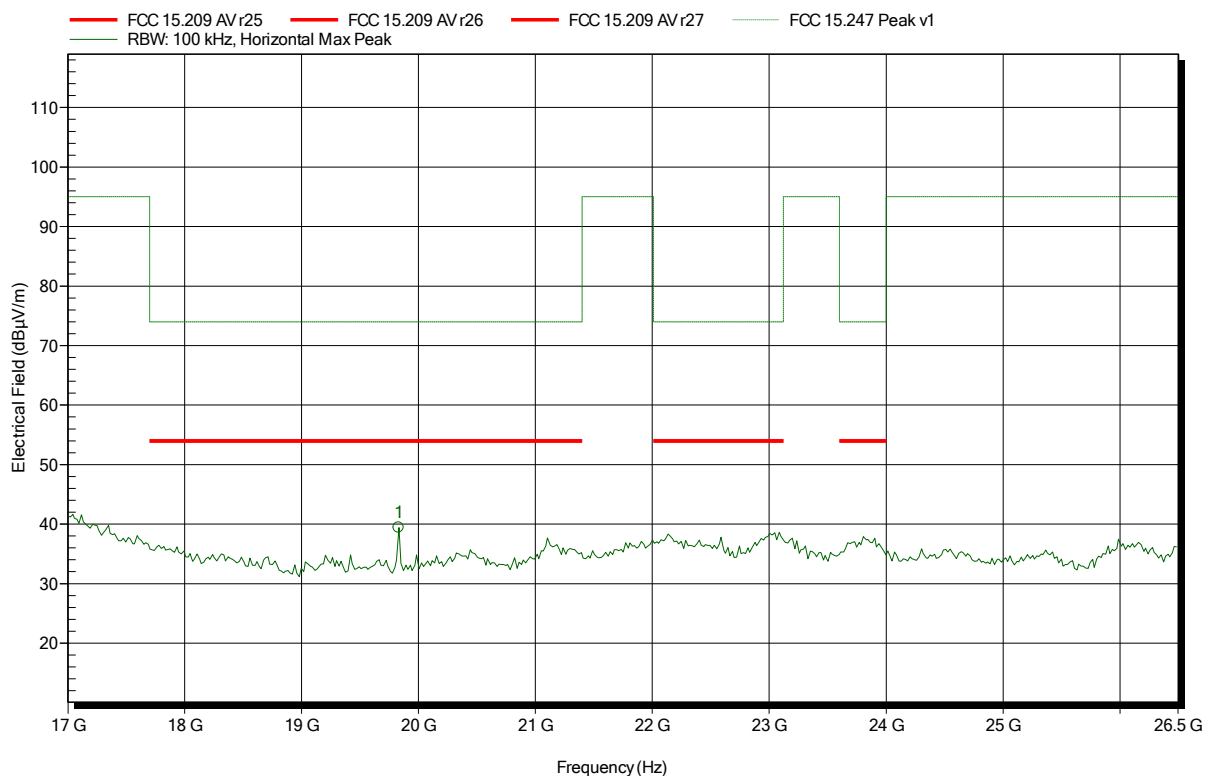


Frequency	Peak	Peak Limit	Peak Difference	Status
19.831 GHz	39.4 dBµV/m	74 dBµV/m	-34.6 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Amplifier Research AT 4560, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BT LE 2480 MHz
 Test Date: 2017-01-24
 Note:

Index 61

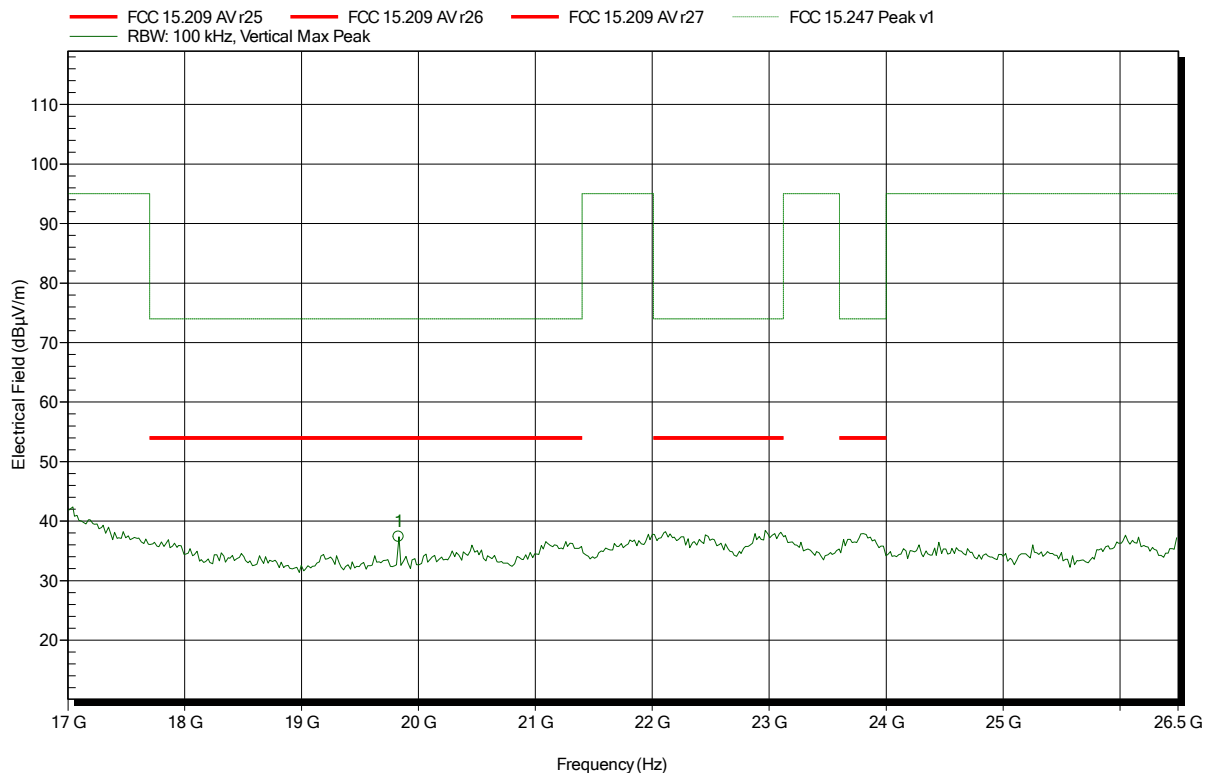

Frequency	Peak	Peak Limit	Peak Difference	Status
19.831 GHz	37.36 dBμV/m	74 dBμV/m	-36.64 dB	Pass

ANNEX B Receiver radiated spurious emissions

Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Horizontal
Measurement distance:	3 m
Mode:	RX; BT LE 2442 MHz
Test Date:	2017-01-23
Note:	

Index 17




Radiated emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Unom: 3.7 VDC
Antenna:	Schwarzbeck VULB 9162, Vertical
Measurement distance:	3 m
Mode:	RX; BT LE 2442 MHz
Test Date:	2017-01-23
Note:	

Index 18

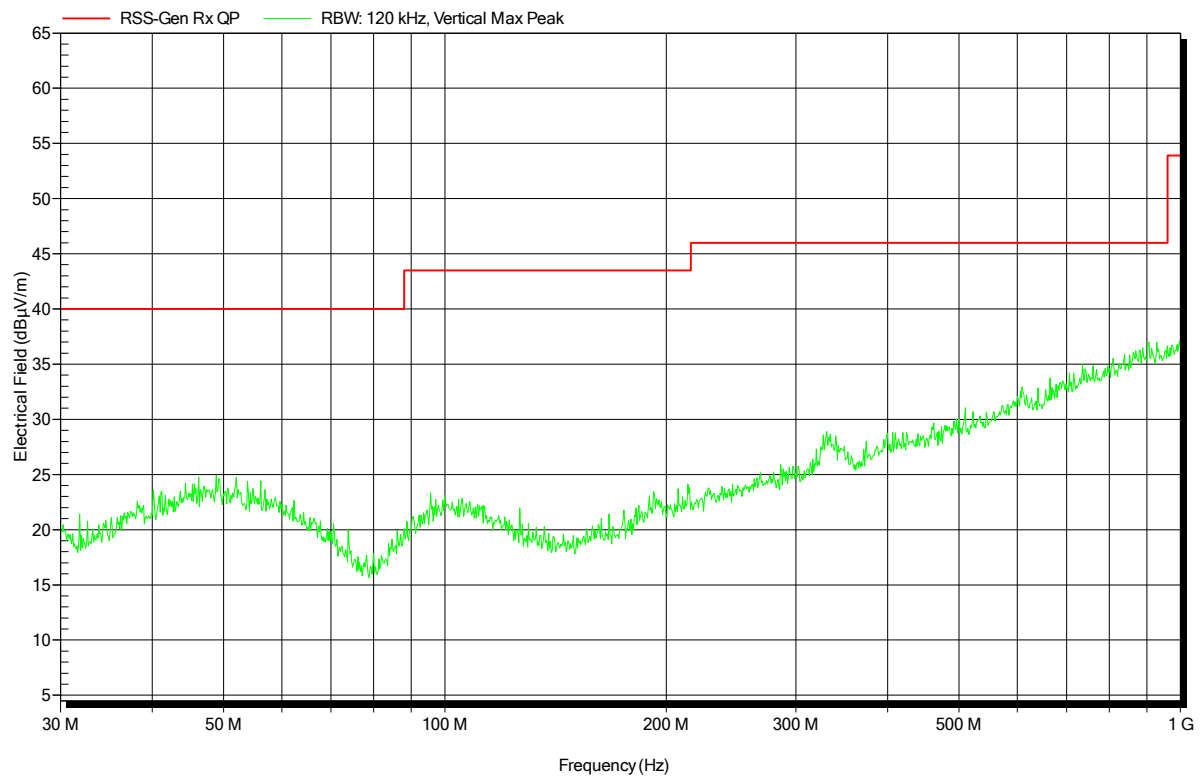


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Vnom: 3.7 VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; BT LE 2442 MHz
Test Date:	2017-01-23
Note:	

Index 45

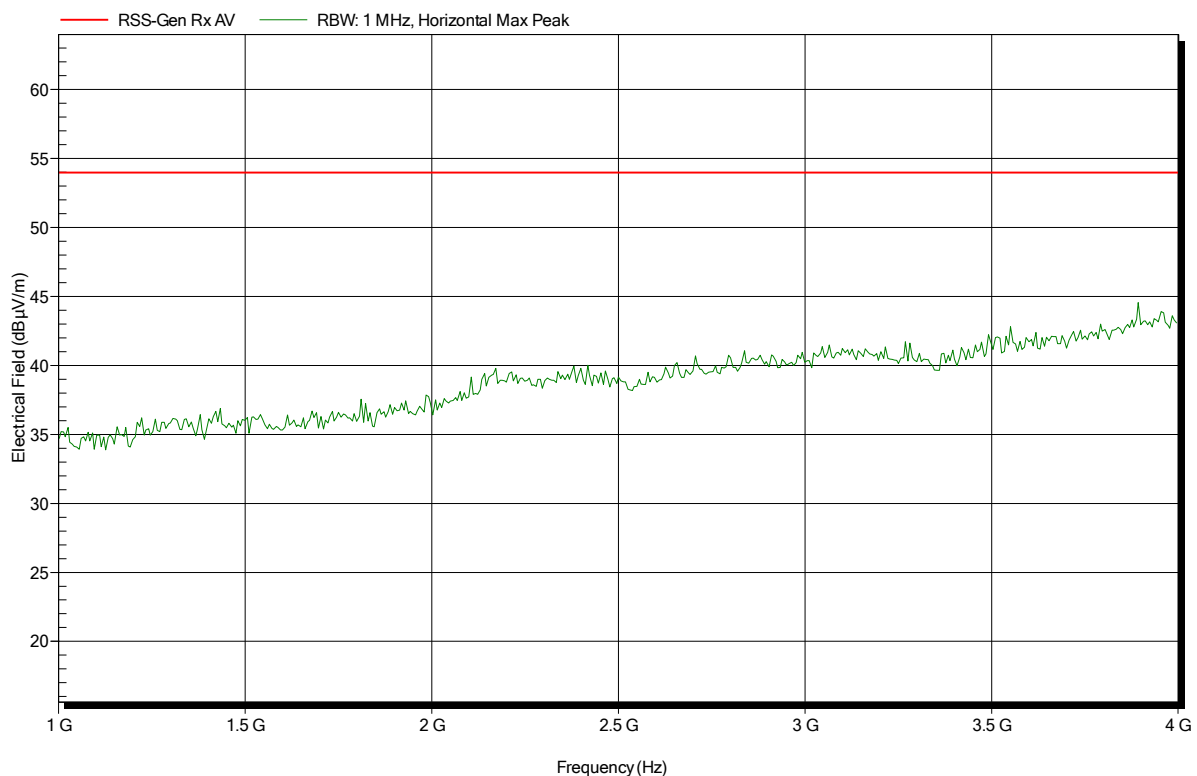


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 48

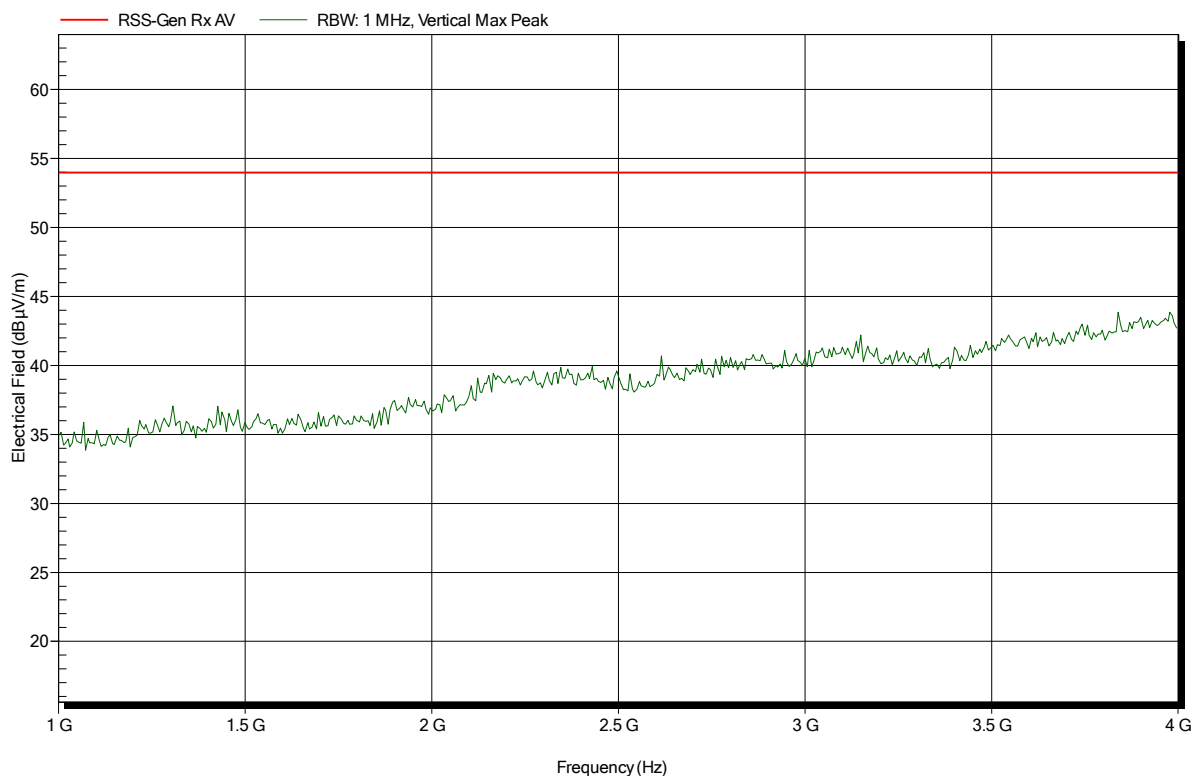


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 46

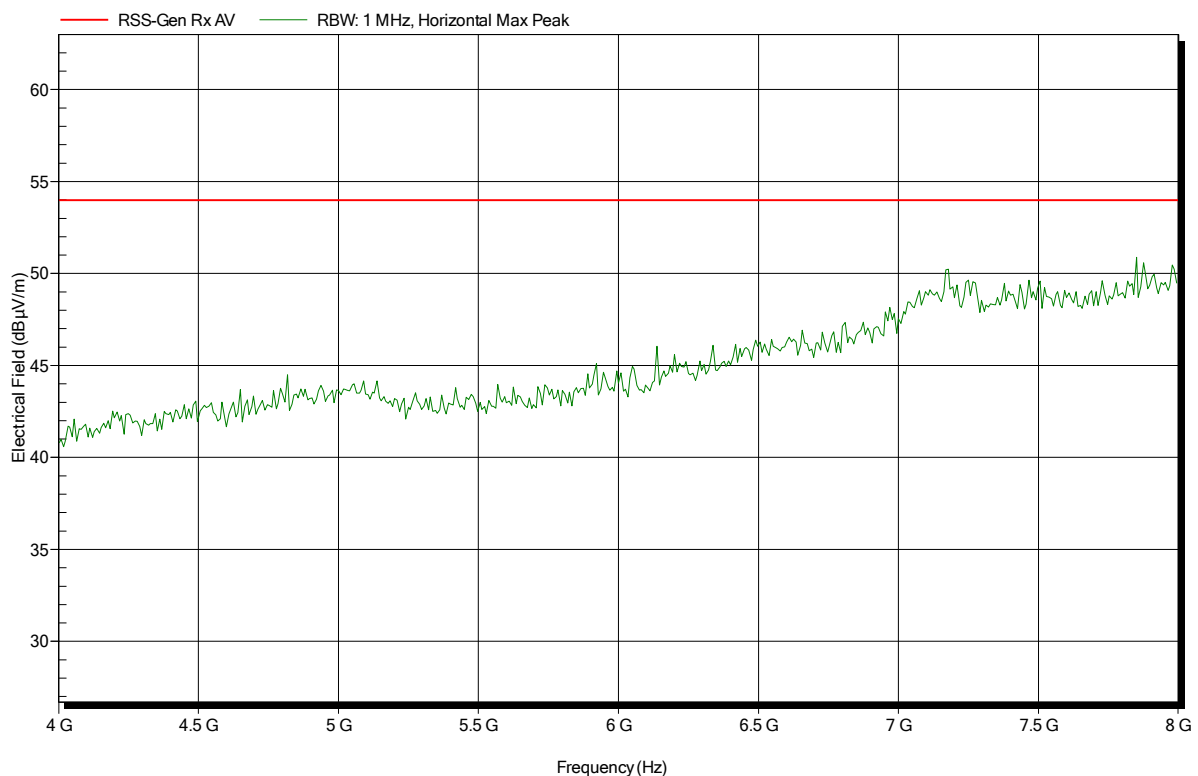


Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 47

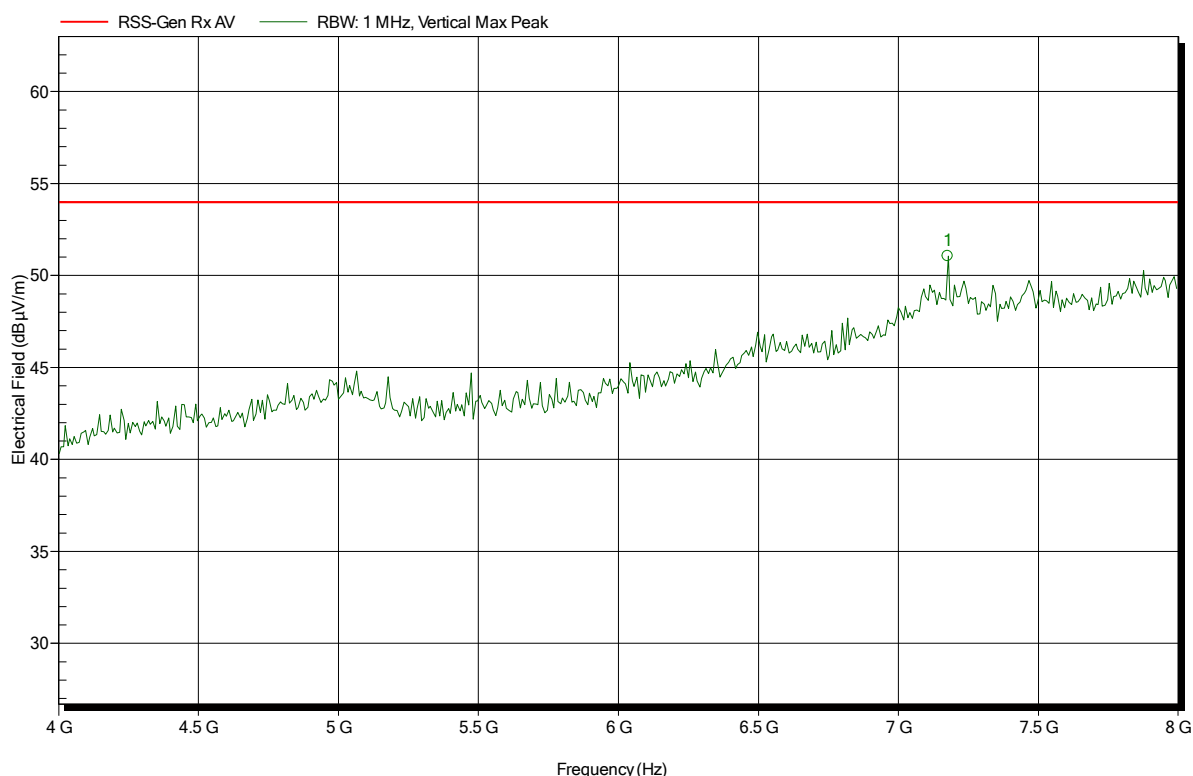


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.176 GHz	51.05 dBµV/m	53.98 dBµV/m	-2.93 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant: eResearch Technology GmbH
 EUT Name: Asthma Monitor AM3
 Model: AM3 Option G+
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: Tnom: 20°C, Vnom: 3.7 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; BT LE 2442 MHz
 Test Date: 2017-01-23
 Note:

Index 50

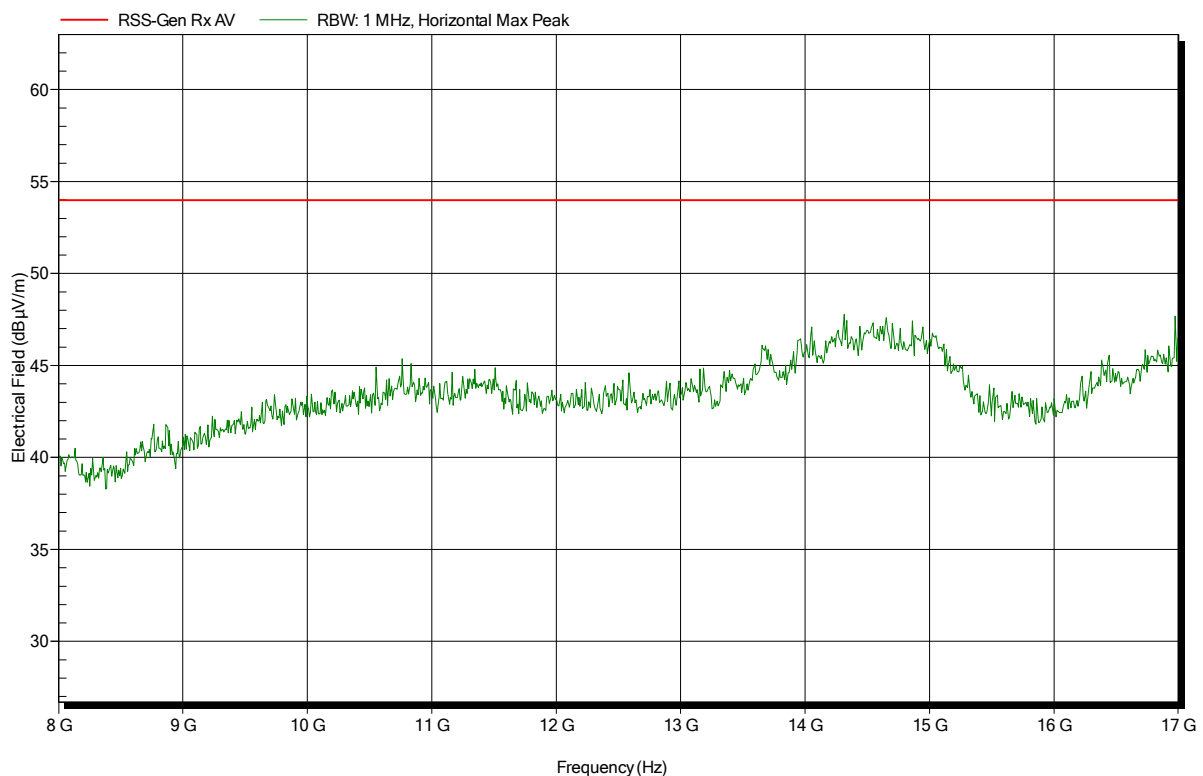

Spurious emissions according to FCC 15.247

Project number: G0M-1612-6168

Applicant:	eResearch Technology GmbH
EUT Name:	Asthma Monitor AM3
Model:	AM3 Option G+
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Suckow
Test Conditions:	Tnom: 20°C, Vnom: 3.7 VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	RX; BT LE 2442 MHz
Test Date:	2017-01-23
Note:	

Index 49

