intertek
Total Quality. Assured.

Shenzhen Honeycomb Technologies Company Limited

TEST REPORT

SCOPE OF WORK
FCC TESTING–nRF51822 Module V1

REPORT NUMBER
191203019SZN-001

ISSUE DATE	**[REVISED DATE]**
18 December 2019	[----------]

PAGES
32

DOCUMENT CONTROL NUMBER
FCC ID 247_b
© 2017 INTERTEK

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community,
GuanHu Subdistrict, LongHua District, Shenzhen.

Tel: (86 755) 8601 6288
Fax: (86 755) 8601 6751
www.intertek.com

Total Quality. Assured.

TEST REPORT

Intertek Report No.: 191203019SZN-001

Shenzhen Honeycomb Technologies Company Limited

Application
For
Certification

FCC ID: 2AAUWHBT42A20N

BT+2.4G wireless module

Model: nRF51822 Module V1

2.4GHz Transceiver

Report No.: 191203019SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-18]

Prepared and Checked by:

Damon Wang
Project Engineer

Approved by:

Kidd Yang
Technical Supervisor
Date: 18 December 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:) Original Grant __X__ Class II Change _____

Equipment Type: DTS - Part 15 Digital Transmission Systems

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No __X__

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date
of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No __X__

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-18 Edition] provision.

Report prepared by:

Damon Wang
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, Shenzhen.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

Table of Contents

1.0 Summary of Test Results 4
2.0 General Description 5
2.1 Product Description 5
2.2 Related Submittal(s) Grants 5
2.3 Test Methodology 5
2.4 Test Facility 5
3.0 System Test Configuration 6
3.1 Justification 6
3.2 EUT Exercising Software 6
3.3 Special Accessories 6
3.4 Equipment Modification 6
3.5 Measurement Uncertainty 7
3.6 Support Equipment List and Description 7
4.0 Test Results 8
4.1 Radiated Test Result 8
4.1.1 Field Strength Calculation 8
4.1.2 Radiated Emission Configuration Photograph 9
4.1.3 Radiated Emission 9
4.1.4 Transmitter Spurious Emissions (Radiated) 12
4.2 Peak Power 16
4.3 6dB Bandwidth 19
4.4 Power Density 21
4.5 Out of Band Conducted Emissions 23
4.6 Dwell Time (Time of Occupancy) 28
4.7 Duty Cycle 29
5.0 Equipment Photographs 30
6.0 Product Labelling 30
7.0 Technical Specifications 30
8.0 Instruction Manual 30
9.0 Miscellaneous Information 31
9.1 Discussion of Pulse Desensitization 31
9.2 Emissions Test Procedures 31
10.0 Test Equipment List 32

1.0 Summary of Test Results

Applicant: Shenzhen Honeycomb Technologies Company Limited
Address: Floor 4th, Building 7, Xinhe Xinxing Industrial Park Block 3A, Fuyong Town, Bao'an District, Shenzhen China
Manufacturer: Shenzhen Honeycomb Technologies Company Limited
Address: Floor 4th, Building 7, Xinhe Xinxing Industrial Park Block 3A, Fuyong Town, Bao'an District, Shenzhen China

Model: nRF51822 Module V1

FCC ID: 2AAUWHBT42A20N

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a BT+2.4G wireless module with Bluetooth and 2.4G transmitter functions operating in 2402-2480MHz. The EUT is powered by DC 3.3V battery. For more detail information pls. refer to the user manual.

Bluetooth Version: 4.2 (BLE Single mode)
Antenna Type: Integral antenna
Antenna Gain: 0 dBi
Modulation Type: GFSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of transceiver for the BT+2.4G wireless module which has Bluetooth function. The 2.4G transmitter function was reported in the test report: 181205003SZN-002.

2.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and KDB 558074 v05r02. Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

2.4 Test Facility

The Semi-anechoic chamber used to collect the radiated data is **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC battery during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The unit was operated standalone and placed at the center of table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:
During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.
Test Software: nRFgo

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Shenzhen Honeycomb Technologies Company Limited will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Extender board	Shenzhen Honeycomb Technologies Company Limited	N/A

4.0 Test Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

FS = RA + AF + CF - AG + PD + AV

Where FS = Field Strength in dBµV/m
RA = Receiver Amplitude (including preamplifier) in dBµV
CF = Cable Attenuation Factor in dB
AF = Antenna Factor in dB
AG = Amplifier Gain in dB
PD = Pulse Desensitization in dB
AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

FS = RA + AF + CF - AG + PD + AV

Assume a receiver reading of 62.0 dBµV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dBµV/m. This value in dBµV/m was converted to its corresponding level in µV/m.

RA = 62.0 dBµV
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
AV = -10 dB

FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 dBµV/m
Level in µV/m = Common Antilogarithm [(32 dBµV/m)/20] = 39.8 µV/m

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 543.130000 MHz

Judgement: Passed by 15.4 dB

TEST PERSONNEL:

Sign on file

Damon Wang, Project Engineer
Typed/Printed Name

December 17, 2019
Date

Applicant: Shenzhen Honeycomb Technologies Company Limited
Date of Test: December 17, 2019
Model:nRF51822 Module V1
Sample: 1/1
Worst-case operating Mode: Transmit (2402MHz)
Modulation type: GFSK

ANT Polarity: Horizontal

FCC Part 15

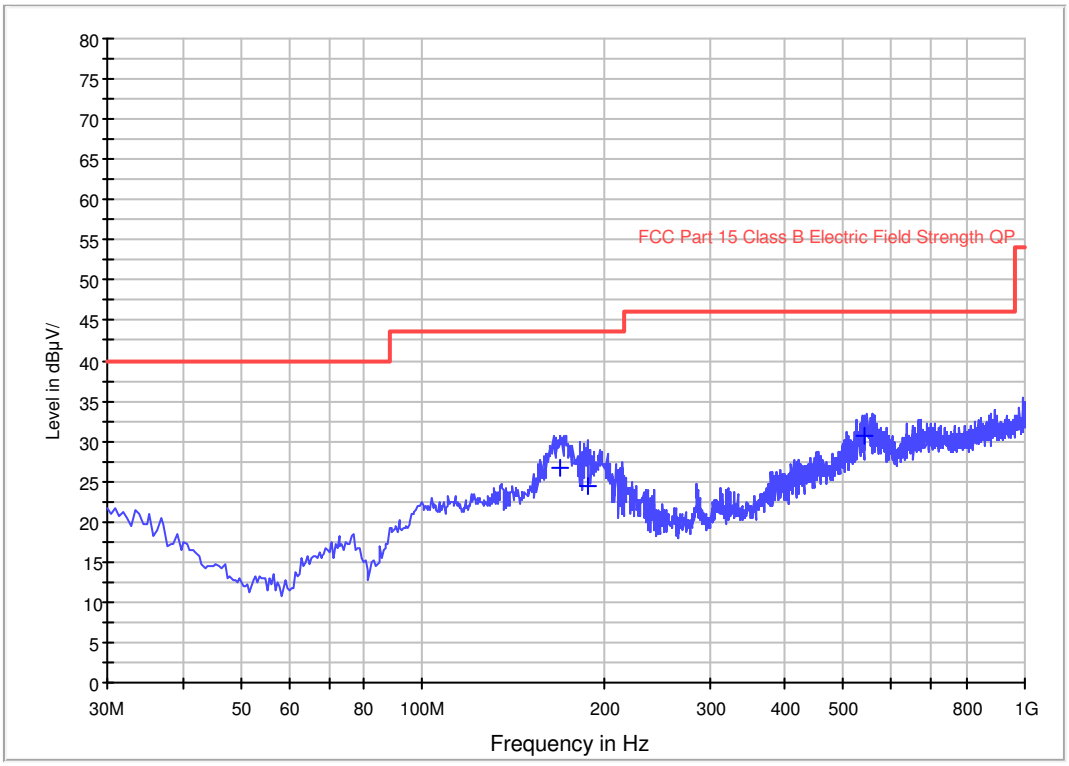

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
169.195000	26.7	1000.0	120.000	0.0	H	12.2	16.8	43.5
188.110000	24.5	1000.0	120.000	0.0	H	12.9	19.0	43.5
543.130000	30.6	1000.0	120.000	0.0	H	23.3	15.4	46.0

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
3. Margin (dB) = Limit Line(dBµV/m) – Level (dBµV/m)

Applicant: Shenzhen Honeycomb Technologies Company Limited
Date of Test: December 17, 2019
Model: nRF51822 Module V1
Sample: 1/1
Worst-case operating Mode: Transmit (2402MHz)
Modulation type: GFSK

ANT Polarity: Vertical

FCC Part 15

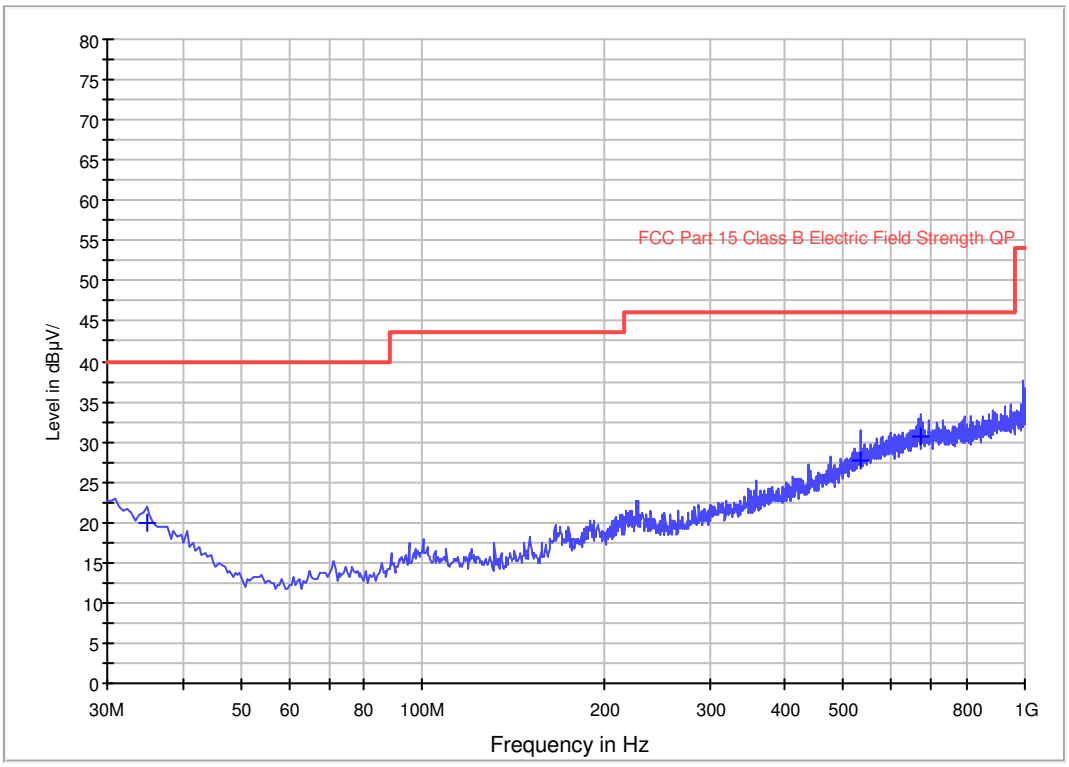

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
34.850000	20.0	1000.0	120.000	0.0	V	15.8	20.0	40.0
532.945000	27.6	1000.0	120.000	0.0	V	23.1	18.4	46.0
672.625000	30.6	1000.0	120.000	0.0	V	25.8	15.4	46.0

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
3. Margin (dB) = Limit Line(dBµV/m) – Level (dBµV/m)

4.1.4 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 4804.000 MHz

Judgement: Passed by 3.5 dB

TEST PERSONNEL:

Sign on file

Damon Wang, Project Engineer
Typed/Printed Name

December 17, 2019
Date

Applicant: Shenzhen Honeycomb Technologies Company Limited
Date of Test: December 17, 2019
Model: nRF51822 Module V1
Sample: 1/1
Worst-case operating Mode: Transmit (2402MHz)
Modulation type: GFSK

Table 1

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Vertical	*2387.100	60.8	36.7	28.1	52.2	74.0	-21.8
Vertical	*4804.000	57.4	36.7	35.5	56.2	74.0	-17.8

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m	Margin (dB)
Vertical	*2387.100	55.7	36.7	28.1	47.1	54.0	-21.8
Vertical	*4804.000	51.7	36.7	35.5	50.5	54.0	-3.5

NOTES:

1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Honeycomb Technologies Company Limited
Date of Test: December 17, 2019
Model: nRF51822 Module V1
Sample: 1/1
Worst-case operating Mode: Transmit (2440MHz)
Modulation type: GFSK

Table 2

Radiated Emissions

(2440MHz)

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Vertical	*4880.000	55.1	36.7	35.5	53.9	74.0	-20.1
Vertical	*7320.000	54.4	36.1	37.2	55.5	74.0	-18.5

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Vertical	*4880.000	47.6	36.7	35.5	46.4	54.0	-7.6
Vertical	*7320.000	43.8	36.1	37.2	44.9	54.0	-9.1

NOTES:

1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Honeycomb Technologies Company Limited
Date of Test: December 17, 2019
Model: nRF51822 Module V1
Sample: 1/1
Worst-case operating Mode: Transmit (2480MHz)
Modulation type: GFSK

Table 3

Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Vertical	*4960.000	54.6	36.7	35.5	53.4	74.0	-20.6
Vertical	*7440.000	55.0	36.1	37.2	56.1	74.0	-17.9

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Vertical	*4960.000	48.1	36.7	35.5	46.9	54.0	-7.1
Vertical	*7440.000	45.5	36.1	37.2	46.6	54.0	-7.4

NOTES:

1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

4.2 Peak Power

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3).
The antenna power of the EUT was connected to the input of a broadband peak RF power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

Antenna Gain = 0dBi			
Modulation Type	Frequency (MHz)	Output Power (Peak Reading) (dBm)	Output Power (mW)
GFSK	Low Channel: 2402	-6.21	0.239
	Middle Channel: 2440	-5.26	0.298
	High Channel: 2480	-4.70	0339

Cable loss: 1.0 dB External Attenuation: 0 dB

Modulation Type: GFSK

Low Channel

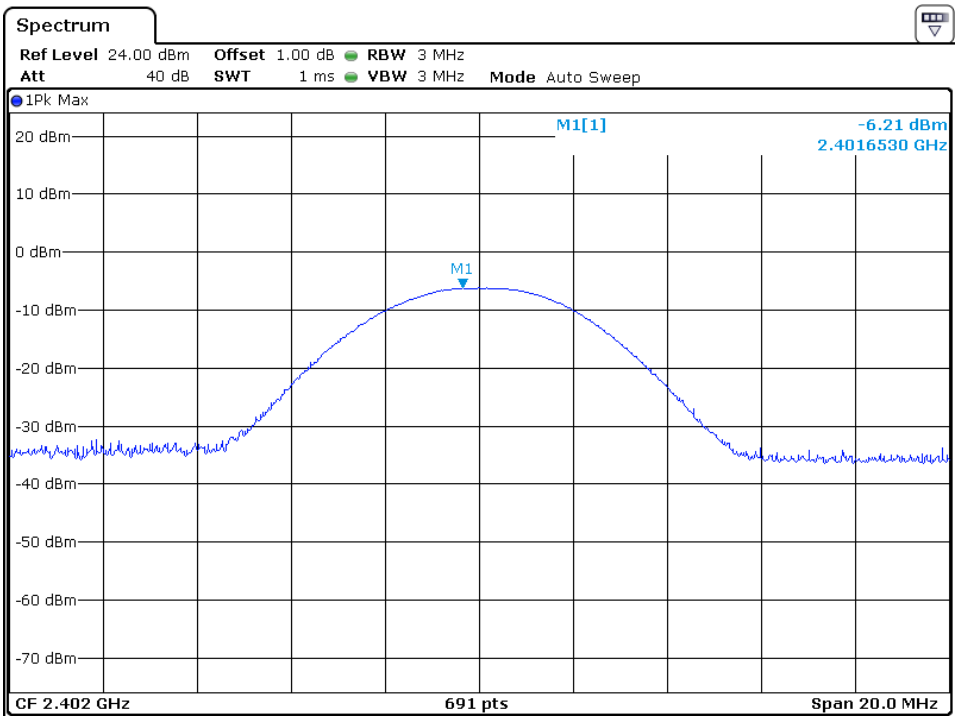

Middle Channel

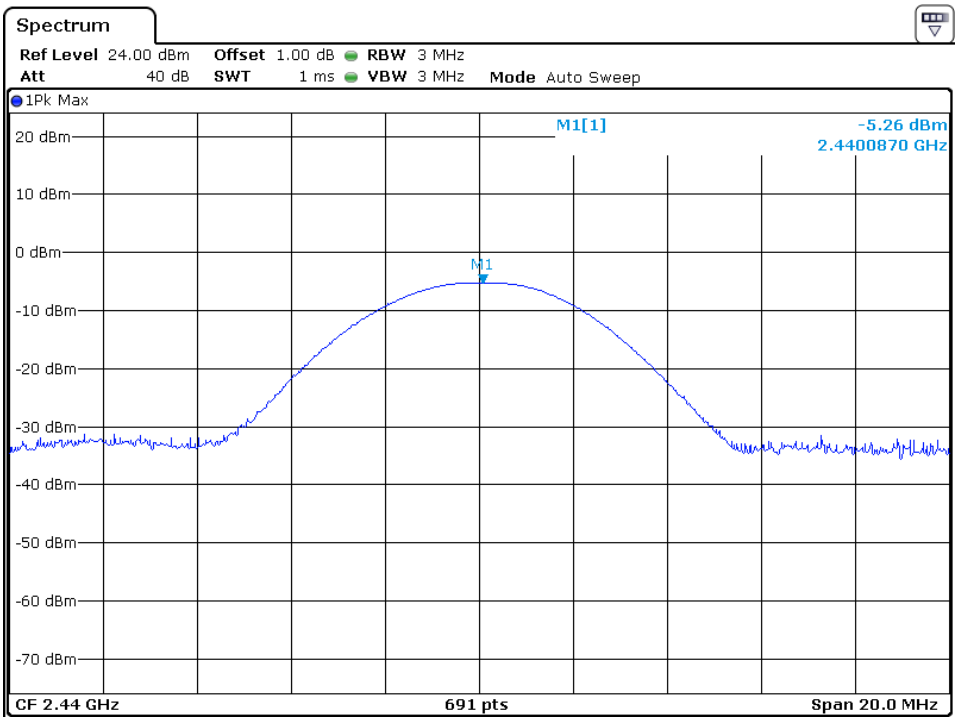

High Channel

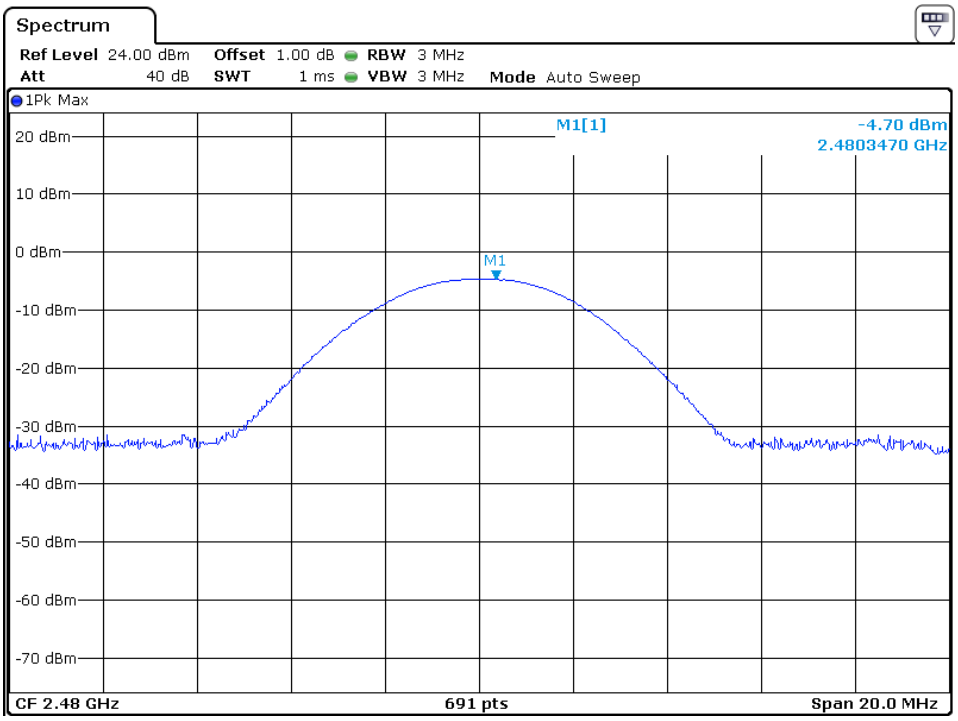

4.3 6dB Bandwidth

Minimum 6dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 KHz according to FCC KDB 558074 D01 v05r02. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.
Packet: DH1

Frequency (MHz)	6 dB Bandwidth (KHz)
2402	687.4
2440	687.4
2480	687.4

Modulation Type: 8DPSK

Low Channel

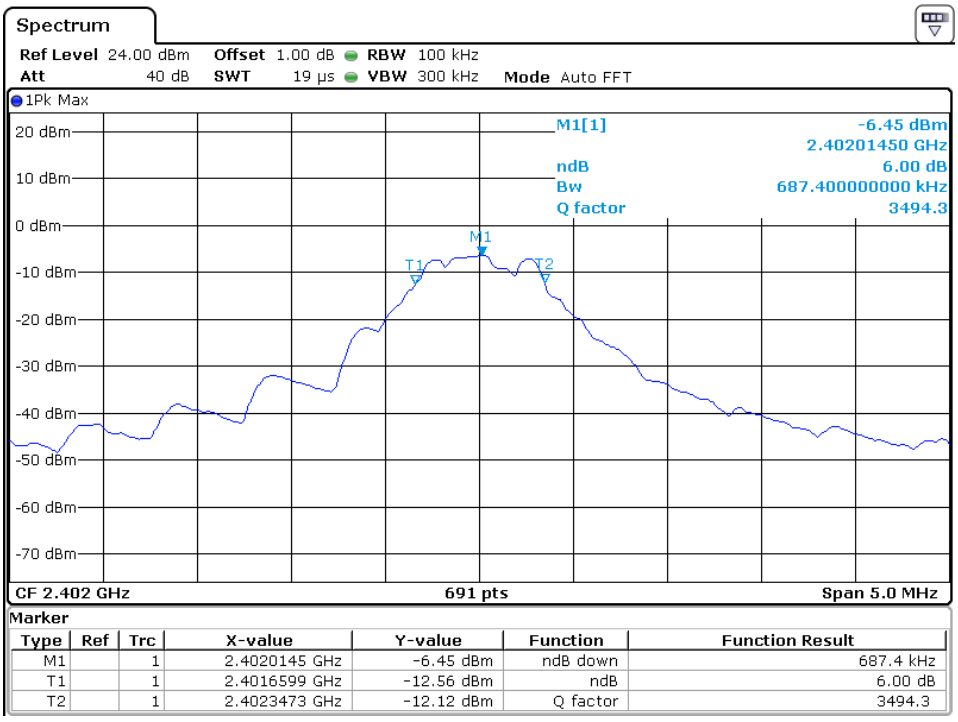

Middle Channel

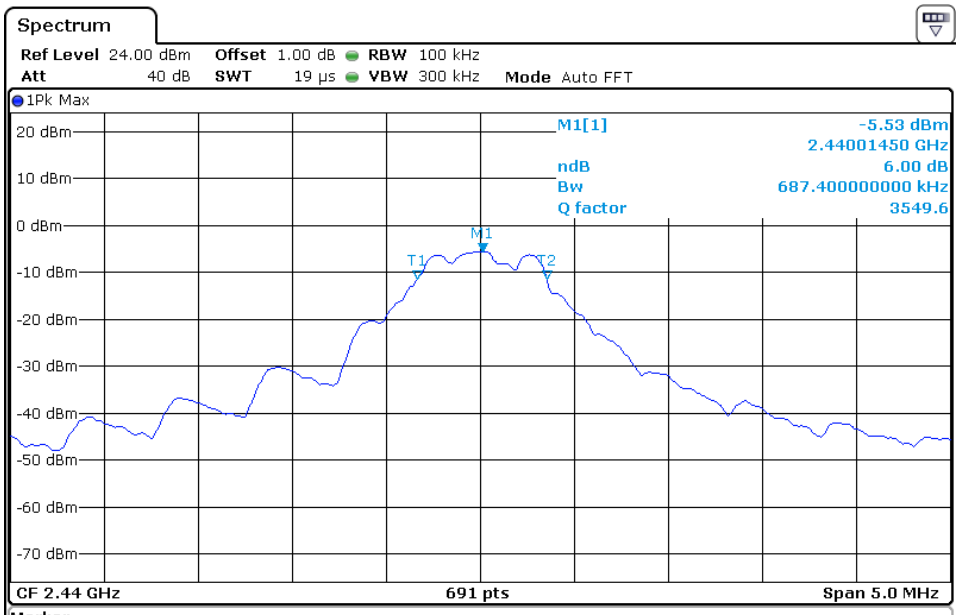

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4400145 GHz	-5.53 dBm	ndB down	687.4 kHz
T1		1	2.4396671 GHz	-11.38 dBm	ndB	6.00 dB
T2		1	2.4403546 GHz	-11.36 dBm	Q factor	3549.6

High Channel

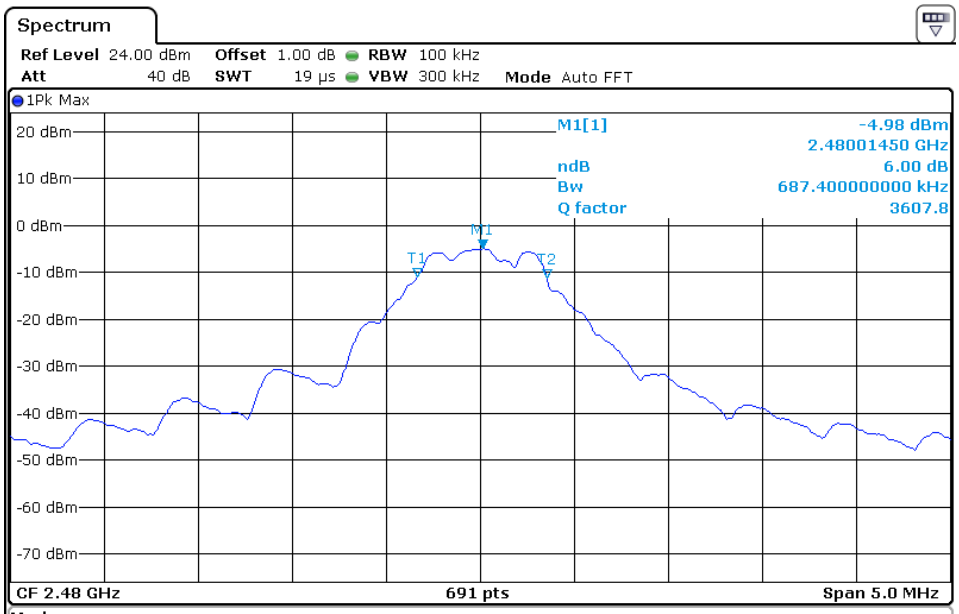

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4800145 GHz	-4.98 dBm	ndB down	687.4 kHz
T1		1	2.4796671 GHz	-10.90 dBm	ndB	6.00 dB
T2		1	2.4803546 GHz	-11.20 dBm	Q factor	3607.8

4.4 Power Density

Maximum Power Density Reading, FCC Rule 15.247(e).

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v05r02.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/ 3 kHz.
Packet: DH1

Frequency (MHz)	Power Density with RBW 100KHz
2402	-6.46
2440	-5.53
2480	-5.01

Low Channel

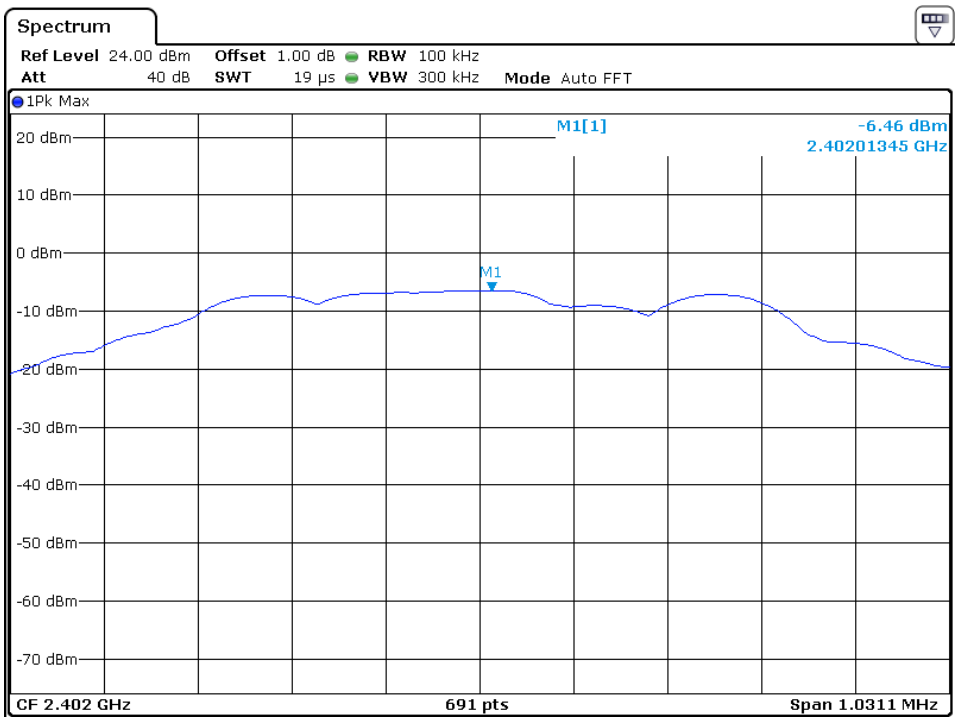

Middle Channel

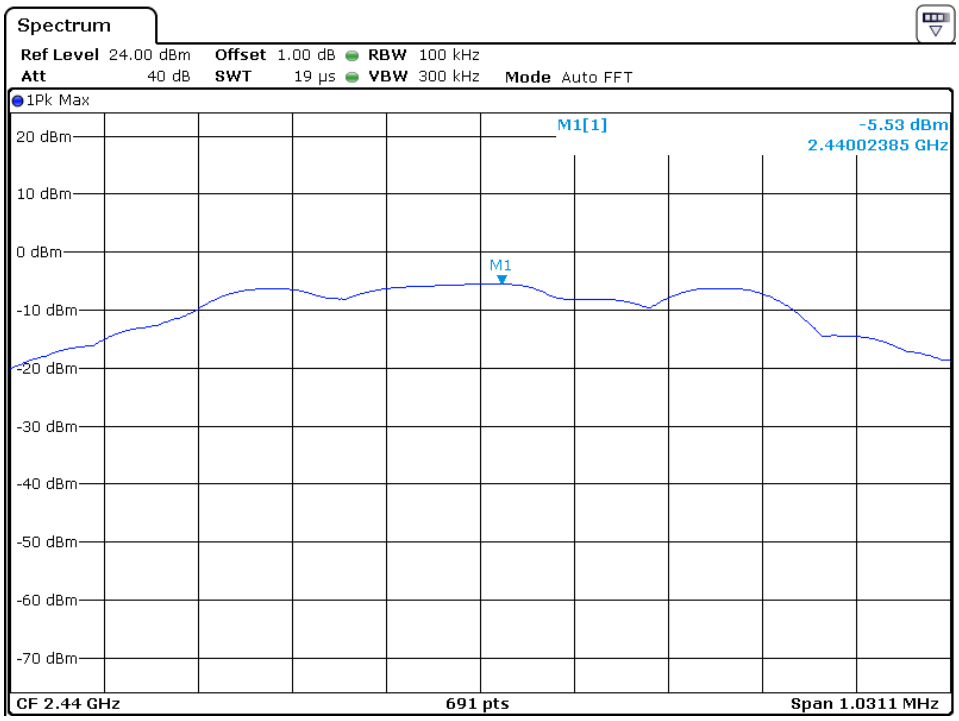

High Channel

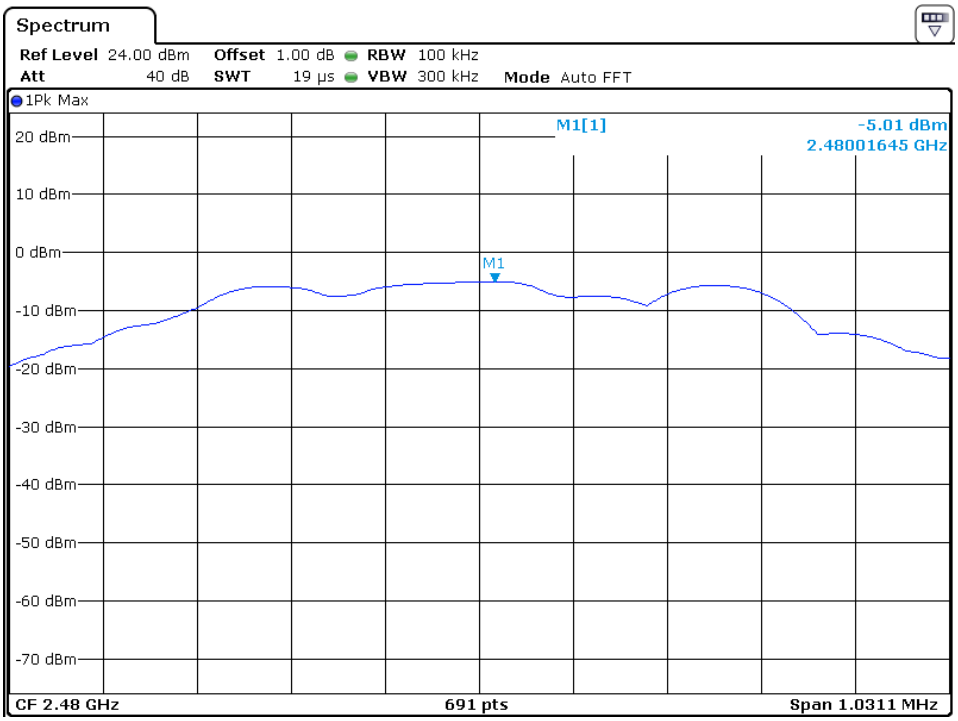

4.5 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05r02.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the attached test plot for out of band conducted emissions data with Packet: DH1

The test plots showed all spurious emission and up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

Low Channel Reference Level: -6.46dBm

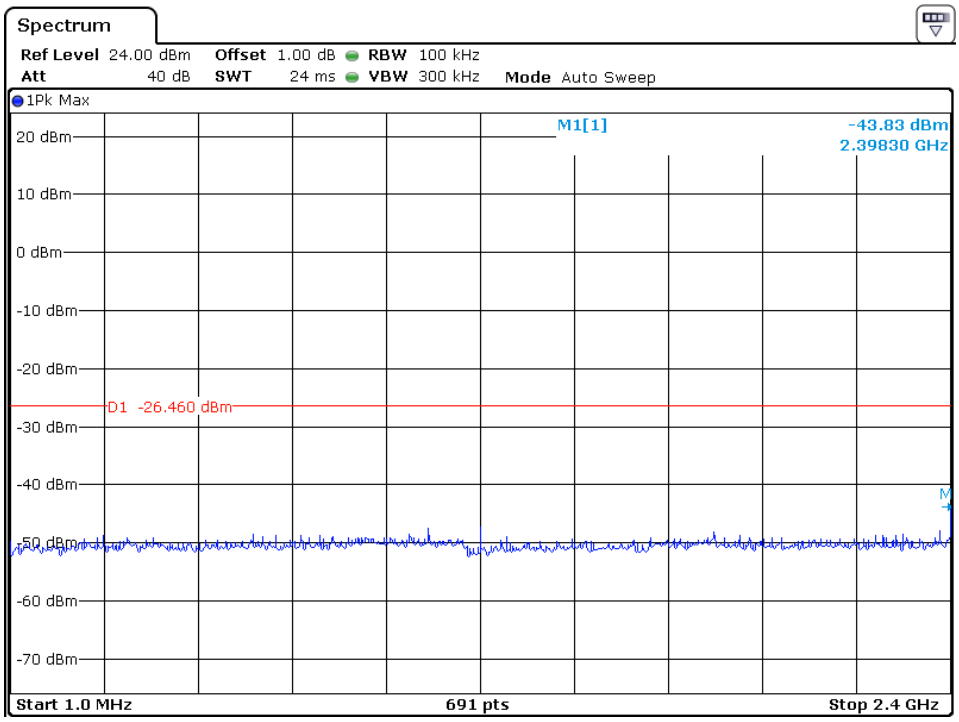

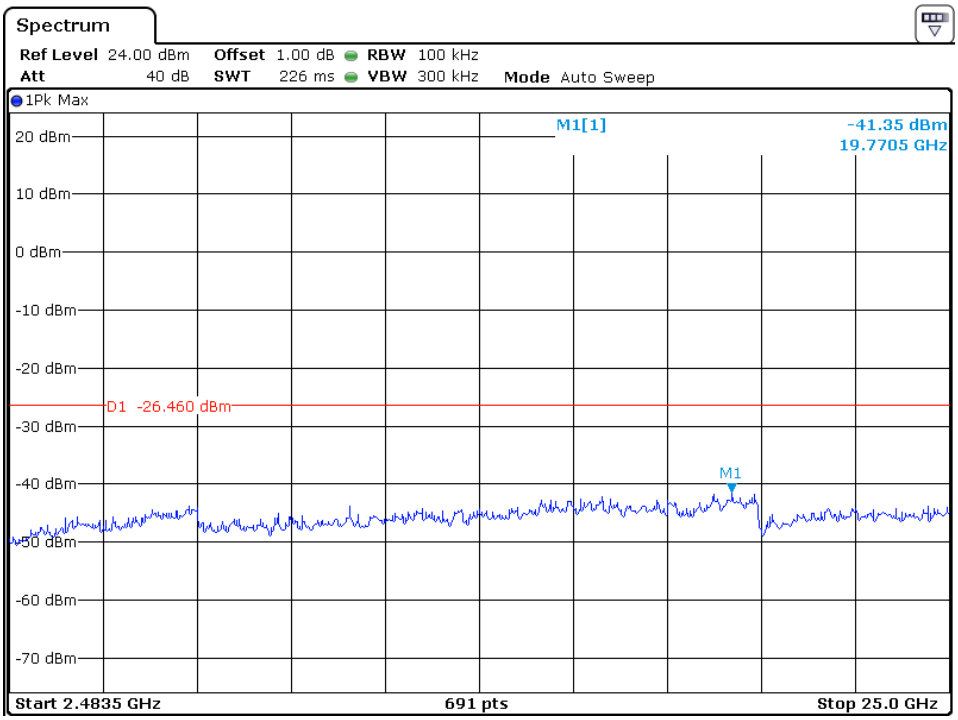
Spectrum
Ref Level 24.00 dBm Offset 1.00 dB RBW 100 kHz
Att 40 dB SWT 226 ms VBW 300 kHz Mode Auto Sweep
1Pk Max
M1[1] -41.35 dBm
19.7705 GHz
20 dBm
10 dBm
0 dBm
-10 dBm
-20 dBm
D1 -26.460 dBm
-30 dBm
-40 dBm
M1
-50 dBm
-60 dBm
-70 dBm
Start 2.4835 GHz
691 pts
Stop 25.0 GHz

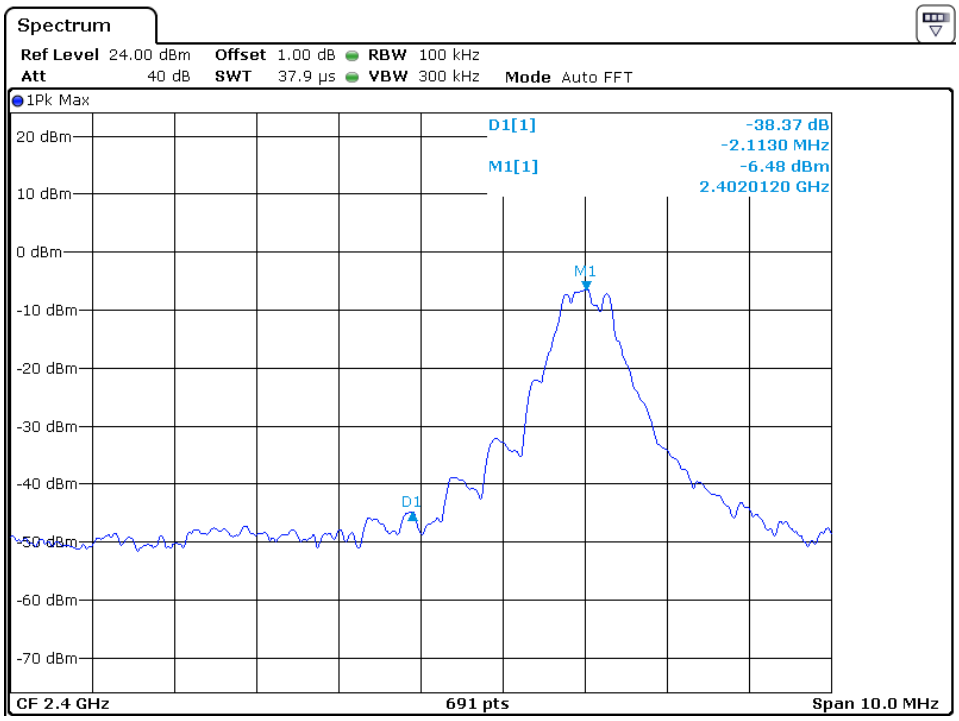
Spectrum
Ref Level 24.00 dBm Offset 1.00 dB RBW 100 kHz
Att 40 dB SWT 37.9 µs VBW 300 kHz Mode Auto FFT
1Pk Max
D1[1] -38.37 dB
-2.1130 MHz
M1[1] -6.48 dBm
2.4020120 GHz
20 dBm
10 dBm
0 dBm
M1
-10 dBm
-20 dBm
-30 dBm
-40 dBm
D1
-50 dBm
-60 dBm
-70 dBm
CF 2.4 GHz
691 pts
Span 10.0 MHz

Middle Channel Reference Level: -5.53dBm

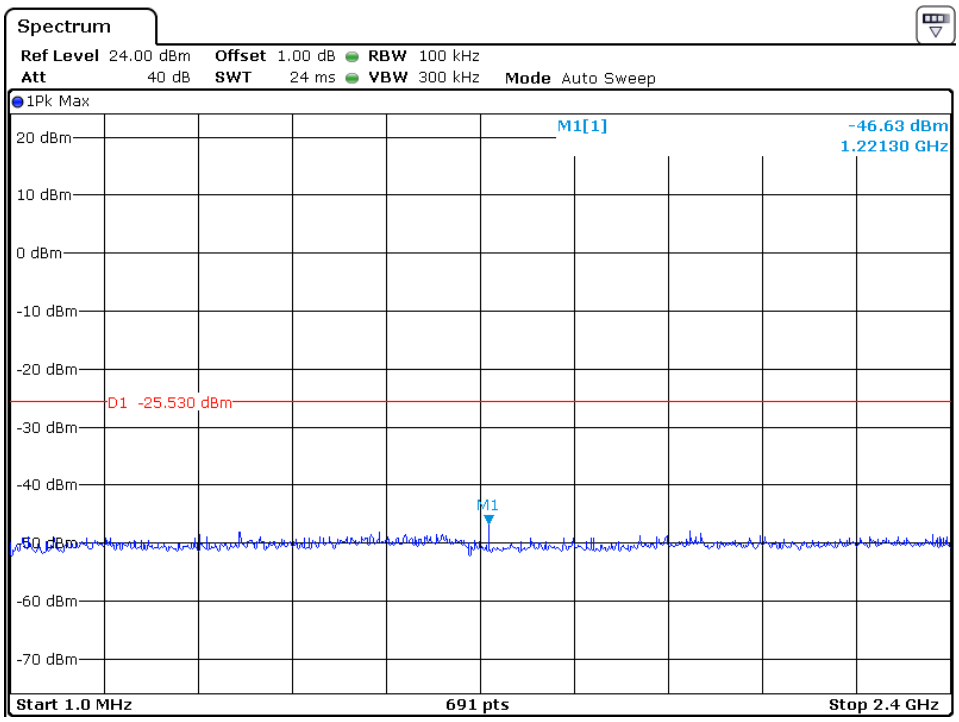

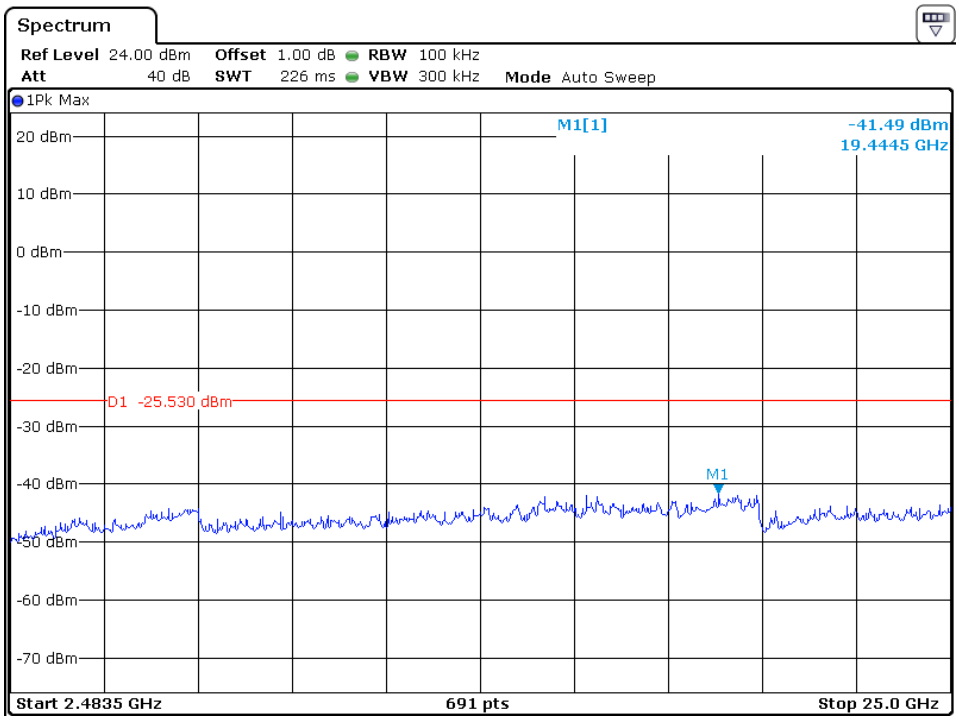

High Channel Reference Level: -5.01dBm

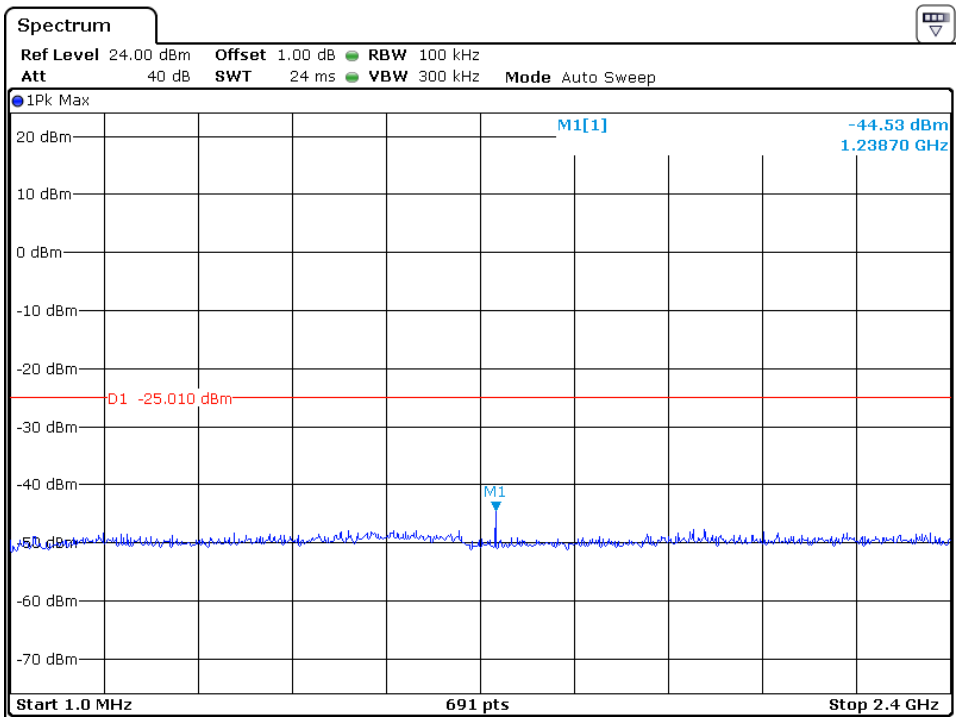

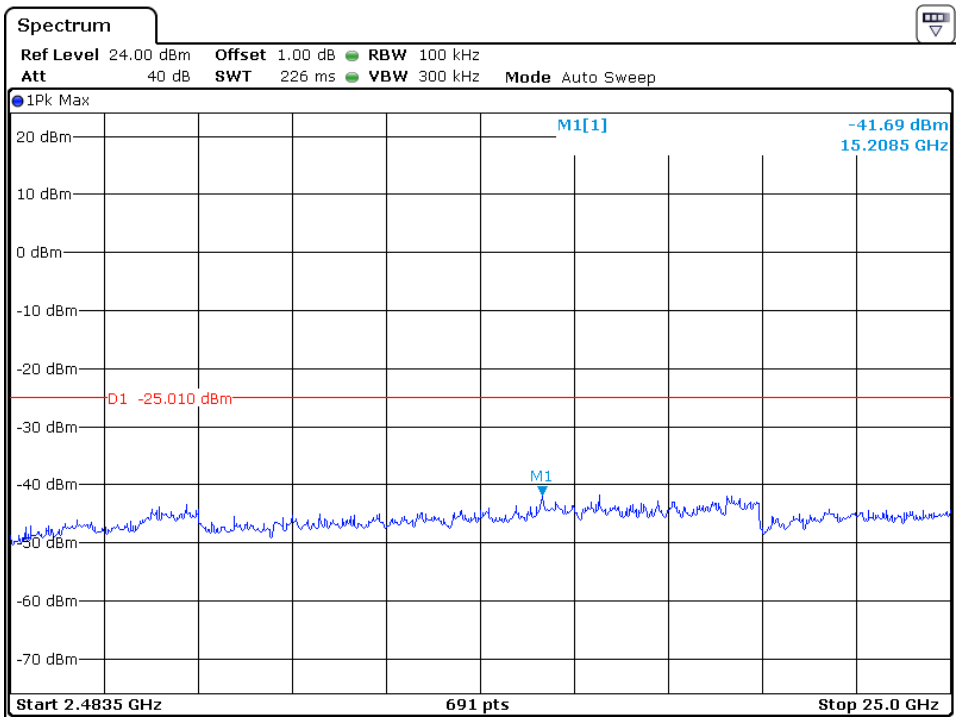

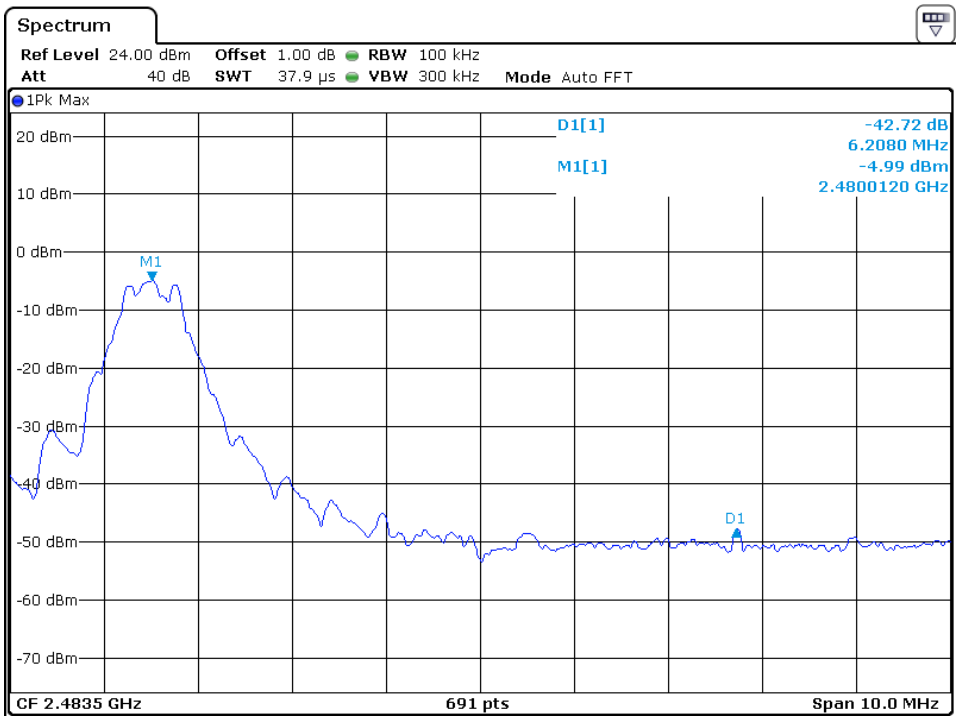
Spectrum
Ref Level 24.00 dBm Offset 1.00 dB RBW 100 kHz
Att 40 dB SWT 37.9 µs VBW 300 kHz Mode Auto FFT
1Pk Max
D1[1] -42.72 dB
6.2080 MHz
M1[1] -4.99 dBm
2.4800120 GHz
20 dBm
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
D1
CF 2.4835 GHz
691 pts
Span 10.0 MHz

4.6 Out of Band Radiated Emissions

Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d).

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

[×] Not required, since all emissions are more than 20dB below fundamental
[ ] See attached data sheet

4.7 Duty Cycle

Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c).

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

9.1 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, Spectrum Analysis ... Pulsed RF.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

9.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.2.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz with RBW 9KHz used.

10 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	28-May-2019	28-May-2020
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	28-May-2019	28-May-2020
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2020
SZ185-01	EMI Receiver	R&S	ESCI	100547	04-Jan-2019	04-Jan-2020
SZ061-08	Horn Antenna	ETS	3115	00092346	24-Aug-2019	24-Aug-2021
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	24-May-2019	24-May-2020
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	28-May-2019	28-May-2020
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	28-May-2019	28-May-2020
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	05-Jul-2019	05-Jul-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIALL	RG 213U	--	10-Jun-2019	10-Jun-2020
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	10-Jun-2019	10-Jun-2020
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	10-Jun-2019	10-Jun-2020
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	05-Jun-2018	05-Jun-2020

********** End of Report**********