Powerworks™

FCC ID:2AAVGHMG1406A
IC:11349A-HMG1406A

C ETL US LISTED
Intertek
2001124

CONFORMS TO UL STD. 60065 CERTIFIED TO CAN/CSA STD. C22.2 NO.60065

CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
ATTENTION
RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
CAUTION CHASSIS SURFACE HOT
ATTENTION SURFERFICE DE CHASSIS CHAUDE

NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

POWERLINK™

IN **OUT**

CHARGING

BATTERY LEVEL

POWER
ON

OFF

AC 120V~60Hz 80W
FUSE: T1A L 250V

MODEL: PW40BATBT

Powerworks™

FCC ID:2AAVGHMG1406A
IC:11349A-HMG1406A

N13839 Z494

CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
ATTENTION
RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
CAUTION CHASSIS SURFACE HOT
ATTENTION SURFERFICE DE CHASSIS CHAUDE

NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Apparatet må tilkoples jordet stikkontakt
Apparaten skall anslutas till jordat uttag
Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan

POWERLINK™

IN **OUT**

CHARGING

BATTERY LEVEL

POWER
ON

OFF

AC 240V~50Hz 80W
FUSE: T630mA L 250V

MODEL: PW40BATBT

名称: PW40BATBT 后面板丝印
丝印颜色: 白色;
底色: 黑色(喷塑颜色).

KUSTOM®

C ETL US LISTED
Intertek
2001124

CONFORMS TO UL STD. 60065 CERTIFIED TO CAN/CSA STD. C22.2 NO.60065

CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
ATTENTION
RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
CAUTION CHASSIS SURFACE HOT
ATTENTION SUPERFICE DE CHASSIS CHAUDE

NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID:2AAVGHMG1406A
IC:11349A-HMG1406A

IN SYNC OUT

CHARGING

BATTERY LEVEL

POWER
ON
OFF

AC 120V∼60Hz 80W
FUSE: T1A L 250V

MODEL:PA40BATBT

KUSTOM®

N13839 Z494

CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
ATTENTION
RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
CAUTION CHASSIS SURFACE HOT
ATTENTION SUPERFICE DE CHASSIS CHAUDE

NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Apparatet må tilkoples jordet stikkontakt
Apparaten skall anslutas till jordat uttag
Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan

IN SYNC OUT

CHARGING

BATTERY LEVEL

POWER
ON
OFF

AC 240V∼50Hz 80W
FUSE: T630mA L 250V

MODEL:PA40BATBT

名称: PA40BATBT后面板丝印
丝印颜色: 白色;
底色: 黑色(喷塑颜色).
后面板尺寸: 同PW40BATBT后面板

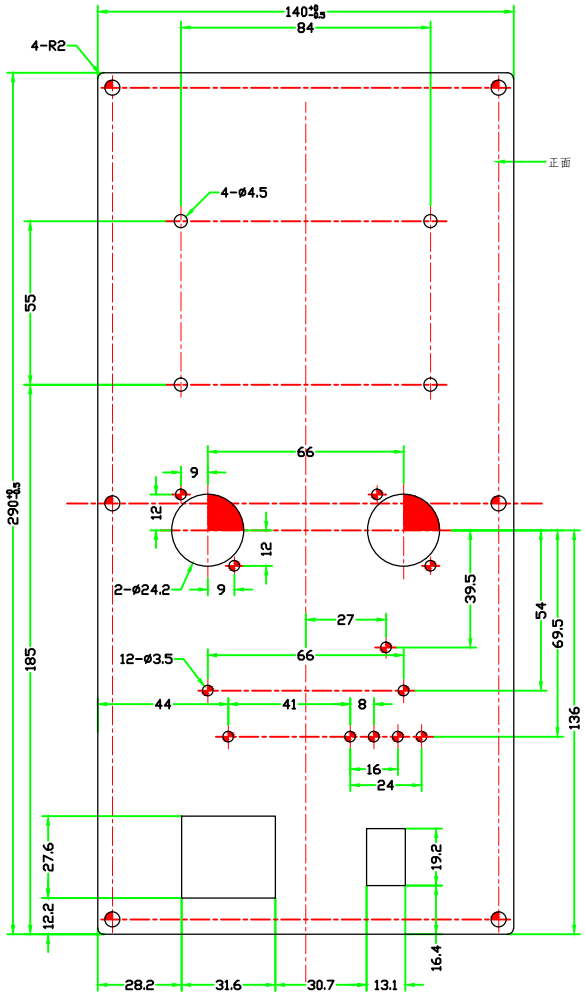



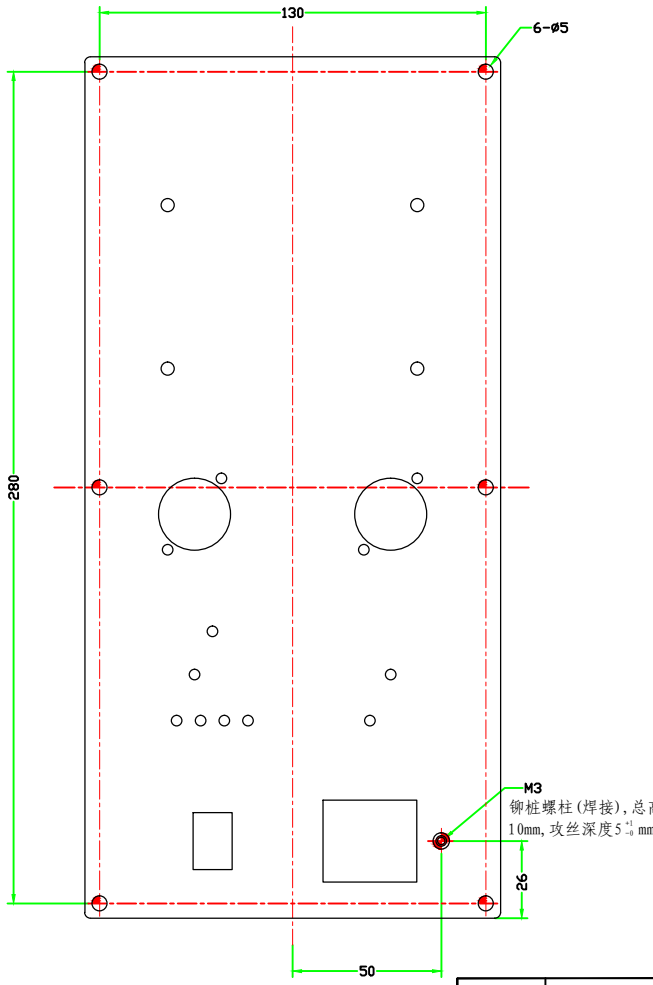

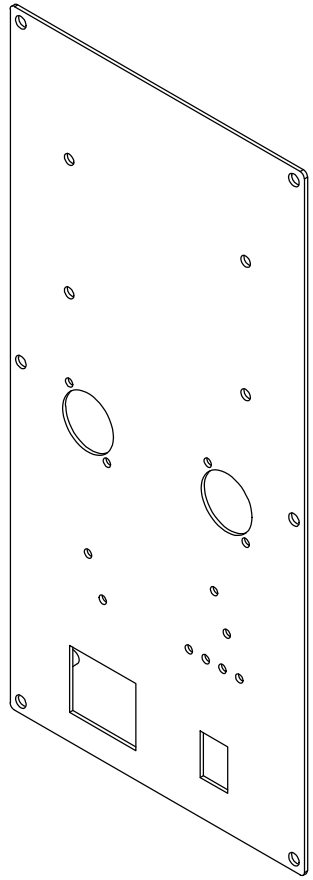

技术要求:

1、整体平整不得扭曲;
2、毛刺不大于0.1mm,不允许刮手;
3、工艺圆角R0.5mm;
4、喷塑表面要均匀、无杂质;
5、正面丝印,丝印内容另附电子文档;
5、未注公差按 ±0.1mm 执行。

镀涂	内外表面喷黑塑,但是铆桩端面及螺纹孔内不允许喷塑

更改标记	数量	更改单号	签名	日期
设计	张亚林	2013-11-01		
审核				
工 艺				
标准化				
批 准				

PW40BATBT
后面板

等级标记	质 量	比 例

第 张	共 张

材料:镀锌板,厚度为1.5mm

杭州柯斯顿音响有限公司

旧底图总号	
底图总号	
日期	签名

格式( )　　制图:　　描图:　　幅面: