



Intertek
2001124

CONFORMS TO
UL STD. 60065
CERTIFIED TO
CAN/CSA STD.
C22.2 NO.60065

FCC ID: 2AAVGHMG1410A IC: 11349A-HMG1410A



CAUTION ATTENTION
RISQUE DE CHOC ELECTRIQUE PAS OUVRIR

CAUTION ATTENTION
CHASSIS SURFACE HOT SUPERFICE DE CHASSIS CHAUDE

NO USER SERVICEABLE PARTS

This device complies with Part 15 of the
FCC Rules. Operation is subject to the
following two conditions: (1) this device
may not cause harmful interference, and
(2) this device must accept any interfer-
ence received, including interference that
may cause undesired operation.



CAUTION ATTENTION
RISQUE DE CHOC ELECTRIQUE PAS OUVRIR


CAUTION ATTENTION
CHASSIS SURFACE HOT SUPERFICE DE CHASSIS CHAUDE

NO USER SERVICEABLE PARTS


Apparatet må tilkoples jordat stikkontakt
Apparaten skall anslutas till jordat uttag
Laita on liitettävä suojakoskettimilla varustettuun pistorasiaan





PW150TFXBT

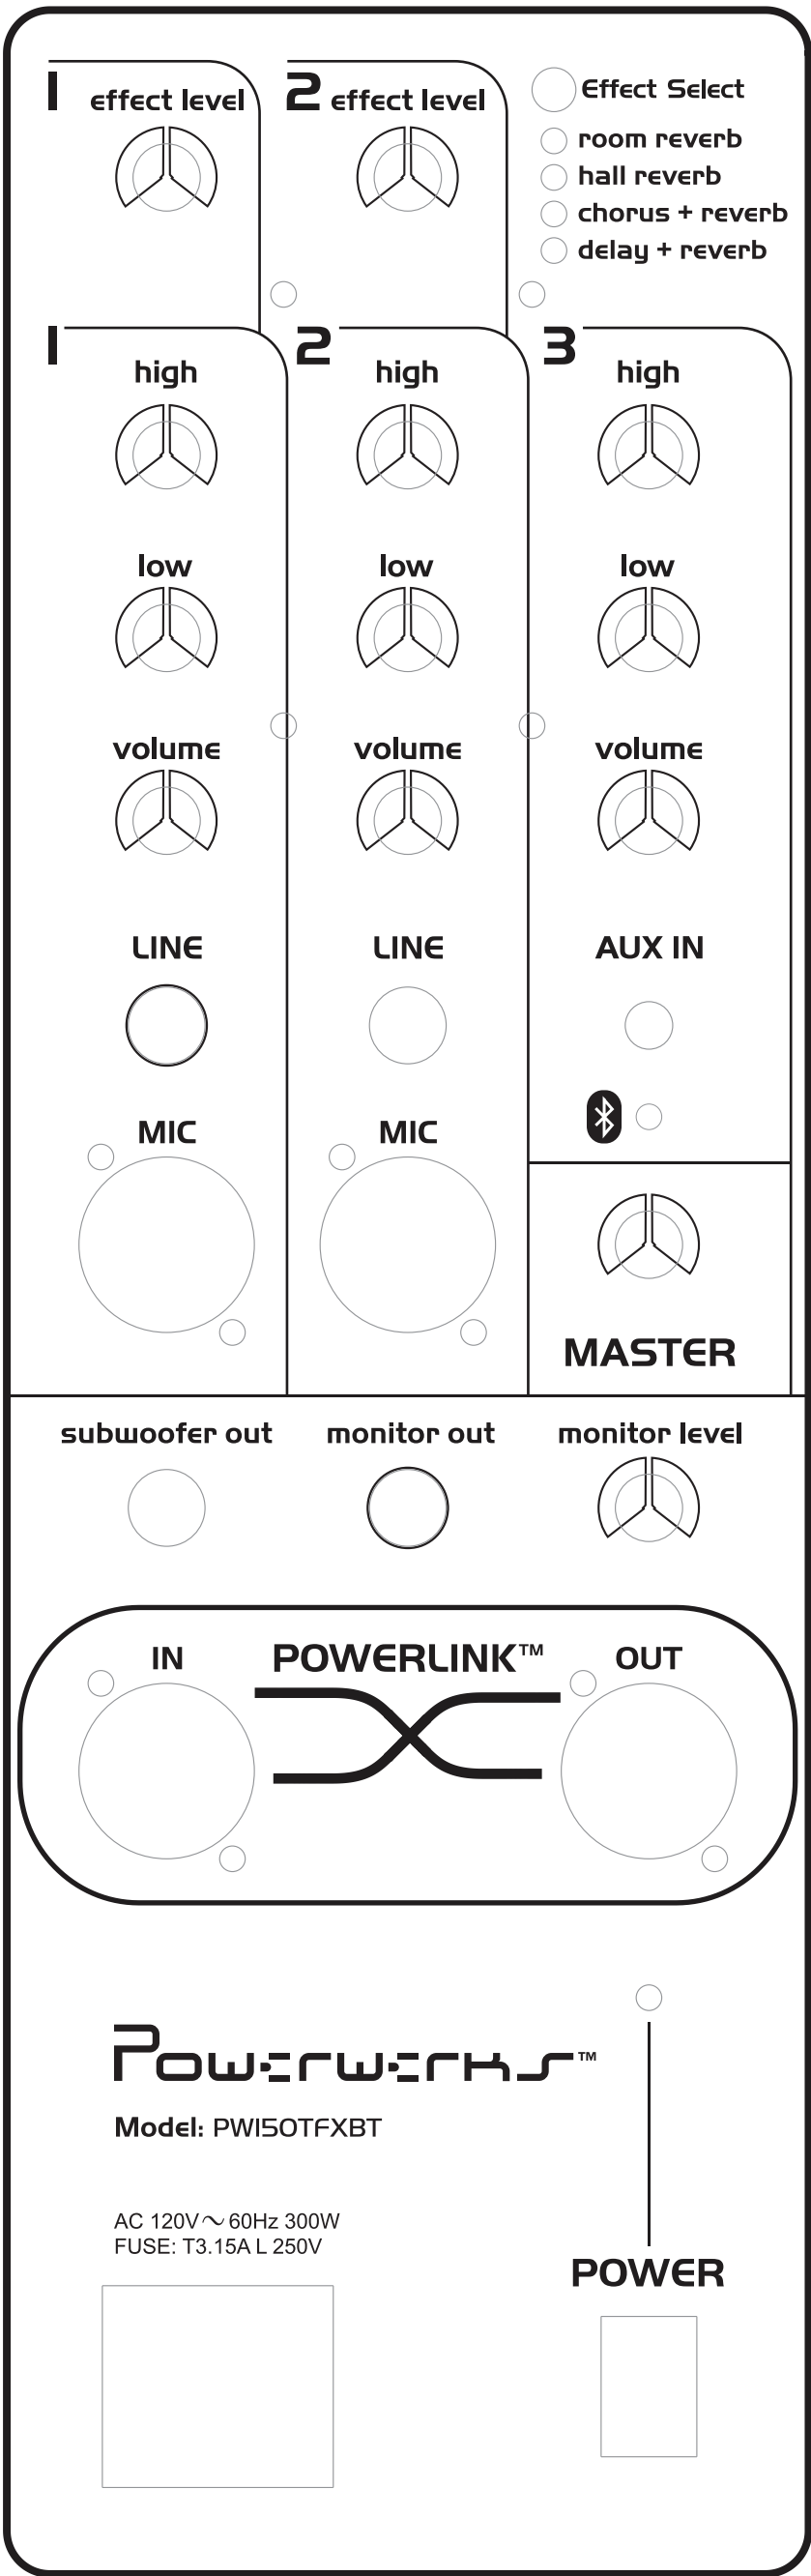



PW150TFXBT

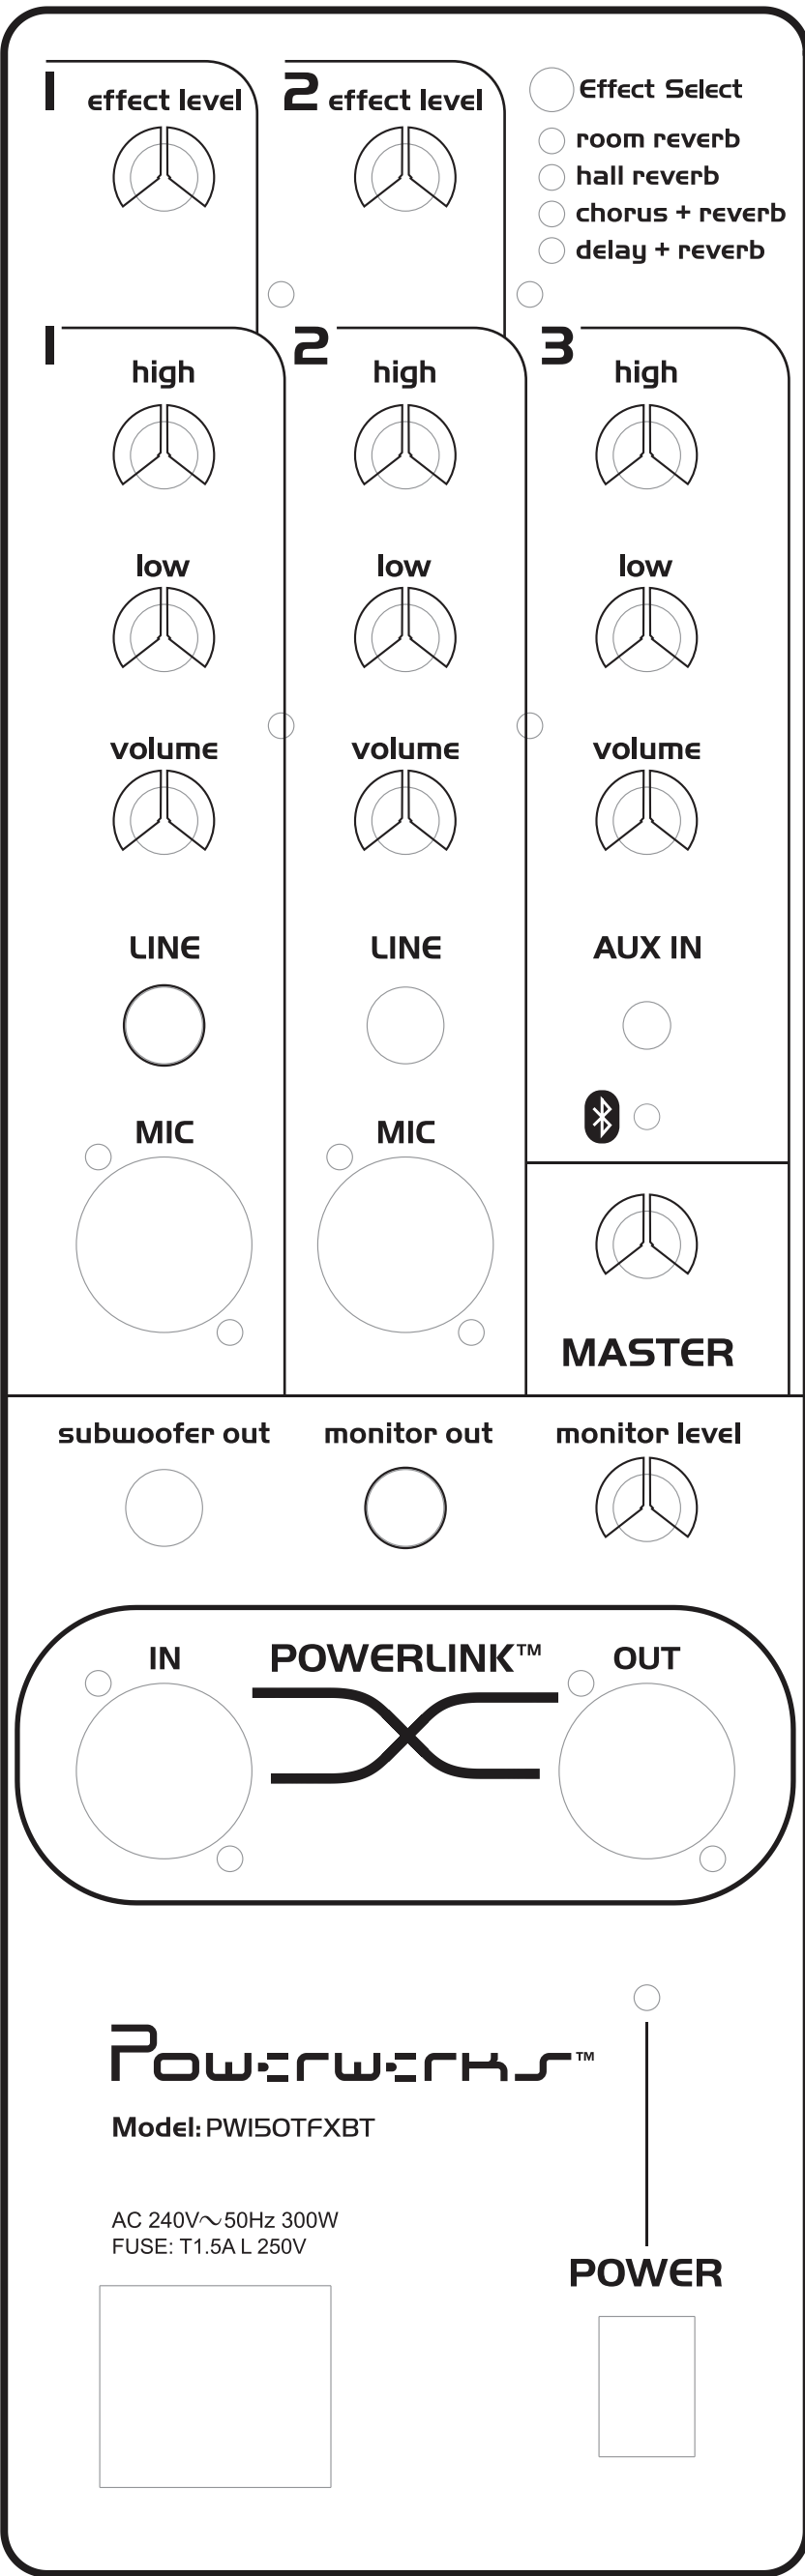

名称: PW150TFXBT输入面板丝印
丝印颜色: 白色;
底色: 黑色(喷塑)。

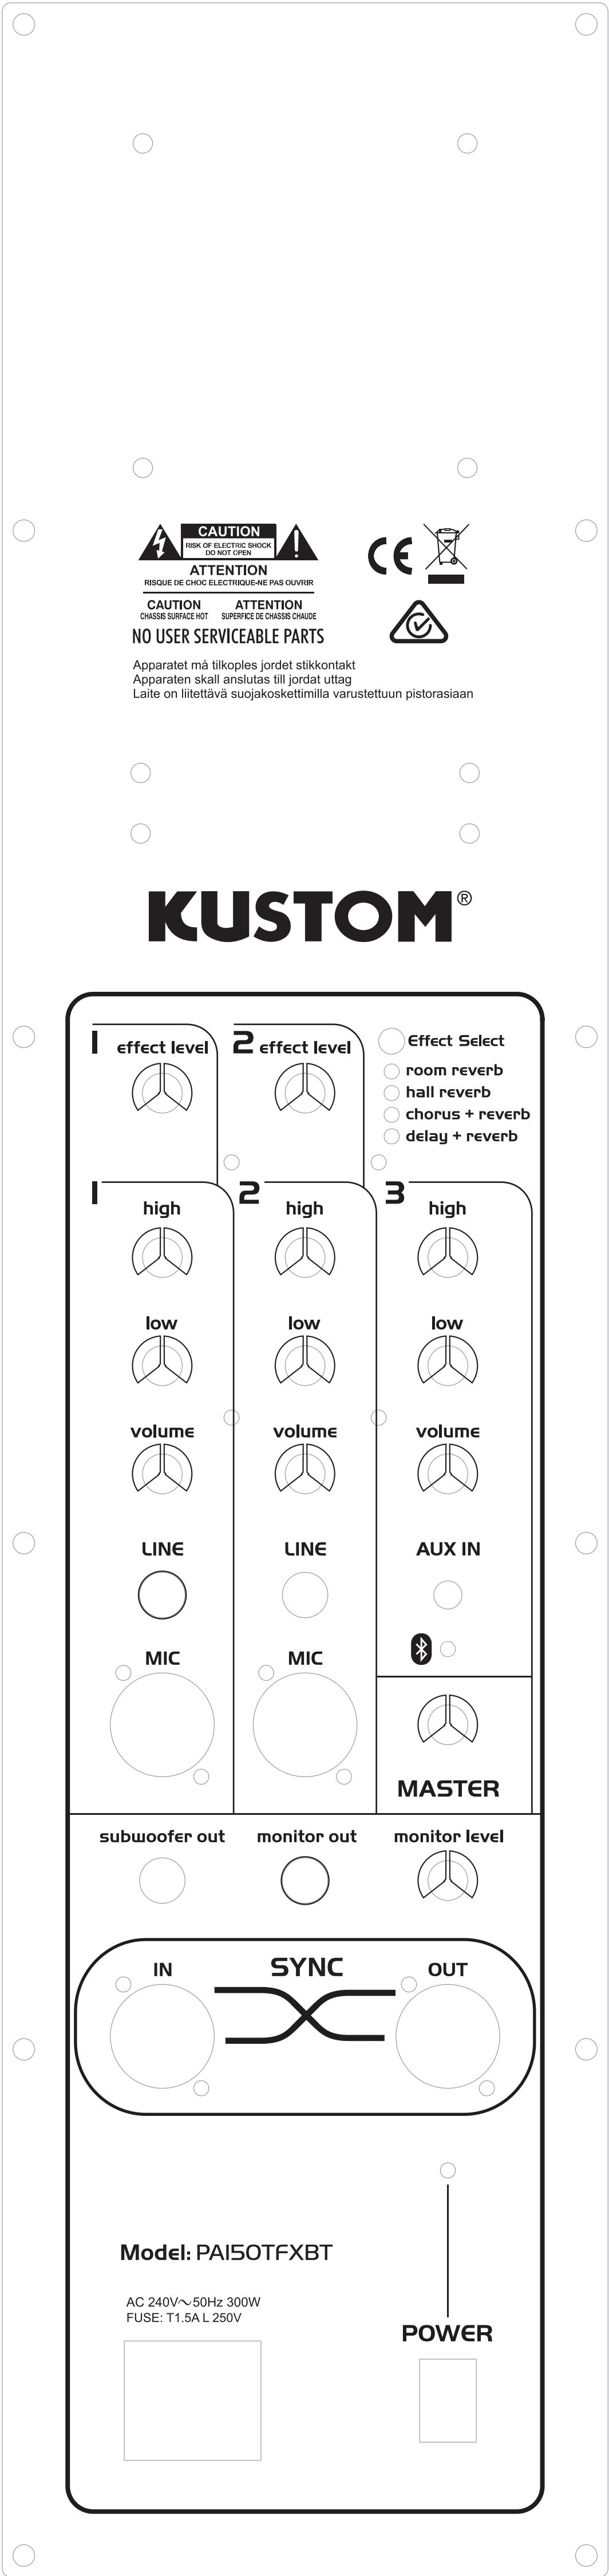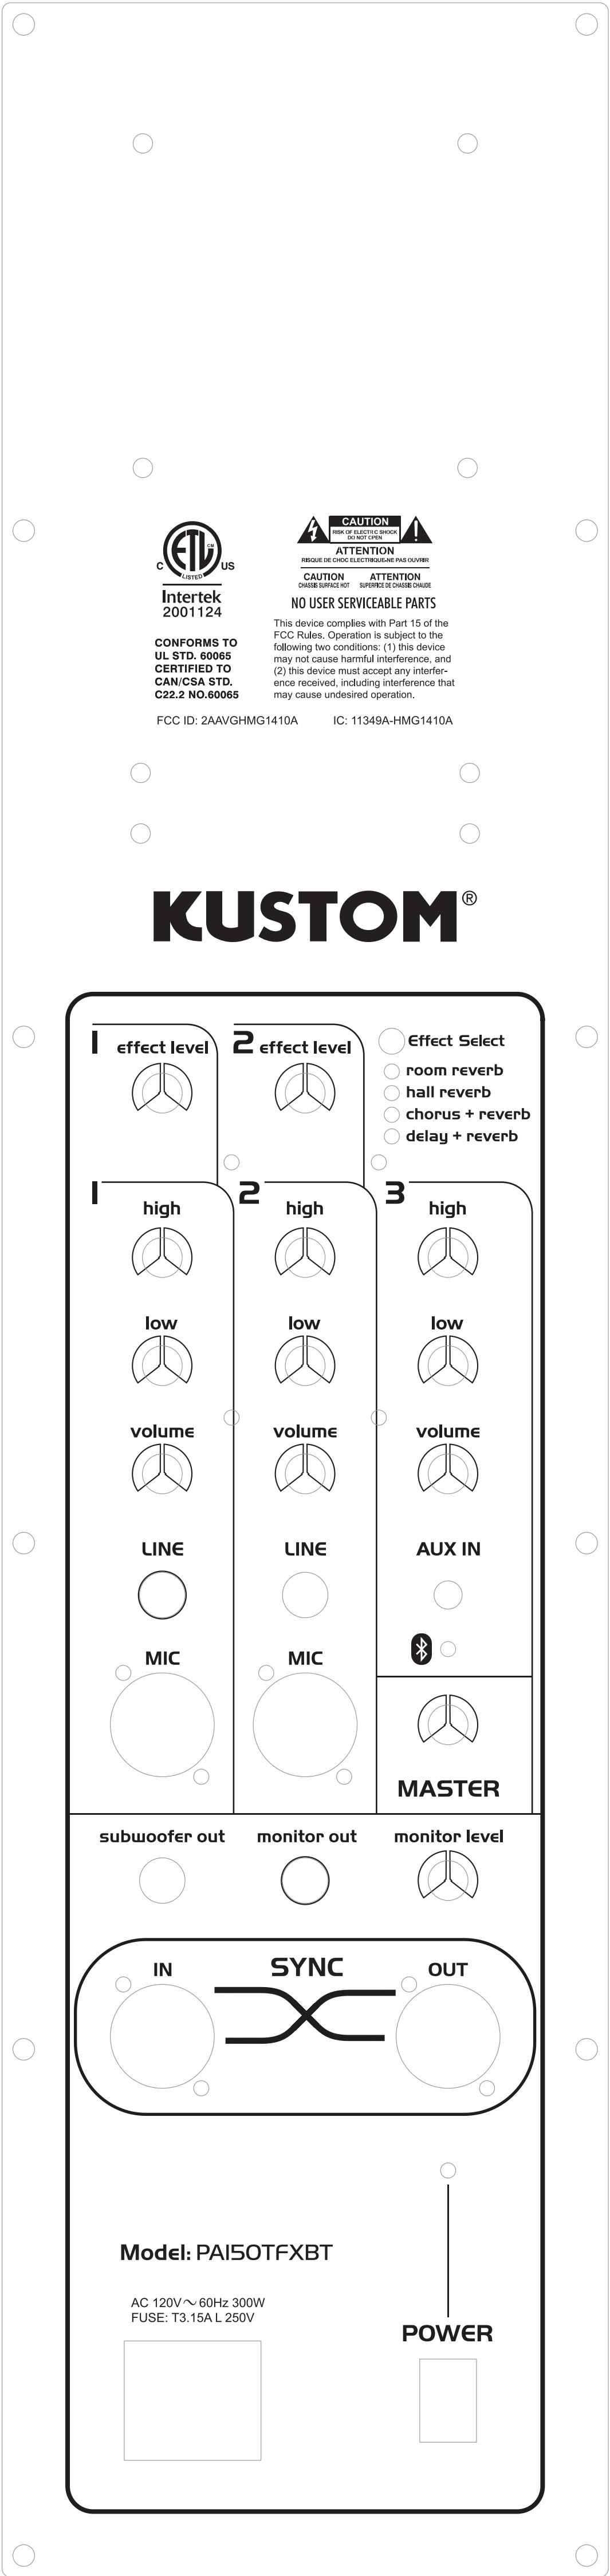

名称: PA150TFXBT输入面板丝印
丝印颜色: 白色;
底色: 黑色(喷塑)。
输入面板尺寸: 同PW150TFXBT输入面板

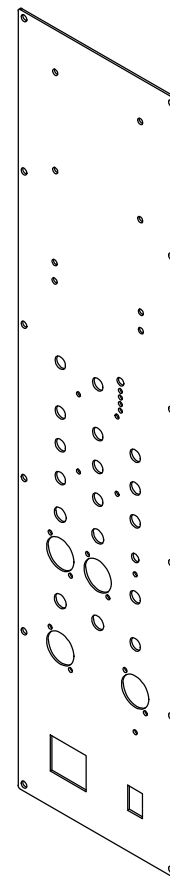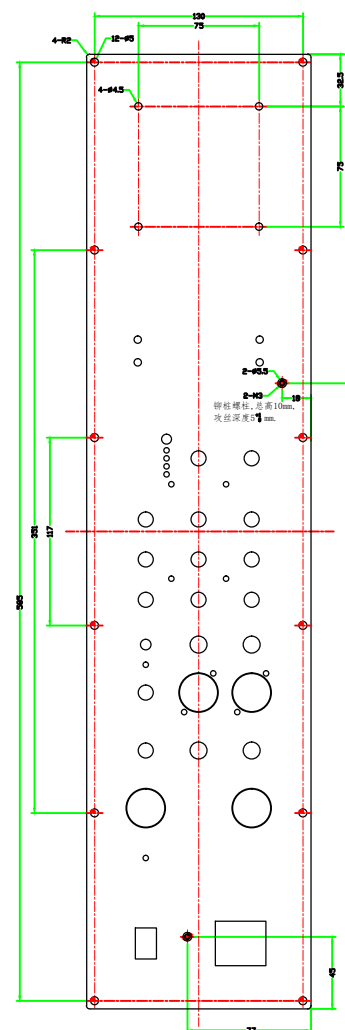

内外表面喷塑(颜色及效果见丝印文件),但是铁壳反面4- $\phi 10.5\text{mm}$ 孔周围 $\phi 20\text{mm}$ 范围内不喷塑,铆桩端面及螺纹孔内不允许喷塑

月	PW150TFXBT/PA150TFXBT
7	输入面板

等级标记	质 量	比 例
------	-----	-----

第	张	共	张
---	---	---	---

材料:镀锌板, 厚度为1.5mm

杭州柯斯顿音响有限公司

- 1、整体平整不得扭曲;
- 2、毛刺不大于0.1mm,不允许刮手;
- 3、工艺圆角R0.5mm;
- 4、喷塑表面要均匀、无杂质;
- 5、正面丝印,丝印内容另附电子文档;
- 6、未注公差按 $\pm 0.1\text{mm}$ 执行。

更改标记	数量	更改单号	签名	日期
设计		张亚林	2013-11-27	
审核				
工艺				
标准化				
批准				

格式 ()

制图:

描图:

幅面: