





FCC ID: 2AAVGHMG1616A
IC: 11349A-HMG1616A

Label





FCC ID: 2AAVGHMG1616A
IC: 11349A-HMG1616A

Silkscreened on the EUT

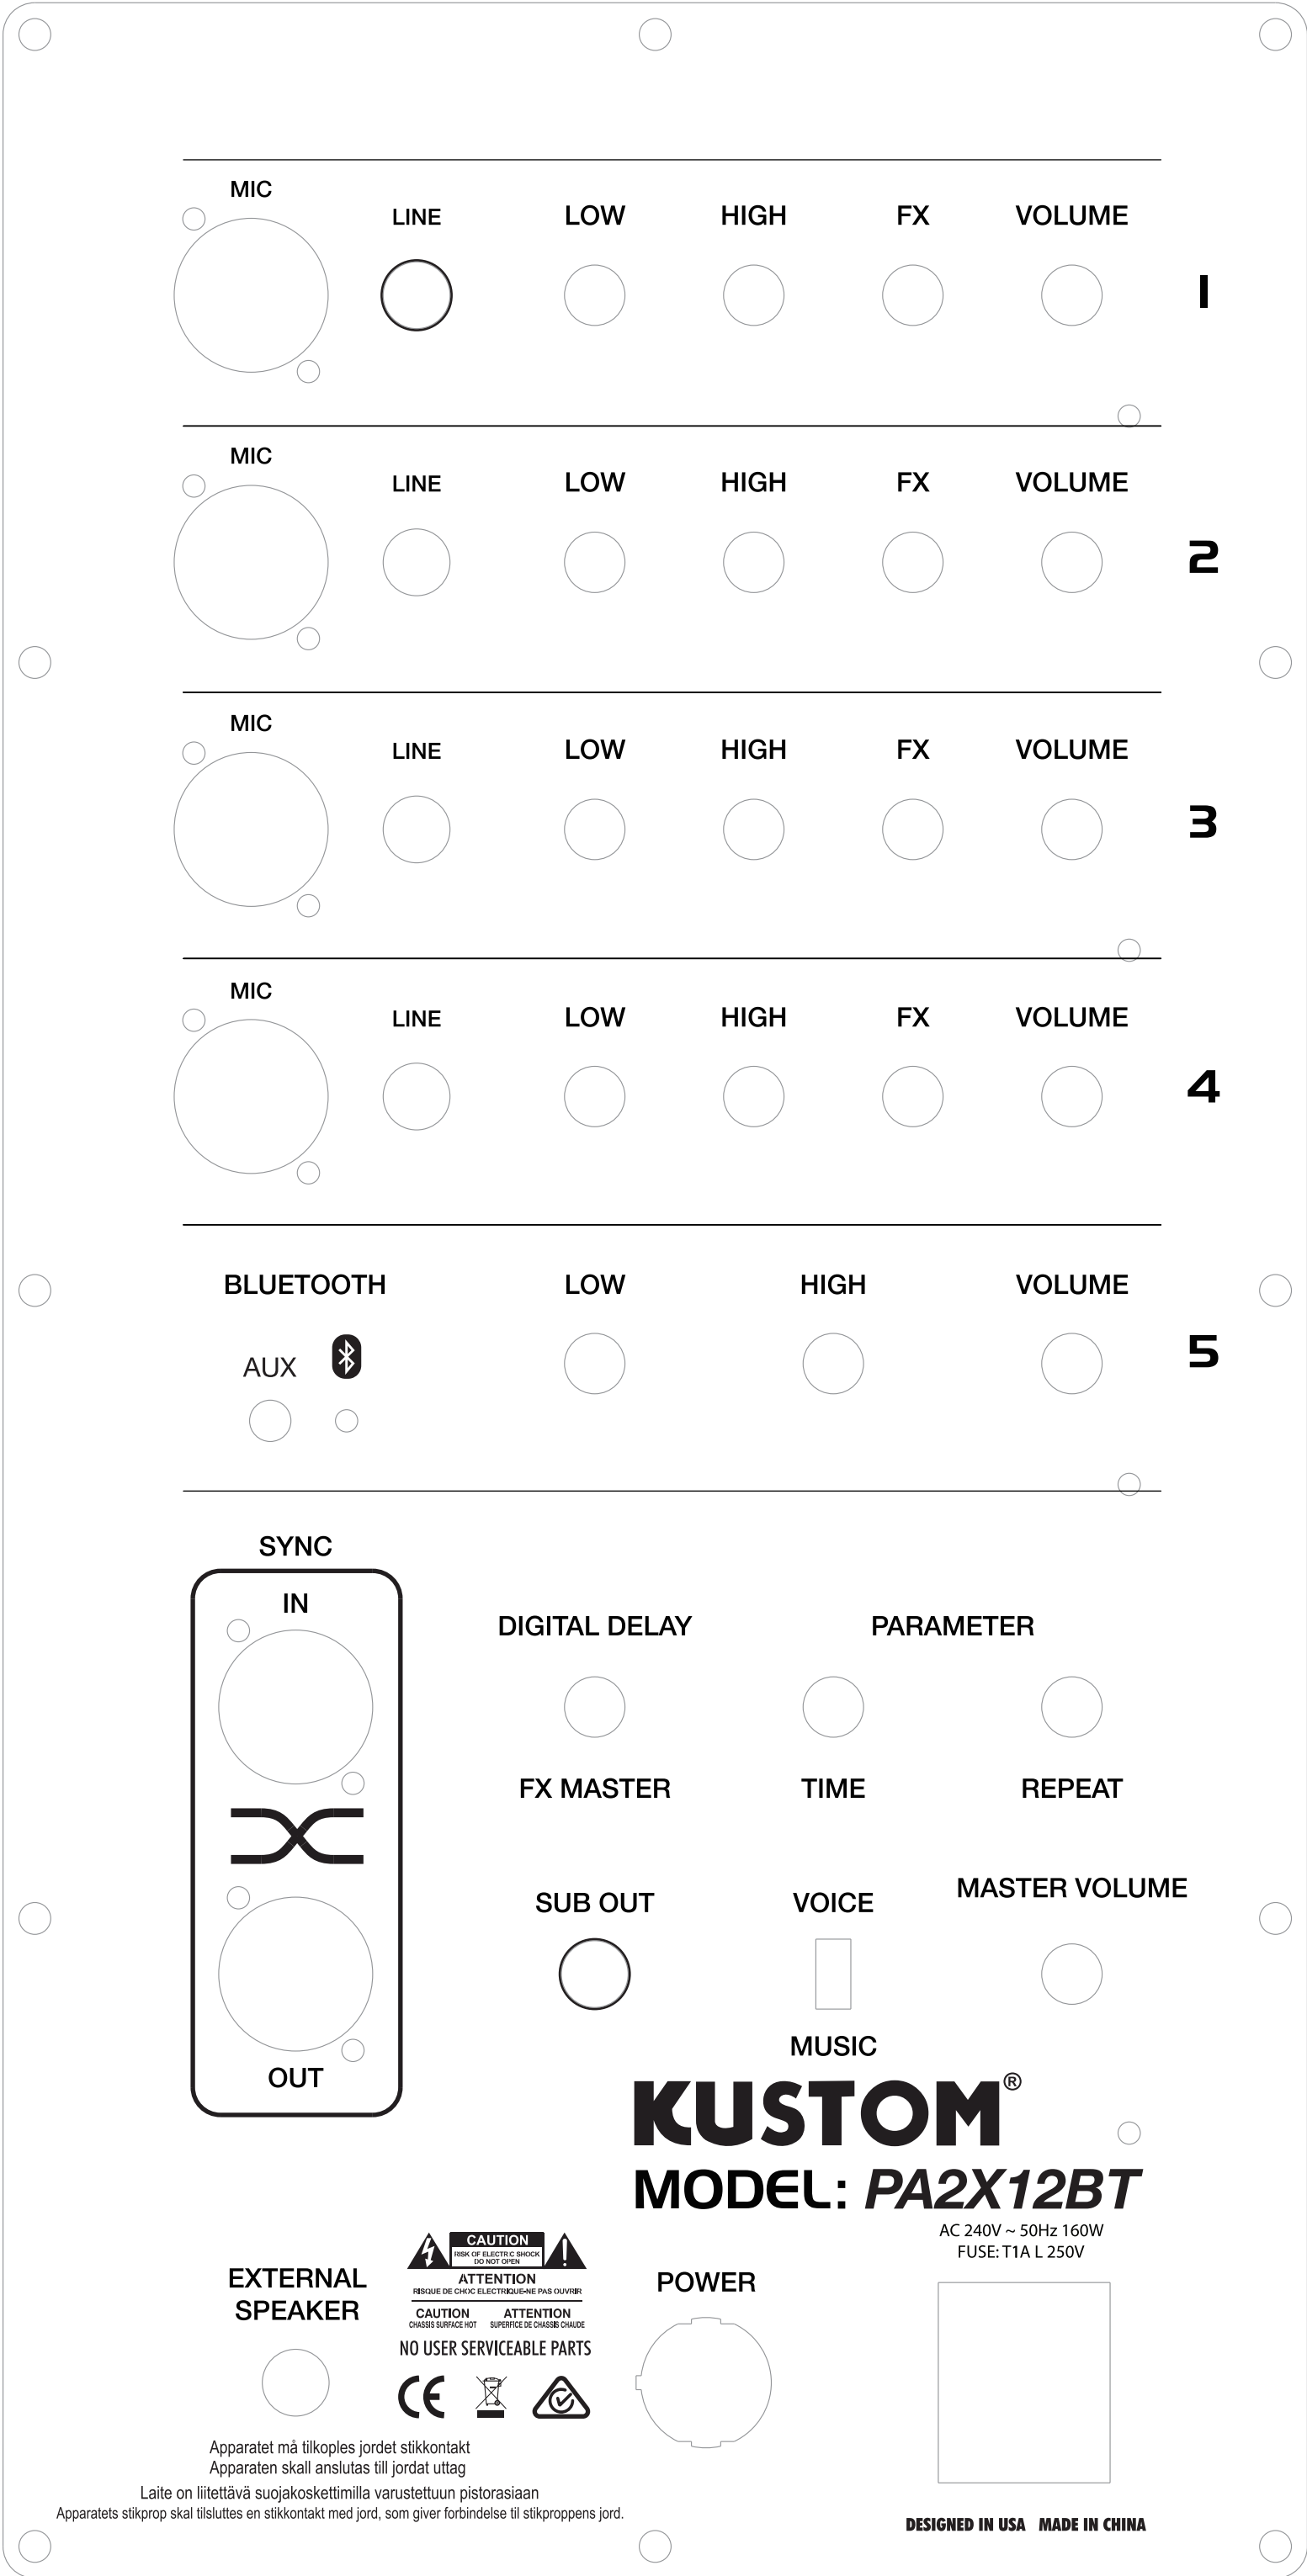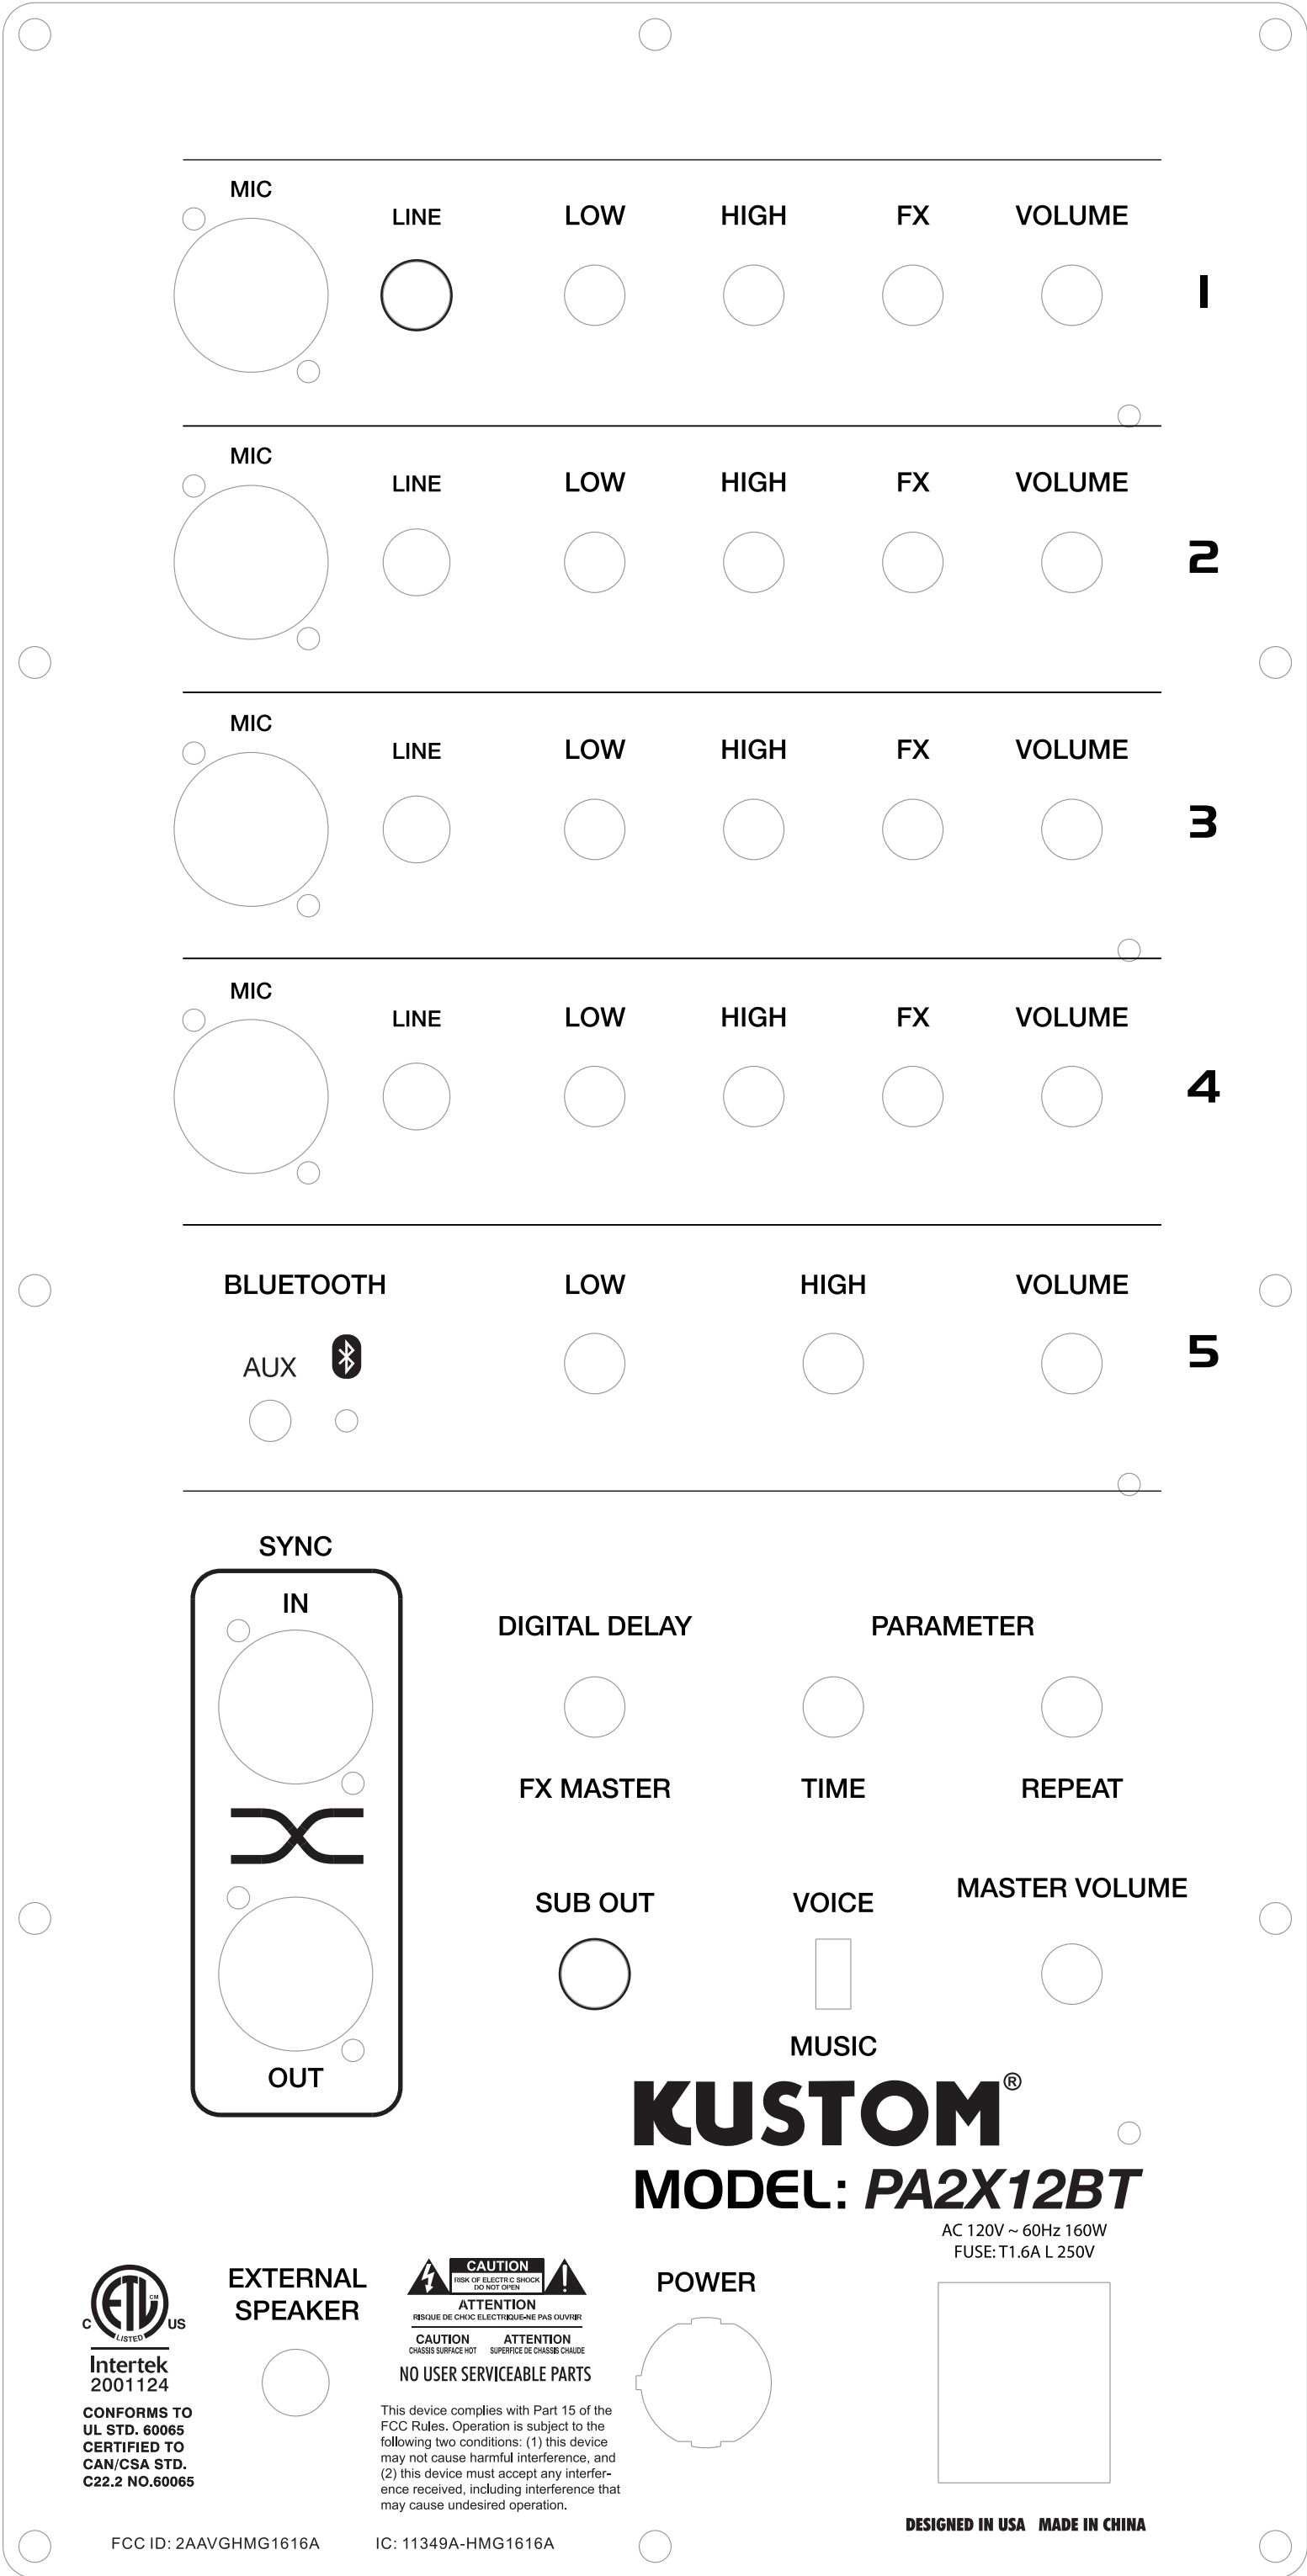

图号：
名称：PA2X12BT输入面板丝印
尺寸：同PA2X10BT输入面板
表面处理：喷塑,黑色；
丝印颜色：白色。

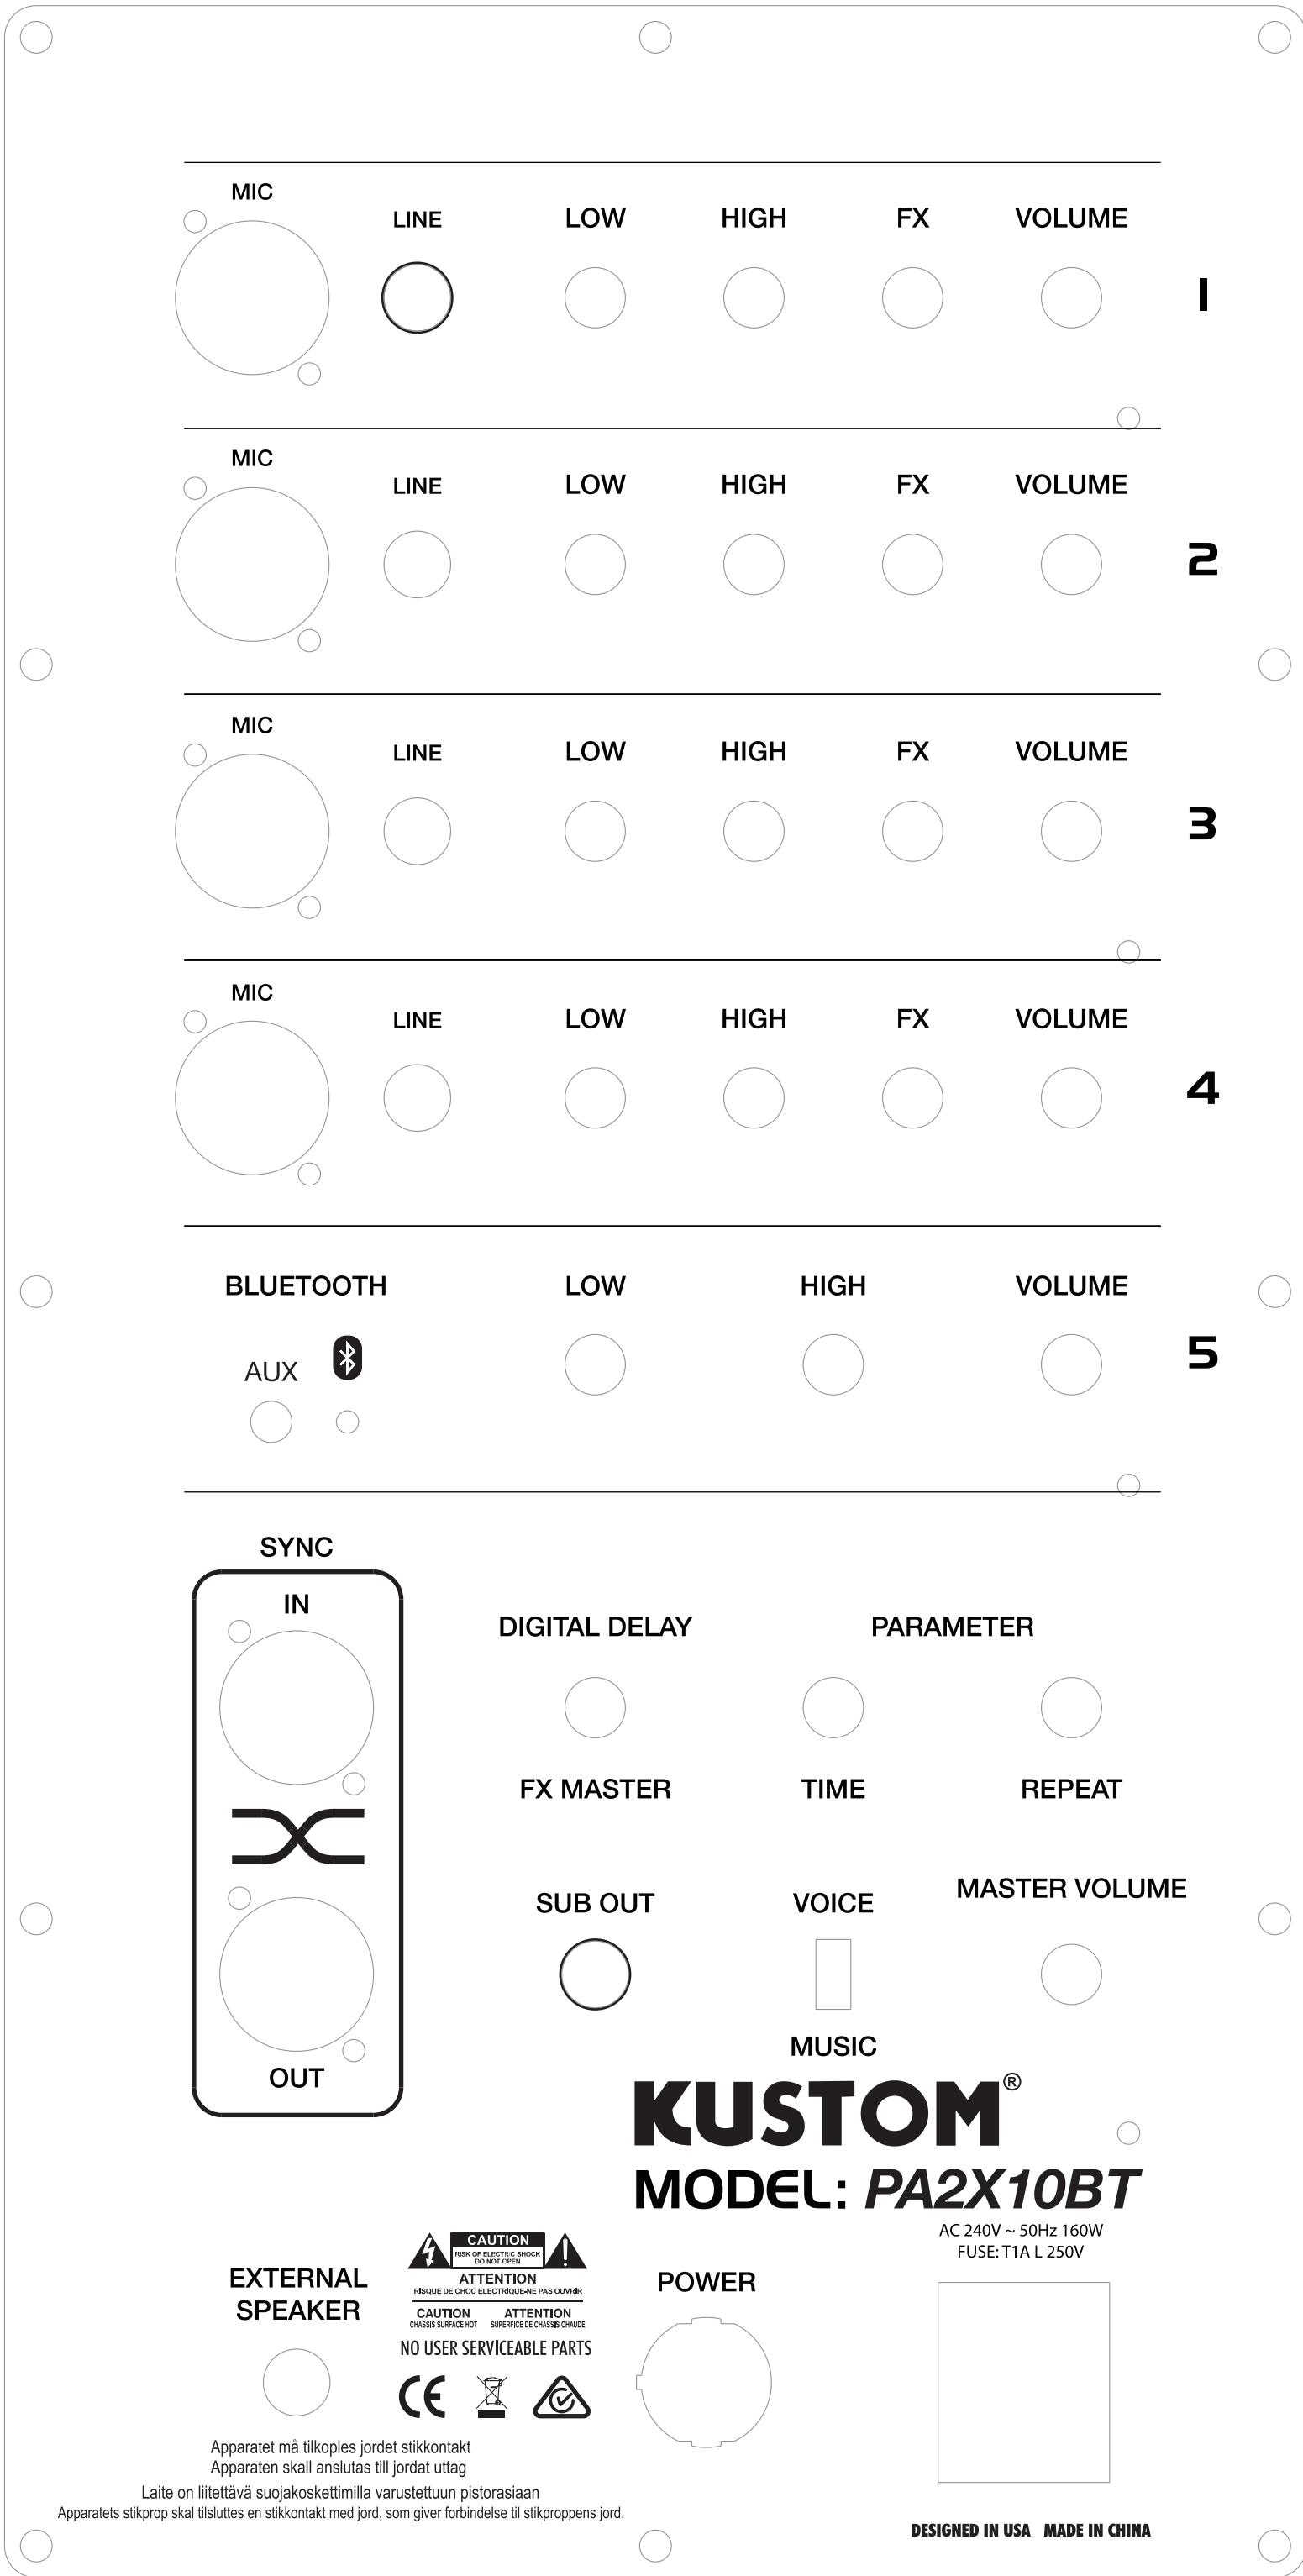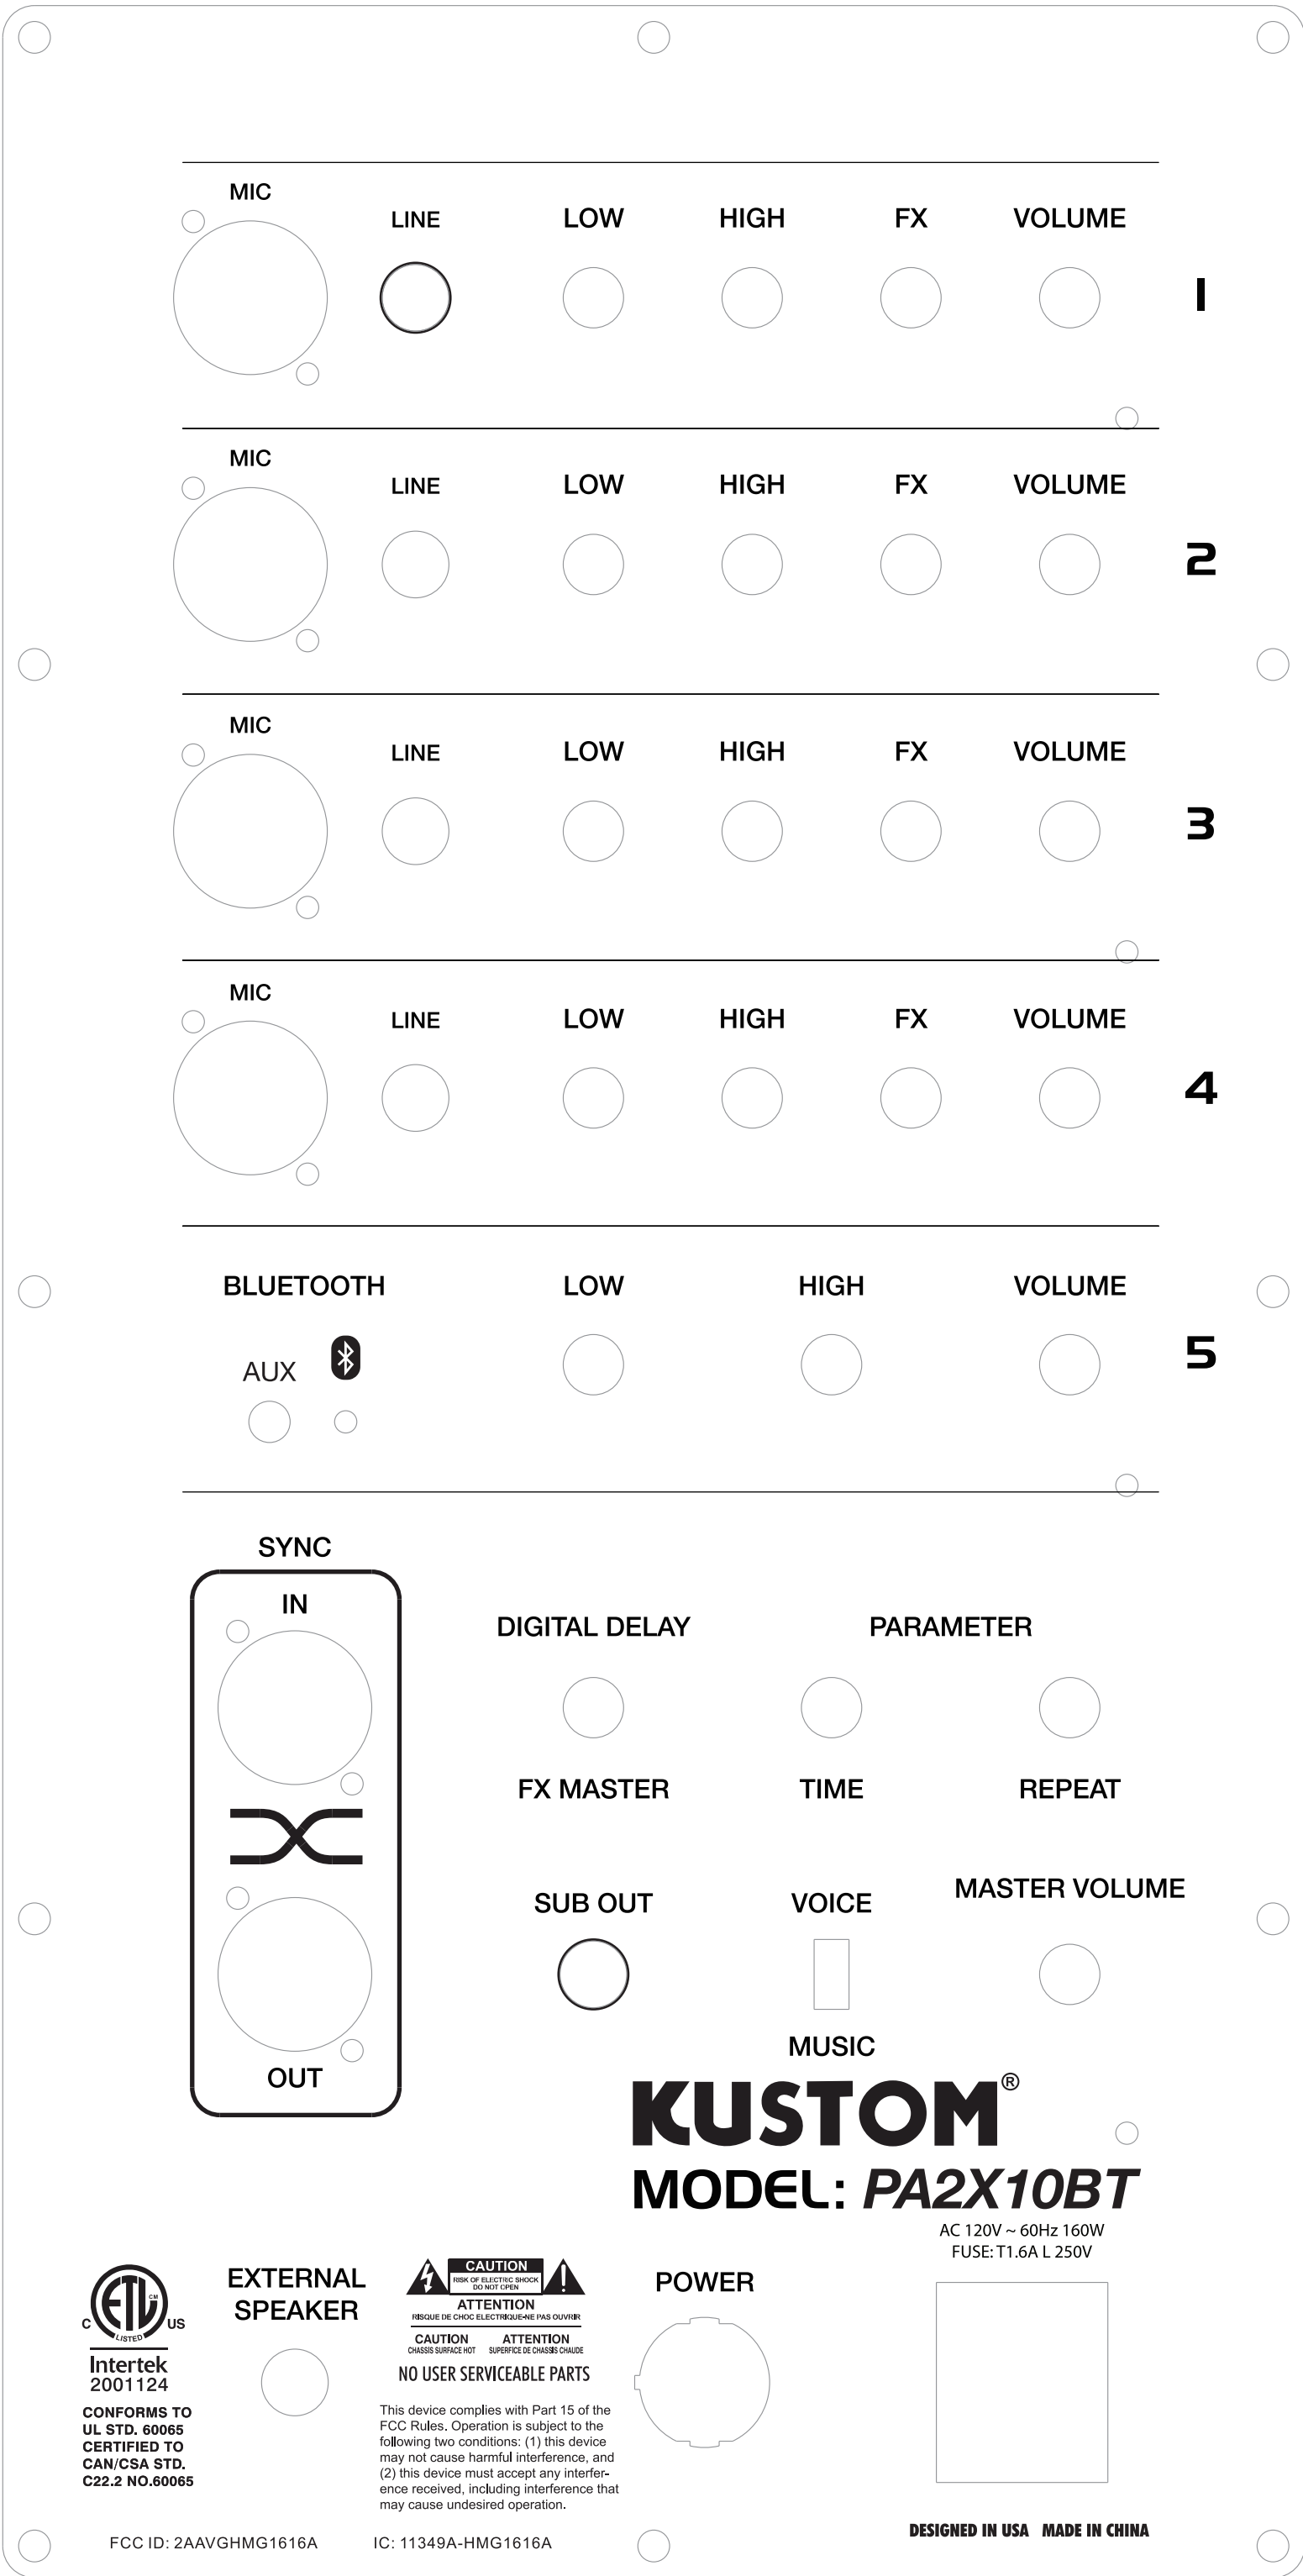

图号：
名称：PA2X10BT输入面板丝印
表面处理：喷塑，黑色；
丝印颜色：白色。



CONFORMS TO
UL STD. 60065
CERTIFIED TO
CAN/CSA STD.
C22.2 NO.60065

FCC ID: 2AAVGHMG1616A




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC: 11349A-HMG1616A

Powerwerks™

MODEL : PW4X8BT

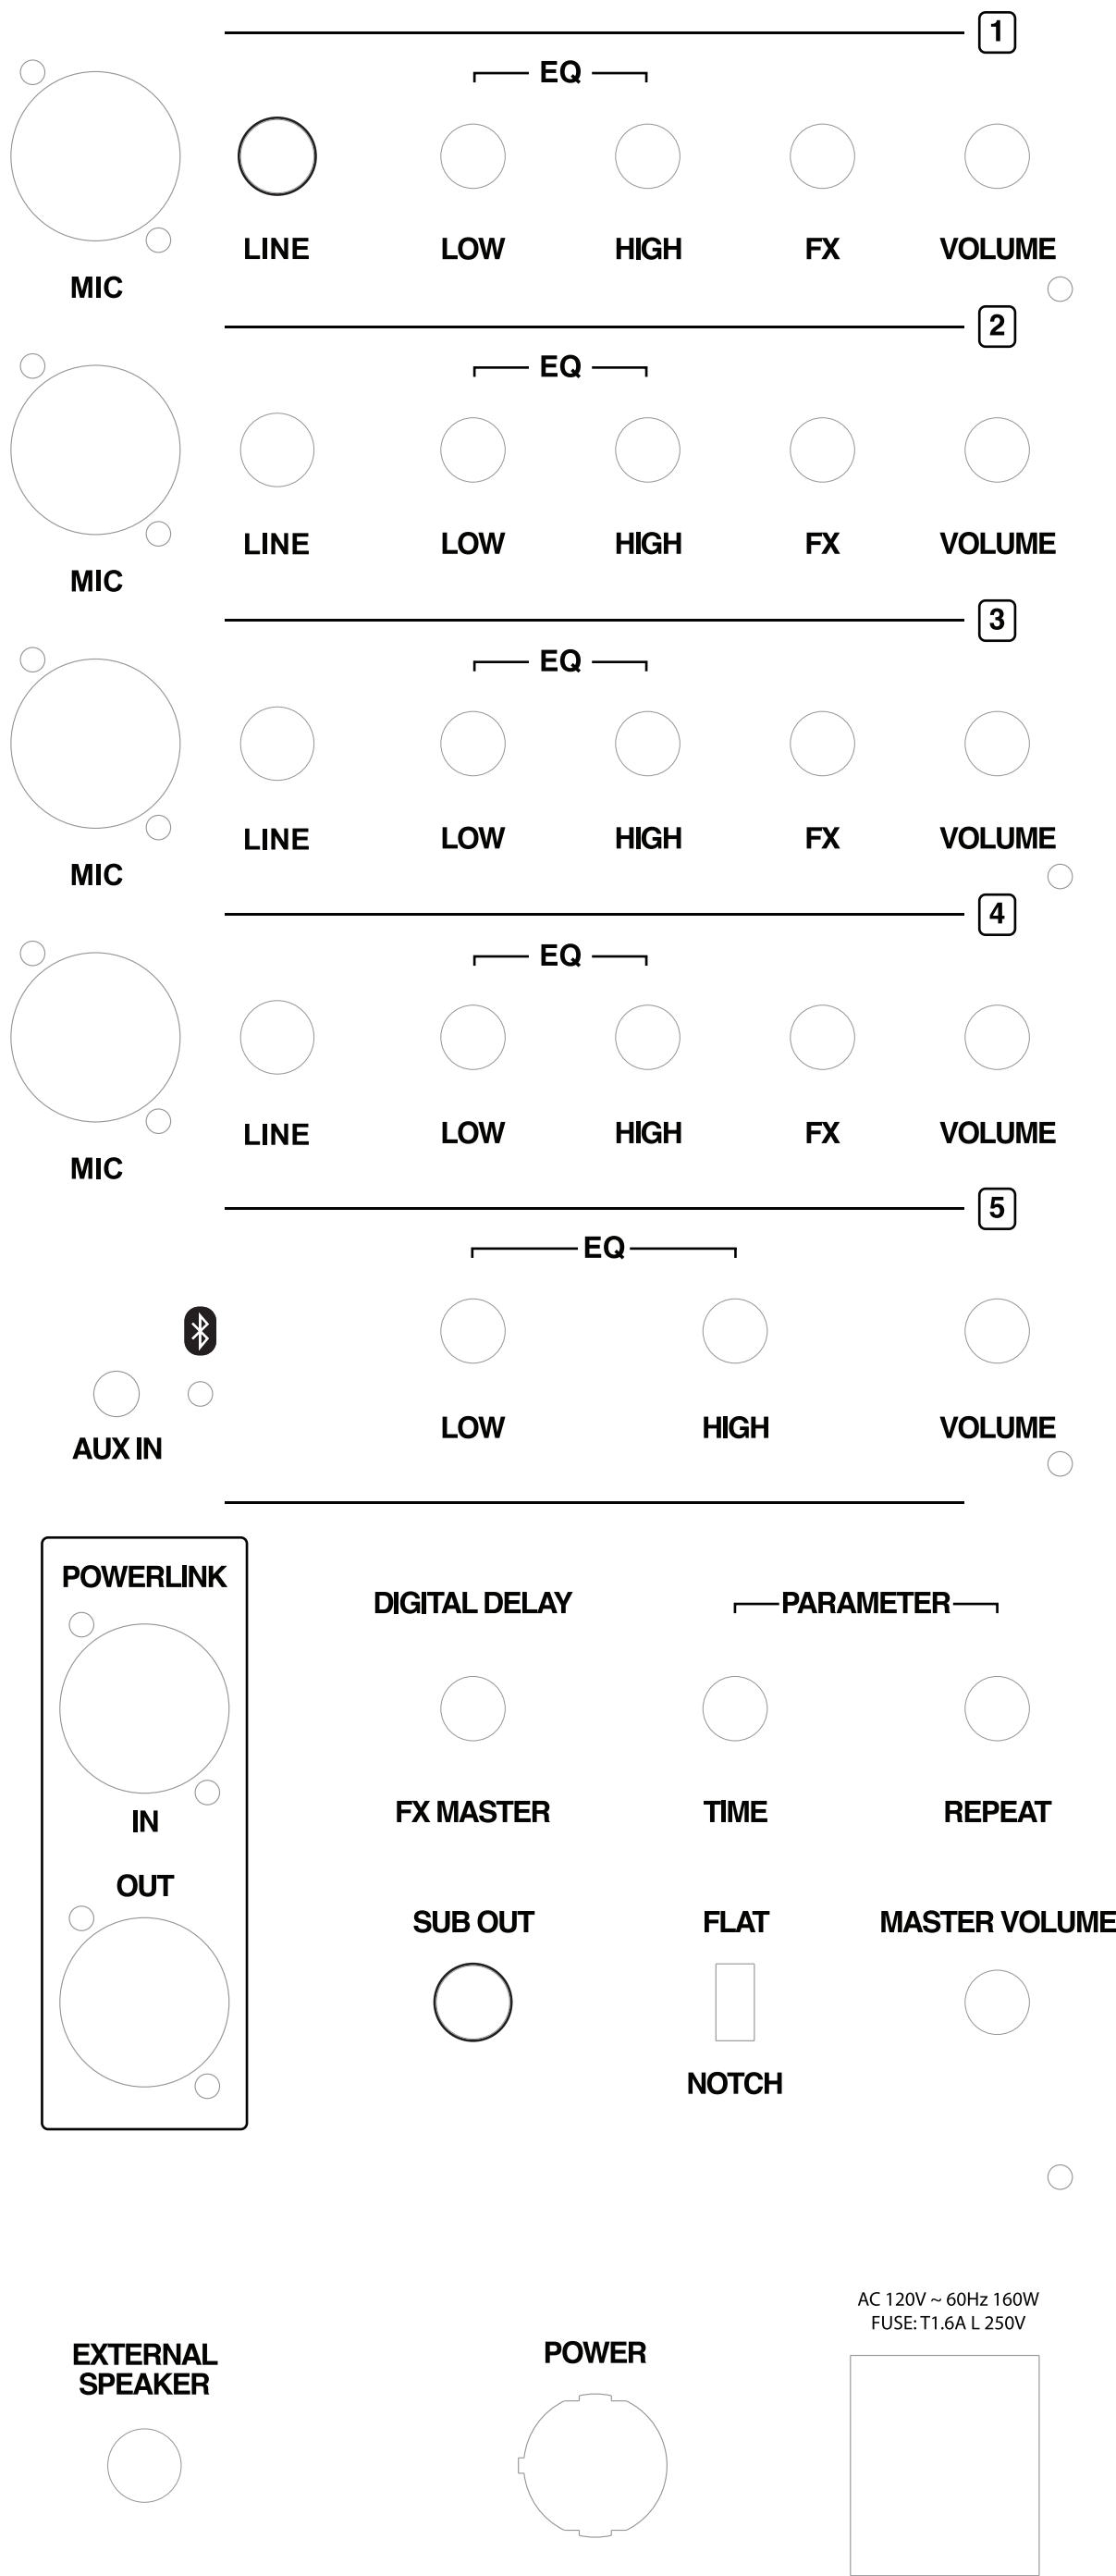

AC 120V ~ 60Hz 160W
FUSE: T1.6A L 250V


Designed in USA
Made In China



Apparatet må tilkoples jordet stikkontakt
Apparaten skall anslutas till jordat uttag
Laitte on liitettävä suojakosketinilla varustettuun pistorasiaan
Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.

Powerwerks™

MODEL : PW4X8BT

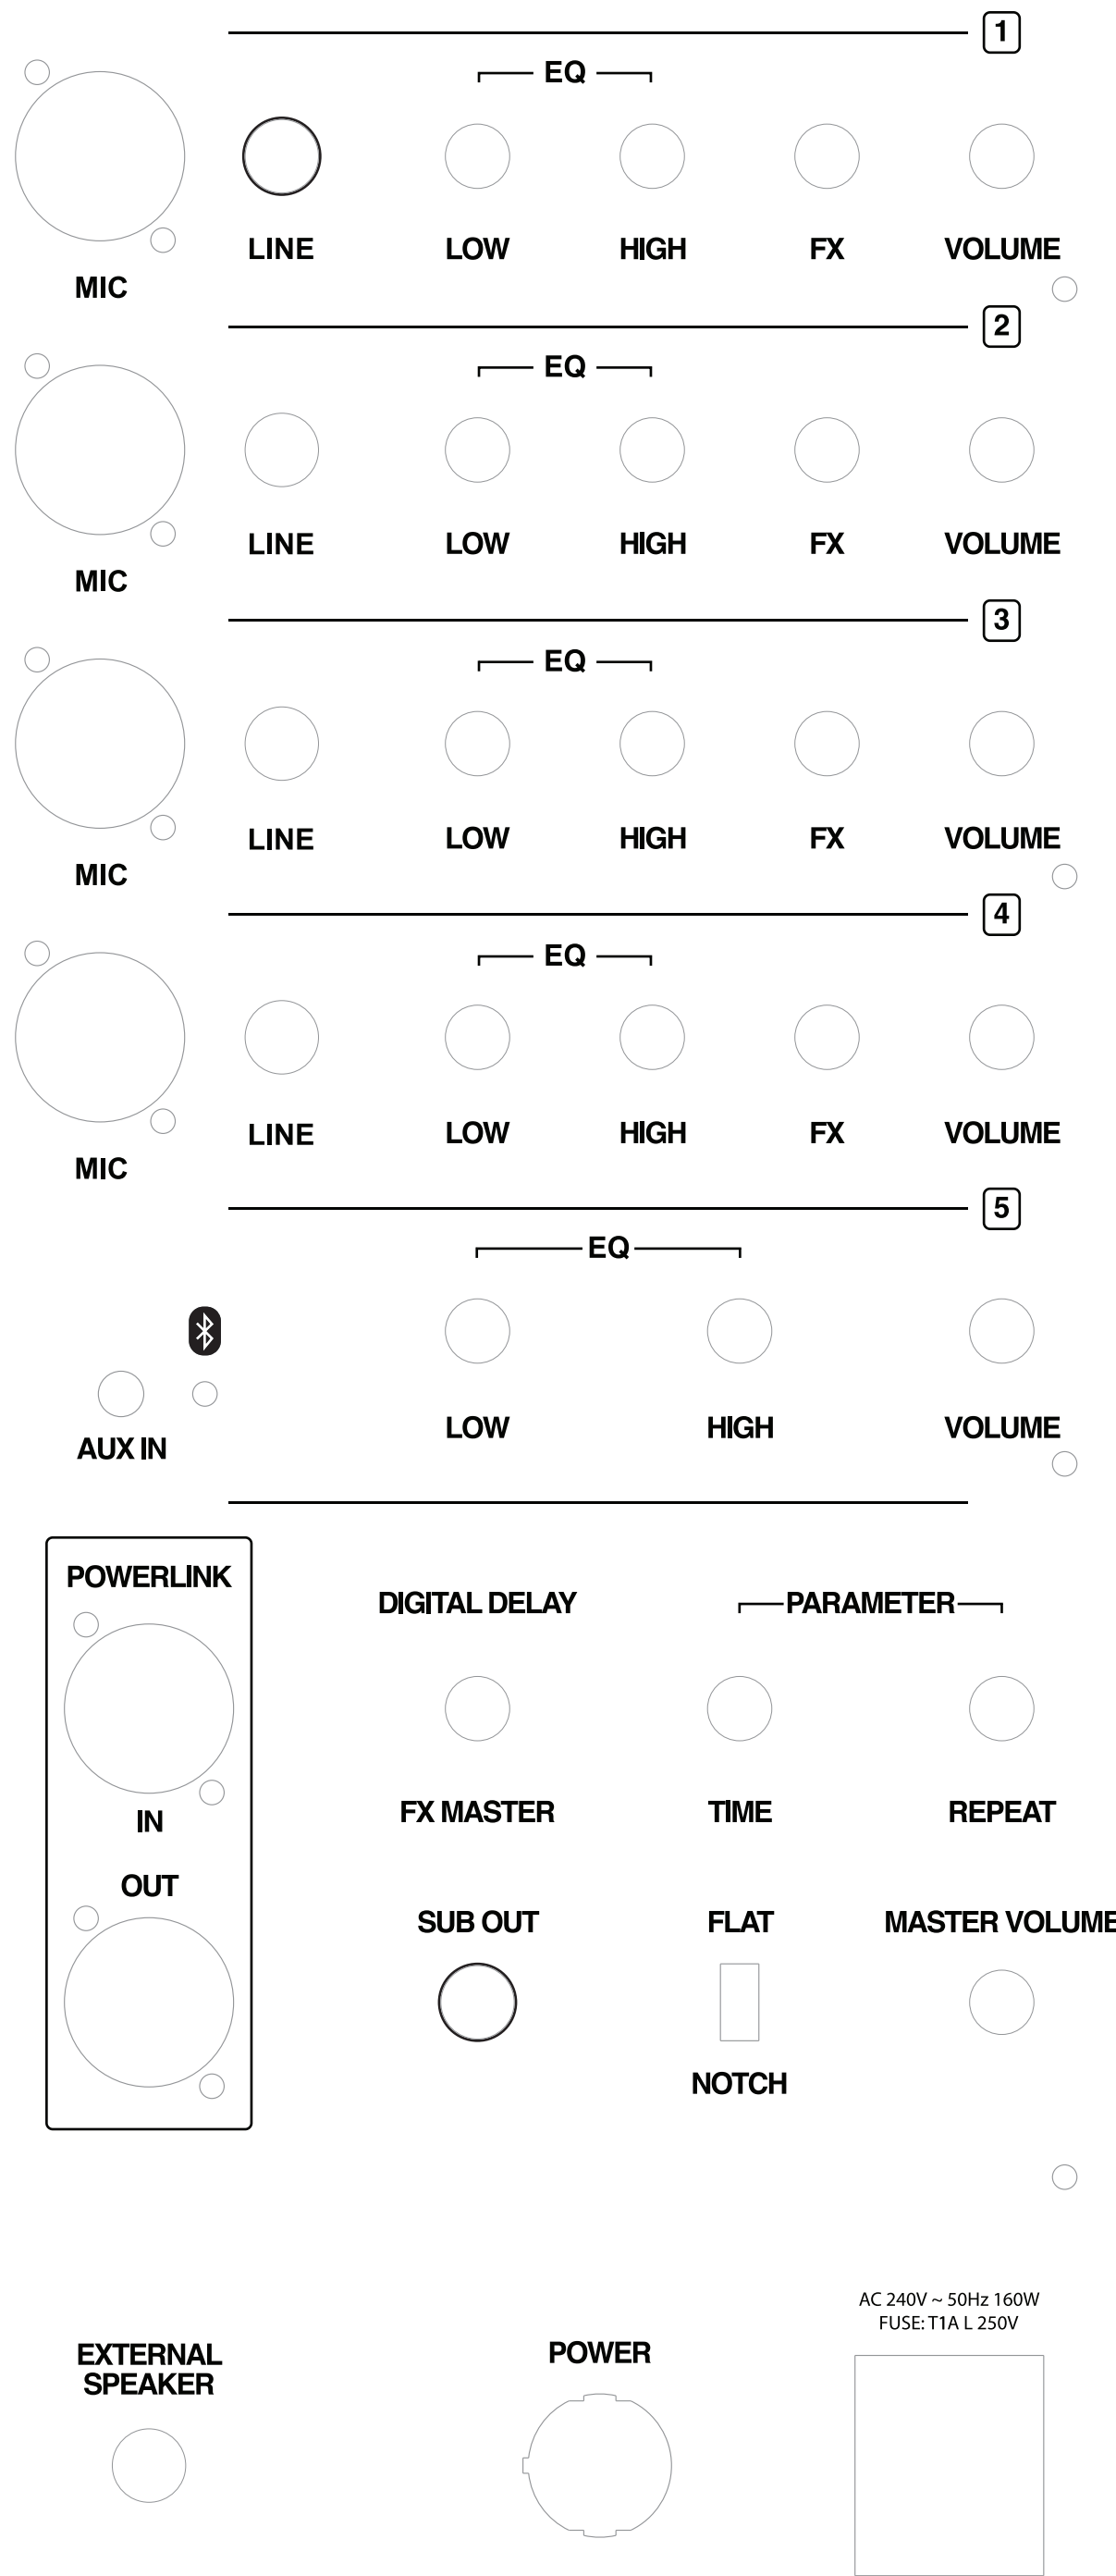

AC 240V ~ 50Hz 160W
FUSE: T1A L 250V

Designed in USA
Made In China

名称：PW4X8BT后面板丝印
丝印颜色：白色
底色：黑色(喷塑)



CONFORMS TO
UL STD. 60065
CERTIFIED TO
CAN/CSA STD.
C22.2 NO.60065

FCC ID: 2AAVGHMG1616A





This device complies with Part 15 of the
FCC Rules. Operation is subject to the
following two conditions: (1) this device
may not cause harmful interference, and
(2) this device must accept any interfer-
ence received, including interference that
may cause undesired operation.

IC: 11349A-HMG1616A

Powerwerks™

MODEL : PW4X6BT

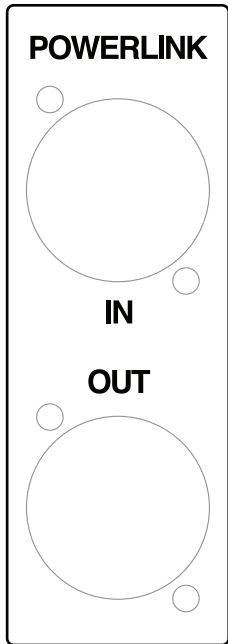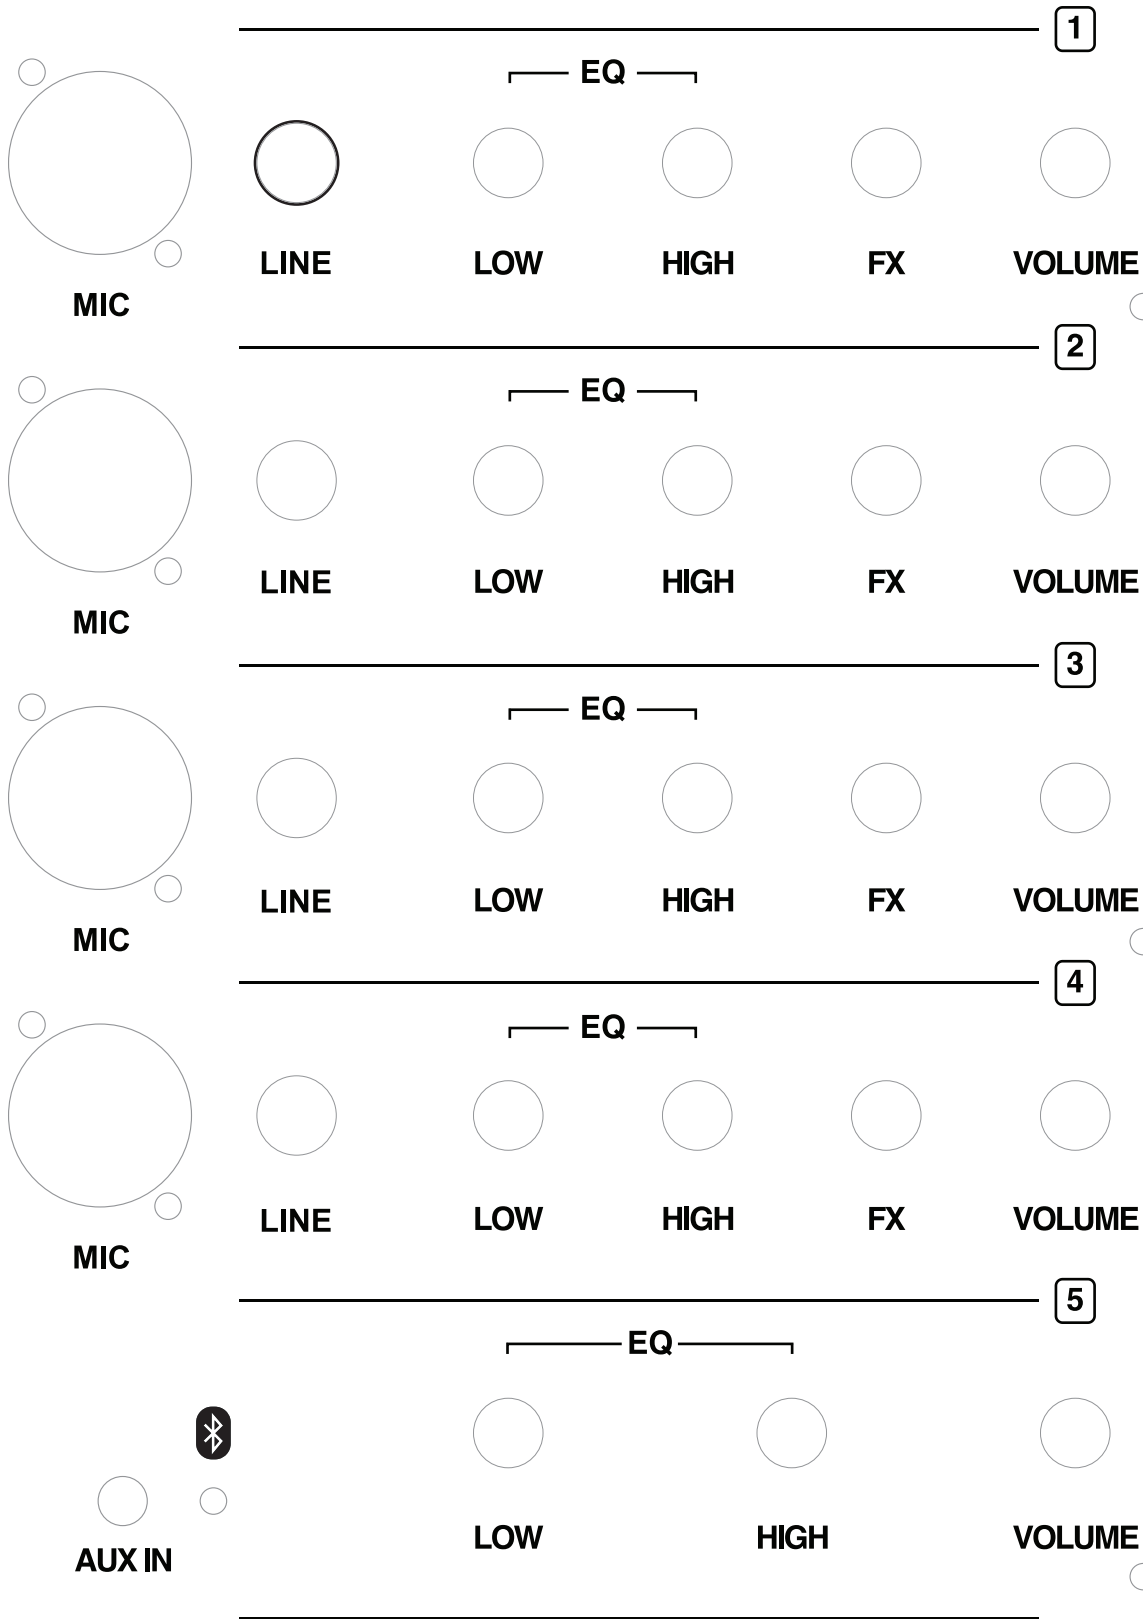

DIGITAL DELAY

PARAMETER

FX MASTER

TIME

REPEAT

SUB OUT

FLAT

MASTER VOLUME

NOTCH

EXTERNAL
SPEAKER

POWER

AC 120V ~ 60Hz 160W
FUSE: T1.6A L 250V



Designed in USA
Made In China





NO USER SERVICEABLE PARTS



Apparatet må tilkoples jordnet stikkontakt
Apparaten skall anslutas till jordat uttag
Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan
Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.

Powerwerks™

MODEL : PW4X6BT

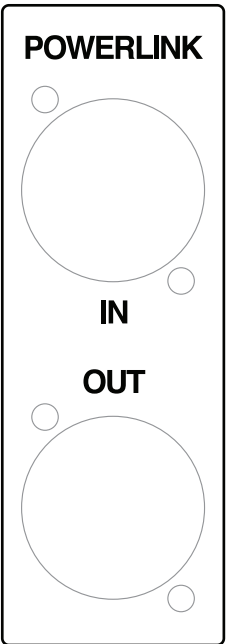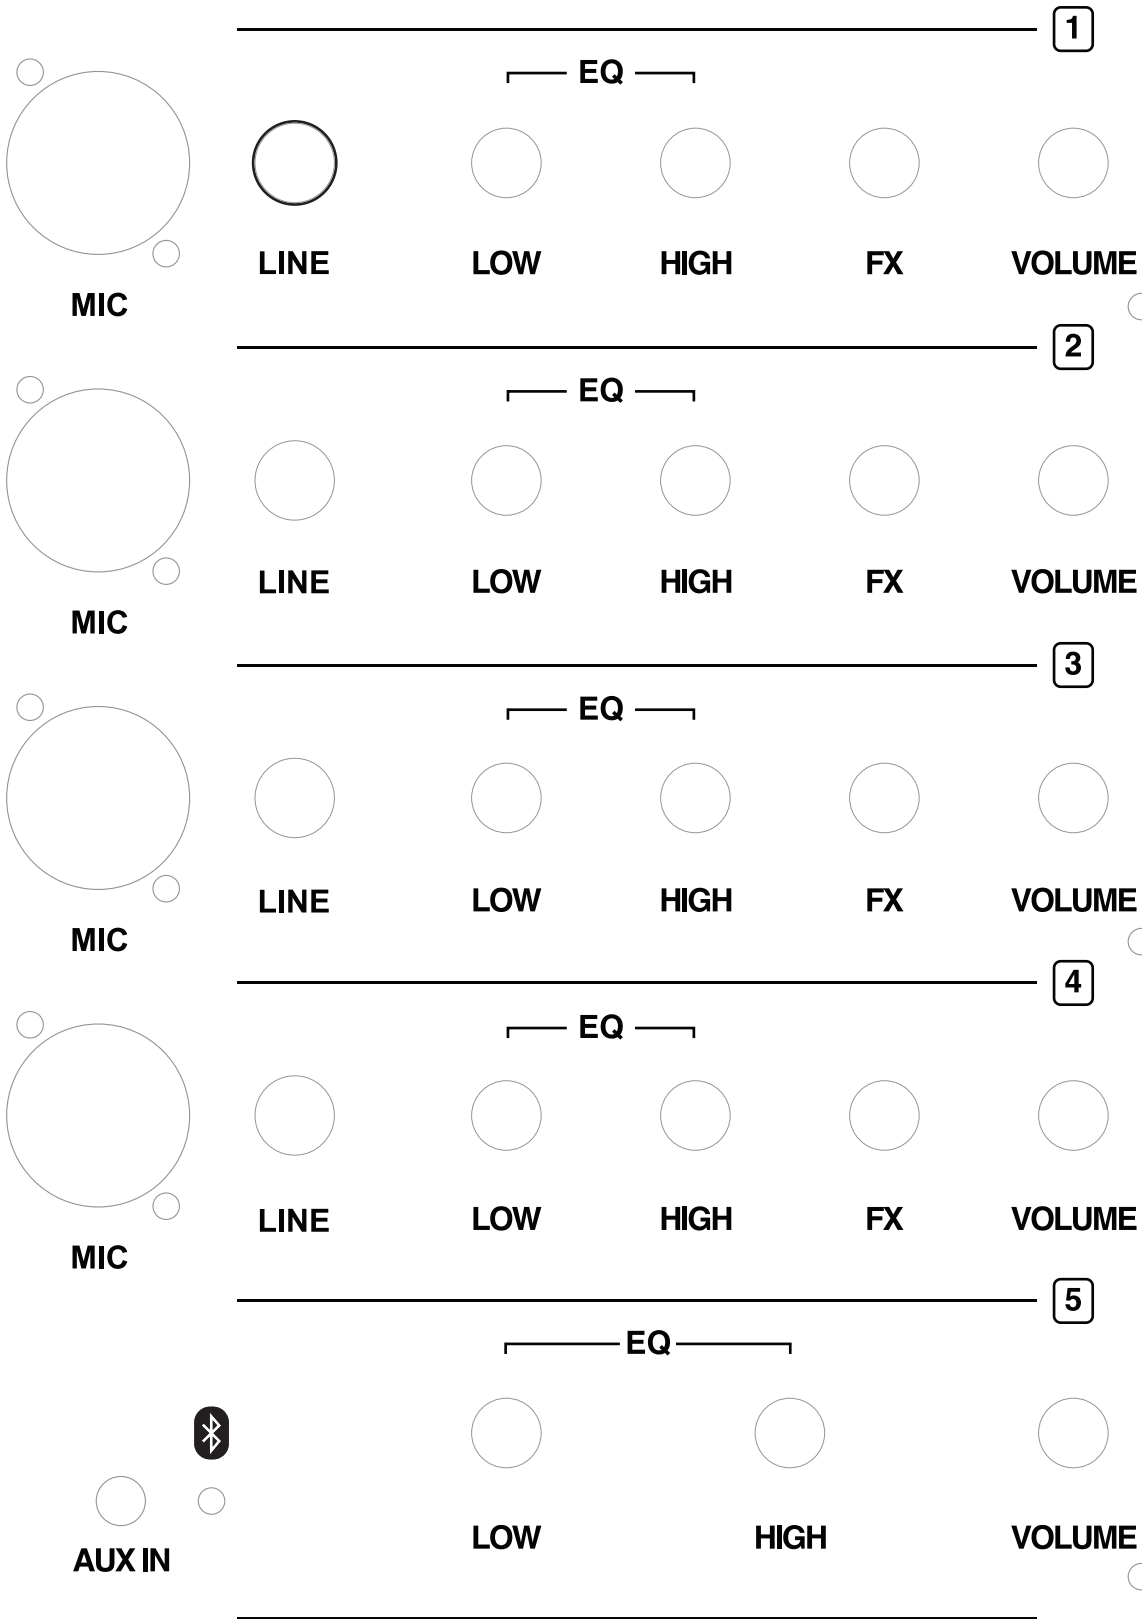

DIGITAL DELAY

PARAMETER

FX MASTER

TIME

REPEAT

SUB OUT

FLAT

MASTER VOLUME

NOTCH

EXTERNAL
SPEAKER

POWER

AC 240V ~ 50Hz 160W
FUSE: T1A L 250V



Designed in USA
Made In China

名称：PW4X6BT后面板丝印
丝印颜色：白色
底色：黑色(喷塑)



FCC ID: 2AAVGHMG1616A
IC: 11349A-HMG1616A

FCC & IC Label Location

PA2X12BT



PA2X10BT





FCC ID: 2AAVGHMG1616A
IC: 11349A-HMG1616A

PW4X8BT



PW4X6BT

