TCT 通测检测
TESTING CENTRE TECHNOLOGY

TEST REPORT

FCC ID: 2AAWC-MAGNUSIII

Product: 2 in 1 Tablet

Model No.: MAGNUS III

Additional Model No.: N/A

Trade Mark: iVIEW®

Report No.: TCT200521E016

Issued Date: Jun. 16, 2020

Issued for:

Wiltronic Corporation

13939 Central Ave, Chino, California 91710, United States

Issued By:

Shenzhen Tongce Testing Lab.
1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China
TEL: +86-755-27673339
FAX: +86-755-27673332

Note: *This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.*

TABLE OF CONTENTS

1. Test Certification 3
2. Test Result Summary 4
3. EUT Description 5
4. General Information 6
4.1. Test environment and mode 6
4.2. Description of Support Units 6
5. Facilities and Accreditations 7
5.1. Facilities 7
5.2. Location 7
5.3. Measurement Uncertainty 7
6. Test Results and Measurement Data 8
6.1. Antenna requirement 8
6.2. Conducted Emission 9
6.3. Conducted Output Power 15
6.4. Emission Bandwidth 18
6.5. Power Spectral Density 21
6.6. Conducted Band Edge and Spurious Emission Measurement 24
6.7. Radiated Spurious Emission Measurement 27
Appendix A: Photographs of Test Setup
Appendix B: Photographs of EUT

1. Test Certification

Product:	2 in 1 Tablet
Model No.:	MAGNUS III
Additional Model No.:	N/A
Trade Mark:	iVIEW®
Applicant:	Wiltronic Corporation
Address:	13939 Central Ave, Chino, California 91710, United States
Manufacturer:	Wiltronic Corporation
Address:	13939 Central Ave, Chino, California 91710, United States
Date of Test:	May 22, 2020 – Jun. 15, 2020
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:	***Rleo***	***Date:***	***Jun. 15, 2020***
Reviewed By:	***Beryl Zhao***	***Date:***	***Jun. 16, 2020***
Approved By:	***Tomsin***	***Date:***	***Jun. 16, 2020***

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. PASS: Test item meets the requirement.

2. Fail: Test item does not meet the requirement.

3. N/A: Test case does not apply to the test object.

4. The test result judgment is decided by the limit of test standard.

5. After pre-testing the two earphones, the two earphones are left and right ears respectively; we found that the left earphone is the worst case, so the results are recorded in this report.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com

3. EUT Description

Product:	2 in 1 Tablet
Model No.:	MAGNUS III
Additional Model No.:	N/A
Trade Mark:	iVIEW
Bluetooth Version:	V4.2 (This report is for BLE)
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	2MHz
Number of Channel:	40
Modulation Type:	GFSK
Antenna Type:	Internal Antenna
Antenna Gain:	1.71dBi
Power Supply:	Rechargeable Li-ion Battery DC 3.7V
AC adapter:	Adapter Information1: MODEL: K-E3F0502000U2 INPUT: AC 100-240V, 50/60Hz, 0.35A Max OUTPUT: DC 5V, 2000mA Adapter Information2: MODEL: JZB012-050200UX INPUT: AC 100-240V, 50/60Hz, 0.35A OUTPUT: DC 5V, 2000mA

Note: *The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.*

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
…	…	…	…	…	…	…	…
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz
Remark: Channel 0, 19 & 39 have been tested.							

4. General Information

4.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.0 °C	25.0 °C
Humidity:	55 % RH	55 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery	
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.		

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098
  Shenzhen Tongce Testing Lab.
  The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.
- IC - Registration No.: 10668A-1
  The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab.
Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China
TEL: +86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is internal antenna which permanently attached, and the best case gain of the antenna is 1.71dBi.	

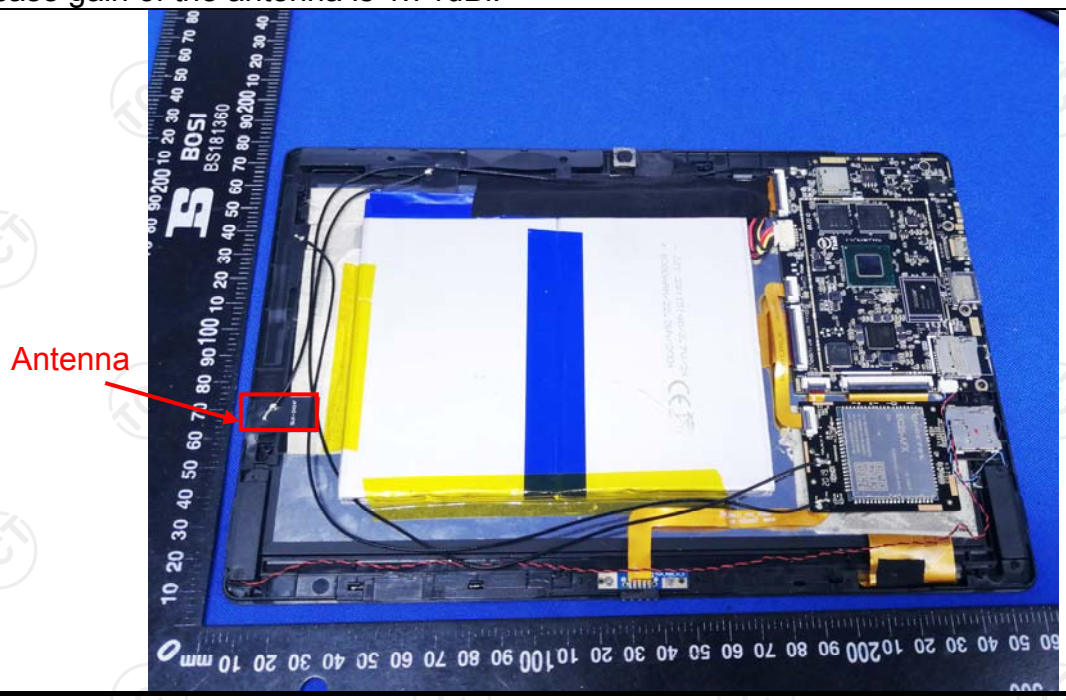

6.2. Conducted Emission

6.2.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.207</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10:2013</td></tr>
<tr><td>Frequency Range:</td><td>150 kHz to 30 MHz</td></tr>
<tr><td>Receiver setup:</td><td>RBW=9 kHz, VBW=30 kHz, Sweep time=auto</td></tr>
<tr><td>Limits:</td><td>
<table>
<tr><td rowspan="2">Frequency range (MHz)</td><td colspan="2">Limit (dBuV)</td></tr>
<tr><td>Quasi-peak</td><td>Average</td></tr>
<tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr>
<tr><td>0.5-5</td><td>56</td><td>46</td></tr>
<tr><td>5-30</td><td>60</td><td>50</td></tr>
</table>
</td></tr>
<tr><td>Test Setup:</td><td>
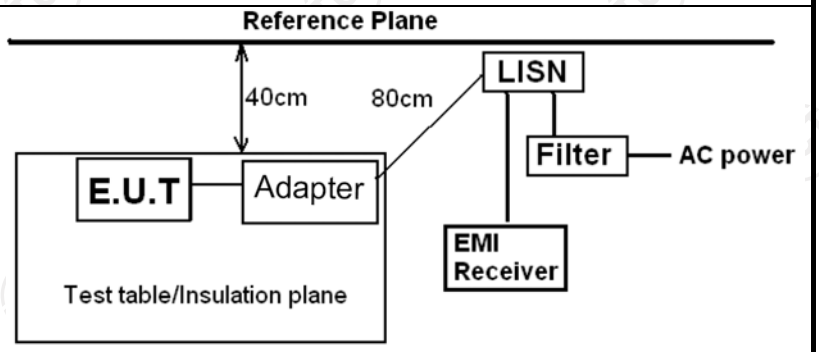

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m
</td></tr>
<tr><td>Test Mode:</td><td>Charging + Transmitting Mode</td></tr>
<tr><td>Test Procedure:</td><td>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</td></tr>
<tr><td>Test Result:</td><td>PASS</td></tr>
</table>

6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Test Receiver	R&S	ESPI	101402	Jul. 29, 2020
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2020
Coax cable (9KHz-30MHz)	TCT	CE-05	N/A	Sep. 08, 2020
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.2.3. Test data

Please refer to following diagram for individual

Adapter 1:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

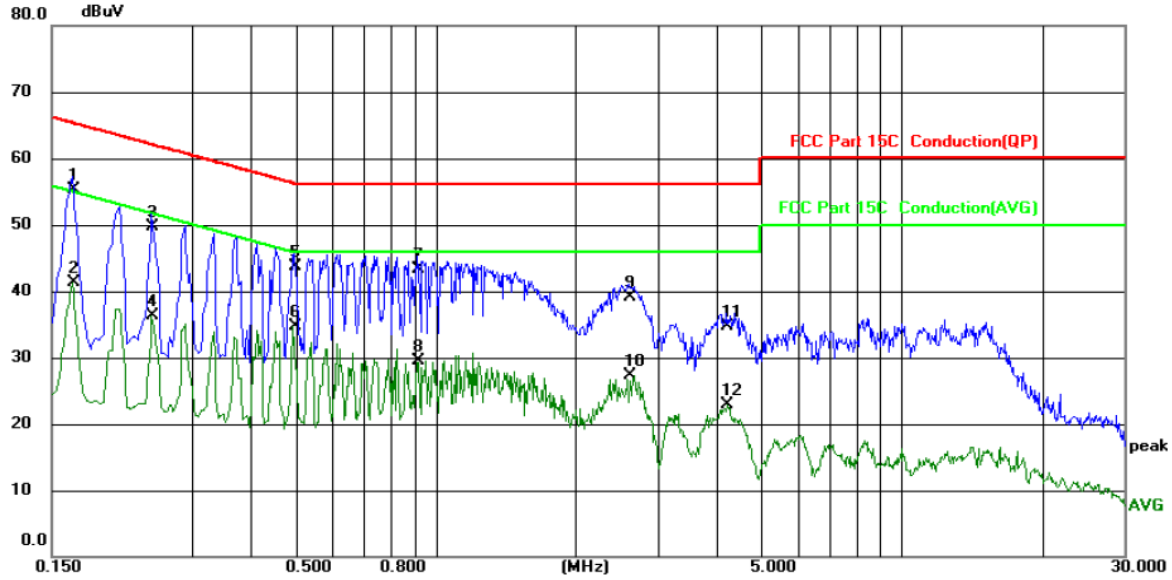

Site	Phase: *L1*	Temperature:	25 (C)
Limit: FCC Part 15C Conduction(QP)	Power: AC 120V/60Hz	Humidity:	55 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1660	45.06	10.22	55.28	65.16	-9.88	QP	
2		0.1660	31.08	10.22	41.30	55.16	-13.86	AVG	
3		0.2460	39.51	10.23	49.74	61.89	-12.15	QP	
4		0.2460	26.04	10.23	36.27	51.89	-15.62	AVG	
5		0.4980	33.45	10.22	43.67	56.03	-12.36	QP	
6		0.4980	24.47	10.22	34.69	46.03	-11.34	AVG	
7		0.9180	32.95	10.32	43.27	56.00	-12.73	QP	
8		0.9180	19.21	10.32	29.53	46.00	-16.47	AVG	
9		2.5980	28.59	10.45	39.04	56.00	-16.96	QP	
10		2.5980	16.79	10.45	27.24	46.00	-18.76	AVG	
11		4.2060	24.26	10.47	34.73	56.00	-21.27	QP	
12		4.2060	12.47	10.47	22.94	46.00	-23.06	AVG	

Note:

Freq. = Emission frequency in MHz
Reading level (dBµV) = Receiver reading
Corr. Factor (dB) = LISN factor + Cable loss
Measurement (dBµV) = Reading level (dBµV) + Corr. Factor (dB)
Limit (dBµV) = Limit stated in standard
Margin (dB) = Measurement (dBµV) – Limits (dBµV)
Q.P. =Quasi-Peak
AVG =average
** is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz*

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

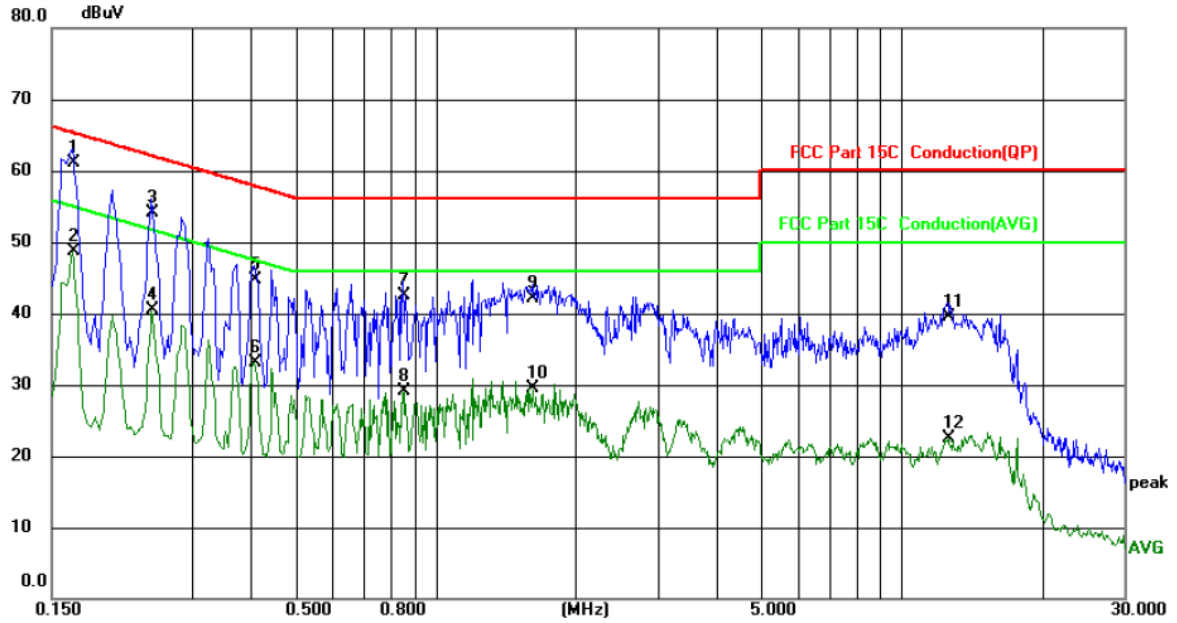

Site	Phase: N	Temperature:	25 (C)
Limit: FCC Part 15C Conduction(QP)	Power: AC 120V/60Hz	Humidity:	55 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1660	50.88	10.22	61.10	65.16	-4.06	QP	
2		0.1660	38.43	10.22	48.65	55.16	-6.51	AVG	
3		0.2460	43.90	10.23	54.13	61.89	-7.76	QP	
4		0.2460	30.36	10.23	40.59	51.89	-11.30	AVG	
5		0.4100	34.43	10.22	44.65	57.65	-13.00	QP	
6		0.4100	22.88	10.22	33.10	47.65	-14.55	AVG	
7		0.8500	32.16	10.30	42.46	56.00	-13.54	QP	
8		0.8500	18.83	10.30	29.13	46.00	-16.87	AVG	
9		1.6140	31.67	10.42	42.09	56.00	-13.91	QP	
10		1.6140	19.17	10.42	29.59	46.00	-16.41	AVG	
11		12.5820	28.85	10.63	39.48	60.00	-20.52	QP	
12		12.5820	11.95	10.63	22.58	50.00	-27.42	AVG	

Note:

Freq. = Emission frequency in MHz
Reading level (dBµV) = Receiver reading
Corr. Factor (dB) = LISN factor + Cable loss
Measurement (dBµV) = Reading level (dBµV) + Corr. Factor (dB)
Limit (dBµV) = Limit stated in standard
Margin (dB) = Measurement (dBµV) – Limits (dBµV)
Q.P. =Quasi-Peak
AVG =average
** is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.*

Adapter 2:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

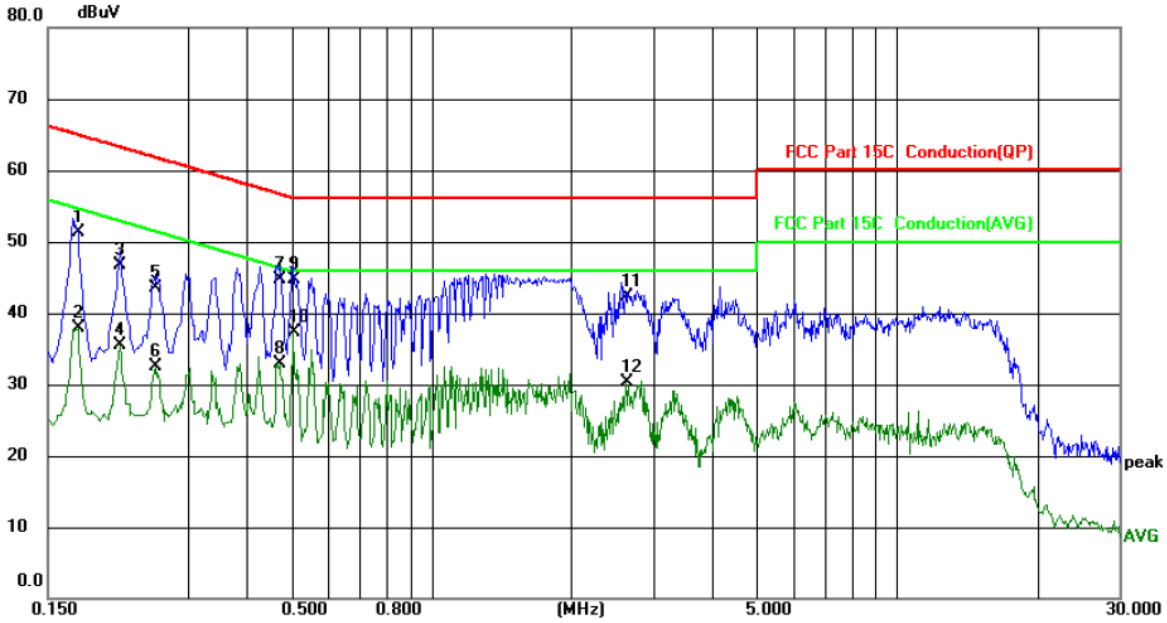

Site		Phase:	L1	Temperature:	25 (C)
Limit: FCC Part 15C Conduction(QP)		Power:	AC 120V/60Hz	Humidity:	55 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1737	41.09	10.22	51.31	64.78	-13.47	QP	
2		0.1737	27.63	10.22	37.85	54.78	-16.93	AVG	
3		0.2139	36.46	10.23	46.69	63.05	-16.36	QP	
4		0.2139	25.34	10.23	35.57	53.05	-17.48	AVG	
5		0.2560	33.30	10.23	43.53	61.56	-18.03	QP	
6		0.2560	22.20	10.23	32.43	51.56	-19.13	AVG	
7		0.4711	34.57	10.22	44.79	56.49	-11.70	QP	
8		0.4711	22.63	10.22	32.85	46.49	-13.64	AVG	
9		0.5060	34.54	10.22	44.76	56.00	-11.24	QP	
10	*	0.5060	27.04	10.22	37.26	46.00	-8.74	AVG	
11		2.6218	31.80	10.45	42.25	56.00	-13.75	QP	
12		2.6218	19.87	10.45	30.32	46.00	-15.68	AVG	

Note:

Freq. = Emission frequency in MHz
Reading level (dBµV) = Receiver reading
Corr. Factor (dB) = LISN factor + Cable loss
Measurement (dBµV) = Reading level (dBµV) + Corr. Factor (dB)
Limit (dBµV) = Limit stated in standard
Margin (dB) = Measurement (dBµV) – Limits (dBµV)
Q.P. =Quasi-Peak
AVG =average
** is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz*

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

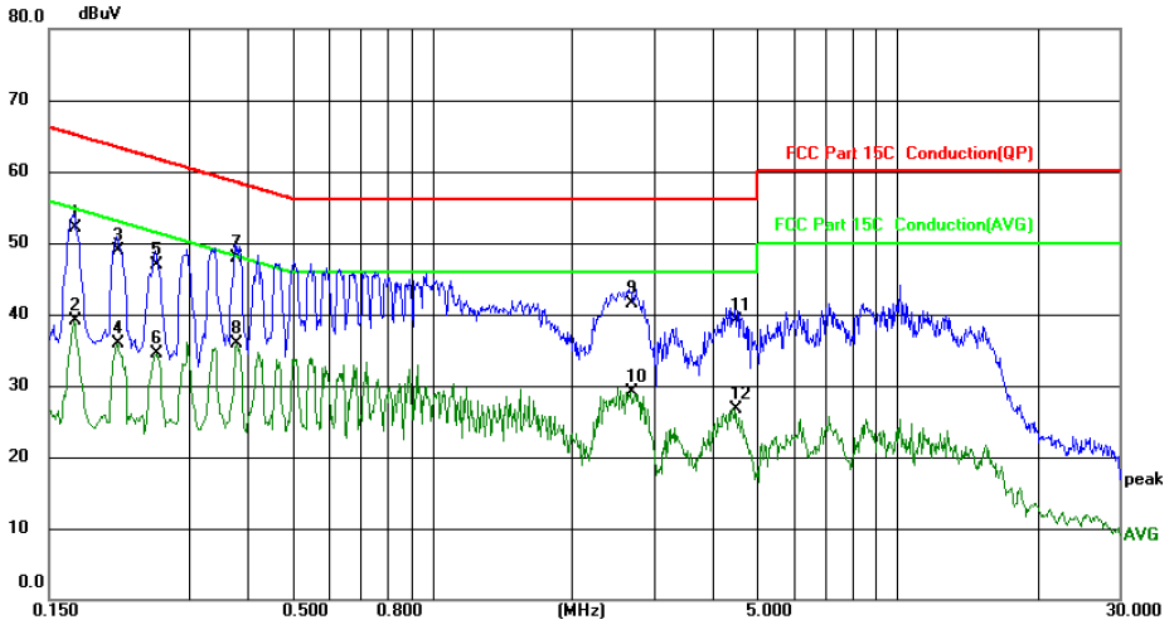

Site		Phase:	N	Temperature:	25 (C)
Limit: FCC Part 15C Conduction(QP)		Power:	AC 120V/60Hz	Humidity:	55 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	41.83	10.22	52.05	64.96	-12.91	QP	
2		0.1700	28.85	10.22	39.07	54.96	-15.89	AVG	
3		0.2100	38.75	10.23	48.98	63.21	-14.23	QP	
4		0.2100	25.73	10.23	35.96	53.21	-17.25	AVG	
5		0.2560	36.76	10.23	46.99	61.56	-14.57	QP	
6		0.2560	24.37	10.23	34.60	51.56	-16.96	AVG	
7	*	0.3790	37.60	10.22	47.82	58.30	-10.48	QP	
8		0.3790	25.67	10.22	35.89	48.30	-12.41	AVG	
9		2.6779	31.03	10.45	41.48	56.00	-14.52	QP	
10		2.6779	18.72	10.45	29.17	46.00	-16.83	AVG	
11		4.4858	28.63	10.48	39.11	56.00	-16.89	QP	
12		4.4858	16.27	10.48	26.75	46.00	-19.25	AVG	

Note:

Freq. = Emission frequency in MHz
Reading level (dBµV) = Receiver reading
Corr. Factor (dB) = LISN factor + Cable loss
Measurement (dBµV) = Reading level (dBµV) + Corr. Factor (dB)
Limit (dBµV) = Limit stated in standard
Margin (dB) = Measurement (dBµV) – Limits (dBµV)
Q.P. =Quasi-Peak
AVG =average
** is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.*

6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074 D01 v05r02
Limit:	30dBm
Test Setup:	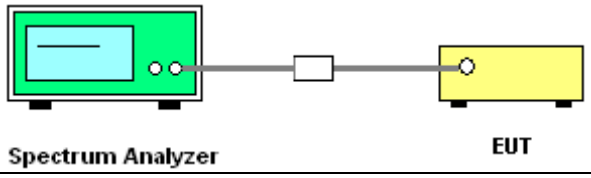
Test Mode:	Refer to item 4.1
Test Procedure:	Set spectrum analyzer as following: a) Set the RBW ≥ DTS bandwidth. b) Set VBW ≥ 3 × RBW. c) Set span ≥ 3 x RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.3.3. Test Data

BT LE mode			
Test channel	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
Lowest	3.56	30.00	PASS
Middle	3.77	30.00	PASS
Highest	3.74	30.00	PASS

Test plots as follows:

BT LE mode

Lowest channel

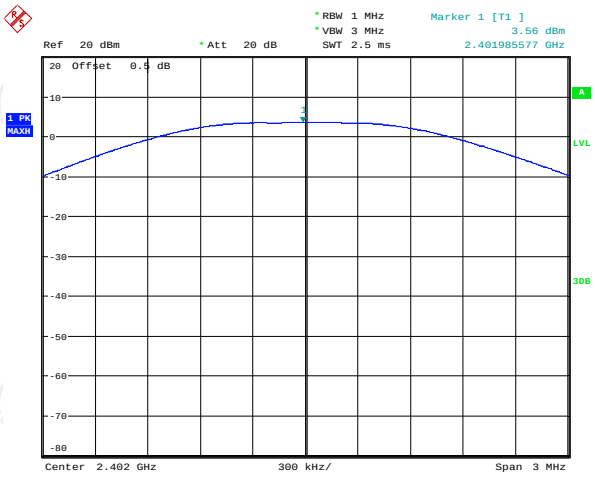

Middle channel

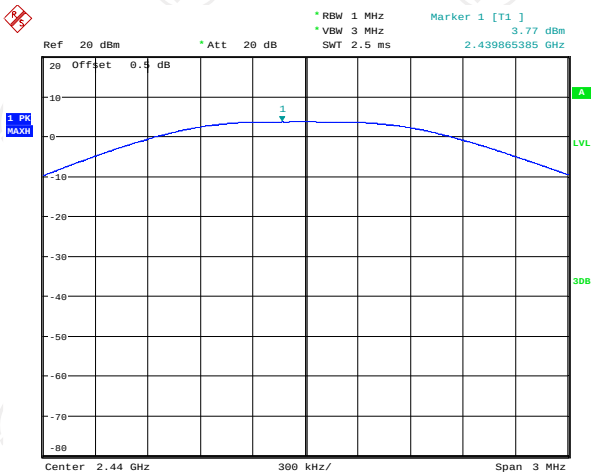

Highest channel

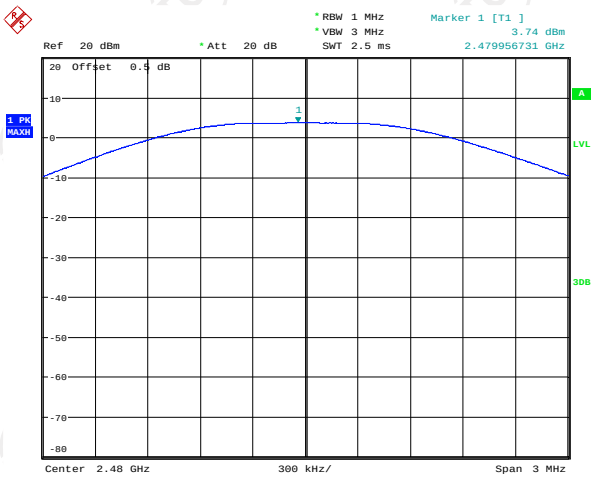

6.4. Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074 D01 v05r02
Limit:	>500kHz
Test Setup:	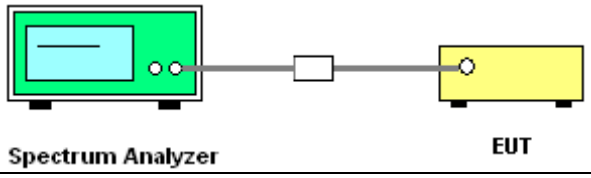
Test Mode:	Refer to item 4.1
Test Procedure:	1. Set to the maximum power setting and enable the EUT transmit continuously. 2. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 3. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.4.3. Test data

Test channel	6dB Emission Bandwidth (kHz)		
	BT LE mode	Limit	Result
Lowest	724.36	>500k	PASS
Middle	724.36	>500k	
Highest	711.54	>500k	

Test plots as follows:

BT LE mode

Lowest channel

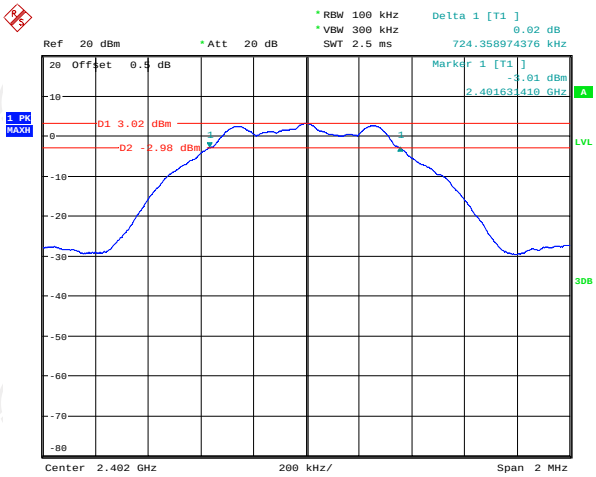

Middle channel

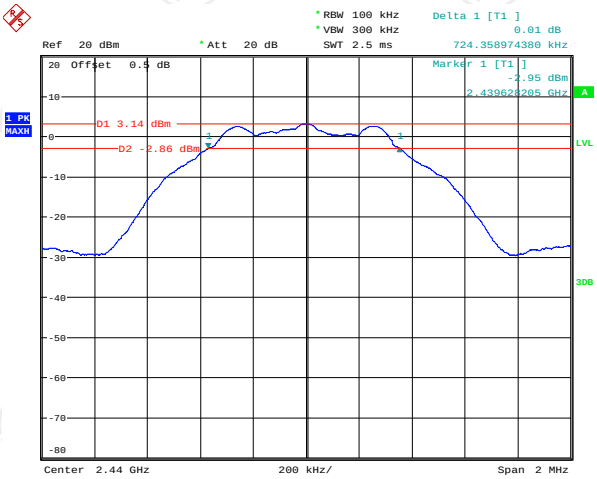

Highest channel

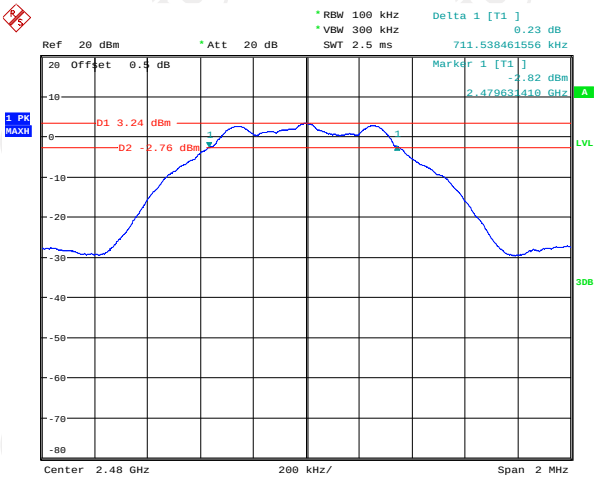

6.5. Power Spectral Density

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074 D01 v05r02
Limit:	The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	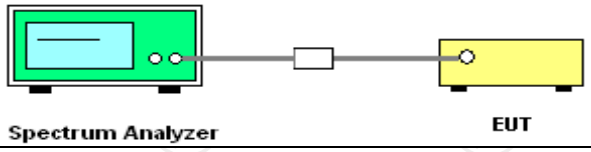
Test Mode:	Refer to item 4.1
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): 3 kHz ≤ RBW ≤ 100 kHz. Video bandwidth VBW ≥ 3 x RBW. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW) 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level. 5. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.5.3. Test data

Test channel	Power Spectral Density (dBm/3kHz)		
	BT LE mode	Limit	Result
Lowest	-12.05	8 dBm/3kHz	PASS
Middle	-12.04	8 dBm/3kHz	
Highest	-11.93	8 dBm/3kHz	

Test plots as follows:

BT LE mode

Lowest channel

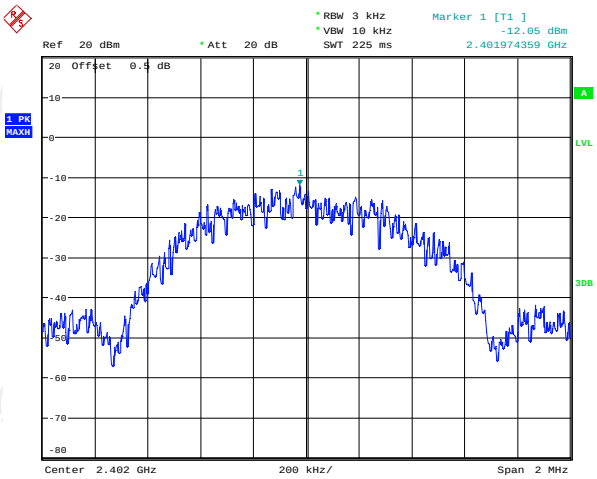

Middle channel

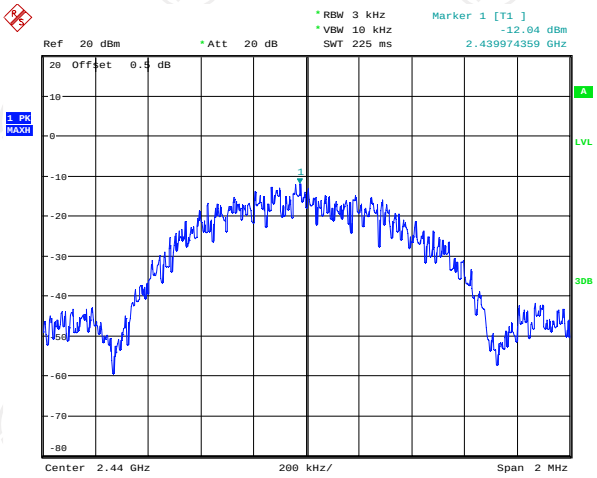

Highest channel

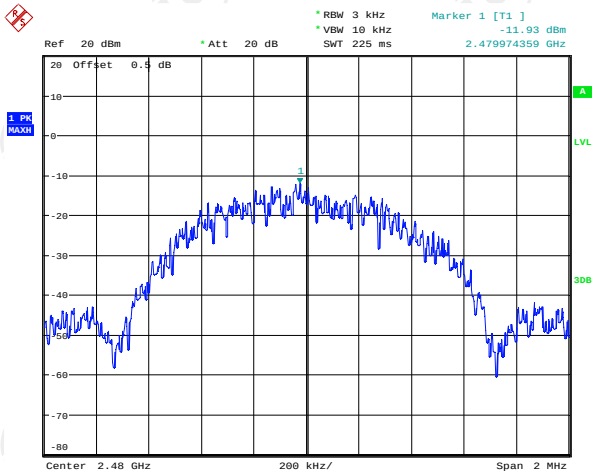

6.6. Conducted Band Edge and Spurious Emission Measurement

6.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 v05r02
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	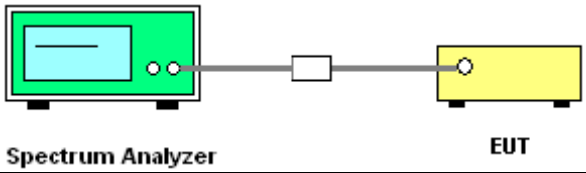
Test Mode:	Refer to item 4.1
Test Procedure:	1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

6.6.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2020
RF cable (9kHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2020
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2020

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.6.3. Test Data

100kHz PSD reference Level	Band Edge
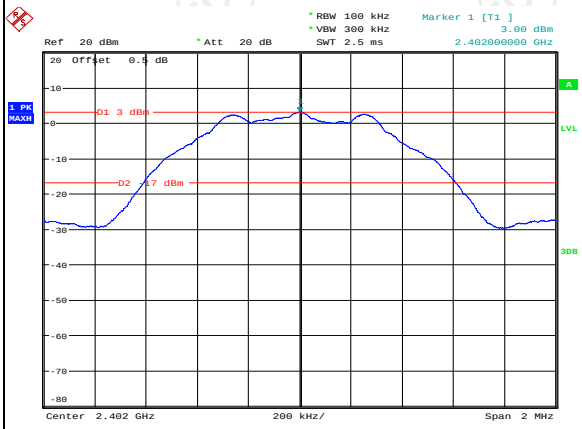	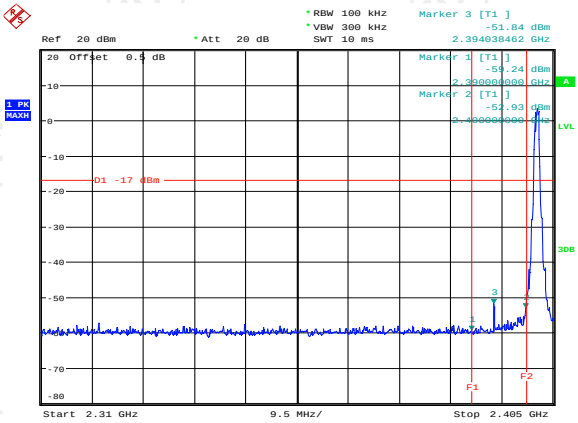
Spurious emission	
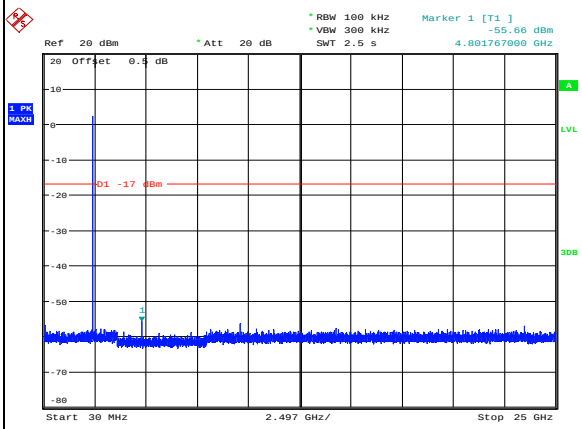	
Lowest Channel	

100kHz PSD reference Level	Spurious emission
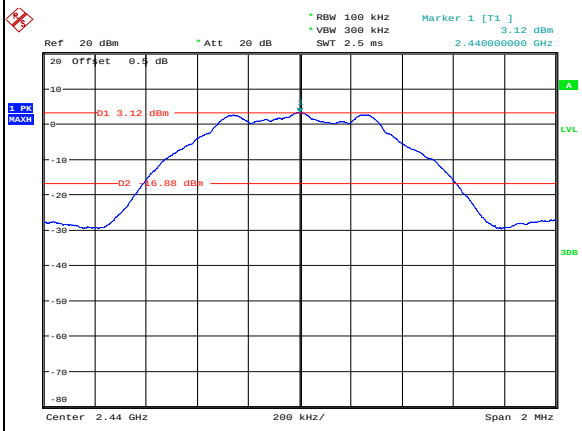	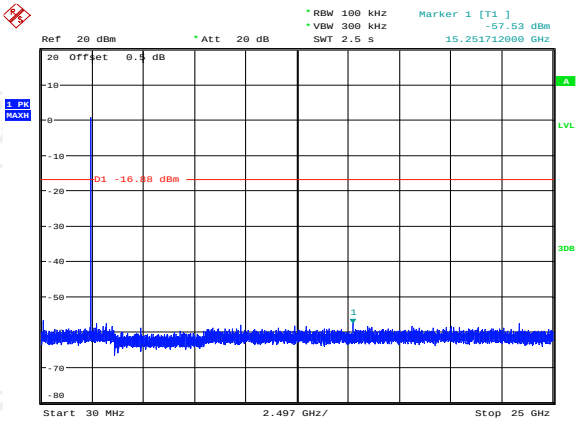

Middle Channel

100kHz PSD reference Level	Band Edge
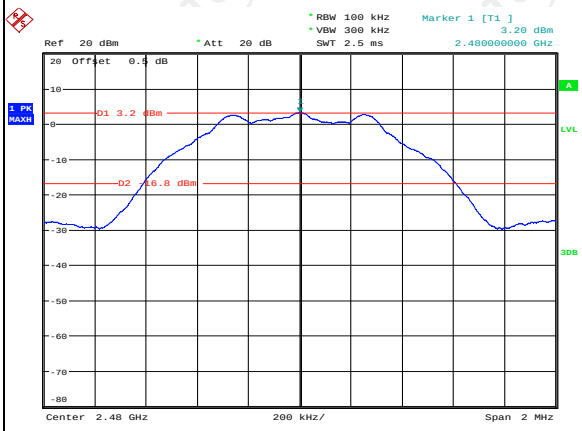	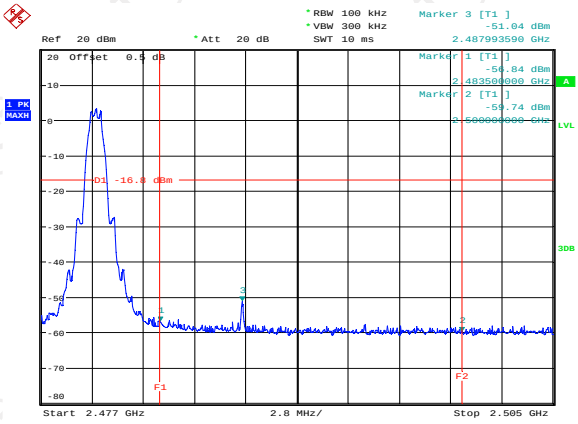

Spurious emission	
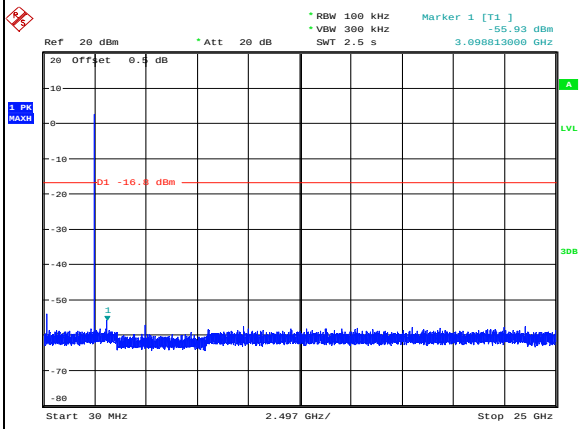	

Highest Channel

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com

6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.209</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10: 2013</td></tr>
<tr><td>Frequency Range:</td><td>9 kHz to 25 GHz</td></tr>
<tr><td>Measurement Distance:</td><td>3 m</td></tr>
<tr><td>Antenna Polarization:</td><td>Horizontal & Vertical</td></tr>
<tr><td>Operation mode:</td><td>Refer to item 4.1</td></tr>
<tr><td>Receiver Setup:</td><td>
<table>
<tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr>
<tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>150kHz-30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr>
<tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr>
</table>
</td></tr>
<tr><td>Limit:</td><td>
<table>
<tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td></tr>
<tr><td>0.009-0.490</td><td>2400/F(KHz)</td><td>300</td></tr>
<tr><td>0.490-1.705</td><td>24000/F(KHz)</td><td>30</td></tr>
<tr><td>1.705-30</td><td>30</td><td>30</td></tr>
<tr><td>30-88</td><td>100</td><td>3</td></tr>
<tr><td>88-216</td><td>150</td><td>3</td></tr>
<tr><td>216-960</td><td>200</td><td>3</td></tr>
<tr><td>Above 960</td><td>500</td><td>3</td></tr>
</table>
<table>
<tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td><td>Detector</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>500</td><td>3</td><td>Average</td></tr>
<tr><td>5000</td><td>3</td><td>Peak</td></tr>
</table>
</td></tr>
<tr><td>Test setup:</td><td>For radiated emissions below 30MHz
 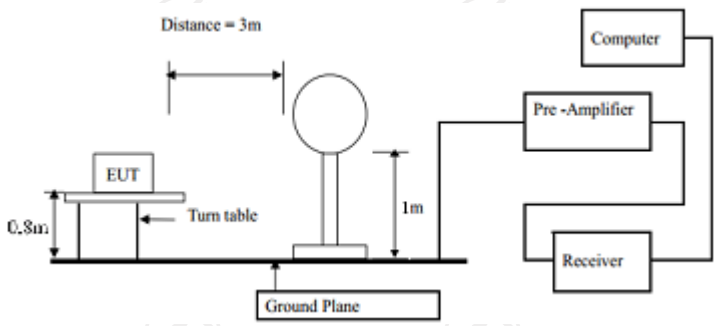

30MHz to 1GHz</td></tr>
</table>

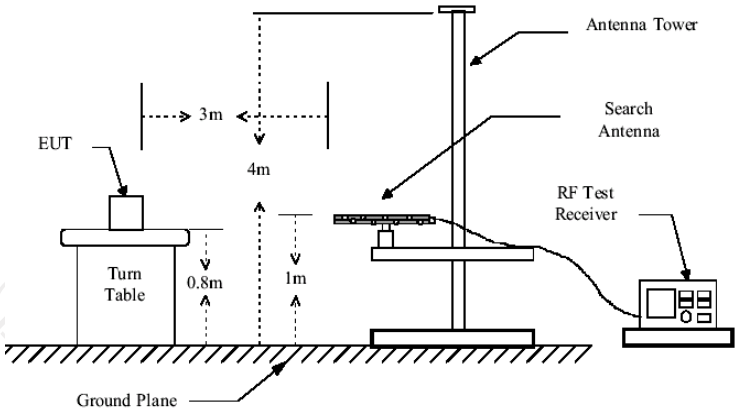

Above 1GHz

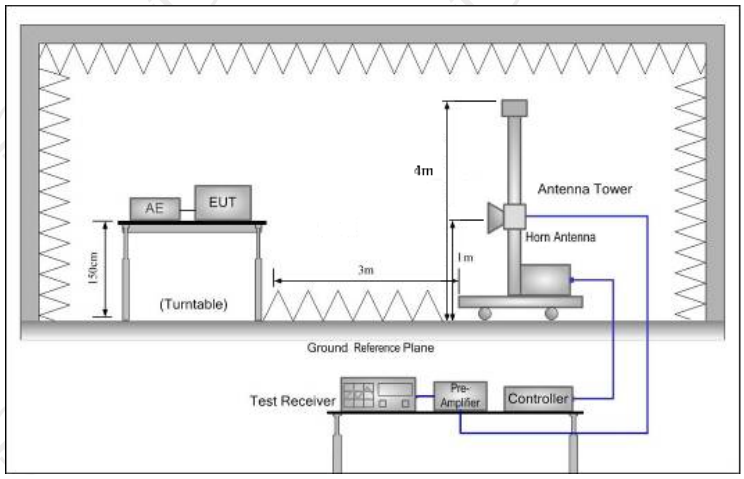

Test Procedure:

1. For the radiated emission test below 1GHz:
   The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
   For the radiated emission test above 1GHz:
   Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

	measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for f >1 GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com

6.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Test Receiver	ROHDE&SCHWARZ	ESIB7	100197	Jul. 29, 2020
Spectrum Analyzer	ROHDE&SCHWARZ	FSQ40	200061	Sep. 11, 2020
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 08, 2020
Pre-amplifier	HP	8447D	2727A05017	Sep. 08, 2020
Loop antenna	ZHINAN	ZN30900A	12024	Oct. 27, 2020
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 06, 2020
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 06, 2020
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 06, 2020
Antenna Mast	Keleto	RE-AM	N/A	N/A
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Sep. 08, 2020
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Sep. 08, 2020
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.7.3. Test Data

Please refer to following diagram for individual

Below 1GHz

Horizontal:

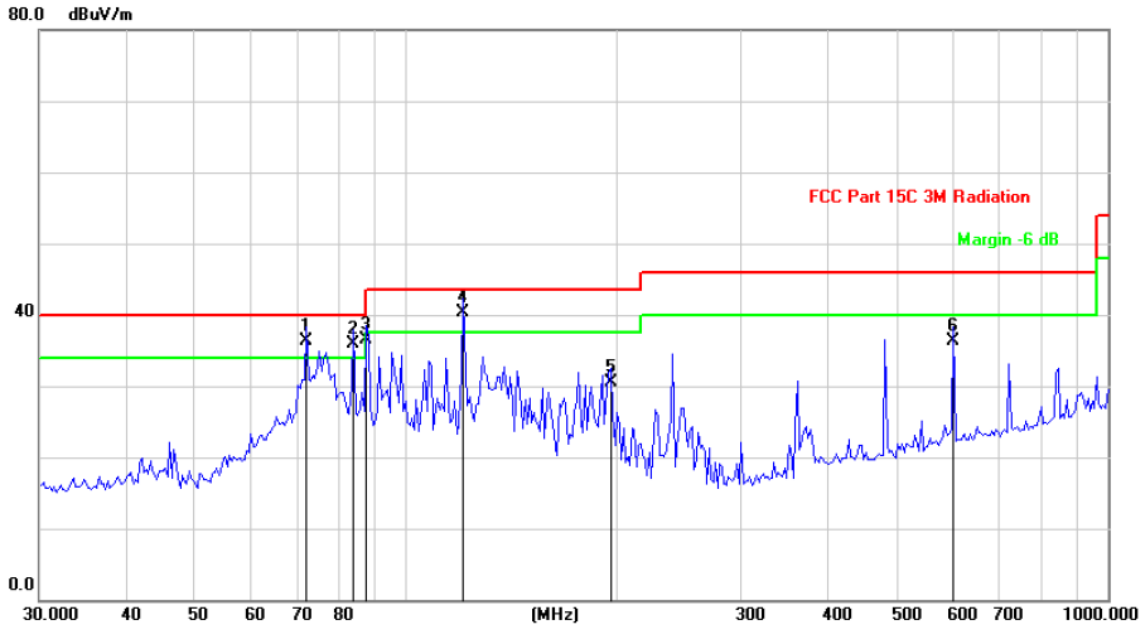

Site | Polarization: *Horizontal* | Temperature: 25

Limit: FCC Part 15C 3M Radiation | Power: AC 120V/60Hz | Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	72.2111	52.45	-16.14	36.31	40.00	-3.69	QP
2	!	84.2839	50.19	-14.36	35.83	40.00	-4.17	QP
3	!	87.9136	48.56	-12.09	36.47	40.00	-3.53	QP
4	*	120.6118	52.55	-12.20	40.35	43.50	-3.15	QP
5		195.8701	44.89	-14.46	30.43	43.50	-13.07	QP
6		602.9287	41.67	-5.42	36.25	46.00	-9.75	QP

Vertical:

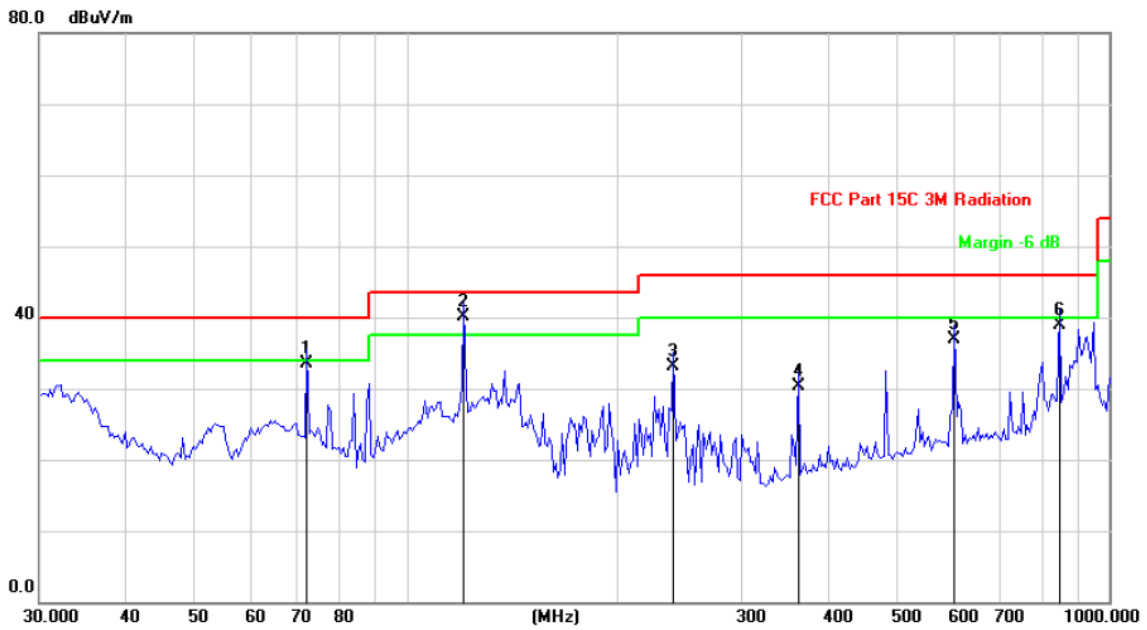

Site | Polarization: *Vertical* | Temperature: 25

Limit: FCC Part 15C 3M Radiation | Power: AC 120V/60Hz | Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		72.2111	49.61	-16.14	33.47	40.00	-6.53	QP
2	*	120.6118	52.39	-12.20	40.19	43.50	-3.31	QP
3		240.1442	46.07	-13.05	33.02	46.00	-12.98	QP
4		360.9775	39.80	-9.55	30.25	46.00	-15.75	QP
5		602.9287	42.30	-5.42	36.88	46.00	-9.12	QP
6		850.7603	42.14	-3.16	38.98	46.00	-7.02	QP

Note: *1.The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported*

2. Measurements were conducted in all three channels (high, middle, low), and the worst case Mode (Highest channel) was submitted only.

3. Freq. = Emission frequency in MHz
Measurement (dBµV/m) = Reading level (dBµV) + Corr. Factor (dB)
Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
Limit (dBµV/m) = Limit stated in standard
Margin (dB) = Measurement (dBµV/m) – Limits (dBµV/m)
** is meaning the worst frequency has been tested in the test frequency range*

Test Result of Radiated Spurious at Band edges

Lowest channel 2402:

Horizontal:

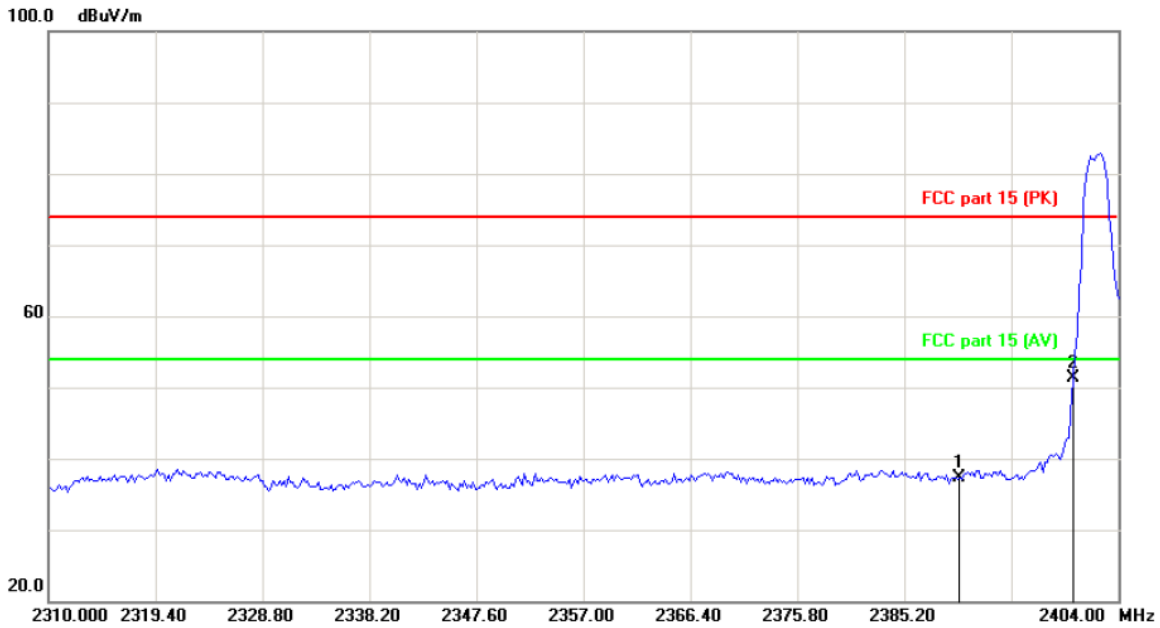

Site	Polarization: *Horizontal*	Temperature: 25
Limit: FCC part 15 (PK)	Power:	Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2390.000	50.42	-13.15	37.27	74.00	-36.73	peak
2	*	2400.000	64.42	-13.12	51.30	74.00	-22.70	peak

Vertical:

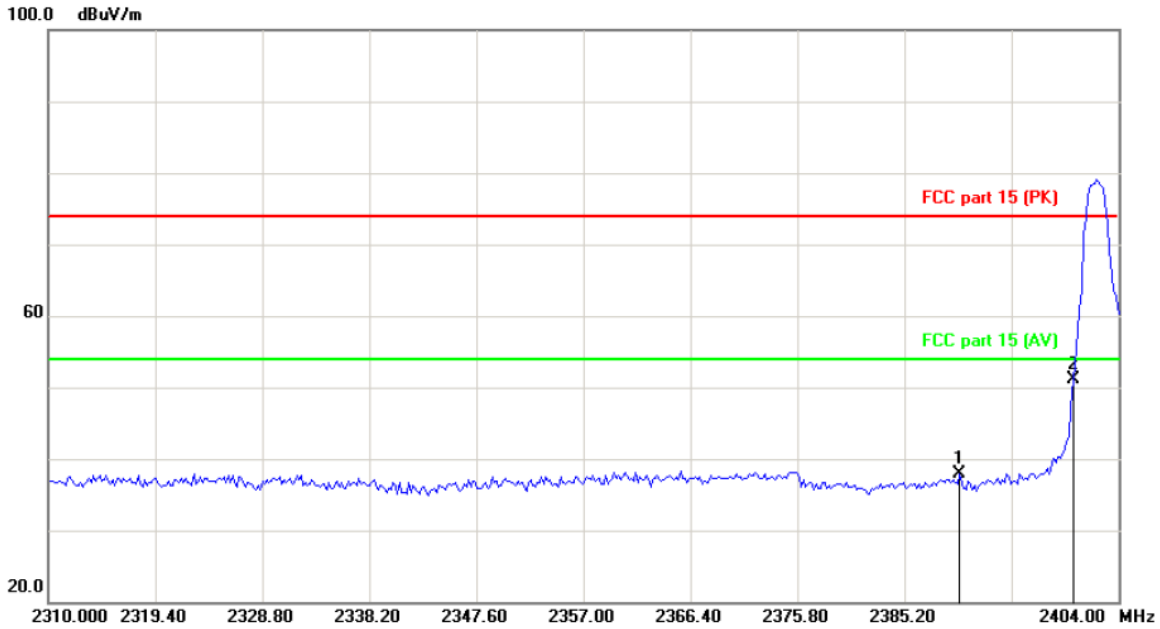

Site	Polarization: *Vertical*	Temperature: 25
Limit: FCC part 15 (PK)	Power:	Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2390.000	51.04	-13.15	37.89	74.00	-36.11	peak
2	*	2400.000	64.31	-13.12	51.19	74.00	-22.81	peak

Highest channel 2480:

Horizontal:

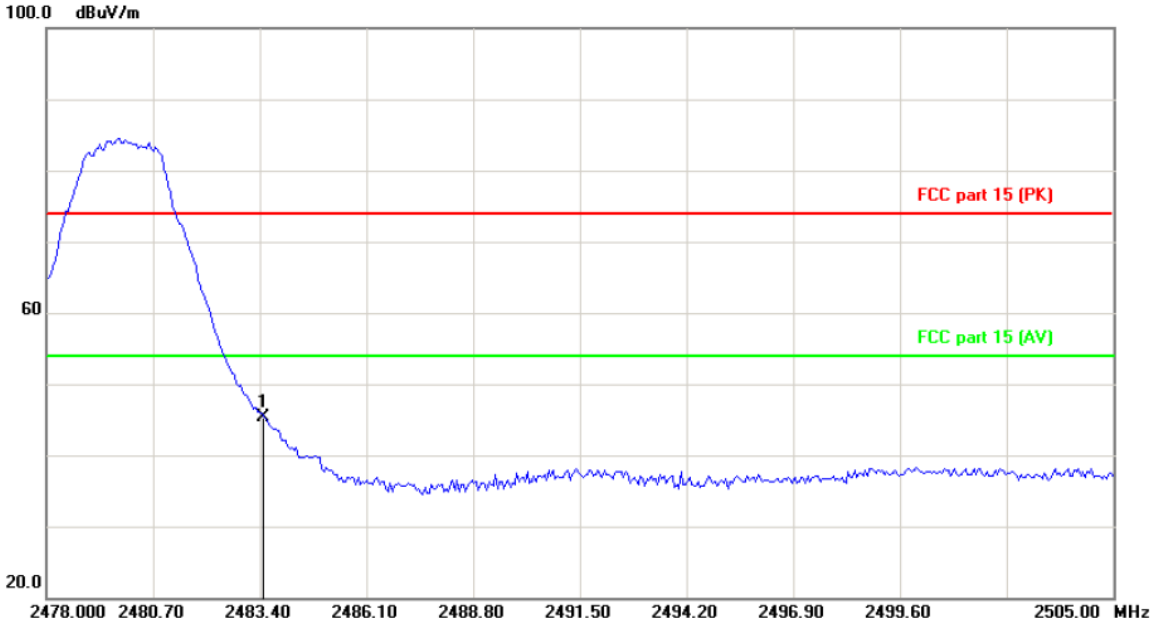

Site
Limit: FCC part 15 (PK)
Polarization: *Horizontal*
Power:
Temperature: 25
Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	2483.500	58.19	-12.84	45.35	74.00	-28.65	peak

Vertical:

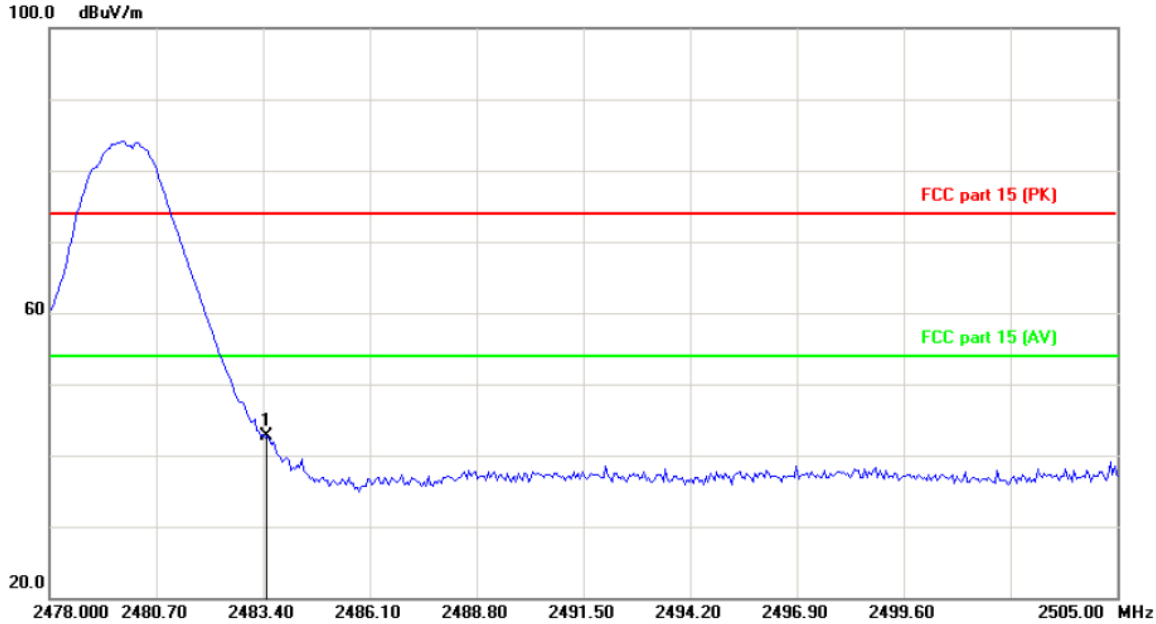

Site	Polarization: *Vertical*	Temperature: 25
Limit: FCC part 15 (PK)	Power:	Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	2483.500	55.53	-12.84	42.69	74.00	-31.31	peak

Above 1GHz

Low channel: 2402 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBuV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4804	H	45.29	---	0.66	45.95	---	74	54	-8.05
7206	H	37.46	---	9.50	46.96	---	74	54	-7.04
---	H	---	---	---	---	---	---	---	---
4804	V	44.73	---	0.66	45.39	---	74	54	-8.61
7206	V	38.05	---	9.50	47.55	---	74	54	-6.45
---	V	---	---	---	---	---	---	---	---

Middle channel: 2440 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4880	H	43.75	---	0.99	44.74	---	74	54	-9.26
7320	H	38.19	---	9.87	48.06	---	74	54	-5.94
---	H	---	---	---	---	---	---	---	---
4880	V	44.03	---	0.99	45.02	---	74	54	-8.98
7320	V	37.87	---	9.87	47.74	---	74	54	-6.26
---	V	---	---	---	---	----	---	---	---

High channel: 2480 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4960	H	46.79	---	1.33	48.12	---	74	54	-5.88
7440	H	38.05	---	10.22	48.27	---	74	54	-5.73
---	H	---	---	---	---	----	---	---	---
4960	V	47.68	---	1.33	49.01	---	74	54	-4.99
7440	V	37.39	---	10.22	47.61	---	74	54	-6.39
---	V	---	---	---	---	---	---	---	---

Note:

1. *Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier*
2. *Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
4. *Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.*
5. *Data of measurement shown "---"in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.*
6. *All the restriction bands are compliance with the limit of 15.209.*

Appendix A: Photographs of Test Setup

Refer to the test report No. TCT200521E013

Appendix B: Photographs of EUT

Refer to the test report No. TCT200521E013

********END OF REPORT********