



DATE: 21 December 2017

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Orcam Technologies Ltd.

Equipment under test:

Wearable Camera

MyMe2

(Zigbee/BLE transceiver)

Tested by:

M. Zohar

Approved by:

I. Raz

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Orcam Technologies Ltd.

Wearable Camera

MyMe2

FCC ID: 2AAWI-MYME

This report concerns:	Original Grant:	X
	Class I Change:	
	Class II Change:	

Equipment type: Digital Transmission System

Limits used: 47CFR15 Section 15.247

Measurement procedure used is KDB 558074 D01 v03r05 and ANSI C63.10:2013.

Application for Certification
prepared by:
R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7116002
e-mail Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")
Ram Ben Yehuda
13 Hartom Street
Jerusalem, 91450
Israel
Tel: +972-2-591-7805
Fax: +972-2-586-0121
e-mail: : Rami.Ben-Yehuda@orcaml.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	5
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	8
1.5	Test Facility	8
1.6	Measurement Uncertainty	8
2.	SYSTEM TEST CONFIGURATION -----	9
2.1	Justification	9
2.2	EUT Exercise Software	10
2.3	Special Accessories	10
2.4	Equipment Modifications	10
2.5	Configuration of Tested System	10
3.	CONDUCTED & RADIATED MEASUREMENT TEST SET-UP PHOTOS -----	11
4.	CONDUCTED EMISSION FROM AC MAINS -----	14
4.1	Test Specification	14
4.2	Test Procedure	14
4.3	Test Limit	14
4.4	Test Results.....	15
5.	6 DB MINIMUM BANDWIDTH -----	25
5.1	Test Specification	25
5.2	Test Procedure	25
5.3	Test Limit	25
5.4	Test Results.....	25
5.5	Test Equipment Used; 6dB Bandwidth	30
6.	MAXIMUM TRANSMITTED PEAK POWER OUTPUT -----	31
6.1	Test Specification	31
6.2	Test Procedure	31
6.3	Test Limit	31
6.4	Test Results.....	32
6.5	Test Equipment Used; Maximum Peak Power Output.....	42
7.	BAND EDGE SPECTRUM -----	43
7.1	Test Specification	43
7.2	Test Procedure	43
7.3	Test Limit	43
7.4	Test Results.....	43
7.5	Test Equipment Used; Band Edge Spectrum	47
8.	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS -----	48
8.1	Test Specification	48
8.2	Test Procedure	48
8.3	Test Limit	48
8.4	Test Results.....	48
8.5	Test Instrumentation Used, Emission in Non Restricted Frequency Bands ...	49
8.6	Field Strength Calculation	50
9.	EMISSIONS IN RESTRICTED FREQUENCY BANDS -----	51
9.1	Test Specification	51
9.2	Test Procedure	51
9.3	Test Limit	52
9.4	Test Results for BLE	53
9.5	Test Results for WiFi	53
9.6	Test Instrumentation Used; Emissions in Restricted Frequency Bands	60



10.	TRANSMITTED POWER DENSITY -----	61
10.1	Test Specification	61
10.2	Test Procedure	61
10.3	Test Limit	61
10.4	Test Results.....	62
10.5	Test Equipment Used; Transmitted Power Density	67
11.	AVG. FACTOR CALCULATION-----	68
11.1	Test Equipment Used, Average Factor	69
12.	ANTENNA GAIN/INFORMATION-----	70
13.	R.F EXPOSURE/SAFETY-----	71
14.	APPENDIX A - CORRECTION FACTORS -----	72
14.1	Correction factors for RF OATS Cable 35m.....	72
14.2	Correction factors for RF OATS Cable 10m ITL #1794	73
14.3	Correction factor for RF CABLE for Semi Anechoic Chamber.....	74
14.4	Correction factors for biconical antenna – ITL # 1356	75
14.5	Correction factors for log periodic antenna – ITL # 1349.....	76
14.6	Correction factors for Active Loop Antenna	77
14.7	Correction factors for Horn ANTENNA.....	78
14.8	Correction factors for Horn Antenna	79



1. General Information

1.1 Administrative Information

Manufacturer:	Orcam Technologies Ltd.
Manufacturer's Address:	13 Hartom St., Jerusalem, 91450 Israel Tel: +972-2-591-7805 Fax: +972-2-586-0121
Manufacturer's Representative:	Ram Ben Yehuda
Equipment Under Test (E.U.T):	Wearable Camera
Equipment Model No.:	MyMe2
Equipment Serial No.:	16230035
Date of Receipt of E.U.T:	February 6, 2017
Start of Test:	February 6, 2017 December 21, 2017* See Note below
End of Test:	February 19, 2017 December 21, 2017* See Note below
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	FCC Part 15, Subpart C

*Note - Average Factor testing was performed again on December 21, 2017.



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

OrCam MyMe is a wearable device that uses smart artificial vision technology to recognize people. Clip the device onto your shirt and as you walk around with it, MyMe will notify you of people in your area and load profiles with contextual information.

MyMe communicates with you through your phone, smartwatch or Bluetooth earpiece. The privacy of people around you is left undisturbed as the device does not save any image and does not record any sound.

Model name	MYME2
Working voltage	Rechargeable battery via AC/DC adapter Manufactory: DELL Model:LA90PM130 p/n: 6C3W2
Mode of operation	1.Transceiver BLE 2. Transceiver Wi-Fi/g/n
Modulations	For Wi-Fi/g/n only: 64QAM
Assigned Frequency Range	2400.0-2483.5MHz
Operating Frequency Range	For BLE : 2402.0-2480.0MHz For Wi-Fi g/n: 2412.0-2472.0MHz
Transmit power	For BLE : ~ 0.0dBm For Wi-Fi g/n: ~14.0dBm
Antenna Gain	1.0dBi
Channel BW	For BLE : 2.0MHz For Wi-Fi g/n: 20.0MHz

1.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in KDB 558074 D01 v03r05 and ANSI C63.10:2013. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Conducted Emission

(CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
for open site:

30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.19 dB

>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.51 dB

2. System Test Configuration

2.1 Justification

The E.U.T can operate in 2 operation mode options: IEEE 802.15.1 standard (BLE) or IEEE 802.11g/n standard (Wi-Fi/g/n) only with 20MHz CBW and 64QAM modulation).

For BLE - The unit was evaluated while transmitting at the low channel (2402MHz), the mid channel (2440MHz) and the high channel (2480MHz)

For Wi-Fi g/n - The unit was evaluated while transmitting at the low channel (2412MHz), the mid channel (2437MHz) and the high channel (2472MHz)

The evaluation was performed while the E.U.T was connected to a laptop via USB port in charge mode as the “worst case”.

Exploratory emission testing was performed in 3 orthogonal polarities to determine the “worst case” radiation. Based on the below results the “worst case” for both the Wi-Fi and the BLE was the Y axis. See *Figure 1* and *Figure 2* below.

Orientation	Frequency	Field Strength	2 nd Harmonic	3 th Harmonic	Band Edge
	(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)
X axis	2412.0	106.6	56.2	57.7	47.3
	2436.0	106.9	56.5	58.0	-
	2472.0	105.8	56.0	58.2	46.6
Y axis	2412.0	107.0	56.2	58.1	48.0
	2436.0	107.7	56.1	58.0	-
	2472.0	106.4	56.5	58.0	46.5
Z axis	2412.0	104.7	56.5	58.3	45.7
	2436.0	105.9	56.5	58.5	-
	2472.0	105.6	56.3	58.5	45.8

Figure 1. Screening Results WI-FI

Orientation	Frequency	Field Strength	2 nd Harmonic	3 th Harmonic	Band Edge
	(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)
X axis	2402.0	94.2	56.0	58.0	48.3
	2440.0	94.1	56.5	58.3	-
	2480.0	94.5	56.2	58.1	48.3
Y axis	2402.0	95.0	56.6	59.2	48.4
	2440.0	95.0	56.7	58.9	-
	2480.0	96.1	56.6	58.6	48.5
Z axis	2402.0	92.4	56.3	58.4	48.0
	2440.0	92.5	56.3	58.4	-
	2480.0	92.0	56.7	58.6	47.9

Figure 2. Screening Results BLE

2.2 *EUT Exercise Software*

No special exercise software was used.

2.3 *Special Accessories*

Laptop: manufacturer: DELL

Model: LATITUDE E5440

S/N/n: 6KCCXZ1

2.4 *Equipment Modifications*

No modifications were necessary in order to achieve compliance.

2.5 *Configuration of Tested System*

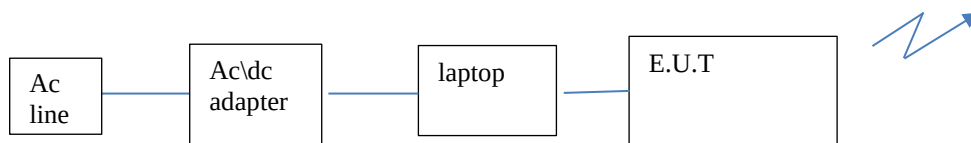


Figure 3. Configuration of Tested System

3. Conducted & Radiated Measurement Test Set-Up Photos



Figure 4. Conducted Emissions AC line Test



Figure 5. Radiated Emission Test



Figure 6. Radiated Emission Test

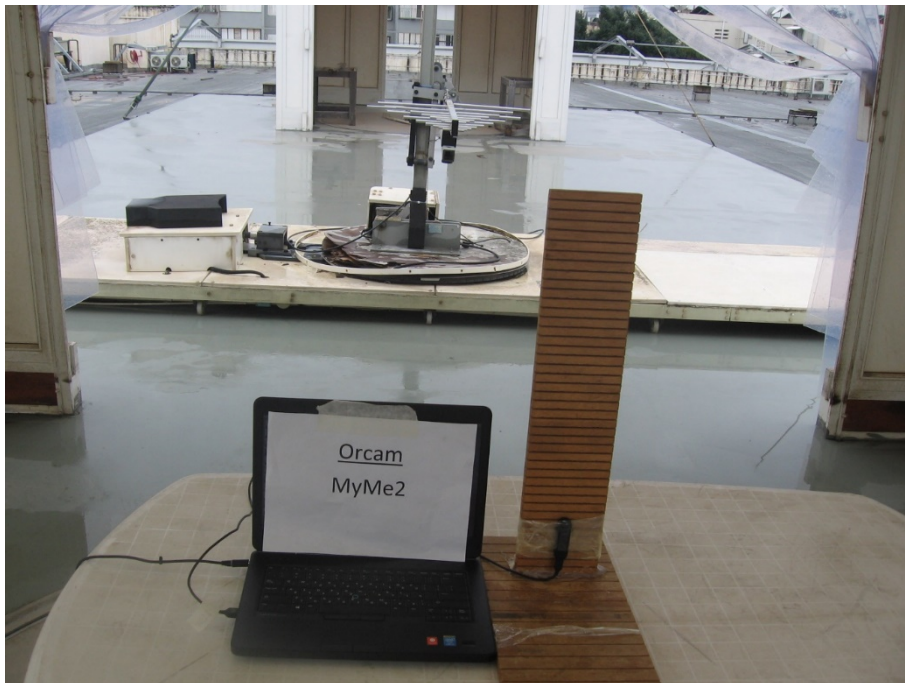


Figure 7. Radiated Emission Test



Figure 8. Radiated Emission Test



Figure 9. Radiated Emission Test

4. Conducted Emission From AC Mains

4.1 Test Specification

FCC Part 15, Subpart C, Section 15.207

4.2 Test Procedure

(Temperature (19°C)/ Humidity (39%RH))

The E.U.T operation mode and test setup are as described in Section 2 of this report. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on a 0.8 meter high wooden table, 0.4 meter from the room's vertical wall. In the case of a floor-standing E.U.T., it was placed on the horizontal ground plane.

The E.U.T was powered from 115 V AC / 60 Hz via 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T.

The center of the E.U.T.'s AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in the photograph, *Figure 4. Conducted Emissions AC line Test.*

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits were loaded to the receiver and are displayed on the receiver's spectrum display.

The E.U.T was evaluated in 2 operational modes: BLE / Wi-Fi

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Test Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.4 Test Results

JUDGEMENT: Passed by 11.9 dB

BLE:

The margin between the emission levels and the specification limit is, in the worst case, 16.54 dB for the phase line at 0.450 MHz and 16.82 dB at 0.450 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 10* to *Figure 13*.

WiFi:

The margin between the emission levels and the specification limit is, in the worst case, 11.90 dB for the phase line at 0.450 MHz and 16.55 dB at 0.450 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 14* to *Figure 17*.

Conducted Emission

E.U.T Description: Wearable Camera
Type: MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: : Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: BLE

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CE22BQP			
Trace2:	CE22BAP			
Trace3:	---			
	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	158 kHz	36.19	-29.37
2	Average	174 kHz	21.73	-33.03
1	Quasi Peak	226 kHz	29.14	-33.45
2	Average	242 kHz	21.01	-31.01
2	Average	310 kHz	18.72	-31.24
1	Quasi Peak	330 kHz	18.59	-40.85
2	Average	414 kHz	28.04	-19.52
1	Quasi Peak	418 kHz	35.32	-22.16
1	Quasi Peak	450 kHz	38.94	-17.92
2	Average	450 kHz	30.33	-16.54
1	Quasi Peak	590 kHz	29.47	-26.52
2	Average	590 kHz	20.93	-25.06
1	Quasi Peak	866 kHz	29.04	-26.95
2	Average	866 kHz	20.73	-25.26
2	Average	970 kHz	19.50	-26.49
1	Quasi Peak	1.038 MHz	28.20	-27.79
1	Quasi Peak	1.314 MHz	29.23	-26.76
2	Average	1.314 MHz	19.84	-26.15
1	Quasi Peak	1.662 MHz	27.47	-28.52
2	Average	1.73 MHz	18.49	-27.50

Date: 15.FEB.2017 10:22:16

Figure 10. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: BLE

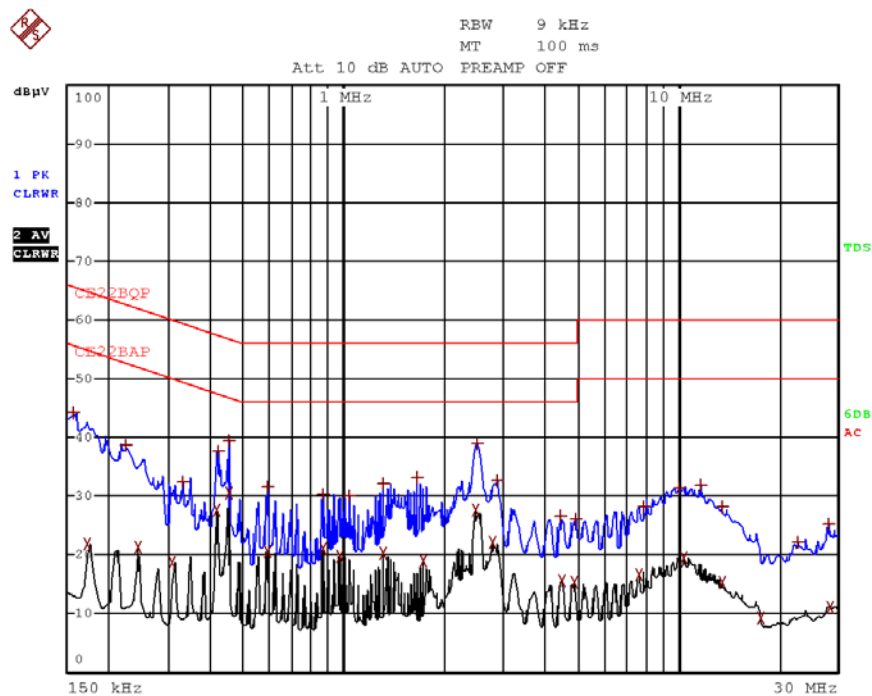


Figure 11. Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: BLE

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CE22BQP			
Trace2:	CE22BAP			
Trace3:	---			
TRACE		FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	154 kHz	30.68	-35.09
2	Average	174 kHz	22.02	-32.73
1	Quasi Peak	238 kHz	31.17	-30.98
2	Average	242 kHz	20.96	-31.06
1	Quasi Peak	278 kHz	32.19	-28.67
2	Average	310 kHz	19.12	-30.84
1	Quasi Peak	418 kHz	35.18	-22.30
2	Average	418 kHz	27.05	-20.42
1	Quasi Peak	450 kHz	38.85	-18.02
2	Average	450 kHz	30.04	-16.82
1	Quasi Peak	590 kHz	28.63	-27.36
2	Average	590 kHz	19.55	-26.44
1	Quasi Peak	866 kHz	27.21	-28.78
2	Average	866 kHz	18.80	-27.19
1	Quasi Peak	1.038 MHz	28.38	-27.61
2	Average	1.038 MHz	18.95	-27.04
2	Average	1.386 MHz	18.92	-27.08
1	Quasi Peak	1.454 MHz	29.13	-26.86
1	Quasi Peak	1.698 MHz	26.98	-29.01
2	Average	1.73 MHz	19.74	-26.25

Date: 15.FEB.2017 10:02:12


Figure 12. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: BLE

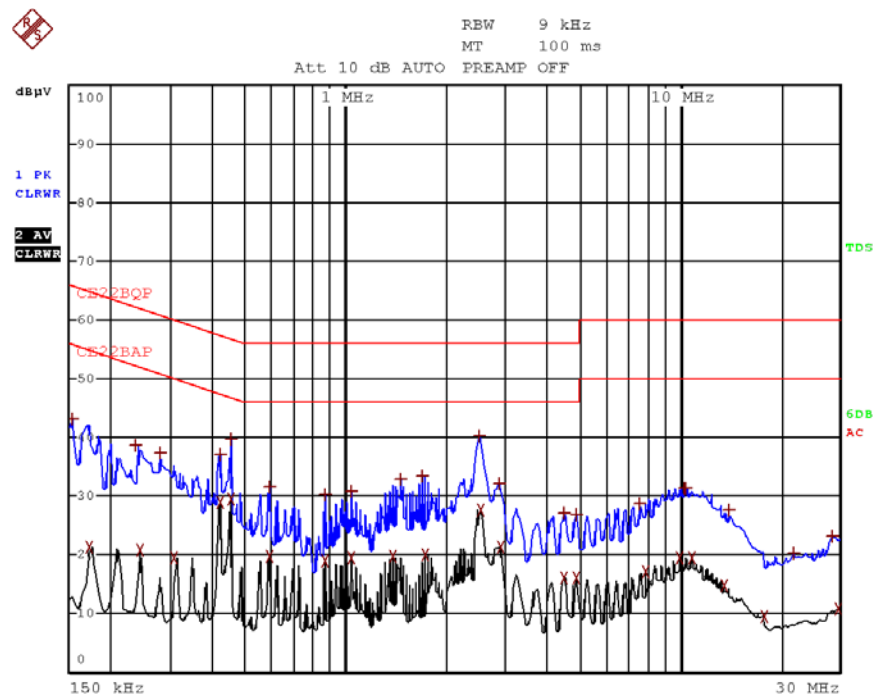

Date: 15.FEB.2017 09:58:00

Figure 13 Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: : Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: Wi-Fi

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CE22BQP			
Trace2:	CE22BAP			
Trace3:	---			
	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	150 kHz	37.39	-28.60
2	Average	174 kHz	26.63	-28.13
1	Quasi Peak	202 kHz	31.78	-31.74
2	Average	242 kHz	25.52	-26.49
1	Quasi Peak	278 kHz	27.74	-33.13
2	Average	310 kHz	22.68	-27.28
2	Average	414 kHz	32.89	-14.67
1	Quasi Peak	418 kHz	35.57	-21.91
1	Quasi Peak	450 kHz	38.70	-18.16
2	Average	450 kHz	34.97	-11.90
1	Quasi Peak	590 kHz	29.54	-26.45
2	Average	590 kHz	25.25	-20.74
1	Quasi Peak	866 kHz	29.32	-26.67
2	Average	866 kHz	25.18	-20.81
1	Quasi Peak	970 kHz	28.90	-27.10
2	Average	970 kHz	24.21	-21.78
2	Average	1.314 MHz	24.65	-21.34
1	Quasi Peak	1.35 MHz	29.58	-26.41
1	Quasi Peak	1.658 MHz	27.82	-28.17
2	Average	1.73 MHz	22.04	-23.95

Date: 15.FEB.2017 09:08:52


Figure 14. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: Wi-Fi

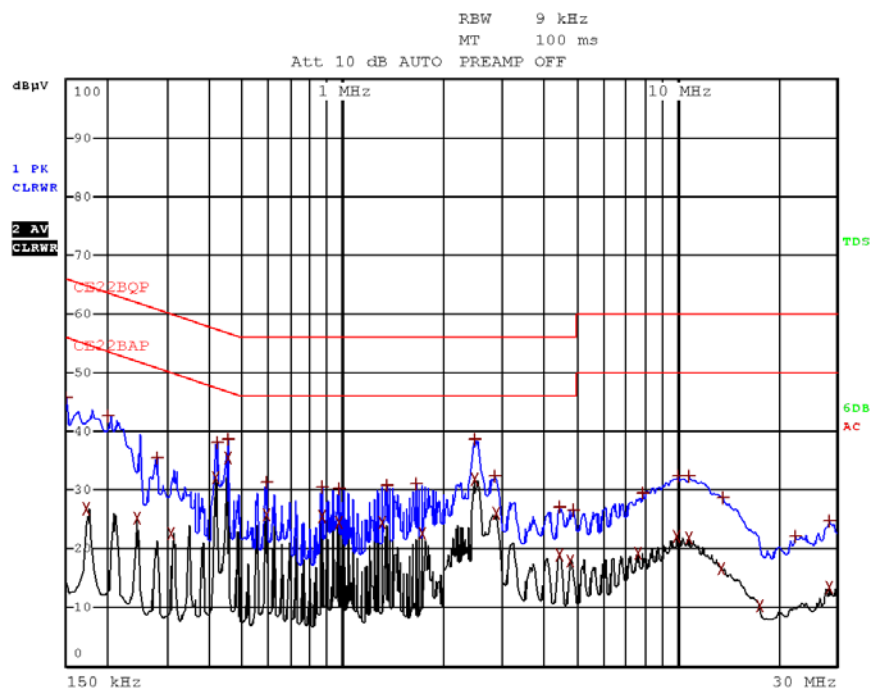

Date: 15.FEB.2017 09:02:27

Figure 15. Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: Wi-Fi

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CE22BQP			
Trace2:	CE22BAP			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
1 Quasi Peak	158 kHz	33.83	-31.73	
2 Average	174 kHz	21.84	-32.92	
1 Quasi Peak	206 kHz	35.33	-28.03	
2 Average	206 kHz	22.06	-31.30	
1 Quasi Peak	278 kHz	32.05	-28.82	
2 Average	310 kHz	19.20	-30.76	
1 Quasi Peak	414 kHz	37.34	-20.22	
2 Average	414 kHz	28.80	-18.76	
1 Quasi Peak	450 kHz	38.90	-17.96	
2 Average	450 kHz	30.31	-16.55	
2 Average	586 kHz	20.89	-25.10	
1 Quasi Peak	590 kHz	28.32	-27.68	
1 Quasi Peak	866 kHz	27.04	-28.96	
2 Average	866 kHz	18.58	-27.41	
2 Average	1.002 MHz	19.43	-26.56	
1 Quasi Peak	1.038 MHz	28.21	-27.78	
1 Quasi Peak	1.418 MHz	29.83	-26.16	
2 Average	1.418 MHz	19.89	-26.10	
1 Quasi Peak	1.694 MHz	29.72	-26.27	
2 Average	1.73 MHz	19.68	-26.31	

Date: 15.FEB.2017 09:30:19


Figure 16. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation: AC/DC adapter
Operation mode: Wi-Fi

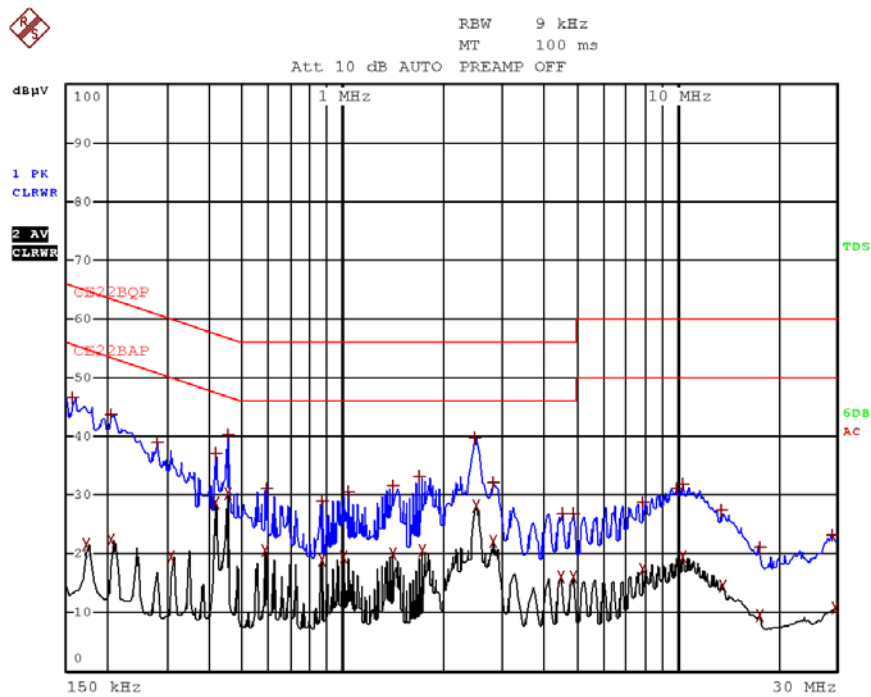

Date: 15.FEB.2017 09:27:47

Figure 17 Detectors: Peak, Quasi-peak, Average



4.5 *Test Equipment Used; Conducted Emission*

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
LISN	Fischer	FCC-LISN-25A	127	June 23, 2016	June 23, 2017
Transient Limiter	HP	11947A	3107A03041	June 15, 2016	June 15, 2017
Spectrum Analyzer	R&S	ESIC7	100724	February 29, 2016	March 1, 2017

Figure 18 Test Equipment Used

5. 6 dB Minimum Bandwidth

5.1 Test Specification

FCC Part 15, Subpart C, Section 247(a)(2)

5.2 Test Procedure

(Temperature (19°C)/ Humidity (45%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground.

The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded. The RBW was set to 100 kHz.

5.3 Test Limit

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


5.4 Test Results

Operation Mode	Operation Frequency (MHz)	Reading (MHz)	Limit (MHz)
BLE	2402.0	0.7	≥ 0.5
	2440.0	0.7	≥ 0.5
	2480.0	0.69	≥ 0.5
Wi-Fi/g	2412.0	16.4	≥ 0.5
	2437.0	16.4	≥ 0.5
	2472.0	16.3	≥ 0.5
Wi-Fi/n	2412.0	16.3	≥ 0.5
	2437.0	16.7	≥ 0.5
	2472.0	17.5	≥ 0.5

Figure 19 6 dB Minimum Bandwidth


JUDGEMENT: Passed

For additional information see *Figure 20 to Figure 28*.

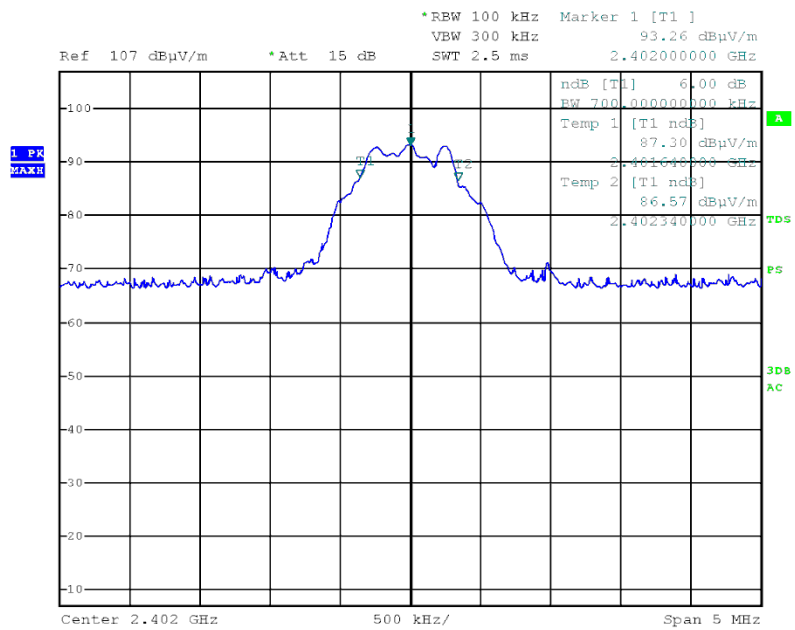


Date: 6.FEB.2017 09:52:37

Figure 20. 2402.0MHz BLE

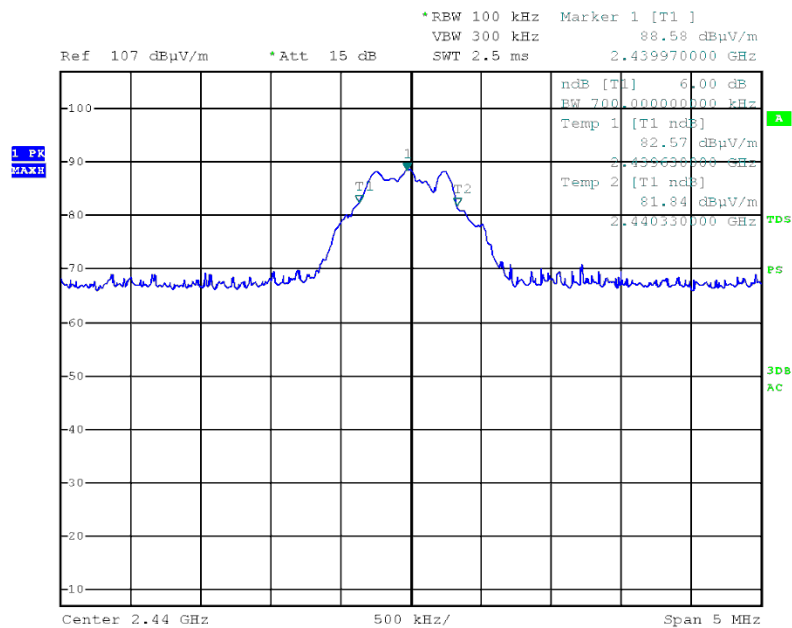


Date: 6.FEB.2017 10:06:30

Figure 21. 2440.0MHz BLE

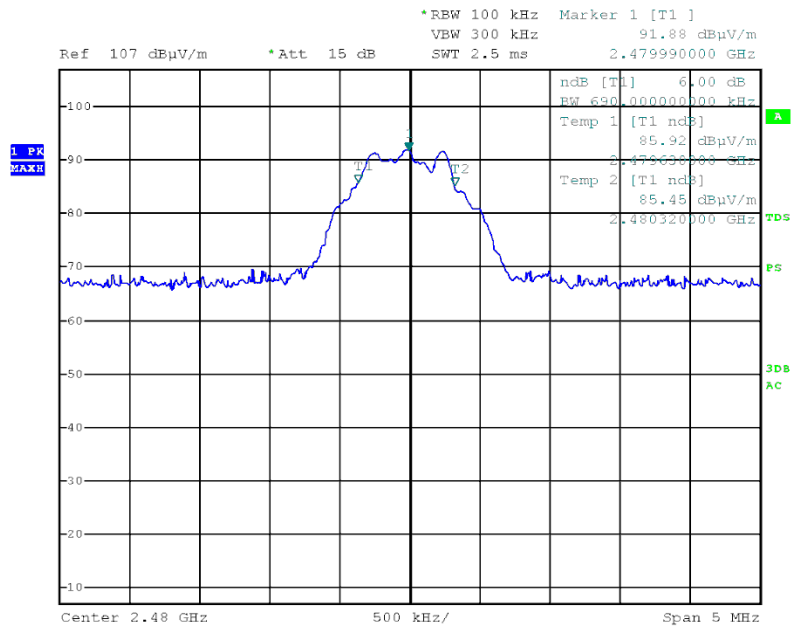


Date: 6.FEB.2017 10:08:09

Figure 22. 2480.0MHz BLE

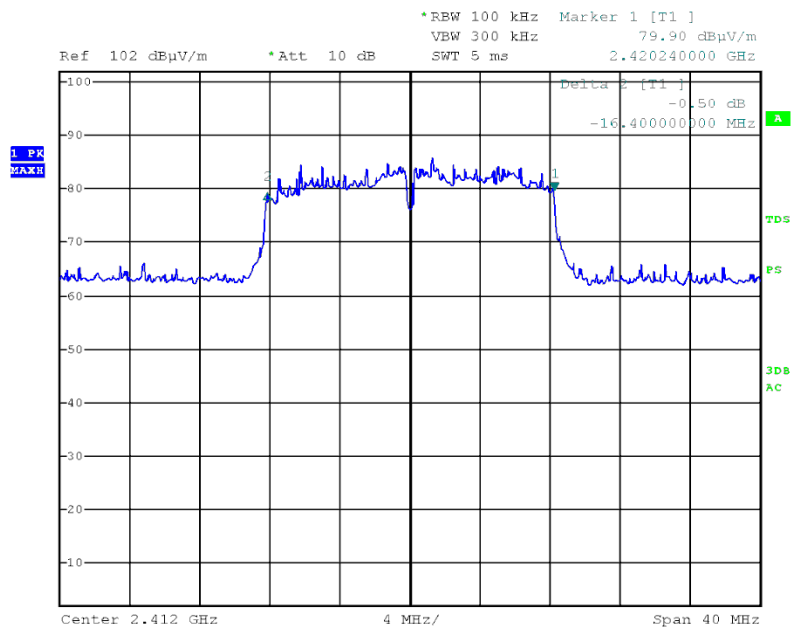


Date: 6.FEB.2017 12:16:25

Figure 23. 2412.0MHz Wi-Fi/g

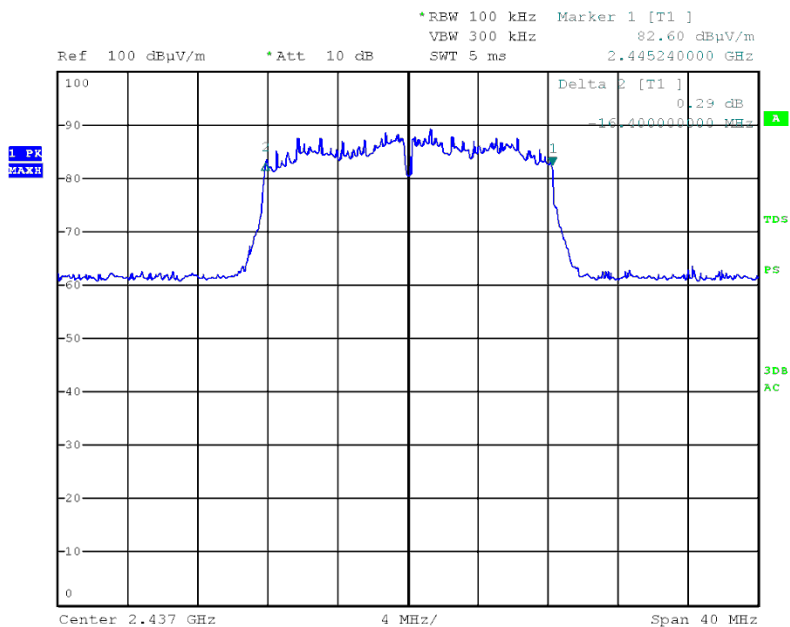


Date: 6.FEB.2017 12:33:36

Figure 24. 2437.0MHz Wi-Fi/g

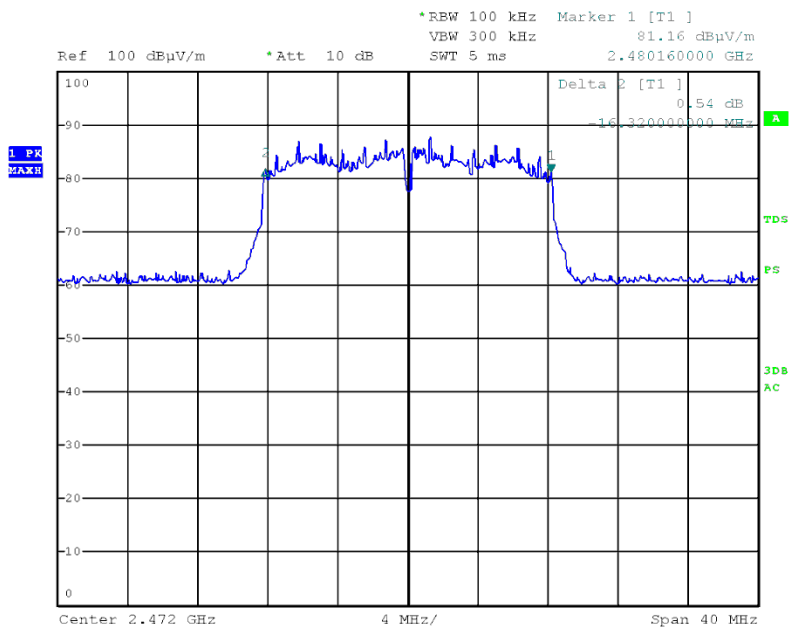


Date: 6.FEB.2017 12:38:25

Figure 25. 2472.0MHz Wi-Fi/g

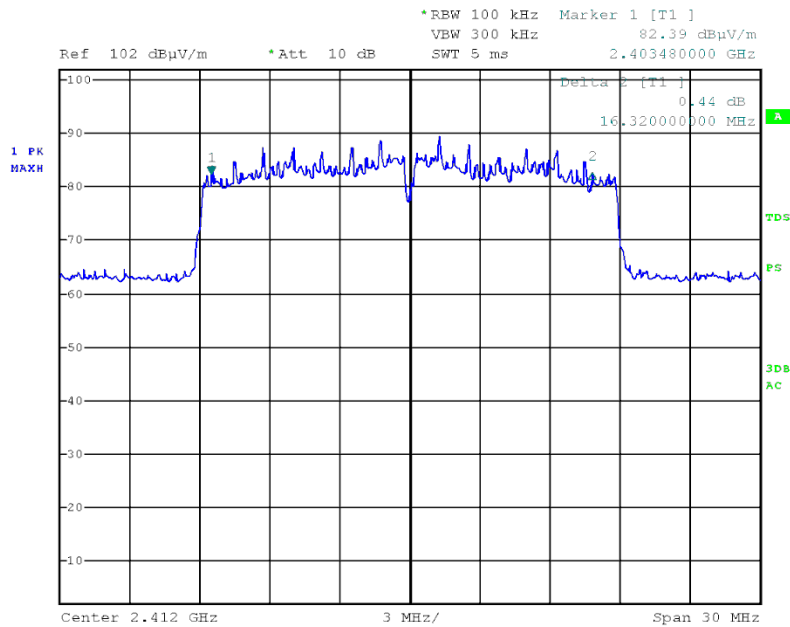


Date: 6.FEB.2017 14:05:09

Figure 26 — 2412.0MHz Wi-Fi/n

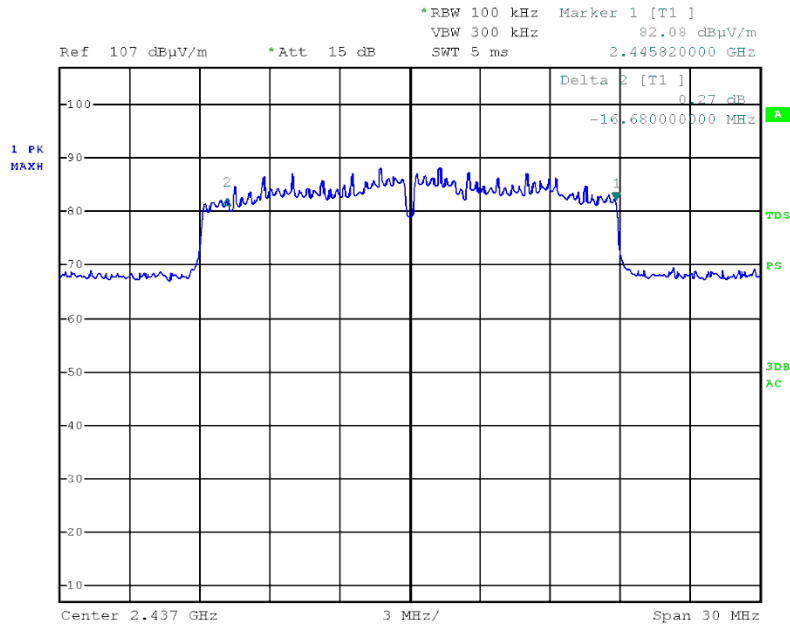

Date: 6.FEB.2017 14:09:47

Figure 27 — 2437.0MHz Wi-Fi/n

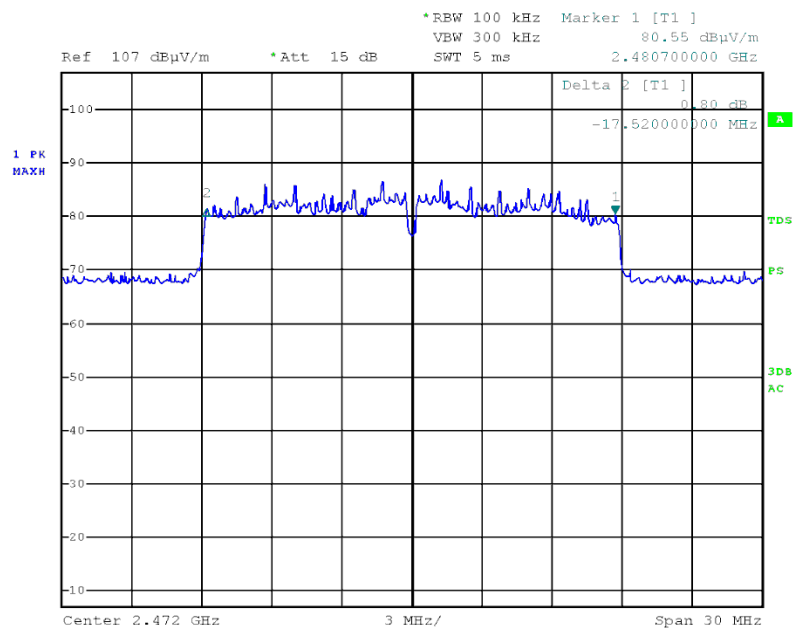

Date: 6.FEB.2017 14:15:23

Figure 28 — 2472.0MHz Wi-Fi/n

5.5 Test Equipment Used; 6dB Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Test Receiver	R&S	ESIC7	100724	February 29, 2016	March 1, 2017
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR

Figure 29 Test Equipment Used

6. Maximum Transmitted Peak Power Output

6.1 Test Specification

FCC, Part 15, Subpart C, Section 247(b)(3)

6.2 Test Procedure

(Temperature (19°C)/ Humidity (45%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)

6.3 Test Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.


6.4 Test Results

Operation Mode	Operation Frequency (MHz)	Pol. (V/H)	Field Strength (dBuV/m)	Power (dBm)	Power (mW)	Limit (mW)	Margin (mW)
BLE	2402.0	V	95.9	0.7	1.18	1000.0	-998.82
		H	90.3	-4.9	0.32	1000.0	-999.676
	2440.0	V	95.4	0.2	1.05	1000.0	-998.95
		H	87.2	-8.0	0.168	1000.0	-999.842
	2480.0	V	96.4	1.2	1.32	1000.0	-998.68
		H	86.1	-9.1	0.12	1000.0	-999.877
Wi-Fi/g	2412.0	V	107.8	12.6	18.2	1000.0	-981.8
		H	101.0	5.8	3.8	1000.0	-996.2
	2437.0	V	108.2	13.0	20.0	1000.0	-980.00
		H	99.6	4.4	2.75	1000.0	-997.25
	2472.0	V	106.4	11.2	13.2	1000.0	-986.8
		H	98.3	3.1	2.04	1000.0	-997.96
Wi-Fi/n	2412.0	V	107.1	11.9	15.5	1000.0	-984.5
		H	98.8	3.6	2.29	1000.0	-997.71
	2437.0	V	106.8	11.6	14.5	1000.0	-985.5
		H	98.4	3.2	2.09	1000.0	-997.91
	2472.0	V	105.1	9.9	9.77	1000.0	-990.23
		H	97.7	2.5	1.78	1000.0	-998.22

Figure 30 Maximum Peak Power Output


JUDGEMENT: Passed by 980.0 mW

For additional information see *Figure 31* to *Figure 48*.

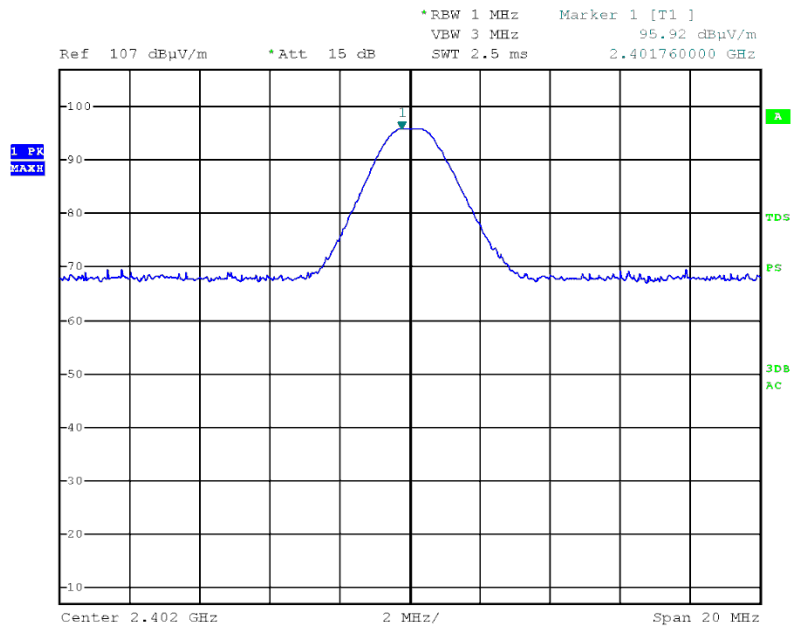


Date: 6.FEB.2017 10:44:32

Figure 31 2402.0MHz – Vertical Polarization - BLE

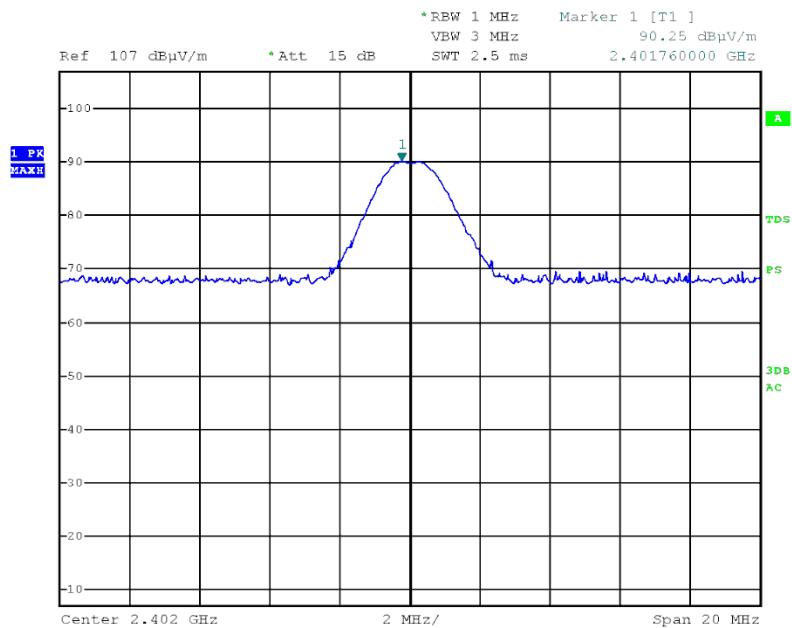


Date: 6.FEB.2017 10:47:05

Figure 32 2402.0MHz – Horizontal Polarization - BLE

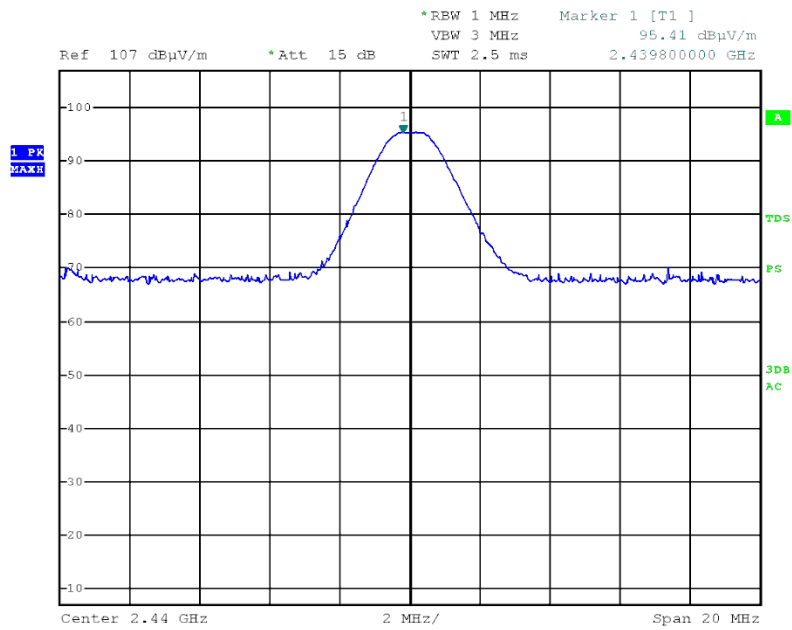


Date: 6.FEB.2017 10:33:51

Figure 33 2440.0MHz – Vertical Polarization - BLE

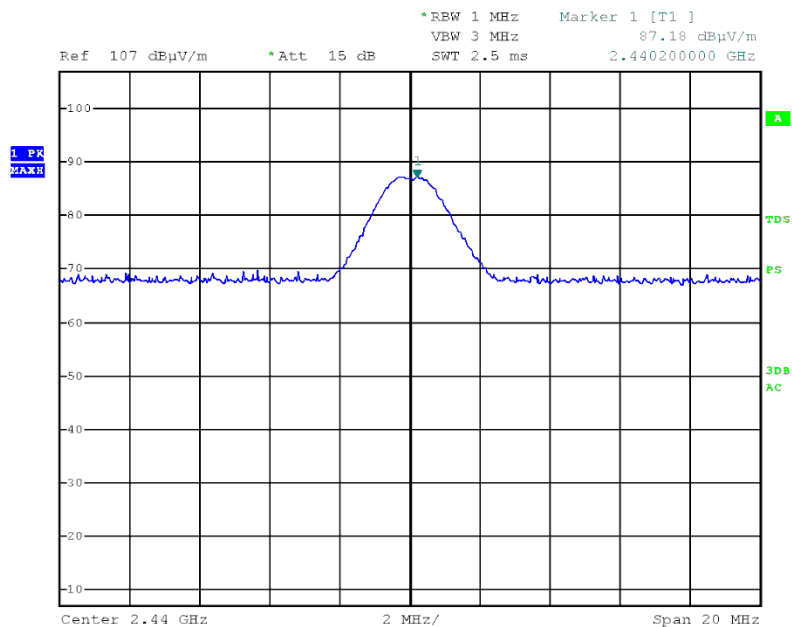


Date: 6.FEB.2017 10:27:05

Figure 34 2440.0MHz – Horizontal Polarization - BLE

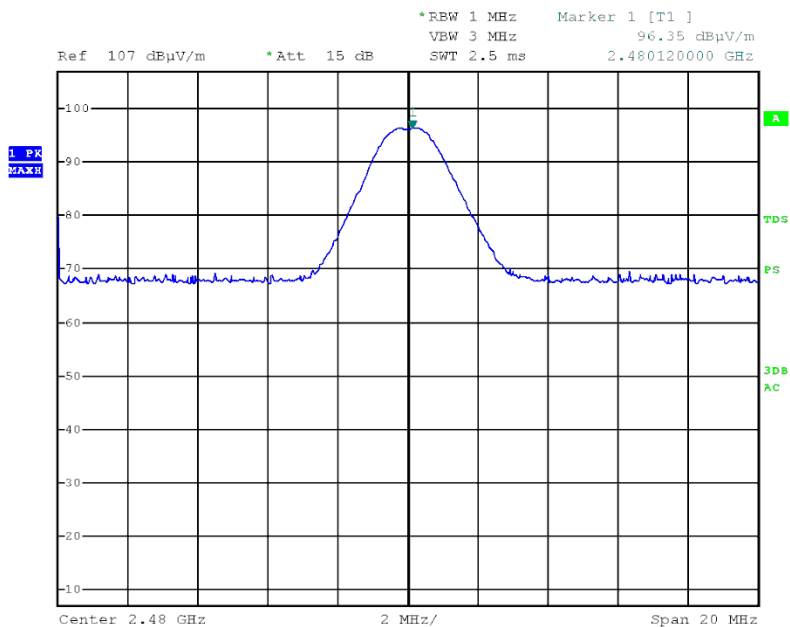


Date: 6.FEB.2017 10:17:40

Figure 35 2480.0MHz – Vertical Polarization - BLE

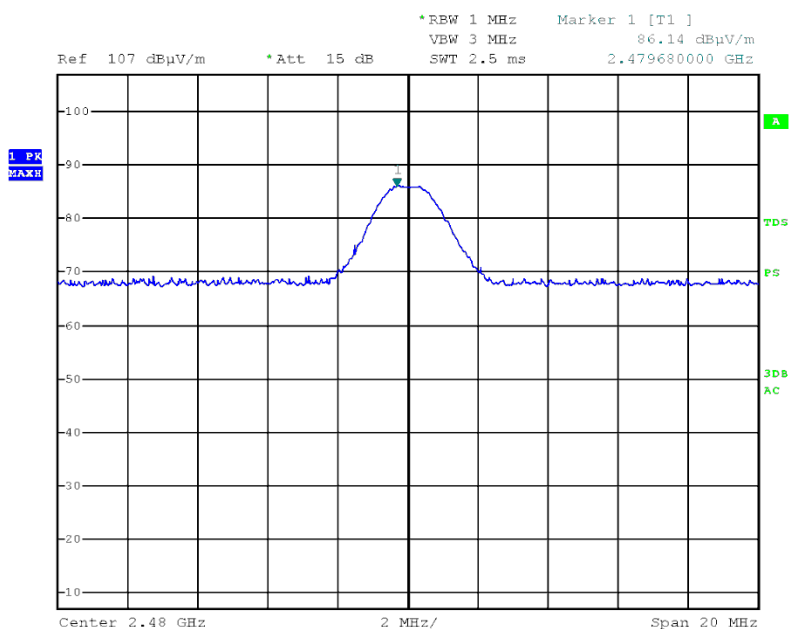


Date: 6.FEB.2017 10:21:06

Figure 36 2480.0MHz – Horizontal Polarization - BLE

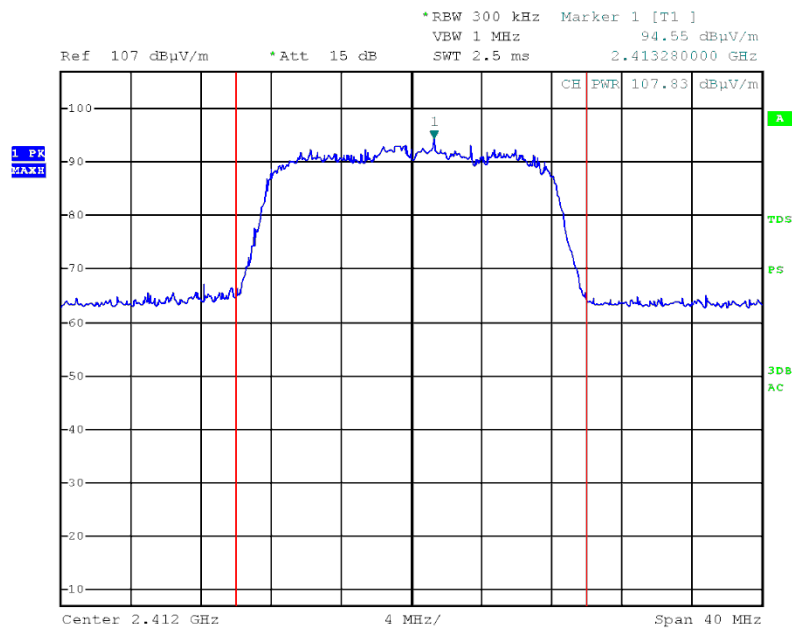


Date: 6.FEB.2017 11:39:35

Figure 37 2412.0MHz – Vertical Polarization - Wi-Fi/g

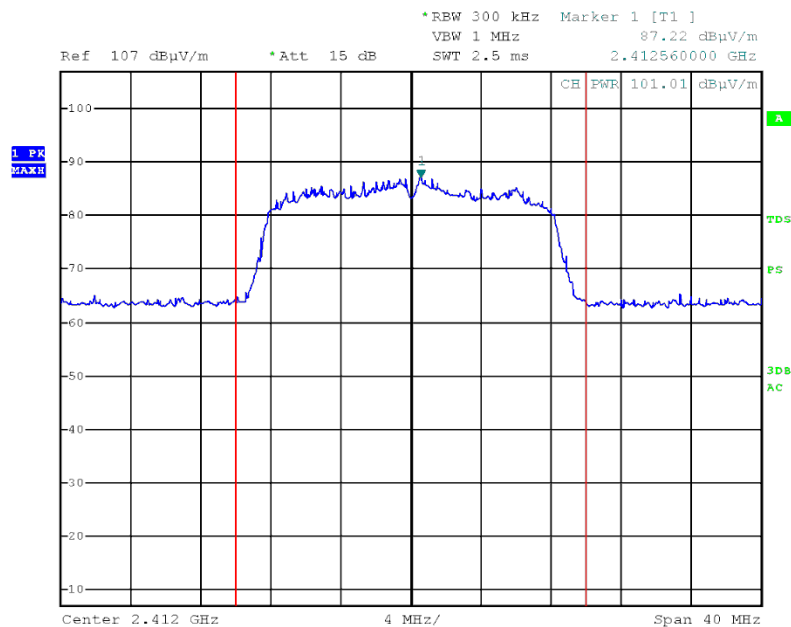


Date: 6.FEB.2017 12:09:26

Figure 38 2412.0MHz – Horizontal Polarization - Wi-Fi/g

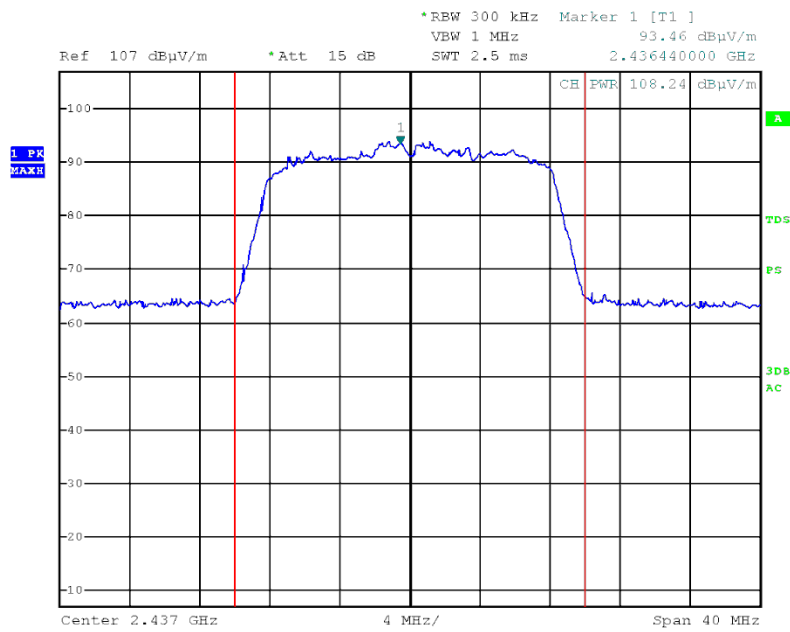


Date: 6.FEB.2017 11:48:14

Figure 39 2437.0MHz – Vertical Polarization - Wi-Fi/g

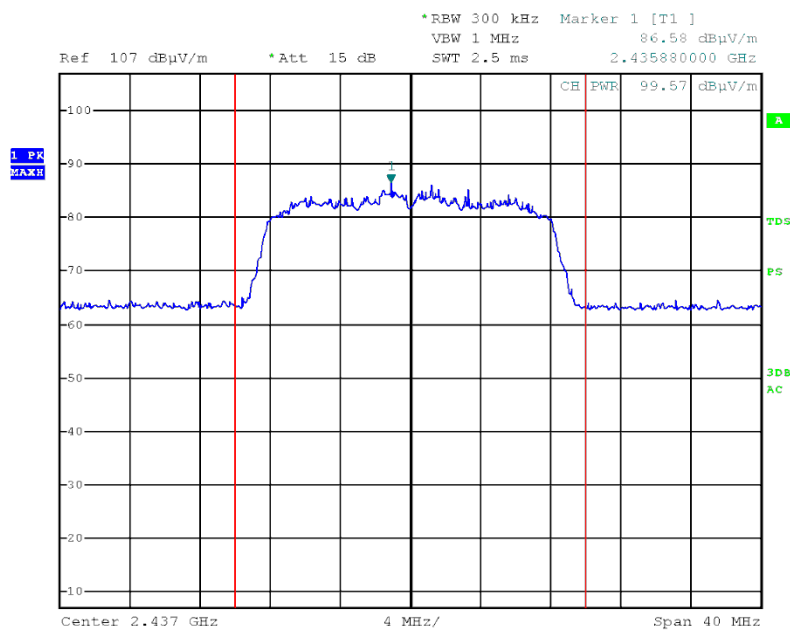


Date: 6.FEB.2017 12:01:39

Figure 40 2437.0MHz – Horizontal Polarization - Wi-Fi/g

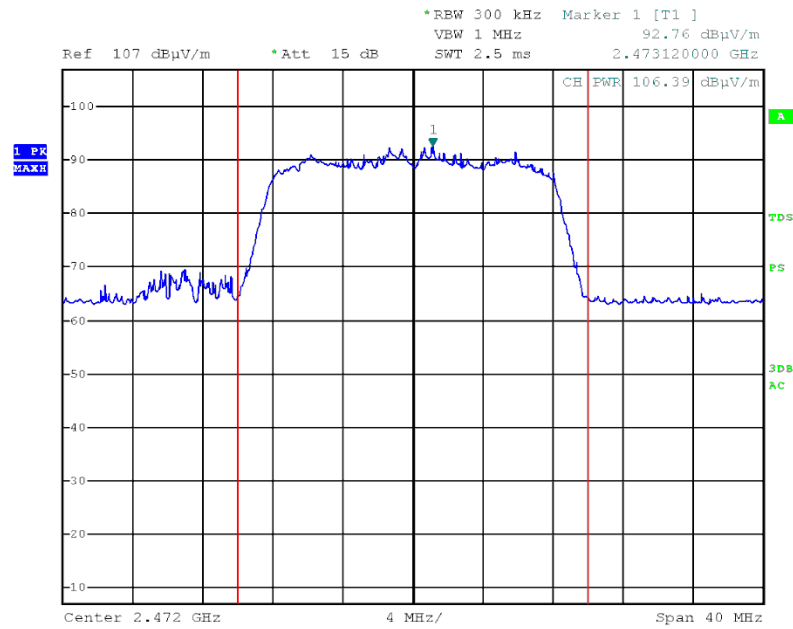


Date: 6.FEB.2017 11:55:15

Figure 41 2472.0MHz – Vertical Polarization -Wi-Fi/g

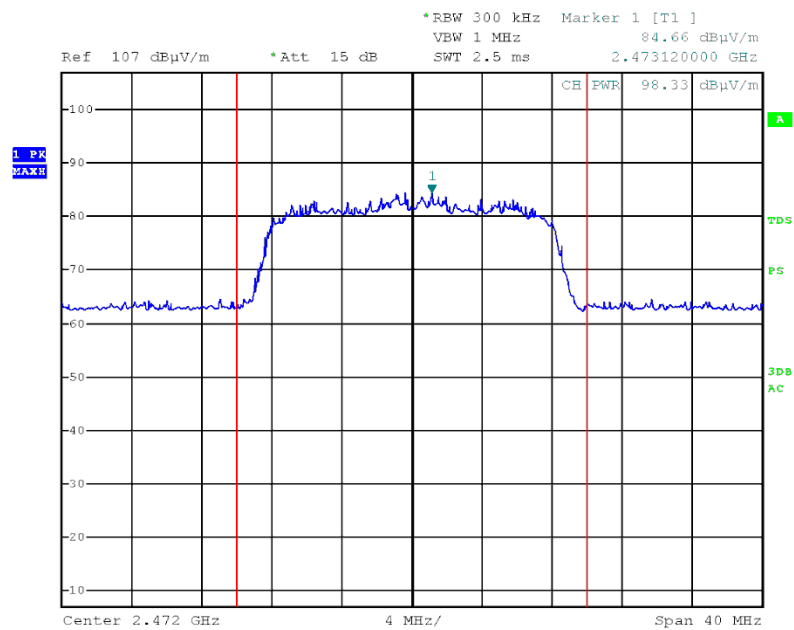


Date: 6.FEB.2017 11:57:55

Figure 42 2472.0MHz – Horizontal Polarization -Wi-Fi/g

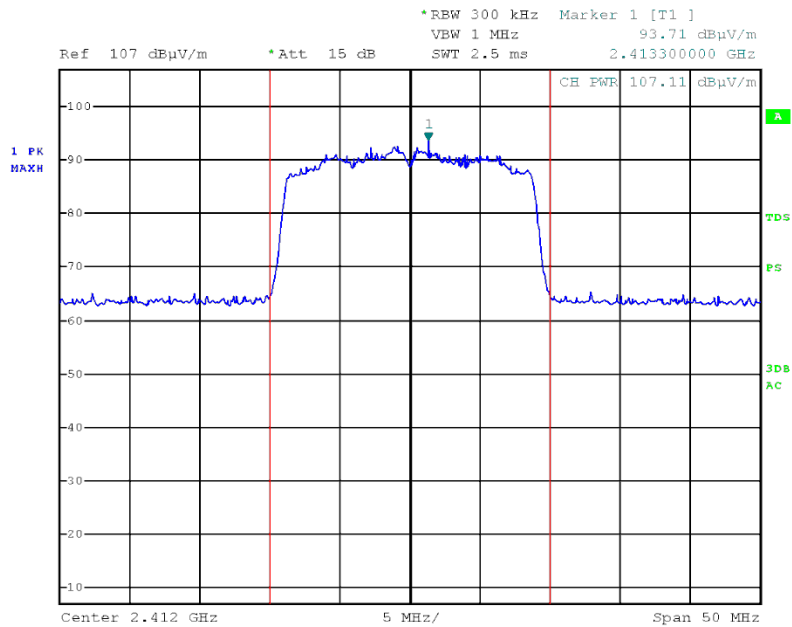


Date: 6.FEB.2017 15:13:40

Figure 43 2412.0MHz – Vertical Polarization - Wi-Fi/n

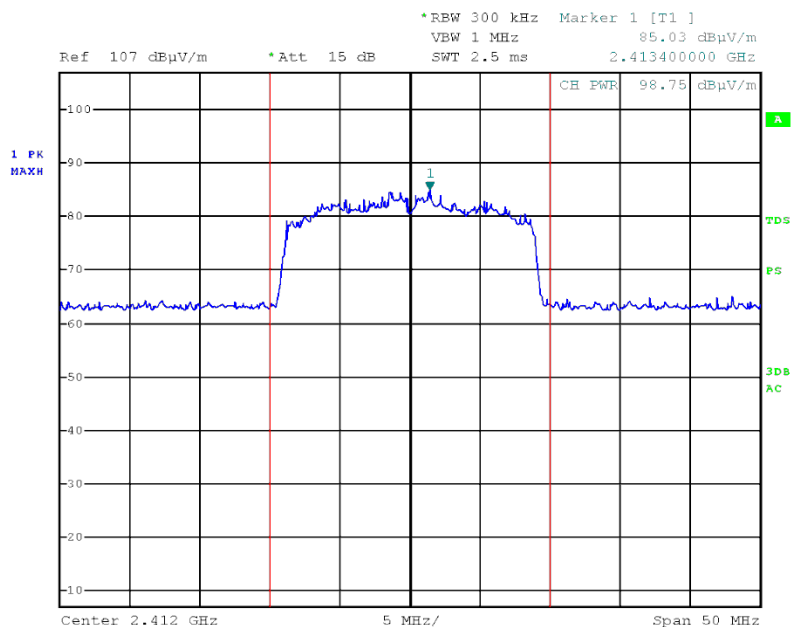


Date: 6.FEB.2017 15:17:38

Figure 44 2412.0MHz – Horizontal Polarization - Wi-Fi/n

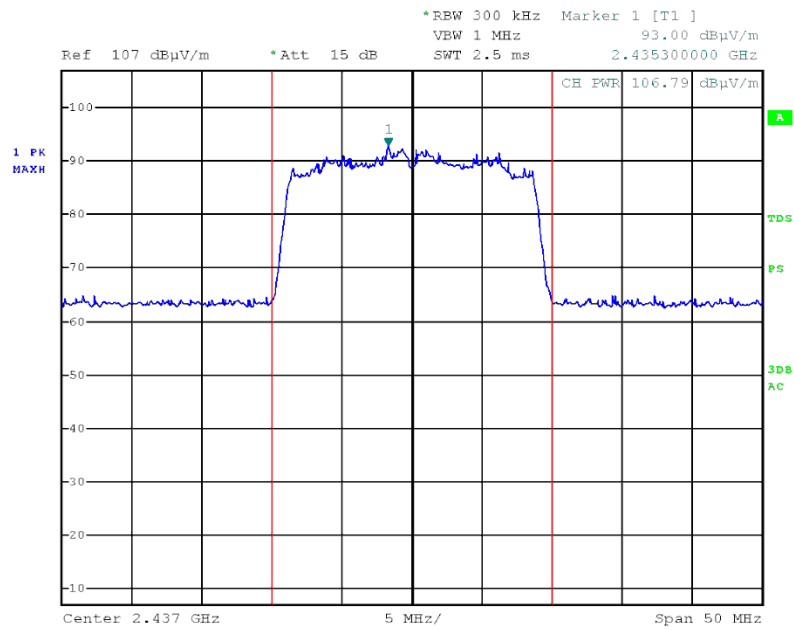


Date: 6.FEB.2017 15:06:28

Figure 45 2437.0MHz – Vertical Polarization - Wi-Fi/n

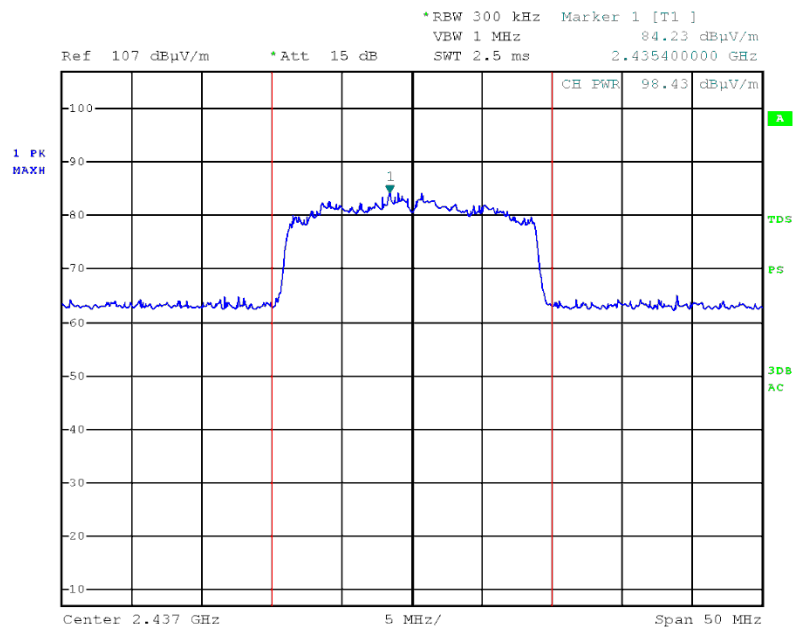


Date: 6.FEB.2017 15:02:40

Figure 46 2437.0MHz – Horizontal Polarization - Wi-Fi/n

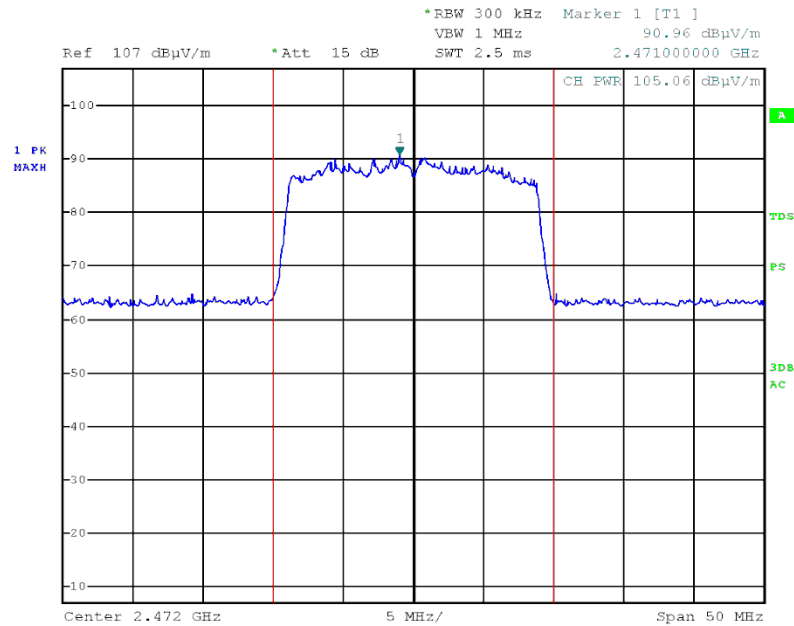

Date: 6.FEB.2017 14:56:43

Figure 47 2472.0MHz – Vertical Polarization - Wi-Fi/n

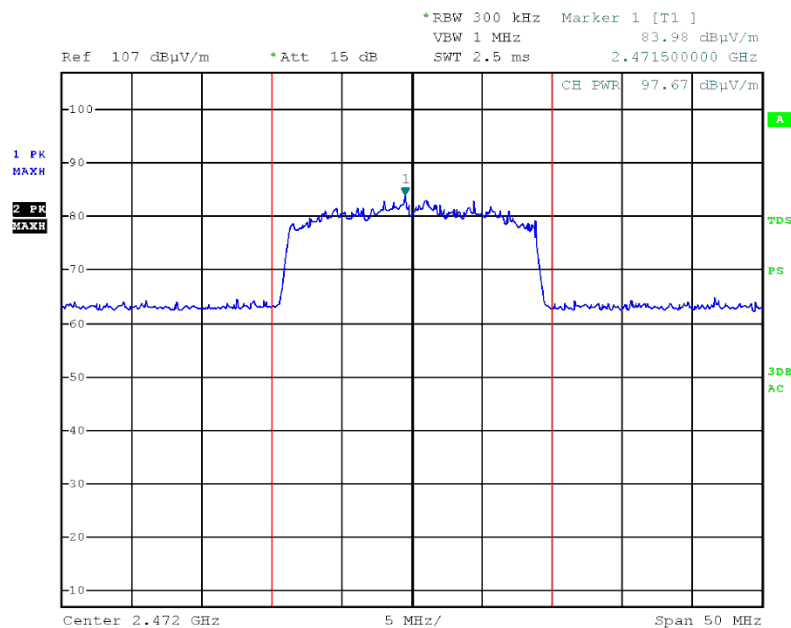

Date: 6.FEB.2017 14:59:54

Figure 48 2472.0MHz – Horizontal Polarization - Wi-Fi/n



6.5 Test Equipment Used; Maximum Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 29, 2016	March 1, 2017
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR

Figure 49 Test Equipment Used

7. Band Edge Spectrum

7.1 Test Specification

FCC, Part 15, Subpart C, Section 247(d)

7.2 Test Procedure

(Temperature (19°C)/ Humidity (40%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground.

The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The RBW was set to 100 kHz.

7.3 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power


7.4 Test Results

Operation Mode	Operation Frequency	Band Edge Frequency	Spectrum Level	Limit	Margin
	(MHz)	(MHz)	(dBuV/m)	(dBuV/m)	(dB)
BLE	Low	2400.0	62.6	74.6	-12.0
	High	2483.5	63.0	72.0	-9.0
Wi-Fi/g	Low	2400.0	57.0	69.6	-12.6
	High	2483.5	61.5	68.0	-6.5
Wi-Fi/n	Low	2400.0	62.3	68.6	-6.3
	High	2483.5	62.0	67.1	-5.1

Figure 50 Band Edge Spectrum


JUDGEMENT: Passed by 5.1 dB

For additional information see *Figure 51* and *Figure 56*.

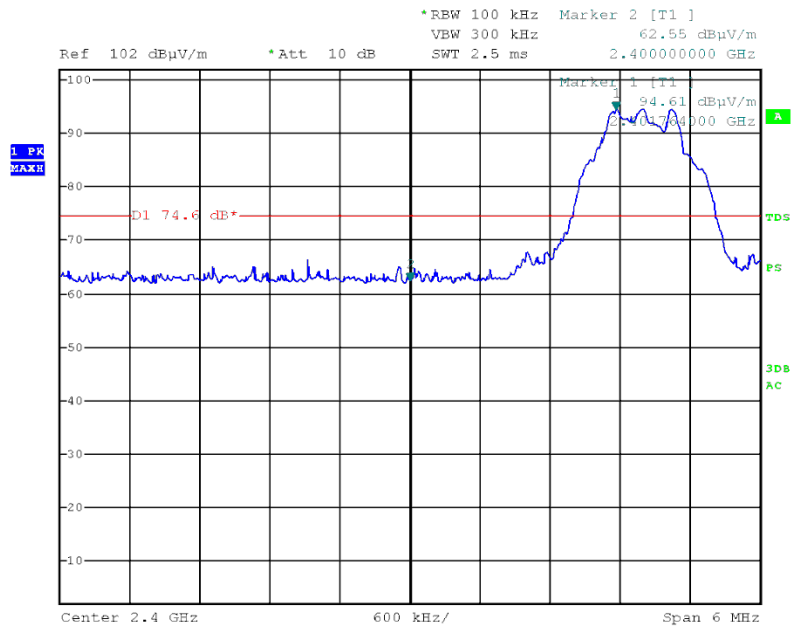


Date: 6.FEB.2017 10:56:48

Figure 51 —Lower Band Edge BLE

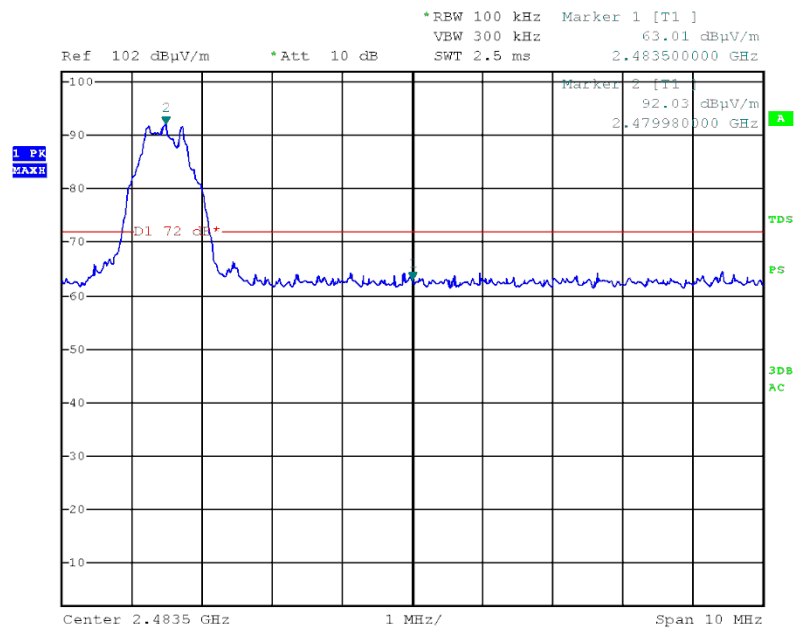


Date: 6.FEB.2017 10:59:57

Figure 52 —Upper Band Edge BLE

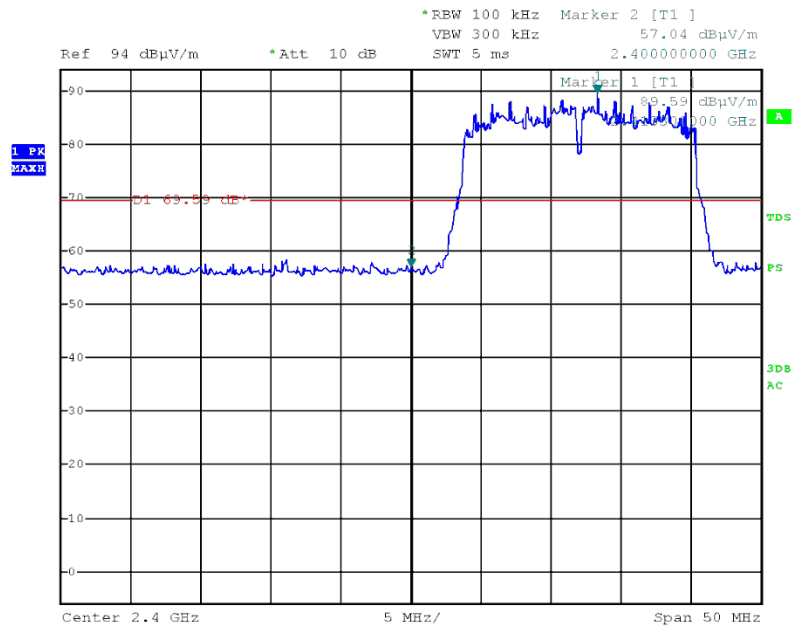


Date: 6.FEB.2017 12:22:54

Figure 53 —Lower Band Edge Wi-Fi/g

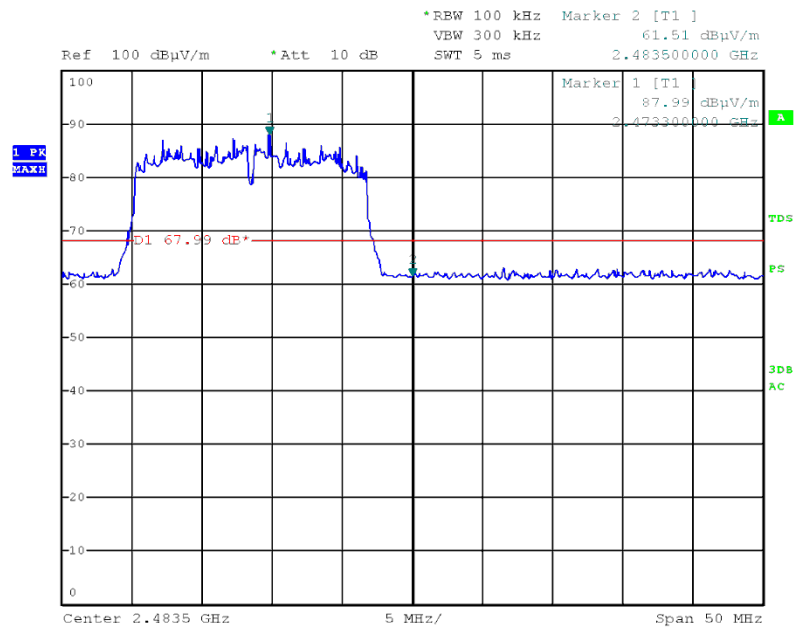


Date: 6.FEB.2017 12:48:25

Figure 54 —Upper Band Edge Wi-Fi/g

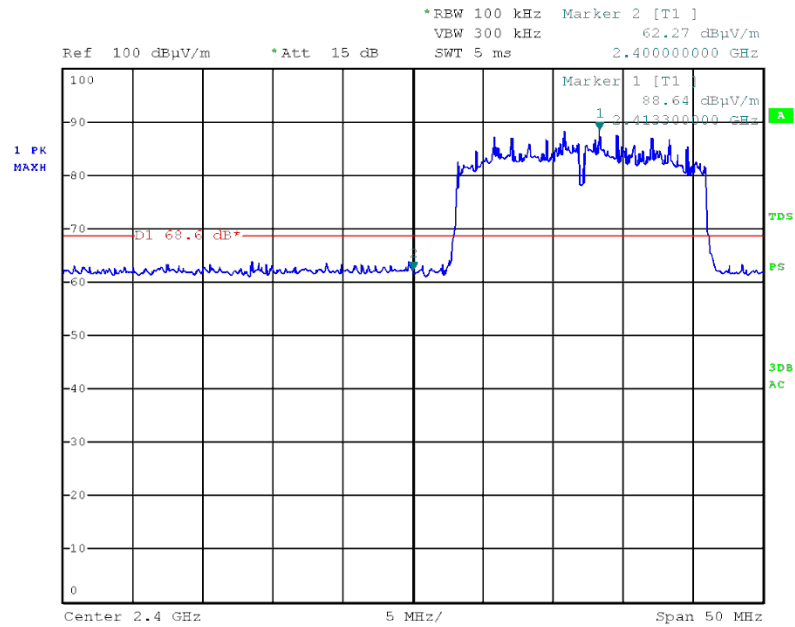

Date: 6.FEB.2017 14:45:19

Figure 55 —Lower Band Edge Wi-Fi/n

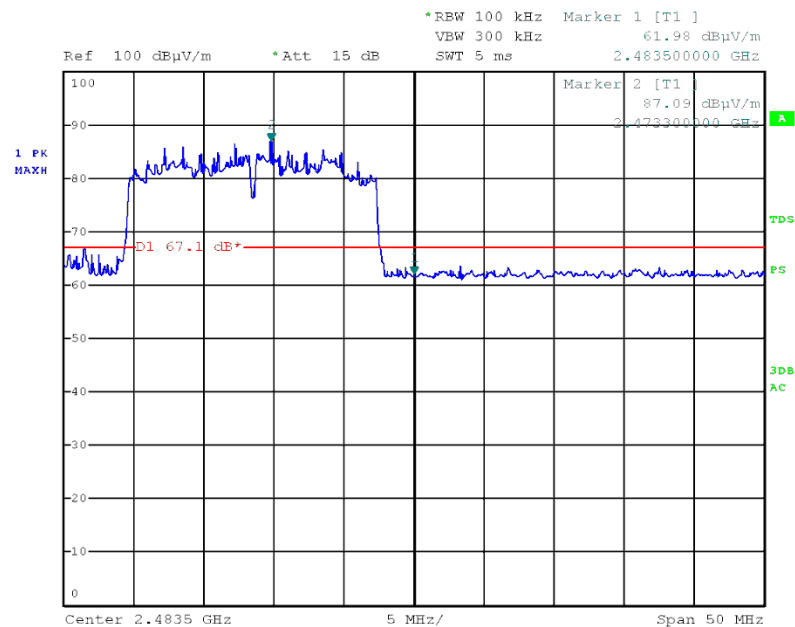

Date: 6.FEB.2017 14:48:27

Figure 56 —Upper Band Edge Wi-Fi/n



7.5 Test Equipment Used; Band Edge Spectrum

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 29, 2016	March 1, 2017
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR

Figure 57 Test Equipment Used

8. Emissions in Non-Restricted Frequency Bands

8.1 Test Specification

FCC, Part 15, Subpart C, Section 247(d)

8.2 Test Procedure

(Temperature (20°C)/ Humidity (41%RH))

The E.U.T. operation mode and test set-up are as described in Section 2 of this report.

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-25.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -25.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The E.U.T. was operated in all 3 operational modes: BLE, Wi-Fi/g and Wi-Fi/n. RBW was set to 100kHz and detector was set to max peak and trace to “max hold”.

8.3 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.4 Test Results

JUDGEMENT: Passed

All detected emissions were greater than 20dB below the fundamental level.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 247(d) specification.

8.5 Test Instrumentation Used, Emission in Non Restricted Frequency Bands

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 29, 2016	March 1, 2017
Spectrum Analyzer	HP	8592L	3826A01204	March 13, 2016	March 13, 2017
EMI Receiver	HP	8542E	3906A00276	March 3, 2016	March 3, 2017
RF Filter Section	HP	85420E	3705A00248	March 3, 2016	March 3, 2017
Spectrum Analyzer	HP	8564E	3442A00275	March 10, 2016	March 10, 2017
Biconical Antenna	EMCO	3110B	9912-3337	March 24, 2016	March 24, 2018
Active Loop Antenna	EMCO	6502	9506-2950	September 12, 2016	September 12, 2017
Log Periodic Antenna	EMCO	3146	9505-4081	April 23, 2016	April 23, 2017
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	March 30, 2017
Low Noise Amplifier	Narda	DBS-0411N313	13	August 8, 2016	August 8, 2017
Low Noise Amplifier	Sophia Wireless	LNA28-B	232	August 8, 2016	August 8, 2017
Spectrum Analyzer	HP	8593EM	3536A00120A DI	March 10, 2016	March 10, 2017
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR

Figure 58 Test Equipment Used

8.6 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors", using the following equation:

$$FS = RA + AF + CF$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

9. Emissions in Restricted Frequency Bands

9.1 Test Specification

FCC, Part 15, Subpart C, Sections 15.209, 15.205, 15.247(d)

9.2 Test Procedure

(Temperature (19°C)/ Humidity (40%RH))

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters, using an OATS.

For measurements between 1.0GHz-25.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -25.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters using an anechoic chamber.

The E.U.T. was operated in all 3 operation modes: BLE, Wi-Fi/g and Wi-Fi/n

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

9.3 Test Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dBµV/m)	Field strength* (dBµV/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

Figure 59 Table of Limits

9.4 **Test Results for BLE**

JUDGEMENT: Passed by 2.7dB

For the operation frequency of 2402 MHz, the margin between the emission level and the specification limit is in the worst case 3.2dB at the frequency of 2390.0 MHz, vertical polarization.

For the operation frequency of 2440 MHz, the margin between the emission level and the specification limit is in the worst case 8.3dB at the frequency of 4880.0 MHz, horizontal polarization.

For the operation frequency of 2480 MHz, the margin between the emission level and the specification limit is in the worst case 2.7dB at the frequency of 2483.5 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The details of the highest emissions are given in *Figure 60* to *Figure 61*.

9.5 **Test Results for WiFi**

JUDGEMENT: Passed by 2.1dB

For the operation frequency of 2412 MHz, the margin between the emission level and the specification limit is in the worst case 2.1dB at the frequency of 2390.0 MHz, vertical polarization.

For the operation frequency of 2437 MHz, the margin between the emission level and the specification limit is in the worst case 22.4dB at the frequency of 4874.0 MHz, horizontal and vertical polarization.

For the operation frequency of 2472 MHz, the margin between the emission level and the specification limit is in the worst case 4.3dB at the frequency of 2483.5 MHz, horizontal polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The details of the highest emissions are given in *Figure 62* to *Figure 65*.

Radiated Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 0.009MHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)
2402.0	2390.0	H	54.7	74.0	-19.3
	2390.0	V	55.6	74.0	-18.4
	4804.0	H	51.6	74.0	-22.4
	4804.0	V	50.9	74.0	-23.1
2440.0	4880.0	H	51.6	74.0	-22.4
	4880.0	V	51.9	74.0	-22.1
2480.0	4960.0	H	50.2	74.0	-23.8
	4960.0	V	52.2	74.0	-21.8
	2483.5	H	56.0	74.0	-18.0
	2483.5	V	59.2	74.0	-14.8

Figure 60. Radiated Emission, BLE mode

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Test Distance: 3 meters

Frequency range: 0.009MHz to 25.0 GHz
Detector: Average

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Average Reading (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
2402.0	2390.0	H	42.6	54.0	-11.4
	2390.0	V	42.4	54.0	-11.6
	4804.0	H	_*	54.0	-
	4804.0	V	-	54.0	-
2440.0	4880.0	H	-	54.0	-
	4880.0	V	-	54.0	-
2480.0	4960.0	H	-	54.0	-
	4960.0	V	-	54.0	-
	2483.5	H	43.0	54.0	-11.0
	2483.5	V	48.1	54.0	-5.9

*The dash ("-") mark in the table means that no signal was observed above the spectrum analyzer noise level.

Figure 61. Radiated Emission, BLE mode

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 0.009MHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Peak Reading (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)
2412.0	2390.0	H	56.6	74.0	-17.4
	2390.0	V	60.6	74.0	-13.4
	4824.0	H	51.8	74.0	-22.2
	4824.0	V	52.9	74.0	-21.1
2437.0	4874.0	H	51.6	74.0	-22.4
	4874.0	V	51.6	74.0	-22.4
2472.0	4944.0	H	51.7	74.0	-22.3
	4944.0	V	51.6	74.0	-22.4
	2483.5	H	56.1	74.0	-17.9
	2483.5	V	68.9	74.0	-5.1

Figure 62. Radiated Emission, Wi-Fi/g mode

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Test Distance: 3 meters

Frequency range: 0.009MHz to 25.0 GHz
Detector: Average

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Average Reading (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
2412.0	2390.0	H	48.3	54.0	-5.7
	2390.0	V	51.9	54.0	-2.1
	4824.0	H	_*	54.0	-
	4824.0	V	-	54.0	-
2437.0	4874.0	H	-	54.0	-
	4874.0	V	-	54.0	-
2472.0	4944.0	H	-	54.0	-
	4944.0	V	-	54.0	-
	2483.5	H	49.7	54.0	-4.3
	2483.5	V	49.0	54.0	-5.0

*The dash ("-") mark in the table means that no signal was observed above the spectrum analyzer noise level.

Figure 63. Radiated Emission, Wi-Fi/g mode

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 0.009MHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)
2412.0	2390.0	H	60.1	74.0	-13.9
	2390.0	V	57.8	74.0	-16.2
	4824.0	H	50.2	74.0	-23.8
	4824.0	V	51.5	74.0	-22.5
2437.0	4874.0	H	51.5	74.0	-22.5
	4874.0	V	51.7	74.0	-22.3
2472.0	4944.0	H	51.4	74.0	-22.6
	4944.0	V	50.2	74.0	-23.8
	2483.5	H	59.0	74.0	-15.0
	2483.5	V	62.9	74.0	-11.1

Figure 64. Radiated Emission, Wi-Fi/n mode

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission

E.U.T Description Wearable Camera
Type MyMe2
Serial Number: 16230035

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Test Distance: 3 meters

Frequency range: 0.009MHz to 25.0 GHz
Detector: Average

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Average Reading (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
2412.0	2390.0	H	47.5	54.0	-6.5
	2390.0	V	42.9	54.0	-11.1
	4824.0	H	_*	54.0	-
	4824.0	V	-	54.0	-
2437.0	4874.0	H	-	54.0	-
	4874.0	V	-	54.0	-
2472.0	4944.0	H	-	54.0	-
	4944.0	V	-	54.0	-
	2483.5	H	48.3	54.0	-5.7
	2483.5	V	49.1	54.0	-4.9

*The dash ("-") mark in the table means that no signal was observed above the spectrum analyzer noise level.

Figure 65. Radiated Emission, Wi-Fi/n mode

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

9.6 Test Instrumentation Used; Emissions in Restricted Frequency Bands

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 29, 2016	March 1, 2017
Spectrum Analyzer	HP	8592L	3826A01204	March 13, 2016	March 13, 2017
EMI Receiver	HP	8542E	3906A00276	March 3, 2016	March 3, 2017
RF Filter Section	HP	85420E	3705A00248	March 3, 2016	March 3, 2017
Spectrum Analyzer	HP	8564E	3442A00275	March 10, 2016	March 10, 2017
Biconical Antenna	EMCO	3110B	9912-3337	March 24, 2016	March 24, 2018
Active Loop Antenna	EMCO	6502	9506-2950	September 12, 2016	September 12, 2017
Log Periodic Antenna	EMCO	3146	9505-4081	April 23, 2016	April 23, 2017
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	March 30, 2017
Low Noise Amplifier	Narda	DBS-0411N313	13	August 8, 2016	August 8, 2017
Low Noise Amplifier	Sophia Wireless	LNA28-B	232	August 8, 2016	August 8, 2017
Spectrum Analyzer	HP	8593EM	3536A00120ADI	March 10, 2016	March 10, 2017
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR

Figure 66 Test Equipment Used

10. Transmitted Power Density

10.1 Test Specification

FCC, Part 15, Subpart C, Section 247(e)

10.2 Test Procedure

(Temperature (19°C)/ Humidity (40%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground.

The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The spectrum analyzer was set to 3 kHz RBW and VBW to 10 kHz.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)

10.3 Test Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


10.4 Test Results

Operation Mode	Operation Frequency (MHz)	Reading (dB μ V/m)	Reading (dBm)	Limit (dBm)	Margin (dB)
BLE	2402.0	77.5	-17.7	8.0	-25.7
	2440.0	76.8	-18.4	8.0	-26.4
	2480.0	75.1	-20.1	8.0	-28.1
Wi-Fi/g	2412.0	75.1	-20.1	8.0	-28.1
	2437.0	73.5	-21.7	8.0	-29.7
	2472.0	71.4	-23.8	8.0	-31.8
Wi-Fi/n	2412.0	71.9	-23.3	8.0	-31.3
	2437.0	72.6	-22.6	8.0	-30.6
	2472.0	70.7	-24.5	8.0	-32.5

Figure 67 Test Results


JUDGEMENT: Passed by 25.7dB

For additional information see *Figure 68* to *Figure 76*.

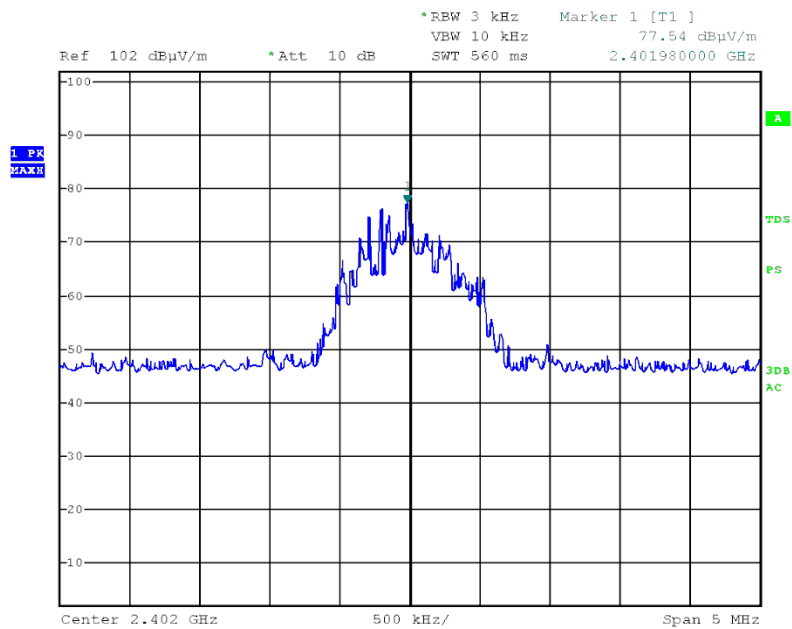


Date: 6.FEB.2017 11:19:05

Figure 68 — 2402.0MHz BLE

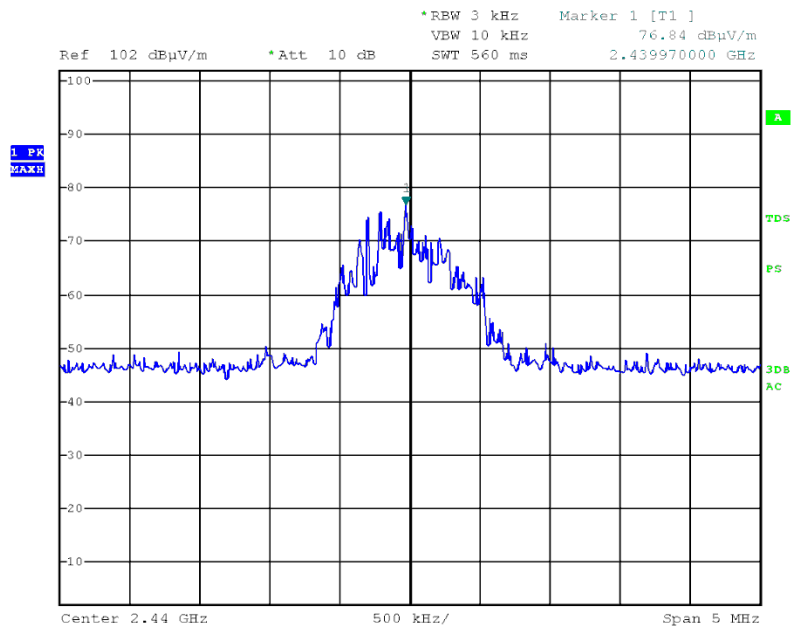


Date: 6.FEB.2017 11:14:59

Figure 69 — 2440.0MHz BLE

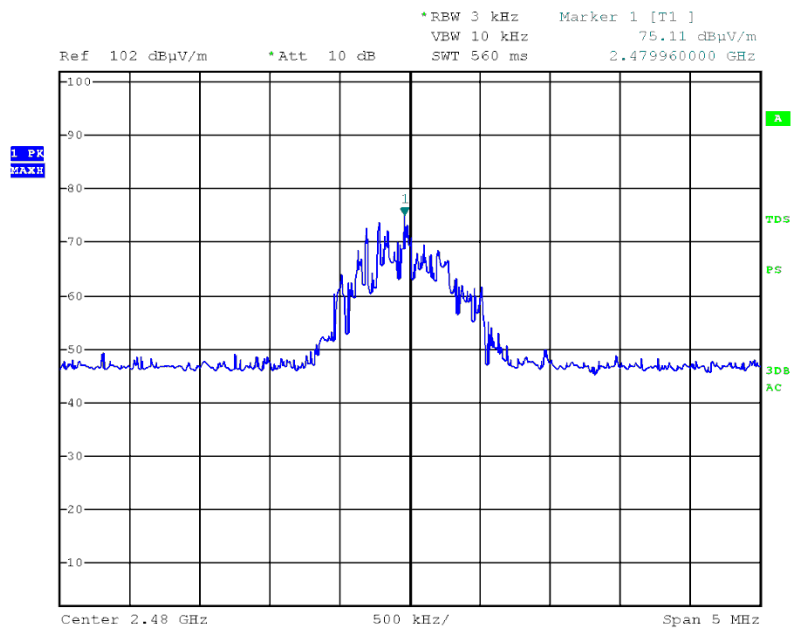


Date: 6.FEB.2017 11:12:14

Figure 70 — 2480.0MHz BLE

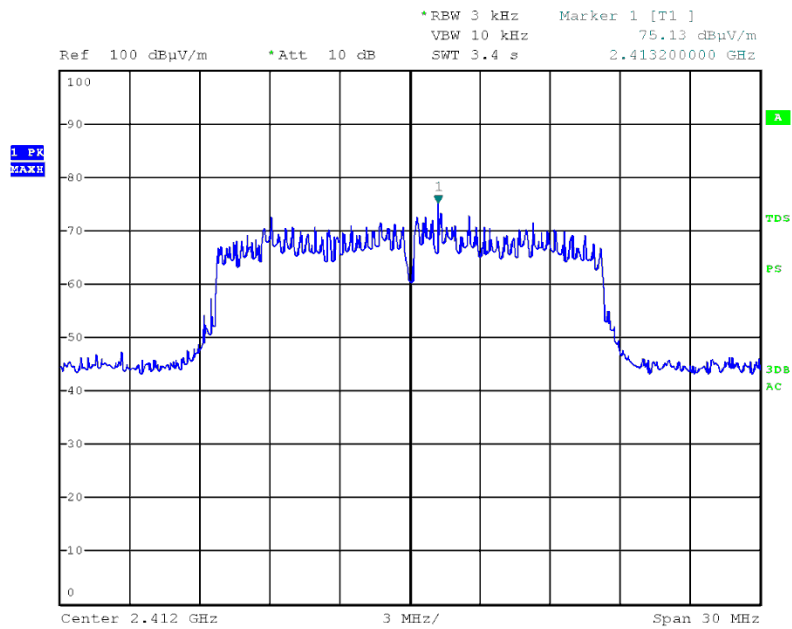


Date: 6.FEB.2017 13:00:39

Figure 71 — 2412.0MHz Wi-Fi/g

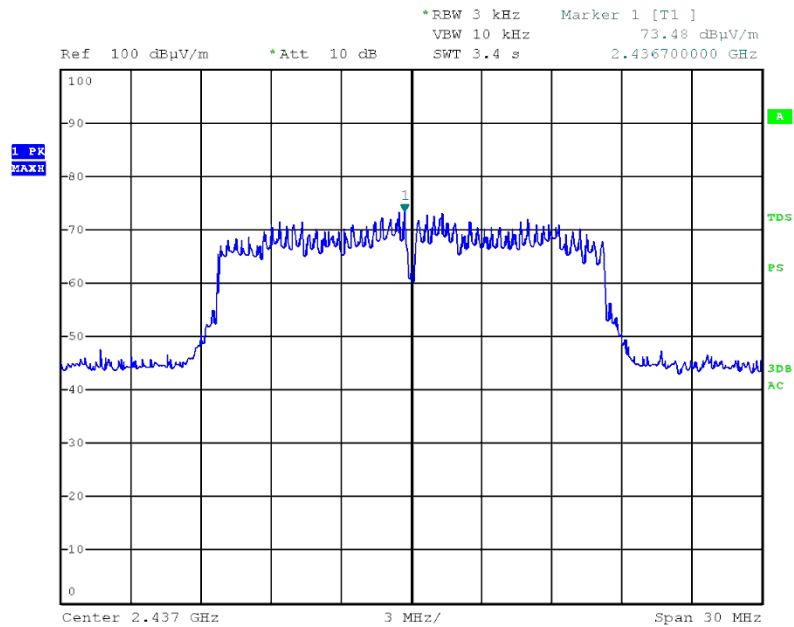


Date: 6.FEB.2017 12:58:23

Figure 72 — 2437.0MHz Wi-Fi/g

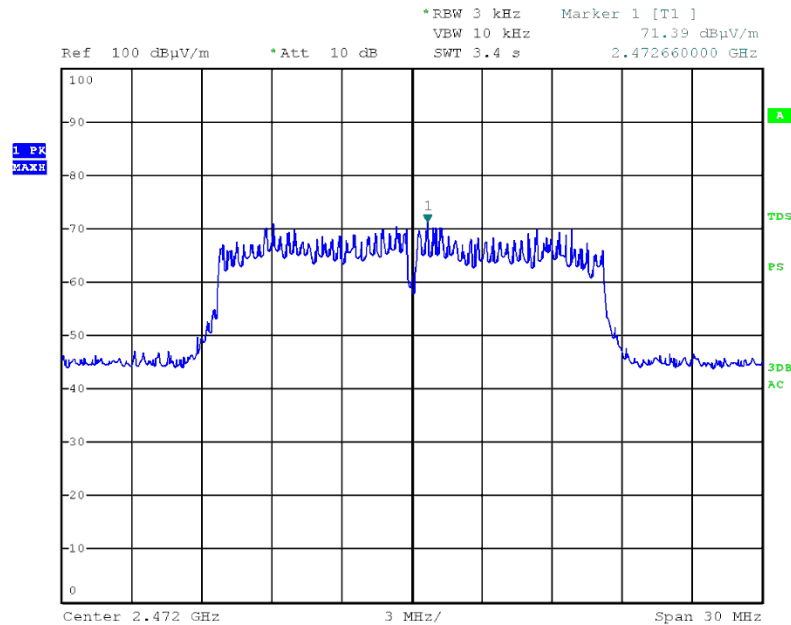


Date: 6.FEB.2017 12:55:24

Figure 73 — 2472.0MHz Wi-Fi/g

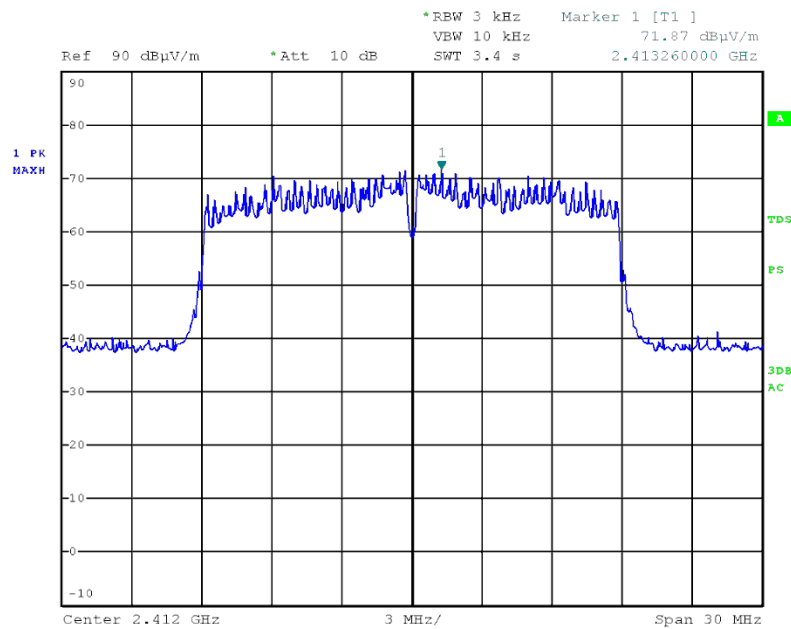


Date: 6.FEB.2017 14:40:14

Figure 74 — 2412.0MHz Wi-Fi/n

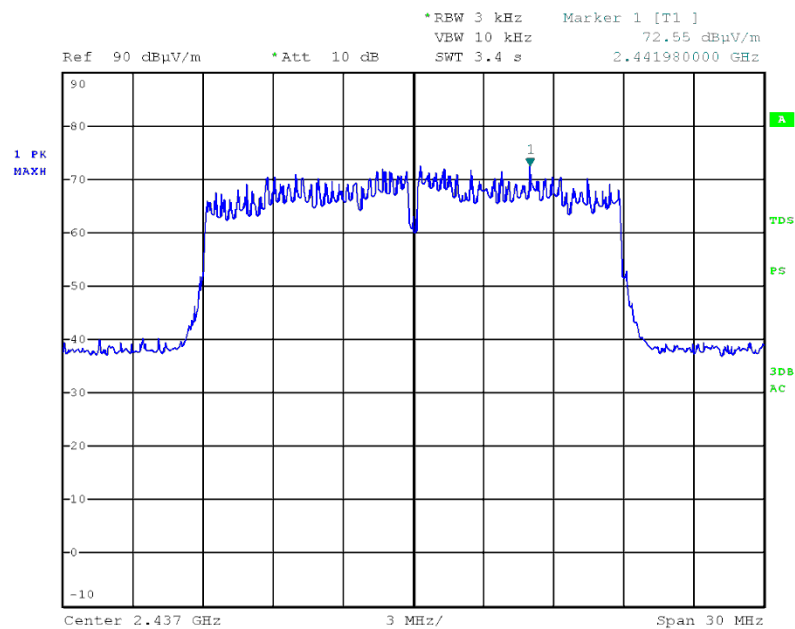

Date: 6.FEB.2017 14:28:18

Figure 75 — 2437.0MHz Wi-Fi/n

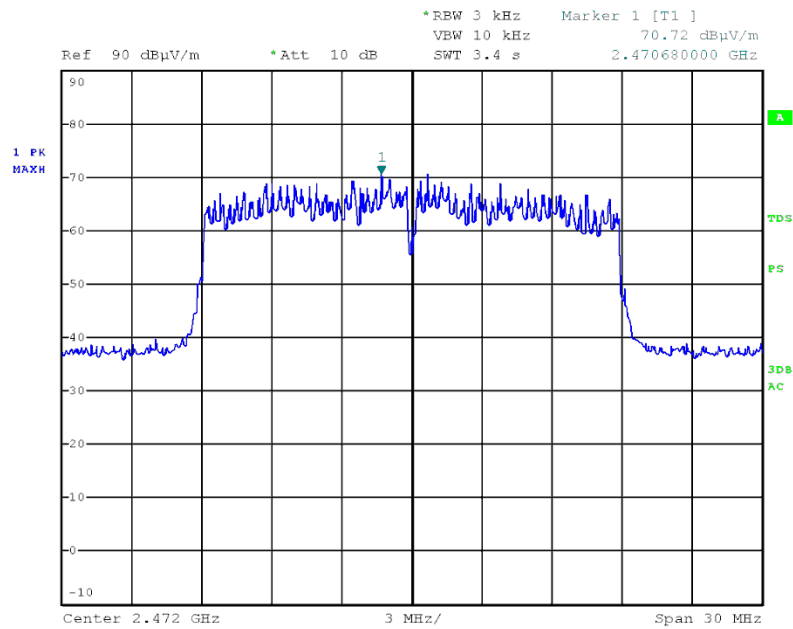

Date: 6.FEB.2017 14:23:34

Figure 76 — 2472.0MHz Wi-Fi/n

10.5 Test Equipment Used; Transmitted Power Density

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100120	February 29, 2016	March 1, 2017
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR

Figure 77 Test Equipment Used

11. Avg. Factor Calculation

1. Pulse period = 1msec (worst scenario)
2. Pulse duration = 1 msec (worst scenario)
3. Burst duration = 0.408msec

$$4. \text{ Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[1 \times \frac{0.4}{100} \times 80 \right] = -9.9\text{dB}$$

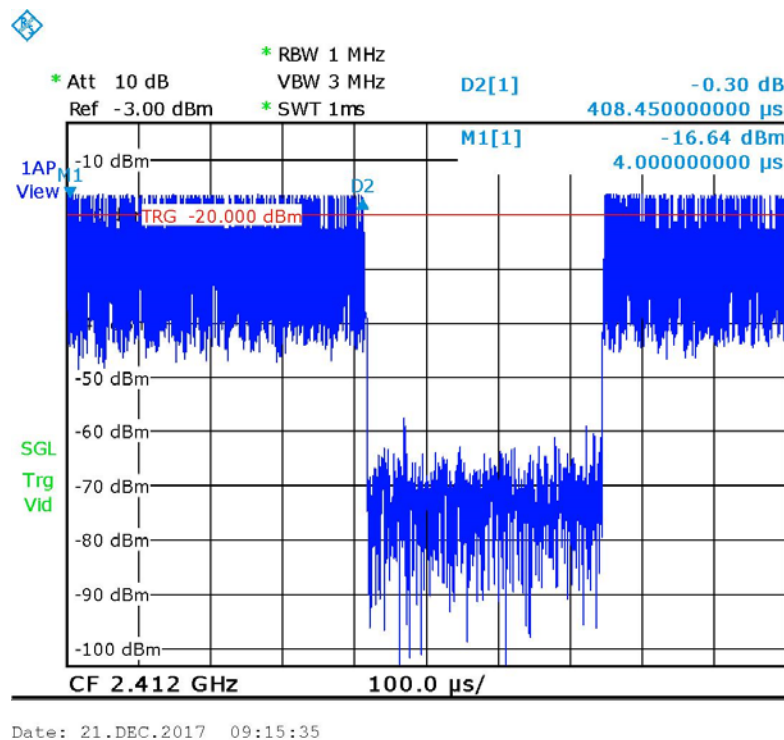


Figure 78 — Burst Duration

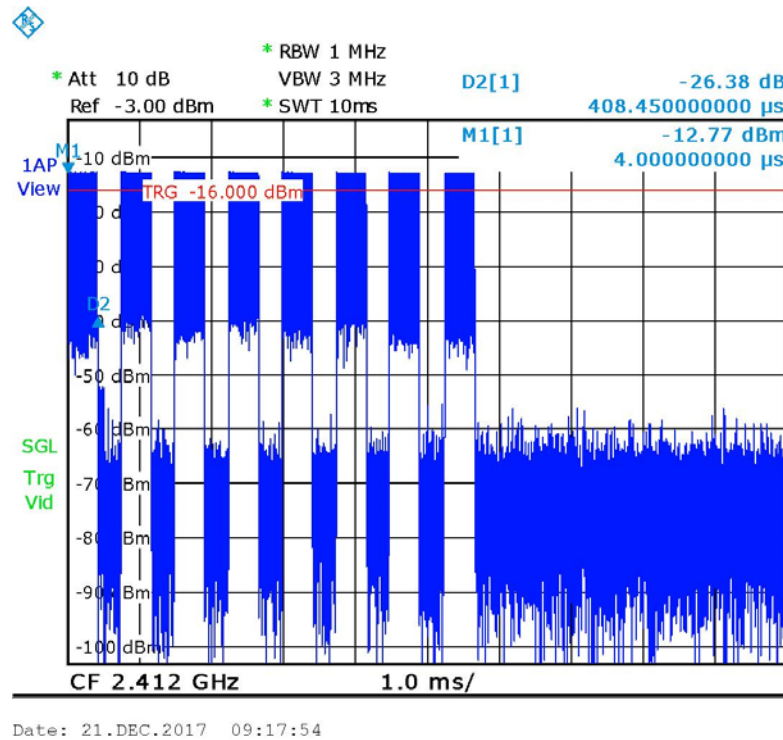


Figure 79 — Number of Bursts in 10msec=8, in 100msec=80

11.1 Test Equipment Used, Average Factor

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	Rodhe & Schwarz	FSL6	100194	March 2, 2017	March 2, 2018
30dB Attenuator	Bird	8304-N30DB	533	June 29, 2017	June 29, 2018

Figure 80 Test Equipment Used



12. Antenna Gain/Information

The antenna gain is 1.0 dBi, integral.

Ultra-Miniature 2.4GHz Chip antenna 0.37mm max Thickness	P/N 2450AT07A0100
Detail Specification: 5/8/2012	Page 1 of 4

General Specifications	
Part Number	2450AT07A0100
Frequency (MHz)	2400~2500
Peak Gain (dBi typ.)	1.0 (XZ-Total)
Average Gain (dBi typ.)	-1.5 (XZ-Total)
Return Loss	6.5 dB min.

13. R.F Exposure/Safety

Typical use of the E.U.T. is as a **wearable camera**.

The typical distance between the E.U.T. and the user during use as a wearable camera is 0.5 cm.

SAR Testing Exclusion Based on Section 4.3.1 and Appendix A of KDB 447498 D01 V06 Requirements

During use (body worn) using WiFi 802.11 protocol

Peak power output “worst case” radiation = 108.2 dBuV/m (Peak) = 13.0 dBm = 20mW.

Taking into account the -9.9dB AVG factor (page 68)

peak power = 13 -9.9 = 3.1dBm = 2mW

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] = 2/5 * 1.55 = 0.62$

This value is less than 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

The SAR measurement is not necessary.



14. APPENDIX A - CORRECTION FACTORS

14.1 Correction factors for RF OATS Cable 35m

ITL #1784

Frequency (MHz)	Cable loss (dB)
10.0	0.3
20.0	0.2
50.0	-0.1
100.0	-0.6
200.0	-1.2
500.0	-2.3
1000.0	-3.6



14.2

***Correction factors for RF OATS Cable
10m ITL #1794***

Frequency(MHz)	Cable loss(dB)
10.0	-0.3
20.0	-0.3
50.0	-0.5
100.0	-0.7
200.0	-1.1
500.0	-1.8
1000.0	-2.7

14.3 Correction factor for RF CABLE for Semi Anechoic Chamber

ITL # 1841

FREQ (MHz)	LOSS (dB)
1000.0	1.5
2000.0	2.1
3000.0	2.7
4000.0	3.1
5000.0	3.5
6000.0	4.1
7000.0	4.6
8000.0	4.9
9000.0	5.7
10000.0	5.7
11000.0	6.1
12000.0	6.1
13000.0	6.2
14000.0	6.7
15000.0	7.4
16000.0	7.5
17000.0	7.9
18000.0	8.1
19000.0	8.8
20000.0	9.1

NOTES:

1. The cable is manufactured by Commscope
2. The cable type is 0623 WBC-400, serial # G020132 and 10m long

14.4 Correction factors for *biconical antenna* – ITL # 1356

Model: EMCO 3110B

Serial No.:9912-3337

Frequency [MHz]	AF [dB/m]
30.0	14.18
35.0	13.95
40.0	12.84
45.0	11.23
50.0	11.10
60.0	10.39
70.0	9.34
80.0	9.02
90.0	9.31
100.0	8.95
120.0	11.53
140.0	12.20
160.0	12.56
180.0	13.49
200.0	15.27



14.5 Correction factors for log periodic antenna – ITL # 1349

Model: EMCO 3146

Serial No.:9505-4081

Frequency [MHz]	AF [dB/m]
200.0	11.47
250.0	12.06
300.0	14.77
400.0	15.77
500.0	18.01
600.0	18.84
700.0	20.93
800.0	21.27
900.0	22.44
1000.0	24.10



14.6 Correction factors for Active Loop Antenna
Model 6502 S/N 9506-2950
ITL # 1075:

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8



14.7 Correction factors for Horn ANTENNA

Model: 3115

Serial number: 6142

3 meter range; ITL # 1352

f(GHz)	AF(dB/m)	GA(dB)
0.75	25	3
1G	23.5	7
1.5G	26	8
2G	29	7
2.5G	27.5	10
3G	30	10
3.5G	31.5	10
4G	32.5	9.5
4.5G	32.5	10.5
5G	33	10.5
5.5G	35	10.5
6G	36.5	9.5
6.5G	36.5	10
7G	37.5	10
7.5G	37.5	10
8G	37.5	11
8.5G	38	11
9G	37.5	11.5
9.5G	38	11.5
10G	38.5	11.5
10.5G	38.5	12
11G	38.5	12.5
11.5G	38.5	13
12G	38	13.5
12.5G	38.5	13
13G	40	12
13.5G	41	12
14G	40	13
14.5G	39	14
15G	38	15.5
15.5G	37.5	16
16G	37.5	16
16.5G	39	15
17G	40	15
17.5G	42	13.5
18G	42.5	13



14.8 Correction factors for

Horn Antenna

**Model: SWH-28
at 1 meter range.**

ITL #:1353

Frequency, MHz	Measured antenna factor, dB/m ¹
18000	33.0
18500	32.9
19000	33.1
19500	33.3
20000	33.6
20500	33.6
21000	33.4
21500	33.8
22000	33.7
22500	33.9
23000	34.8
23500	34.5
24000	34.2
24500	34.8
25000	34.4
25500	35.2
26000	35.9
26500	36.0