



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 22 April 2019

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
For

Orcam Technologies Ltd.

Equipment under test:

Wearable Device

ORCAM MYME

Tested by:

M. Zohar

Approved by:

D. Shidlovsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Orcam Technologies Ltd.

Wearable Device

ORCAM MYME

FCC ID: 2AAWI-ORCAM-MYME

This report concerns:	Original Grant: X
	Class I Change:
	Class II Change:
Equipment type:	FCC: DSS Part 15 Spread Spectrum Transmitter
Limits used:	47CFR15 Section 15.247

Measurement procedures used are KDB 558074 D01 v05 and ANSI C63.10: 2013.

Application for Certification
prepared by:

R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7116002
e-mail Rpinchuck@itlglobal.org

Applicant for this device:
(different from "prepared by")

Ram Ben Yehuda
3 Kiryat Mada St.
PO Box 45157
Jerusalem, 9777603, Israel
Tel: +972-2-591-7805
Fax: +972-2-586-0121
e-mail: : Rami.Ben-Yehuda@orcaml.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	5
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	7
1.5	Test Facility	7
1.6	Measurement Uncertainty	7
2.	SYSTEM TEST CONFIGURATION-----	9
2.1	Justification	9
2.2	EUT Exercise Software	9
2.3	Special Accessories	10
2.4	Equipment Modifications	10
2.5	Configuration of Tested System	10
3.	CONDUCTED & RADIATED MEASUREMENT TEST SET-UP PHOTOS -----	11
4.	CONDUCTED EMISSION FROM AC MAINS-----	15
4.1	Test Specification	15
4.2	Test Procedure	15
4.3	Test Limit	15
4.4	Test Results.....	16
4.5	Test Equipment Used; Conducted Emission from AC Mains.....	24
5.	20DB MINIMUM BANDWIDTH -----	25
5.1	Test Specification	25
5.2	Test Procedure	25
5.3	Test Limit	25
5.4	Test Results.....	25
5.5	Test Equipment Used, 20 dB Minimum Bandwidth.....	28
6.	OCCUPIED BANDWIDTH -----	29
6.1	Test Specification	29
6.2	Test Procedure	29
6.3	Test Limit	29
6.4	Test Results.....	29
6.5	Test Equipment Used, Occupied Bandwidth.....	32
7.	NUMBER OF HOPPING FREQUENCIES -----	33
7.1	Test Specification	33
7.2	Test Procedure	33
7.3	Test Limit	33
7.4	Test Results.....	33
7.5	Test Equipment Used, Number of Hopping Frequencies	36
8.	CHANNEL FREQUENCY SEPARATION -----	37
8.1	Test Specification	37
8.2	Test Procedure	37
8.3	Test Limit	37
8.4	Test Results.....	37
8.5	Test Equipment Used, Channel Frequency Separation Test.....	39
9.	PEAK OUTPUT POWER -----	40
9.1	Test Specification	40
9.2	Test Procedure	40
9.3	Test Limit	40
9.4	Test Results.....	40
9.5	Test Equipment Used, Peak Output Power	43



10.	DWELL TIME ON EACH CHANNEL -----	44
10.1	Test Specification	44
10.2	Test Procedure	44
10.3	Test Limit	44
10.4	Test Results.....	44
10.5	Test Equipment Used, Dwell Time on Each Channel	47
11.	BAND EDGE -----	48
11.1	Test Specification	48
11.2	Test Procedure	48
11.3	Test Limit	48
11.4	Test Results.....	48
11.5	Test Equipment Used, Band Edge	53
12.	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS-----	54
12.1	Test Specification	54
12.2	Test Procedure	54
12.3	Test Limit	54
12.4	Test Results.....	54
13.	EMISSIONS IN RESTRICTED FREQUENCY BANDS -----	58
13.1	Test Specification	58
13.2	Test Procedure	58
13.3	Test Limit	59
13.4	Test Results.....	59
13.5	Test Equipment Used, Emissions in Restricted Frequency Bands	62
14.	AVG. FACTOR CALCULATION-----	63
14.1	Test Equipment Used, Average Factor	64
15.	ANTENNA GAIN/INFORMATION-----	65
16.	R.F EXPOSURE/SAFETY-----	66
17.	APPENDIX A - CORRECTION FACTORS -----	67
17.1	Correction factors for RF OATS Cable 35m ITL #1911	67
17.2	Correction factor for RF CABLE for Semi Anechoic Chamber.....	68
17.3	Correction factors for Active Loop Antenna	69
17.4	Correction factors for biconical antenna – ITL # 1356	70
17.5	Correction factors for log periodic antenna – ITL # 1349.....	71
17.6	Correction factors for Horn Antenna	72
17.7	Correction factors for Double –Ridged Waveguide Horn ANTENNA.....	73
17.8	Correction factors for Horn Antenna	74



1. General Information

1.1 Administrative Information

Manufacturer:	Orcam Technologies Ltd.
Manufacturer's Address:	3 Kiryat Mada St. P.O. Box 45157 Jerusalem, 9777603, Israel Tel: +972-2-591-7805 Fax: +972-2-586-0121
Manufacturer's Representative:	Ram Ben-Yehuda
Equipment Under Test (E.U.T):	Wearable Device
Model:	ORCAM MYME
Equipment Serial No.:	18380173
Date of Receipt of E.U.T:	December 6, 2018
Start of Test:	December 6, 2018
End of Test:	January 23, 2019
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	FCC Part 15, Subpart C, Section 15.247



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 **Product Description**

OrCam MyMe is a wearable device that uses smart artificial vision technology to recognize people.

Working voltage	3.7VDC Rechargeable battery operated via AC/DC adapter
Mode of operation	Transceiver
Modulation	STD(Basic)/EDR
Assigned Frequency Range	2400.0-2483.5MHz
Operating Frequency Range	2402.0-2480.0MHz
Transmit power	~10.0dBm
Antenna Gain	-2dBi
Modulation BW	~1MHz

1.4 **Test Methodology**

Radiated testing was performed according to the procedures in KDB 558074 D01 v05 and ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 **Test Facility**

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 **Measurement Uncertainty**

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.6 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
for open site:
30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.19 dB



>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

± 5.51 dB

2. System Test Configuration

2.1 Justification

1. The E.U.T contains an IEEE 802.15.1 standard (STD/EDR) transceiver.
2. The unit was evaluated while transmitting at the low channel (2402MHz), the mid channel (2440MHz) and the high channel (2480MHz).
3. The evaluation was performed with the E.U.T connected to a typical AC/DC adapter via laptop in charge mode as the “worst case”.
4. Conducted AC line emission testing was performed with 2 optional charge modes: AC/DC adapter via laptop & AC/DC adapter wall charger.
5. Final radiated emission test was performed after exploratory emission testing that was performed in 3 orthogonal polarities to determine the “worst case” radiation.
6. According to the below results the “worst case” was the X axis

Orientation	Frequency	2 nd Harmonic	3 rd Harmonic	Band Edge
	(MHz)	(dBuV/m)	(dBuV/m)	(dBuV/m)
X axis	2402.0	55.1	68.2	64.3
	2440.0	57.5	64.9	-
	2480.0	59.1	68.9	63.0
Y axis	2402.0	55.1	67.9	63.8
	2440.0	56.7	63.5	-
	2480.0	58.8	67.8	62.9
Z axis	2402.0	53.2	64.8	64.5
	2440.0	55.0	60.2	-
	2480.0	55.4	62.2	63.1

Figure 1. Screening Results

7. Conducted emission tests were performed with the E.U.T. antenna terminal connected by a RF cable to the Spectrum Analyzer through a 30dB external attenuator.

2.2 EUT Exercise Software

No special exercise software was used.

2.3 Special Accessories

Equipment	Manufacturer	Part Number	Serial Number
Laptop	DELL	LATITUDE E5440	14290776829
AC/DC adapter	DELL	LA90PM130	N/A
Wall charger	EDACPOWER ELEC.	EM1005AVEU	001626

2.4 Equipment Modifications

No modifications were needed in order to achieve compliance.

2.5 Configuration of Tested System

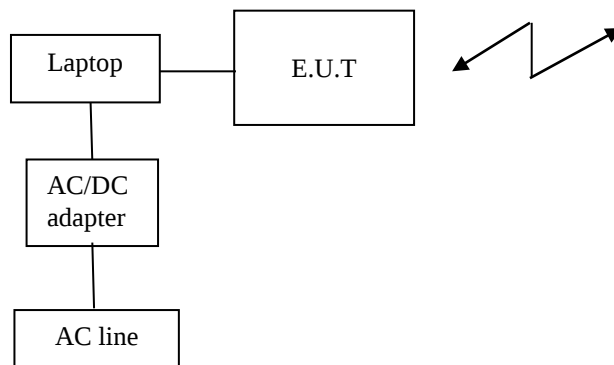


Figure 2. Configuration of Tested System – Radiated

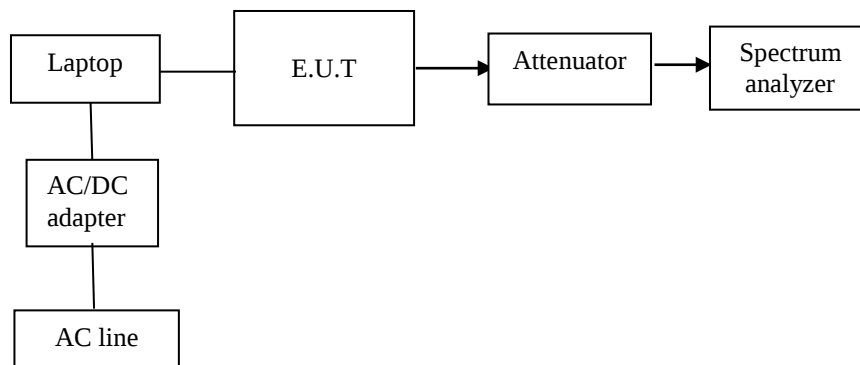


Figure 3. Configuration of Tested System - Conducted

3. Conducted & Radiated Measurement Test Set-Up Photos



Figure 4. Conducted Emission from AC Line Test, AC/DC adapter via laptop charge mode



Figure 5. Conducted Emission from AC line Test, AC/DC wall charger mode



Figure 6. Radiated Emission Test, 0.009-30MHz



Figure 7. Radiated Emission Test, 30-200MHz



Figure 8. Radiated Emission Test, 200-1000MHz



Figure 9. Radiated Emission Test, 1-18GHz



Figure 10. Radiated Emission Test, 18-25GHz

4. Conducted Emission From AC Mains

4.1 Test Specification

FCC Part 15, Subpart C, Section 15.207

4.2 Test Procedure

(Temperature (20°C)/ Humidity (50%RH))

The E.U.T operation mode and test setup are as described in Section 2 of this report. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on a 0.8 meter high wooden table, 0.4 meter from the room's vertical wall. In the case of a floor-standing E.U.T., it was placed on the horizontal ground plane.

The E.U.T was powered from 115 V AC / 60 Hz via 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T.

The center of the E.U.T.'s AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in the photographs, *Figure 4* and *Figure 5*.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver and are displayed on the receiver's spectrum display.

The E.U.T was evaluated in TX operation mode.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Test Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.



4.4 Test Results

JUDGEMENT: Passed by 6.32 dB

The margin between the emission levels and the specification limit is, in the worst case, 6.32 dB for the phase line at 0.366MHz and 9.14 dB at 0.442 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 11* to *Figure 18*.



Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: : Peak, Quasi-peak, Average
Power Operation Wall charger

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	CE22BQP		
Trace2:	CE22BAP		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	182 kHz	43.26	-21.13
2 Average	242 kHz	30.30	-21.72
1 Quasi Peak	366 kHz	45.79	-12.79
2 Average	366 kHz	42.27	-6.32
1 Quasi Peak	606 kHz	30.61	-25.38
2 Average	730 kHz	21.54	-24.45
2 Average	758 kHz	21.97	-24.02
1 Quasi Peak	762 kHz	35.22	-20.78
2 Average	1.274 MHz	22.42	-23.57
1 Quasi Peak	1.366 MHz	30.84	-25.15
1 Quasi Peak	2.19 MHz	26.50	-29.49
2 Average	2.822 MHz	19.45	-26.54
2 Average	3.662 MHz	17.94	-28.05
1 Quasi Peak	4.522 MHz	24.54	-31.45
1 Quasi Peak	7.882 MHz	22.72	-37.27
2 Average	8.19 MHz	16.31	-33.69
2 Average	13.558 MHz	23.14	-26.85
1 Quasi Peak	16.394 MHz	23.54	-36.45
1 Quasi Peak	20.538 MHz	27.66	-32.33
2 Average	20.662 MHz	22.57	-27.42

Date: 17.JAN.2019 15:26:34

Figure 11. Detectors: Peak, Quasi-peak, Average


Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.



Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average
Power Operation Wall charger

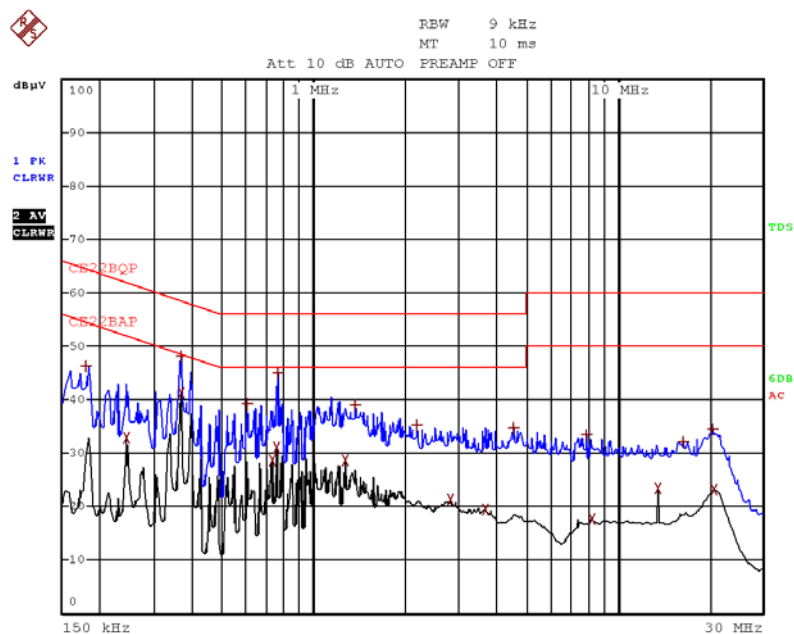

Date: 17.JAN.2019 15:25:18

Figure 12. Detectors: Peak, Quasi-peak, Average



Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation Wall charger

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CE22BQP			
Trace2:	CE22BAP			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB	
1 Quasi Peak	162 kHz	47.02	-18.33	
2 Average	218 kHz	31.26	-21.62	
1 Quasi Peak	378 kHz	38.55	-19.76	
2 Average	378 kHz	31.86	-16.46	
1 Quasi Peak	618 kHz	25.81	-30.18	
2 Average	622 kHz	19.96	-26.03	
1 Quasi Peak	758 kHz	29.94	-26.05	
2 Average	758 kHz	18.22	-27.77	
1 Quasi Peak	1.294 MHz	22.53	-33.46	
2 Average	1.918 MHz	14.22	-31.77	
1 Quasi Peak	2.138 MHz	22.75	-33.25	
2 Average	2.758 MHz	18.06	-27.93	
1 Quasi Peak	3.654 MHz	25.52	-30.47	
2 Average	4.414 MHz	16.84	-29.15	
2 Average	6.582 MHz	20.59	-29.40	
1 Quasi Peak	7.182 MHz	24.65	-35.34	
2 Average	13.562 MHz	23.92	-26.07	
1 Quasi Peak	17.586 MHz	24.97	-35.02	
1 Quasi Peak	20.458 MHz	27.64	-32.35	
2 Average	20.814 MHz	21.88	-28.11	

Date: 17.JAN.2019 15:15:11


Figure 13. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation Wall charger

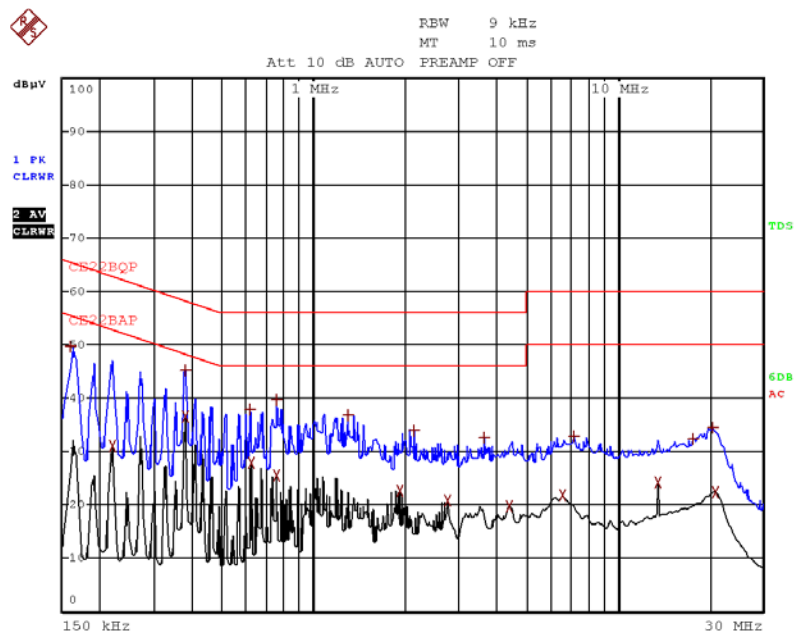

Date: 17.JAN.2019 15:12:16

Figure 14 Detectors: Peak, Quasi-peak, Average



Conducted Emission

E.U.T Description: Wearable Device
Type: ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: : Peak, Quasi-peak, Average
Power Operation: AC/DC adapter

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		CE22BQP		
Trace2:		CE22BAP		
Trace3:		---		
	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	150 kHz	47.58	-18.41
2	Average	174 kHz	25.72	-29.04
1	Quasi Peak	206 kHz	42.12	-21.23
2	Average	214 kHz	25.63	-27.41
1	Quasi Peak	278 kHz	36.58	-24.28
2	Average	302 kHz	20.67	-29.51
1	Quasi Peak	402 kHz	33.96	-23.84
2	Average	430 kHz	29.70	-17.54
2	Average	438 kHz	32.30	-14.79
1	Quasi Peak	442 kHz	38.46	-18.56
2	Average	566 kHz	20.72	-25.27
1	Quasi Peak	586 kHz	23.39	-32.60
2	Average	738 kHz	12.53	-33.46
1	Quasi Peak	806 kHz	21.44	-34.55
1	Quasi Peak	1.118 MHz	20.56	-35.43
2	Average	1.242 MHz	15.08	-30.91
1	Quasi Peak	1.538 MHz	27.30	-28.69
2	Average	1.594 MHz	15.13	-30.87
2	Average	2.058 MHz	21.35	-24.64
1	Quasi Peak	2.102 MHz	33.16	-22.83

Date: 17.JAN.2019 14:56:06

Figure 15. Detectors: Peak, Quasi-peak, Average


Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.



Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average
Power Operation AC/DC adapter

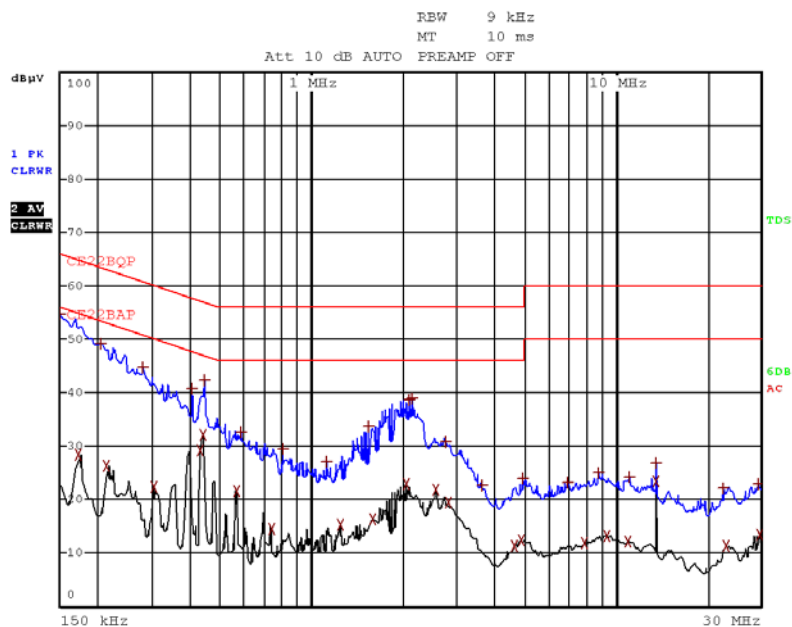

Date: 17.JAN.2019 14:52:45

Figure 16. Detectors: Peak, Quasi-peak, Average



Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation AC/DC adapter

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CE22BQP			
Trace2:	CE22BAP			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
1 Quasi Peak	154 kHz	47.51	-18.27	
2 Average	170 kHz	29.03	-25.93	
1 Quasi Peak	258 kHz	39.23	-22.26	
2 Average	402 kHz	32.14	-15.66	
1 Quasi Peak	442 kHz	38.27	-18.74	
2 Average	442 kHz	37.88	-9.14	
1 Quasi Peak	970 kHz	30.95	-25.04	
2 Average	970 kHz	30.19	-15.80	
2 Average	1.37 MHz	28.44	-17.55	
1 Quasi Peak	1.982 MHz	31.83	-24.16	
1 Quasi Peak	2.51 MHz	35.90	-20.09	
2 Average	2.51 MHz	30.47	-15.52	
2 Average	4.45 MHz	18.15	-27.84	
1 Quasi Peak	4.722 MHz	20.98	-35.01	
1 Quasi Peak	10.214 MHz	29.31	-30.68	
2 Average	10.338 MHz	24.09	-25.90	
2 Average	10.466 MHz	23.50	-26.49	
1 Quasi Peak	10.474 MHz	29.98	-30.01	
1 Quasi Peak	29.122 MHz	23.36	-36.63	
2 Average	29.122 MHz	19.42	-30.57	

Date: 23.JAN.2019 13:02:26


Figure 17. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average
Power Operation AC/DC adapter

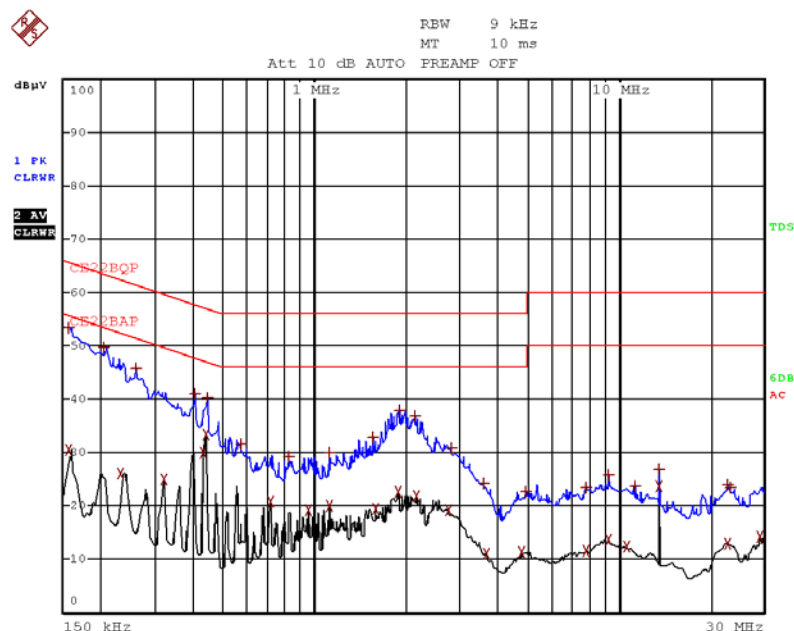

Date: 17.JAN.2019 15:01:10

Figure 18 Detectors: Peak, Quasi-peak, Average

4.5 Test Equipment Used; Conducted Emission from AC Mains

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
LISN	Fischer	FCC-LISN-25A	127	July 20, 2018	July 31, 2019
Transient Limiter	HP	11947A	3107A03041	June 25, 2018	June 25, 2019
EMI Receiver	Rohde & Schwarz	ESCI7	100724	February 19, 2018	February 19, 2019
Cable CE Chamber 3M + 3M	Testline 18 + RJ214	11556	-	March 31, 2018	March 31, 2019

Figure 19 Test Equipment Used

5. 20dB Minimum Bandwidth

5.1 Test Specification

FCC, Part 15, Subpart C, Section 15.247(a)(1)

5.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable. The transmitter unit operated with normal modulation.

The spectrum analyzer was set to the following parameters:

Span = ~ 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20dB bandwidth

Detector Function: Peak, Trace: Maximum Hold.

5.3 Test Limit

N/A

5.4 Test Results

Modulation	Operation Frequency	Bandwidth Reading
(STD/EDR)	(MHz)	(kHz)
STD	2402.0	882.2
	2440.0	882.2
	2480.0	882.2
EDR	2402.0	1311.4
	2440.0	1311.4
	2480.0	1311.4

Figure 20 Test Results

JUDGEMENT: Passed

For additional information see *Figure 21 to Figure 26*.

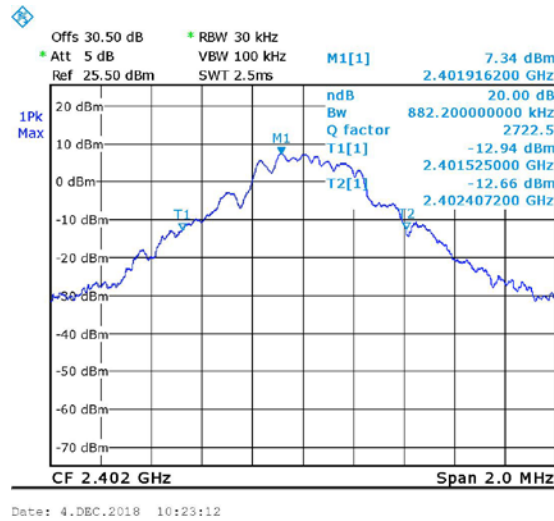


Figure 21. 2402MHz, STD

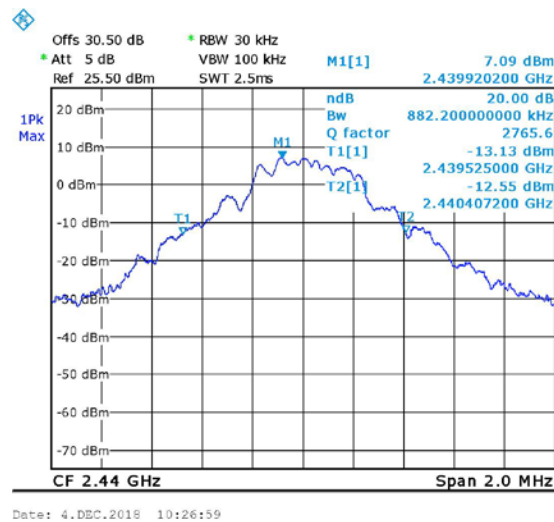


Figure 22. 2440MHz, STD



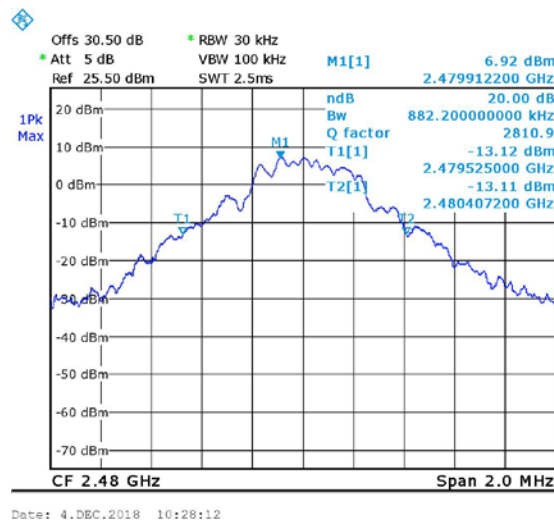


Figure 23. 2480MHz, STD

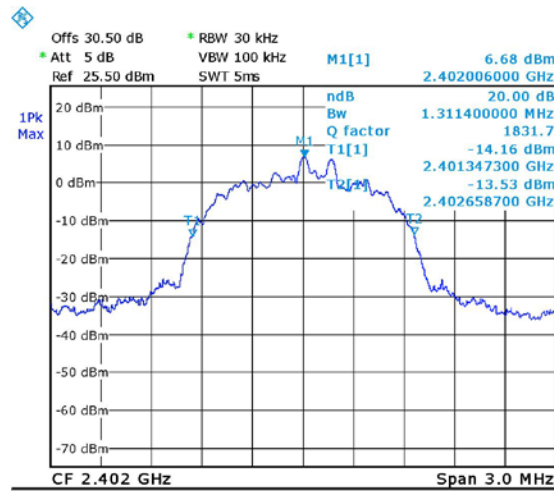


Date: 4.DEC.2018 10:36:15

Figure 24. 2402MHz, EDR

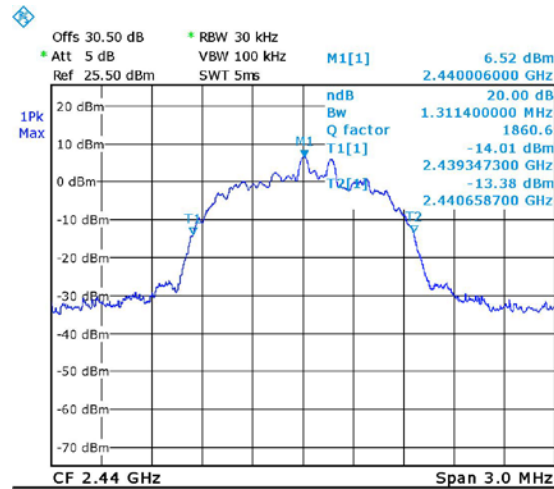

Date: 4.DEC.2018 10:33:32

Figure 25. 2440MHz, EDR

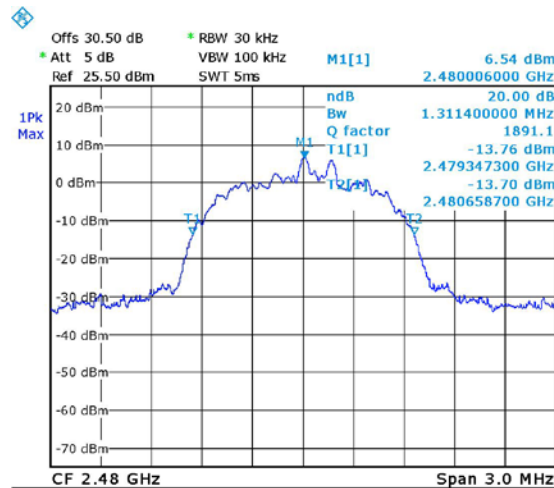

Date: 4.DEC.2018 10:30:05

Figure 26. 2480MHz, EDR



5.5 Test Equipment Used, 20 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note Below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note Below

Note: Testing was performed December 4, 2018

Figure 27 Test Equipment Used

6. Occupied Bandwidth

6.1 Test Specification

FCC, Part 15, Subpart C, Section 2.1048

6.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable. The transmitter unit operated with normal modulation.

The spectrum analyzer was set to the following parameters:

Span = ~ 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20dB bandwidth

Detector Function: Peak, Trace: Maximum Hold.

The E.U.T. was tested at Low, Mid and High channels.

6.3 Test Limit

N/A

6.4 Test Results

Modulation	Operation Frequency	Bandwidth Reading
(STD/EDR)	(MHz)	(kHz)
STD	2402.0	886.2
	2440.0	892.2
	2480.0	904.2
EDR	2402.0	1197.6
	2440.0	1197.6
	2480.0	1197.6

Figure 28 Test Results

JUDGEMENT: Passed

For additional information see *Figure 29 to Figure 34*.

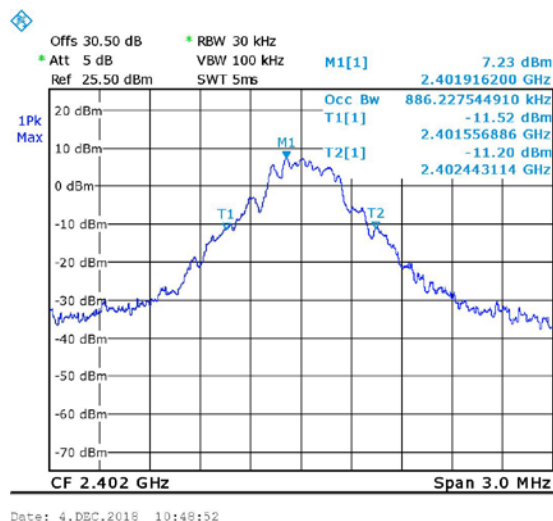


Figure 29. 2402MHz, STD

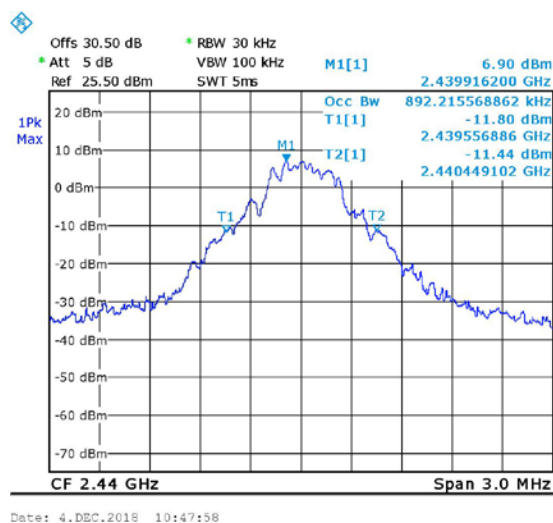


Figure 30. 2440MHz, STD

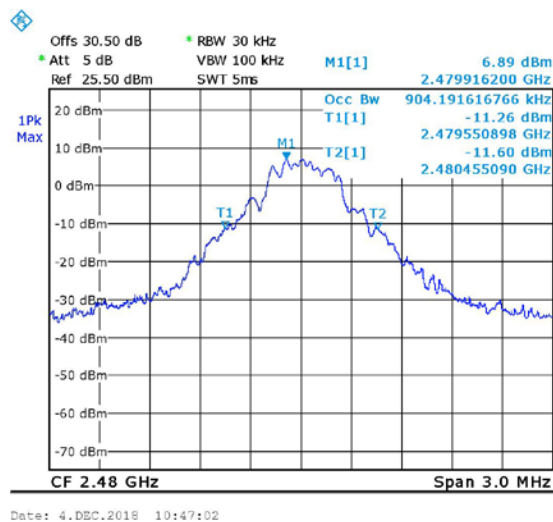


Figure 31. 2480MHz, STD

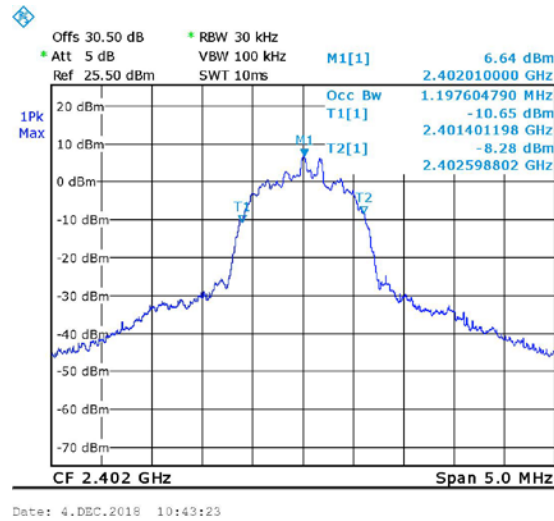


Figure 32. 2402MHz, EDR

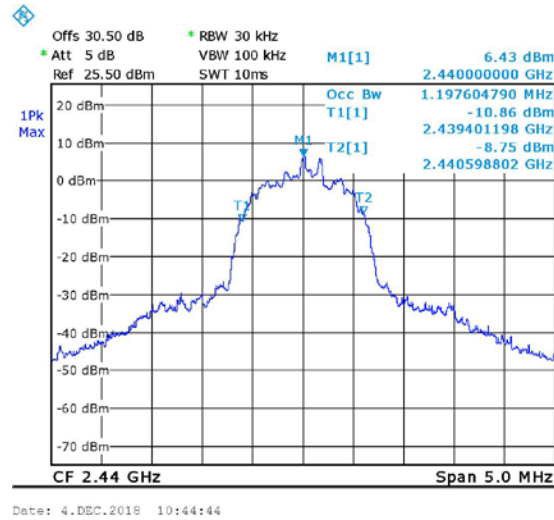


Figure 33. 2440MHz, EDR

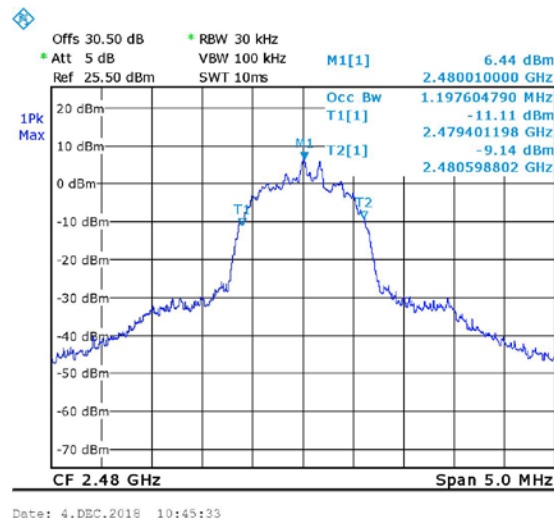


Figure 34. 2480MHz, EDR



6.5 Test Equipment Used, Occupied Bandwidth

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note Below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note Below

Note: Testing was performed December 4, 2018

Figure 35 Test Equipment Used

7. Number of Hopping Frequencies

7.1 Test Specification

FCC, Part 15, Subpart C Section 15.247(a)(1)(iii)

7.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

The E.U.T. was set to hopping mode.

The spectrum analyzer was set to the following parameters:

Band of Operation: 2400M-2483.5 MHz

RBW: 30 kHz, VBW: 100 kHz

Detector Function: Peak, Trace: Maximum Hold

7.3 Test Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15/75 Channels.

7.4 Test Results

Modulation	Number of Hopping Frequencies	Limit
STD	79	$\geq 15/75$
EDR	79	$\geq 15/75$

Figure 36 Test Results

JUDGEMENT: Passed

For additional information see *Figure 37* to *Figure 44*.

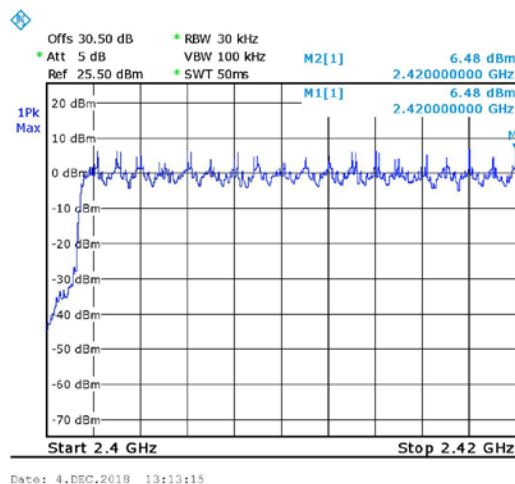


Figure 37. Number of Channels, Band 1, STD

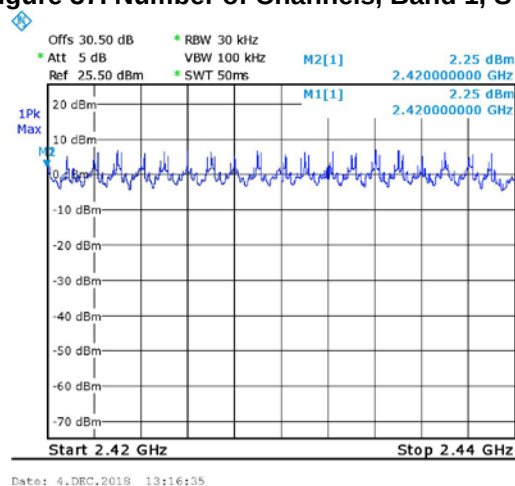


Figure 38. Number of Channels, Band 2, STD

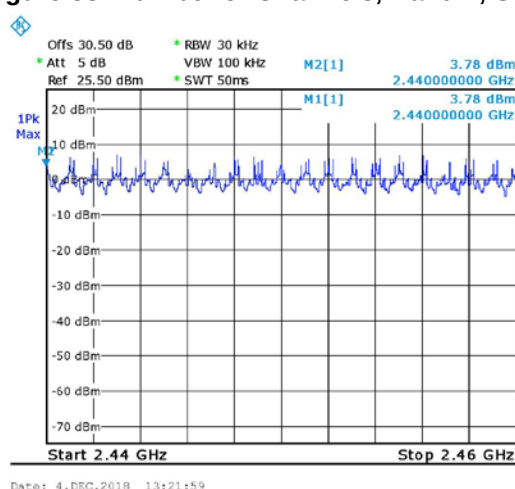


Figure 39. Number of Channels, Band 3, STD

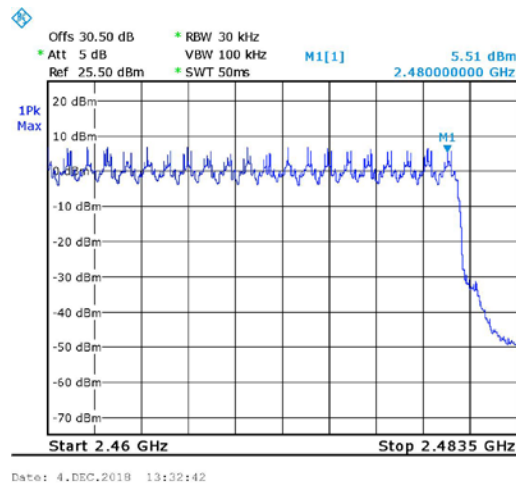


Figure 40. Number of Channels, Band 4, STD

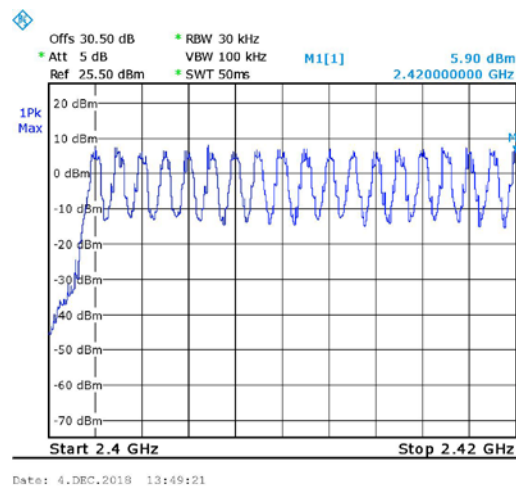


Figure 41. Number of Channels, Band 1, EDR

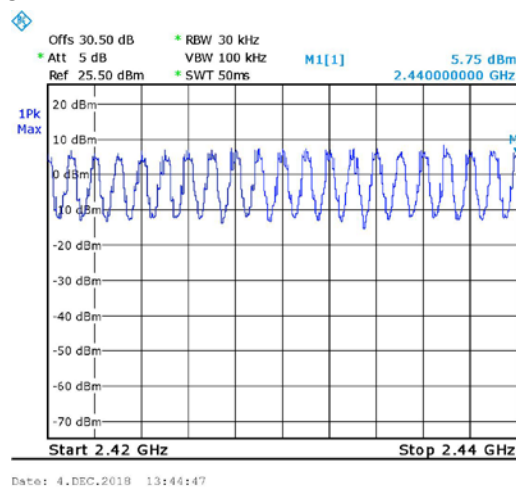


Figure 42. Number of Channels, Band 2, EDR

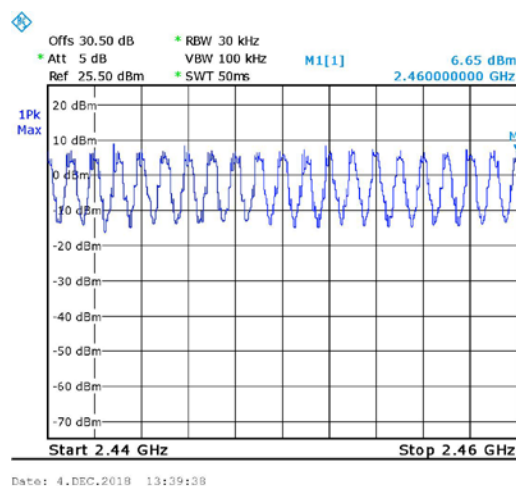


Figure 43. Number of Channels, Band 3, EDR

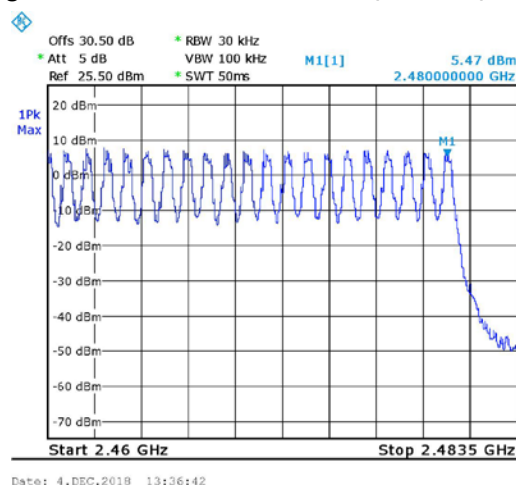


Figure 44. Number of Channels, Band 4, EDR

7.5 Test Equipment Used, Number of Hopping Frequencies

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note Below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note Below

Note: Testing was performed December 4, 2018

Figure 45 Test Equipment Used

8. Channel Frequency Separation

8.1 Test Specification

FCC Part 15, Subpart C, 15.247(a) (1)

8.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

The E.U.T. was set to hopping mode.

The spectrum analyzer was set to the following parameters:

Span = wide enough to capture two adjacent channels, RBW $\geq$ 1% of the span

Detector Function: Peak, Trace: Maximum Hold.

8.3 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


8.4 Test Results

Modulation	Channel Frequency Separation	Specification
(STD/EDR)	(kHz)	(kHz)
STD	1000.0	882.2
EDR	1149.7	$2/3 * (1311.4) = 865$

Figure 46 Test Results


JUDGEMENT: Passed by 865 kHz

For additional information see *Figure 47* and *Figure 48*.

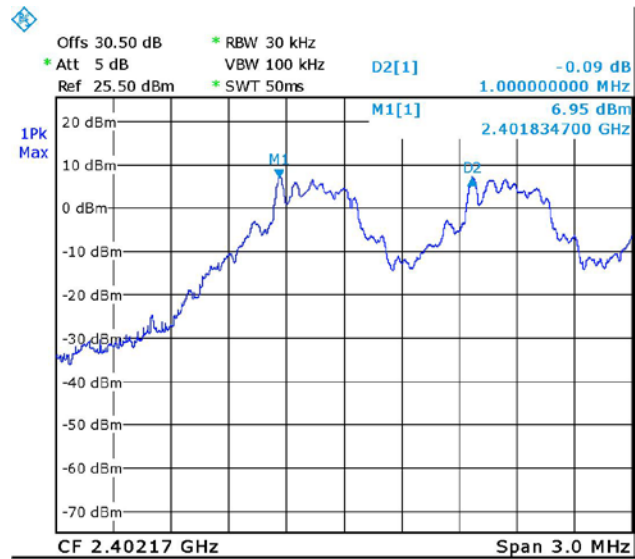

Date: 9.DEC.2018 08:56:54

Figure 47. Channel Frequency Separation, STD

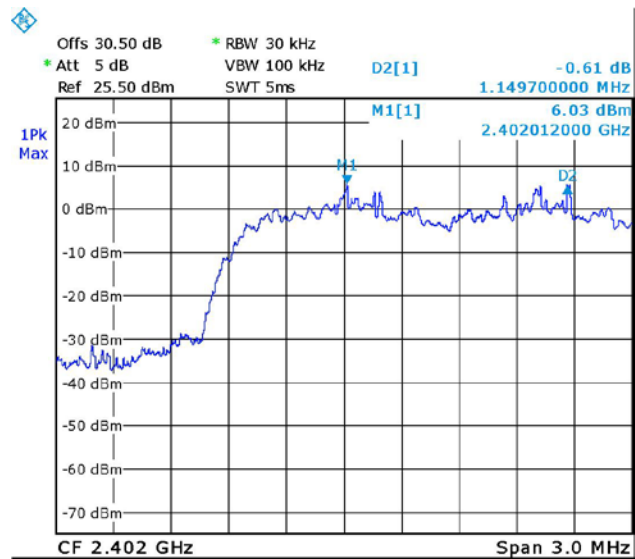

Date: 9.DEC.2018 09:54:16

Figure 48. Channel Frequency Separation, EDR



8.5 Test Equipment Used, Channel Frequency Separation Test

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note Below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note Below

Note: Testing was performed December 9, 2018

Figure 49 Test Equipment Used

9. Peak Output Power

9.1 Test Specification

FCC Part 15, Subpart C: section 15.247(b)(1)

9.2 Test Procedure

(Temperature (22°C)/ Humidity (54%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (total loss= 30.5dB).

The spectrum analyzer was set to the following parameters:

Span = ~5 times the 20dB bandwidth, centered on a hopping channel RBW $\geq$ of the 20dB bandwidth of the emission being measured

Detector Function: Peak, Trace: Maximum Hold.

9.3 Test Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band:

0.125 Watts. (The limits above applies to antenna gain until 6dBi).

9.4 Test Results

Modulation	Operation Frequency	Power	Power	Limit	Margin
(STD/EDR)	(MHz)	(dBm)	(mW)	(mW)	(mW)
STD	2402.0	9.8	9.55	1000.0	-990.45
	2440.0	9.7	9.33	1000.0	-990.67
	2480.0	9.6	9.12	1000.0	-990.88
EDR	2402.0	10.2	10.5	125.0	-114.50
	2440.0	10.1	10.2	125.0	-114.80
	2480.0	10.0	10.0	125.0	-115.00

Figure 50 Radiated Power Output Test Results

JUDGEMENT: Passed by 114.5mW

For additional information see *Figure 51 to Figure 56*.

Peak Output Power

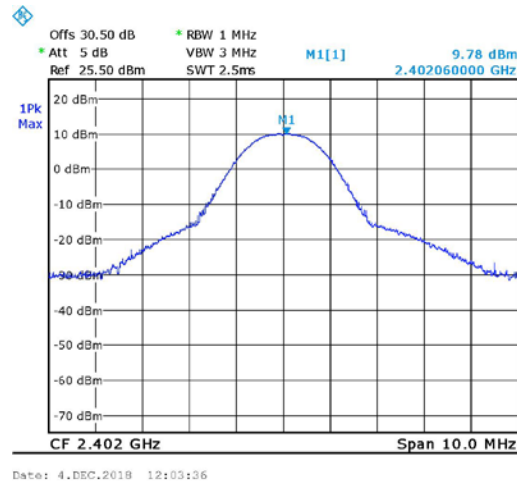


Figure 51. 2402MHz, STD

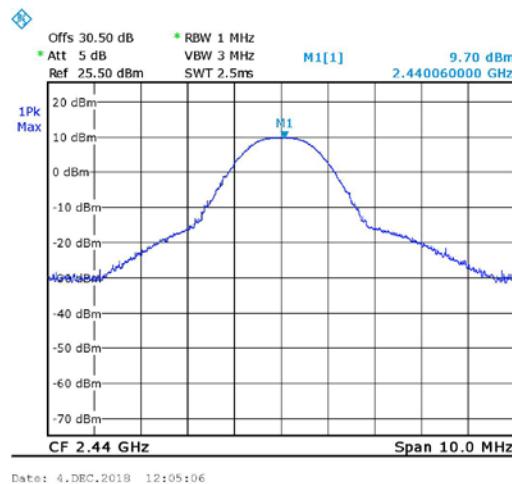


Figure 52. 2440MHz, STD

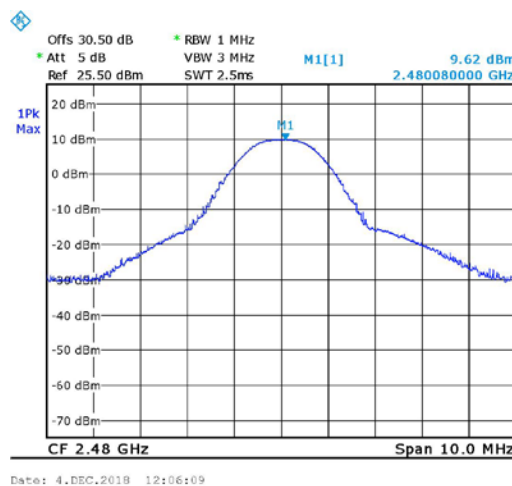


Figure 53. 2480MHz, STD

Peak Output Power

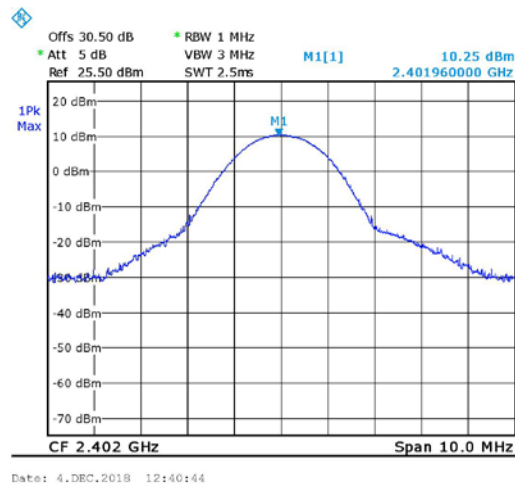


Figure 54. 2402MHz, EDR

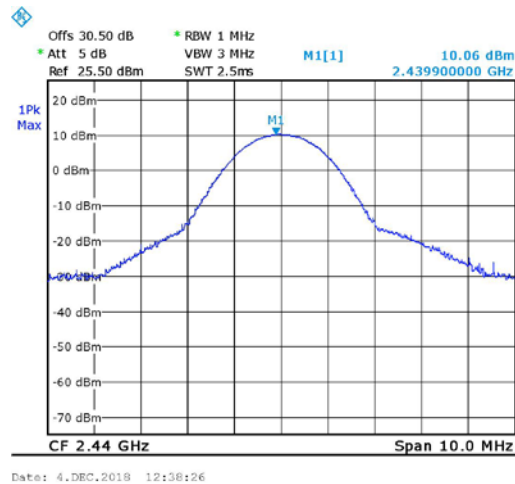


Figure 55. 2440MHz, EDR

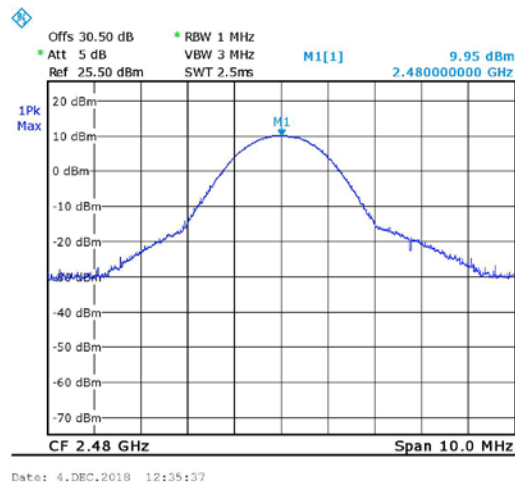


Figure 56. 2480MHz, EDR



9.5 Test Equipment Used, Peak Output Power

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note Below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note Below

Note: Testing was performed December 4, 2018

Figure 57 Test Equipment Used



10. Dwell Time on Each Channel

10.1 Test Specification

FCC Part 15, Part C, Section 15.247(a)(1)(iii)

10.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

The spectrum analyzer was set to the following parameters:

Span = zero span, centered on a hopping channel, $RBW \geq 1\text{MHz}$

Detector Function: Peak, Trace: Maximum Hold

10.3 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.4 Test Results

JUDGEMENT: Passed

The E.U.T met the requirements of the FCC Part 15, Section 15.247(d).

Additional information of the results is given in *Figure 58* to *Figure 61*.

Results for STD:

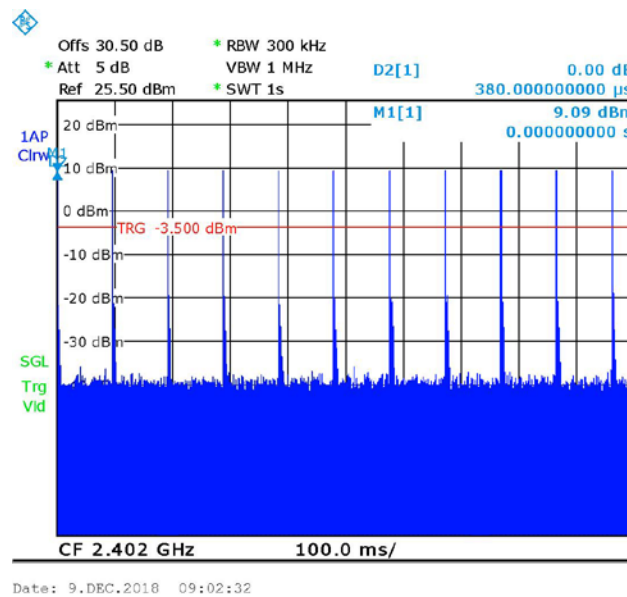


Figure 58 Number of Bursts in 1 sec=11

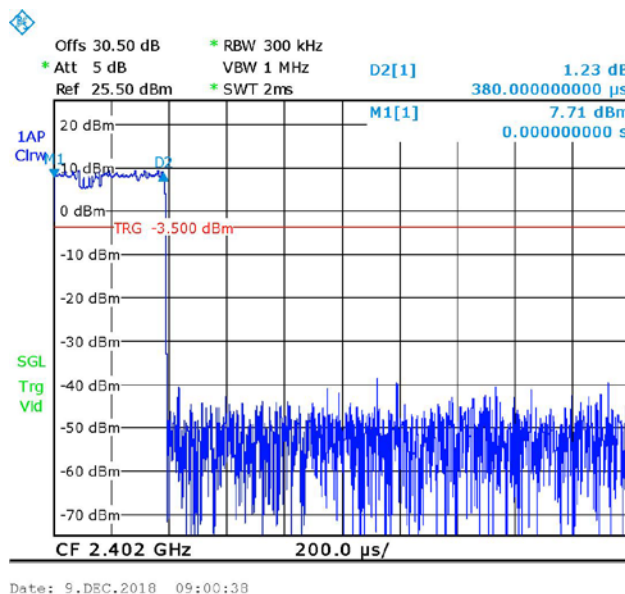


Figure 59 Burst Duration =0.38msec
DWELL TIME (31.6*11)*0.38m= 132msec<400msec

Results for EDR:

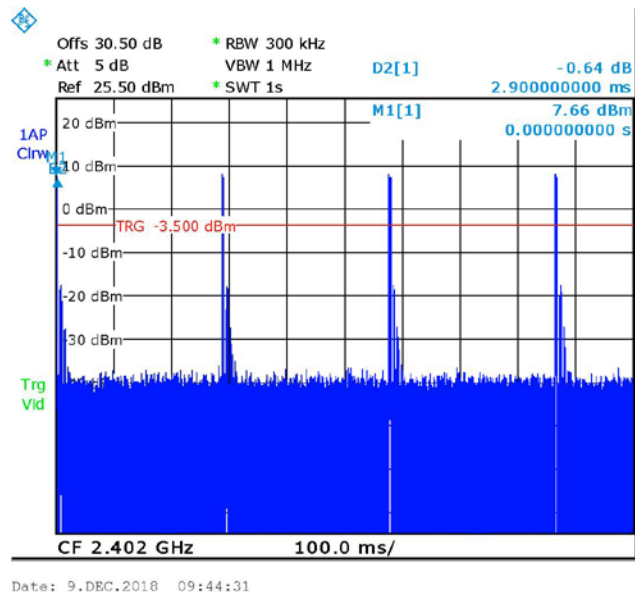


Figure 60 — Number of Bursts in 1 sec=4

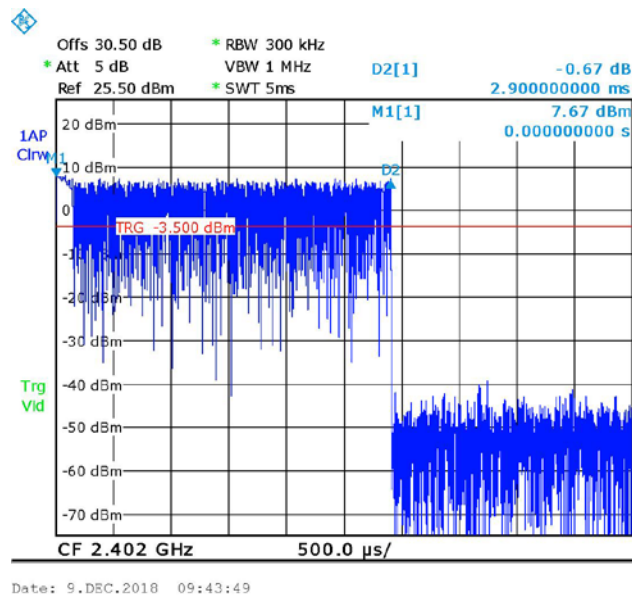


Figure 61 — Burst Duration =2.9msec

$$\text{DWELL TIME} = (31.6 * 4) * 2.9\text{m} = 366.6\text{msec} < 400\text{msec}$$



10.5 Test Equipment Used, Dwell Time on Each Channel

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note Below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note Below

Note: Testing was performed December 9, 2018

Figure 62 Test Equipment Used

11. Band Edge

11.1 Test Specification

FCC Part 15, Section 15.247(d)

11.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

The transmitter unit operated in 2 modes: hopping enabled and hopping disabled. The RBW was set to 100 kHz.

The EMI receiver was adjusted to the transmission channel at the maximum level. The display line was set to 20 dBc and the EMC analyzer was set to the band edge frequencies.

The E.U.T. was tested at the lower and the upper channels.

11.3 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.4 Test Results

Modulation (STD/EDR)	Mode	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level (dBm)	Limit (dBm)	Margin (dB)
STD	Hopping	2402-2480	2400.0	-37.5	-10.9	-26.6
			2483.5	-43.5	-11.1	-32.4
	Non-Hopping	2402	2400.0	-35.2	-10.9	-24.3
		2480	2483.5	-42.1	-10.9	-31.2
EDR	Hopping	2402-2480	2400.0	-39.6	-12.4	-27.2
			2483.5	-43.7	-11.9	-31.8
	Non-Hopping	2402	2400.0	-35.9	-11.9	-24.0
		2480	2483.5	-41.8	-11.9	-29.9

Figure 63 Band Edge Test Results



JUDGEMENT: Passed by 24.0dB

For additional information see *Figure 64* to *Figure 71*.

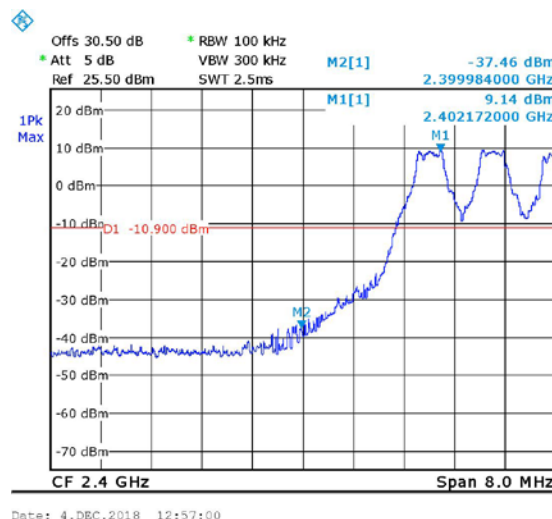


Figure 64 Hopping, Band Edge Low, STD

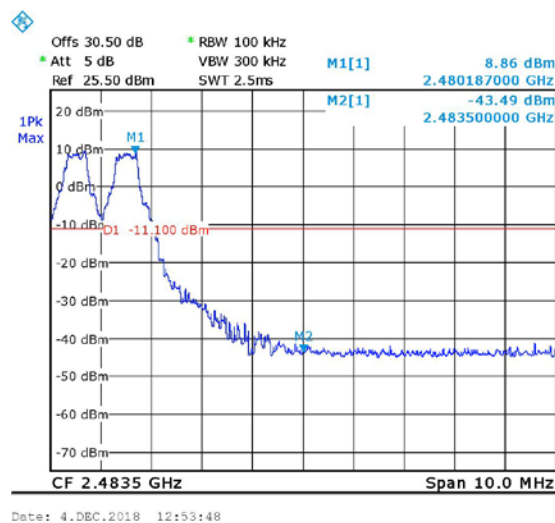


Figure 65 Hopping, Band Edge High, STD

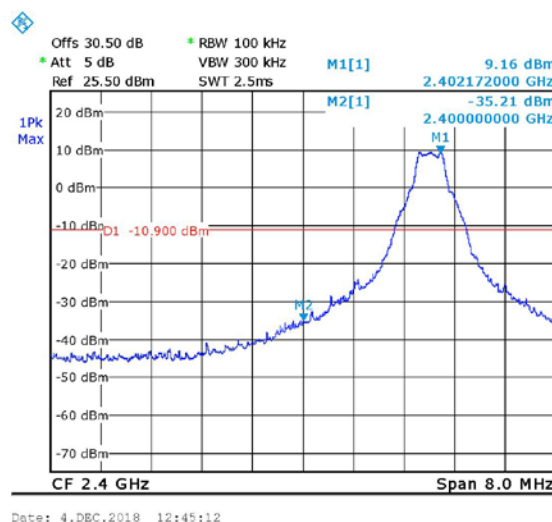


Figure 66 Non-Hopping, Band Edge Low, STD

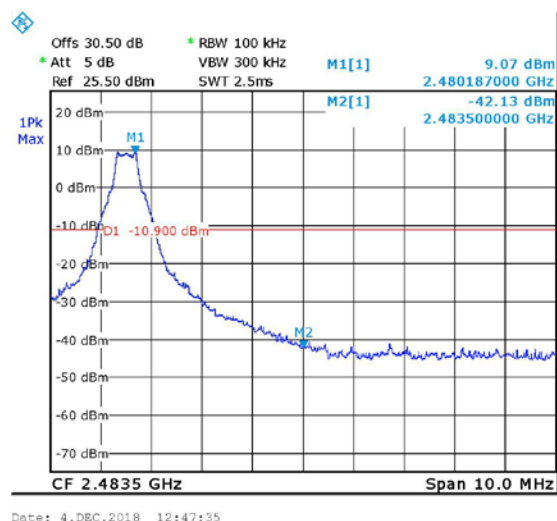


Figure 67 Non-Hopping, Band Edge High, STD

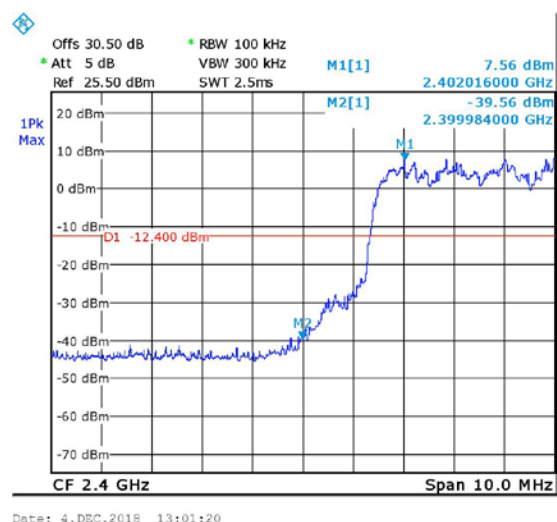


Figure 68 Hopping, Band Edge Low, EDR

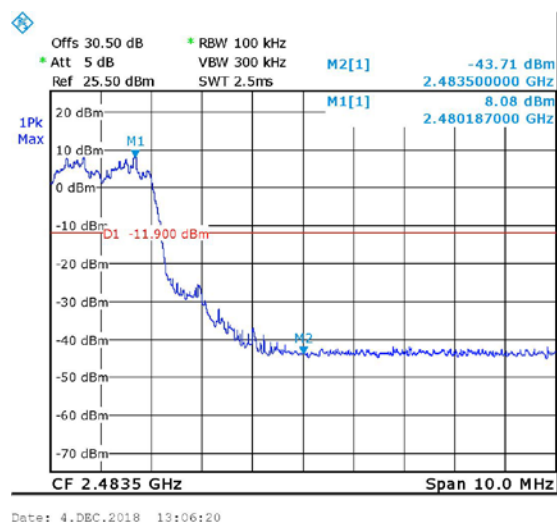


Figure 69 Hopping, Band Edge High, EDR

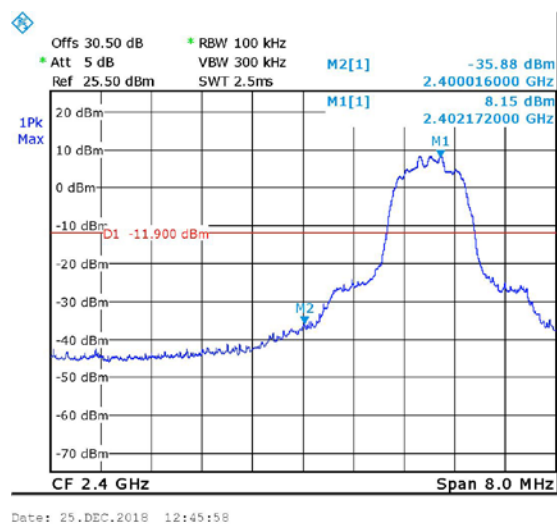


Figure 70 Non-Hopping, Band Edge Low, EDR

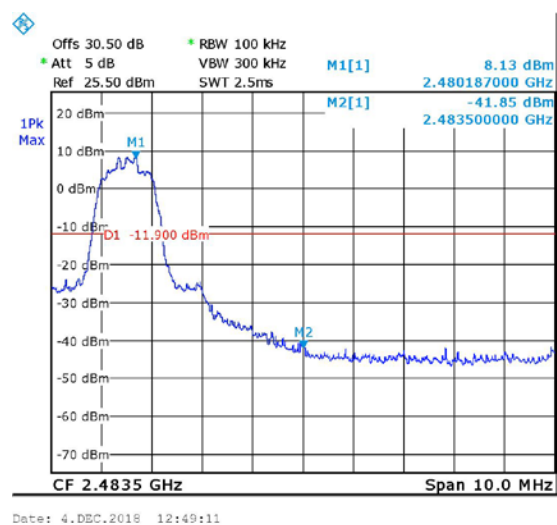


Figure 71 Non-Hopping, Band Edge High, EDR



11.5 Test Equipment Used, Band Edge

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note below

Note: Testing was performed December 4 and 25, 2018

Figure 72 Test Equipment Used



12. Emissions in Non-Restricted Frequency Bands

12.1 Test Specification

FCC, Part 15, Subpart C, Section 247(d)

12.2 Test Procedure

(Temperature (22°C)/ Humidity (56%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (max loss=44.0dB).

The frequency range 0.009-25,000.0 MHz was scanned to find other emissions that don't fall in the restricted band.

RBW was set to 100 kHz, detector set to max peak and trace to "max hold".

These frequencies were measured using a peak detector.

12.3 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

12.4 Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 247 (d) specification.

For additional information see *Figure 73* to *Figure 78*.

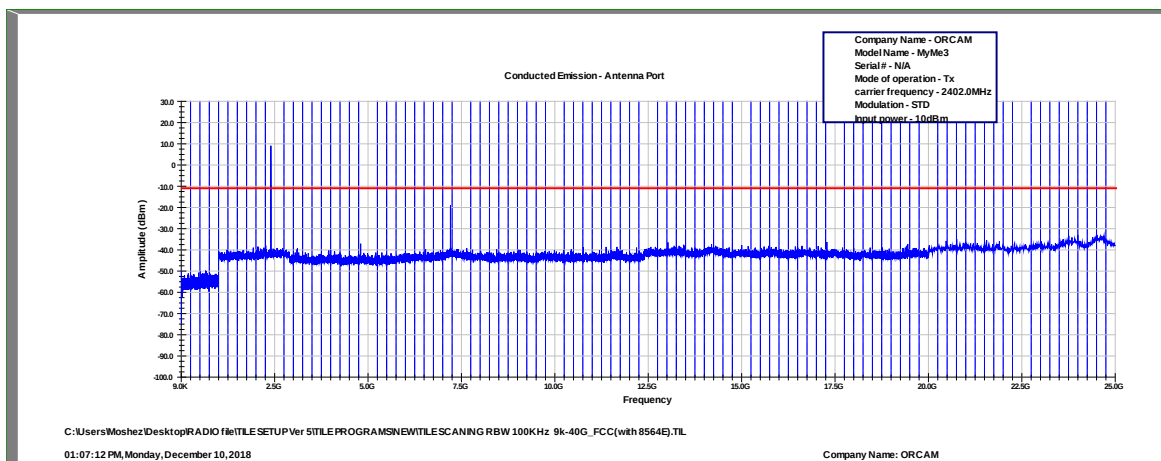


Figure 73. Conducted Emissions 2402MHz, STD

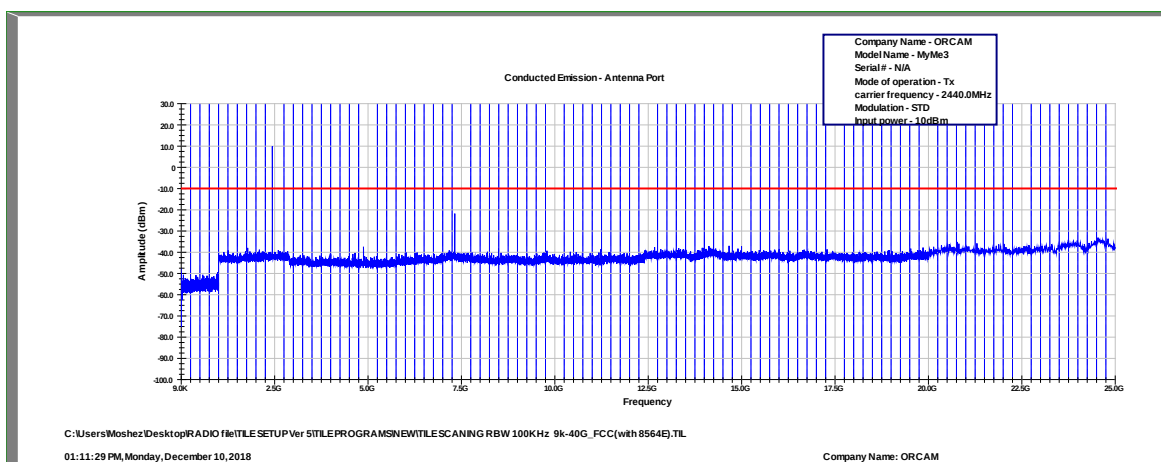


Figure 74. Conducted Emissions 2440MHz, STD

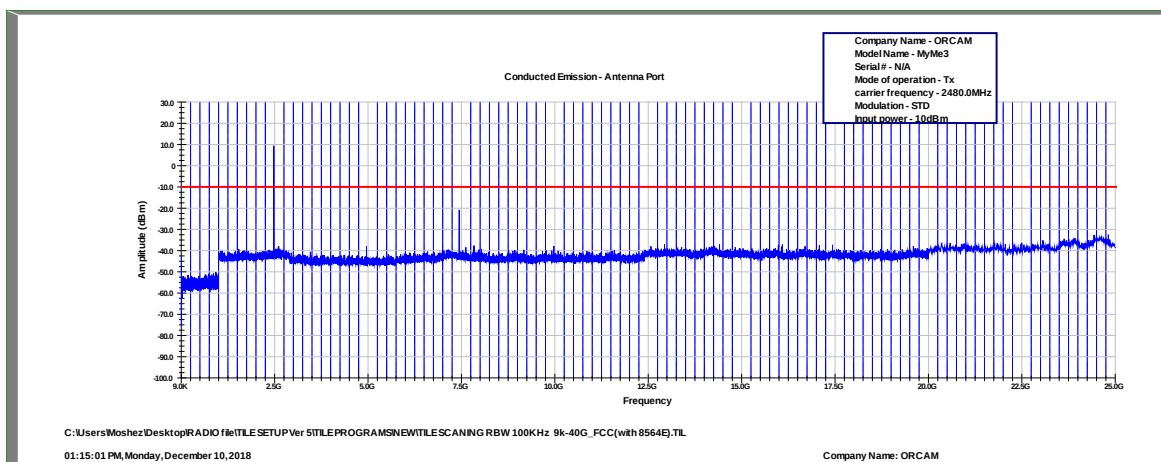


Figure 75. Conducted Emissions 2480MHz, STD

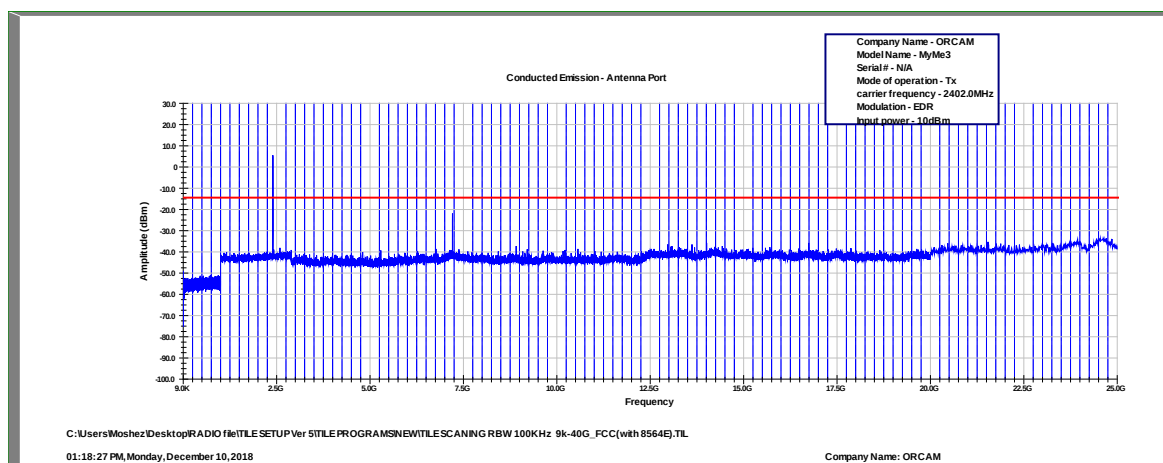


Figure 76. Conducted Emissions 2402MHz, EDR

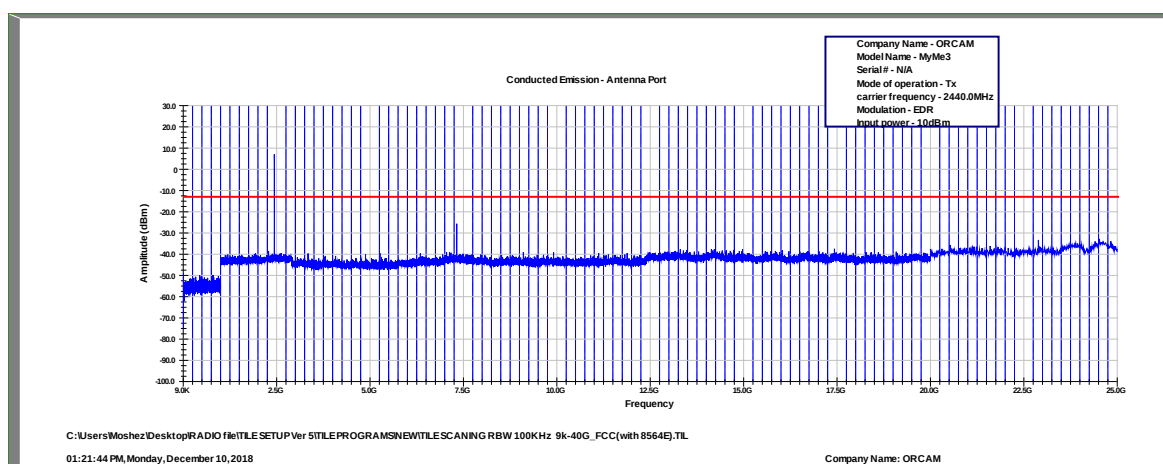


Figure 77. Conducted Emissions 2440MHz, EDR

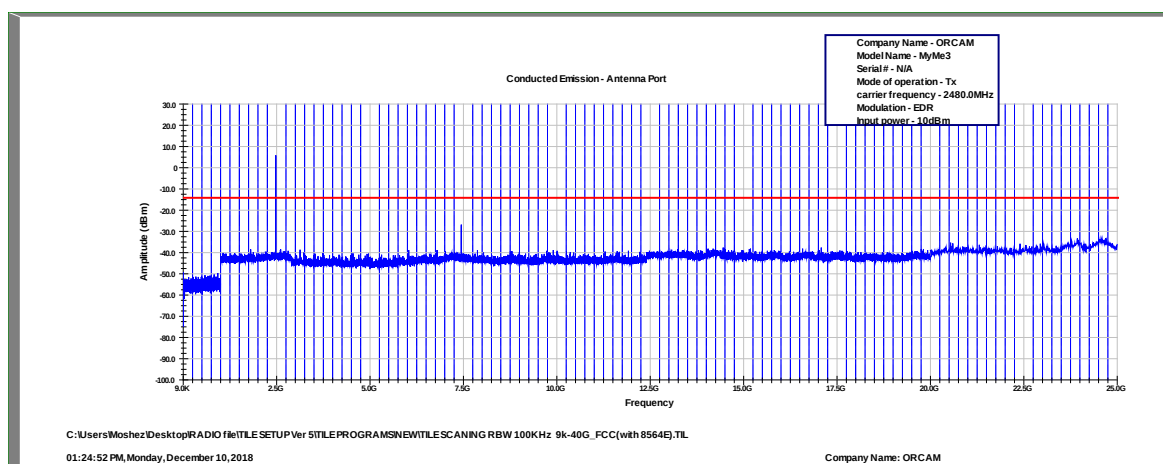


Figure 78. Conducted Emissions 2480MHz, EDR



Test Equipment Used, Emissions in Non-Restricted Frequency Bands

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 19, 2018	February 19, 2019
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	December 31, 2018 See Note below
RF Cable	Huber Suner	Sucofelex	27502/4PEA	October 1, 2017	December 31, 2018 See Note below

Note: Testing was performed December 10, 2018

Figure 79 Test Equipment Used



13. Emissions in Restricted Frequency Bands

13.1 Test Specification

FCC, Part 15, Subpart C, Sections 247(d), 15.205, 15.209

13.2 Test Procedure

(Temperature (20°C)/ Humidity (40%RH))

The E.U.T. operation mode and test set-up are as described in Section 2 of this report.

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-25.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -25.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

13.3 Test Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength* (dB μ V/m)	Field strength* (dB μ V/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

13.4 Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

For additional information see *Figure 80* and *Figure 81*.



Radiated Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC, Part 15, Subpart C, Sections 15.209, 15.205, 15.247(d)

Antenna Polarization: Horizontal/Vertical
Modulation: STD

Frequency Range: 9 kHz to 25.0 GHz
Detector: Peak, Average

Operation Frequency	Freq.	Pol.	Peak Reading	Peak Limit	Peak Margin	Average Reading	Average Limit	Average Margin
(MHz)	(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
2402.0	2390.0	V	54.3	74.0	-19.7	45.3	54.0	-8.7
	2390.0	H	53.6	74.0	-20.4	46.4	54.0	-7.6
	7206.0	V	66.0	74.0	-8.0	23.7	54.0	-30.3
	7206.0	H	67.5	74.0	-6.5	25.2	54.0	-28.8
2440.0	4880.0	V	64.6	74.0	-9.4	22.3	54.0	-31.7
	4880.0	H	55.4	74.0	-18.6	13.1	54.0	-40.9
	7320.0	V	64.6	74.0	-9.4	22.3	54.0	-31.7
	7320.0	H	68.4	74.0	-5.6	26.1	54.0	-27.9
2480.0	7440.0	V	62.0	74.0	-12.0	19.7	54.0	-34.3
	7440.0	H	67.4	74.0	-6.6	25.1	54.0	-28.9
	2483.5	V	56.5	74.0	-17.5	49.1	54.0	-4.9
	2483.5	H	58.1	74.0	-15.9	49.5	54.0	-4.5

Figure 80. Radiated Emission Results - STD

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission

E.U.T Description Wearable Device
Type ORCAM MYME
Serial Number: 18380173

Specification: FCC, Part 15, Subpart C, Sections 15.209, 15.205, 15.247(d)

Antenna Polarization: Horizontal/Vertical
Modulation: EDR

Frequency range: 9 kHz to 25.0 GHz
Detector: Peak, Average

Operation Frequency	Freq.	Pol.	Peak Reading	Peak Limit	Peak Margin	Average Reading	Average Limit	Average Margin
(MHz)	(MHz)	(H/V)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2402.0	2390.0	V	54.2	74.0	-19.8	45.5	54.0	-8.5
	2390.0	H	53.9	74.0	-20.1	45.2	54.0	-8.8
	7206.0	V	63.6	74.0	-10.4	32.9	54.0	-21.1
	7206.0	H	68.1	74.0	-5.9	37.4	54.0	-16.6
2440.0	4880.0	V	46.6	74.0	-27.4	15.9	54.0	-38.1
	4880.0	H	54.0	74.0	-20.0	23.3	54.0	-30.7
	7320.0	V	62.5	74.0	-11.5	31.8	54.0	-22.2
	7320.0	H	71.0	74.0	-3.0	40.3	54.0	-13.7
2480.0	7440.0	V	62.5	74.0	-11.5	31.8	54.0	-22.2
	7440.0	H	71.0	74.0	-3.0	40.3	54.0	-13.7
	2483.5	V	54.5	74.0	-19.5	48.1	54.0	-5.9
	2483.5	H	56.6	74.0	-17.4	48.6	54.0	-5.4

Figure 81. Radiated Emission Results - EDR

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



13.5 Test Equipment Used, Emissions in Restricted Frequency Bands

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 19, 2018	February 19, 2019
EMI Receiver	HP	8542E	3906A00276	February 19, 2018	February 19, 2019
RF Filter Section	HP	85420E	3705A00248	February 19, 2018	February 19, 2019
Spectrum Analyzer	HP	8593EM	3536A00120 ADI	February 20, 2018	February 20, 2019
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2018	October 19, 2019
Biconical Antenna	EMCO	3110B	9912-3337	May 15, 2017	May 15, 2019
Log Periodic Antenna	EMCO	3146	9505-4081	May 31, 2018	May 31, 2019
Horn Antenna	ETS	3115	29845	May 31, 2018	May 31, 2021
Horn Antenna	ARA	SWH-28	1007	December 31, 2017	December 31, 2020
MicroWave System Amplifier	HP	83006A	3104A00589	October 1, 2018	October 31, 2019
Low Noise Amplifier 1GHz-18GHz	Miteq	AFSX4- 02001800-50-8P	-	October 1, 2018	October 31, 2019
RF Cable Chamber	Commscope ORS	0623 WBC-400	G020132	October 1, 2018	December 31, 2018
RF Cable Oats	EIM	RG214-11N(X2)		August 13, 2018	August 31, 2019
Filter Band Pass 4-20 GHz	Meuro	MFL040120H50	902252	December 24, 2018	December 24, 2019
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	9608-1497	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Note: Testing was performed December 25, 2018

Figure 82 Test Equipment Used

14. Avg. Factor Calculation

1. Pulse period = 1 (worst scenario)
2. Pulse duration = 1 (worst scenario)
3. STD Burst duration = 0.38msec
4. EDR Burst duration= 2.9msec
5. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$
6. STD Average factor = -42.3
7. EDR Average factor = -30.7

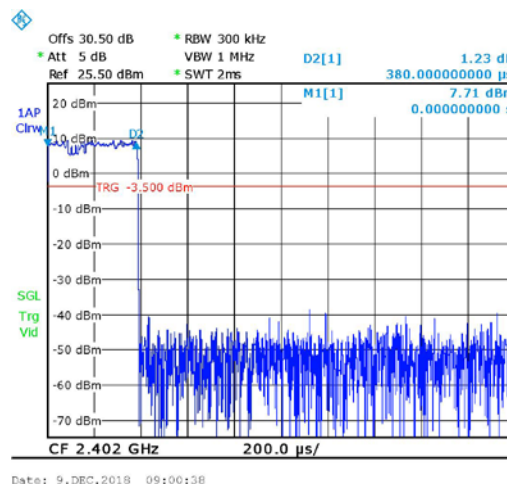


Figure 83. Burst Duration, STD

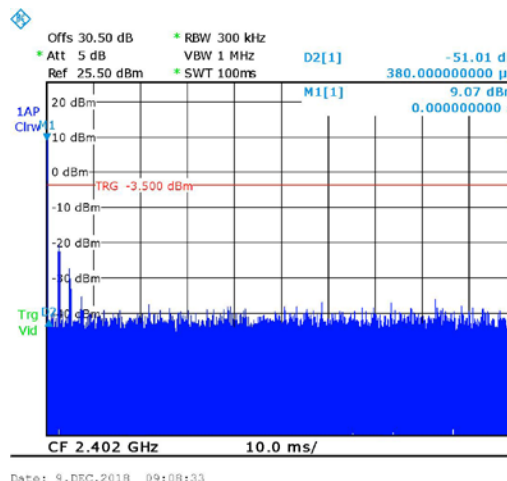


Figure 84. Number of Bursts in 100msec=2, STD

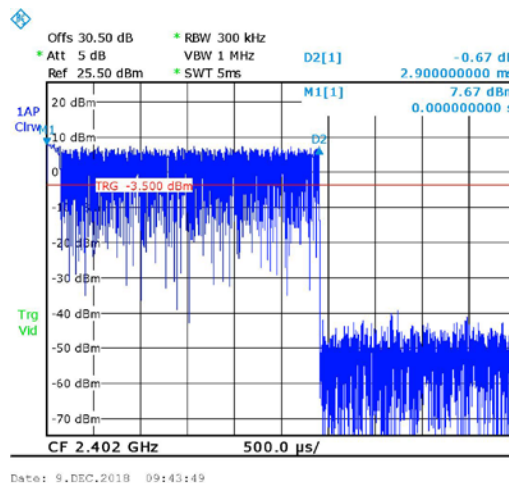


Figure 85. Burst Duration, EDR

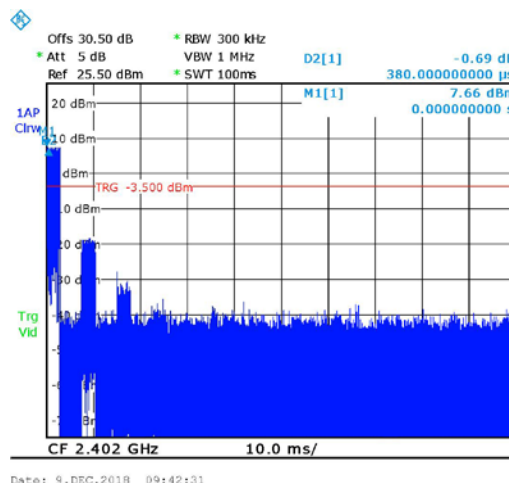


Figure 86. Number of Bursts in 100msec=1, EDR

14.1 Test Equipment Used, Average Factor

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	Rodhe & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019

Figure 87 Test Equipment Used



15. Antenna Gain/Information

The antenna gain is -2 dBi, integral type.



16. R.F Exposure/Safety

Typical use of the E.U.T. is as a wearable device.

The typical distance between the E.U.T. and the user is 0.5 cm.

SAR Testing Exclusion Based on Section 4.3.1 and Appendix A of KDB 447498 D01 V06
Requirements

For FCC

Section 4.3.1 and Appendix A of KDB447498 D01 V06 was used as the guidance as follows:

Conducted power output = 10.2dBm + (-2dBi) (antenna gain) = 8.2dBm = 6.61mW

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \left[\sqrt{f(\text{GHz})} \right]$$

$$= 6.61/5 \cdot 1.55 = 2.05$$
 this value is less than 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

The SAR measurement is not necessary.



17. APPENDIX A - CORRECTION FACTORS

17.1 Correction factors for RF OATS Cable 35m ITL #1911

Frequency (MHz)	Cable loss (dB)
1.00	0.5
10.00	1
20.00	1.34
30.00	1.5
50.00	1.83
100.00	2.67
150.00	3.17
200.00	3.83
250.00	4.17
300.00	4.5
350.00	5.17
400.00	5.5
450.00	5.83
500.00	6.33
550.00	6.67
600.00	6.83
650.00	7.17
700.00	7.66
750.00	7.83
800.00	8.16
850.00	8.5
900.00	8.83
950.00	8.84
1000.00	9



17.2 Correction factor for RF CABLE for Semi Anechoic Chamber

ITL # 1840

Frequency (GHz)	loss Result (dB)
0.5	-1.0
1.0	-1.4
1.5	-1.7
2.0	-2.0
2.5	-2.3
3.0	-2.6
3.5	-2.8
4.0	-3.1
4.5	-3.3
5.0	-3.6
5.5	-3.7
6.0	-4.0
6.5	-4.4
7.0	-4.7
7.5	-4.8
8.0	-5.0
8.5	-5.1
9.0	-5.6
9.5	-5.8
10.0	-6.0
10.5	-6.2
11.0	-6.2
11.5	-6.0
12.0	-6.0
12.5	-6.1
13.0	-6.3
13.5	-6.5
14.0	-6.7
14.5	-7.0
15.0	-7.3
15.5	-7.5
16.0	-7.6
16.5	-8.0
17.0	-8.0
17.5	-8.1
18.0	-8.2
18.5	-8.2
19.0	-8.3
19.5	-8.6
20.0	-8.5

NOTES:

1. The cable is manufactured by Commscope
2. The cable type is 0623 WBC-400, serial # G020132 and 10m long



17.3 Correction factors for Active Loop Antenna
ITL # 1075:

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8



17.4 Correction factors for biconical antenna – ITL # 1356

Frequency	AF
[MHz]	[dB/m]
30	14.77
35	13.46
40	12.57
45	11.62
50	10.87
60	9.19
70	9.52
80	9.55
90	9.27
100	10.20
120	11.18
140	12.02
160	12.62
180	13.44
200	14.82



17.5 Correction factors for log periodic antenna – ITL # 1349

Frequency	AF
[MHz]	[dB/m]
200	11.31
250	11.85
300	14.47
400	15.12
500	17.69
600	18.45
700	20.52
800	20.77
900	21.97
1000	23.21



17.6 Correction factors for Horn Antenna

ITL # 1354

Frequency	AF1
[MHz]	[dB/m]
1000	23.64
1500	26.14
2000	27.20
2500	28.20
3000	29.63
3500	31.28
4000	31.97
4500	32.25
5000	33.34
5500	33.67
6000	34.63
6500	35.71
7000	35.92
7500	36.34
8000	37.21
8500	37.28
9000	37.24
9500	37.28
10000	37.37
10500	37.77
11000	37.96
11500	38.55
12000	38.52
13000	39.30
14000	40.75
15000	40.32
16000	42.51
17000	42.35
18000	41.58



**17.7 Correction factors for Double –Ridged Waveguide
Horn ANTENNA**

ITL # 1352

FREQUENCY	AFE		FREQUENCY	AFE
(GHz)	(dB/m)		(GHz)	(dB/m)
0.75	25		9.5	38
1.0	23.5		10.0	38.5
1.5	26.0		10.5	38.5
2.0	29.0		11.0	38.5
2.5	27.5		11.5	38.5
3.0	30.0		12.0	38.0
3.5	31.5		12.5	38.5
4.0	32.5		13.0	40.0
4.5	32.5		13.5	41.0
5.0	33.0		14.0	40.0
5.5	35.0		14.5	39.0
6.0	36.5		15.0	38.0
6.5	36.5		15.5	37.5
7.0	37.5		16.0	37.5
7.5	37.5		16.5	39.0
8.0	37.5		17.0	40.0
8.5	38.0		17.5	42.0
9.0	37.5		18.0	42.5



17.8 Correction factors for Horn Antenna
ITL #:1353

CALIBRATION DATA

3 m distance

Frequency, MHz	Measured antenna factor, dB/m ¹⁾
18000	32.4
18500	32.0
19000	32.3
19500	32.4
20000	32.3
20500	32.8
21000	32.8
21500	32.7
22000	33.1
22500	33.0
23000	33.1
23500	33.8
24000	33.5
24500	33.5
25000	33.8
25500	33.9
26000	34.2
26500	34.7

¹⁾ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.