

RF TEST REPORT



Report No.: 16071095-FCC-R1

Supersede Report No.: N/A

Applicant	Jethro Trading LTD.	
Product Name	Jethro 3G Senior Flip Cell Phone	
Model No.	SC330	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2015; FCC Part 24(E):2015; ANSI/TIA-603-D: 2010	
Test Date	November 01 to 15, 2016	
Issue Date	November 17, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16071095-FCC-R1
Page	3 of 83

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 RF EXPOSURE (SAR).....	10
6.2 RF OUTPUT POWER	11
6.3 PEAK-AVERAGE RATIO.....	21
6.4 OCCUPIED BANDWIDTH.....	25
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	35
6.6 SPURIOUS RADIATED EMISSIONS	48
6.7 BAND EDGE.....	54
6.8 FREQUENCY STABILITY	64
ANNEX A. TEST INSTRUMENT.....	72
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	74
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	79
ANNEX C.II. EUT OPERATING CONKITIONS	81
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	82
ANNEX E. DECLARATION OF SIMILARITY	83

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16071095-FCC-R1	NONE	Original	November 17, 2016

2. Customer information

Applicant Name	Jethro Trading LTD.
Applicant Add	505 - 8840 210TH STREET, #231 Langley, Canada V1M2Y2
Manufacturer	Shenzhen Bayuda Technologies,co.,ltd
Manufacturer Add	Room A433 A Block,Shenzhen Industrial products exhibition procurement center the baoyuan road baoan distric

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Jethro 3G Senior Flip Cell Phone

Main Model: SC330

Serial Model: N/A

Date EUT received: October 31, 2016

Test Date(s): November 01 to 15, 2016

Equipment Category : PCE

Antenna Gain: GSM850: 0.5dBi
PCS1900: 1.0dBi
UMTS-FDD Band V: 1.2dBi
UMTS-FDD Band II: 1.2dBi
Bluetooth: 0.5dBi

Type of Modulation: GSM / GPRS: GMSK
EGPRS: GMSK, 8PSK
UMTS-FDD: QPSK
Bluetooth: GFSK, π /4DQPSK, 8DPSK

Adapter:
Model: HJ-050050-US
Input: AC100-240V~50/60Hz, 0.15A
Output: DC 5.0V—500mA
Charging Base:
Model: SC330
Input: DC5.0V, 500mA
Output: DC5.0V, 500mA
Battery:
Model: SC330
Spec: 3.7V 800mAh/2.96Wh
Charging limited voltage: 4.2V

Test Report	16071095-FCC-R1
Page	7 of 83

GSM Voice:GSM850: 33.35 dBm

PCS1900: 29.86 dBm

GPRS:GSM850: 33.33 dBm

PCS1900: 28.9 dBm

EGPRS(MCS1):GSM850: 33.19 dBm

PCS1900: 30.96 dBm

Maximum Conducted

EGPRS(MCS5):GSM850: 32.17 dBm

AV Power to Antenna:

PCS1900: 28.52 dBm

RMC:UMTS-FDD Band V: 24.72 dBm

UMTS-FDD Band II: 22.16 dBm

HSUPA:UMTS-FDD Band V: 23.62 dBm

UMTS-FDD Band II: 21.55 dBm

HSDPA:UMTS-FDD Band V: 23.45 dBm

UMTS-FDD Band II: 21.56 dBm

GSM Voice:GSM850: 31.75 dBm / ERP

PCS1900: 30.82 dBm / EIRP

GPRS:GSM850: 31.72 dBm / ERP

PCS1900: 29.56 dBm / EIRP

EGPRS(MCS5):GSM850: 30.5 dBm / ERP

PCS1900: 29.49 dBm / EIRP

ERP/EIRP:

RMC:UMTS-FDD Band V: 23.73 dBm / ERP

UMTS-FDD Band II: 23.51 dBm / EIRP

HSUPA:UMTS-FDD Band V: 22.61 dBm / ERP

UMTS-FDD Band II: 22.66 dBm / EIRP

HSDPA:UMTS-FDD Band V: 22.59 dBm / ERP

UMTS-FDD Band II: 22.62 dBm / EIRP

Port:

Power Port, Earphone Port, USB Port

FCC ID:

2AAWJSC330

GSM 850: 124CH

PCS1900: 299CH

Number of Channels:

UMTS-FDD Band V: 102CH

UMTS-FDD Band II: 277CH

Bluetooth: 79CH

RF Operating Frequency (ies): GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
Bluetooth: 2402-2480 MHz

Trade Name : Jethro

GPRS/EGPRS Multi-slot class 8/10/12

Antenna Type: GSM/PCS/UMTS-FDD : PIFA antenna
BT : Monopole antenna

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c);	RF Output Power	Compliance
§ 24.232 (d) ;	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238;	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a);	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass


The EUT is a portable device, thus requires SAR evaluation;
Please refer to RF Exposure Evaluation Report: 16071095-FCC-H.

6.2 RF Output Power

Temperature	23°C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	November 14, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒

Test Setup	 Base Station EUT
------------	--

Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated.
----------------	---

Test Report	16071095-FCC-R1
Page	12 of 83

	- Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = 10 log (TX power in Watts/0.001) – the absolute level - Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	33.25	33.25	33.35	33±1	29.4	28.46	29.86	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	33.23	33.22	33.33	33±1	28.52	28.57	28.9	28±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	31.42	31.32	31.22	31±1	28.31	28.47	28.73	28±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	27.58	27.42	27.22	27±1	26.72	26.6	26.41	26±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	33.19	33.18	33.18	33±1	30.53	29.51	30.96	30±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	31.37	31.25	31.19	31±1	28.28	28.98	28.95	28±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	27.63	27.45	27.27	27±1	26.93	26.95	26.91	26.5±1
EGPRS Multi-Slot Class 8 (1 uplink) 8PSK MCS5	32.15	32.13	32.17	32±1	28.47	28.52	28.37	28±1
EGPRS Multi-Slot Class 10 (2 uplink) 8PSK MCS5	31.41	31.39	31.43	31±1	27.35	27.64	27.53	27±1
EGPRS Multi-Slot Class 12 (4 uplink) 8PSK MCS5	28.78	28.85	28.89	28±1	24.87	24.63	24.52	24±1

Test Report	16071095-FCC-R1
Page	14 of 83

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	24.72	24±1
	4175	835	24.55	24±1
	4233	846.6	24.31	24±1
HSDPA Subtest1	4132	826.4	23.25	23±1
	4175	835	23.25	23±1
	4233	846.6	23.45	23±1
HSDPA Subtest2	4132	826.4	23.22	23±1
	4175	835	23.43	23±1
	4233	846.6	23.44	23±1
HSDPA Subtest3	4132	826.4	23.42	23±1
	4175	835	23.21	23±1
	4233	846.6	23.21	23±1
HSDPA Subtest4	4132	826.4	23.31	23±1
	4175	835	23.11	23±1
	4233	846.6	23.42	23±1
HSUPA Subtest1	4132	826.4	23.38	23±1
	4175	835	23.45	23±1
	4233	846.6	23.41	23±1
HSUPA Subtest2	4132	826.4	23.42	23±1
	4175	835	23.13	23±1
	4233	846.6	23.31	23±1
HSUPA Subtest3	4132	826.4	23.62	23±1
	4175	835	23.23	23±1
	4233	846.6	23.63	23±1
HSUPA Subtest4	4132	826.4	23.54	23±1
	4175	835	23.31	23±1
	4233	846.6	23.35	23±1
HSUPA Subtest5	4132	826.4	23.42	23±1
	4175	835	23.35	23±1
	4233	846.6	23.22	23±1

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	22.06	22±1
	9400	1880	22.16	22±1
	9538	1907.6	22.13	22±1
HSDPA Subtest1	9262	1852.4	21.22	21.3±1
	9400	1880	21.33	21.3±1
	9538	1907.6	21.35	21.3±1
HSDPA Subtest2	9262	1852.4	21.56	21.3±1
	9400	1880	21.15	21.3±1
	9538	1907.6	21.32	21.3±1
HSDPA Subtest3	9262	1852.4	21.35	21.3±1
	9400	1880	21.45	21.3±1
	9538	1907.6	21.34	21.3±1
HSDPA Subtest4	9262	1852.4	21.14	21.3±1
	9400	1880	21.36	21.3±1
	9538	1907.6	21.47	21.3±1
HSUPA Subtest1	9262	1852.4	21.37	21.3±1
	9400	1880	21.44	21.3±1
	9538	1907.6	21.34	21.3±1
HSUPA Subtest2	9262	1852.4	21.23	21.3±1
	9400	1880	21.25	21.3±1
	9538	1907.6	21.27	21.3±1
HSUPA Subtest3	9262	1852.4	21.37	21.3±1
	9400	1880	21.38	21.3±1
	9538	1907.6	21.21	21.3±1
HSUPA Subtest4	9262	1852.4	21.31	21.3±1
	9400	1880	21.55	21.3±1
	9538	1907.6	21.27	21.3±1
HSUPA Subtest5	9262	1852.4	21.33	21.3±1
	9400	1880	21.16	21.3±1
	9538	1907.6	21.33	21.3±1

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	25.28	V	6.8	0.53	31.55	38.45
824.2	23.59	H	6.8	0.53	29.86	38.45
836.6	25.41	V	6.8	0.53	31.68	38.45
836.6	23.76	H	6.8	0.53	30.03	38.45
848.8	25.38	V	6.9	0.53	31.75	38.45
848.8	23.67	H	6.9	0.53	30.04	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	23.44	V	7.88	0.85	30.47	33
1850.2	21.78	H	7.88	0.85	28.81	33
1880	22.41	V	7.88	0.85	29.44	33
1880	20.86	H	7.88	0.85	27.89	33
1909.8	23.81	V	7.86	0.85	30.82	33
1909.8	22.15	H	7.86	0.85	29.16	33

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	25.31	V	6.8	0.53	31.58	38.45
824.2	23.65	H	6.8	0.53	29.92	38.45
836.6	25.43	V	6.8	0.53	31.7	38.45
836.6	23.79	H	6.8	0.53	30.06	38.45
848.8	25.35	V	6.9	0.53	31.72	38.45
848.8	23.68	H	6.9	0.53	30.05	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.34	V	7.88	0.85	29.37	33
1850.2	20.61	H	7.88	0.85	27.64	33
1880	22.48	V	7.88	0.85	29.51	33
1880	20.73	H	7.88	0.85	27.76	33
1909.8	22.55	V	7.86	0.85	29.56	33
1909.8	20.86	H	7.86	0.85	27.87	33

EGPRS(MCS5):

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.23	V	6.8	0.53	30.5	38.45
824.2	22.64	H	6.8	0.53	28.91	38.45
836.6	24.16	V	6.8	0.53	30.43	38.45
836.6	22.51	H	6.8	0.53	28.78	38.45
848.8	24.05	V	6.9	0.53	30.42	38.45
848.8	22.43	H	6.9	0.53	28.8	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.26	V	7.88	0.85	29.29	33
1850.2	20.53	H	7.88	0.85	27.56	33
1880	22.09	V	7.88	0.85	29.12	33
1880	20.27	H	7.88	0.85	27.3	33
1909.8	22.48	V	7.86	0.85	29.49	33
1909.8	20.59	H	7.86	0.85	27.6	33

RMC

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	17.25	V	6.8	0.53	23.52	38.45
826.4	16.48	H	6.8	0.53	22.75	38.45
835	17.46	V	6.8	0.53	23.73	38.45
835	16.65	H	6.8	0.53	22.92	38.45
846.6	17.03	V	6.9	0.53	23.4	38.45
846.6	16.24	H	6.9	0.53	22.61	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	16.34	V	7.88	0.85	23.37	33
1852.4	15.23	H	7.88	0.85	22.26	33
1880	16.48	V	7.88	0.85	23.51	33
1880	15.36	H	7.88	0.85	22.39	33
1907.6	16.29	V	7.86	0.85	23.3	33
1907.6	15.18	H	7.86	0.85	22.19	33

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	16.12	V	6.8	0.53	22.39	38.45
826.4	15.34	H	6.8	0.53	21.61	38.45
835	16.28	V	6.8	0.53	22.55	38.45
835	15.46	H	6.8	0.53	21.73	38.45
846.6	16.22	V	6.9	0.53	22.59	38.45
846.6	15.41	H	6.9	0.53	21.78	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	15.34	V	7.88	0.85	22.37	33
1852.4	14.23	H	7.88	0.85	21.26	33
1880	15.59	V	7.88	0.85	22.62	33
1880	14.43	H	7.88	0.85	21.46	33
1907.6	15.41	V	7.86	0.85	22.42	33
1907.6	14.28	H	7.86	0.85	21.29	33

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	16.15	V	6.8	0.53	22.42	38.45
826.4	15.36	H	6.8	0.53	21.63	38.45
835	16.02	V	6.8	0.53	22.29	38.45
835	15.23	H	6.8	0.53	21.5	38.45
846.6	16.24	V	6.9	0.53	22.61	38.45
846.6	15.42	H	6.9	0.53	21.79	38.45

EIRP for UMTS-FDD Band II (Part 24E)


Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	15.63	V	7.88	0.85	22.66	33
1852.4	14.44	H	7.88	0.85	21.47	33
1880	15.57	V	7.88	0.85	22.6	33
1880	14.36	H	7.88	0.85	21.39	33
1907.6	15.64	V	7.86	0.85	22.65	33
1907.6	14.42	H	7.86	0.85	21.43	33

6.3 Peak-Average Ratio

Temperature	23°C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	November 14, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	☒

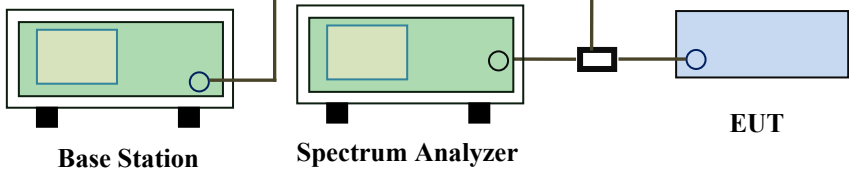Test Setup	 The diagram illustrates the test setup. On the left is a green box labeled 'Base Station'. A cable connects its output to the input of a green box labeled 'Spectrum Analyzer'. Another cable connects the output of the Spectrum Analyzer to the input of a blue box labeled 'EUT' (Equipment Under Test).
------------	--

Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output power level, then a conventional wide-band RF power meter can be used.
----------------	---

Test Report	16071095-FCC-R1
Page	22 of 83

	If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

GSM : GSM 1900 PK-AV POWER(PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.21	29.4	0.81
1880	30.12	28.46	1.66
1909.8	30.34	29.86	0.48

GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	29.45	28.52	0.93
1880	29.21	28.57	0.64
1909.8	29.54	28.9	0.64

EGPRS (MCS5) 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	25.47	24.87	0.6
1880	25.41	24.63	0.78
1909.8	25.32	24.52	0.8

RMC : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.43	22.06	1.37
1880	23.46	22.16	1.3
1907.6	23.31	22.13	1.18

HSUPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	22.26	21.37	0.89
1880	22.48	21.44	1.04
1907.6	22.31	21.34	0.97

HSDPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.31	21.22	2.09
1880	23.25	21.33	1.92
1907.6	23.21	21.35	1.86

6.4 Occupied Bandwidth

Temperature	22°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
Test date :	November 09 to 10, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup	Base Station Spectrum Analyzer EUT		
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	246.5141	323.032
190	836.6	247.3008	316.262
251	848.8	243.5813	319.958

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	246.1853	320.748
661	1880.0	246.5087	322.551
810	1909.8	247.2648	322.089

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	243.1581	316.825
190	836.6	247.1673	320.163
251	848.8	244.9796	322.077

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	247.5649	322.401
661	1880.0	245.4377	310.980
810	1909.8	248.9323	319.683

EGPRS (MCS 5):

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	248.3982	318.356
190	836.6	243.7108	313.123
251	848.8	256.2596	322.897

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	242.4466	311.507
661	1880.0	247.9669	320.497
810	1909.8	245.2366	324.014

RMC:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1446	4.702
4175	835.0	4.1666	4.721
4233	846.6	4.1397	4.689

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1796	4.755
9400	1880.0	4.1697	4.705
9538	1907.6	4.1521	4.709

HSUPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1512	4.726
4175	835.0	4.1653	4.731
4233	846.6	4.1496	4.695

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1711	4.735
9400	1880.0	4.1618	4.718
9538	1907.6	4.1583	4.715

HSDPA:

UMTS-FDD Band V (Part 22H)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.1525	4.716
4175	835.0	4.1574	4.710
4233	846.6	4.1594	4.715

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1720	4.713
9400	1880.0	4.1737	4.710
9538	1907.6	4.1544	4.711

Test Plots


GMS Voice:

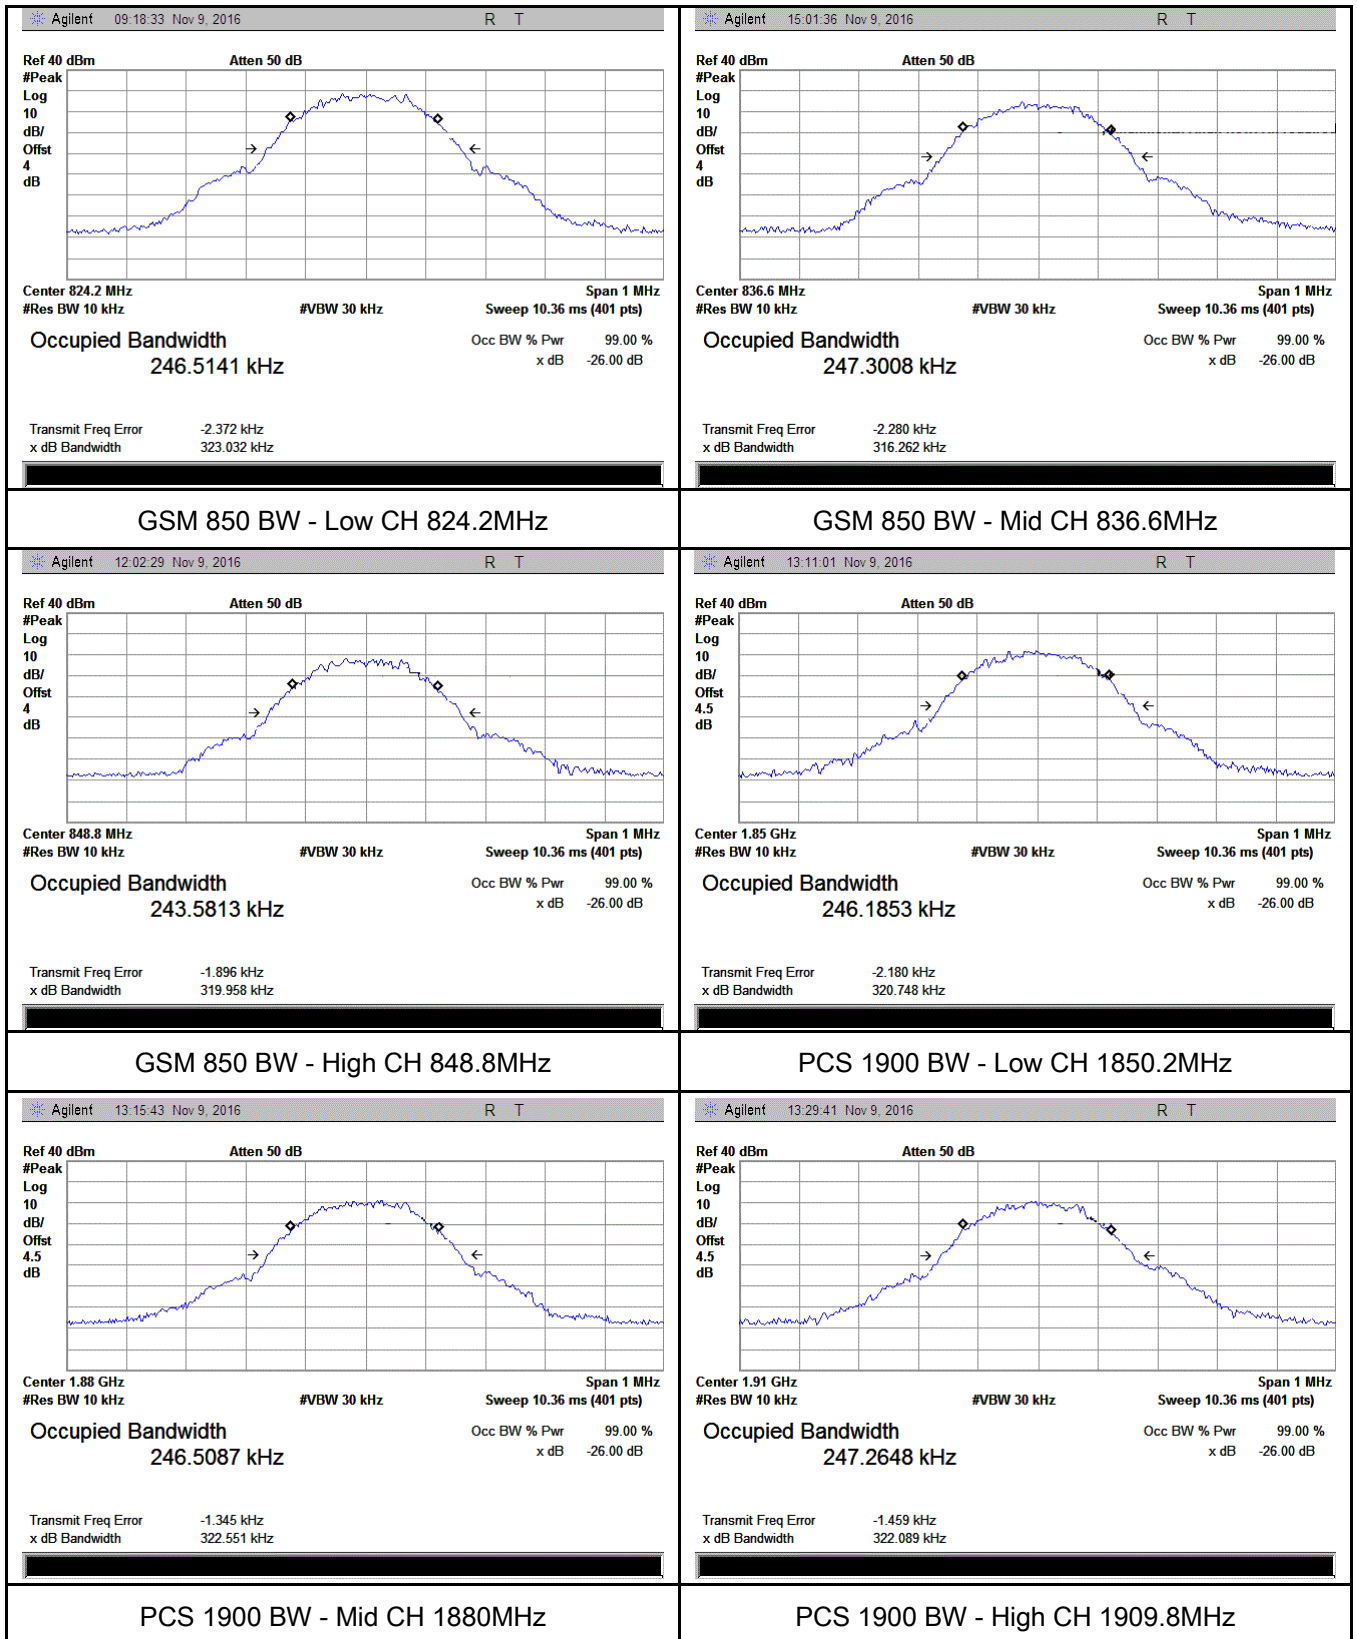



GPRS:

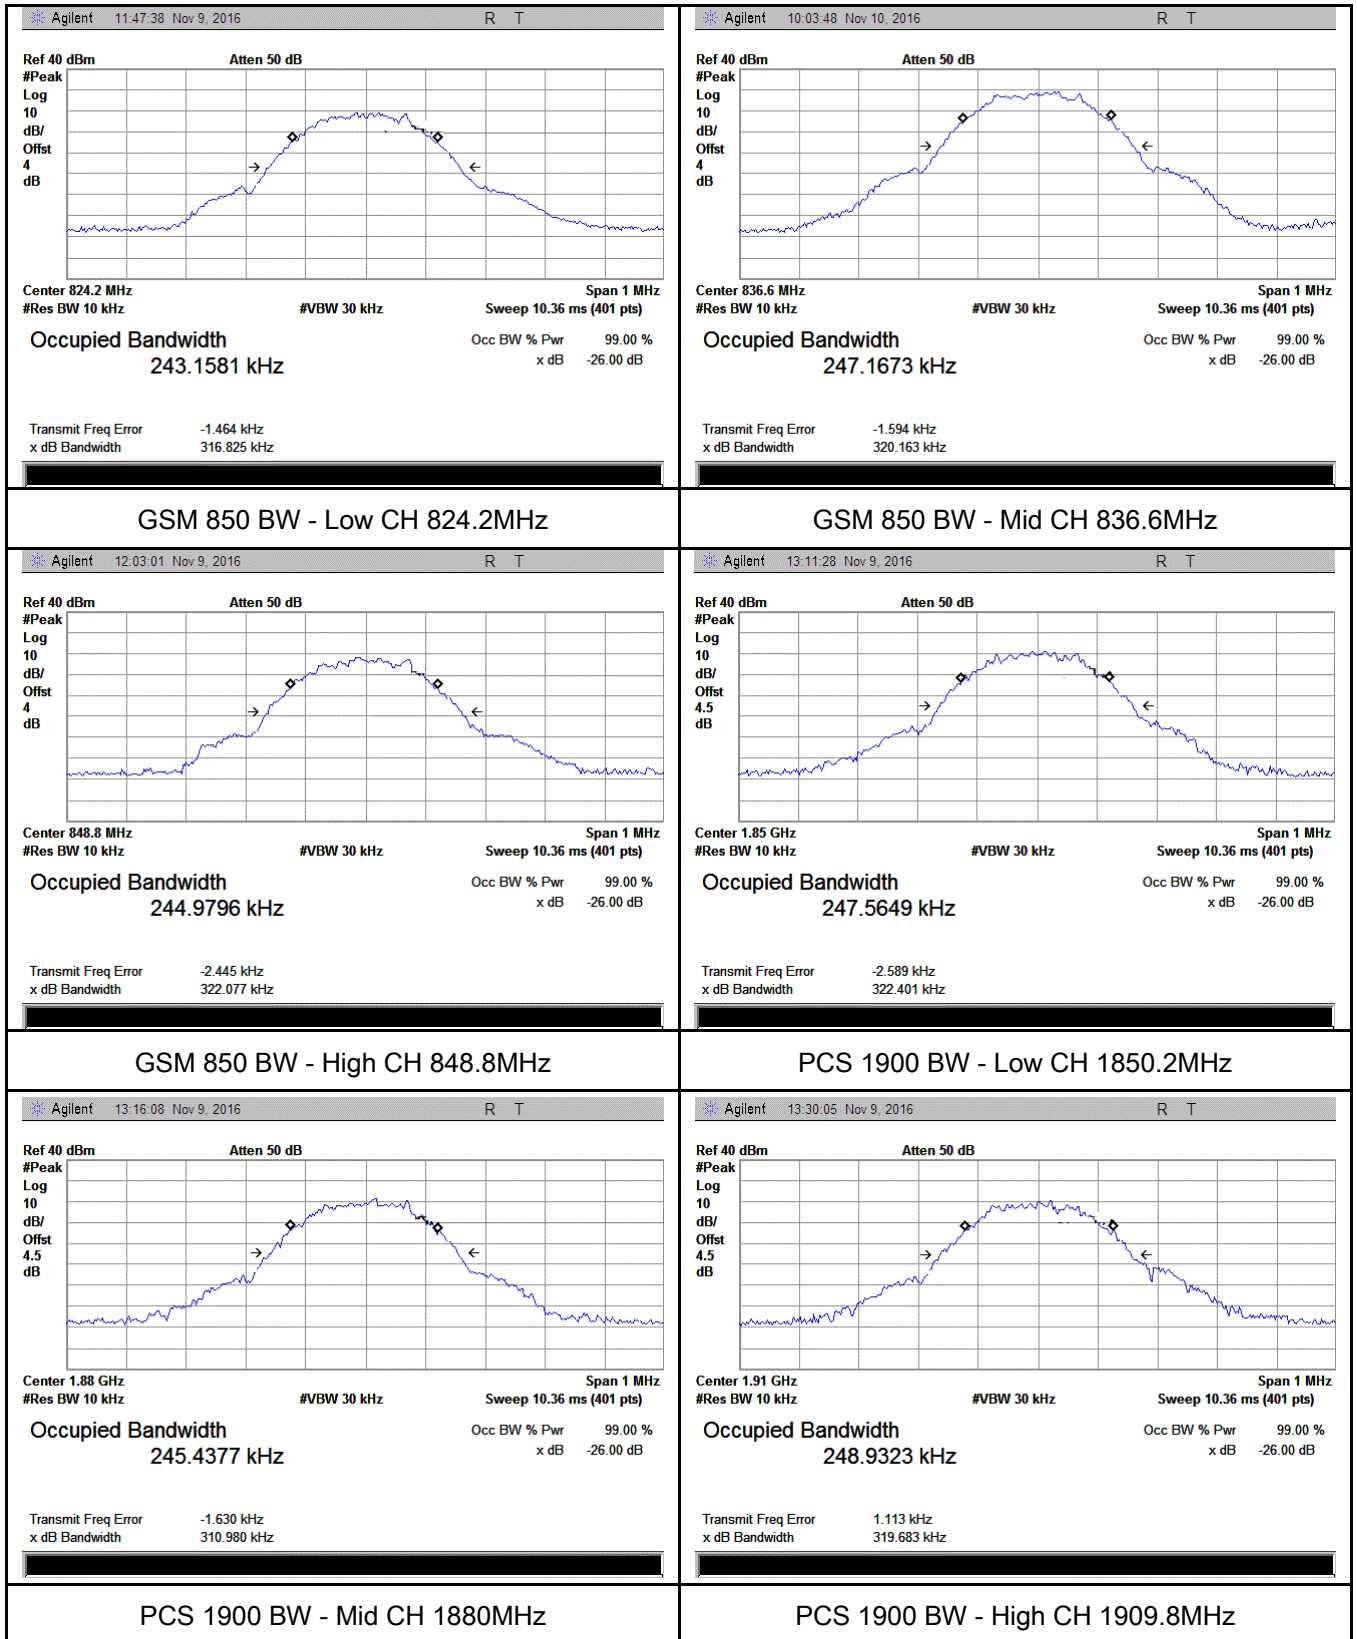

EGPRS:


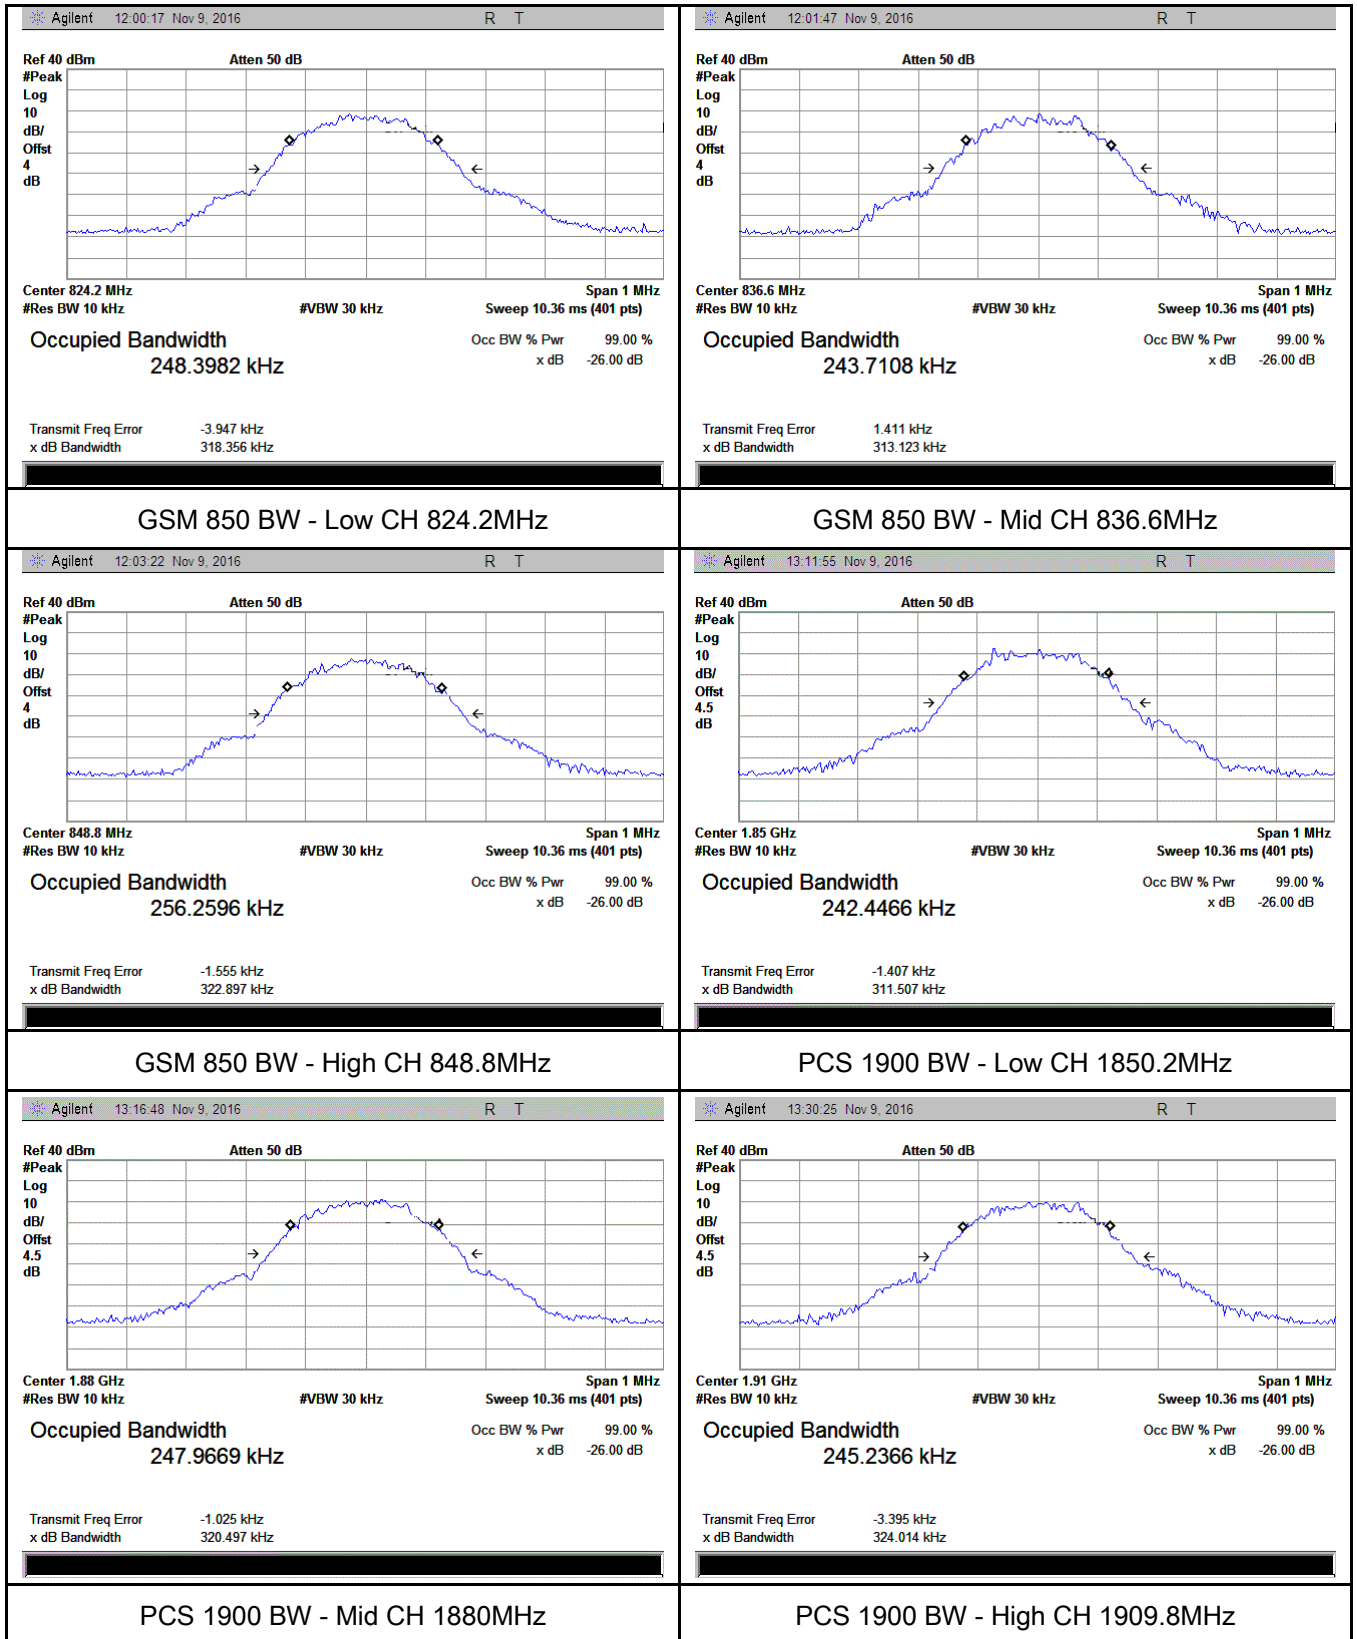


RMC:

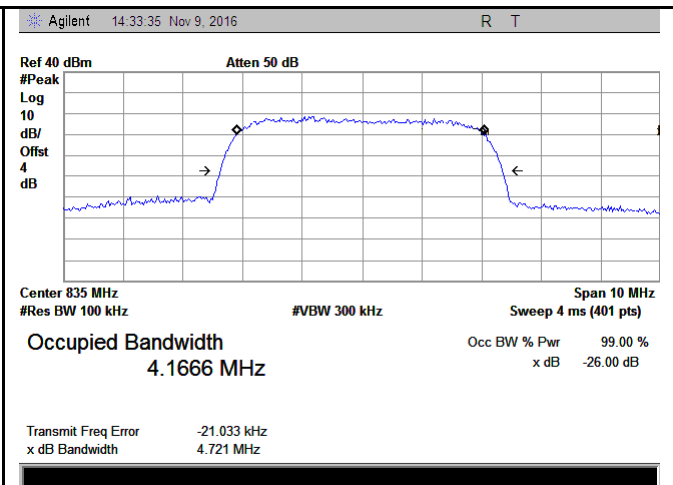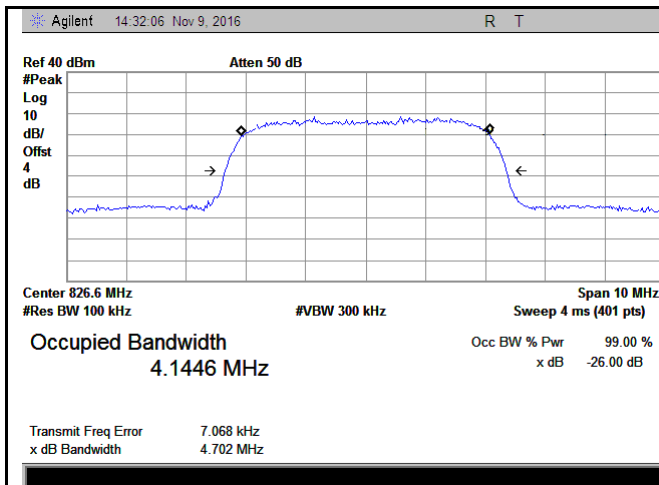



Band V BW - Low CH 826.6 MHz

Band V BW - Mid CH 835.0 MHz

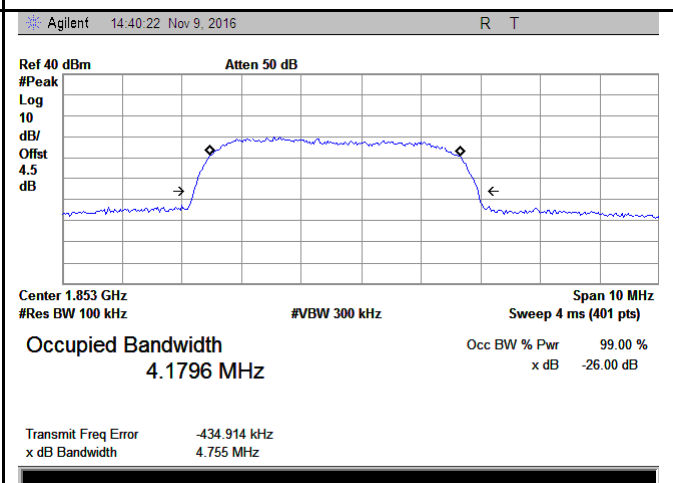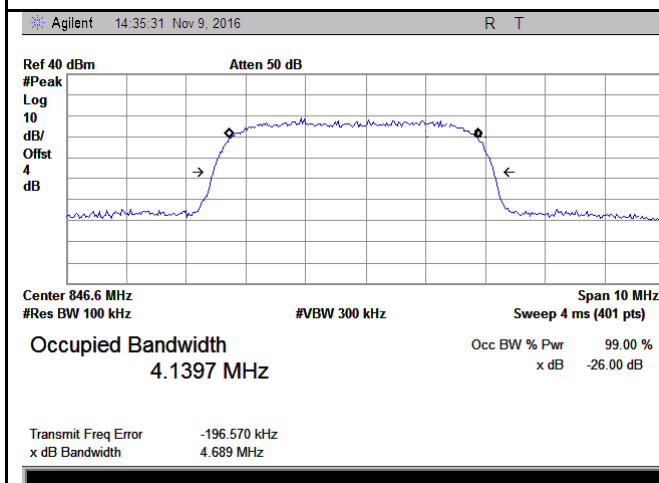

Band V BW - High CH 846.4 MHz


Band II BW - Low CH 1852.4MHz

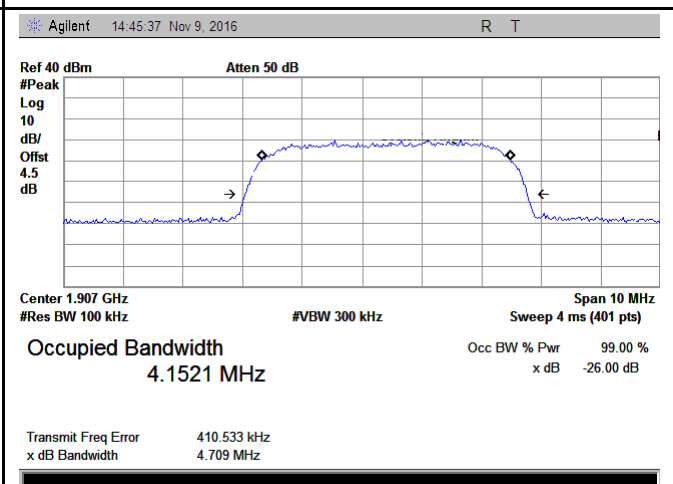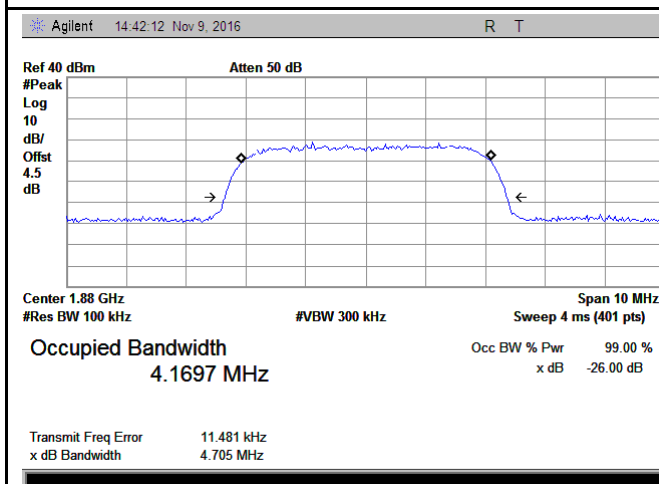


Band II BW - Mid CH 1880MHz

Band II BW - High CH 1907.6MHz

HSUPA:

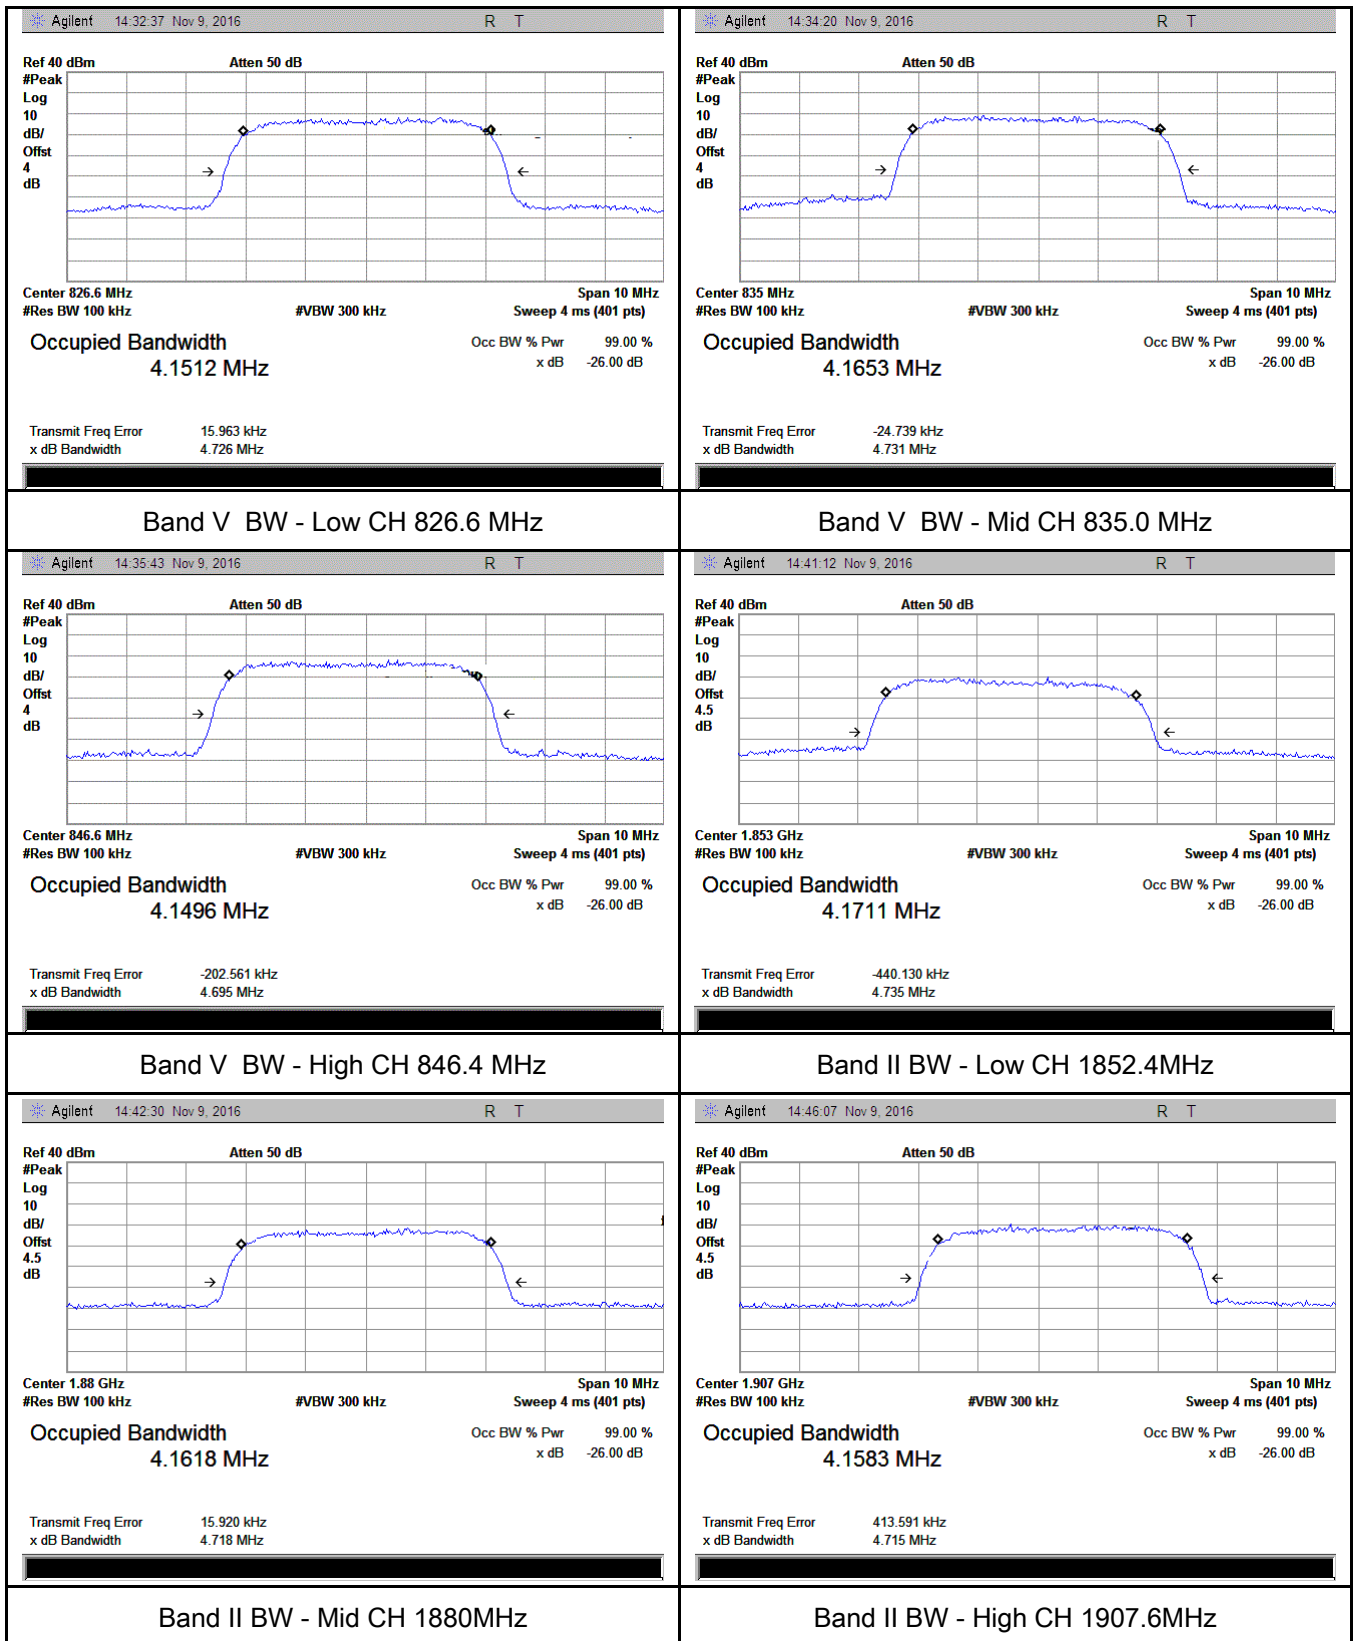

HSDPA:

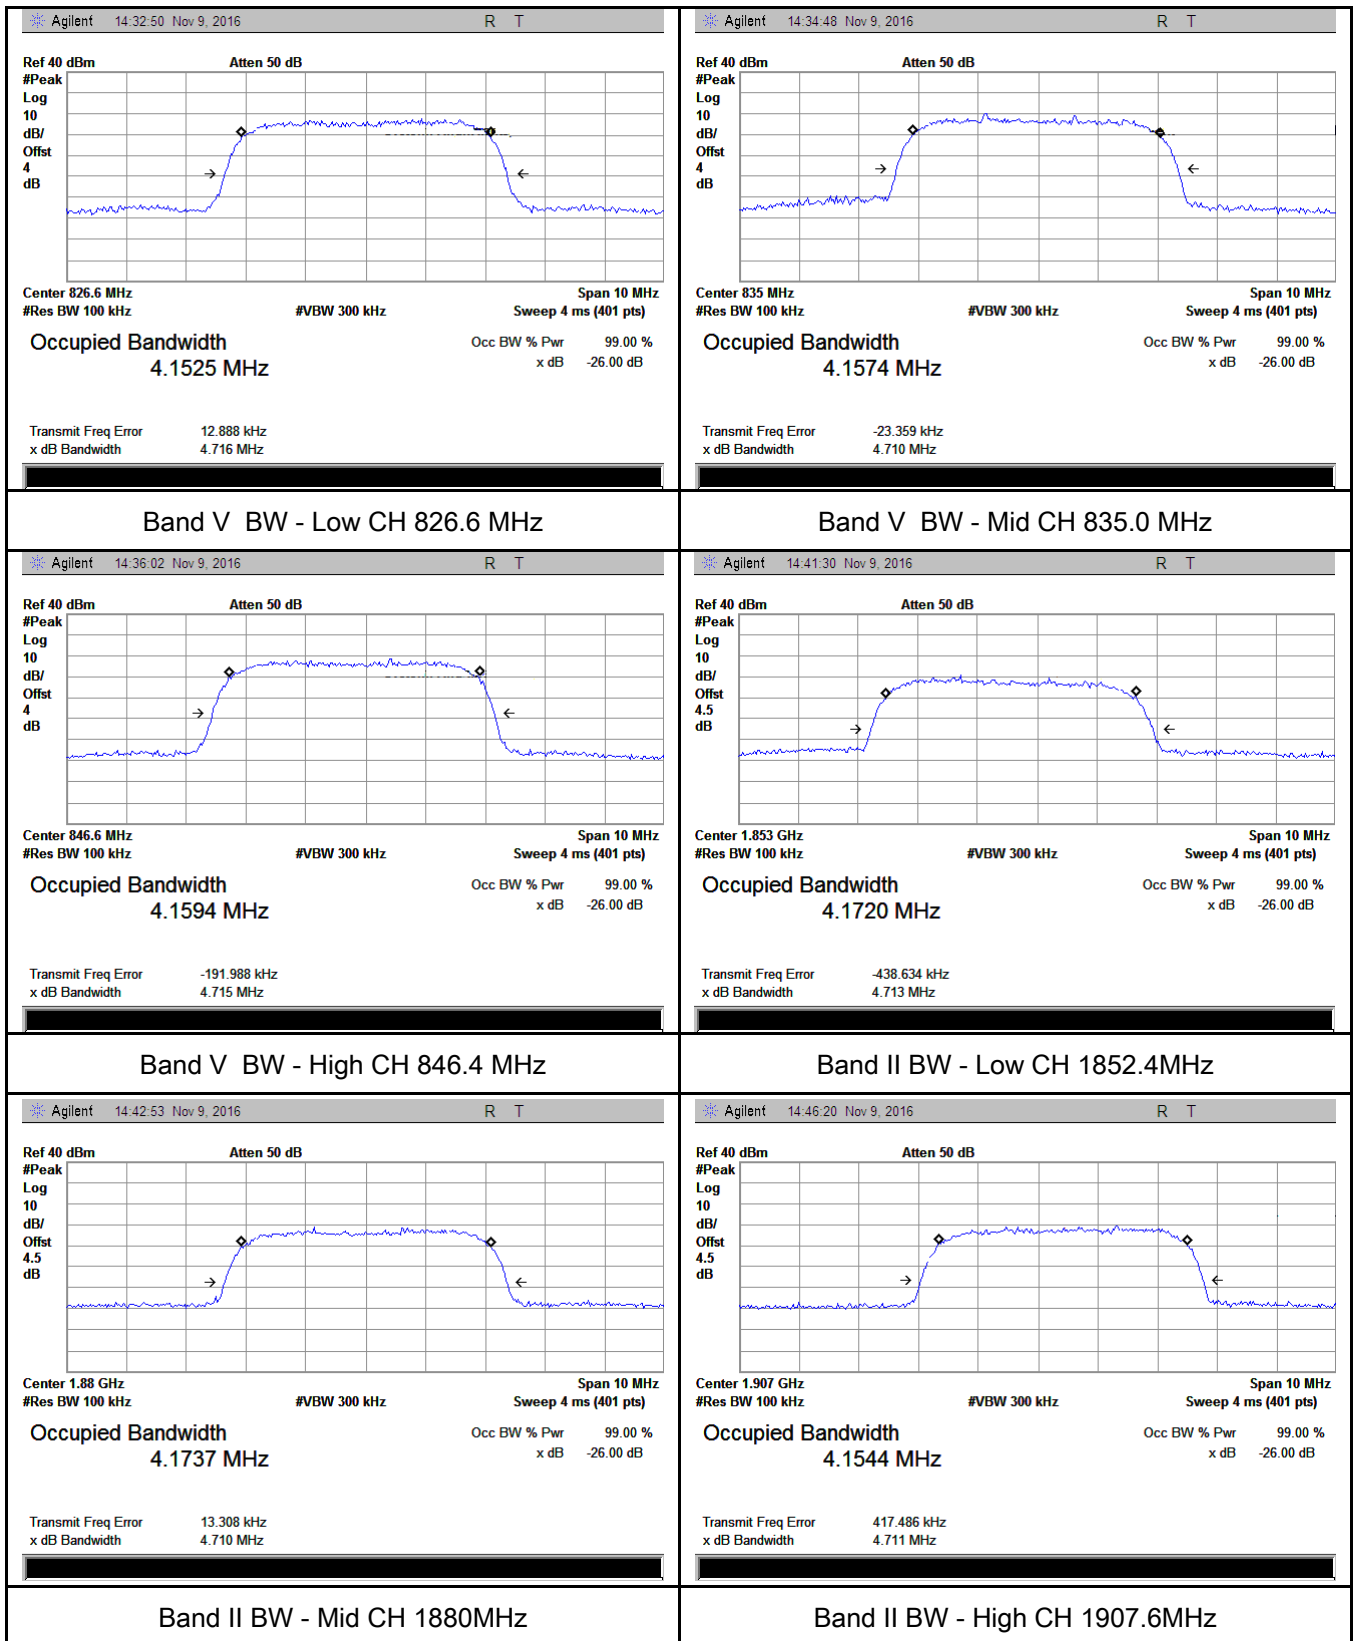

6.5 Spurious Emissions at Antenna Terminals

Temperature	23°C
Relative Humidity	52%
Atmospheric Pressure	1010mbar
Test date :	November 10, 2016
Tested By :	Loren Luo

Requirement(s):


Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup	Base Station Spectrum Analyzer EUT		
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:


Cellular Band (Part 22H) result

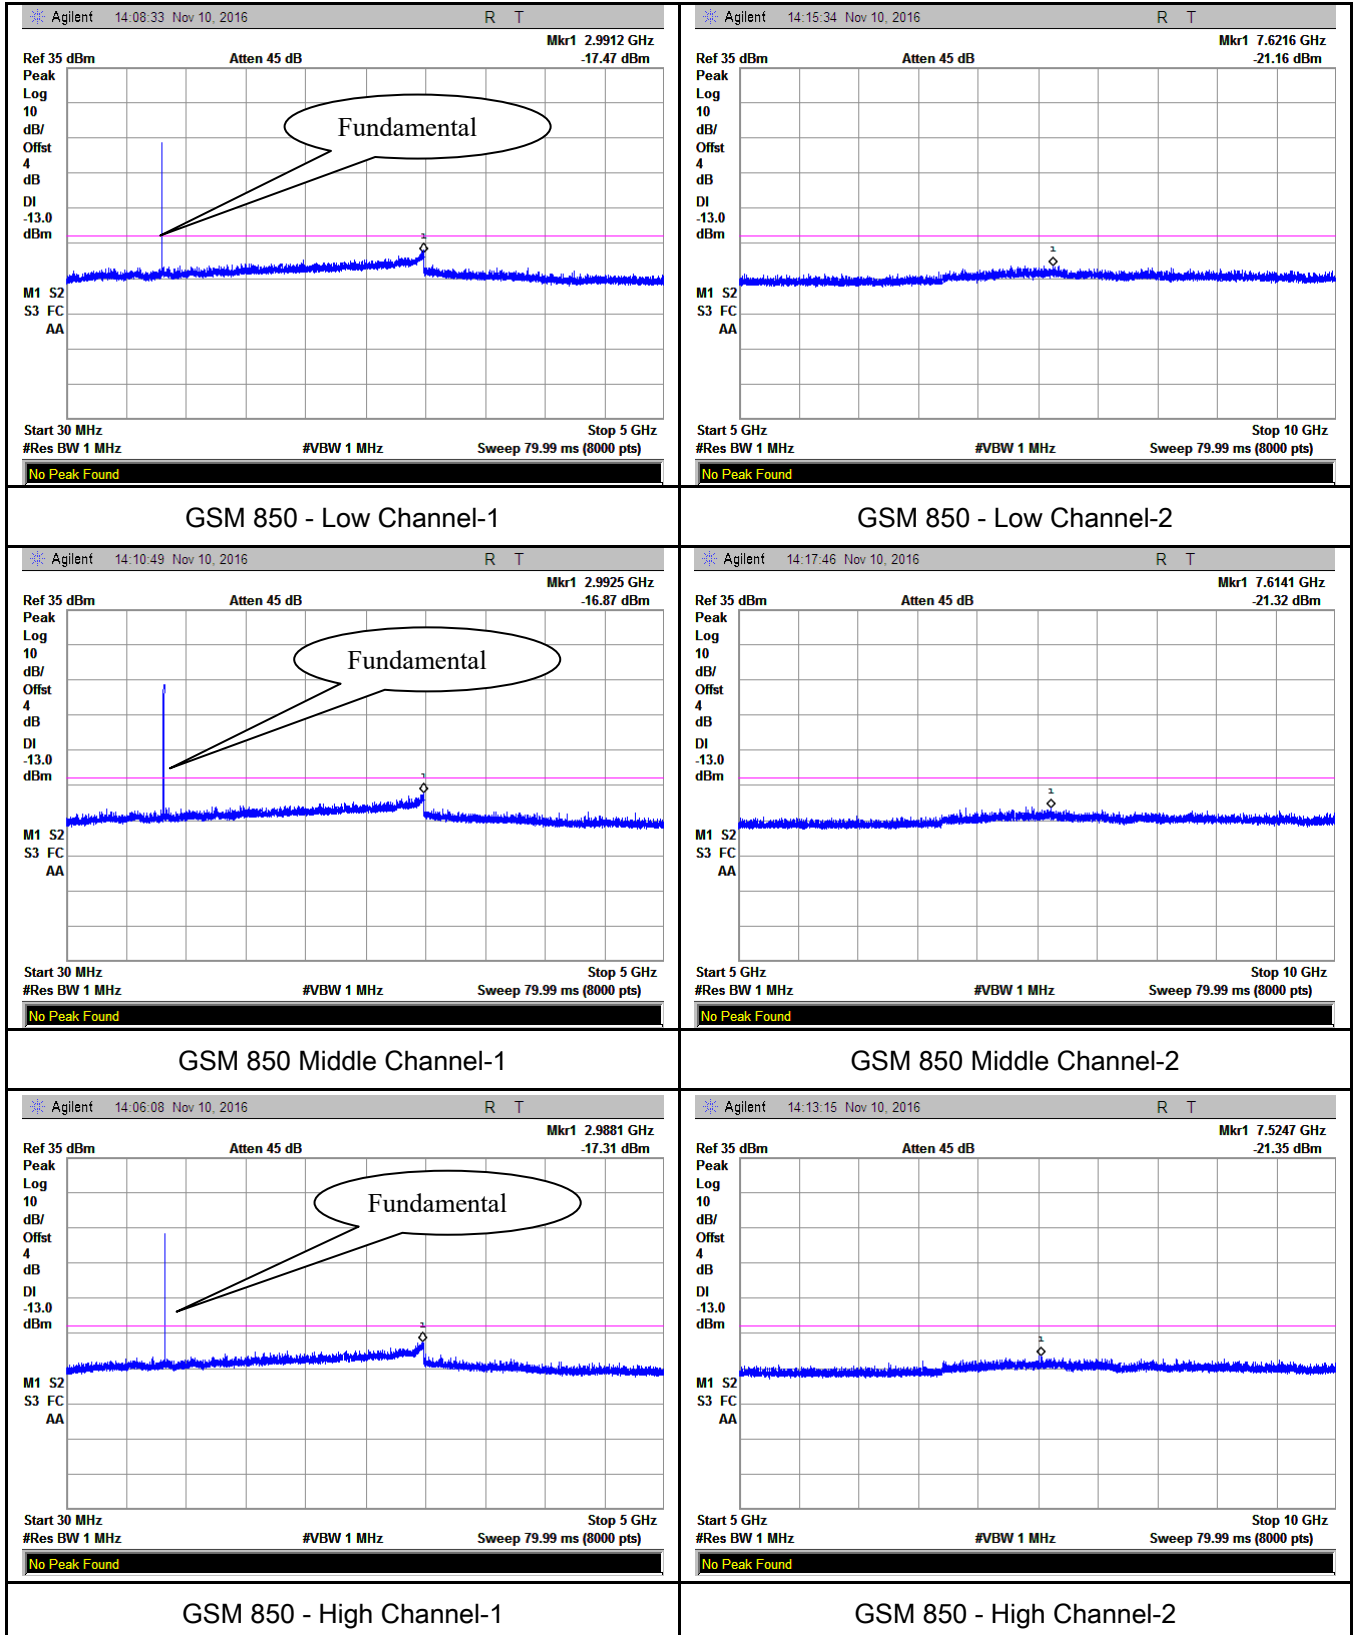


PCS Band (Part24E) result

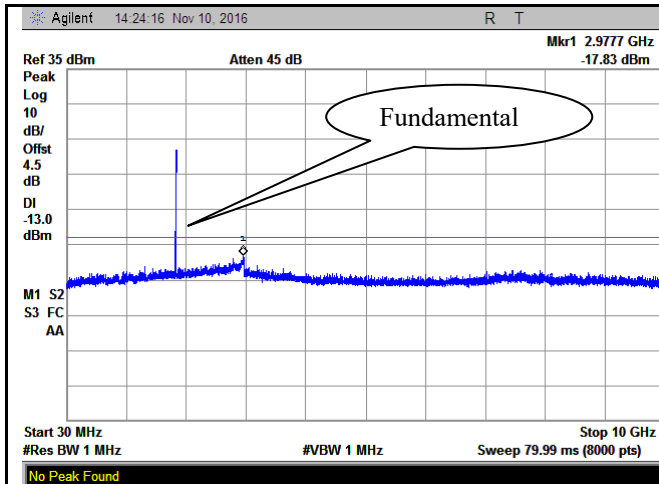


PCS1900 - Low Channel-1

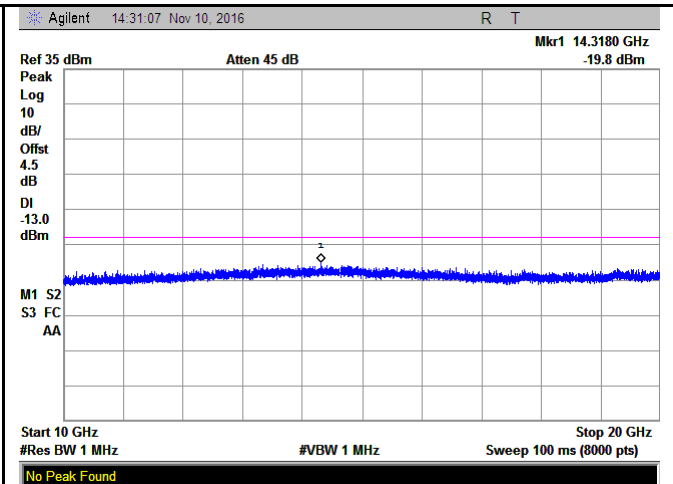


PCS 1900 - Low Channel-2

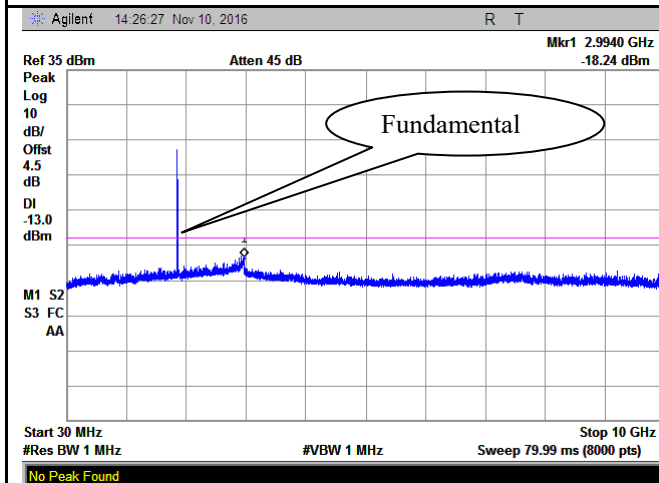


PCS1900 - Middle Channel-1

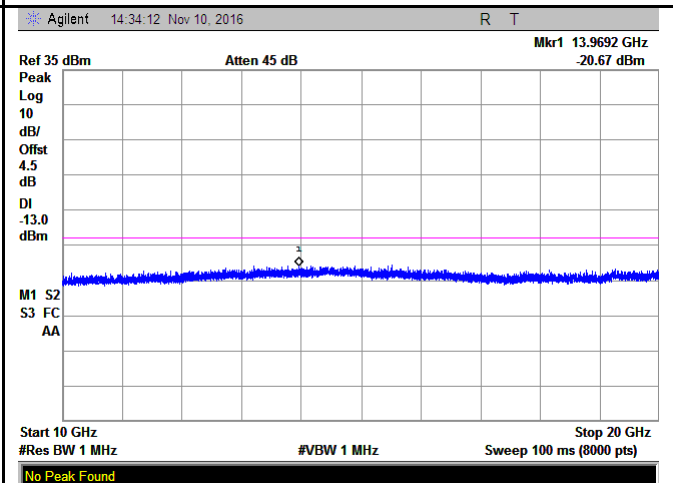

PCS 1900 - Middle Channel-2

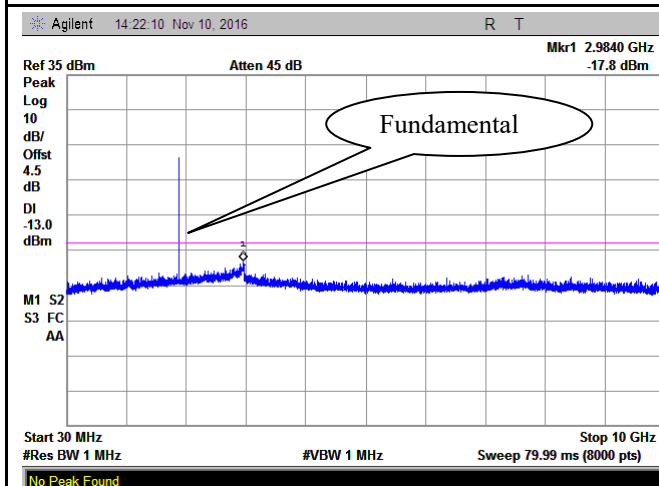


PCS1900 - High Channel-1

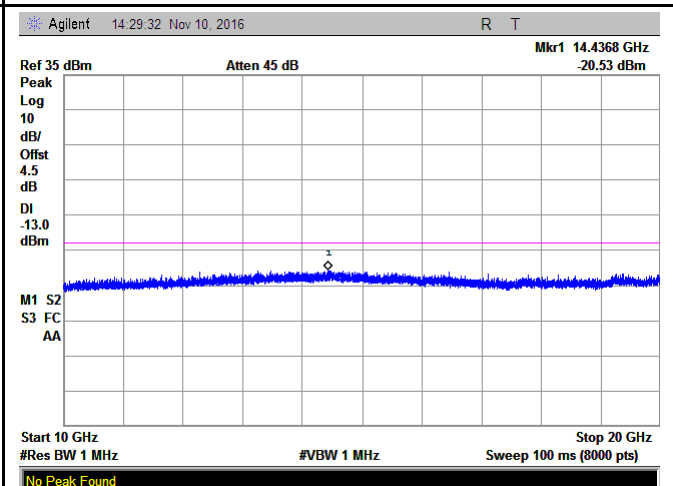


PCS 1900 - High Channel-2

GPRS:

Cellular Band (Part 22H) result

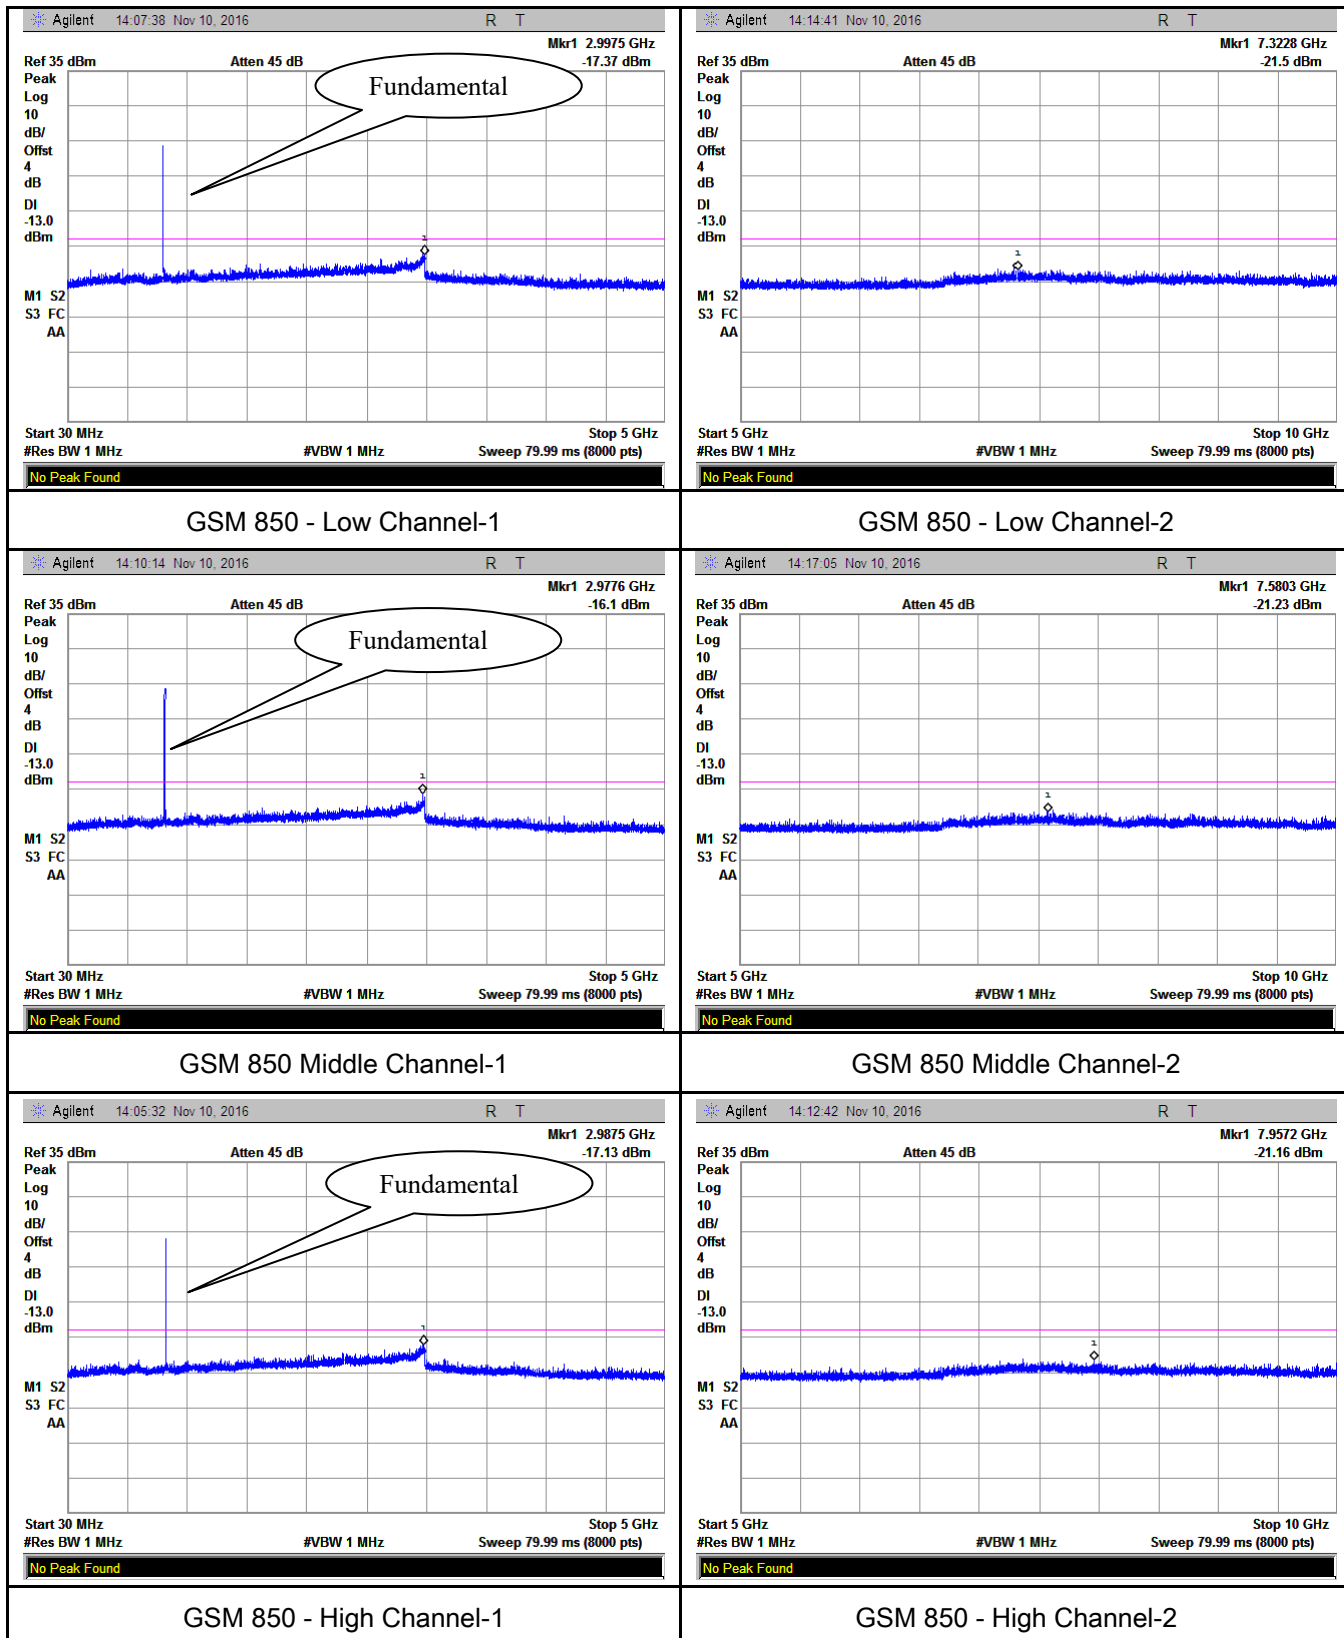


PCS Band (Part24E) result

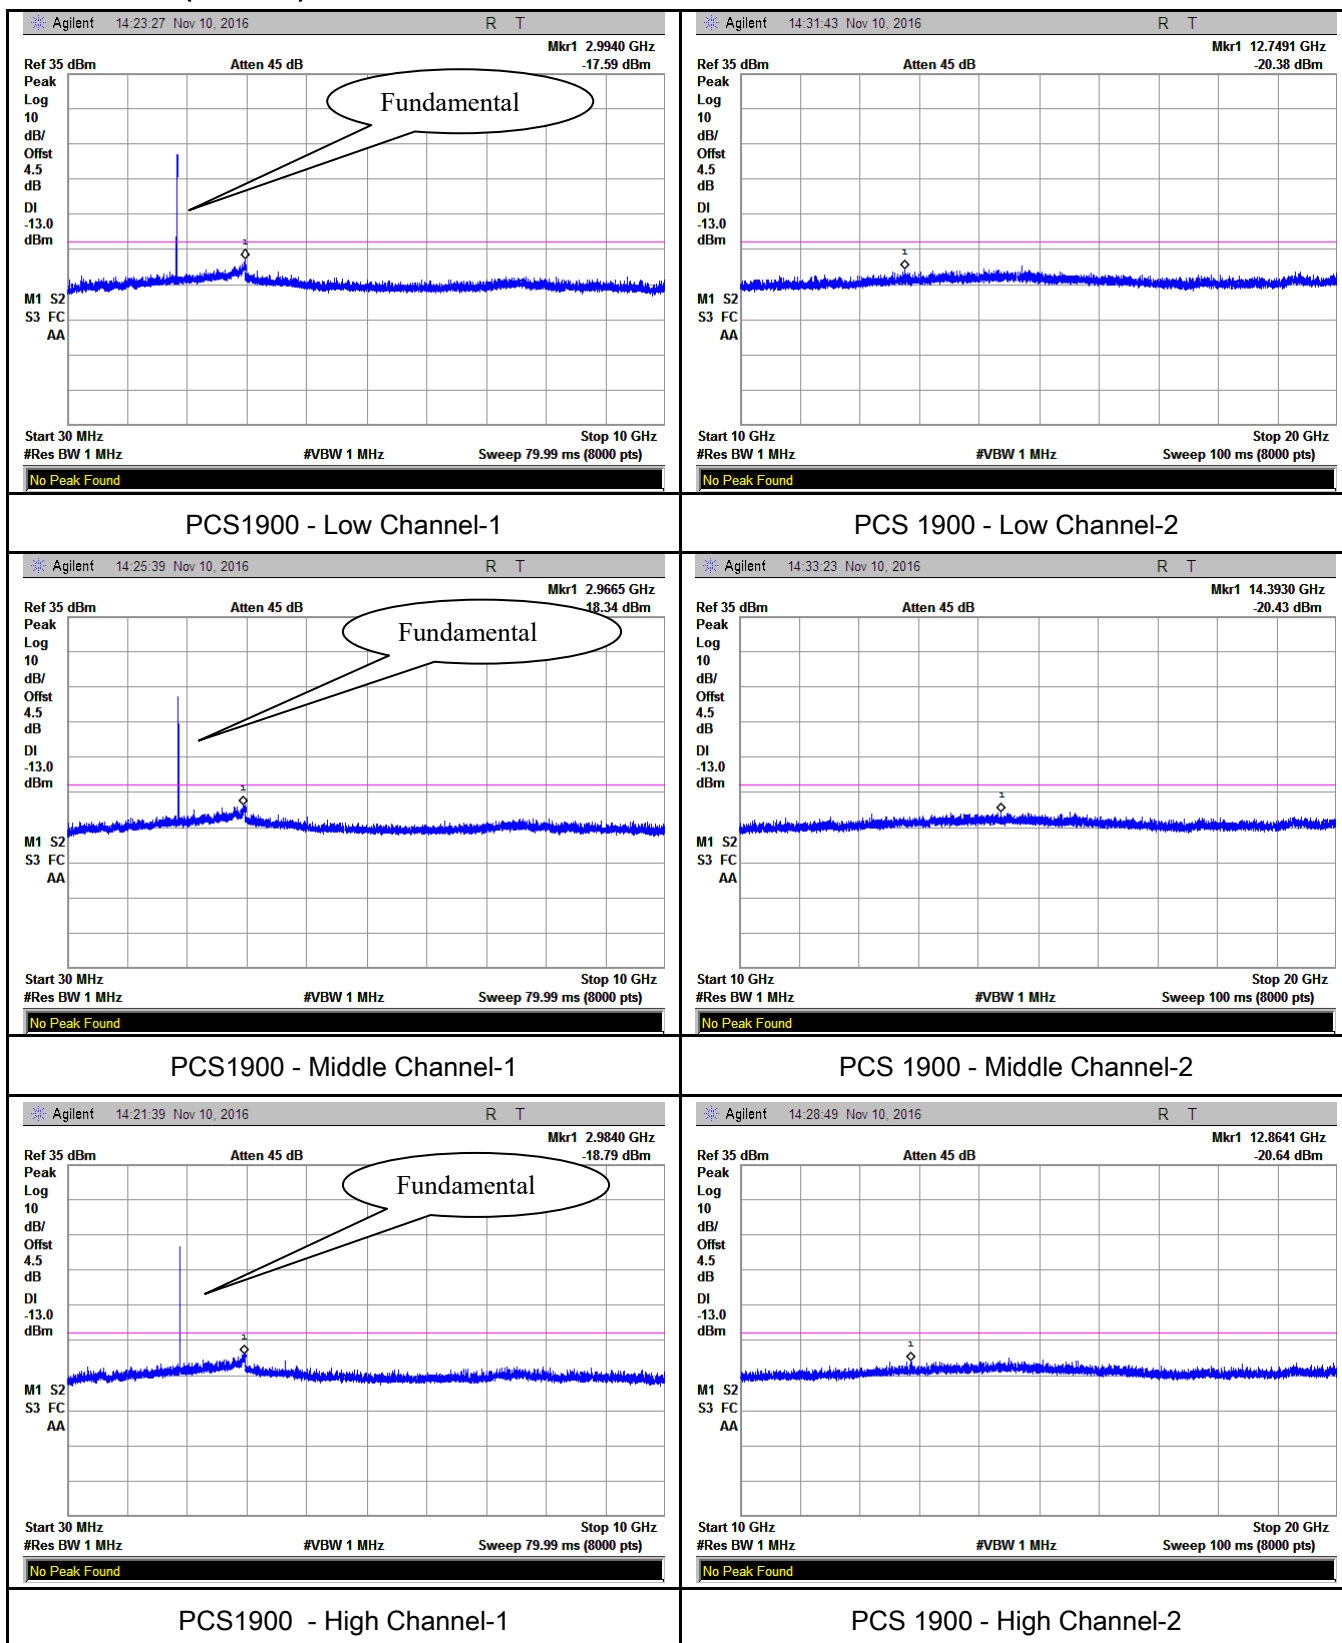


EGPRS (MCS 5):


Cellular Band (Part 22H) result

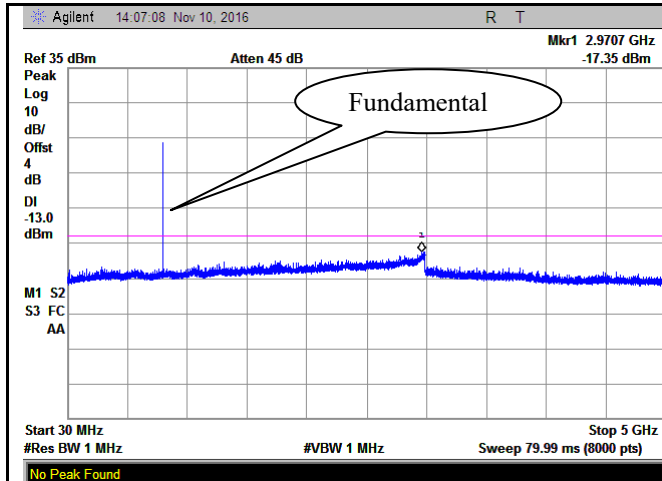


GSM 850 - Low Channel-1

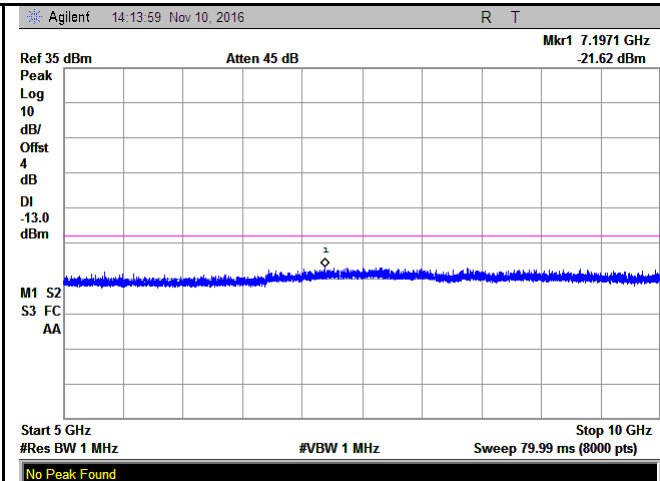


GSM 850 - Low Channel-2

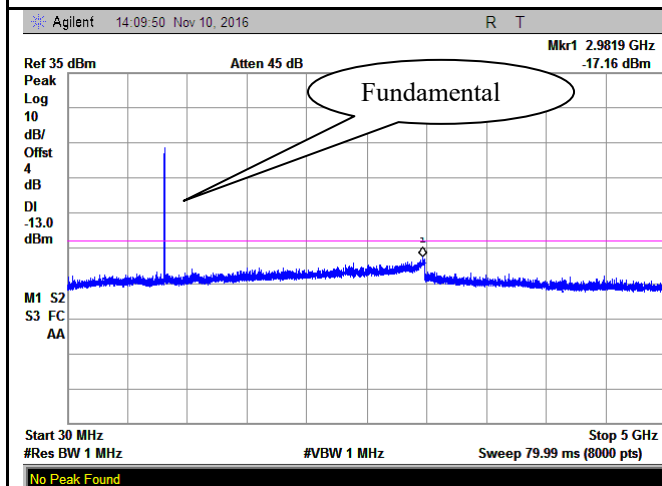


GSM 850 Middle Channel-1

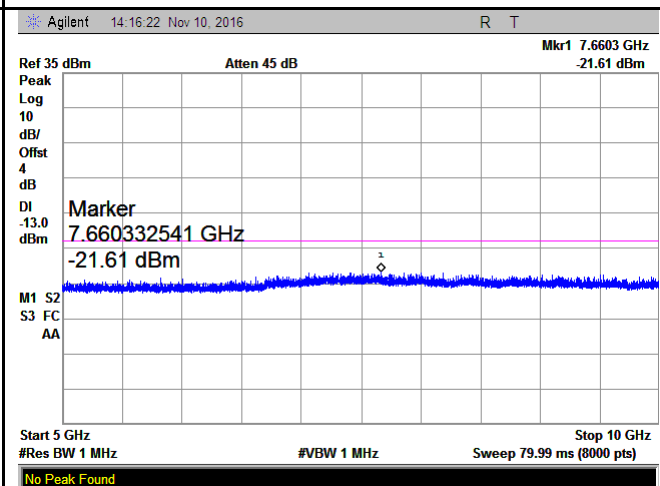

GSM 850 Middle Channel-2

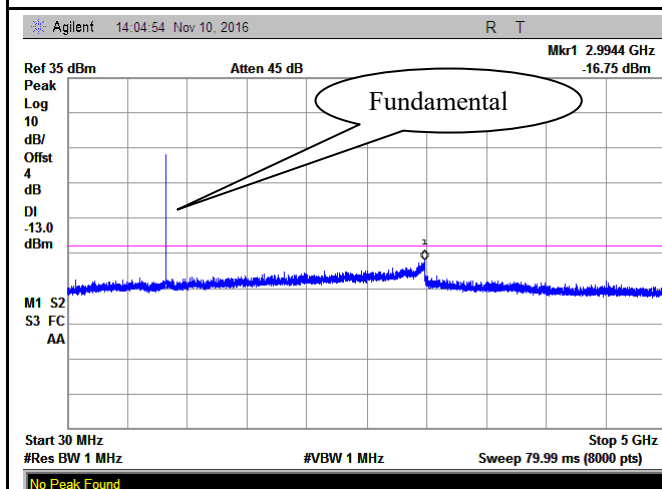


GSM 850 - High Channel-1

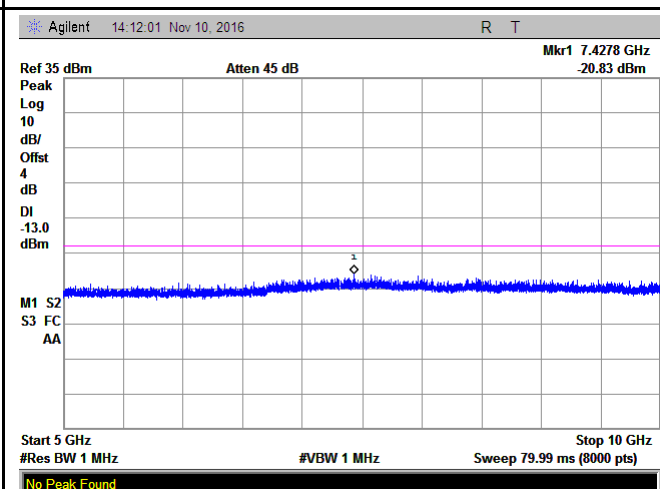


GSM 850 - High Channel-2

PCS Band (Part24E) result

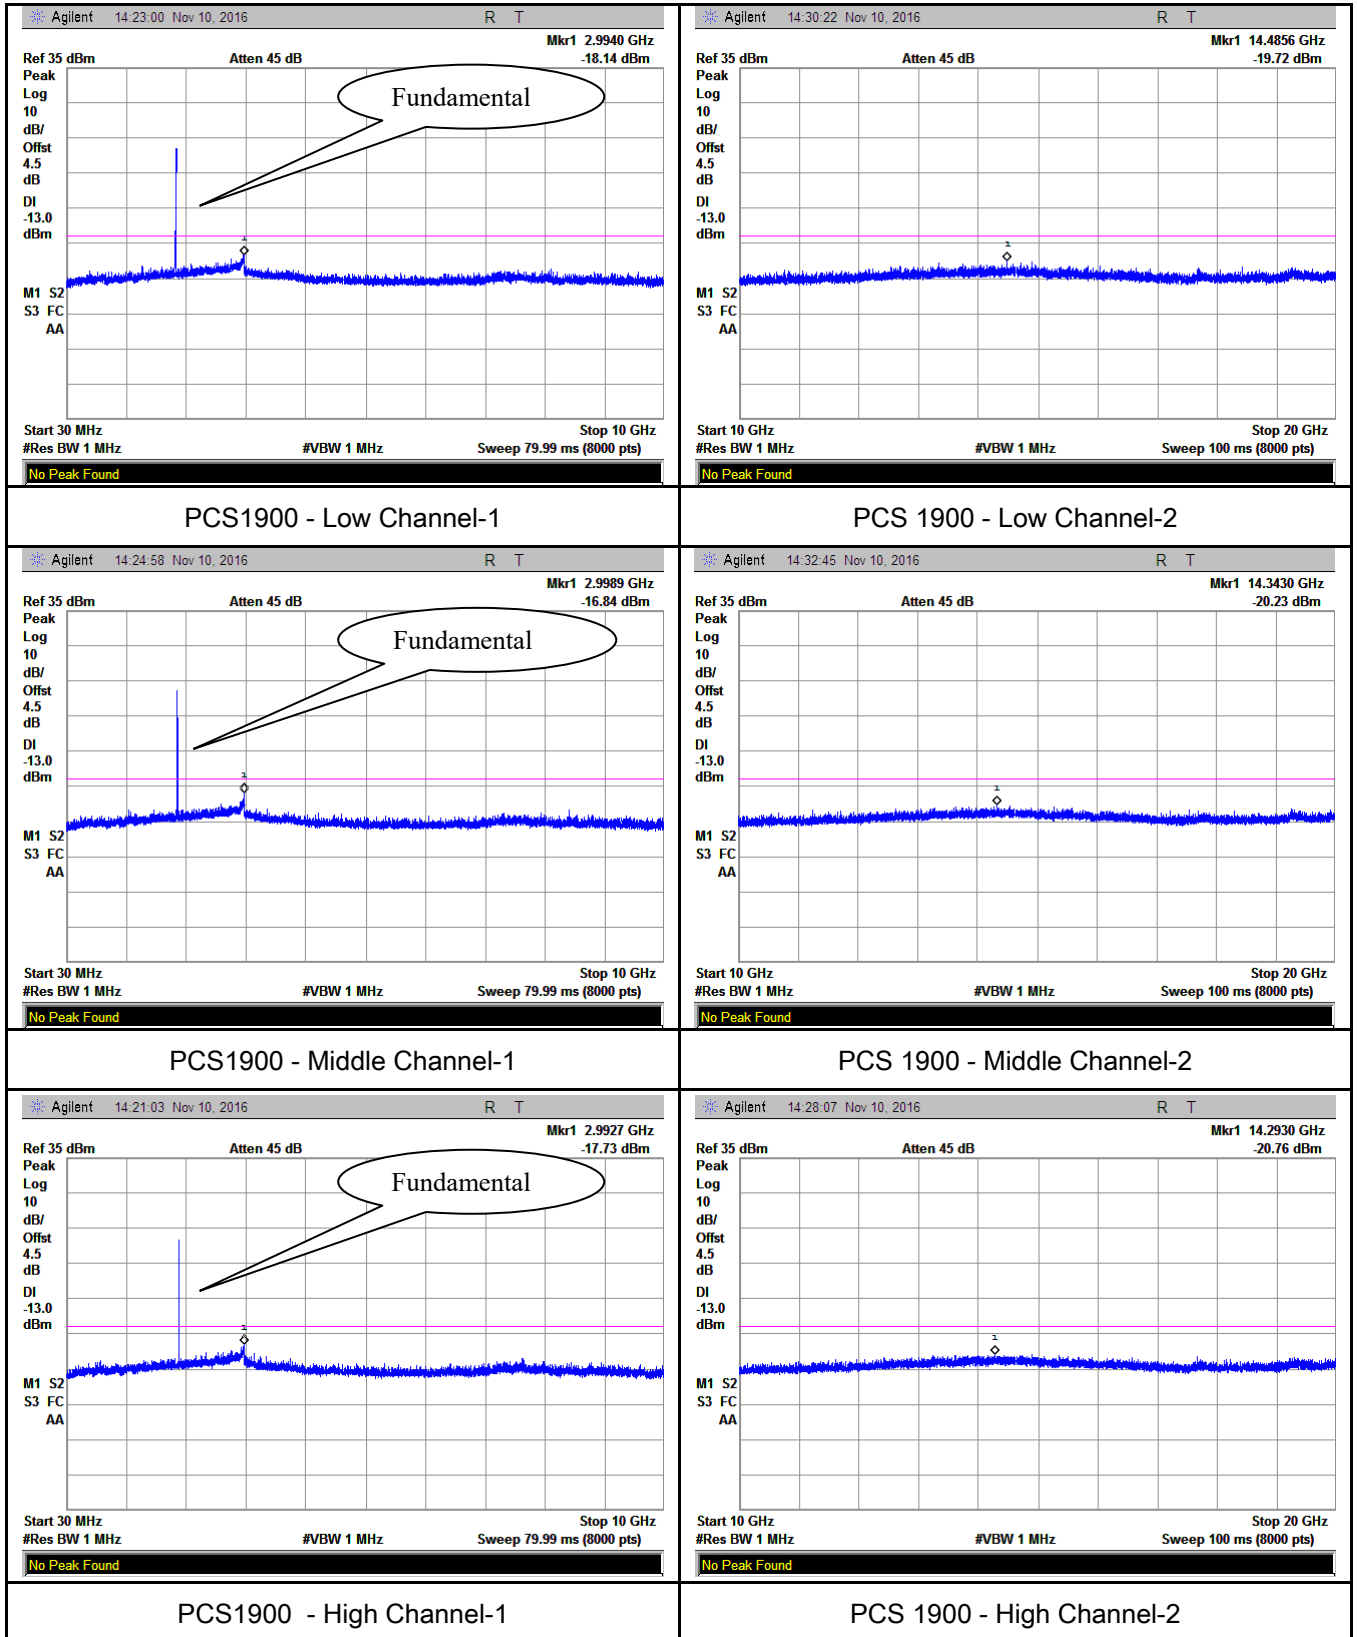


RMC


UMTS-FDD Band V (Part 22H)

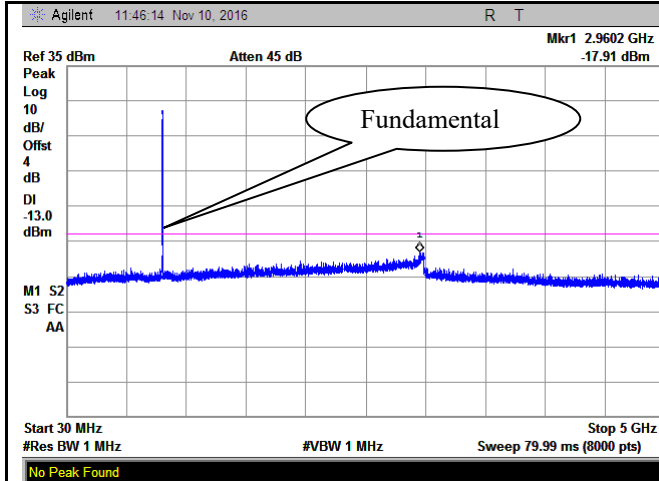


Band V - Low Channel-1

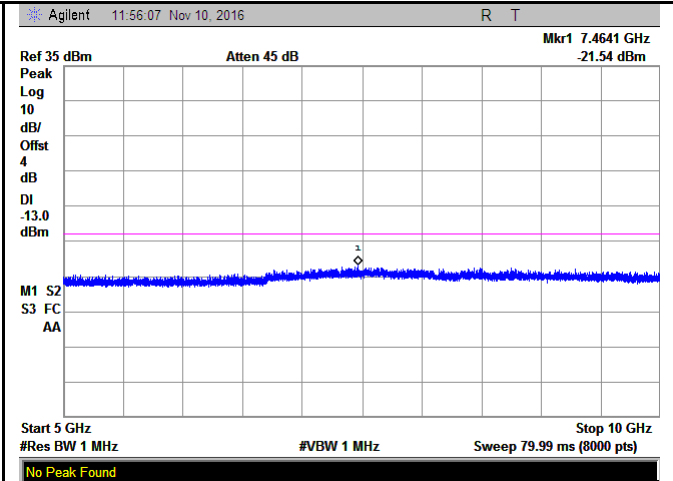


Band V - Low Channel-2

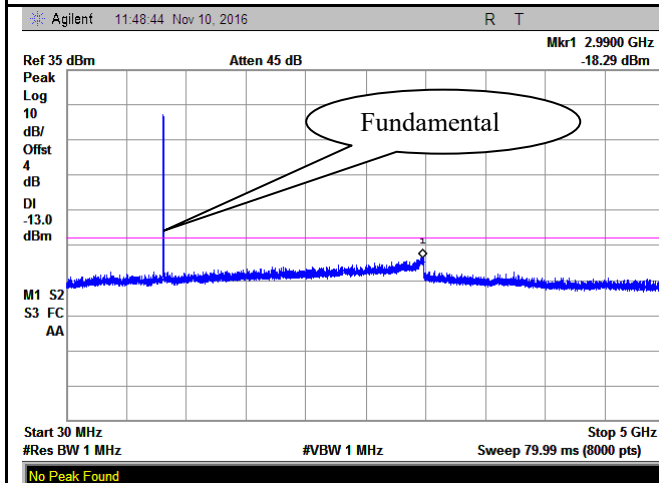


Band V - Middle Channel-1

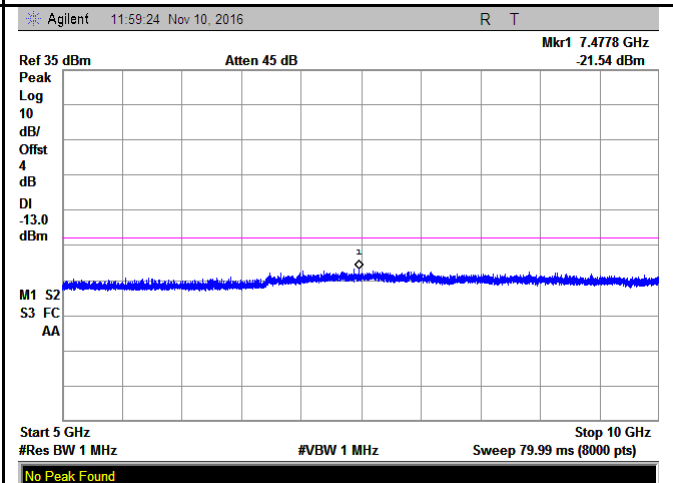

Band V - Middle Channel-2

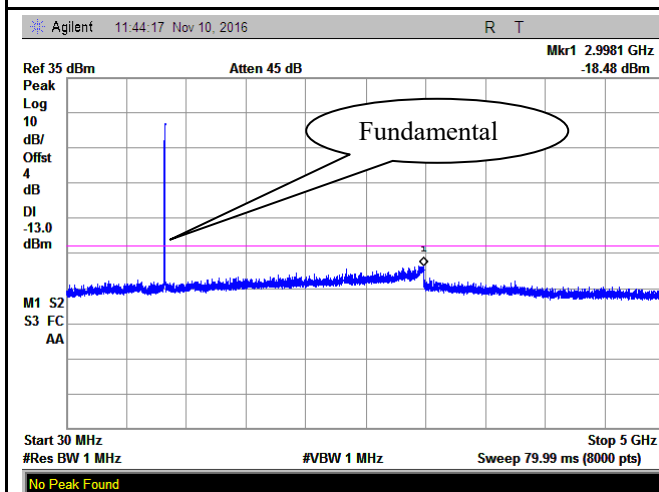


Band V - High Channel-1

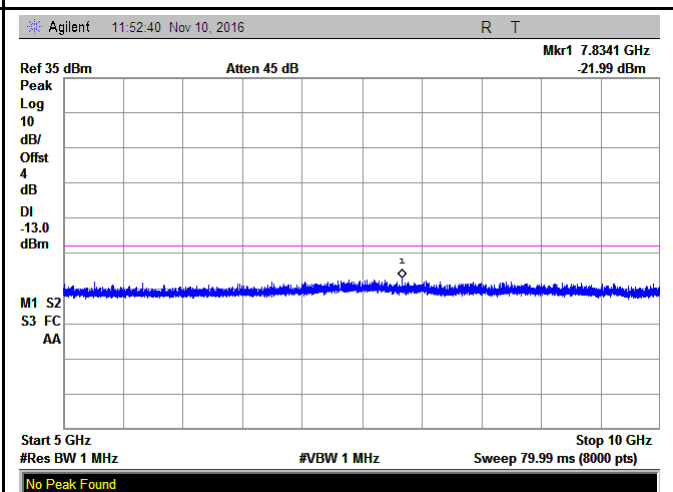


Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

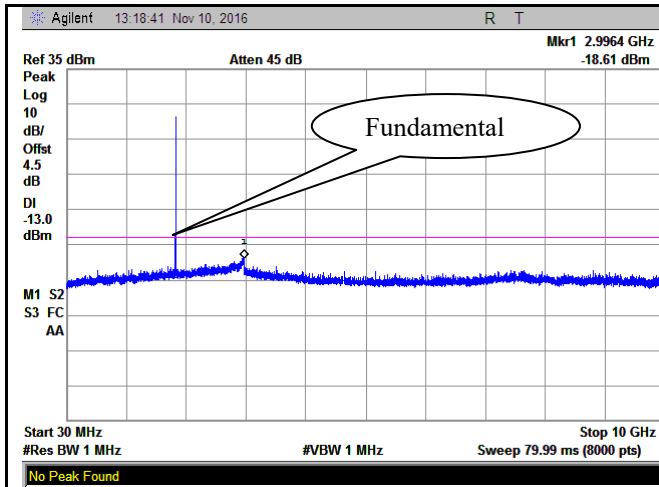


Band II - Low Channel-1

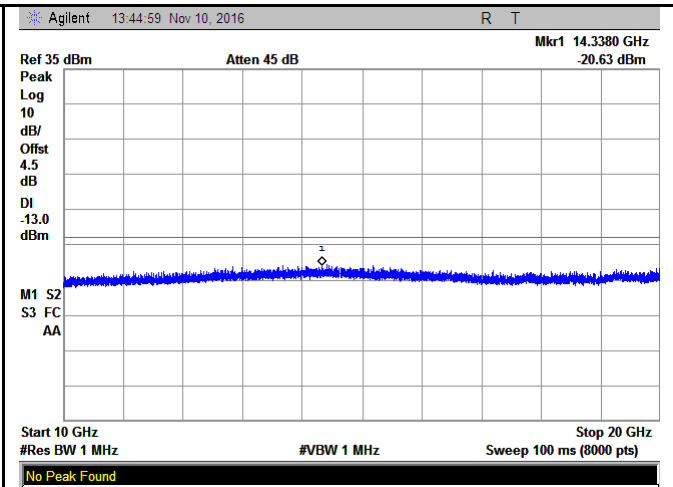


Band II - Low Channel-2

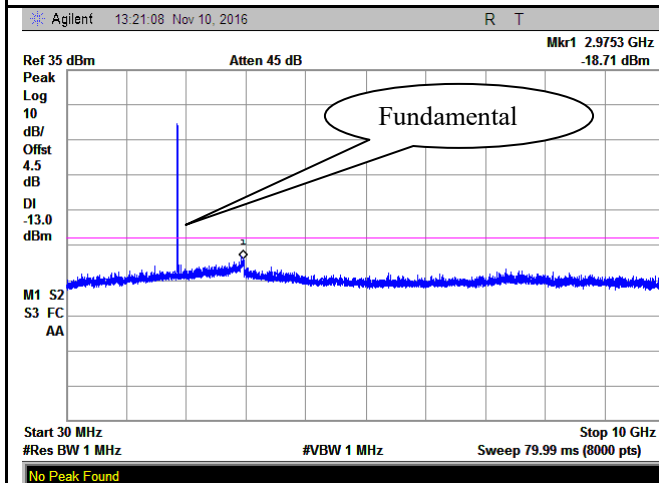


Band II - Middle Channel-1

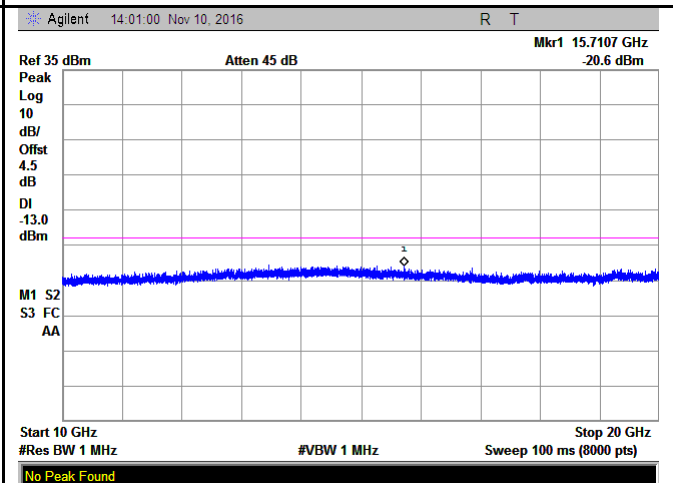

Band II - Middle Channel-2

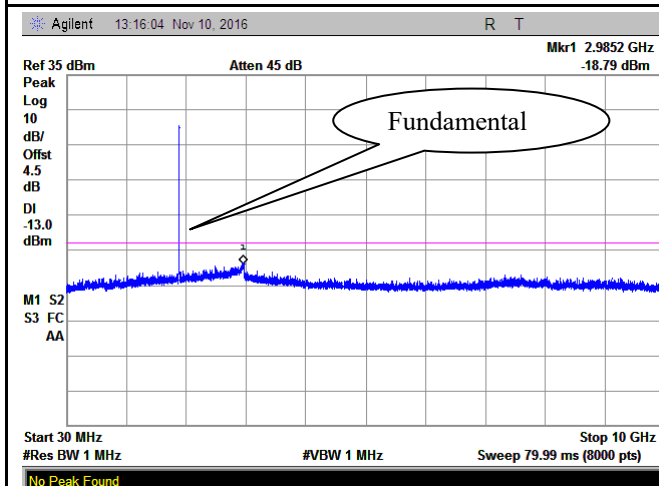


Band II - High Channel-1

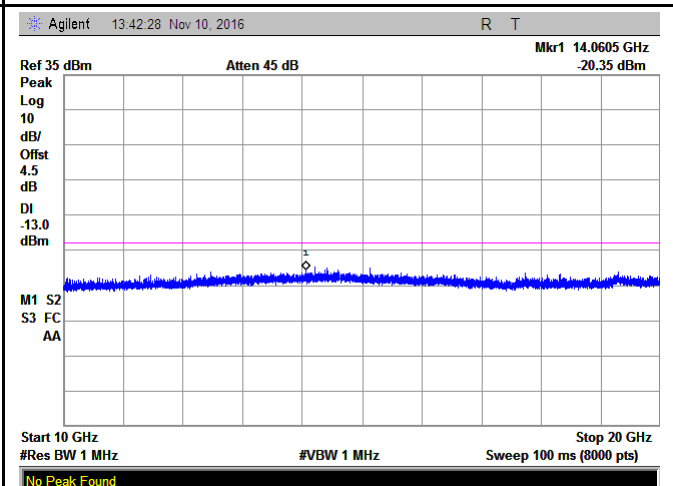


Band II - High Channel-2

HSUPA:

UMTS-FDD Band V (Part 22H)

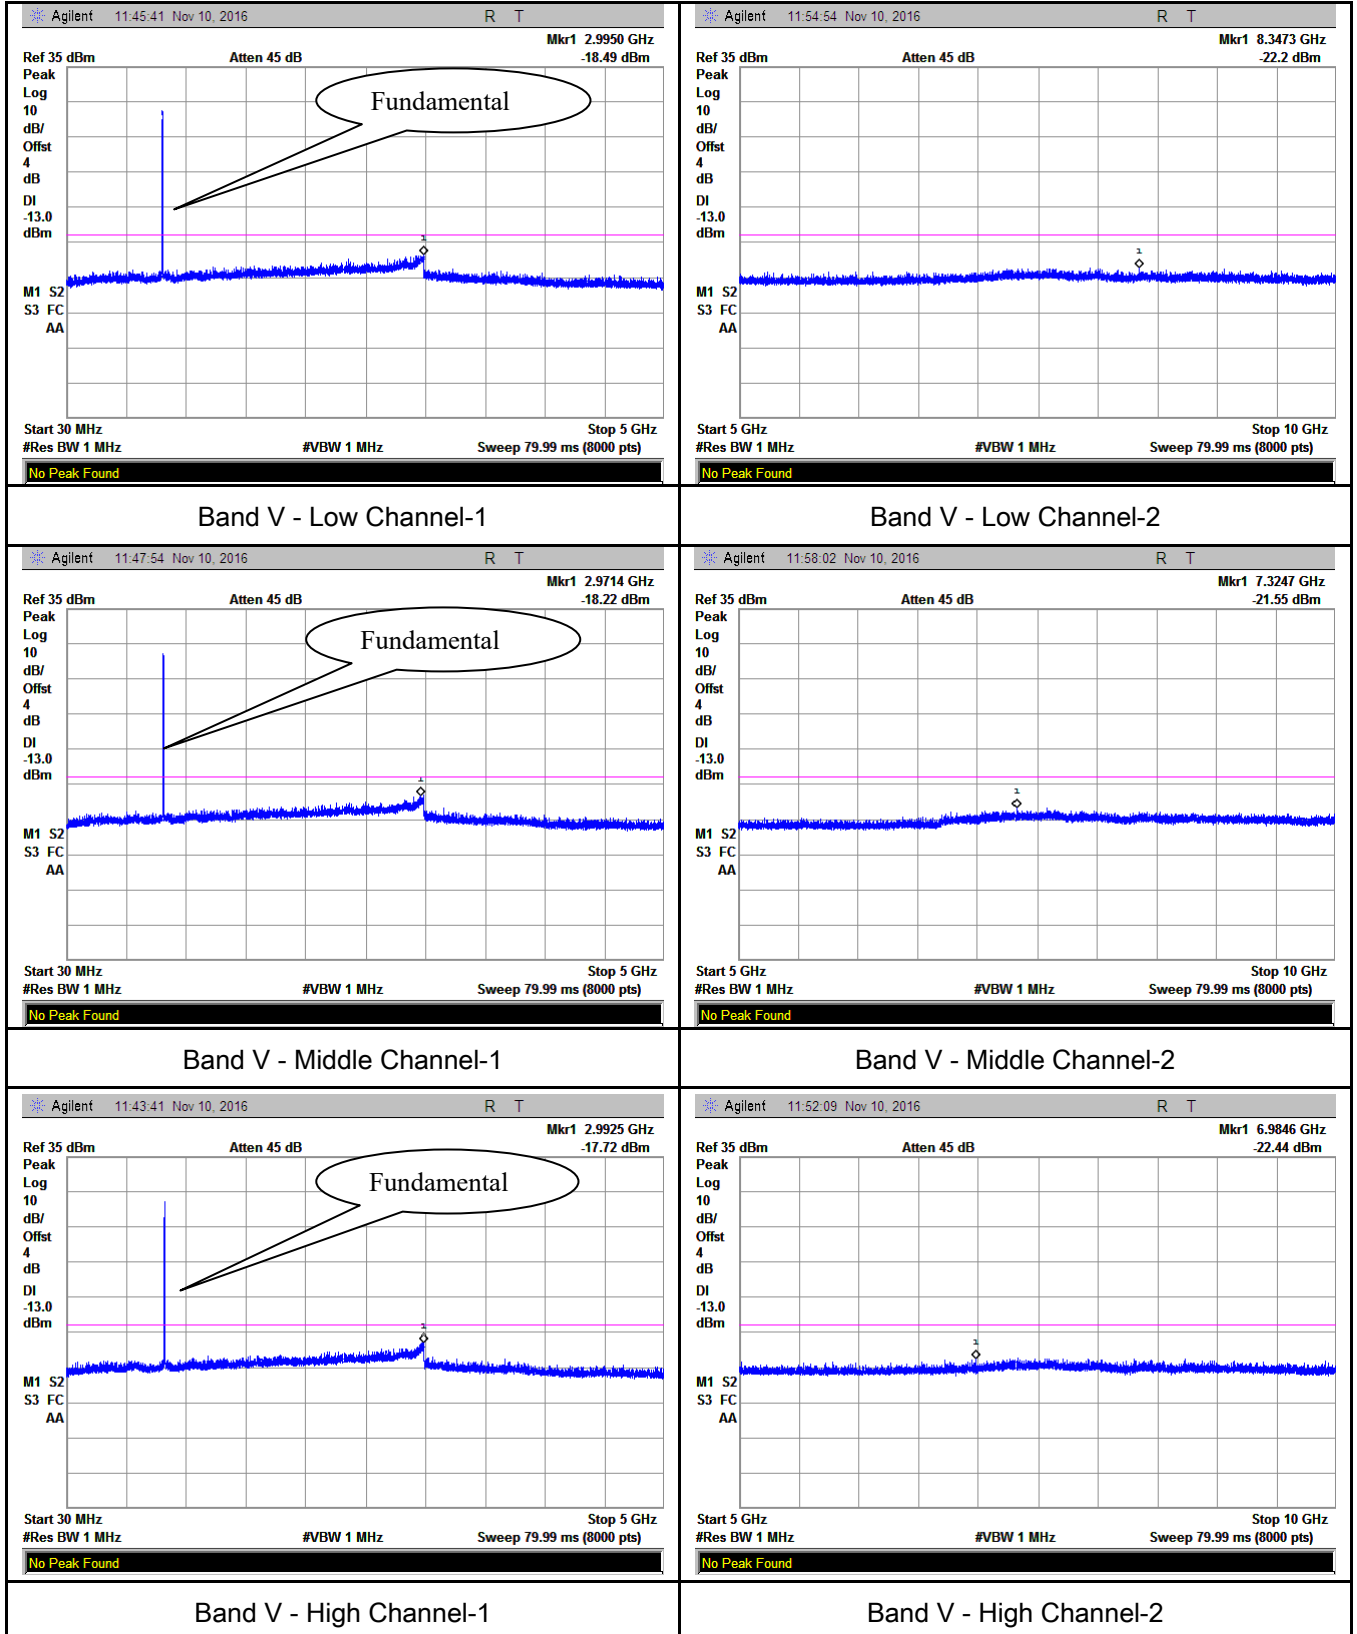


UMTS-FDD Band II (Part 24E)

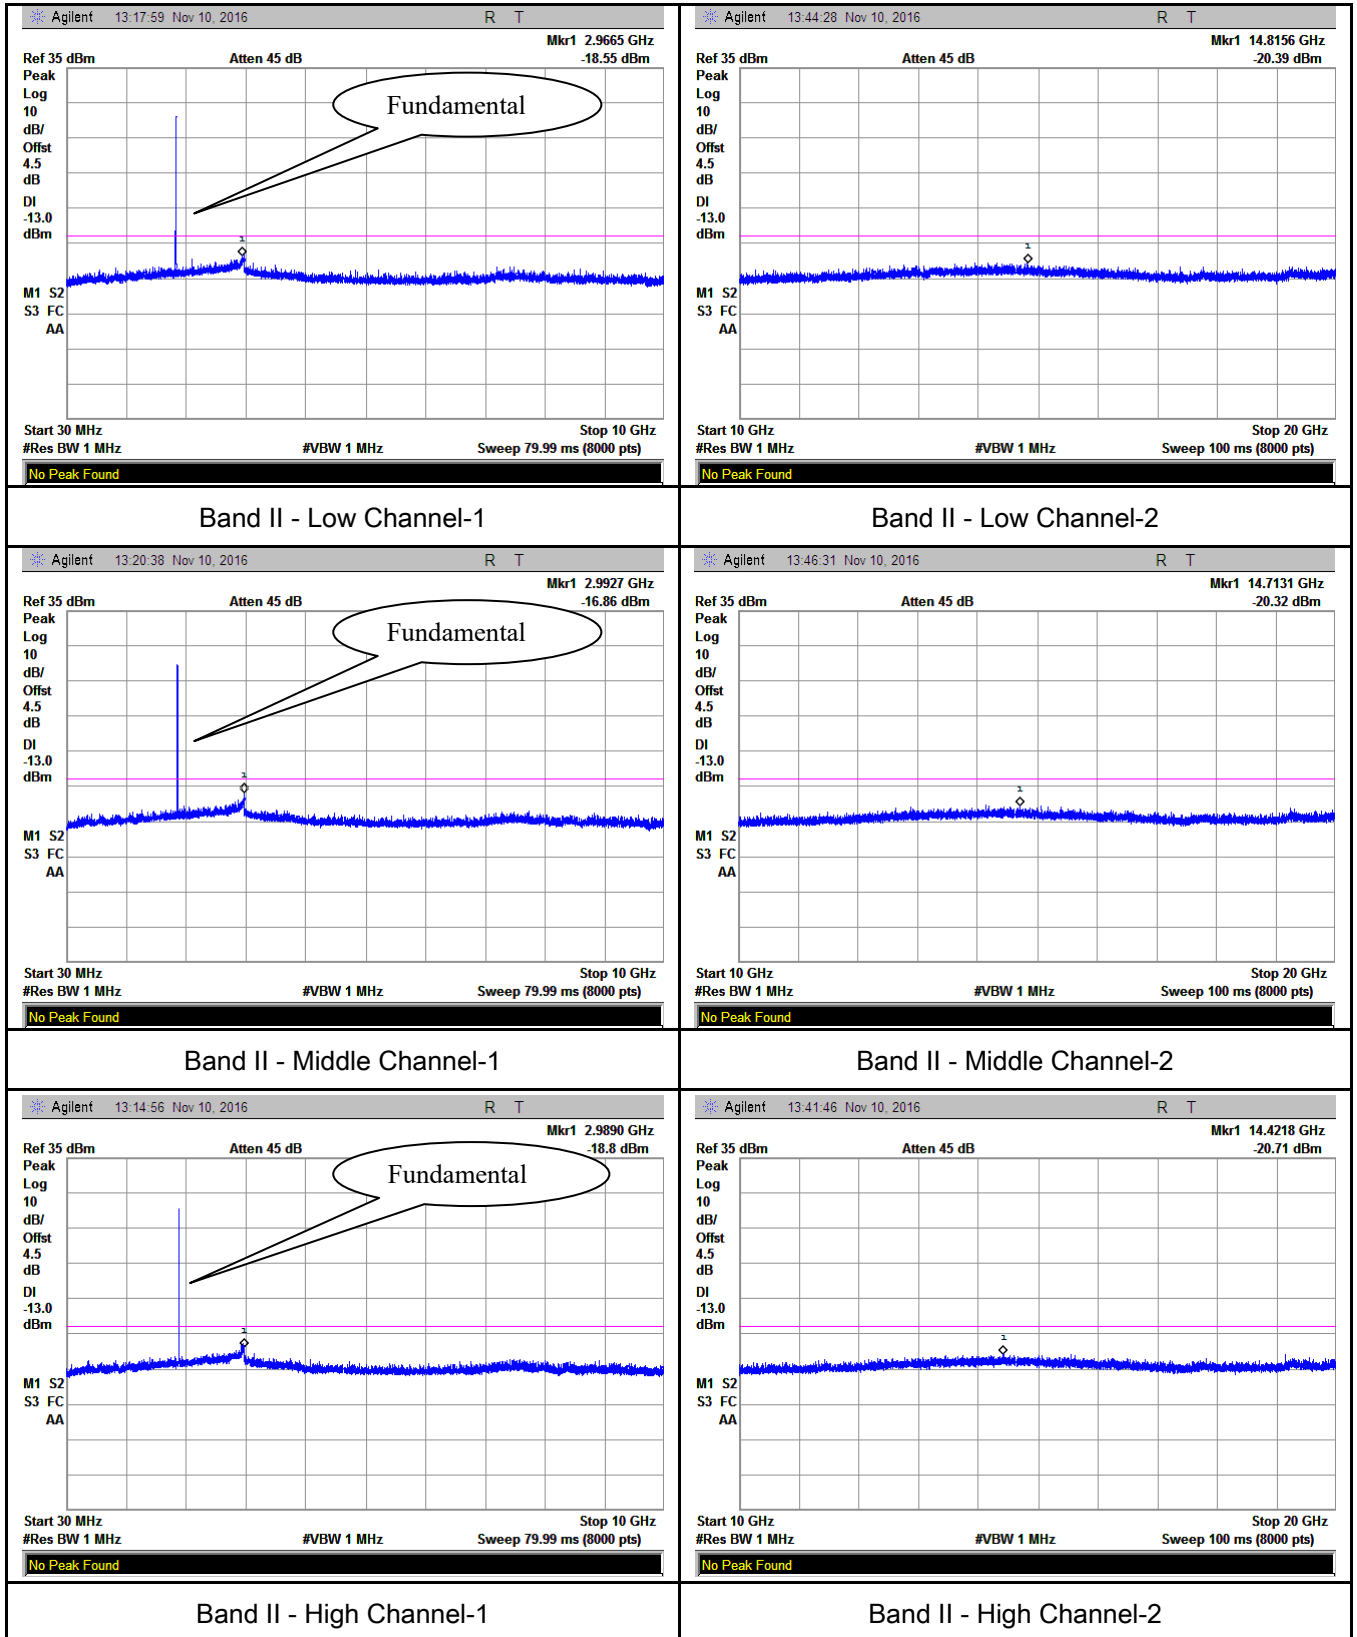


HSDPA:


UMTS-FDD Band V (Part 22H)

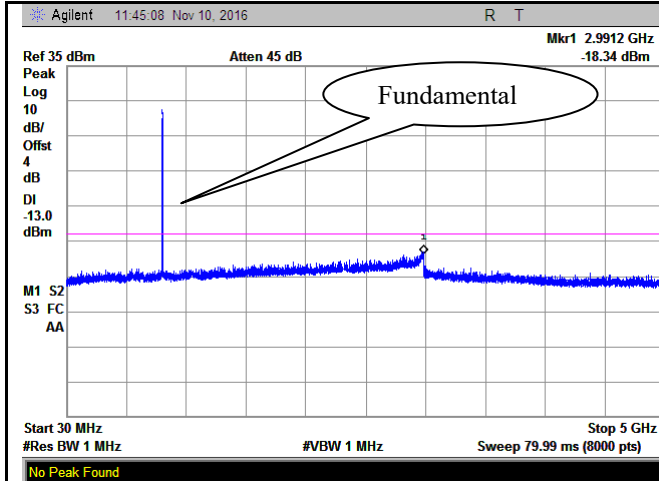


Band V - Low Channel-1

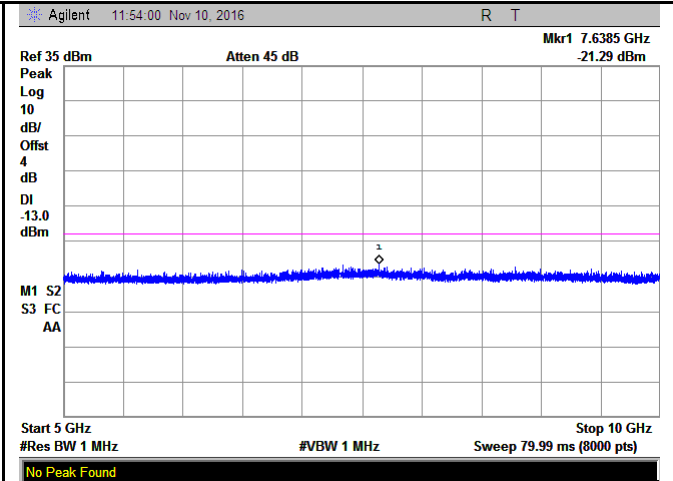


Band V - Low Channel-2

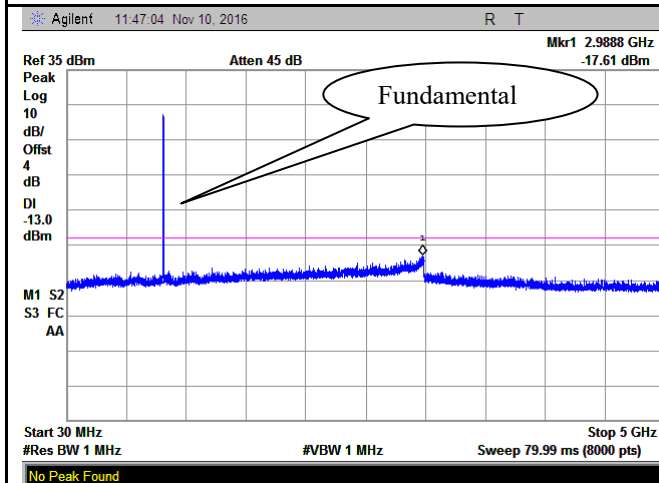


Band V - Middle Channel-1

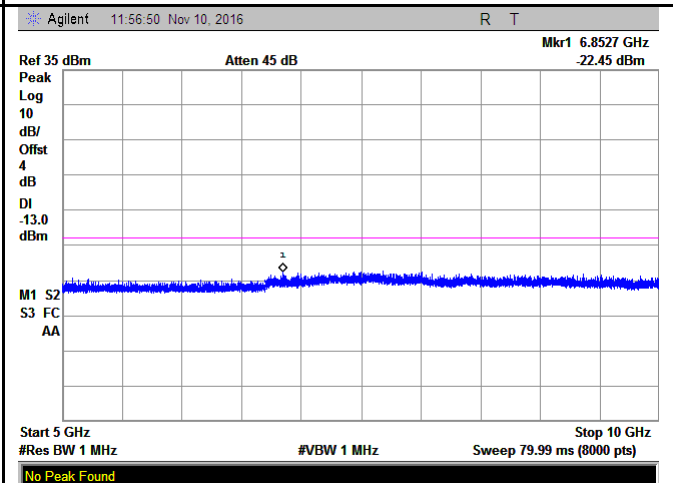

Band V - Middle Channel-2

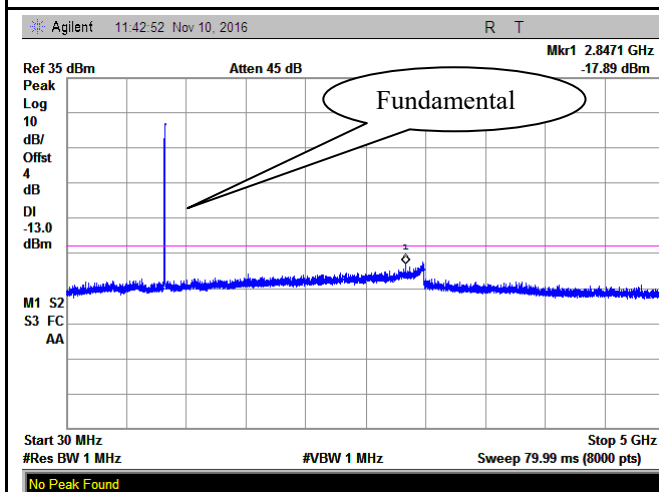


Band V - High Channel-1

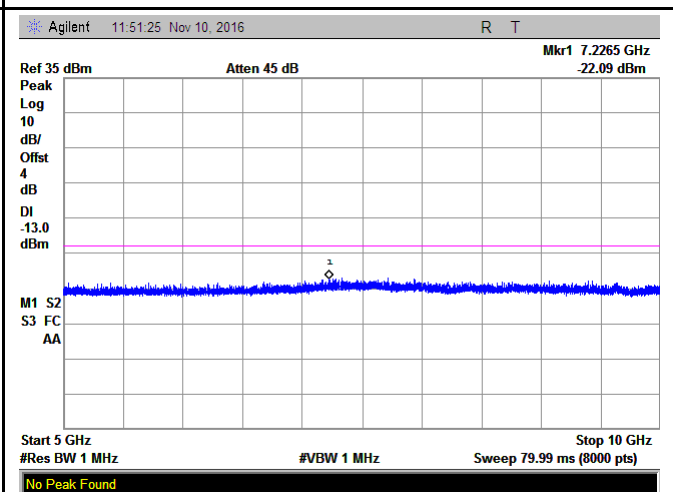

Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

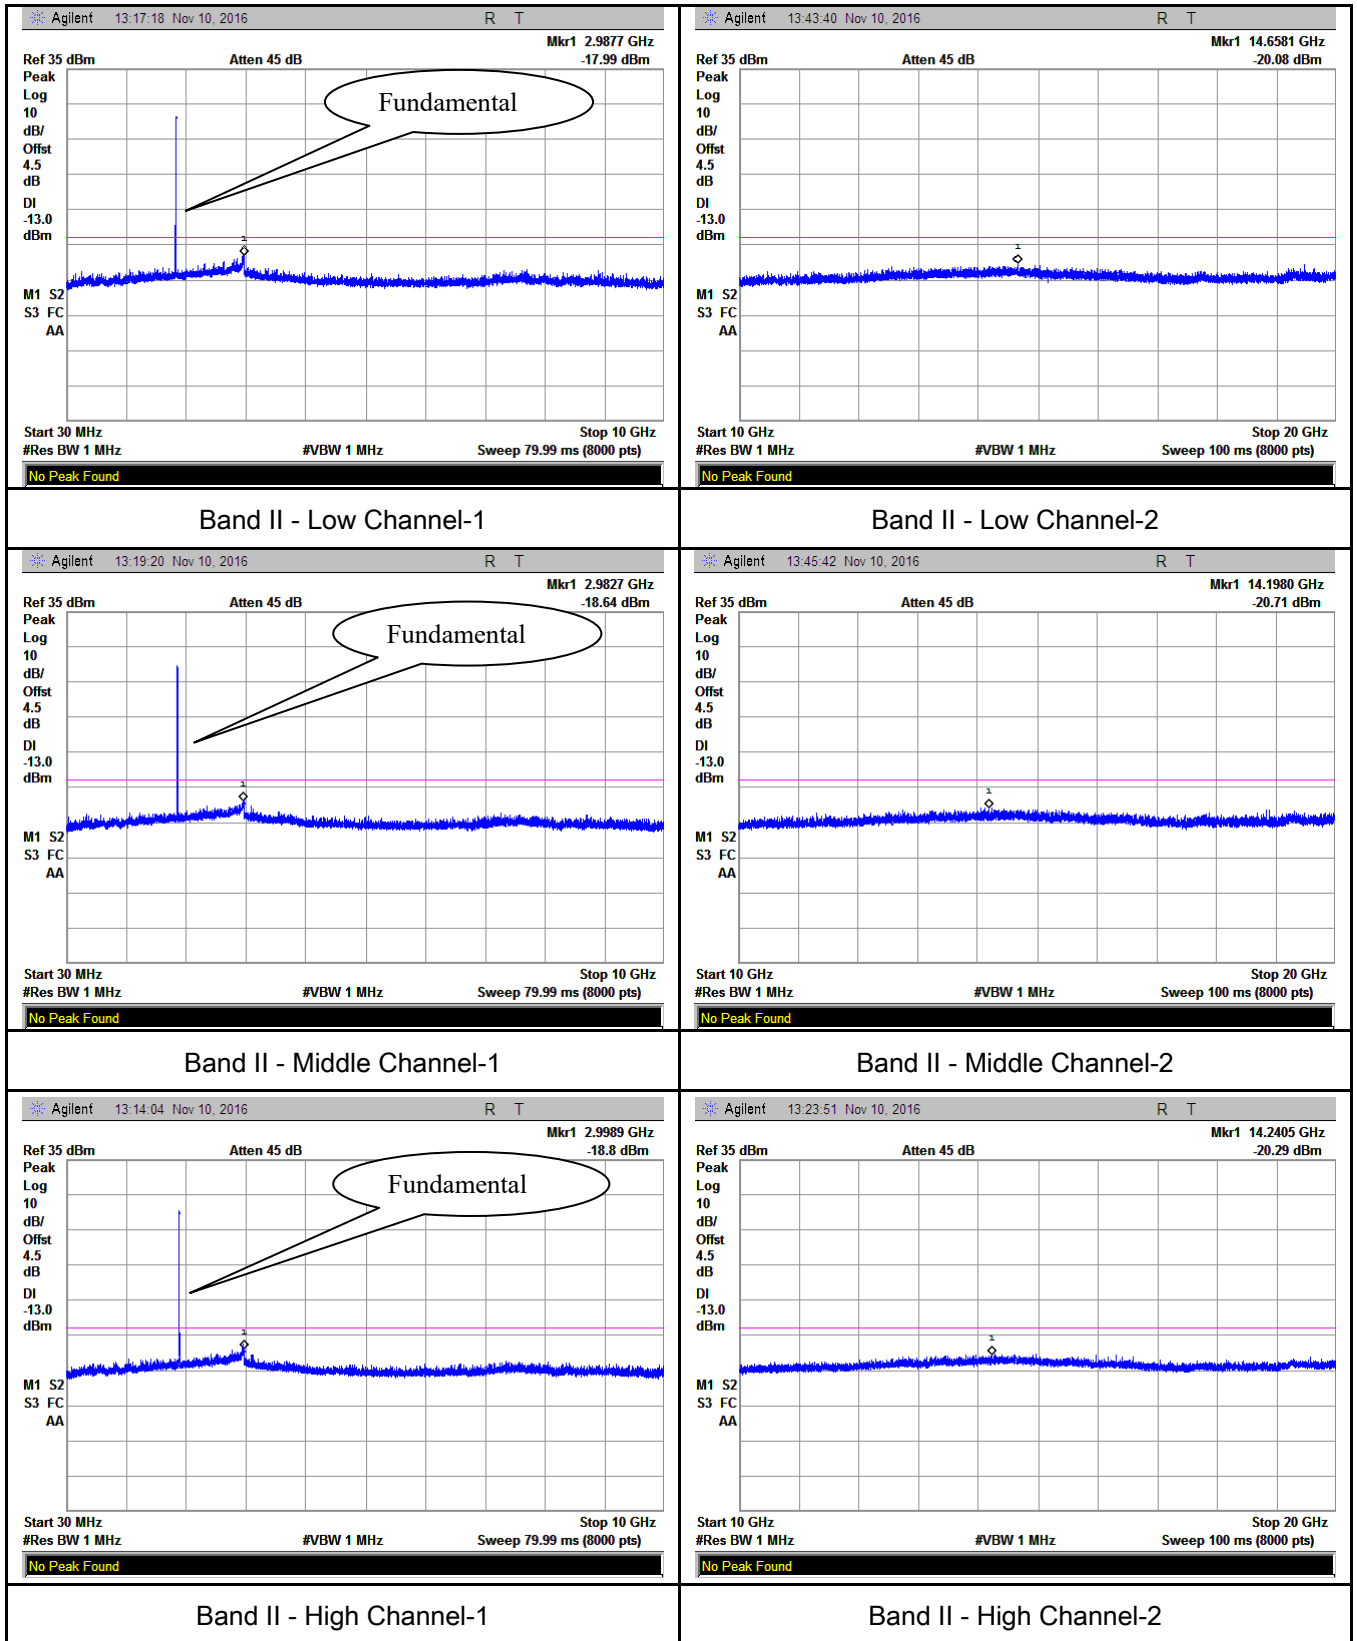

6.6 Spurious Radiated Emissions

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	November 15, 2016
Tested By :	Loren Luo

Requirement(s):

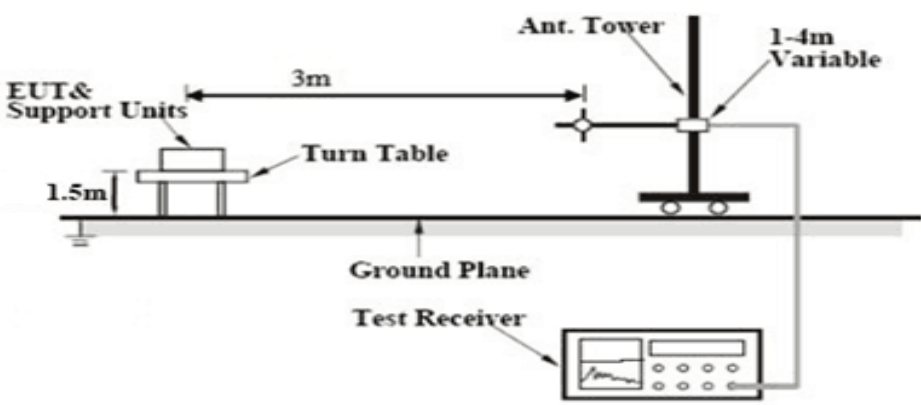Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒
Test setup	 The diagram illustrates the test setup. On the left, 'EUT & Support Units' are placed on a 'Turn Table' which is 1.5m high. A horizontal distance of 3m separates the turntable from the 'Ant. Tower'. The antenna tower has a '1-4m Variable' height section. A 'Ground Plane' is indicated below the turntable, and a 'Test Receiver' is connected to the antenna tower. The entire setup is on a horizontal surface.		
Test Procedure	1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. 3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)		
Remark			

Test Report	16071095-FCC-R1
Page	49 of 83

Result	☒ Pass ☐ Fail
--------	--

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-43.72	V	7.95	0.78	-36.55	-13	-23.55
1648.4	-44.26	H	7.95	0.78	-37.09	-13	-24.09
327.4	-53.02	V	6.4	0.26	-46.88	-13	-33.88
606.2	-52.84	H	6.8	0.37	-46.41	-13	-33.41

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-43.47	V	7.95	0.78	-36.3	-13	-23.3
1673.2	-44.01	H	7.95	0.78	-36.84	-13	-23.84
326.5	-52.64	V	6.4	0.26	-46.5	-13	-33.5
603.1	-52.73	H	6.8	0.37	-46.3	-13	-33.3

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-43.38	V	7.95	0.78	-36.21	-13	-23.21
1697.6	-43.89	H	7.95	0.78	-36.72	-13	-23.72
329.6	-52.72	V	6.4	0.26	-46.58	-13	-33.58
603.7	-52.64	H	6.8	0.37	-46.21	-13	-33.21

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-48.53	V	10.25	2.73	-41.01	-13	-28.01
3700.4	-48.95	H	10.25	2.73	-41.43	-13	-28.43
326.7	-53.24	V	6.4	0.26	-47.1	-13	-34.1
604.2	-53.86	H	6.8	0.37	-47.43	-13	-34.43

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-48.25	V	10.25	2.73	-40.73	-13	-27.73
3760	-49.46	H	10.25	2.73	-41.94	-13	-28.94
328.5	-53.26	V	6.4	0.26	-47.12	-13	-34.12
603.2	-53.78	H	6.8	0.37	-47.35	-13	-34.35

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-48.61	V	10.36	2.73	-40.98	-13	-27.98
3819.6	-48.96	H	10.36	2.73	-41.33	-13	-28.33
329.1	-53.27	V	6.4	0.26	-47.13	-13	-34.13
603.7	-51.24	H	6.8	0.37	-44.81	-13	-31.81

Note:

- 1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band V (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-46.37	V	7.95	0.78	-39.2	-13	-26.2
1652.8	-45.82	H	7.95	0.78	-38.65	-13	-25.65
329.3	-52.79	V	6.4	0.26	-46.65	-13	-33.65
605.2	-52.94	H	6.8	0.37	-46.51	-13	-33.51

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-46.53	V	7.95	0.78	-39.36	-13	-26.36
1670	-45.87	H	7.95	0.78	-38.7	-13	-25.7
328.7	-52.68	V	6.4	0.26	-46.54	-13	-33.54
604.3	-53.06	H	6.8	0.37	-46.63	-13	-33.63

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-46.73	V	7.95	0.78	-39.56	-13	-26.56
1693.2	-45.94	H	7.95	0.78	-38.77	-13	-25.77
329.6	-52.73	V	6.4	0.26	-46.59	-13	-33.59
606.8	-53.11	H	6.8	0.37	-46.68	-13	-33.68

Note:

1, The testing has been conformed to $10 \times 846.6 \text{ MHz} = 8,466 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-50.32	V	10.25	2.73	-42.8	-13	-29.8
3704.8	-50.48	H	10.25	2.73	-42.96	-13	-29.96
330.2	-54.82	V	6.4	0.26	-48.68	-13	-35.68
601.4	-53.64	H	6.8	0.37	-47.21	-13	-34.21

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.68	V	10.25	2.73	-42.16	-13	-29.16
3760	-49.95	H	10.25	2.73	-42.43	-13	-29.43
331.4	-53.67	V	6.4	0.26	-47.53	-13	-34.53
600.5	-53.46	H	6.8	0.37	-47.03	-13	-34.03

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-49.55	V	10.36	2.73	-41.92	-13	-28.92
3815.2	-49.62	H	10.36	2.73	-41.99	-13	-28.99
328.7	-53.76	V	6.4	0.26	-47.62	-13	-34.62
603.5	-53.91	H	6.8	0.37	-47.48	-13	-34.48

Note:

1, The testing has been conformed to $10 \times 1907.6 \text{ MHz} = 19,076 \text{ MHz}$

2, All other emissions more than 30 dB below the limit


3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case

6.7 Band Edge

Temperature	23°C
Relative Humidity	52%
Atmospheric Pressure	1010mbar
Test date :	November 04&10, 2016
Tested By :	Loren Luo

Requirement(s):

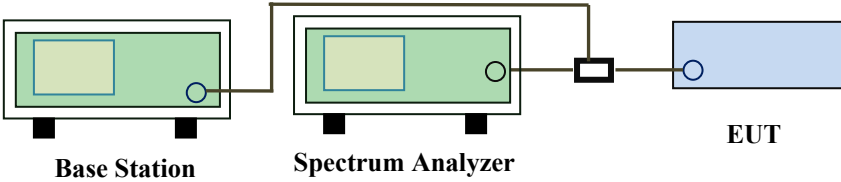Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup	 The diagram illustrates the test setup. On the left is a green box labeled 'Base Station'. A cable connects it to a green box labeled 'Spectrum Analyzer'. From the Spectrum Analyzer, a cable goes through a small black box (power divider) and then to a blue box labeled 'EUT'.		
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-15.25	-13
849.0200	-15.43	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-15.80	-13
1910.0225	-15.12	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-15.49	-13
849.0025	-14.72	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9950	-15.29	-13
1910.0200	-14.61	-13

EGPRS (MCS5):

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-15.18	-13
849.0175	-17.19	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9975	-13.69	-13
1910.0175	-14.63	-13

RCM:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.075	-25.06	-13
849.750	-29.62	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1848.650	-28.93	-13
1910.050	-27.14	-13

HSUPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.650	-26.49	-13
849.075	-29.34	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.700	-28.87	-13
1910.050	-27.35	-13

HSDPA:

UMTS-FDD Band V (Part 22H)


Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.075	-26.95	-13
849.075	-29.46	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.025	-27.71	-13
1910.125	-27.80	-13


GSM Voice:

Test Plots

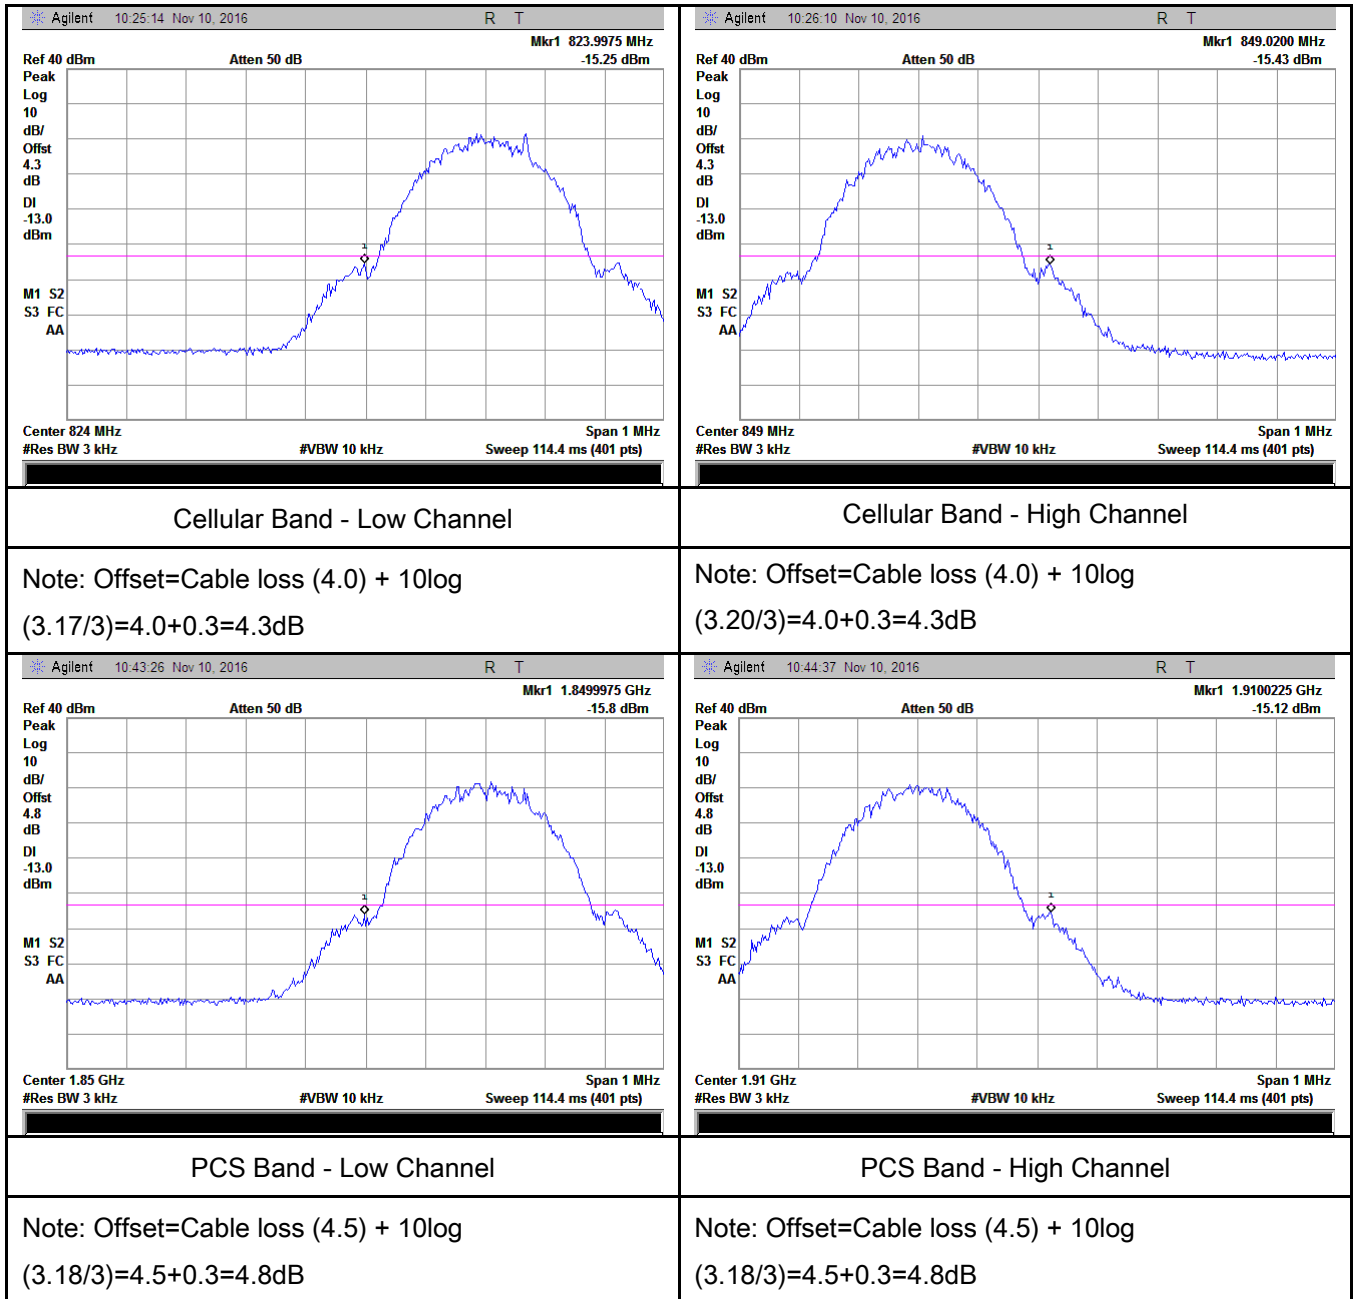


GPRS:

Test Plots

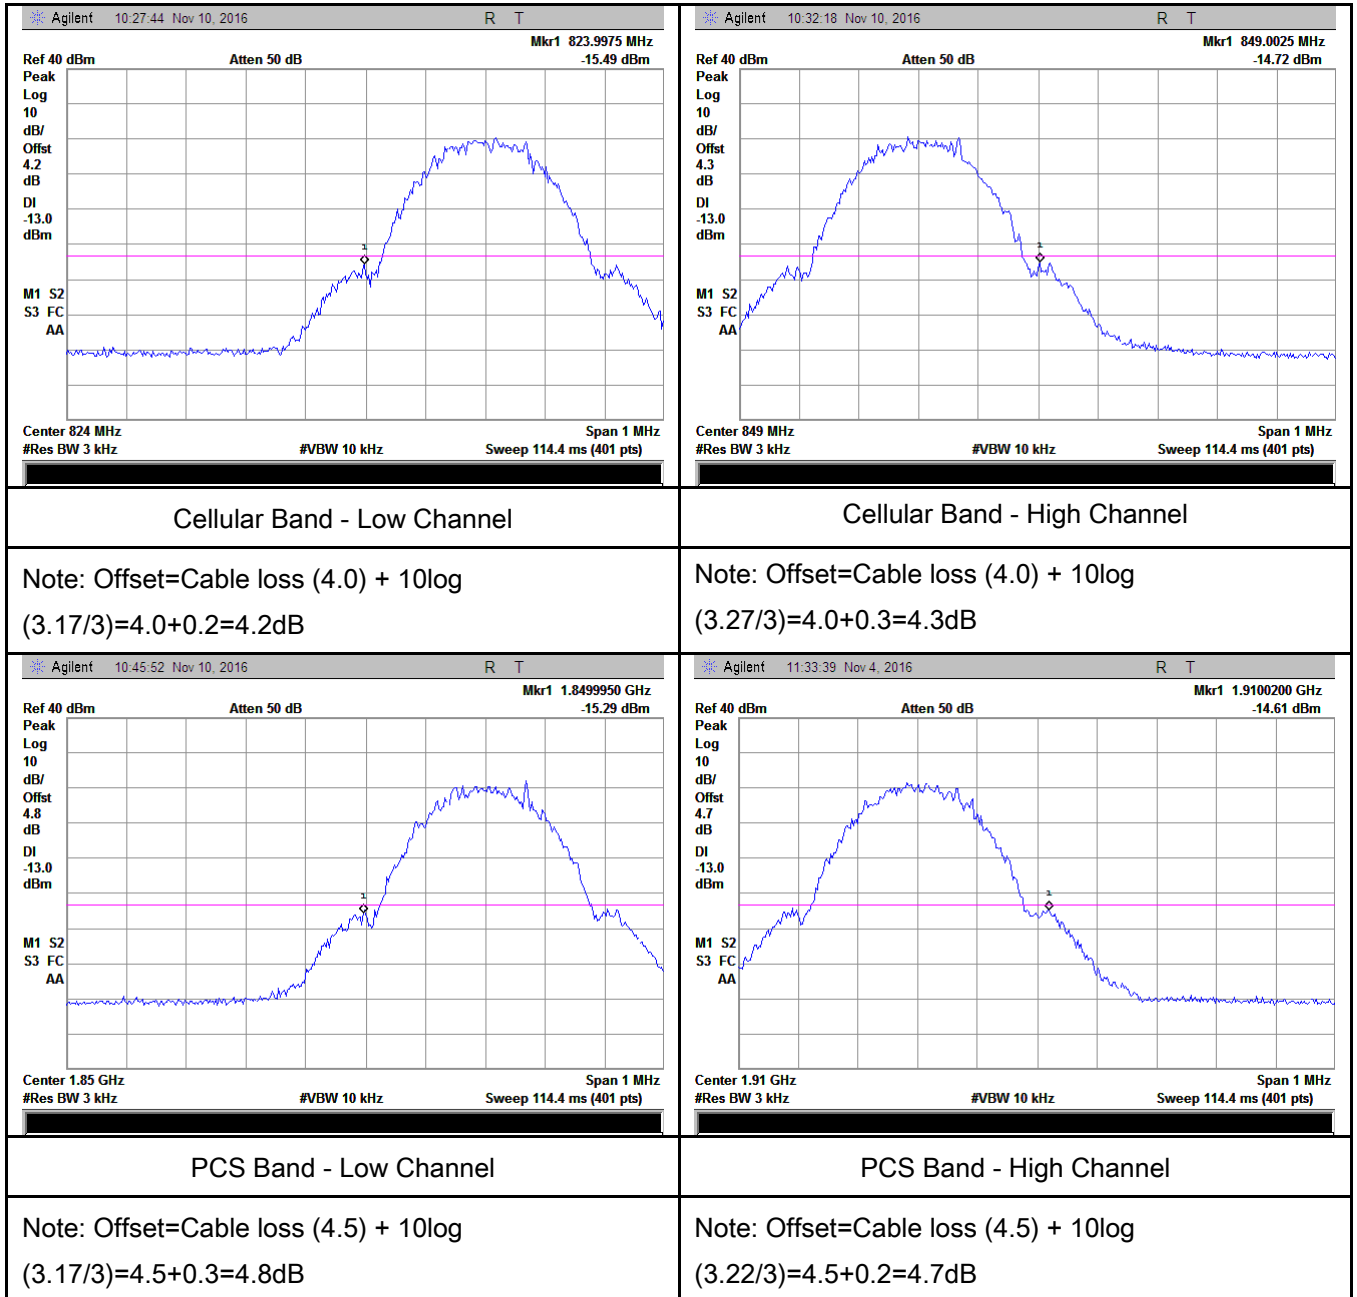


EGPRS (MCS5):

Test Plots

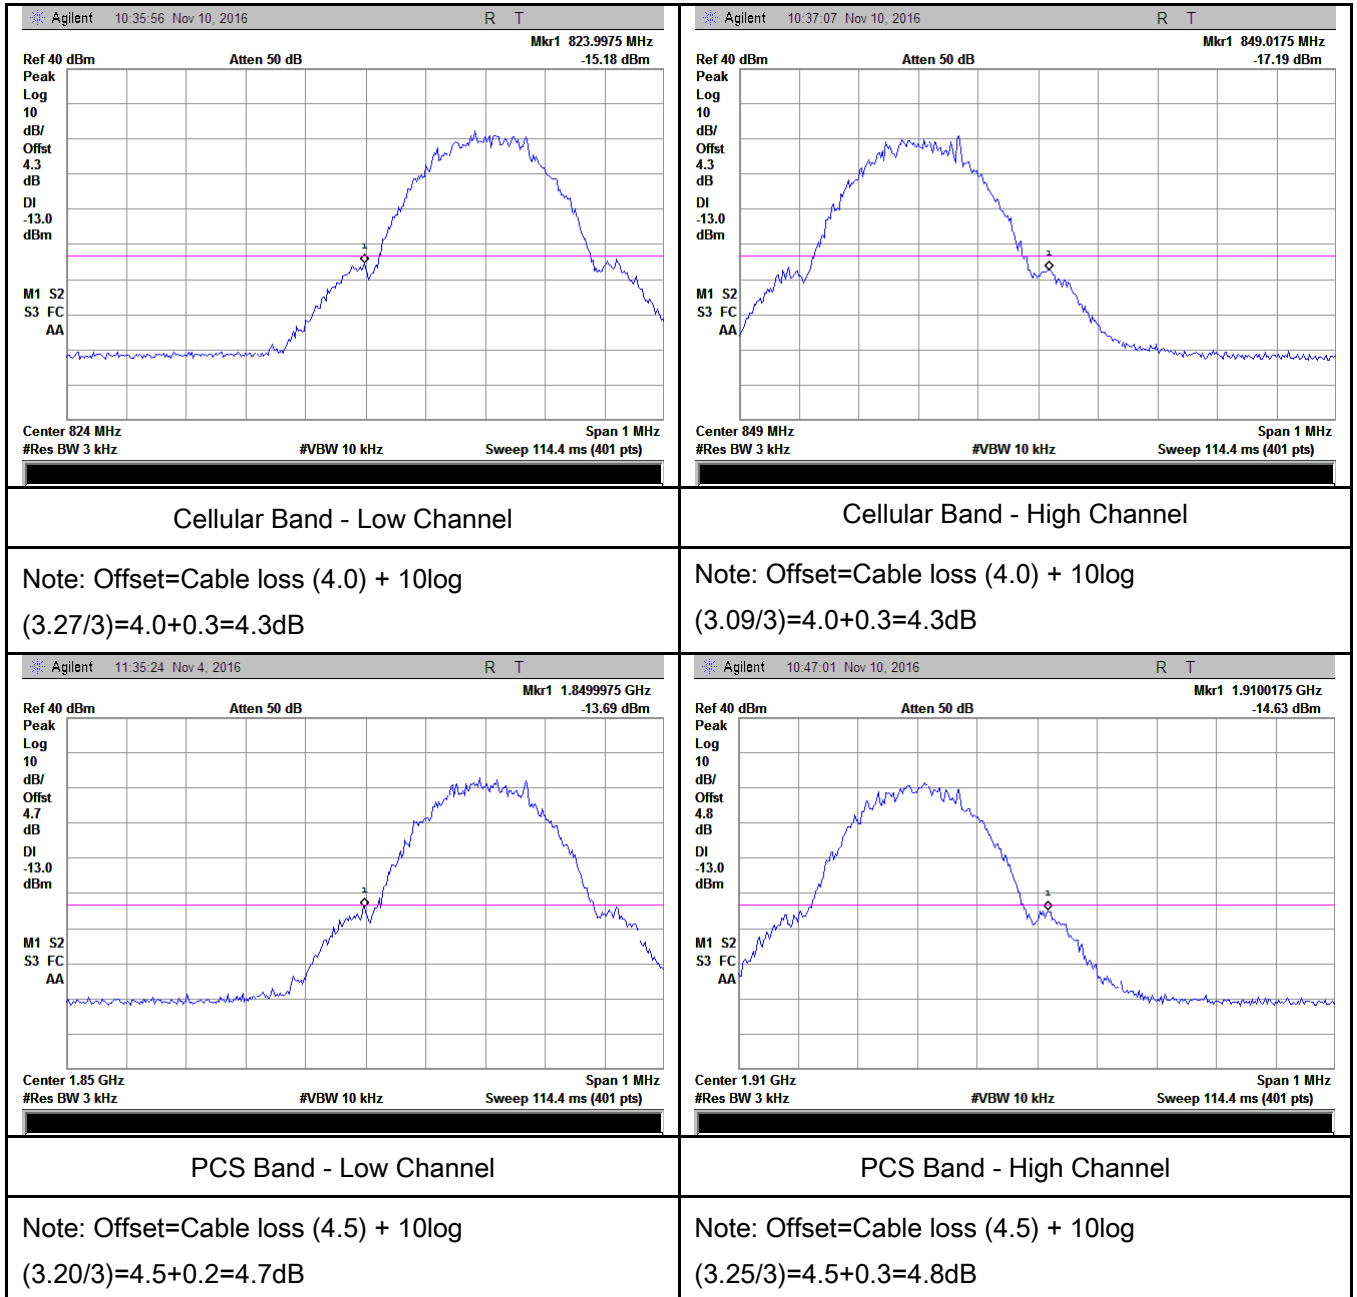


RMC:

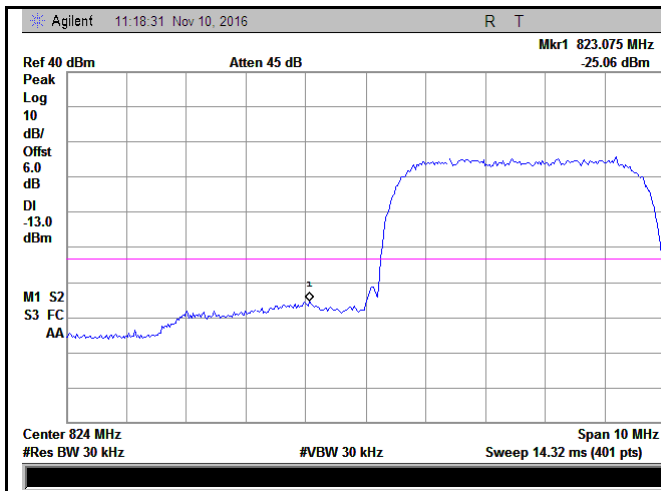


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.94/30)=4.5+2.0=6.0 dB

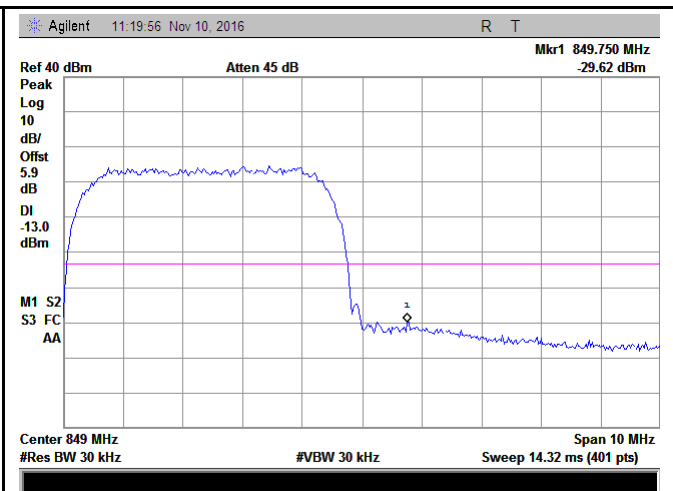


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.82/30)=4.0+1.9=5.9 dB

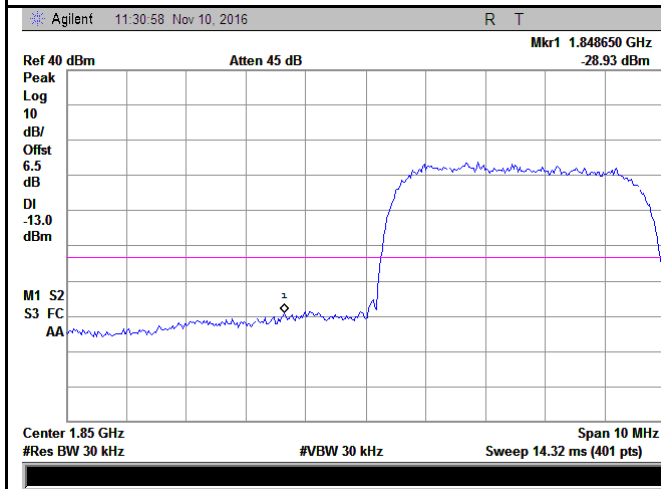

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(48.69/30)=4.5+2.0=6.5 dB

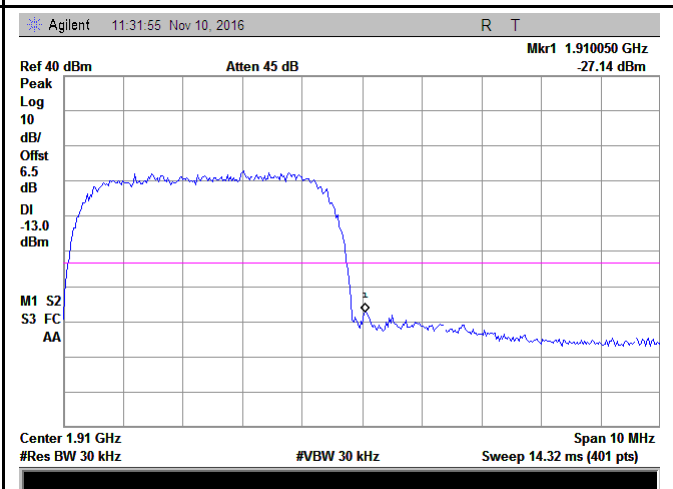

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(49.09/30)=4.5+2.0=6.5 dB

HSUPA:

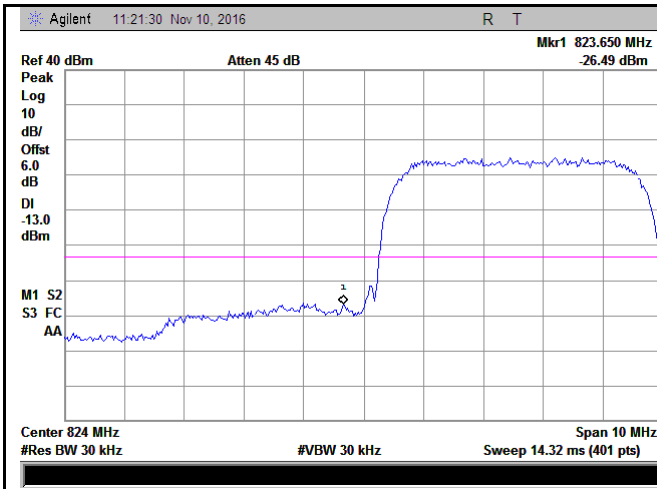


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.74/30)=4.0+2.0=6.0 dB

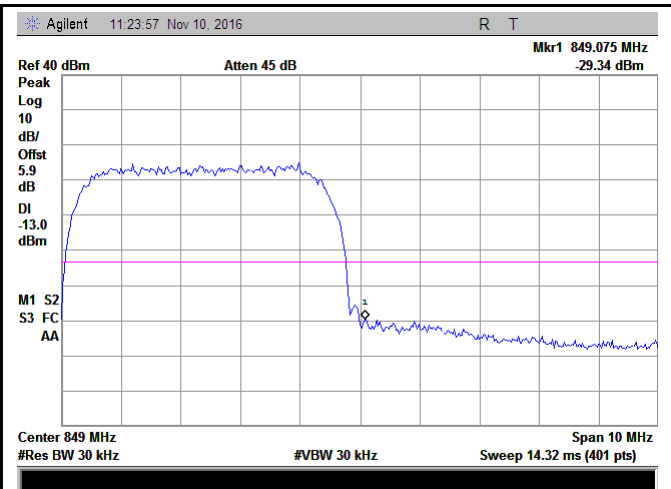


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.99/30)=4.0+1.9=5.9 dB

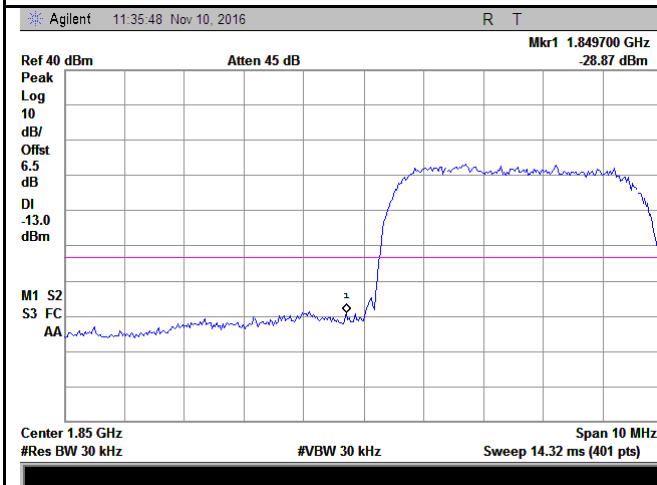

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(49.31/30)=4.5+2.0=6.5 dB

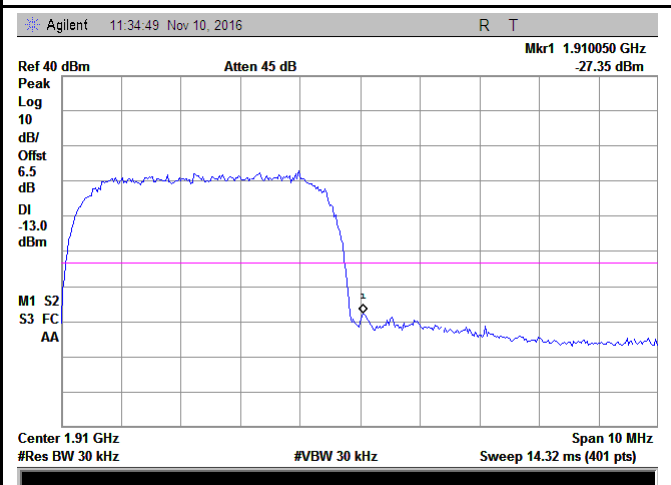

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(49.15/30)=4.5+2.0=6.5 dB

HSDPA:

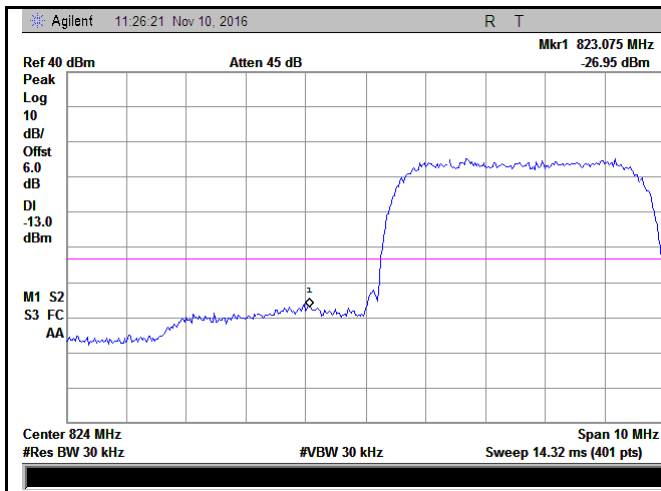


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.98/30)=4.0+2.0=6.0 dB

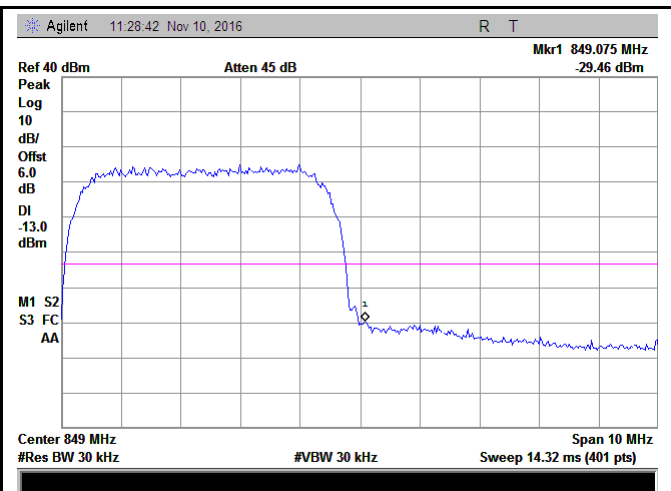


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.72/30)=4.0+2.0=6.0 dB

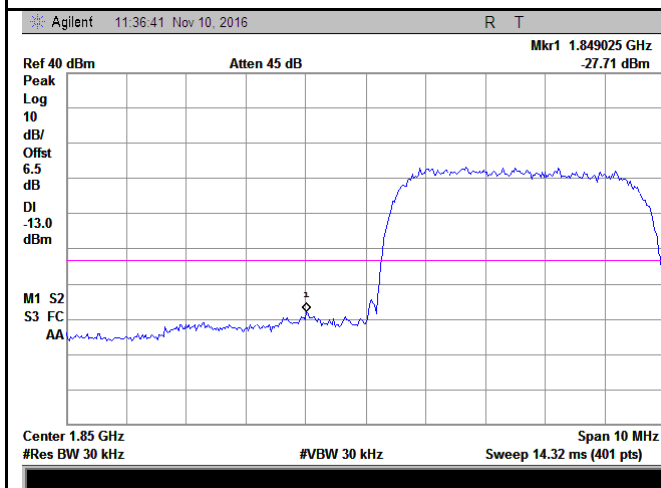

UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(49.07/30)=4.5+2.0=6.5 dB

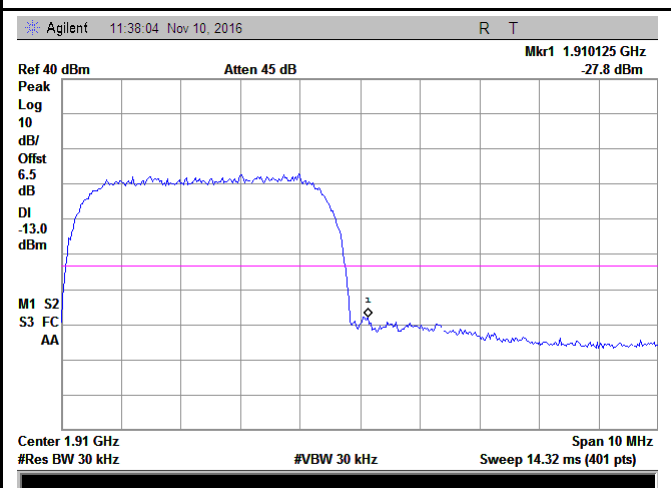


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(48.95/30)=4.5+2.0=6.5 dB

6.8 Frequency Stability

Temperature	23°C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	November 14, 2016
Tested By :	Loren Luo

Requirement(s):

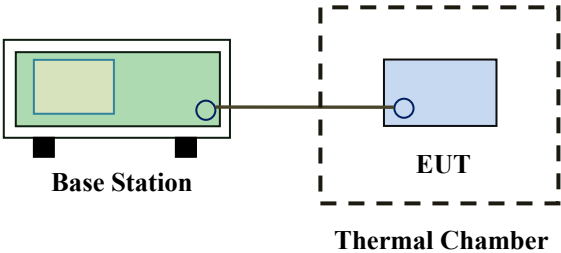Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>45 to 512</td><td>2.5</td><td>5.0</td><td>.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 29.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	45 to 512	2.5	5.0	.0	821 to 896	1.5	2.5	2.5	928 to 29.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
45 to 512	2.5	5.0	.0																																
821 to 896	1.5	2.5	2.5																																
928 to 29.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup	 Base Station EUT Thermal Chamber																																		

Test Report	16071095-FCC-R1
Page	65 of 83

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0215	2.5
0		15	0.0179	2.5
10		19	0.0227	2.5
20		19	0.0227	2.5
30		20	0.0239	2.5
40		14	0.0167	2.5
50		16	0.0191	2.5
55		13	0.0155	2.5
25	4.2	18	0.0215	2.5
	3.5	15	0.0179	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	15	0.0080	2.5
0		17	0.0090	2.5
10		19	0.0101	2.5
20		14	0.0074	2.5
30		16	0.0085	2.5
40		12	0.0064	2.5
50		15	0.0080	2.5
55		18	0.0096	2.5
25	4.2	19	0.0101	2.5
	3.5	14	0.0074	2.5

GPRS:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	17	0.0203	2.5
0		15	0.0179	2.5
10		12	0.0143	2.5
20		17	0.0203	2.5
30		13	0.0155	2.5
40		16	0.0191	2.5
50		18	0.0215	2.5
55		18	0.0215	2.5
25	4.2	19	0.0227	2.5
	3.5	21	0.0251	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	19	0.0101	2.5
0		16	0.0085	2.5
10		14	0.0074	2.5
20		12	0.0064	2.5
30		11	0.0059	2.5
40		15	0.0080	2.5
50		17	0.0090	2.5
55		15	0.0080	2.5
25	4.2	13	0.0069	2.5
	3.5	13	0.0069	2.5

EGPRS (MCS5):

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	20	0.0239	2.5
0		15	0.0179	2.5
10		26	0.0311	2.5
20		14	0.0167	2.5
30		17	0.0203	2.5
40		18	0.0215	2.5
50		13	0.0155	2.5
55		11	0.0131	2.5
25	4.2	18	0.0215	2.5
	3.5	14	0.0167	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	20	0.0106	2.5
0		16	0.0085	2.5
10		18	0.0096	2.5
20		20	0.0106	2.5
30		16	0.0085	2.5
40		17	0.0090	2.5
50		15	0.0080	2.5
55		14	0.0074	2.5
25	4.2	14	0.0074	2.5
	3.5	18	0.0096	2.5

RMC:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	16	0.0192	2.5
0		13	0.0156	2.5
10		14	0.0168	2.5
20		18	0.0216	2.5
30		19	0.0228	2.5
40		14	0.0168	2.5
50		16	0.0192	2.5
55		16	0.0192	2.5
25	4.2	18	0.0216	2.5
	3.5	15	0.0180	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0096	2.5
0		16	0.0085	2.5
10		19	0.0101	2.5
20		15	0.0080	2.5
30		13	0.0069	2.5
40		16	0.0085	2.5
50		18	0.0096	2.5
55		13	0.0069	2.5
25	4.2	13	0.0069	2.5
	3.5	15	0.0080	2.5

HSUPA:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	16	0.0192	2.5
0		19	0.0228	2.5
10		15	0.0180	2.5
20		15	0.0180	2.5
30		14	0.0168	2.5
40		19	0.0228	2.5
50		16	0.0192	2.5
55		15	0.0180	2.5
25	4.2	14	0.0168	2.5
	3.5	18	0.0216	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	17	0.0090	2.5
0		19	0.0101	2.5
10		14	0.0074	2.5
20		16	0.0085	2.5
30		17	0.0090	2.5
40		19	0.0101	2.5
50		13	0.0069	2.5
55		16	0.0085	2.5
25	4.2	14	0.0074	2.5
	3.5	15	0.0080	2.5

HSDPA:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	19	0.0228	2.5
0		18	0.0216	2.5
10		20	0.0240	2.5
20		16	0.0192	2.5
30		16	0.0192	2.5
40		14	0.0168	2.5
50		18	0.0216	2.5
55		17	0.0204	2.5
25	4.2	14	0.0168	2.5
	3.5	16	0.0192	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	20	0.0106	2.5
0		16	0.0085	2.5
10		16	0.0085	2.5
20		18	0.0096	2.5
30		19	0.0101	2.5
40		14	0.0074	2.5
50		17	0.0090	2.5
55		17	0.0090	2.5
25	4.2	14	0.0074	2.5
	3.5	13	0.0069	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	☒
Power Splitter	1#	1#	08/31/2016	08/30/2017	☒
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	☒
Temperature/Humidity Chamber	UHL-270	001	10/08/2016	10/07/2017	☒
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/23/2016	09/22/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	☒
Power Amplifier	SMC150D	R1553-0313	03/09/2016	03/08/2017	☒
Power Amplifier	S41-25D	R1553-0314	05/27/2016	05/26/2017	☒
Tunable Notch Filter	3NF-800/1000-S	AA4	08/31/2016	08/30/2017	☒

Test Report	16071095-FCC-R1
Page	73 of 83

Tunable Notch Filter	3NF- 1000/2000-S	AM 4	08/31/2016	08/30/2017	☒
----------------------	---------------------	------	------------	------------	-------------------------------------

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo



Whole Package View



Adapter - Front View



Charger Base - Lable View



EUT - Front View



EUT - Rear View



EUT - Top View




EUT - Bottom View



EUT - Left View



EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo




Cover Off - Top View 1



Cover Off - Top View 2




Cover Off - Top View 3

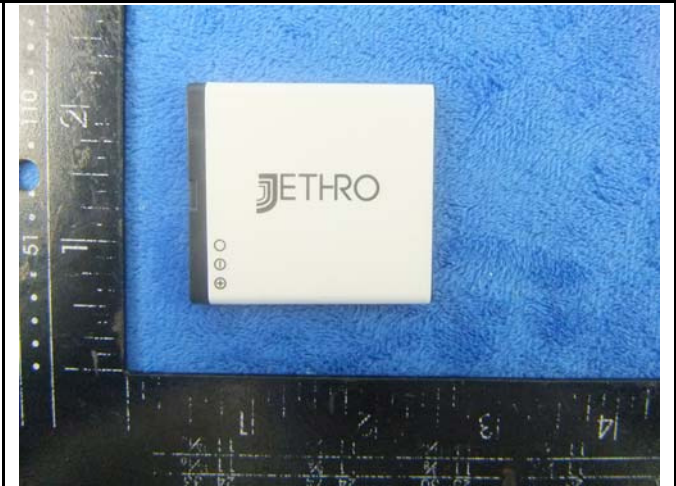


Battery - Front View




Battery - Rear View

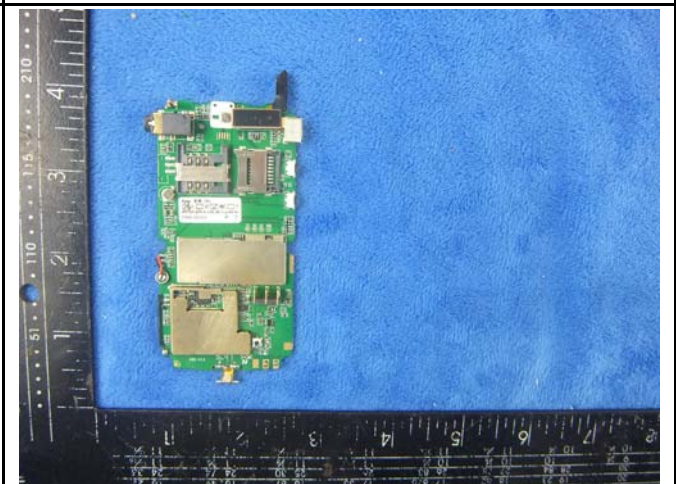


Mainboard with Shielding - Front View

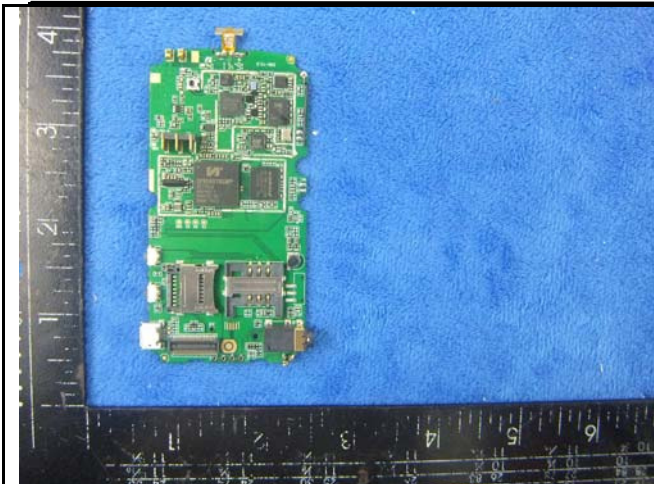


Mainboard without Shielding - Front View

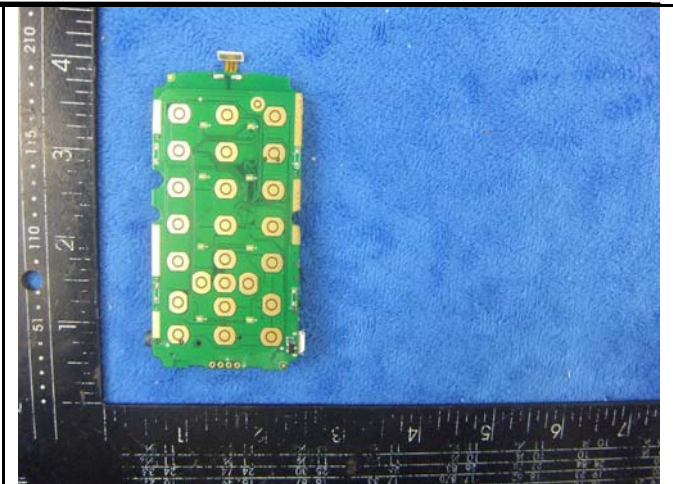


Mainboard - Rear View

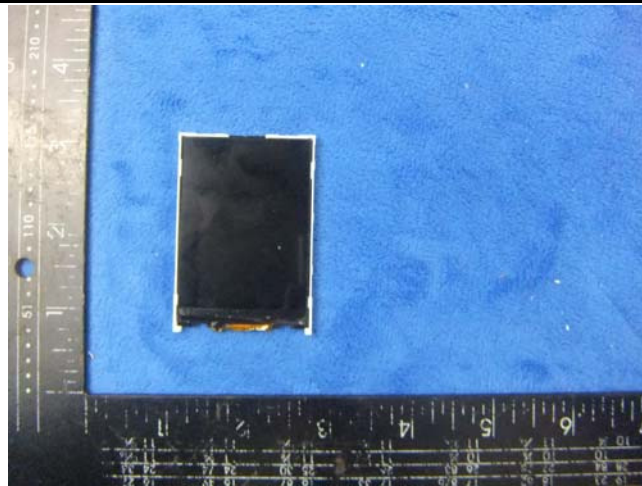


LCD - Front View

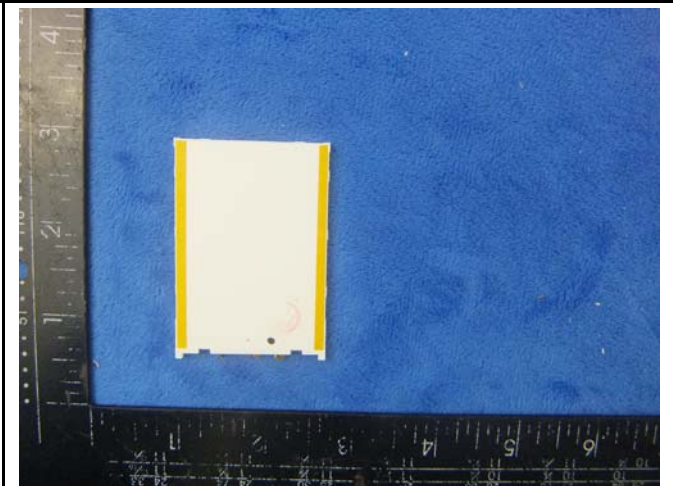

LCD - Rear View

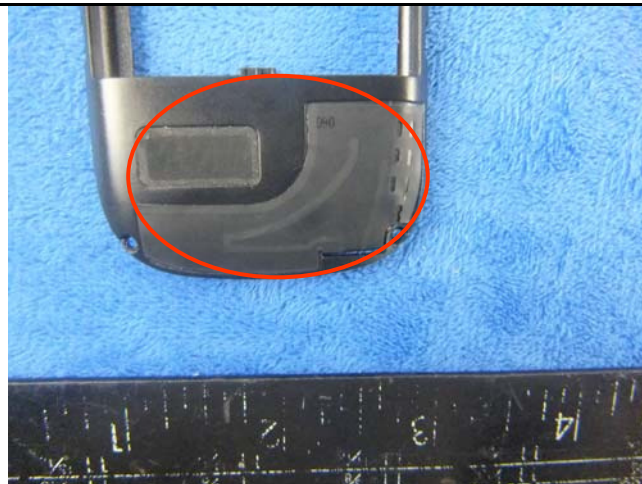


GSM/PCS/UMTS-FDD Antenna View

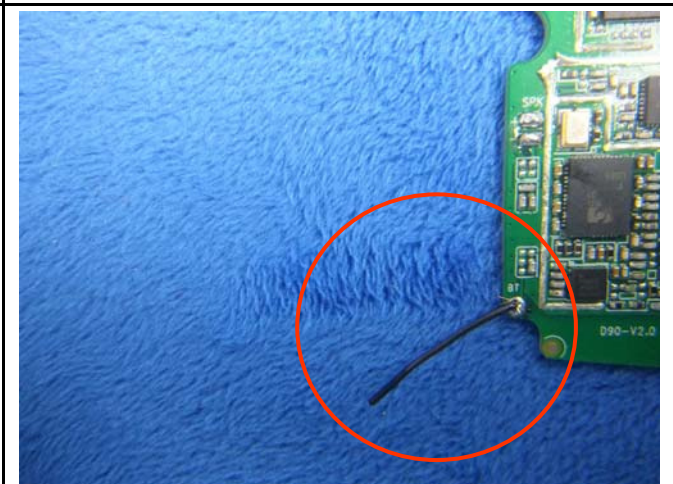


BT - Antenna View

Annex B.iii. Photograph: Test Setup Photo

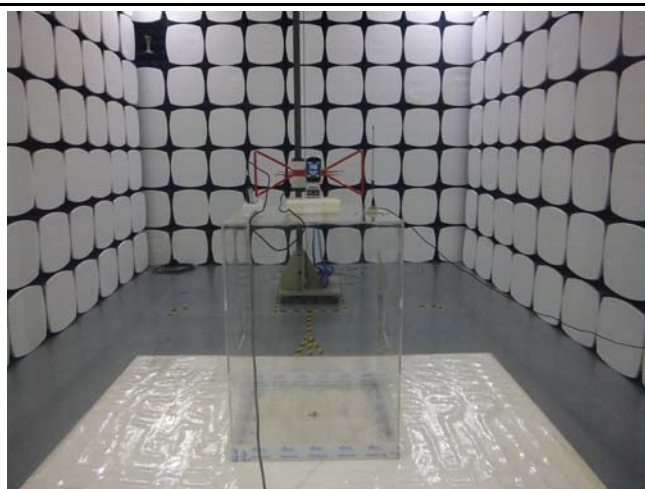

Radiated Spurious Emissions Test Setup Below 1GHz

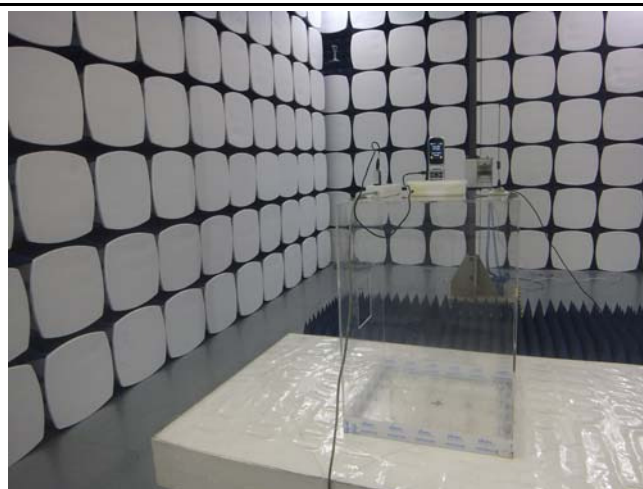


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Spurious Emissions

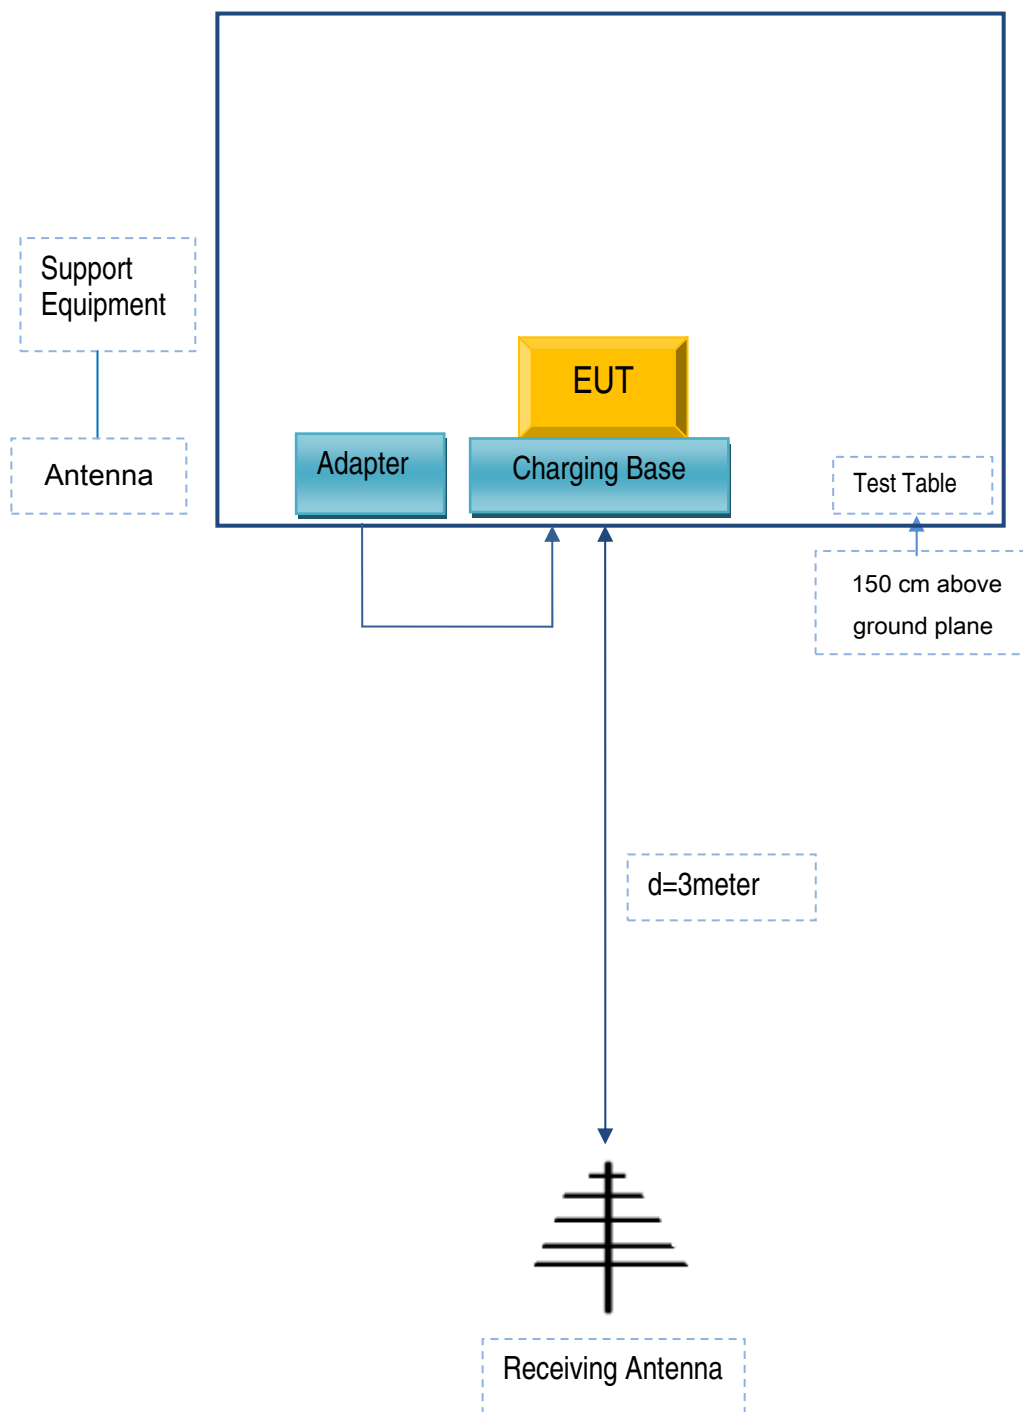

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Jethro Trading LTD.	AC Adapter	HJ-050050-US	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Test Report	16071095-FCC-R1
Page	81 of 83

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Test Report	16071095-FCC-R1
Page	82 of 83

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Test Report	16071095-FCC-R1
Page	83 of 83

Annex E. DECLARATION OF SIMILARITY

N/A