


Test Mode	Mode 1 IEEE 802.11n HT20 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

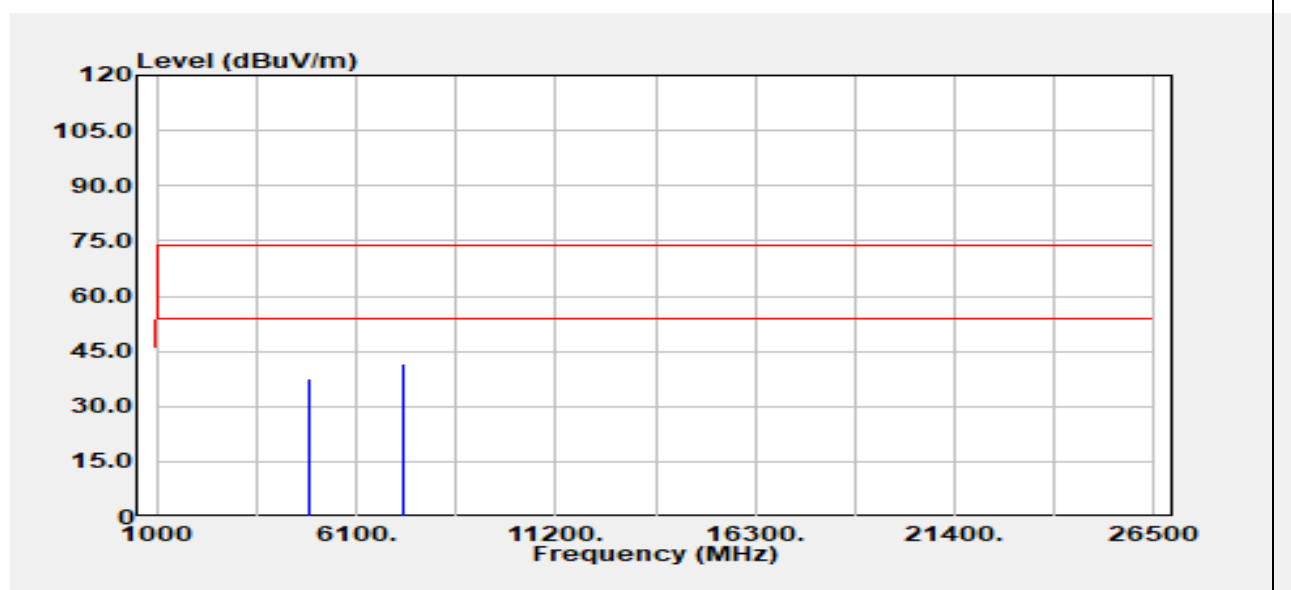


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPμV)	Factor (dB)	Actual FS (dBPμV/m)	Limit @3m (dBPμV/m)	Margin (dB)
4874.00	Peak	36.20	1.57	37.76	74.00	-36.24
4874.00	Average	26.72	1.57	28.29	54.00	-25.71
7311.00	Peak	33.72	7.72	41.45	74.00	-32.55
7311.00	Average	25.48	7.72	33.20	54.00	-20.80
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT20 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

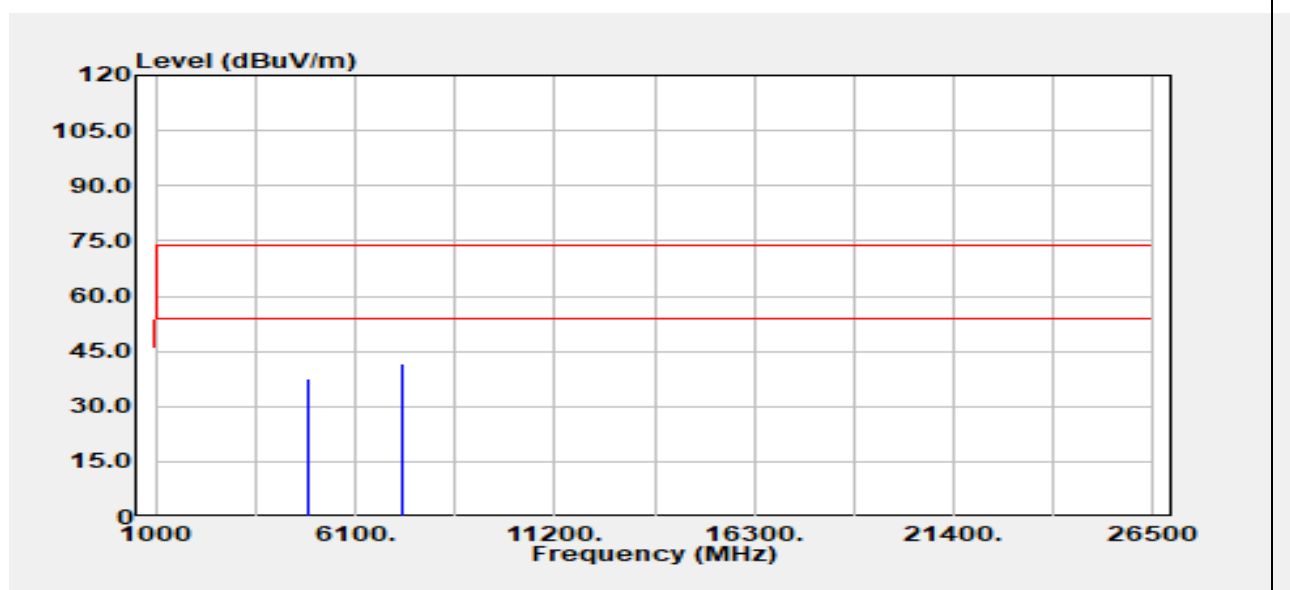


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPV)	Factor (dB)	Actual FS (dBPV/m)	Limit @3m (dBPV/m)	Margin (dB)
4874.00	Peak	36.06	1.57	37.62	74.00	-36.38
4874.00	Average	26.70	1.57	28.27	54.00	-25.73
7311.00	Peak	33.88	7.72	41.60	74.00	-32.40
7311.00	Average	24.84	7.72	32.57	54.00	-21.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT20 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

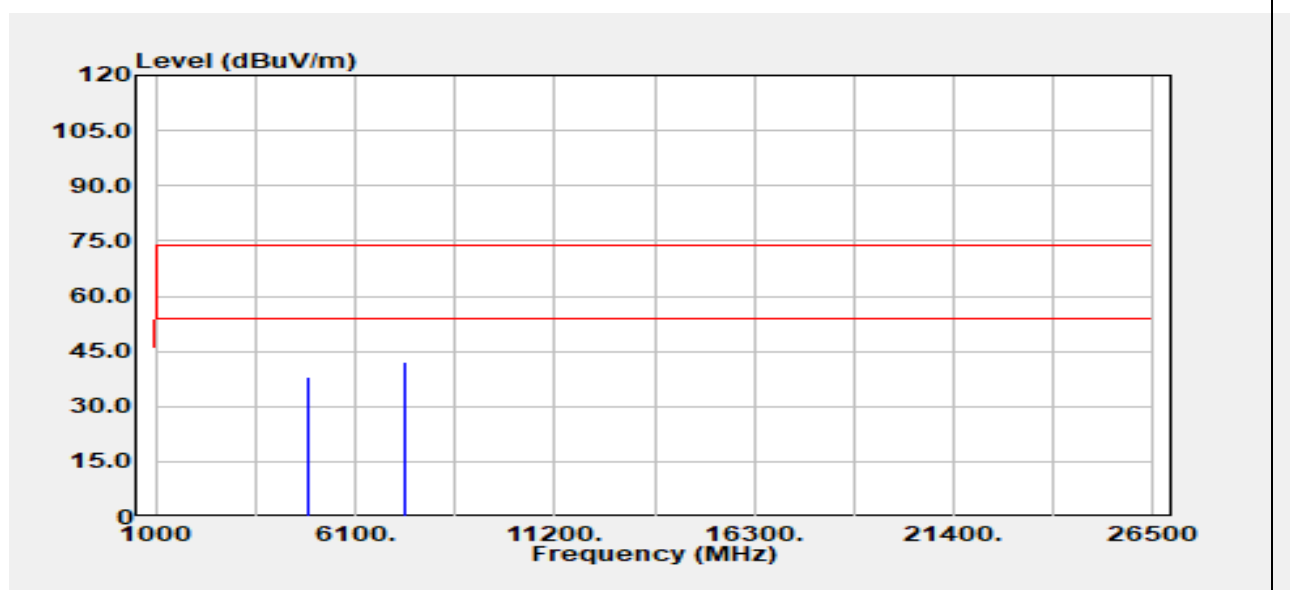


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.00	Peak	35.90	1.96	37.86	74.00	-36.14
4924.00	Average	26.66	1.96	28.62	54.00	-25.38
7386.00	Peak	34.70	7.59	42.29	74.00	-31.71
7386.00	Average	25.48	7.59	33.07	54.00	-20.93
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT20 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

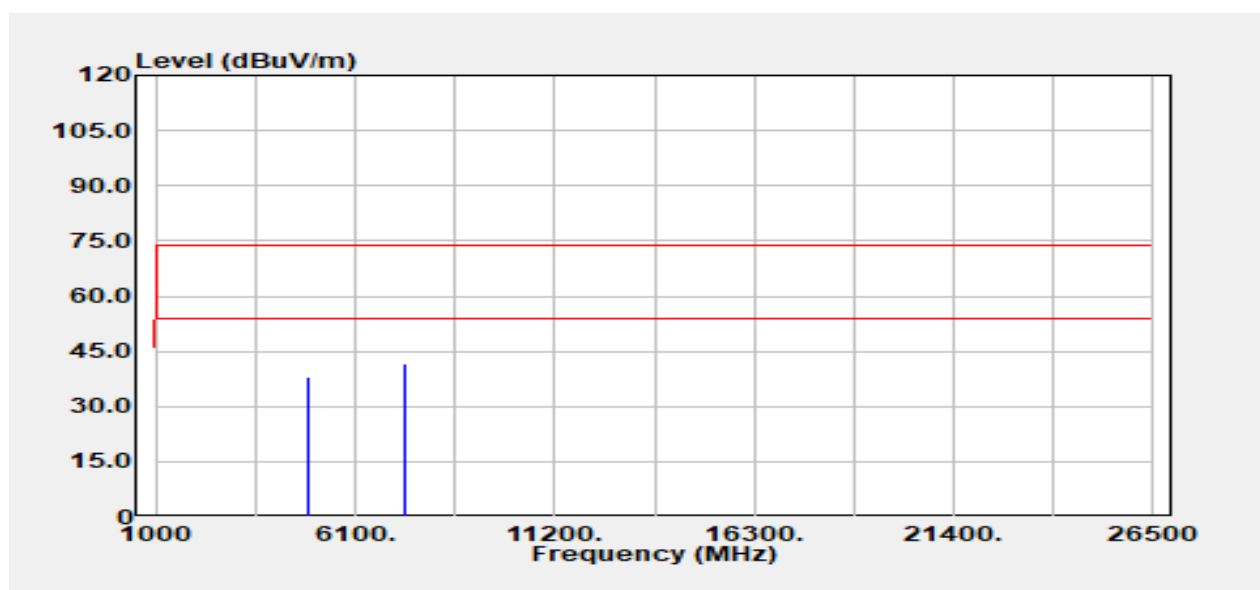


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.00	Peak	35.89	1.96	37.85	74.00	-36.15
4924.00	Average	26.44	1.96	28.40	54.00	-25.60
7386.00	Peak	34.23	7.59	41.82	74.00	-32.18
7386.00	Average	24.68	7.59	32.26	54.00	-21.74
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT40 Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

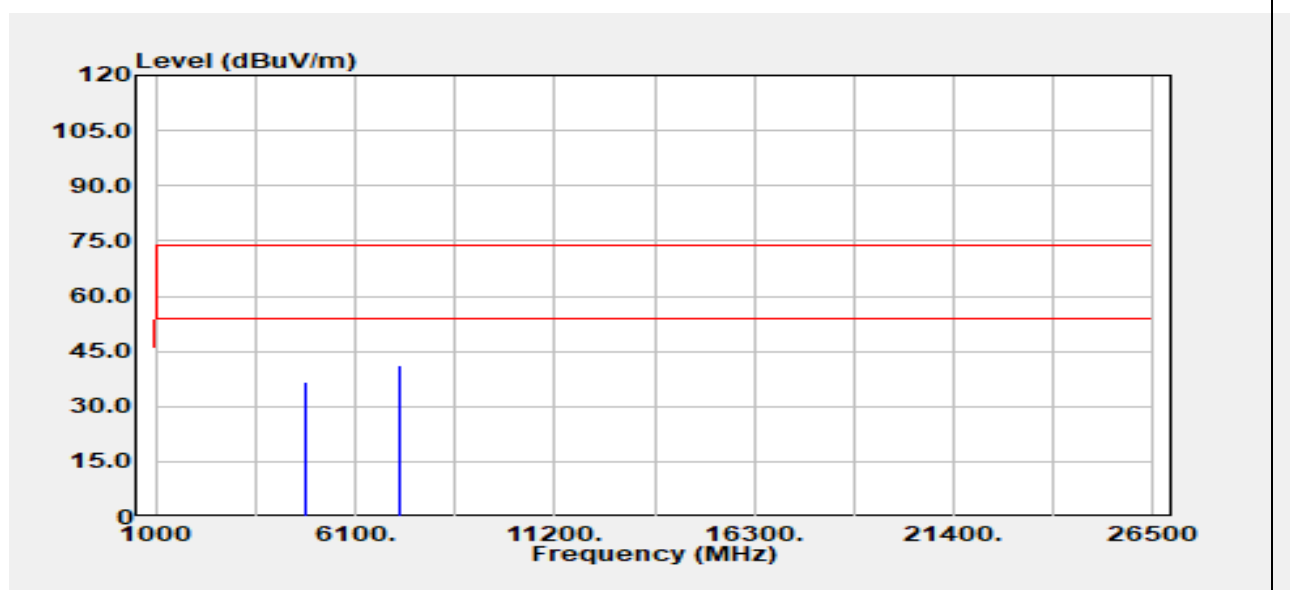


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.000	Peak	35.55	1.35	36.90	74.00	-37.10
4844.000	Average	27.37	1.35	28.73	54.00	-25.27
7266.000	Peak	33.51	7.71	41.22	74.00	-32.78
7266.000	Average	25.37	7.71	33.08	54.00	-20.92
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT40 Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

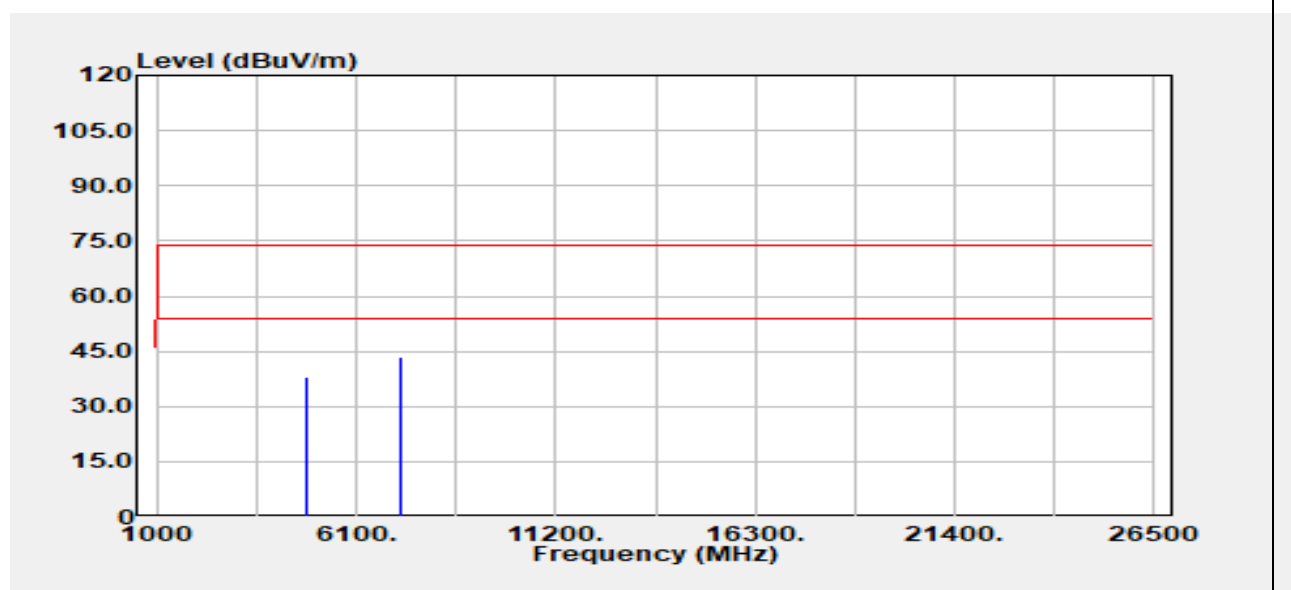


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPV)	Factor (dB)	Actual FS (dBPV/m)	Limit @3m (dBPV/m)	Margin (dB)
4844.000	Peak	36.82	1.35	38.17	74.00	-35.83
4844.000	Average	27.33	1.35	28.68	54.00	-25.32
7266.000	Peak	35.58	7.71	43.29	74.00	-30.71
7266.000	Average	25.19	7.71	32.91	54.00	-21.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT40 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

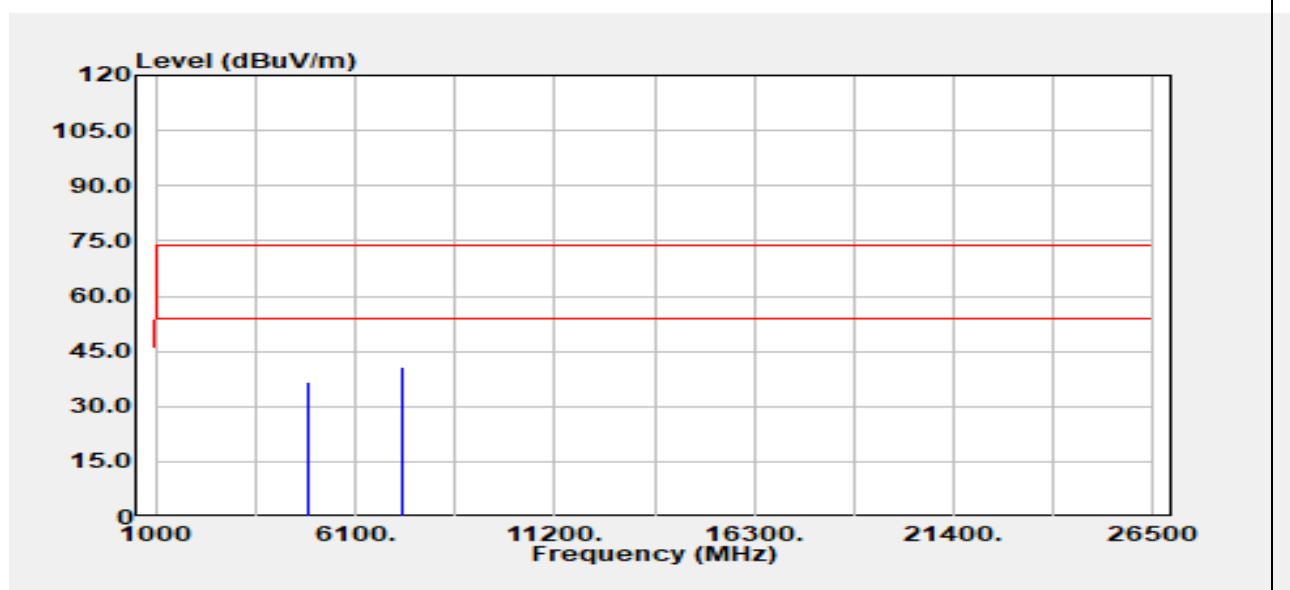


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	35.21	1.57	36.78	74.00	-37.22
4874.00	Average	27.15	1.57	28.71	54.00	-25.29
7311.00	Peak	33.04	7.72	40.76	74.00	-33.24
7311.00	Average	25.67	7.72	33.40	54.00	-20.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT40 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

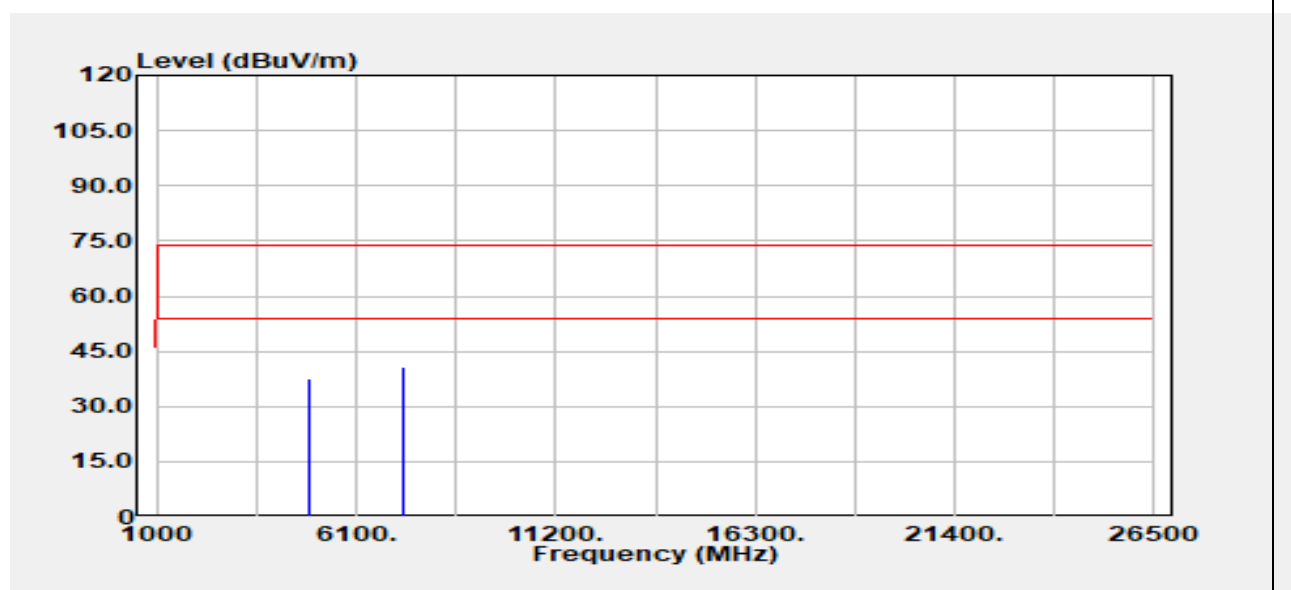


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	35.90	1.57	37.47	74.00	-36.53
4874.00	Average	27.50	1.57	29.07	54.00	-24.93
7311.00	Peak	33.06	7.72	40.78	74.00	-33.22
7311.00	Average	25.18	7.72	32.90	54.00	-21.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT40 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

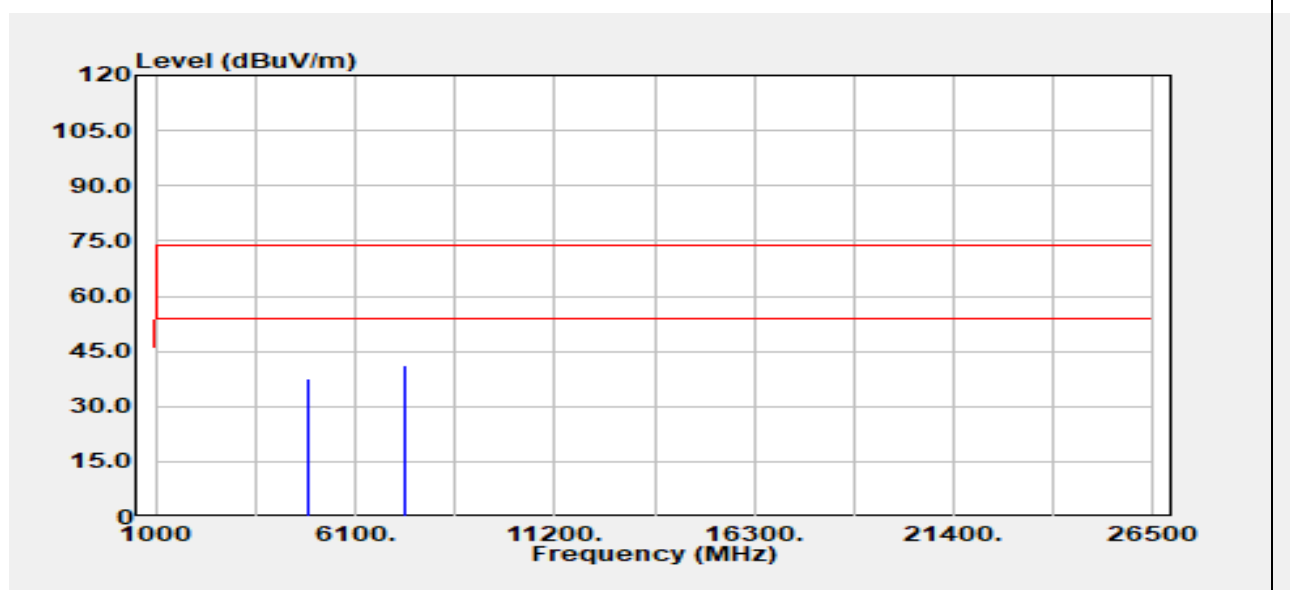


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	35.83	1.81	37.64	74.00	-36.36
4904.00	Average	27.00	1.81	28.81	54.00	-25.19
7356.00	Peak	33.55	7.65	41.20	74.00	-32.80
7356.00	Average	25.90	7.65	33.55	54.00	-20.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 1 IEEE 802.11n HT40 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

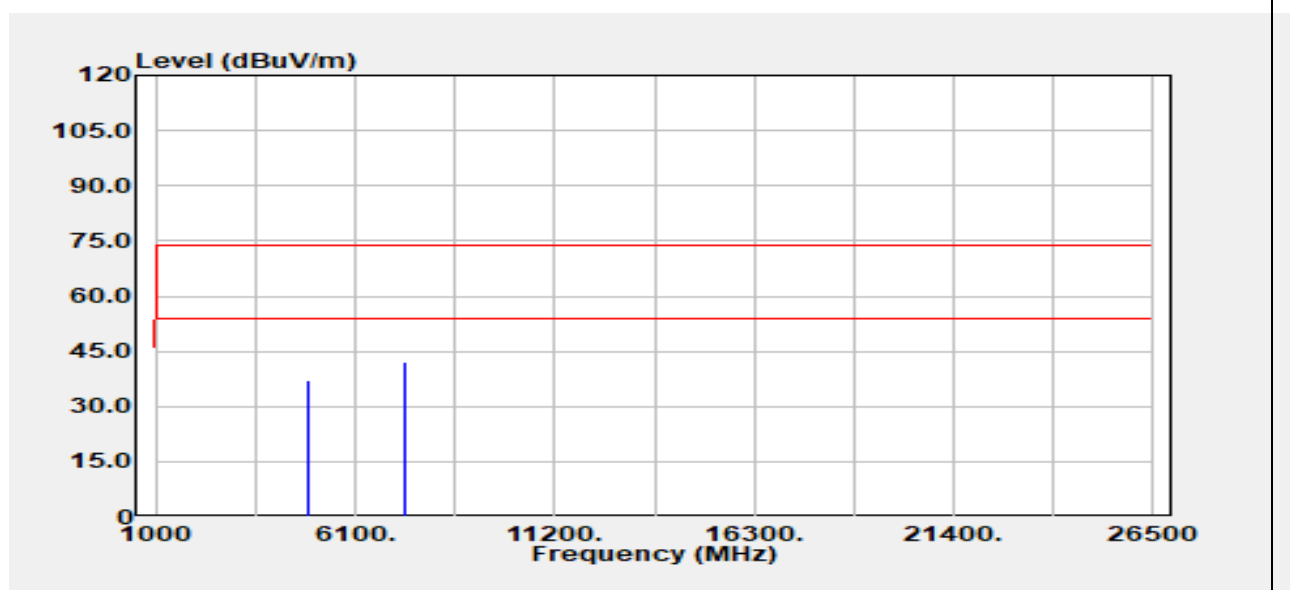


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	35.51	1.81	37.32	74.00	-36.68
4904.00	Average	27.02	1.81	28.83	54.00	-25.17
7356.00	Peak	34.64	7.65	42.29	74.00	-31.71
7356.00	Average	25.31	7.65	32.97	54.00	-21.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11b Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

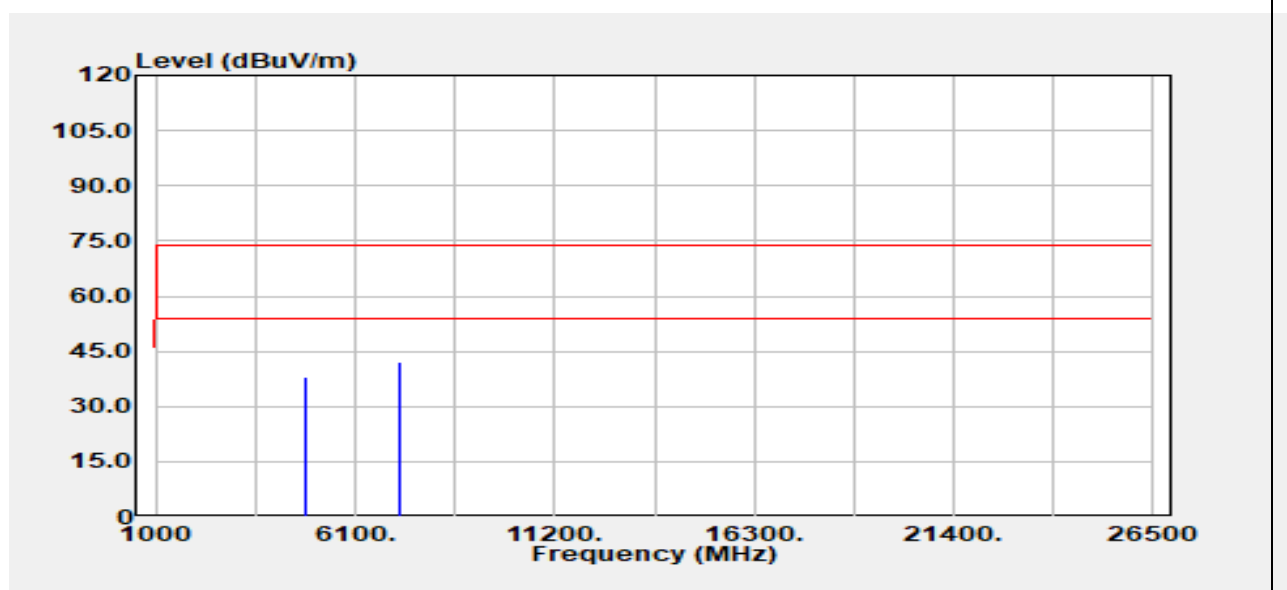


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	36.72	1.29	38.01	74.00	-35.99
4824.00	Average	30.19	1.29	31.48	54.00	-22.52
7236.00	Peak	34.20	7.72	41.91	74.00	-32.09
7236.00	Average	27.78	7.72	35.50	54.00	-18.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11b Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

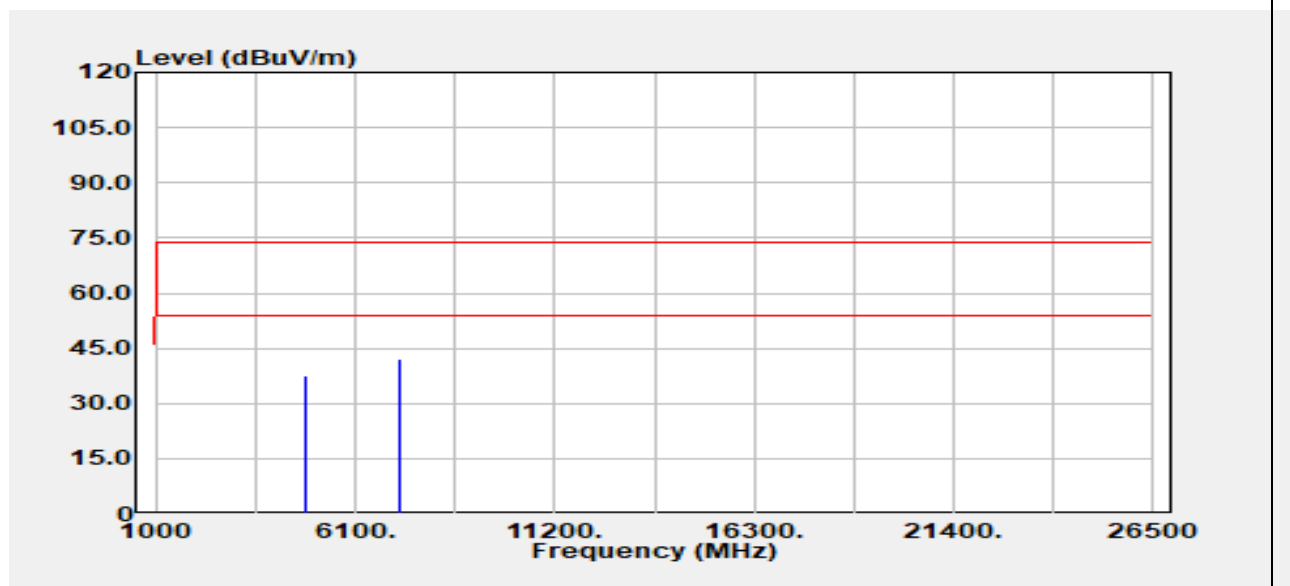


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	36.52	1.29	37.80	74.00	-36.20
4824.00	Average	31.21	1.29	32.50	54.00	-21.50
7236.00	Peak	34.56	7.72	42.28	74.00	-31.72
7236.00	Average	32.44	7.72	40.16	54.00	-13.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11b Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

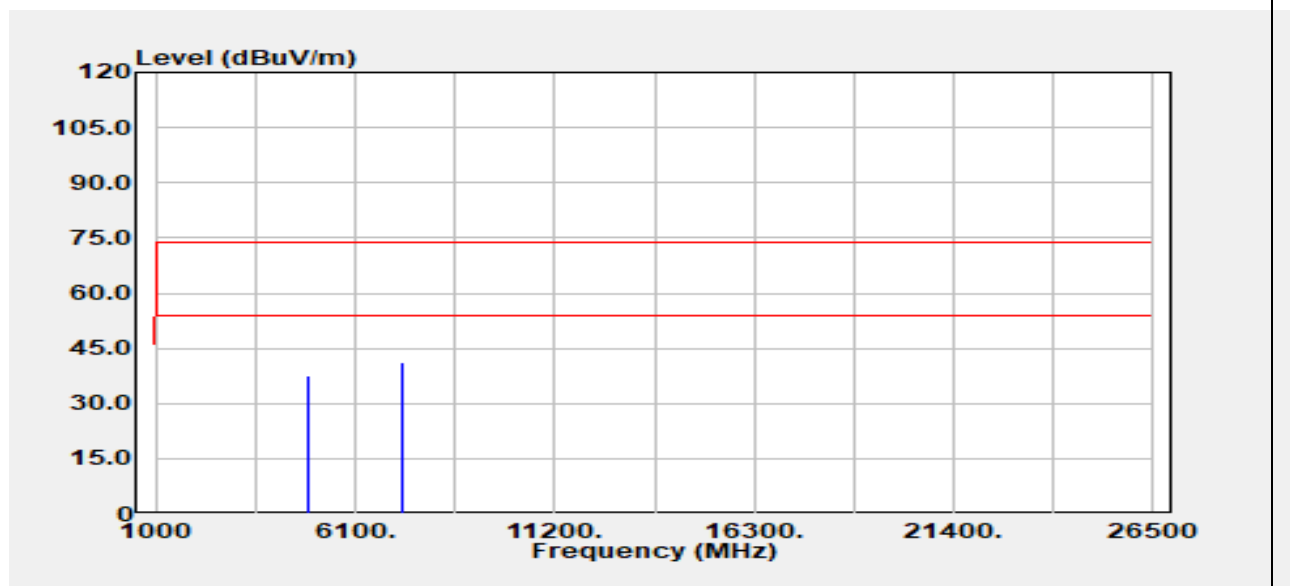


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	35.87	1.57	37.43	74.00	-36.57
4874.00	Average	26.76	1.57	28.33	54.00	-25.67
7311.00	Peak	33.47	7.72	41.19	74.00	-32.81
7311.00	Average	29.78	7.72	37.50	54.00	-16.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11b Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

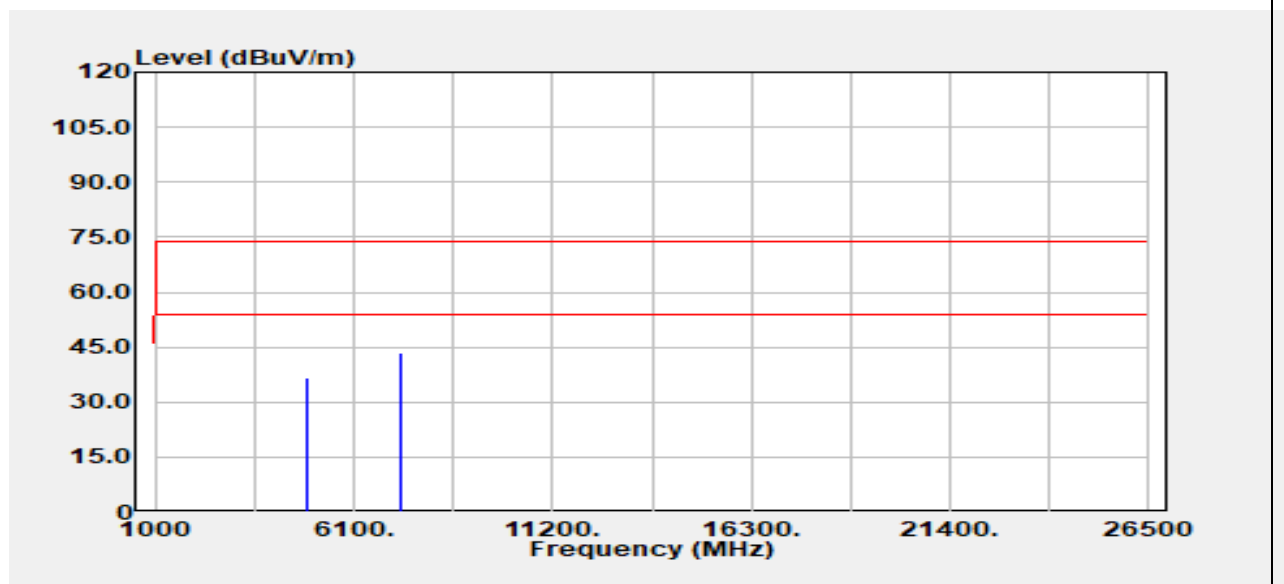


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	35.04	1.57	36.61	74.00	-37.39
4874.00	Average	30.15	1.57	31.72	54.00	-22.28
7311.00	Peak	35.70	7.72	43.43	74.00	-30.57
7311.00	Average	31.77	7.72	39.49	54.00	-14.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11b High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

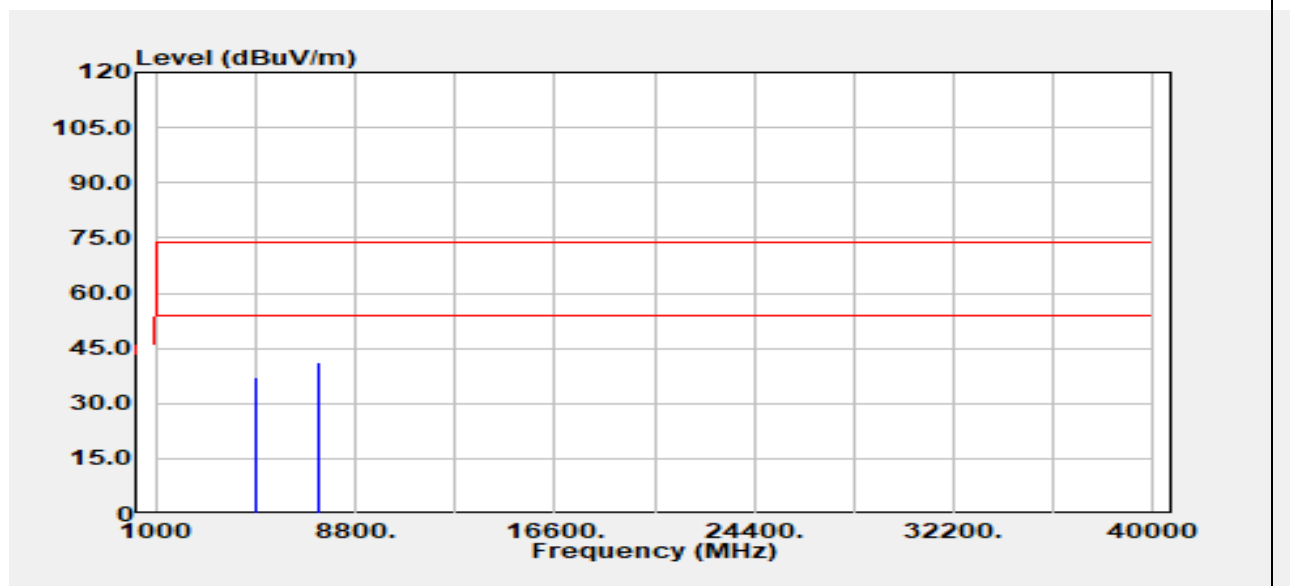


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	35.08	1.96	37.04	74.00	-36.96
4924.00	Average	27.28	1.96	29.24	54.00	-24.76
7386.00	Peak	33.53	7.59	41.12	74.00	-32.88
7386.00	Average	28.20	7.59	35.79	54.00	-18.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11b High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

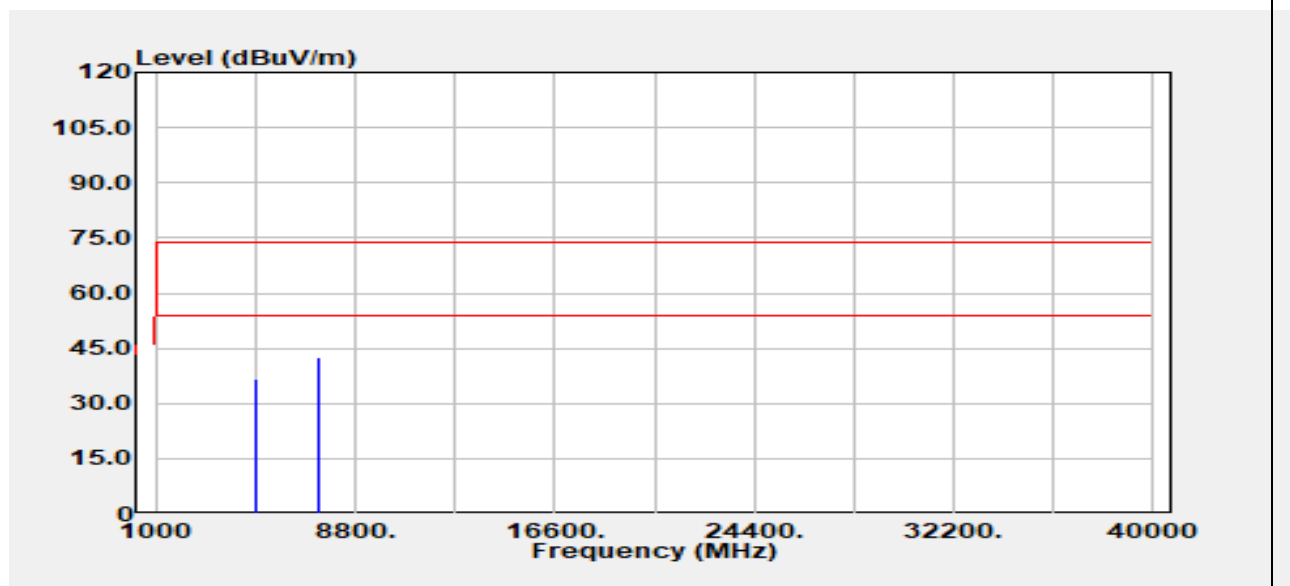


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	34.91	1.96	36.87	74.00	-37.13
4924.00	Average	29.02	1.96	30.98	54.00	-23.02
7386.00	Peak	34.93	7.59	42.52	74.00	-31.48
7386.00	Average	31.46	7.59	39.05	54.00	-14.95
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11g Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

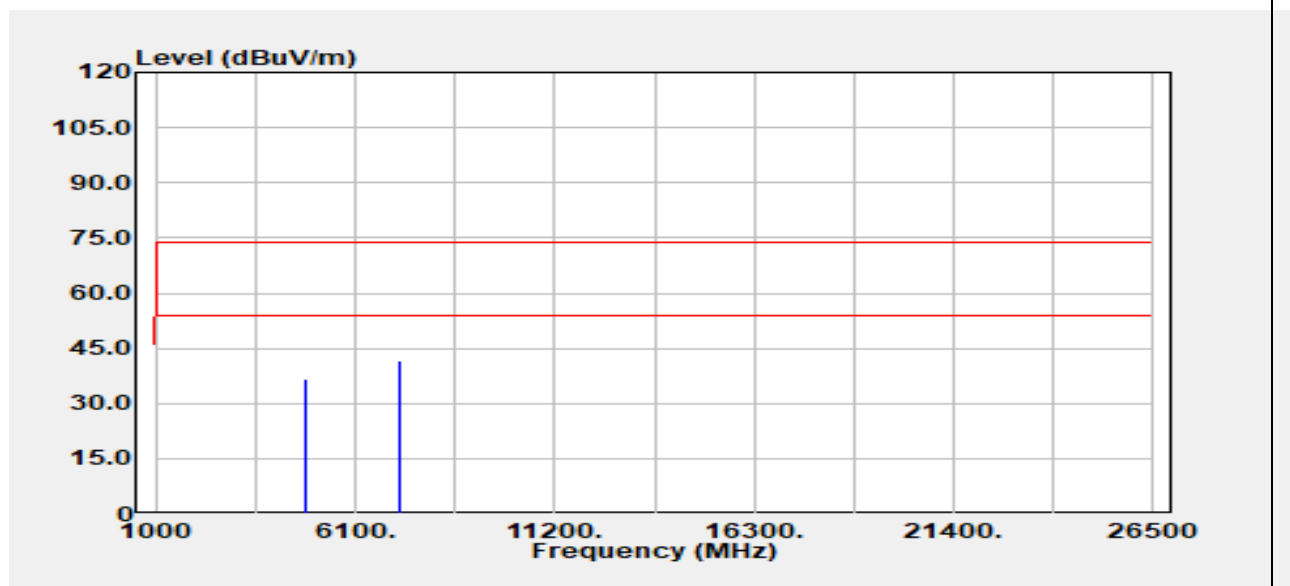


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	35.59	1.29	36.87	74.00	-37.13
4824.00	Average	26.94	1.29	28.23	54.00	-25.77
7236.00	Peak	33.92	7.72	41.64	74.00	-32.36
7236.00	Average	26.71	7.72	34.43	54.00	-19.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11g Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

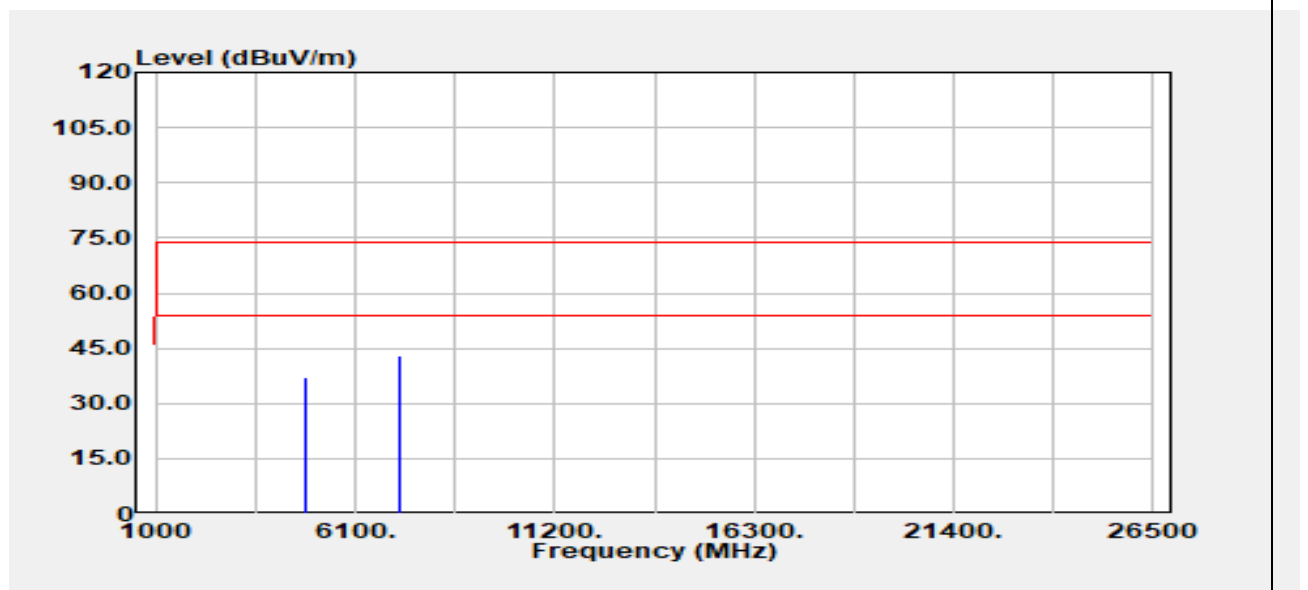


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	36.02	1.29	37.31	74.00	-36.69
4824.00	Average	27.00	1.29	28.29	54.00	-25.71
7236.00	Peak	35.22	7.72	42.94	74.00	-31.06
7236.00	Average	29.26	7.72	36.98	54.00	-17.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11g Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

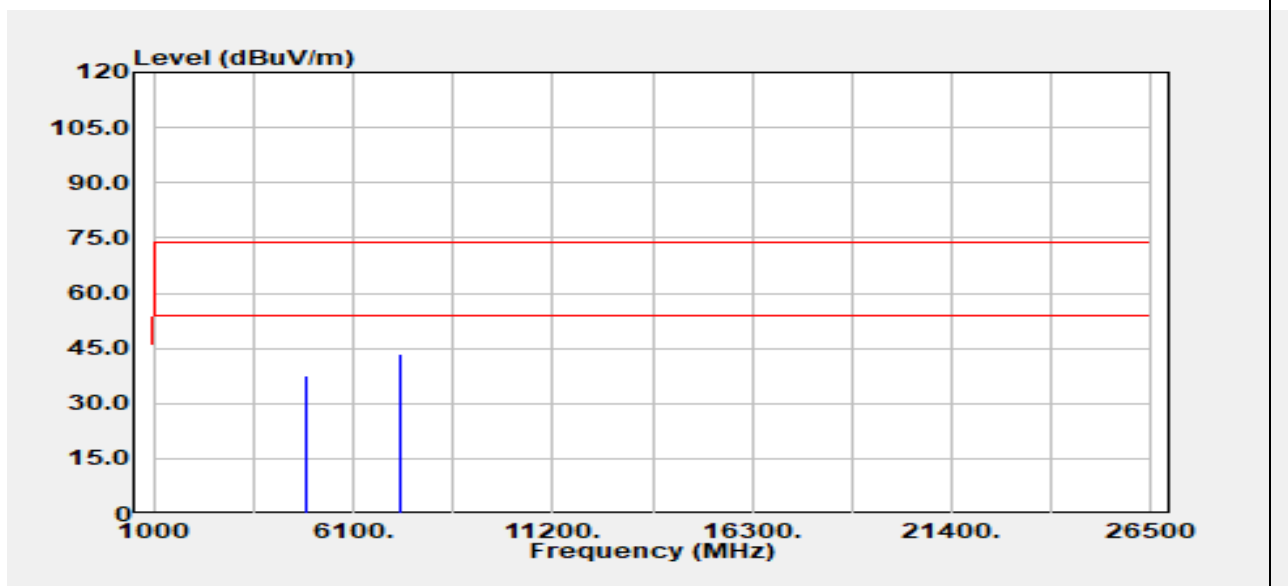


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	35.93	1.57	37.49	74.00	-36.51
4874.00	Average	26.69	1.57	28.26	54.00	-25.74
7311.00	Peak	35.93	7.72	43.65	74.00	-30.35
7311.00	Average	26.43	7.72	34.15	54.00	-19.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11g Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

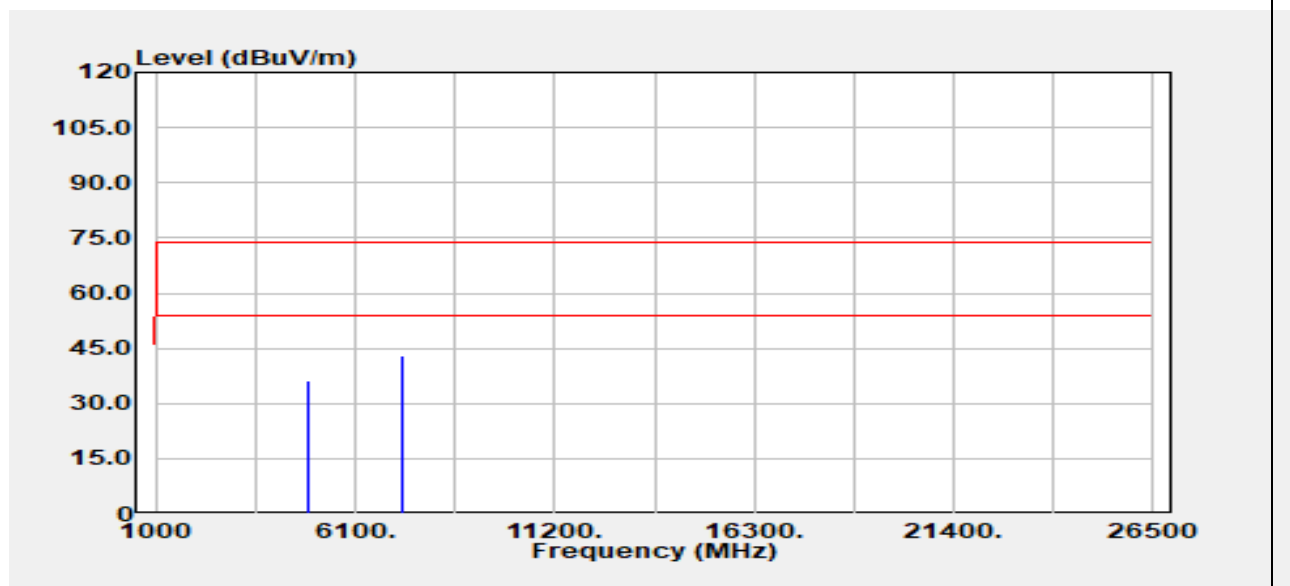


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.86	1.57	36.43	74.00	-37.57
4874.00	Average	26.71	1.57	28.28	54.00	-25.72
7311.00	Peak	35.51	7.72	43.24	74.00	-30.76
7311.00	Average	29.91	7.72	37.63	54.00	-16.37
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11g High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

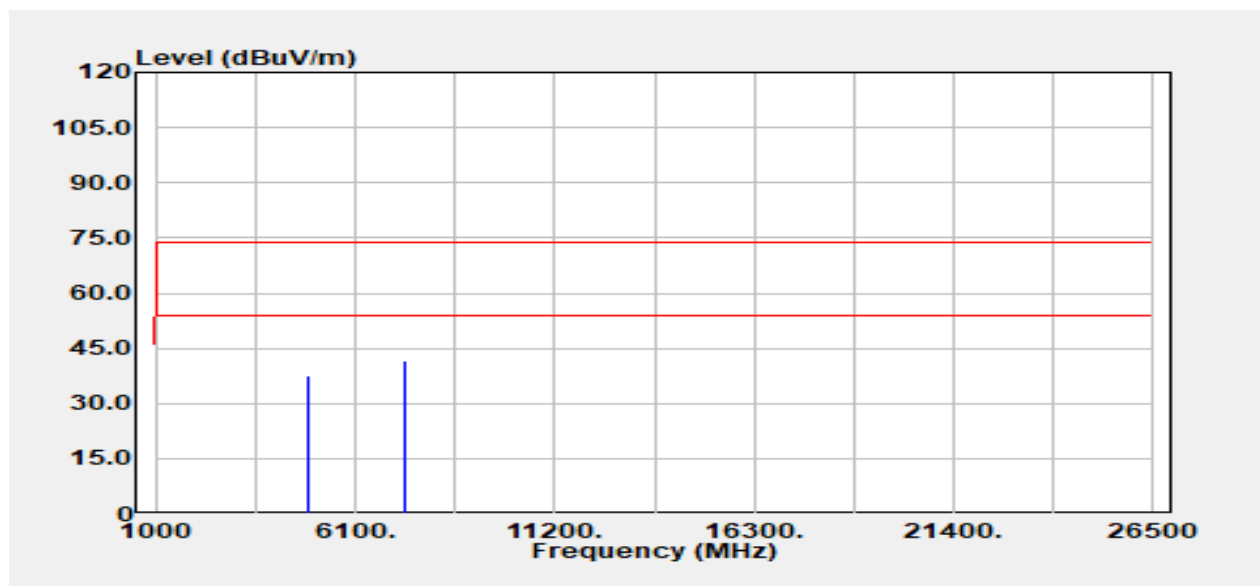


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	35.76	1.96	37.72	74.00	-36.28
4924.00	Average	26.73	1.96	28.69	54.00	-25.31
7386.00	Peak	34.26	7.59	41.84	74.00	-32.16
7386.00	Average	26.52	7.59	34.11	54.00	-19.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11g High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

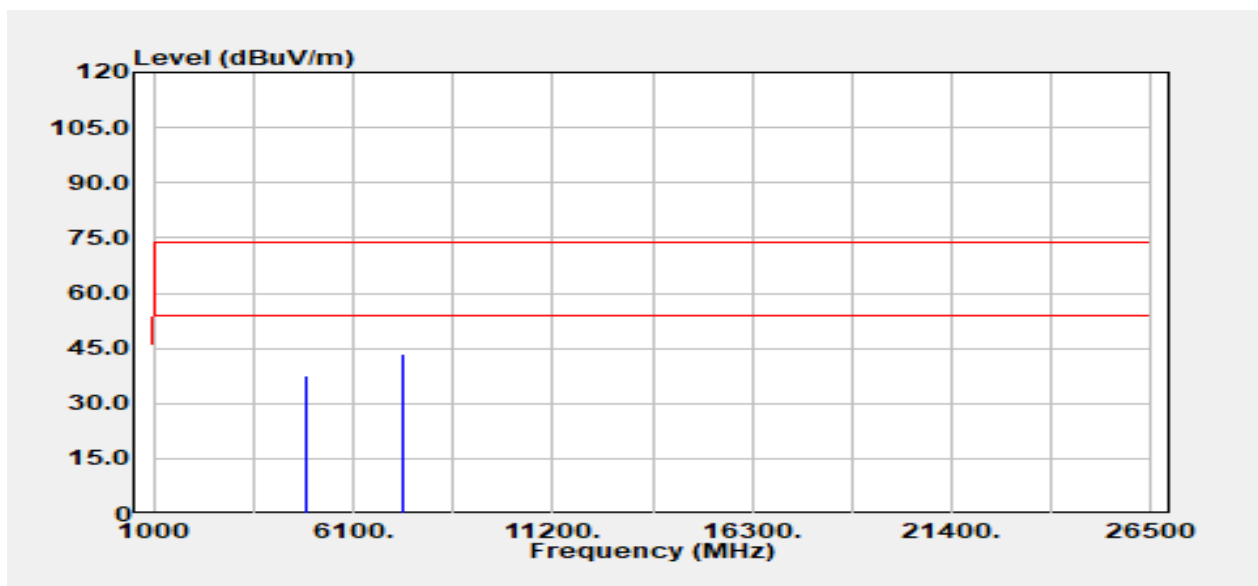


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	35.53	1.96	37.49	74.00	-36.51
4924.00	Average	26.62	1.96	28.58	54.00	-25.42
7386.00	Peak	36.10	7.59	43.69	74.00	-30.31
7386.00	Average	29.65	7.59	37.24	54.00	-16.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

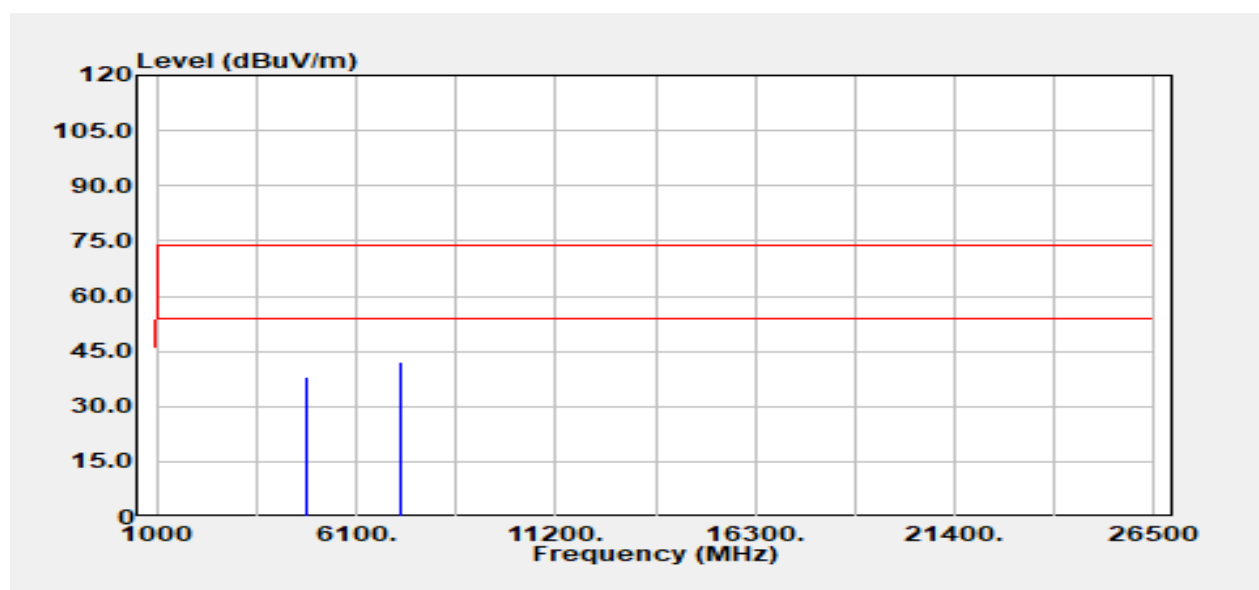


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPV)	Factor (dB)	Actual FS (dBPV/m)	Limit @3m (dBPV/m)	Margin (dB)
4824.00	Peak	36.85	1.29	38.14	74.00	-35.86
4824.00	Average	28.82	1.29	30.11	54.00	-23.89
7236.00	Peak	34.39	7.72	42.10	74.00	-31.90
7236.00	Average	27.11	7.72	34.83	54.00	-19.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

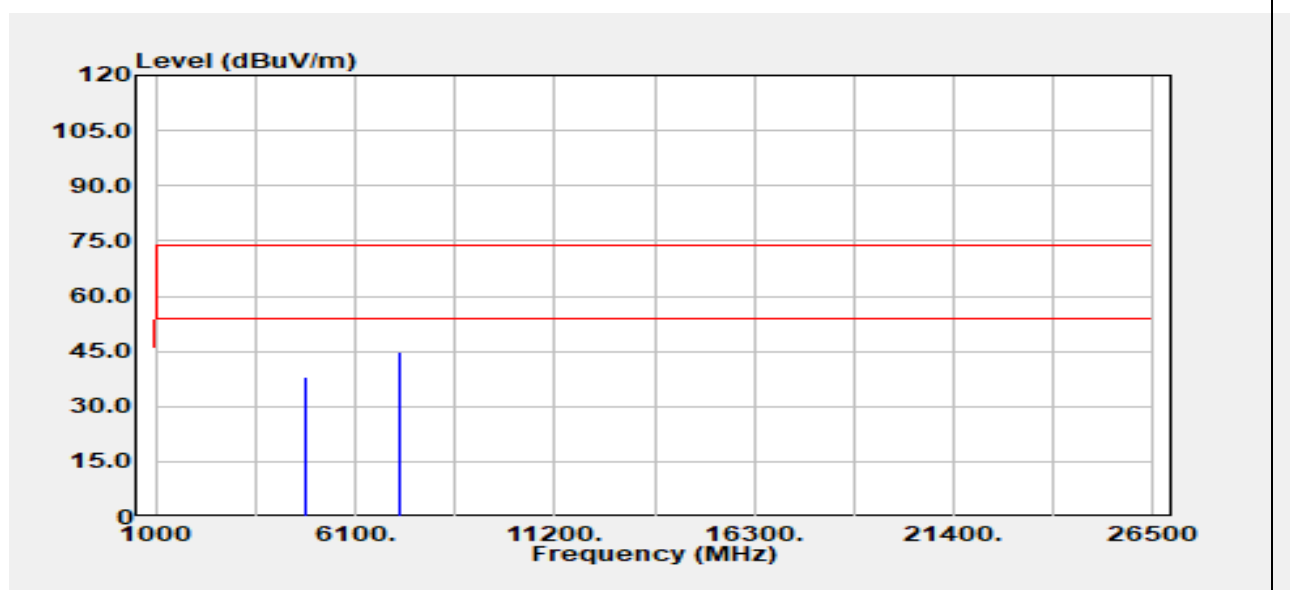


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPμV)	Factor (dB)	Actual FS (dBPμV/m)	Limit @3m (dBPμV/m)	Margin (dB)
4824.00	Peak	36.70	1.29	37.99	74.00	-36.01
4824.00	Average	27.32	1.29	28.60	54.00	-25.40
7236.00	Peak	36.89	7.72	44.61	74.00	-29.39
7236.00	Average	27.76	7.72	35.48	54.00	-18.52
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

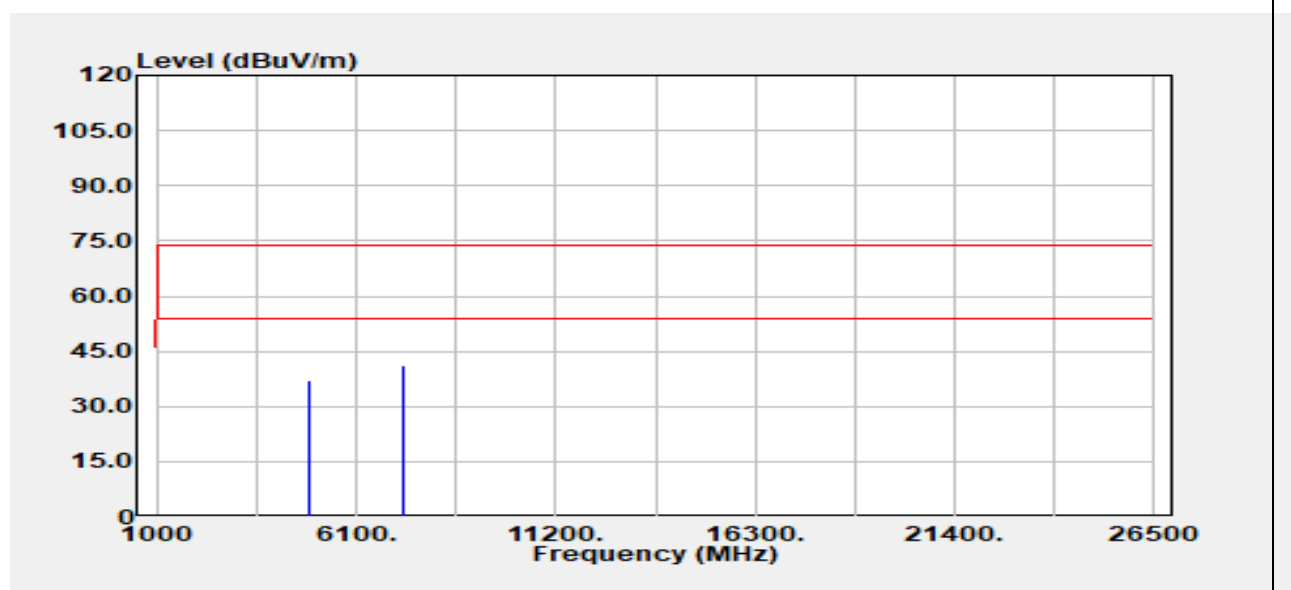


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPV)	Factor (dB)	Actual FS (dBPV/m)	Limit @3m (dBPV/m)	Margin (dB)
4874.00	Peak	35.55	1.57	37.11	74.00	-36.89
4874.00	Average	26.94	1.57	28.51	54.00	-25.49
7311.00	Peak	33.26	7.72	40.98	74.00	-33.02
7311.00	Average	26.88	7.72	34.61	54.00	-19.39
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

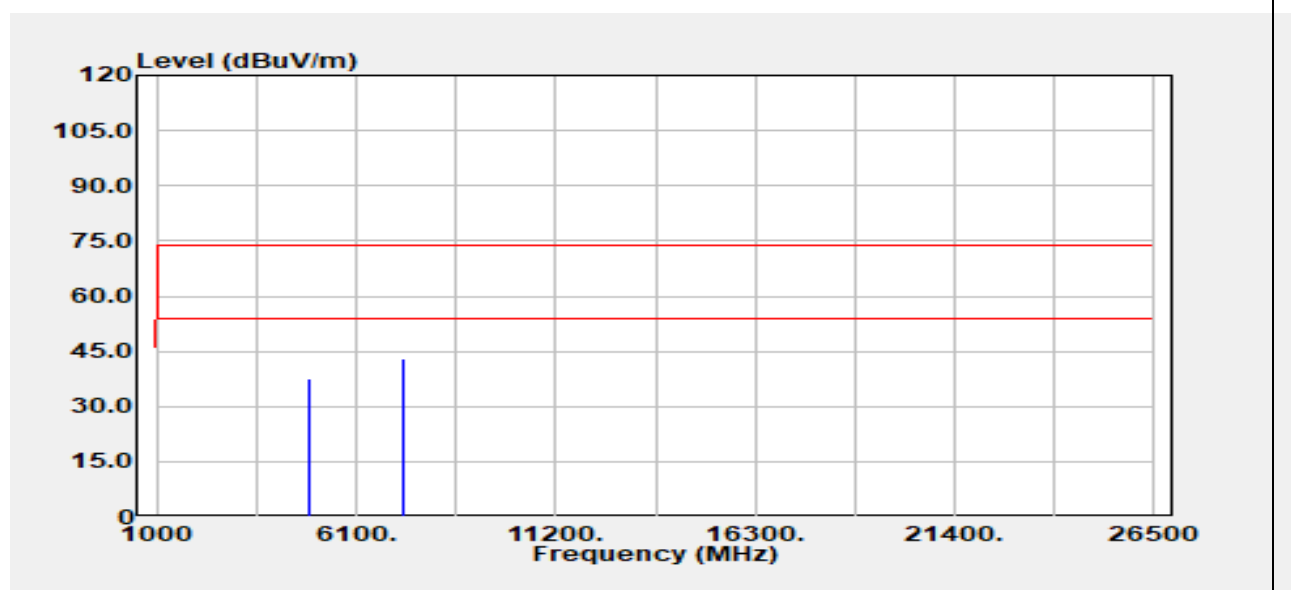


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	36.05	1.57	37.61	74.00	-36.39
4874.00	Average	26.82	1.57	28.38	54.00	-25.62
7311.00	Peak	35.33	7.72	43.05	74.00	-30.95
7311.00	Average	27.99	7.72	35.71	54.00	-18.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

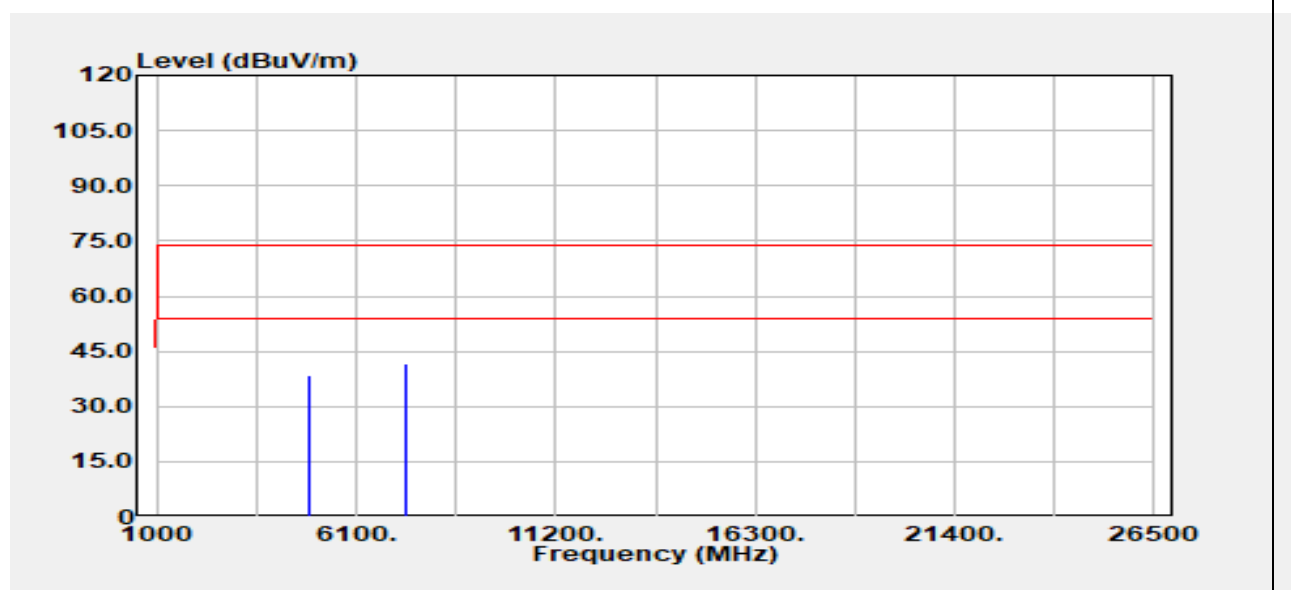


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.00	Peak	36.62	1.96	38.58	74.00	-35.42
4924.00	Average	26.56	1.96	28.52	54.00	-25.48
7386.00	Peak	33.88	7.59	41.47	74.00	-32.53
7386.00	Average	25.88	7.59	33.47	54.00	-20.53
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT20 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

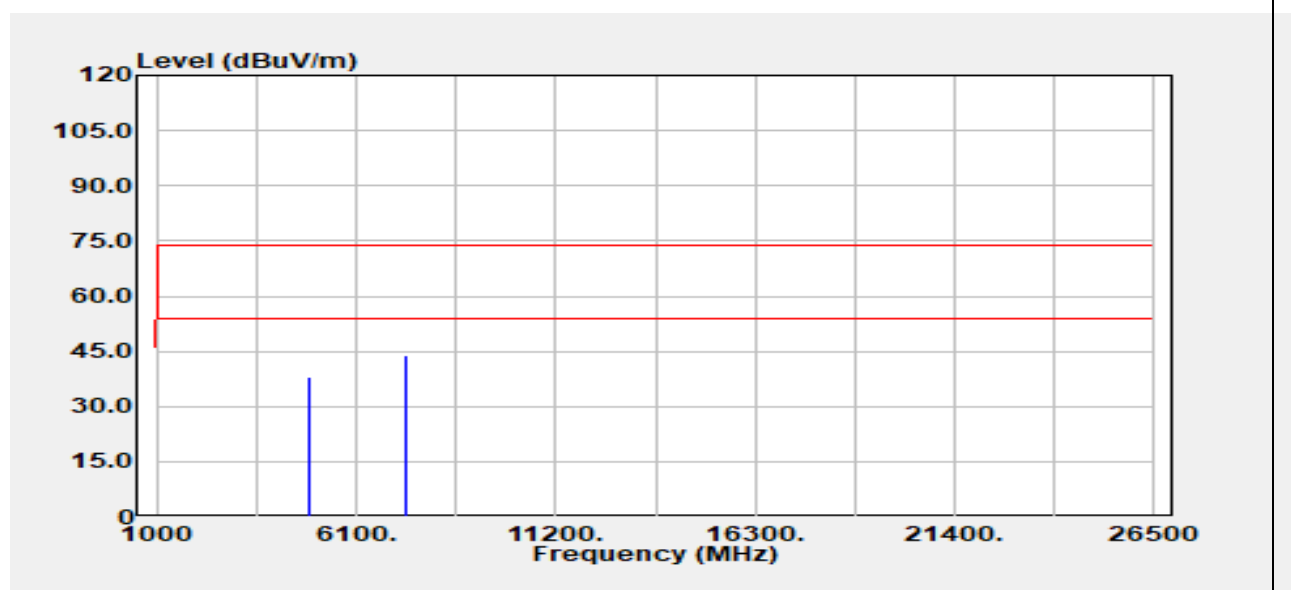


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.00	Peak	36.18	1.96	38.14	74.00	-35.86
4924.00	Average	27.06	1.96	29.02	54.00	-24.98
7386.00	Peak	36.48	7.59	44.07	74.00	-29.93
7386.00	Average	28.44	7.59	36.03	54.00	-17.97
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

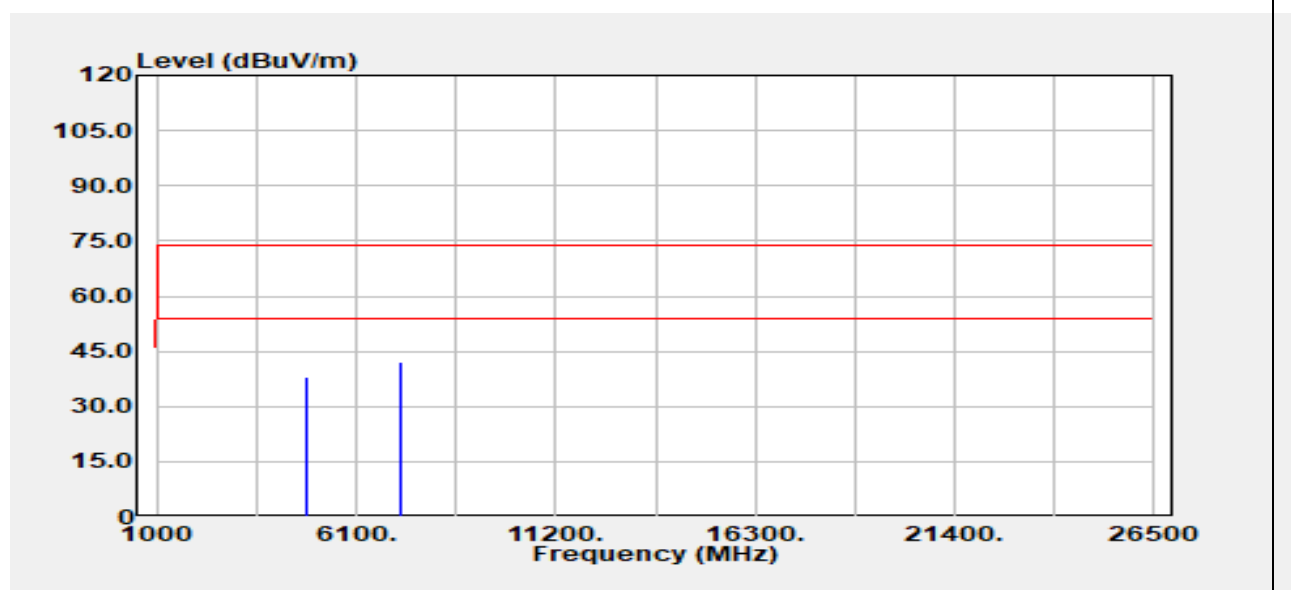


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.00	Peak	36.48	1.35	37.83	74.00	-36.17
4844.00	Average	27.44	1.35	28.79	54.00	-25.21
7266.00	Peak	34.29	7.71	42.00	74.00	-32.00
7266.00	Average	26.05	7.71	33.77	54.00	-20.23
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Low CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

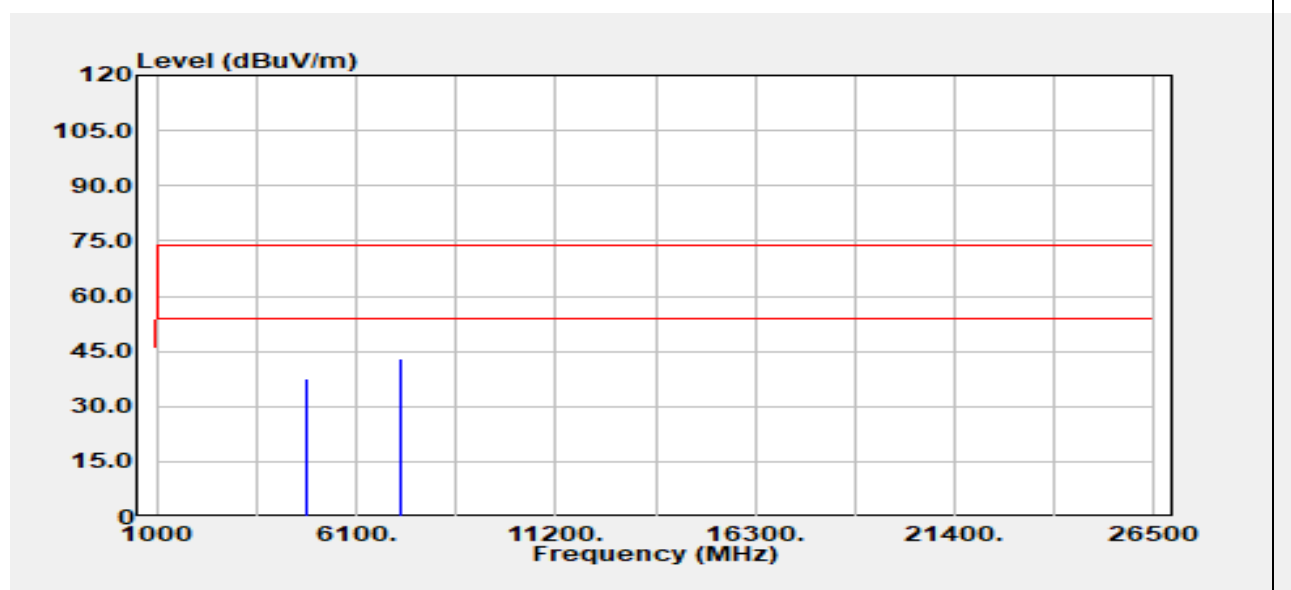


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.00	Peak	36.33	1.35	37.68	74.00	-36.32
4844.00	Average	27.45	1.35	28.80	54.00	-25.20
7266.00	Peak	35.32	7.71	43.03	74.00	-30.97
7266.00	Average	27.65	7.71	35.36	54.00	-18.64
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

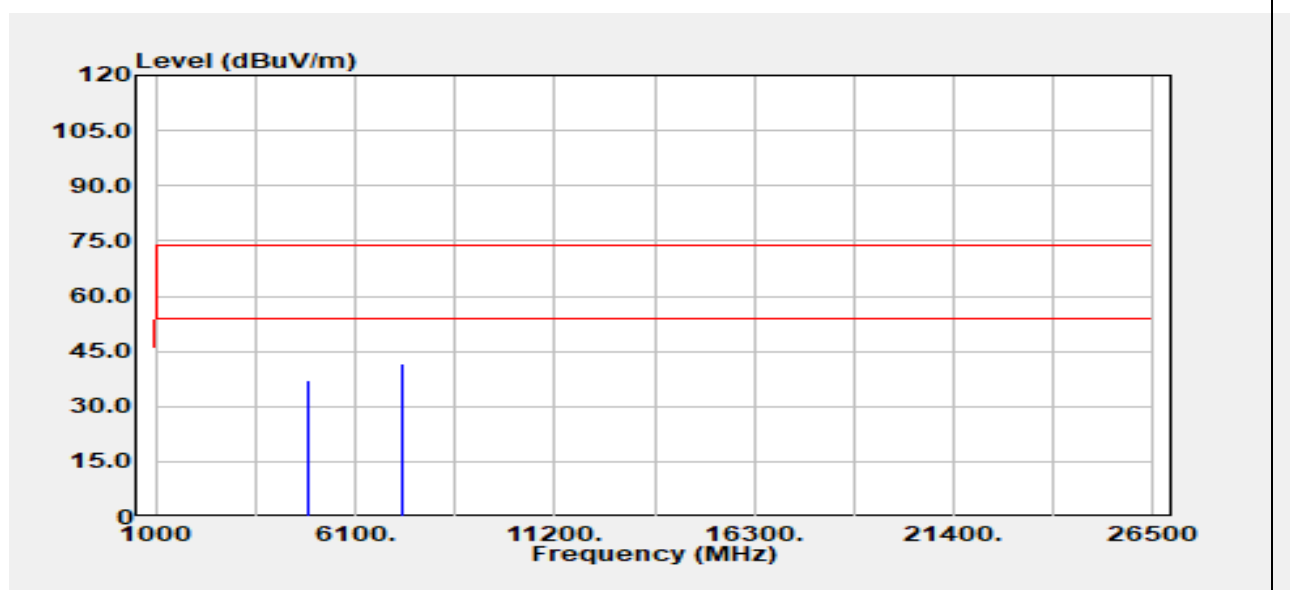


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBPV)	Factor (dB)	Actual FS (dBPV/m)	Limit @3m (dBPV/m)	Margin (dB)
4874.00	Peak	35.38	1.57	36.95	74.00	-37.05
4874.00	Average	27.40	1.57	28.97	54.00	-25.03
7311.00	Peak	33.75	7.72	41.47	74.00	-32.53
7311.00	Average	25.75	7.72	33.47	54.00	-20.53
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 Mid CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

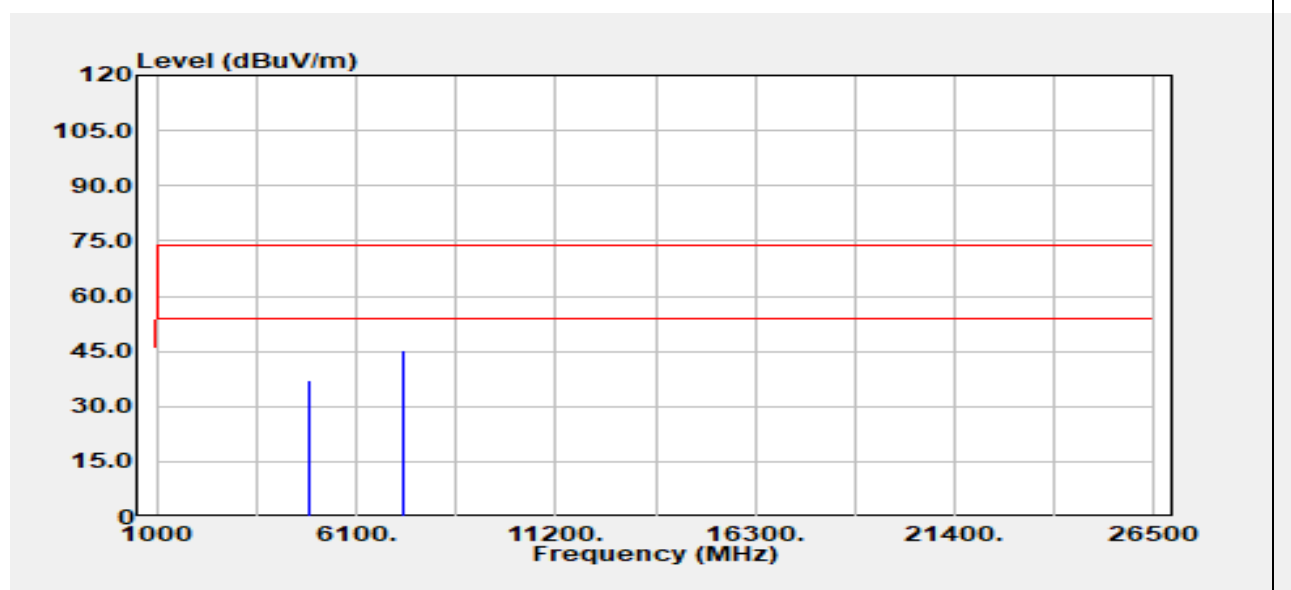


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4874.00	Peak	35.43	1.57	37.00	74.00	-37.00
4874.00	Average	27.47	1.57	29.04	54.00	-24.96
7311.00	Peak	37.64	7.72	45.36	74.00	-28.64
7311.00	Average	28.44	7.72	36.16	54.00	-17.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

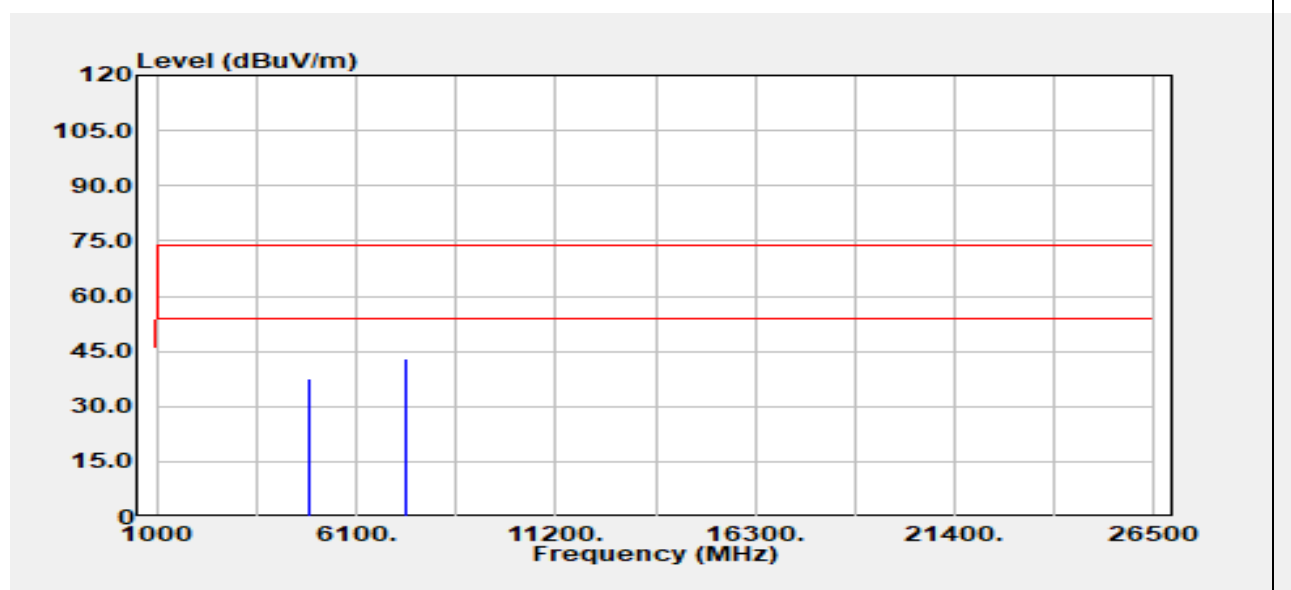


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	35.78	1.81	37.59	74.00	-36.41
4904.00	Average	27.19	1.81	29.00	54.00	-25.00
7356.00	Peak	35.15	7.65	42.80	74.00	-31.20
7356.00	Average	26.99	7.65	34.64	54.00	-19.36
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	Mode 2 IEEE 802.11n HT40 High CH	Temp/Hum	24.3(°C)/ 58%RH
Test Item	Harmonic	Test Date	June 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

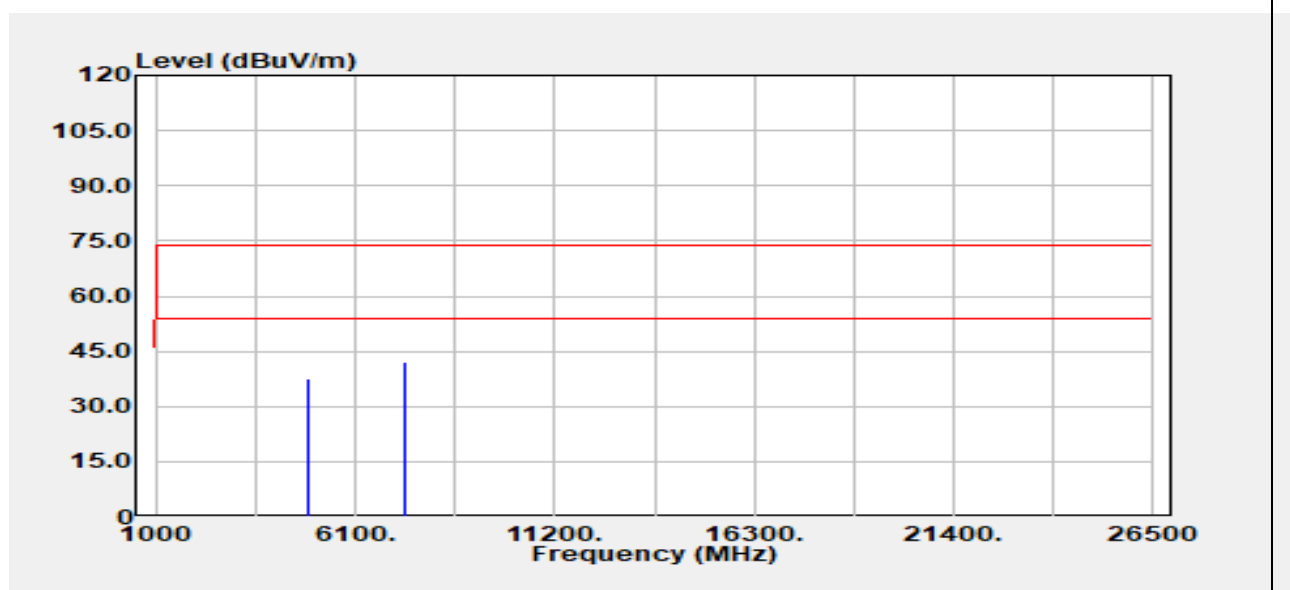

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4904.00	Peak	35.73	1.81	37.54	74.00	-36.46
4904.00	Average	27.62	1.81	29.43	54.00	-24.57
7356.00	Peak	34.49	7.65	42.14	74.00	-31.86
7356.00	Average	27.89	7.65	35.54	54.00	-18.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -