

FCC 47 CFR PART 22 SUBPART H AND PART 24 SUBPART E

TEST REPORT

For

MX-LOCare

Model: BR1

Trade Name: MobilMAX

Issued to

MobilMax Technology Inc.
2F-5, No. 28, Tai-Yuan St., Chupei City, Hsinchu County 302, Taiwan

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: July 17, 2015



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 17, 2015	Initial Issue	ALL	Kelly Cheng

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
4.3 MEASUREMENT UNCERTAINTY	9
5. FACILITIES AND ACCREDITATIONS.....	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 22 & 24 REQUIREMENTS	13
7.1 PEAK POWER	13
7.2 AVERAGE POWER	15
7.3 ERP & EIRP MEASUREMENT	17
7.4 OCCUPIED BANDWIDTH MEASUREMENT	20
7.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS	28
7.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	40
7.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	66
7.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	69
APPENDIX I PHOTOGRAPHS OF TEST SETUP	72
APPENDIX 1 - PHOTOGRAPHS OF EUT	

1. TEST RESULT CERTIFICATION

Applicant: MobilMax Technology Inc.
2F-5, No. 28, Tai-Yuan St., Chupei City, Hsinchu County 302,
Taiwan

Equipment Under Test: MX-LOCare

Trade Name: MobilMAX

Model Number: BR1

Date of Test: July 13, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 22 Subpart H & Part 24 Subpart E	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C: 2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 Subpart H and PART 24 Subpart E.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:



Miller Lee
Manager
Compliance Certification Services Inc.

Angel Cheng
Section Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	MX-LOCare
Trade Name	MobilMAX
Model Number	BR1
Model Discrepancy	N/A
Received Date	June 8, 2015
Power Supply	1. Power from Power Adapter DVE / DSA-5PFK-05 FUS I/P: 100-240Vac, 50/60Hz, 0.2A O/P: 5Vdc, 1A 2. Li-ion BATTERY Model: 85-X10004-ON Rating: 3.8V, 350mAh
Frequency Range	GSM / GPRS: 850: 824.2 ~ 848.8 MHz GSM / GPRS: 1900: 1850.2 ~ 1909.8 MHz
Transmit Power (ERP & EIRP Power)	GSM 850: 28.11 dBm GSM 1900: 28.08 dBm GPRS 850: 28.47 dBm GPRS 1900: 27.14 dBm
Modulation Technique	GSM: GMSK GPRS: GMSK
Type of Emission	GSM 850: 242KGXW--- GSM 1900: 246KGXW--- GPRS 850: 242KGXW--- GPRS 1900: 245KGXW---
Antenna Gain	GSM / GPRS 850: 1.27dBi GSM / GPRS 1900: 1.94dBi
Antenna Type	Bracelet Antenna

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **2AAYELOCAREBR1** filing to comply with Part 22 and Part 24 of the FCC 47 CFR Rules.

3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.10: 2009, TIA/EIA-603-C: 2004 and FCC CFR 47, Part 2, PART 22 SUBPART H AND PART 24 SUBPART E

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10: 2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10: 2009.

3.4 DESCRIPTION OF TEST MODES

The EUT (model: BR1) had been tested under operating condition.

EUT staying in continuous transmitting mode was programmed.

GSM / GPRS 850:

Channel Low (CH128), Channel Mid (CH190) and Channel High (CH251) were chosen for full testing.

GSM / GPRS 1900:

Channel Low (CH512), Channel Mid (CH661) and Channel High (CH810) were chosen for full testing.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz.

Based on the above results from the different modulations, GSM850 / GSM1900 / GPRS 850 / GPRS1900 were determined to be the worst-case scenario for all tests.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	MY44212686	03/17/2016
Pre-Amplifier	MITEQ	AFS44-0010265 0-42-10P-44	1042473	04/13/2016
Bilog Antenna	Sunol Sciences	JB3	A030205	08/18/2015
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Spectrum Analyzer	ROHDE&SCHWA RZ	FSV40	101073	07/08/2016
Horn Antenna	EMCO	3117	00055165	01/26/2016
Wideband Radio Communication Tester	ROHDE&SCHWA RZ	CMU 200	100535	09/02/2015
Test SW	EZ-EMC (CCS-3A1RE)			

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT


Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
	N/A						

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


7. FCC PART 22 & 24 REQUIREMENTS

7.1 PEAK POWER

LIMIT

According to FCC §2.1046.

Test Configuration

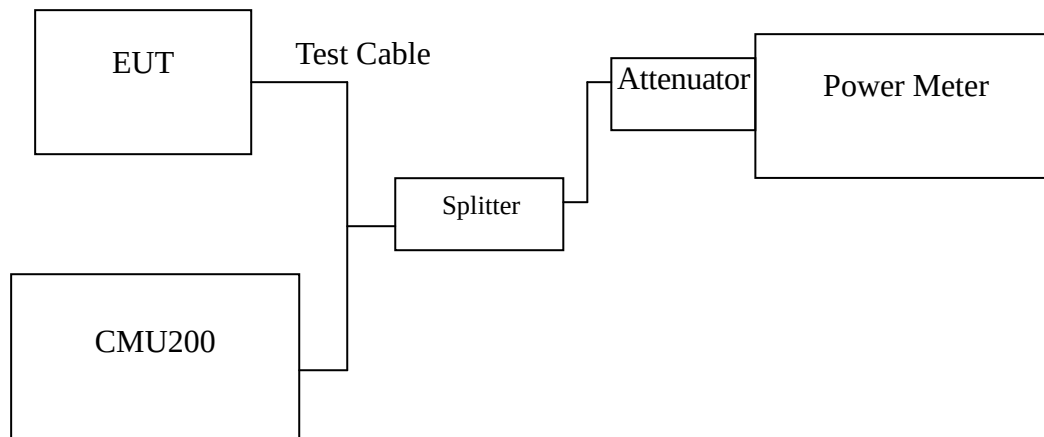

Remark: Measurement setup for testing on Antenna connector

TEST PROCEDURE

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

TEST RESULTS

No non-compliance noted.

Test Data

Test Mode	CH	Frequency (MHz)	Peak Power (dBm)	Output Power W
GSM 850	128	824.20	33.40	2.18776
	190	836.60	33.40	2.18776
	251	848.80	33.40	2.18776
GPRS 850 (Class 10)	128	824.20	33	1.94984
	190	836.60	33	1.94984
	251	848.80	33	1.94984

Test Mode	CH	Frequency (MHz)	Peak Power (dBm)	Output Power W
GSM 1900	512	1850.20	29.80	0.95499
	661	1880.00	29.60	0.91201
	810	1909.80	29.60	0.91201
GPRS 1900 (Class 10)	512	1850.20	29.30	0.85114
	661	1880.00	29.20	0.83176
	810	1909.80	29.20	0.83176


Remark: The value of factor includes both the loss of cable and external attenuator

7.2 AVERAGE POWER

LIMIT

For reporting purposes only.

Test Configuration

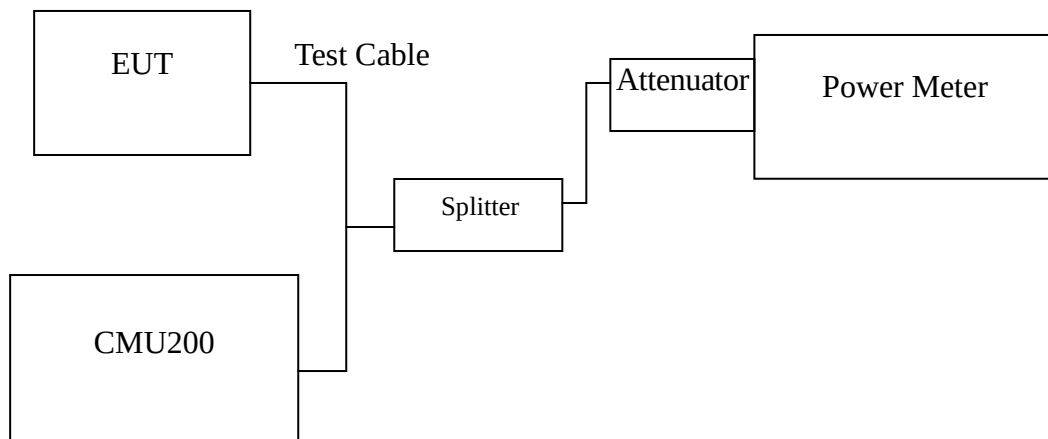

Remark: Measurement setup for testing on Antenna connector

TEST PROCEDURE

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

TEST RESULTS

No non-compliance noted.

TEST RESULTS

No non-compliance noted.

Test Data

Test Mode	CH	Frequency (MHz)	AVG Power (dBm)	Output Power W
GSM 850	128	824.20	33.20	2.08930
	190	836.60	33.10	2.04174
	251	848.80	33.20	2.08930
GPRS 850 (Class 10)	128	824.20	32.80	1.90546
	190	836.60	32.70	1.86209
	251	848.80	32.80	1.90546

Test Mode	CH	Frequency (MHz)	AVG Power (dBm)	Output Power W
GSM 1900	512	1850.20	29.60	0.91201
	661	1880.00	29.40	0.87096
	810	1909.80	29.40	0.87096
GPRS 1900 (Class 10)	512	1850.20	29.10	0.81283
	661	1880.00	29.00	0.79433
	810	1909.80	29.10	0.81283

Remark: The value of factor includes both the loss of cable and external attenuator

7.3 ERP & EIRP MEASUREMENT

LIMIT


According to FCC §2.1046

FCC 22.913(a): The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.


FCC 24.232(b): The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

Test Configuration


Below 1 GHz

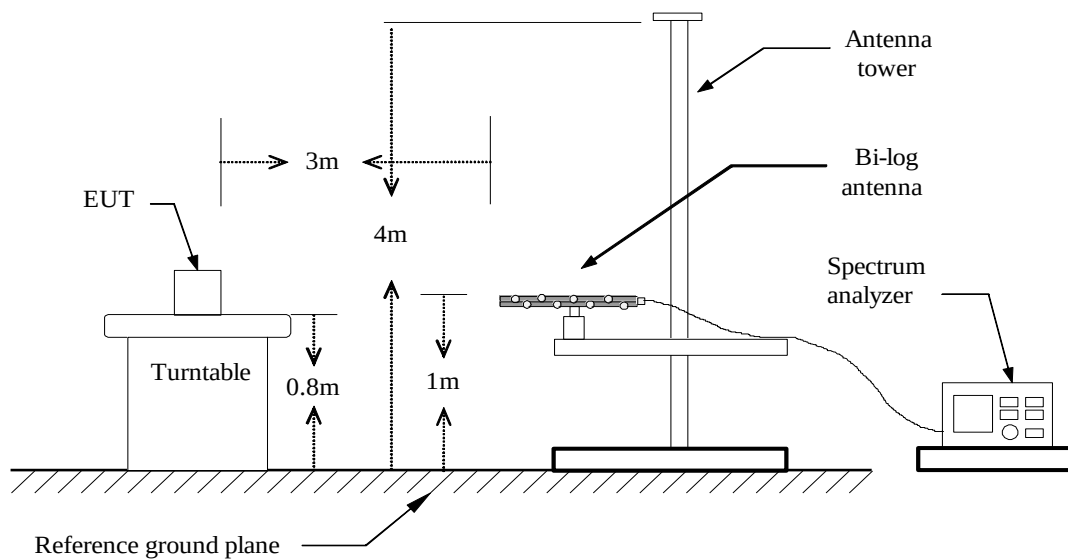

Above 1 GHz

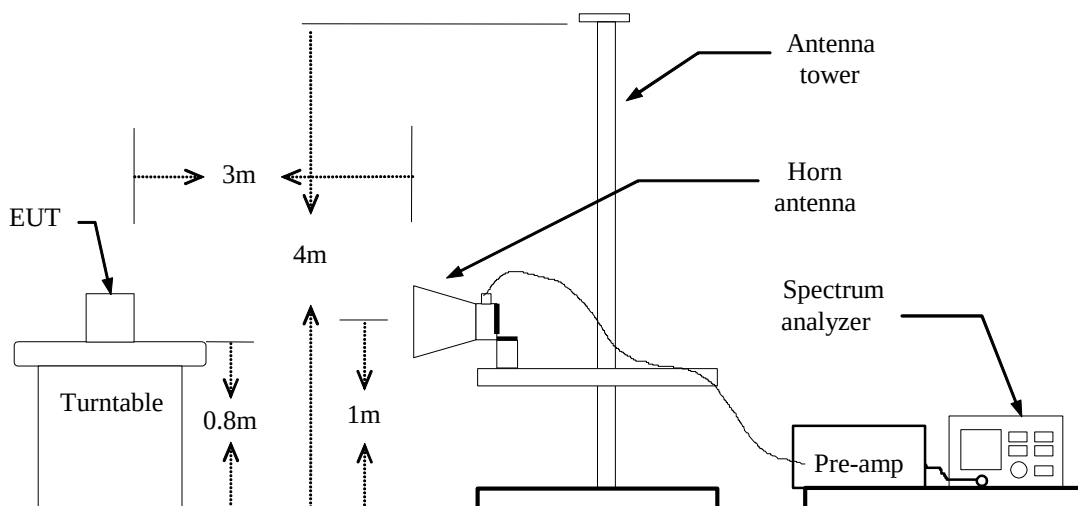

For Substituted Method Test Set-UP

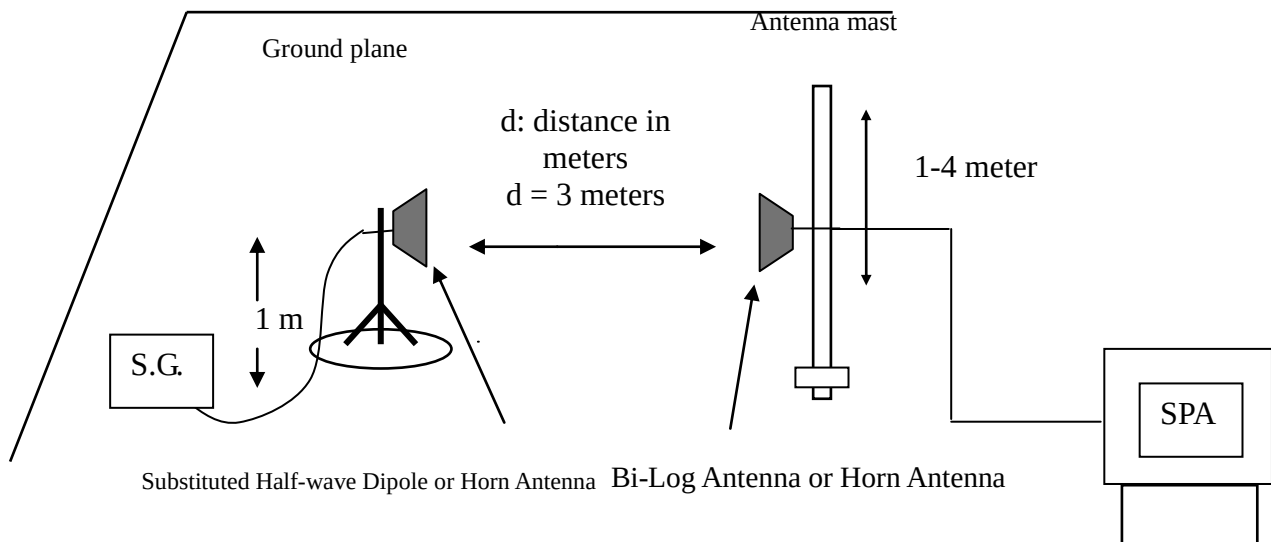

TEST PROCEDURE

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement of the EUT, the resolution bandwidth was set to 5MHz and the average bandwidth was set to 50MHz. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824-849MHz, and EIRP in frequency band 1851.25 –1910MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824-849MHz) or horn antenna (1851.25-1910MHz) connected to a signal generator. The spectrum analyzer reading was recorded and ERP/EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)} - 2.15$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

No non-compliance noted.

GSM 850 TEST DATA

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
128	824.1800	V	24.92	3.39	6.24	27.77	38.45	-10.68
	824.3600	H	25.22	3.39	6.24	28.07	38.45	-10.38
190	836.6000	V	24.79	3.4	6.37	27.76	38.45	-10.69
	836.6600	H	24.31	3.4	6.37	27.28	38.45	-11.17
251	848.6600	V	25.11	3.4	6.4	*28.11	38.45	-10.34
	848.9000	H	23.46	3.4	6.4	26.46	38.45	-11.99

GPRS 850 TEST DATA (CLASS 10)

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
128	824.2400	V	25.62	3.39	6.24	*28.47	38.45	-9.98
	824.1200	H	22.43	3.39	6.24	25.28	38.45	-13.17
190	837.0800	V	25.3	3.4	6.37	28.27	38.45	-10.18
	836.9000	H	22.02	3.4	6.37	24.99	38.45	-13.46
251	849.0800	V	25.03	3.4	6.4	28.03	38.45	-10.42
	848.6000	H	22.44	3.4	6.4	25.44	38.45	-13.01

GSM 1900 TEST DATA

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
512	1850.160	V	22.55	5.37	5.67	22.85	33.00	-10.15
	1850.040	H	26.27	5.37	5.67	26.57	33.00	-6.43
661	1880.040	V	23.76	5.42	5.62	23.96	33.00	-9.04
	1880.040	H	27.23	5.42	5.62	27.43	33.00	-5.57
810	1909.800	V	24.93	5.48	5.56	25.01	33.00	-7.99
	1909.800	H	28	5.48	5.56	*28.08	33.00	-4.92

GPRS 1900 TEST DATA (CLASS 10)


Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
512	1850.040	V	21.57	5.37	5.67	21.87	33.00	-11.13
	1850.040	H	25.43	5.37	5.67	25.73	33.00	-7.27
661	1880.040	V	22.99	5.42	5.62	23.19	33.00	-9.81
	1879.920	H	26.61	5.42	5.62	26.81	33.00	-6.19
810	1909.800	V	24	5.48	5.56	24.08	33.00	-8.92
	1909.800	H	27.06	5.48	5.56	*27.14	33.00	-5.86

7.4 OCCUPIED BANDWIDTH MEASUREMENT

LIMIT

According to §FCC 2.1049.

Test Configuration

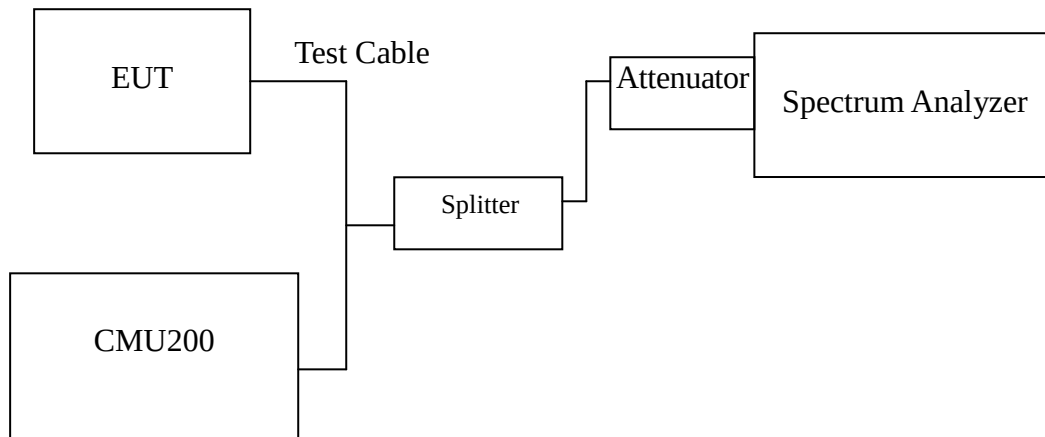

Remark: Measurement setup for testing on Antenna connector

TEST PROCEDURE

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW was set to about 1% of emission BW, VBW is set to 3 times the RBW, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

No non-compliance noted

Test Data

Test Mode	CH	Frequency (MHz)	99% Bandwidth (kHz)
GSM 850	128	824.200	239.6147
	190	836.600	*242.4373
	251	848.800	240.7832
GPRS 850 (Class 10)	128	824.200	238.9986
	190	836.600	241.2984
	251	848.800	*242.9249


Test Mode	CH	Frequency (MHz)	99% Bandwidth (kHz)
GSM 1900	512	1850.200	240.5478
	661	1880.000	*246.7378
	810	1909.800	244.9666
GPRS 1900 (Class 10)	512	1850.200	237.2796
	661	1880.000	243.5838
	810	1909.800	*245.5602

Test Plot

GSM 850 (CH Low)

Agilent

R T

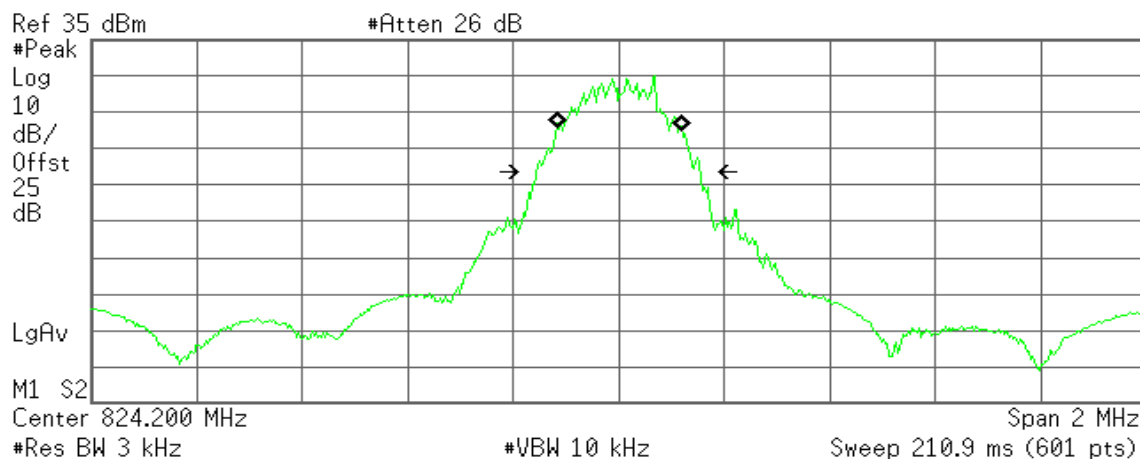

Occupied Bandwidth
239.6147 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.654 kHz
x dB Bandwidth 311.176 kHz

GSM 850 (CH Mid)

Agilent

R T

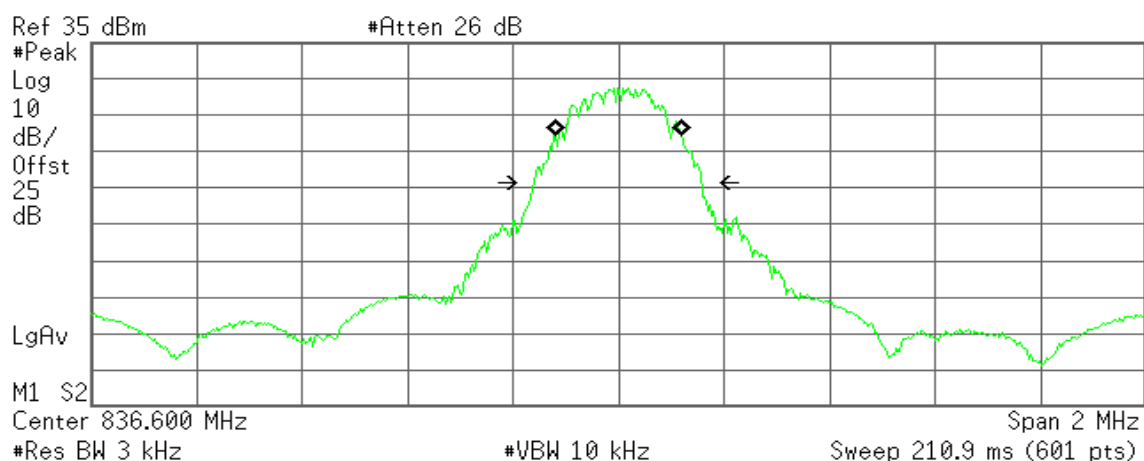

Occupied Bandwidth
242.4373 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -235.661 Hz
x dB Bandwidth 318.586 kHz

GSM 850 (CH High)

Agilent

R T

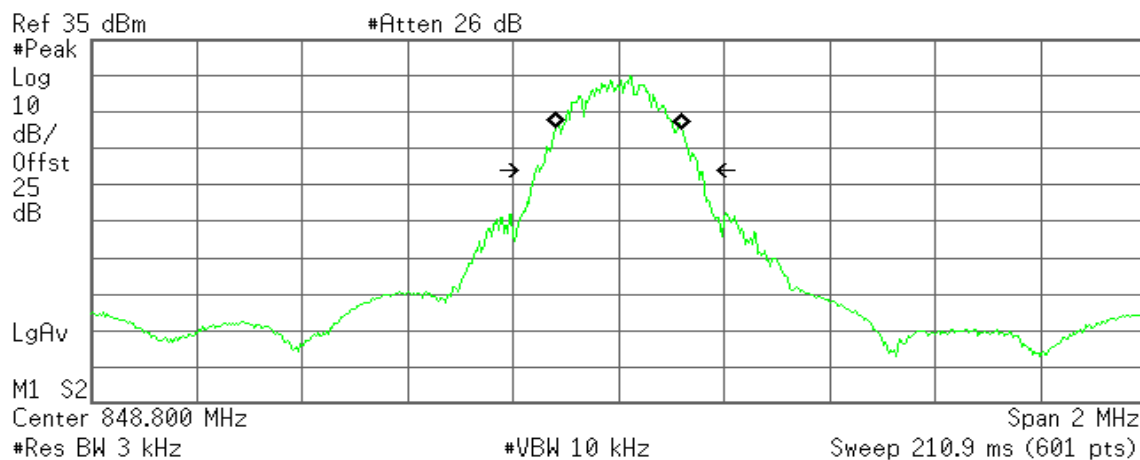

Occupied Bandwidth
240.7832 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 495.404 Hz
x dB Bandwidth 309.127 kHz

GPRS 850 (CH Low)

Agilent

R T

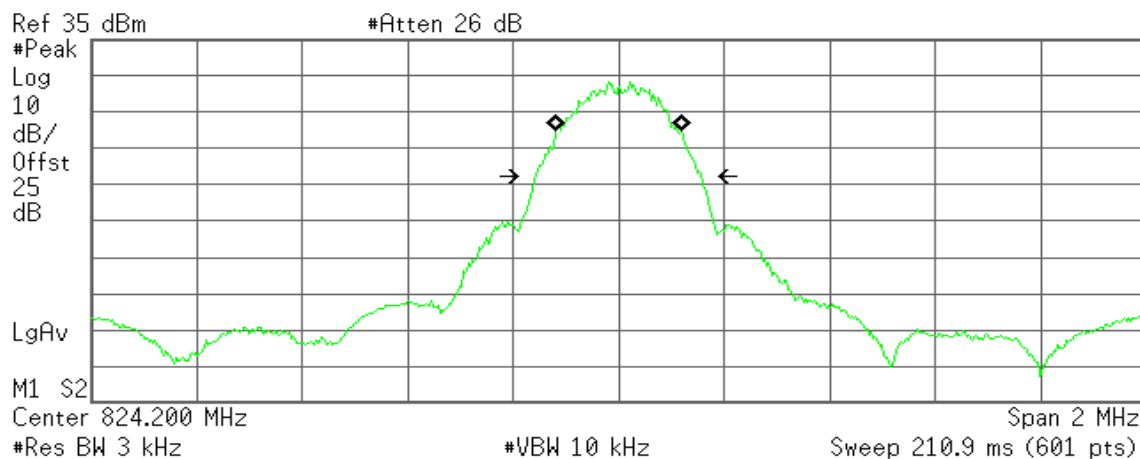

Occupied Bandwidth
238.9986 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 394.052 Hz
x dB Bandwidth 314.609 kHz

GPRS 850 (CH Mid)

Agilent

R T

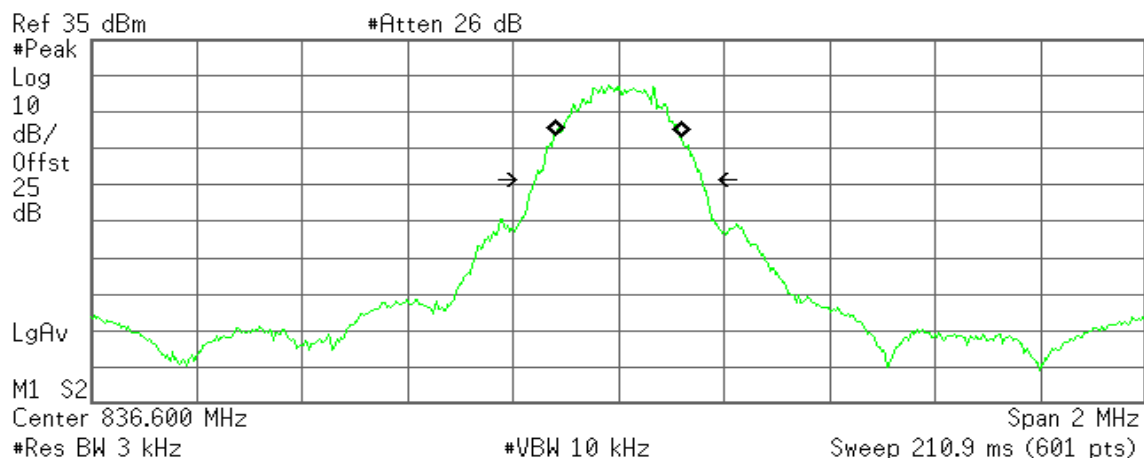

Occupied Bandwidth
241.2984 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -857.638 Hz
x dB Bandwidth 316.589 kHz

GPRS 850(CH High)

Agilent

R T

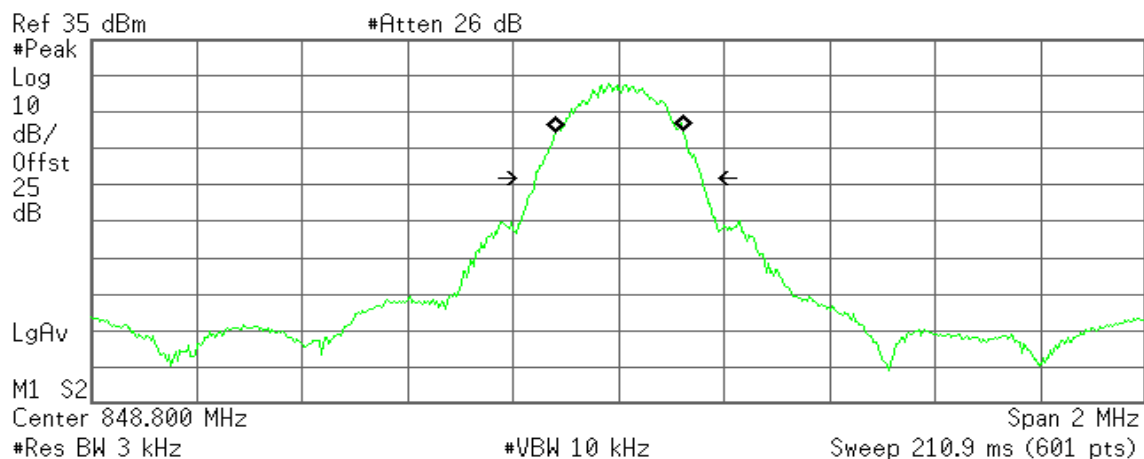

Occupied Bandwidth
242.9219 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.129 kHz
x dB Bandwidth 316.501 kHz

GSM 1900 (CH Low)

Agilent

R T

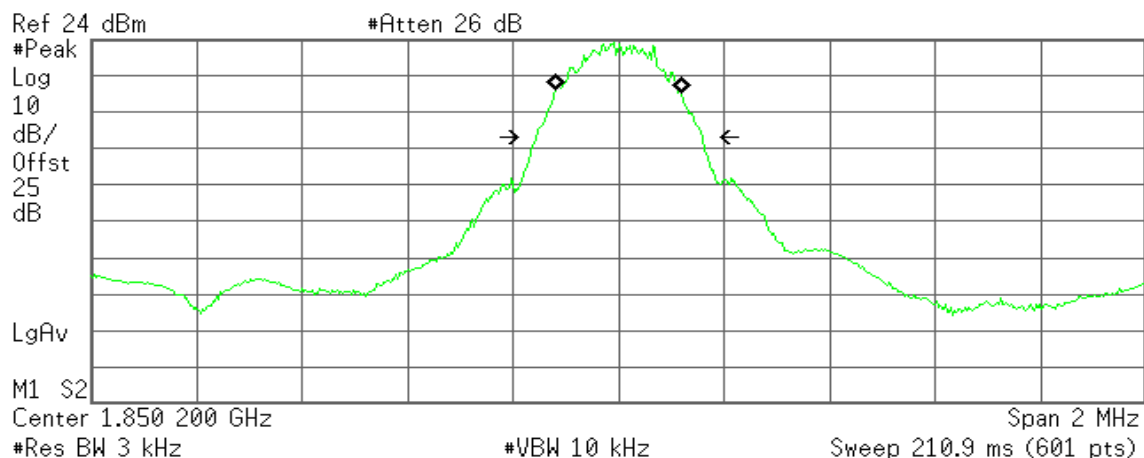

Occupied Bandwidth
240.5478 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -540.502 Hz
x dB Bandwidth 315.400 kHz

GSM 1900 (CH Mid)

Agilent

R T

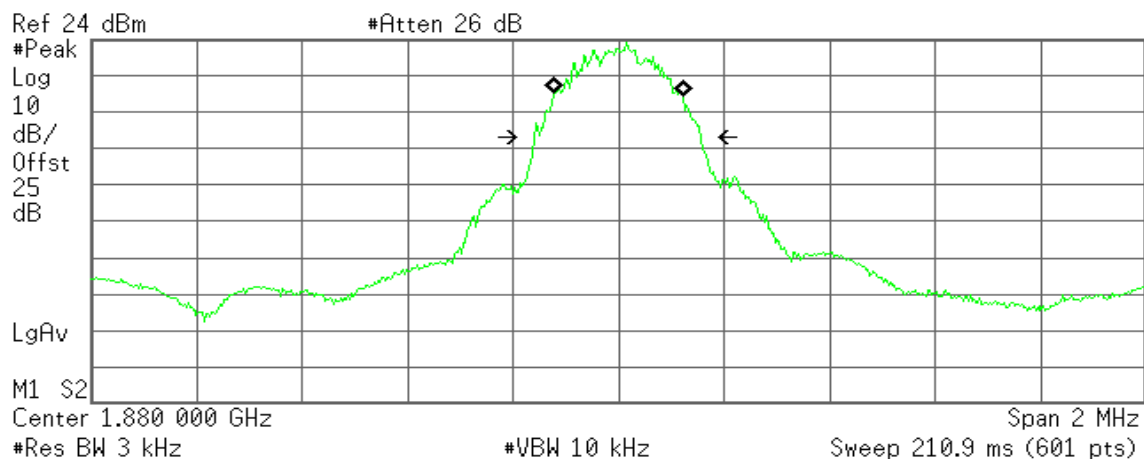


Occupied Bandwidth
246.7378 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -381.576 Hz
x dB Bandwidth 315.783 kHz

GSM 1900 (CH High)

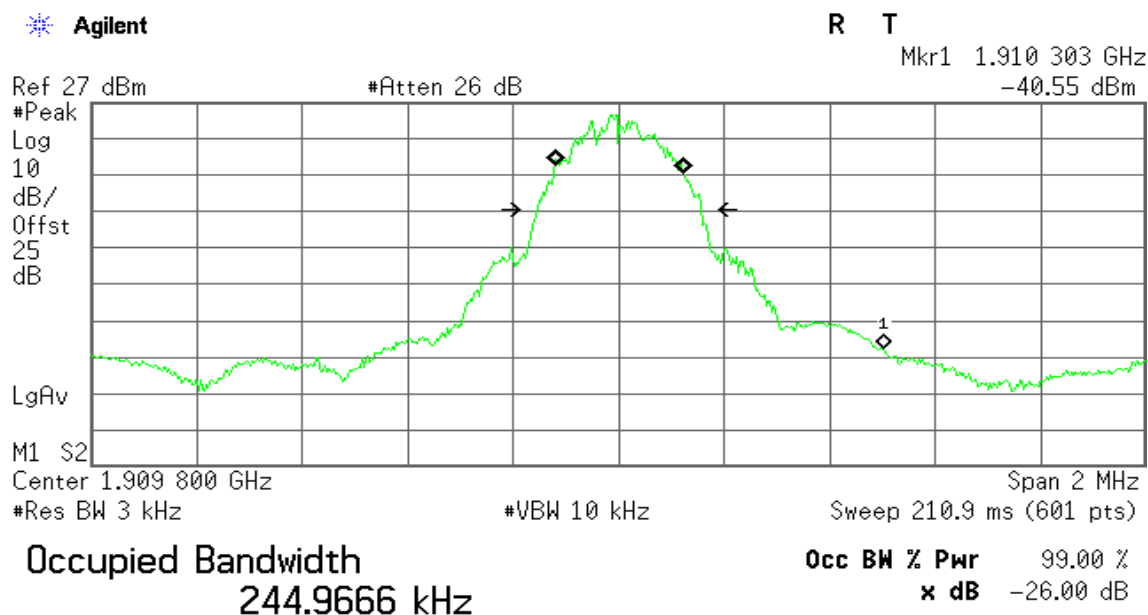

Transmit Freq Error 1.100 kHz
x dB Bandwidth 312.066 kHz

GPRS 1900 (CH Low)

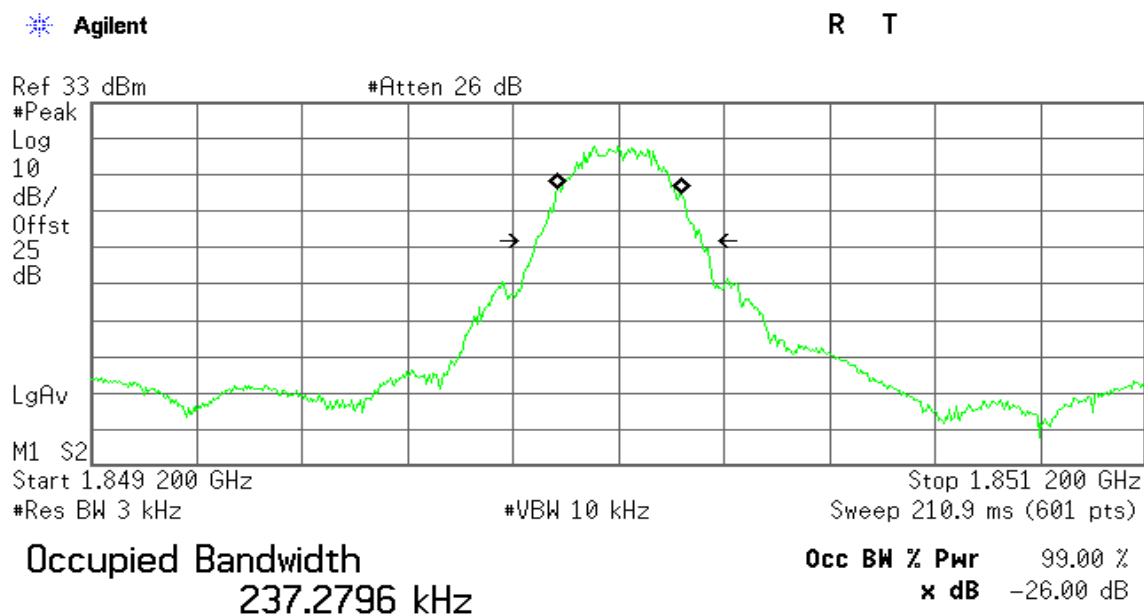


Transmit Freq Error 1.047 kHz
x dB Bandwidth 314.121 kHz

GPRS 1900 (CH Mid)

Agilent

R T

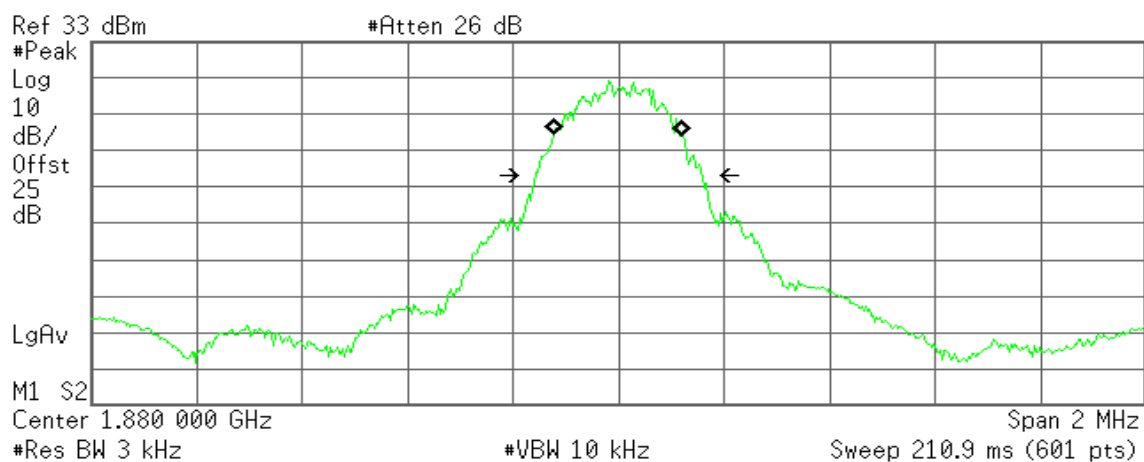

Occupied Bandwidth
243.5838 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -1.014 kHz
x dB Bandwidth 316.899 kHz

GPRS 1900 (CH High)

Agilent

R T

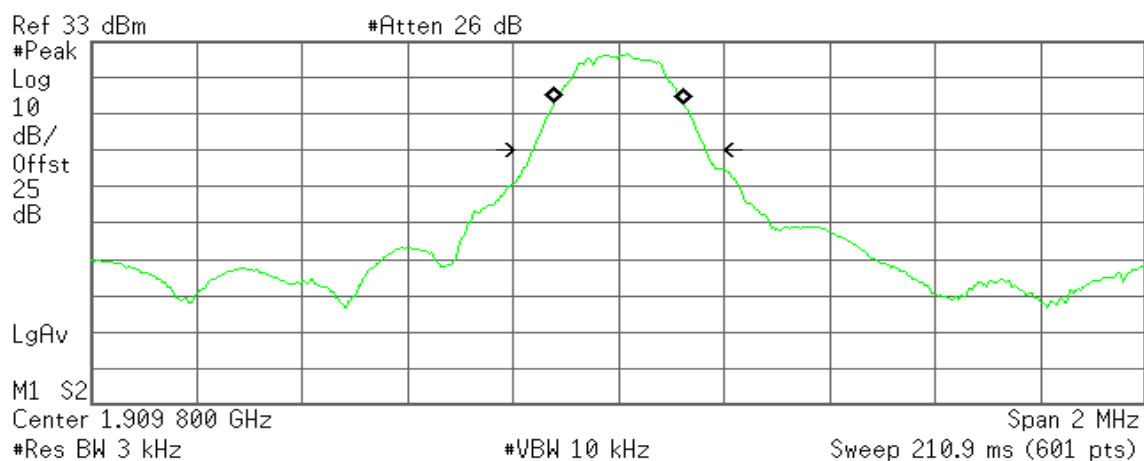

Occupied Bandwidth
245.5602 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 643.121 Hz
x dB Bandwidth 327.916 kHz

7.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS

LIMIT

According to FCC §2.1051, FCC §22.917, FCC §24.238(a).


Out of Band Emissions: The mean power of emission must be attenuated below the mean power of the non-modulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least $43 + 10 \log P$ dB.

Mobile Emissions in Base Frequency Range: The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not exceed -80 dBm at the transmit antenna connector.

Band Edge Requirements: In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the Out of band Emission

Test Configuration

Out of band emission at antenna terminals:

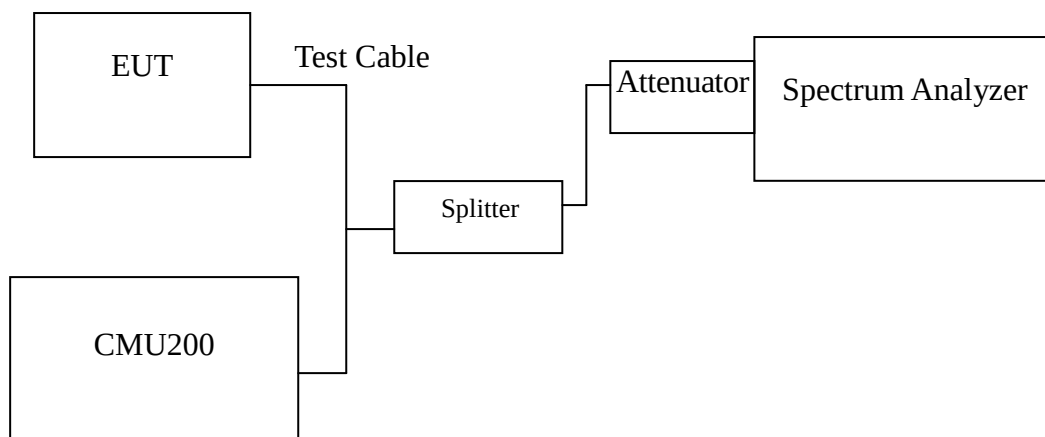

TEST PROCEDURE

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic. Limit = -13dBm

Band Edge Requirements (824 MHz and 849 MHz /1850MHz and 1910MHz): In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

TEST RESULTS

No non-compliance noted.

Test Data

Mode	CH	Location	Description
GSM 850	128	Figure 7-1	Conducted spurious emissions, 30MHz - 20GHz
	190	Figure 7-2	Conducted spurious emissions, 30MHz - 20GHz
	251	Figure 7-3	Conducted spurious emissions, 30MHz - 20GHz
GPRS 850 (Class 10)	128	Figure 8-1	Conducted spurious emissions, 30MHz - 20GHz
	190	Figure 8-2	Conducted spurious emissions, 30MHz - 20GHz
	251	Figure 8-3	Conducted spurious emissions, 30MHz - 20GHz

Mode	CH	Location	Description
GSM 1900	512	Figure 9-1	Conducted spurious emissions, 30MHz - 20GHz
	661	Figure 9-2	Conducted spurious emissions, 30MHz - 20GHz
	810	Figure 9-3	Conducted spurious emissions, 30MHz - 20GHz
GPRS 1900 (Class 10)	512	Figure 10-1	Conducted spurious emissions, 30MHz - 20GHz
	661	Figure 10-2	Conducted spurious emissions, 30MHz - 20GHz
	810	Figure 10-3	Conducted spurious emissions, 30MHz - 20GHz

Mode	CH	Location	Description
GSM 850	128	Figure 11-1	Band Edge emissions
	251	Figure 11-2	Band Edge emissions
GPRS 850 (Class 10)	128	Figure 12-1	Band Edge emissions
	251	Figure 12-2	Band Edge emissions

Mode	CH	Location	Description
GSM 1900	512	Figure 13-1	Band Edge emissions
	810	Figure 13-2	Band Edge emissions
GPRS 1900 (Class 10)	512	Figure 14-1	Band Edge emissions
	810	Figure 14-2	Band Edge emissions

Test Plot

GSM 850

Figure 7-1: Out of Band emission at antenna terminals – GSM CH Low

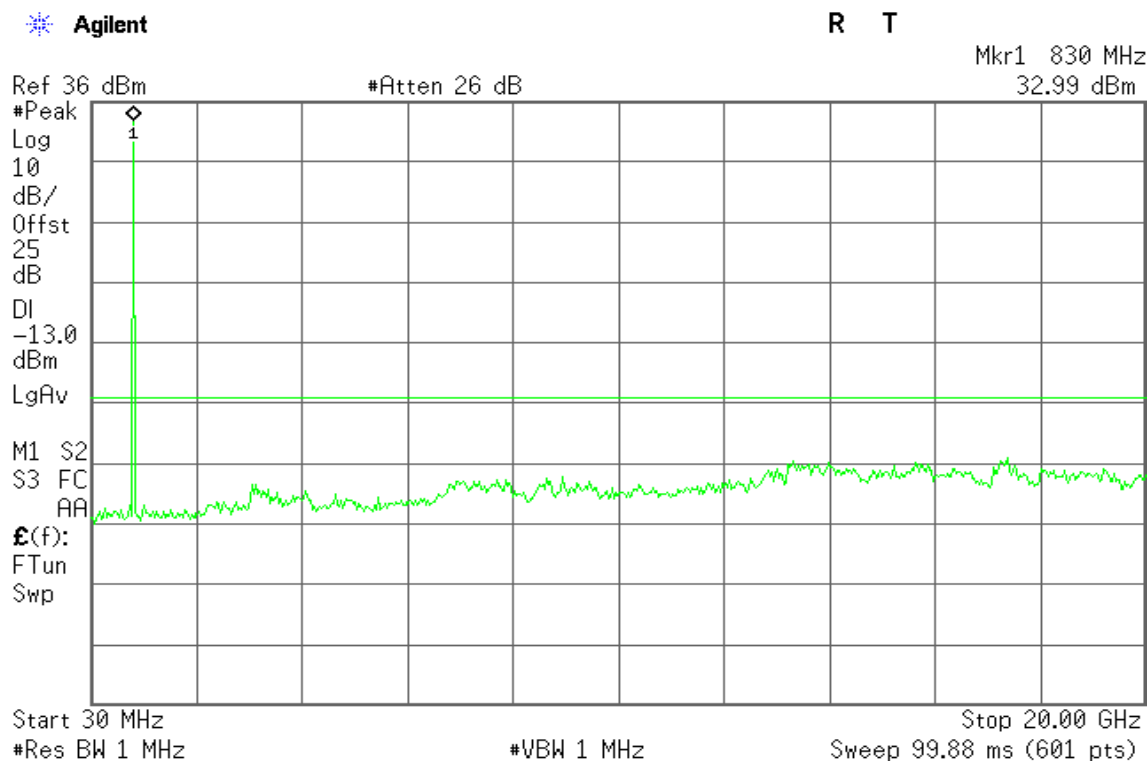


Figure 7-2: Out of Band emission at antenna terminals – GSM CH Mid


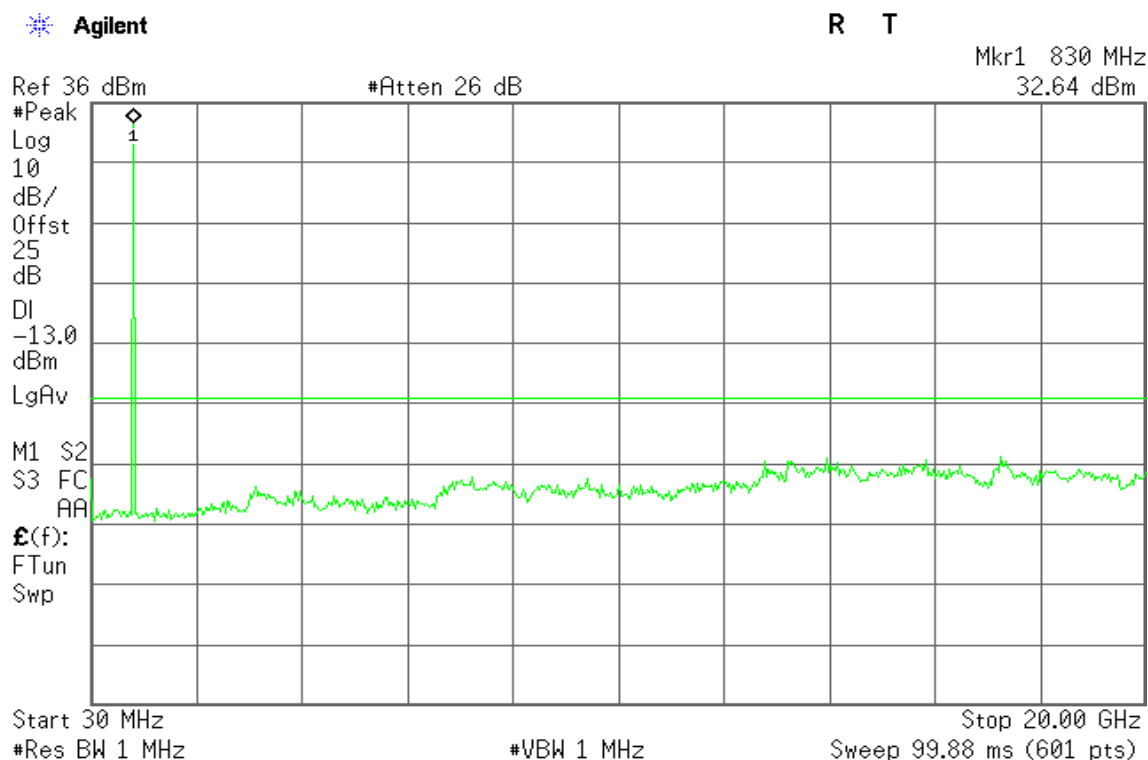


Figure 7-3: Out of Band emission at antenna terminals – GSM CH High

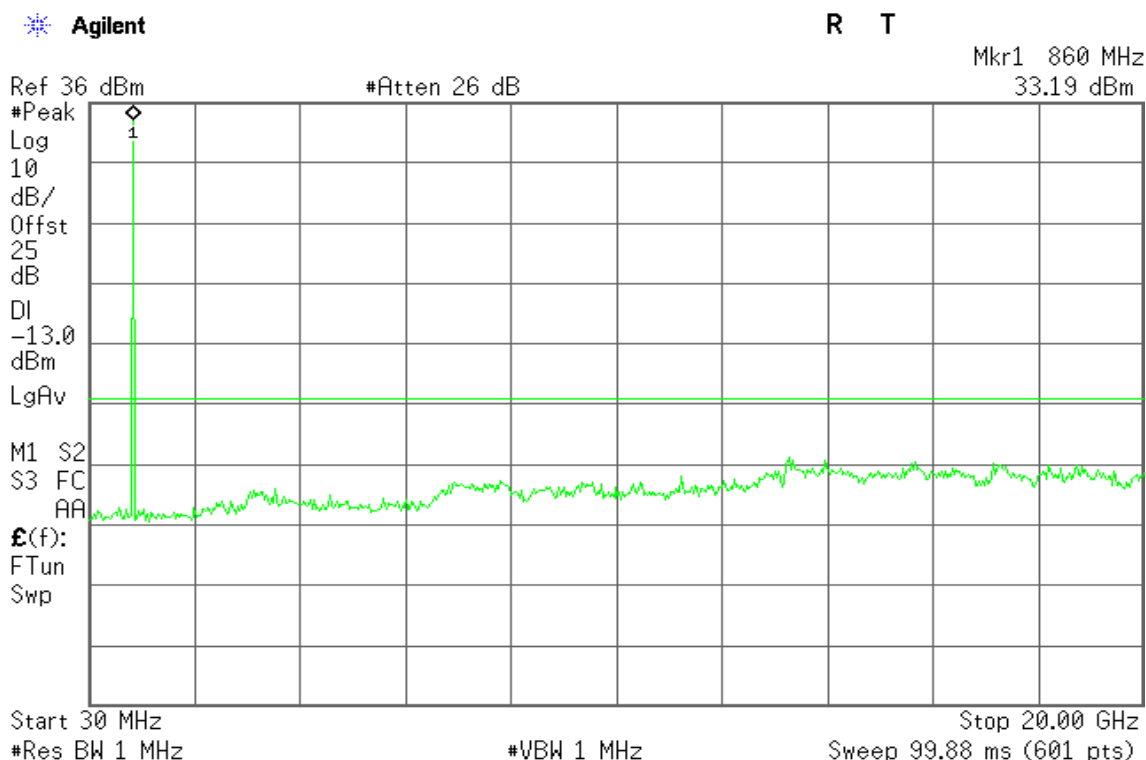

GPRS 850

Figure 8-1: Out of Band emission at antenna terminals – GPRS CH Low

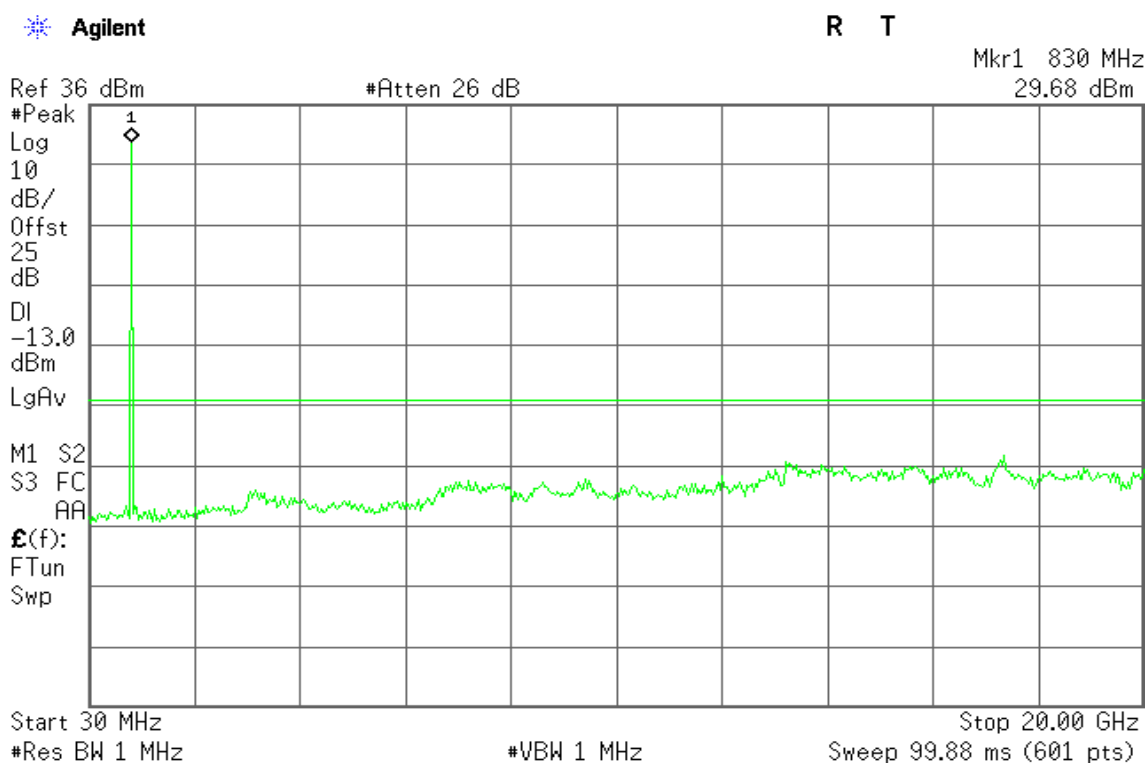


Figure 8-2: Out of Band emission at antenna terminals –GPRS CH Mid


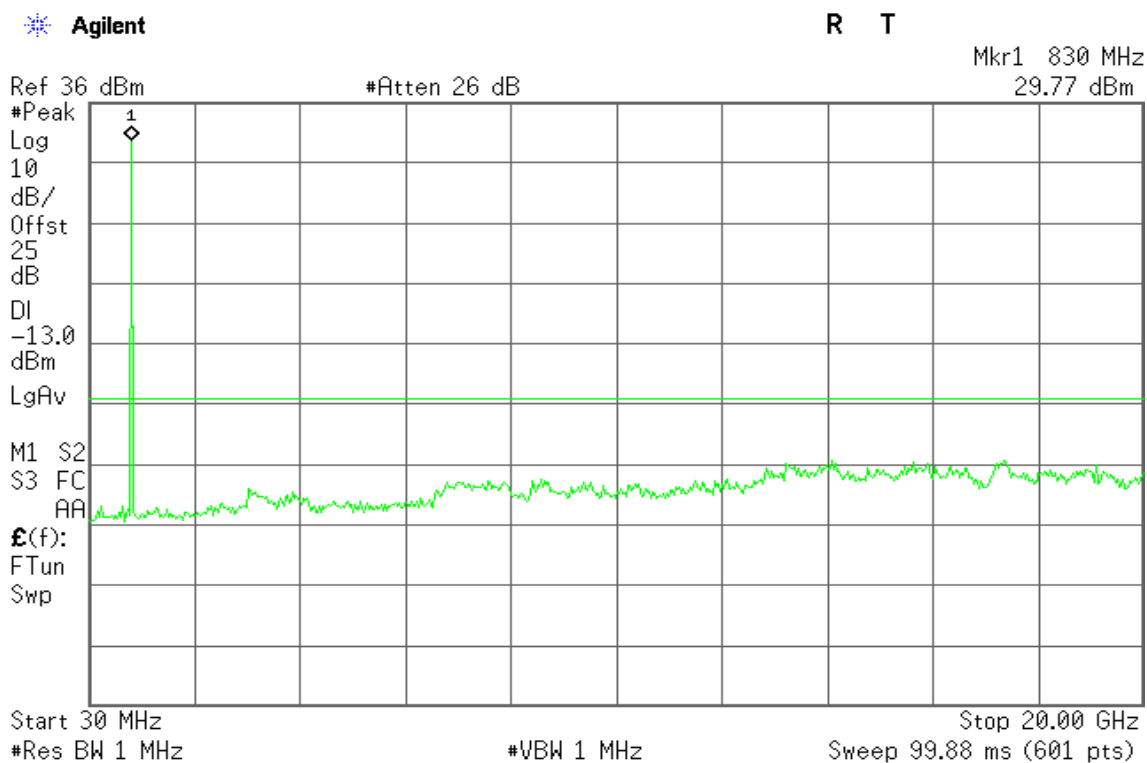


Figure 8-3: Out of Band emission at antenna terminals –GPRS CH High

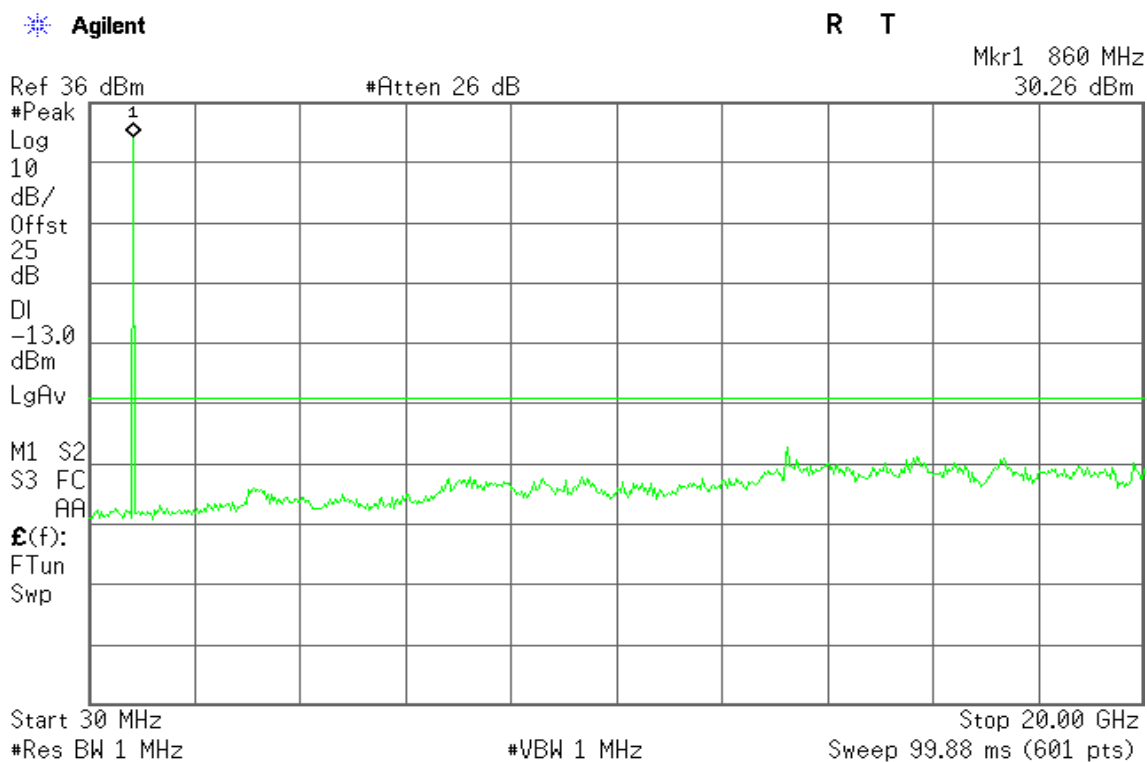

GSM 1900

Figure 9-1: Out of Band emission at antenna terminals – GSM CH Low

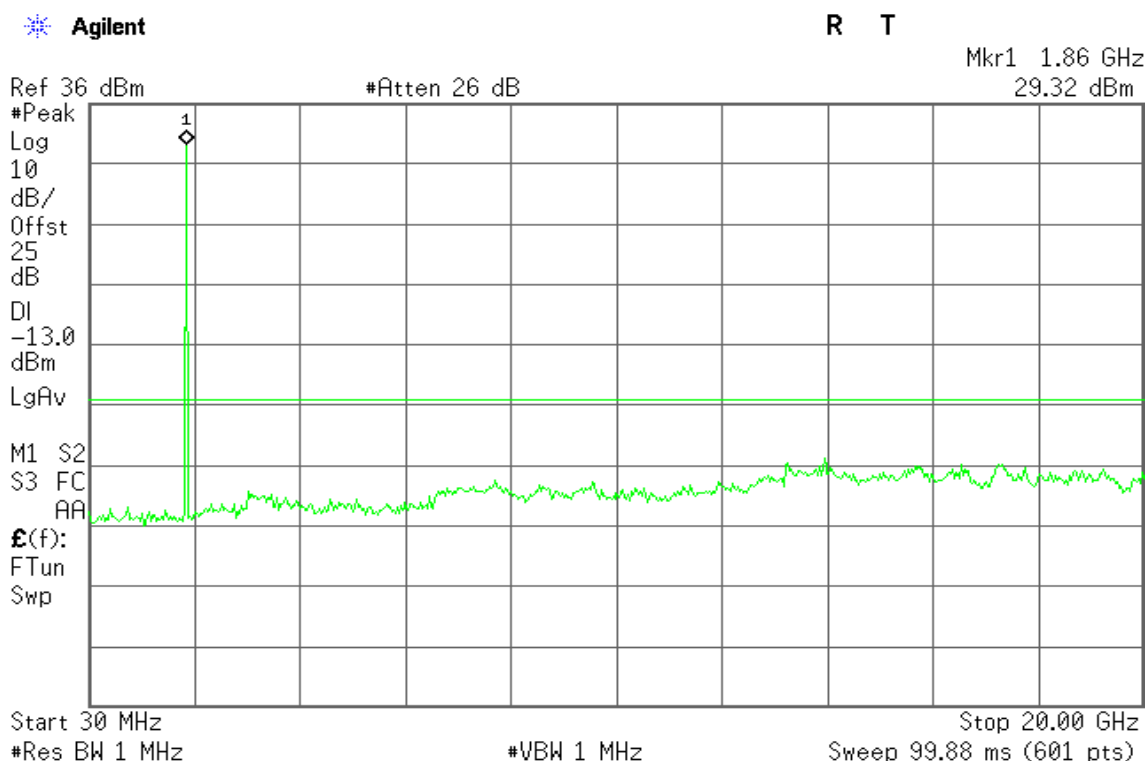


Figure 9-2: Out of Band emission at antenna terminals – GSM CH Mid


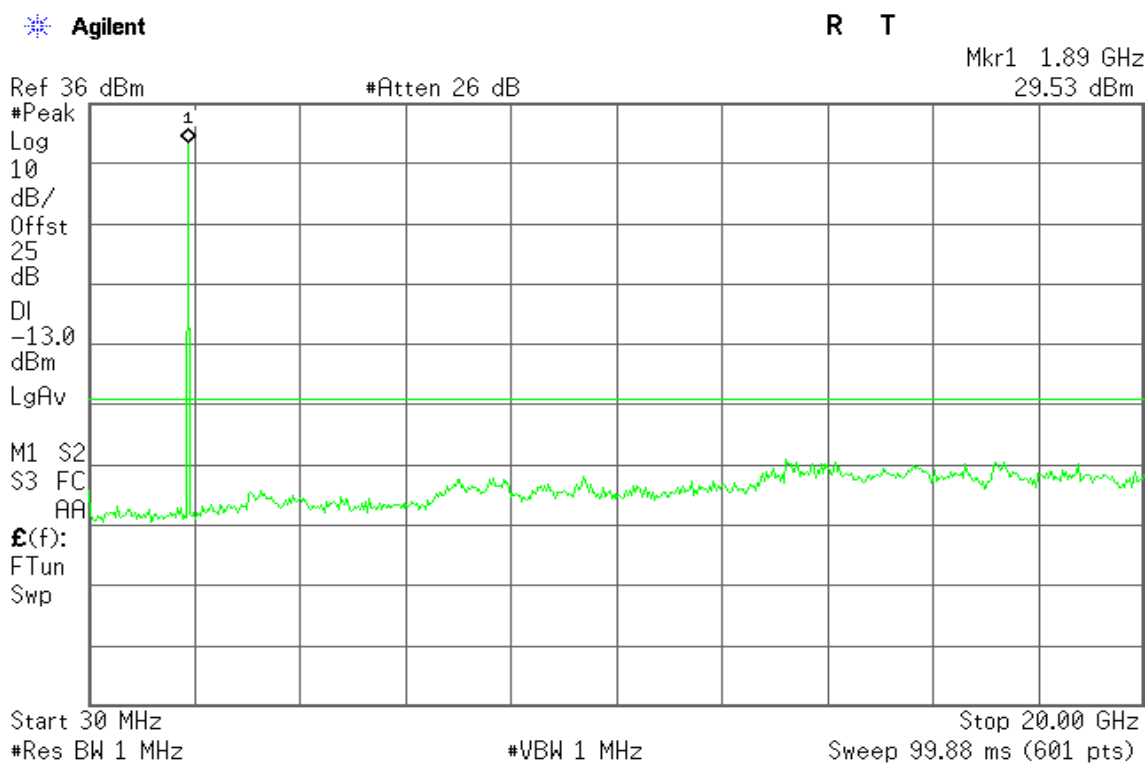


Figure 9-3: Out of Band emission at antenna terminals – GSM CH High

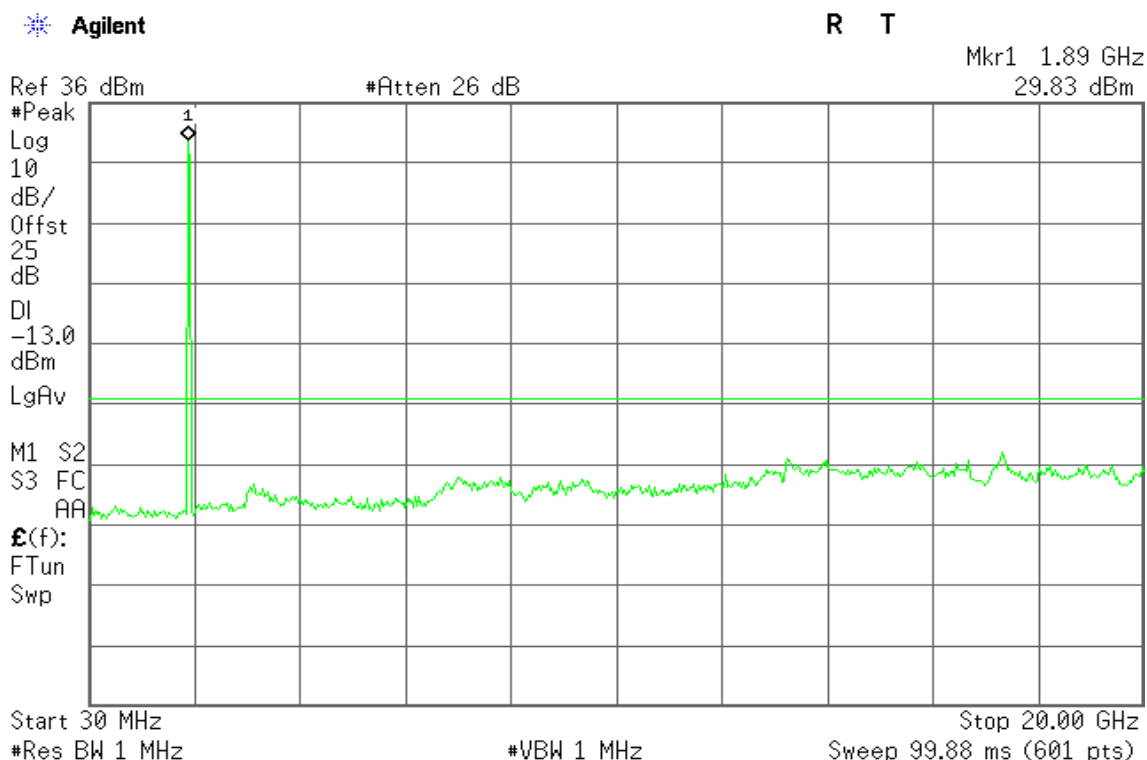

GPRS 1900

Figure 10-1: Out of Band emission at antenna terminals – GSM CH Low

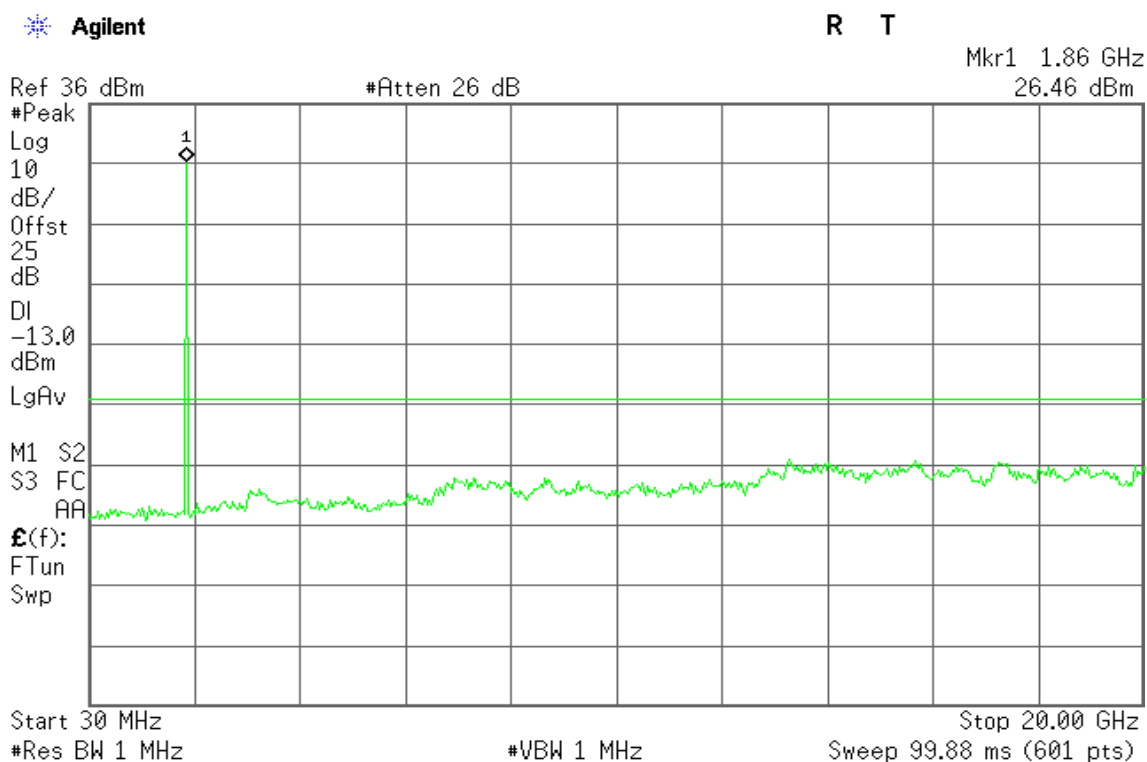


Figure 10-2: Out of Band emission at antenna terminals – GSM CH Mid


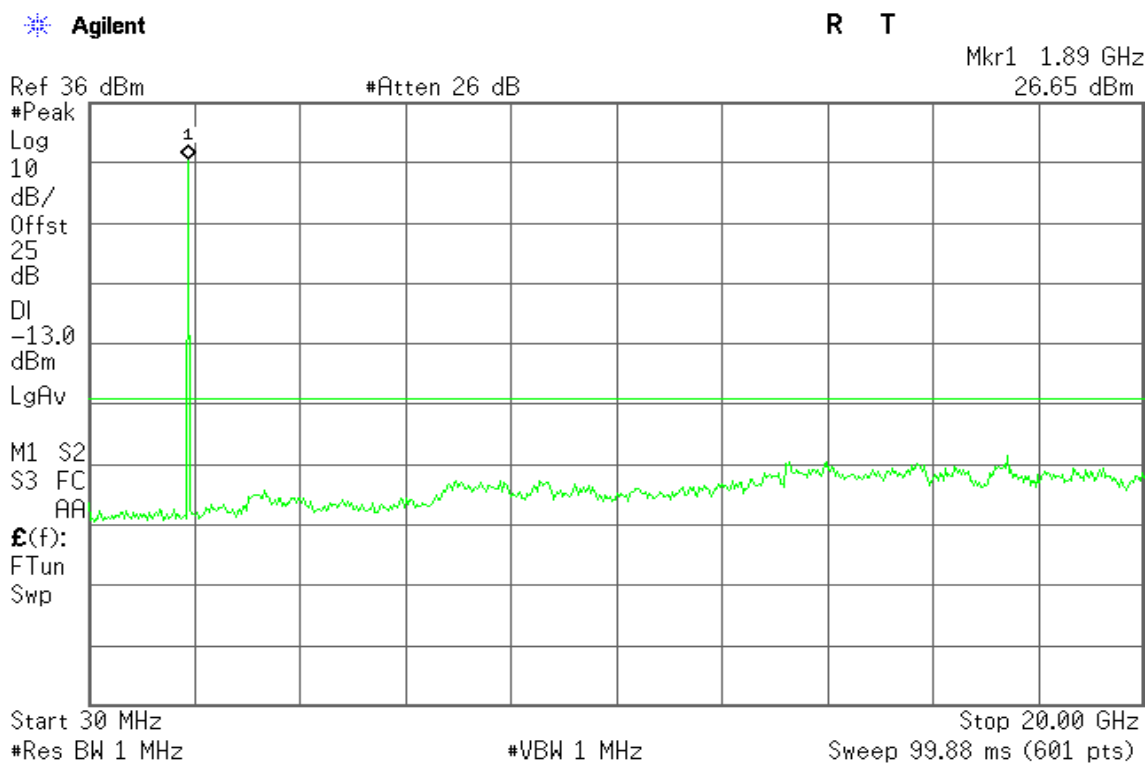


Figure 10-3: Out of Band emission at antenna terminals – GSM CH High

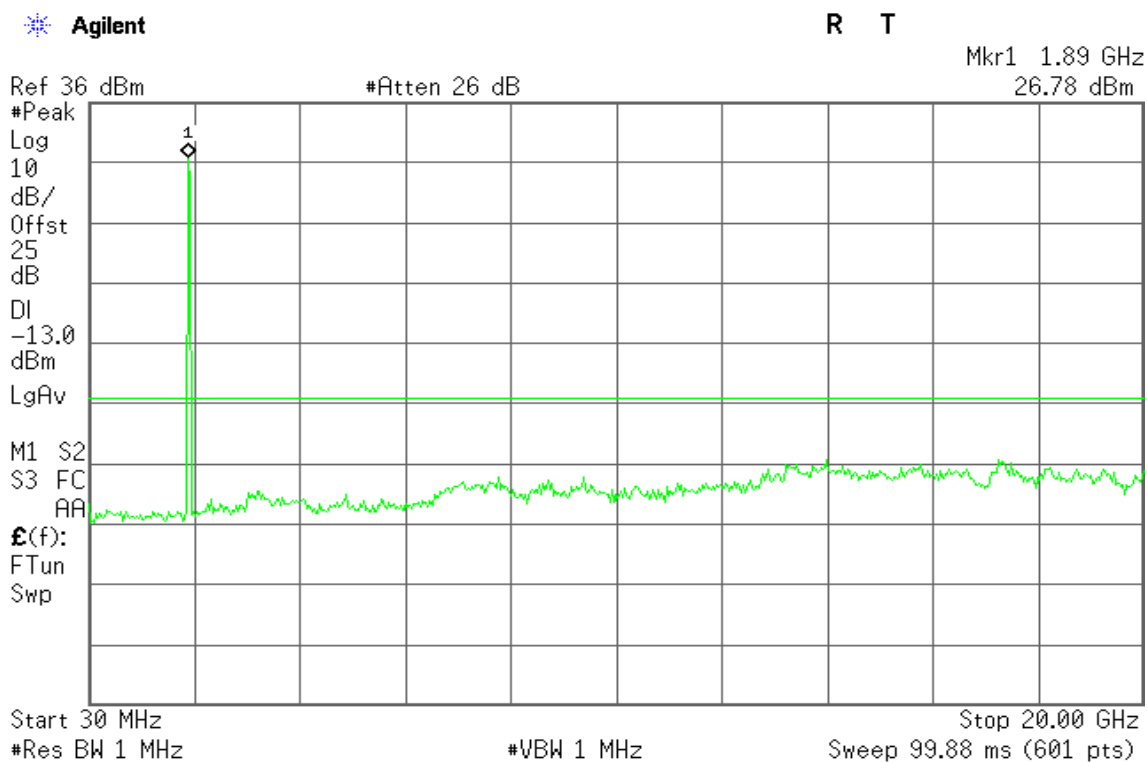

GSM 850

Figure 11-1: Band Edge emissions – GSM CH Low


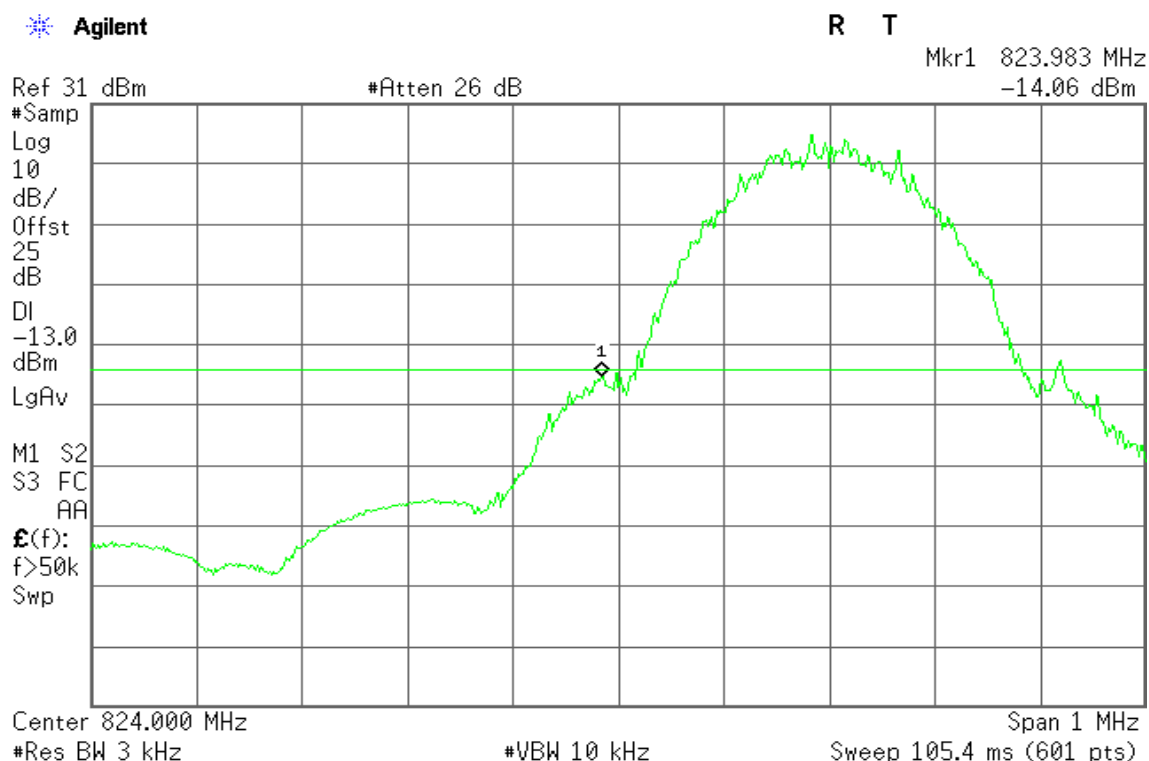


Figure 11-2: Band Edge emissions – GSM CH High

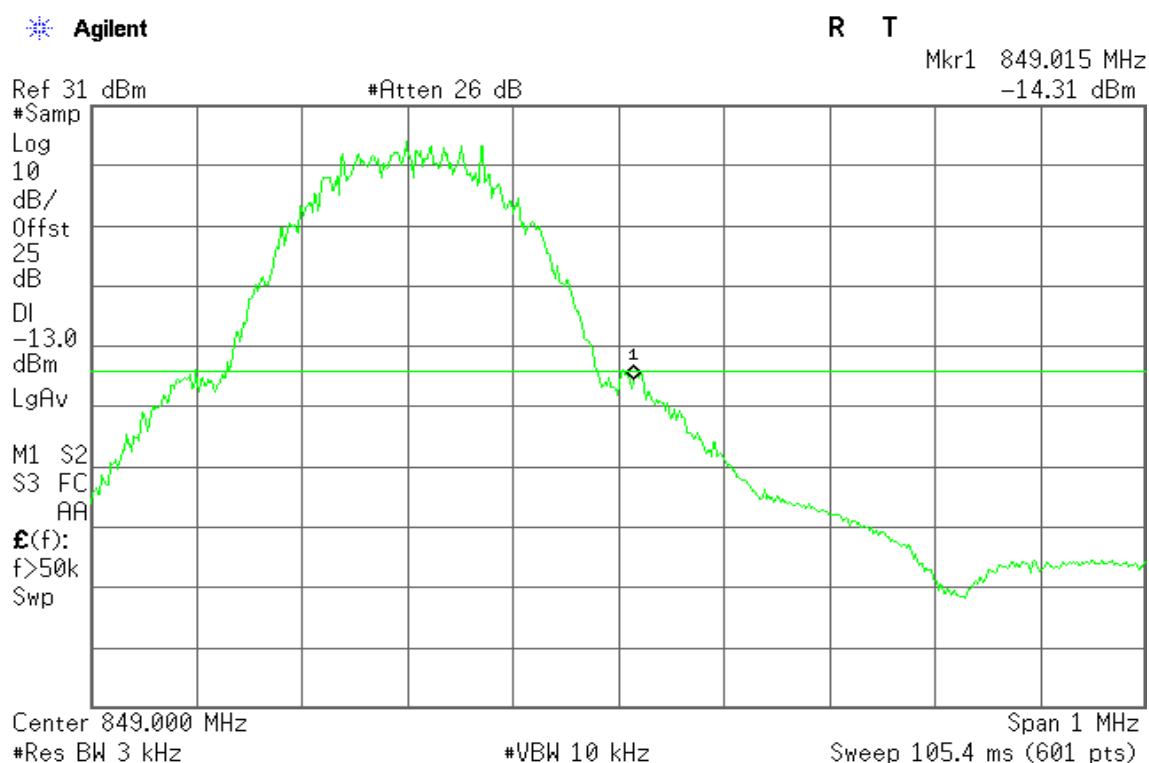

GPRS 850

Figure 12-1: Band Edge emissions – GPRS CH Low


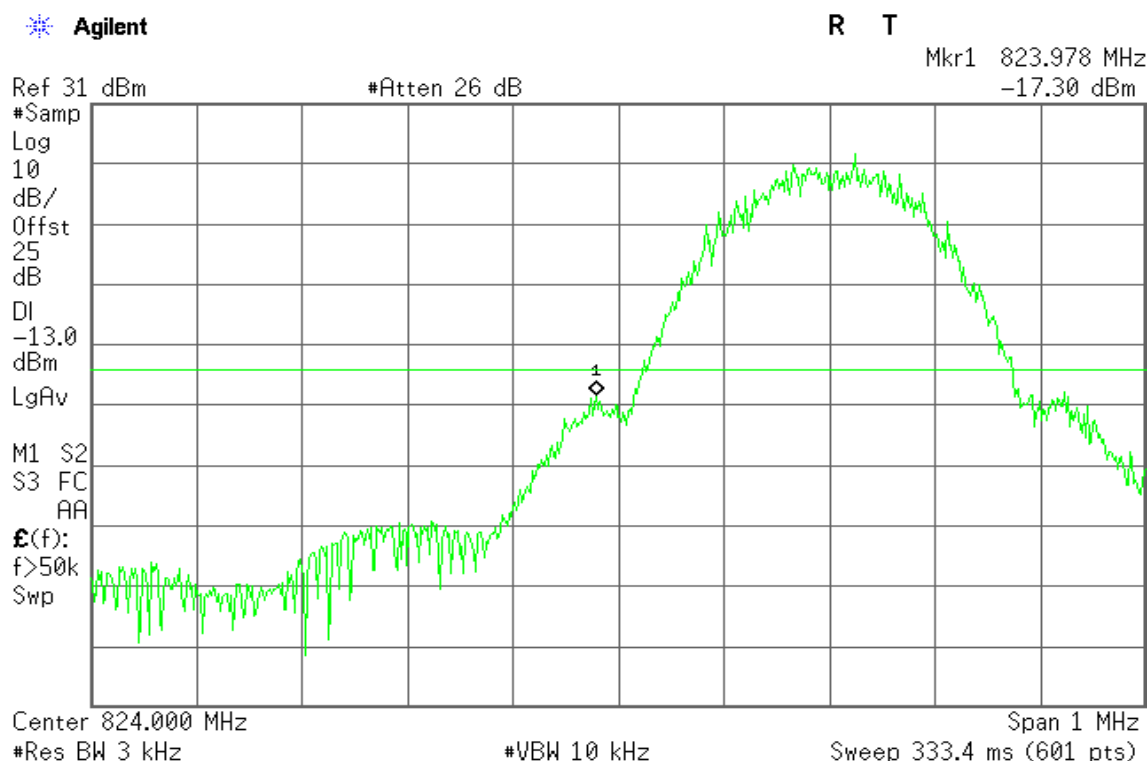


Figure 12-2: Band Edge emissions –GPRS CH High

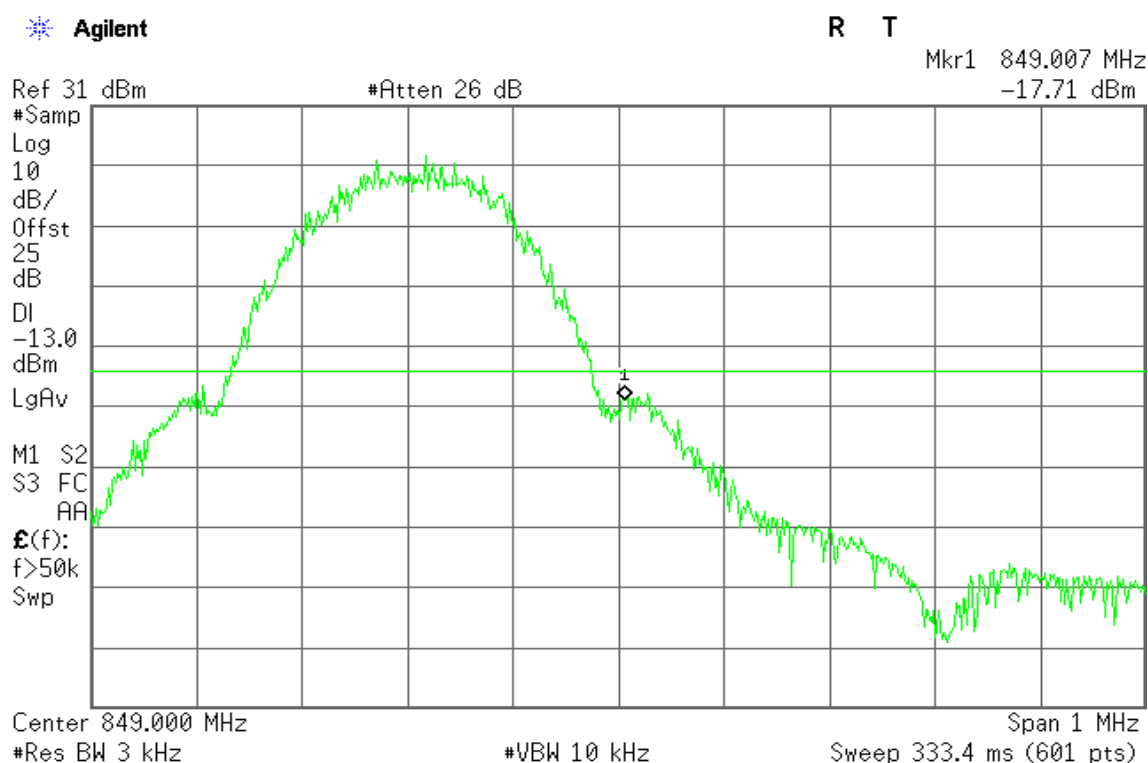

GSM 1900

Figure 13-1: Band Edge emissions – GSM CH Low


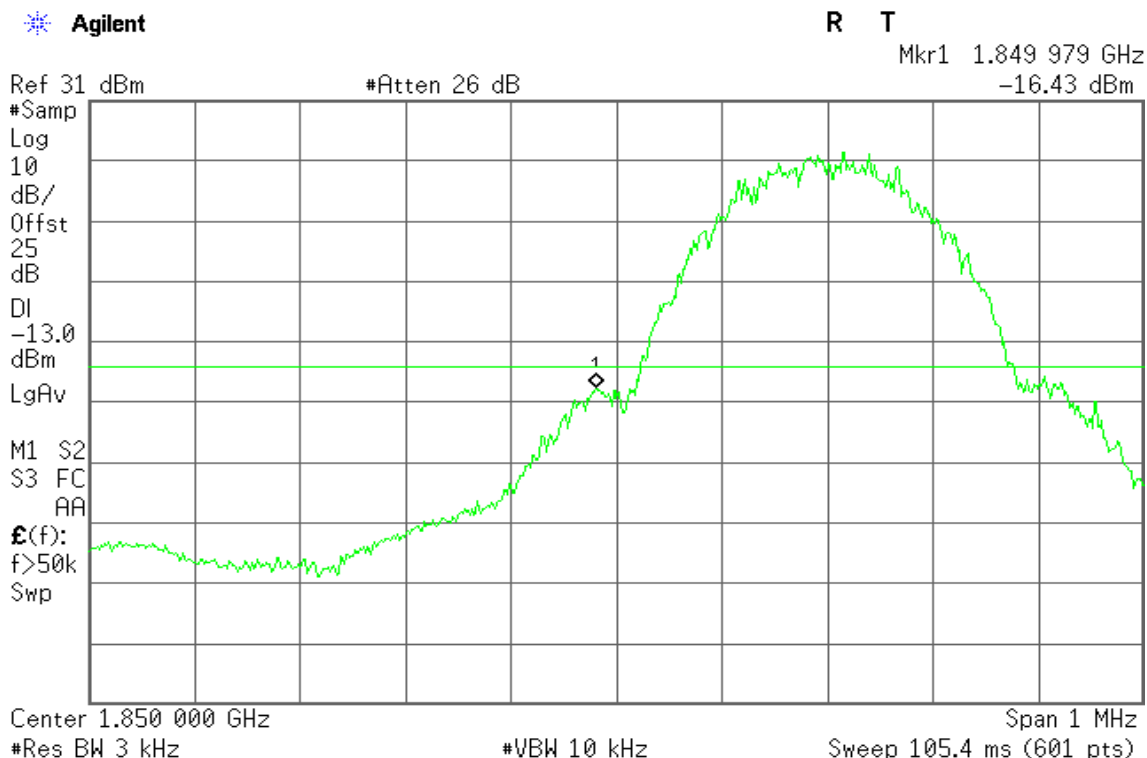


Figure 13-2: Band Edge emissions – GSM CH High

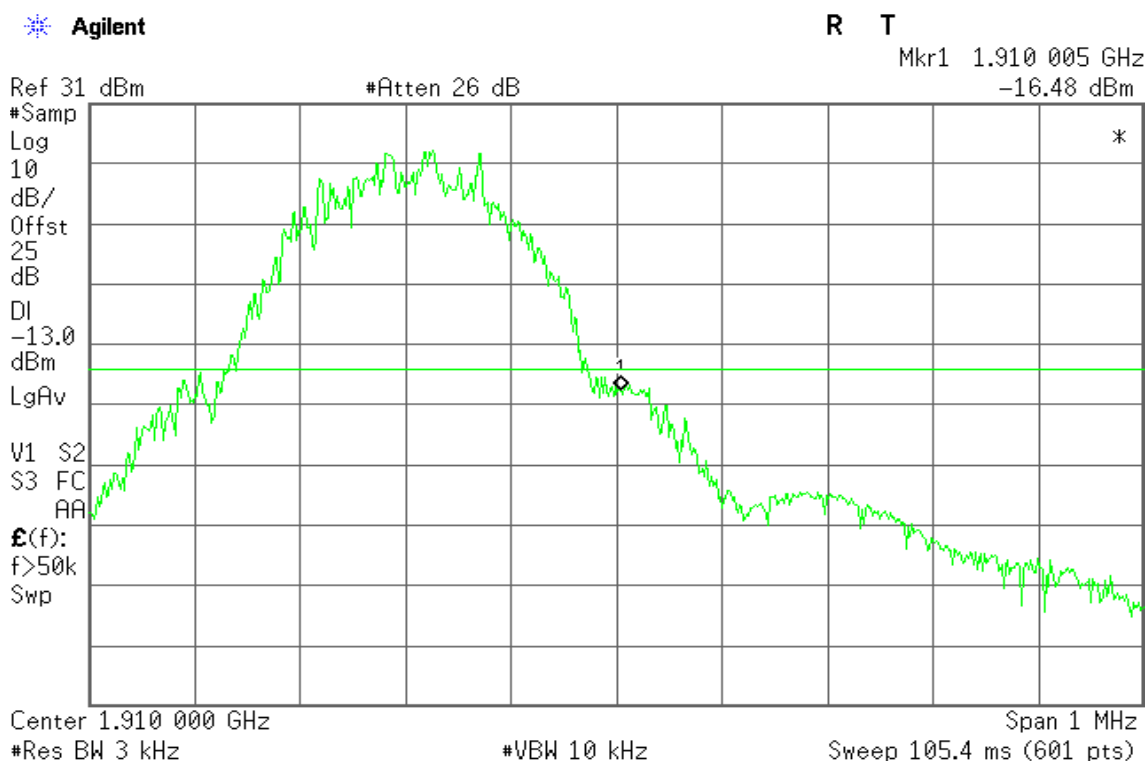

GPRS 1900

Figure 14-1: Band Edge emissions – GPRS CH Low


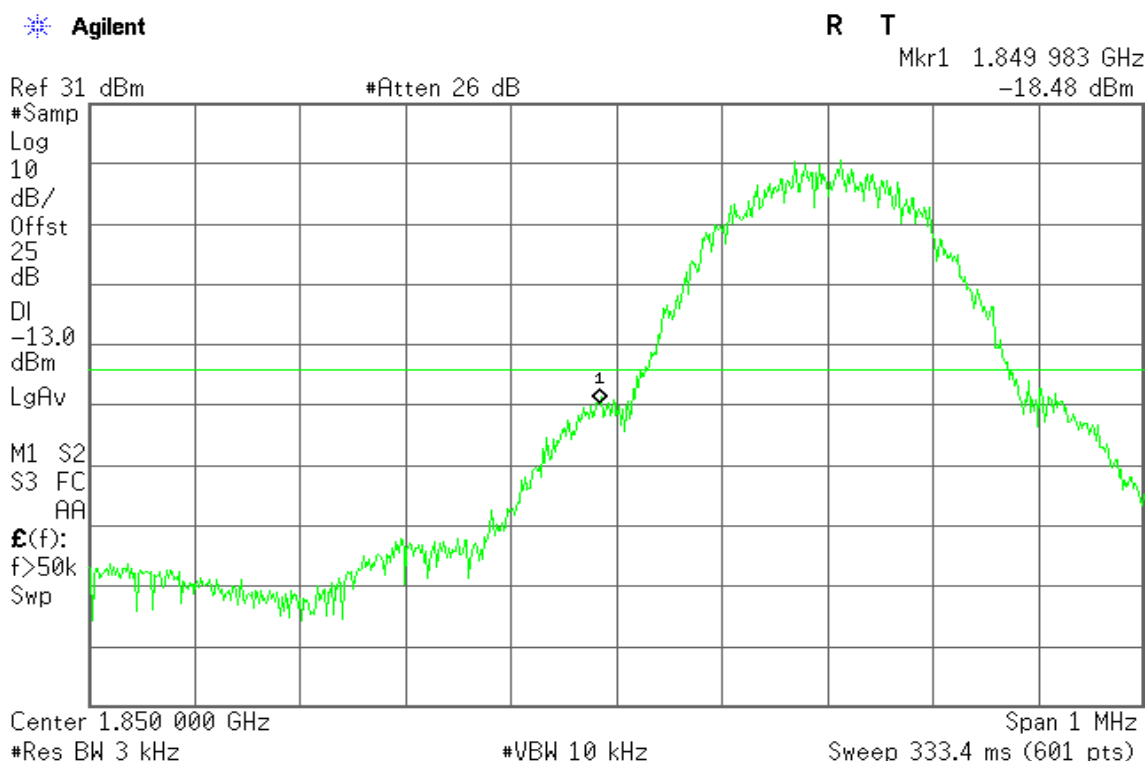


Figure 14-2: Band Edge emissions – GPRS CH High

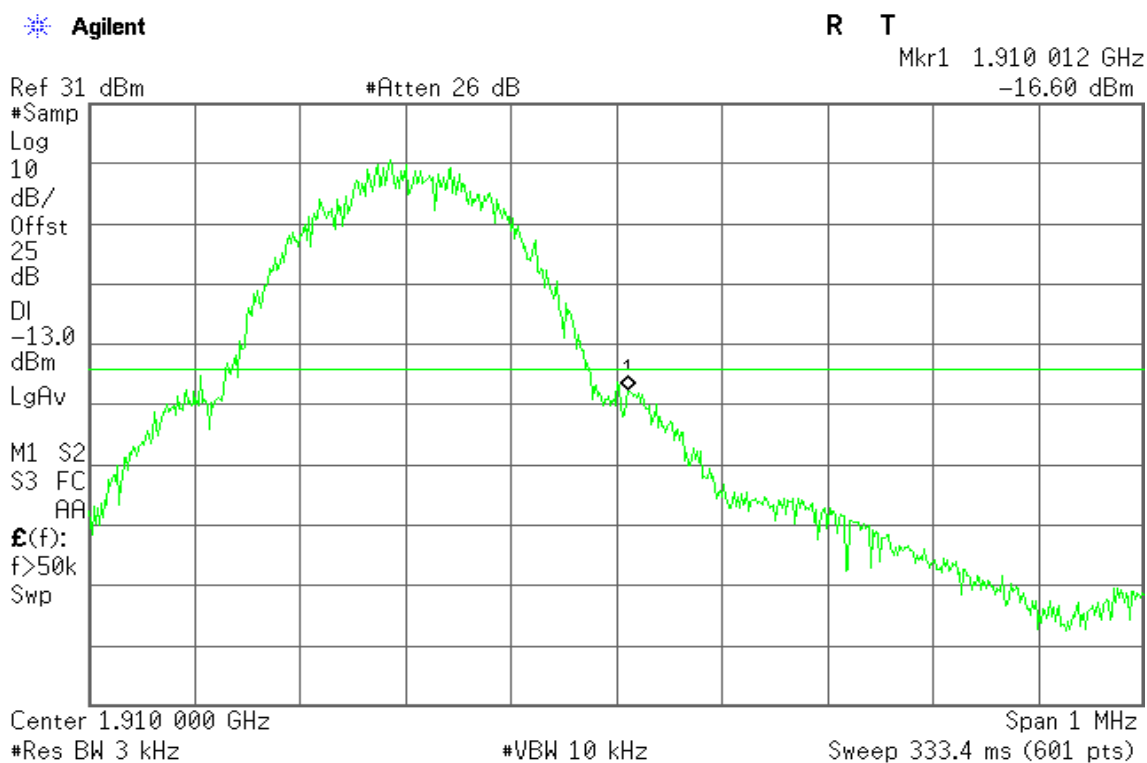


7.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

LIMIT


According to FCC §2.1053

Test Configuration


Below 1 GHz

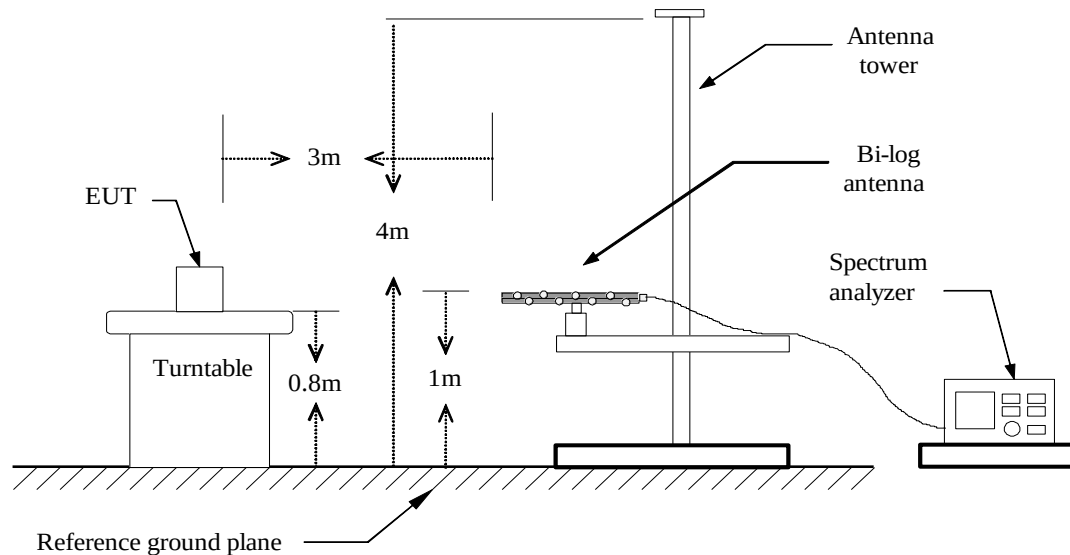

Above 1 GHz

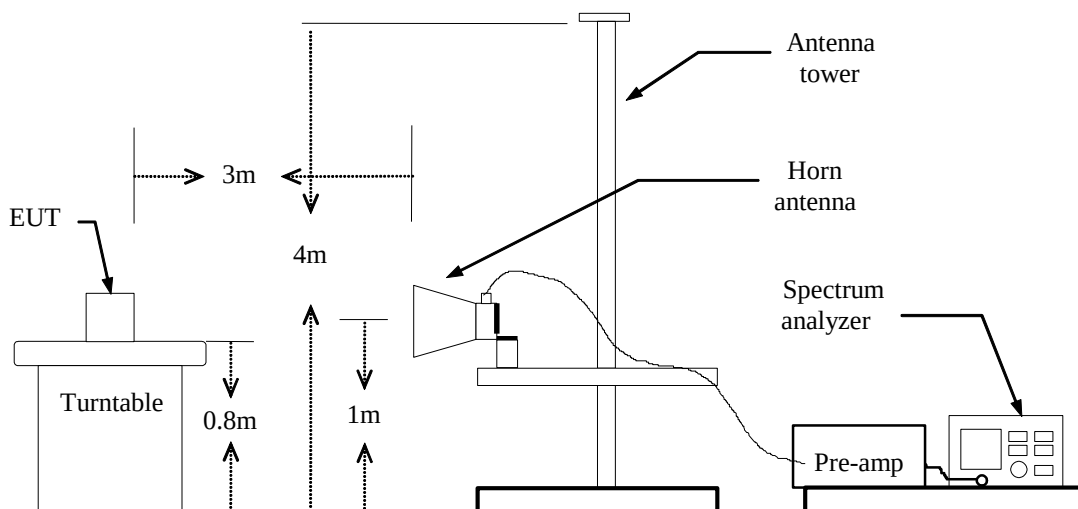

Substituted Method Test Set-up

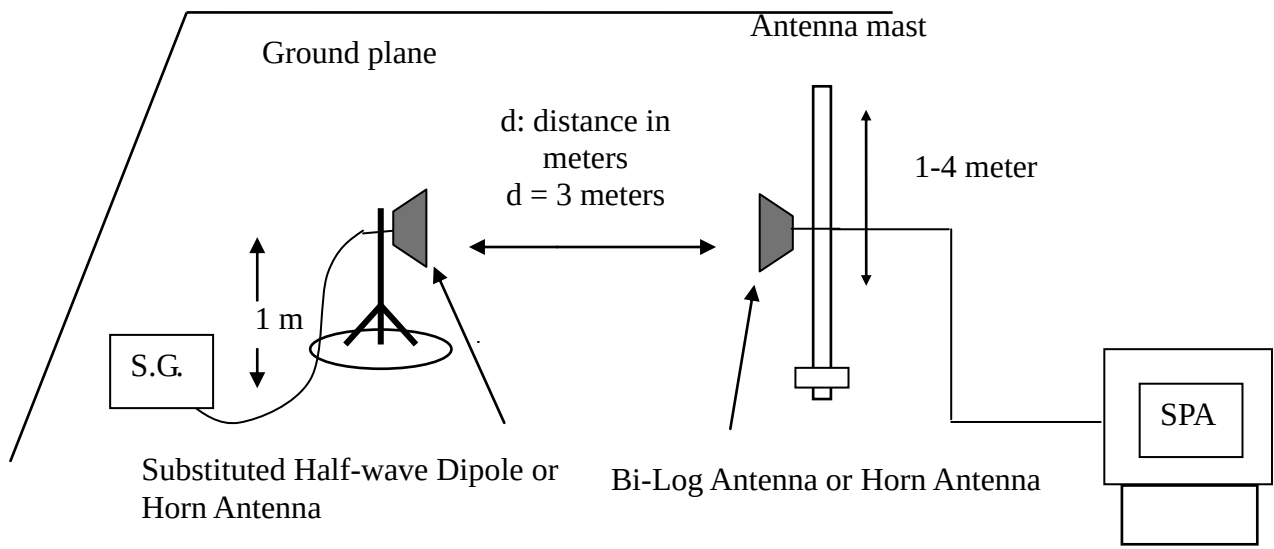

TEST PROCEDURE

The EUT was placed on a non-conductive, the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

Refer to the attached tabular data sheets.

Radiated Spurious Emission Measurement Result / Below 1GHz**Operation Mode:** GSM 850 / TX / CH 128**Test Date:** July 13, 2015**Temperature:** 21°C**Tested by:** Owen Wu**Humidity:** 56 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
57.1600	-50.75	0.86	-2.8	-54.41	-13.00	-41.41	V
169.6800	-58.27	1.56	2.48	-57.35	-13.00	-44.35	V
215.2700	-69.28	1.73	5.37	-65.64	-13.00	-52.64	V
392.7800	-76.54	2.33	5.99	-72.88	-13.00	-59.88	V
540.2200	-79.88	2.78	6.26	-76.40	-13.00	-63.40	V
642.0700	-74.41	3.01	6.14	-71.28	-13.00	-58.28	V
99.8400	-55.73	1.15	-0.37	-57.25	-13.00	-44.25	H
159.9800	-51.87	1.48	1.43	-51.92	-13.00	-38.92	H
276.3800	-62.15	1.99	5.23	-58.91	-13.00	-45.91	H
374.3500	-73.67	2.31	5.89	-70.09	-13.00	-57.09	H
564.4700	-75.63	2.86	6.03	-72.46	-13.00	-59.46	H
697.3600	-75.52	3.11	6.42	-72.21	-13.00	-59.21	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 850 / TX / CH 190

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
57.1600	-49.46	0.86	-2.8	-53.12	-13.00	-40.12	V
147.3700	-55.33	1.42	0.44	-56.31	-13.00	-43.31	V
169.6800	-58.08	1.56	2.48	-57.16	-13.00	-44.16	V
263.7700	-69.99	1.93	5.41	-66.51	-13.00	-53.51	V
342.3400	-76.05	2.18	5.8	-72.43	-13.00	-59.43	V
654.6800	-75.7	3.04	6.3	-72.44	-13.00	-59.44	V
67.8300	-55.3	0.94	-1.85	-58.09	-13.00	-45.09	H
99.8400	-57.57	1.15	-0.37	-59.09	-13.00	-46.09	H
169.6800	-54.83	1.56	2.48	-53.91	-13.00	-40.91	H
331.6700	-71.21	2.16	5.72	-67.65	-13.00	-54.65	H
509.1800	-77.15	2.69	5.99	-73.85	-13.00	-60.85	H
540.2200	-74.11	2.78	6.26	-70.63	-13.00	-57.63	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 850 / TX / CH 251

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
101.7800	-60.27	1.16	-0.64	-62.07	-13.00	-49.07	V
190.0500	-69.35	1.62	4	-66.97	-13.00	-53.97	V
288.0200	-76.48	2.02	5.38	-73.12	-13.00	-60.12	V
392.7800	-77.07	2.33	5.99	-73.41	-13.00	-60.41	V
515.9700	-81.87	2.7	6.06	-78.51	-13.00	-65.51	V
692.5100	-80.25	3.12	6.47	-76.90	-13.00	-63.90	V
67.8300	-55.81	0.94	-1.85	-58.60	-13.00	-45.60	H
159.9800	-50.86	1.48	1.43	-50.91	-13.00	-37.91	H
169.6800	-54.74	1.56	2.48	-53.82	-13.00	-40.82	H
226.9100	-62.13	1.79	5.37	-58.55	-13.00	-45.55	H
280.2600	-67.02	2	5.31	-63.71	-13.00	-50.71	H
381.1400	-71.86	2.31	5.98	-68.19	-13.00	-55.19	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 850 / TX / CH 128

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
67.8300	-52.43	0.94	-1.85	-55.22	-13.00	-42.22	V
176.4700	-66.01	1.59	3.21	-64.39	-13.00	-51.39	V
265.7100	-70.14	1.95	5.32	-66.77	-13.00	-53.77	V
386.9600	-78.32	2.32	6	-74.64	-13.00	-61.64	V
524.7000	-81.49	2.73	6.05	-78.17	-13.00	-65.17	V
642.0700	-74.83	3.01	6.14	-71.70	-13.00	-58.70	V
159.0100	-51.86	1.48	1.36	-51.98	-13.00	-38.98	H
226.9100	-63.55	1.79	5.37	-59.97	-13.00	-46.97	H
284.1400	-69.43	2.01	5.35	-66.09	-13.00	-53.09	H
392.7800	-73.2	2.33	5.99	-69.54	-13.00	-56.54	H
472.3200	-76.12	2.62	5.72	-73.02	-13.00	-60.02	H
642.0700	-71.38	3.01	6.14	-68.25	-13.00	-55.25	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 850 / TX / CH 190
Temperature: 21°C
Humidity: 56 % RH

Test Date: July 13, 2015

Tested by: Owen Wu

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
67.8300	-51.87	0.94	-1.85	-54.66	-13.00	-41.66	V
71.7100	-57.75	0.97	-1.61	-60.33	-13.00	-47.33	V
147.3700	-56.41	1.42	0.44	-57.39	-13.00	-44.39	V
278.3200	-75.27	2	5.27	-72.00	-13.00	-59.00	V
503.3600	-82	2.7	5.93	-78.77	-13.00	-65.77	V
654.6800	-78.34	3.04	6.3	-75.08	-13.00	-62.08	V
67.8300	-54.46	0.94	-1.85	-57.25	-13.00	-44.25	H
159.0100	-52.31	1.48	1.36	-52.43	-13.00	-39.43	H
226.9100	-62.43	1.79	5.37	-58.85	-13.00	-45.85	H
343.3100	-74.18	2.19	5.8	-70.57	-13.00	-57.57	H
480.0800	-76.25	2.64	5.54	-73.35	-13.00	-60.35	H
550.8900	-76.42	2.81	6.17	-73.06	-13.00	-60.06	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 850 / TX / CH 251

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
143.4900	-60.26	1.4	0.08	-61.58	-13.00	-48.58	V
331.6700	-76	2.16	5.72	-72.44	-13.00	-59.44	V
403.4500	-77.78	2.41	5.96	-74.23	-13.00	-61.23	V
497.5400	-81.07	2.69	5.87	-77.89	-13.00	-64.89	V
609.0900	-80.87	2.94	6.31	-77.50	-13.00	-64.50	V
695.4200	-80.4	3.12	6.44	-77.08	-13.00	-64.08	V
32.9100	-47.06	0.66	-19.46	-67.18	-13.00	-54.18	H
140.5800	-60.11	1.39	-0.19	-61.69	-13.00	-48.69	H
257.9500	-66.32	1.89	5.61	-62.60	-13.00	-49.60	H
517.9100	-78.03	2.7	6.08	-74.65	-13.00	-61.65	H
668.2600	-75.17	3.07	6.3	-71.94	-13.00	-58.94	H
806.9700	-74.02	3.34	6.34	-71.02	-13.00	-58.02	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 1900 / TX / CH 512
 Temperature: 21°C
 Humidity: 56 % RH

Test Date: July 13, 2015
 Tested by: Owen Wu
 Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
99.8400	-59.56	1.15	-0.37	-61.08	-13.00	-48.08	V
169.6800	-56.12	1.56	2.48	-55.20	-13.00	-42.20	V
415.0900	-79.72	2.45	5.86	-76.31	-13.00	-63.31	V
540.2200	-81.54	2.78	6.26	-78.06	-13.00	-65.06	V
729.3700	-78.1	3.18	6.4	-74.88	-13.00	-61.88	V
778.8400	-78.54	3.3	6.12	-75.72	-13.00	-62.72	V
61.0400	-55.51	0.89	-2.15	-58.55	-13.00	-45.55	H
158.0400	-52.96	1.47	1.29	-53.14	-13.00	-40.14	H
276.3800	-64.44	1.99	5.23	-61.20	-13.00	-48.20	H
475.2300	-77.18	2.63	5.65	-74.16	-13.00	-61.16	H
700.2700	-75.61	3.11	6.39	-72.33	-13.00	-59.33	H
818.6100	-73.71	3.38	6.2	-70.89	-13.00	-57.89	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 1900 / TX / CH 661

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
147.3700	-58.01	1.42	0.44	-58.99	-13.00	-45.99	V
276.3800	-70.46	1.99	5.23	-67.22	-13.00	-54.22	V
385.0200	-78.14	2.31	5.99	-74.46	-13.00	-61.46	V
610.0600	-80.98	2.94	6.29	-77.63	-13.00	-64.63	V
772.0500	-77.55	3.28	6.32	-74.51	-13.00	-61.51	V
969.9300	-76	3.67	6.31	-73.36	-13.00	-60.36	V
99.8400	-57.17	1.15	-0.37	-58.69	-13.00	-45.69	H
331.6700	-72.12	2.16	5.72	-68.56	-13.00	-55.56	H
475.2300	-76.68	2.63	5.65	-73.66	-13.00	-60.66	H
664.3800	-76.19	3.06	6.3	-72.95	-13.00	-59.95	H
819.5800	-74.02	3.39	6.2	-71.21	-13.00	-58.21	H
987.3900	-72.37	3.71	6.23	-69.85	-13.00	-56.85	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 1900 / TX / CH 810

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
169.6800	-56.88	1.56	2.48	-55.96	-13.00	-42.96	V
343.3100	-76.15	2.19	5.8	-72.54	-13.00	-59.54	V
392.7800	-78.06	2.33	5.99	-74.40	-13.00	-61.40	V
614.9100	-80.18	2.94	6.2	-76.92	-13.00	-63.92	V
696.3900	-79.47	3.12	6.43	-76.16	-13.00	-63.16	V
935.9800	-76.28	3.6	6.4	-73.48	-13.00	-60.48	V
67.8300	-55.73	0.94	-1.85	-58.52	-13.00	-45.52	H
226.9100	-63.92	1.79	5.37	-60.34	-13.00	-47.34	H
331.6700	-71.73	2.16	5.72	-68.17	-13.00	-55.17	H
508.2100	-77.37	2.69	5.98	-74.08	-13.00	-61.08	H
665.3500	-75.1	3.06	6.3	-71.86	-13.00	-58.86	H
807.9400	-73.7	3.34	6.3	-70.74	-13.00	-57.74	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 1900 / TX / CH 512

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
67.8300	-53.97	0.94	-1.85	-56.76	-13.00	-43.76	V
169.6800	-57.89	1.56	2.48	-56.97	-13.00	-43.97	V
265.7100	-70.64	1.95	5.32	-67.27	-13.00	-54.27	V
473.2900	-81.53	2.62	5.7	-78.45	-13.00	-65.45	V
758.4700	-77.9	3.22	6.27	-74.85	-13.00	-61.85	V
999.0300	-75.24	3.73	6.2	-72.77	-13.00	-59.77	V
67.8300	-56.06	0.94	-1.85	-58.85	-13.00	-45.85	H
101.7800	-57.2	1.16	-0.64	-59.00	-13.00	-46.00	H
169.6800	-54.01	1.56	2.48	-53.09	-13.00	-40.09	H
226.9100	-61.81	1.79	5.37	-58.23	-13.00	-45.23	H
276.3800	-63.78	1.99	5.23	-60.54	-13.00	-47.54	H
381.1400	-70.21	2.31	5.98	-66.54	-13.00	-53.54	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 1900 / TX / CH 661**Test Date:** July 13, 2015**Temperature:** 21°C**Tested by:** Owen Wu**Humidity:** 56 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
57.1600	-50.06	0.86	-2.8	-53.72	-13.00	-40.72	V
226.9100	-70.02	1.79	5.37	-66.44	-13.00	-53.44	V
392.7800	-76.82	2.33	5.99	-73.16	-13.00	-60.16	V
654.6800	-79.79	3.04	6.3	-76.53	-13.00	-63.53	V
800.1800	-77.67	3.33	6.52	-74.48	-13.00	-61.48	V
921.4300	-77.23	3.58	6.57	-74.24	-13.00	-61.24	V
67.8300	-55.97	0.94	-1.85	-58.76	-13.00	-45.76	H
149.3100	-51.66	1.42	0.62	-52.46	-13.00	-39.46	H
331.6700	-71.92	2.16	5.72	-68.36	-13.00	-55.36	H
475.2300	-76.57	2.63	5.65	-73.55	-13.00	-60.55	H
585.8100	-76.84	2.89	6.11	-73.62	-13.00	-60.62	H
729.3700	-72.78	3.18	6.4	-69.56	-13.00	-56.56	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 1900 / TX / CH 810**Test Date:** July 13, 2015**Temperature:** 21°C**Tested by:** Owen Wu**Humidity:** 56 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
67.8300	-53.44	0.94	-1.85	-56.23	-13.00	-43.23	V
228.8500	-70.7	1.79	5.38	-67.11	-13.00	-54.11	V
415.0900	-78.62	2.45	5.86	-75.21	-13.00	-62.21	V
625.5800	-80.18	2.96	6.16	-76.98	-13.00	-63.98	V
729.3700	-79.2	3.18	6.4	-75.98	-13.00	-62.98	V
968.9600	-76.45	3.67	6.32	-73.80	-13.00	-60.80	V
223.0300	-61.92	1.77	5.35	-58.34	-13.00	-45.34	H
383.0800	-70.75	2.31	5.99	-67.07	-13.00	-54.07	H
540.2200	-74.31	2.78	6.26	-70.83	-13.00	-57.83	H
645.9500	-75.43	3.02	6.21	-72.24	-13.00	-59.24	H
819.5800	-73.64	3.39	6.2	-70.83	-13.00	-57.83	H
969.9300	-73.01	3.67	6.31	-70.37	-13.00	-57.37	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Above 1GHz**Operation Mode:** GSM 850 / TX / CH 128**Test Date:** July 13, 2015**Temperature:** 21°C**Tested by:** Owen Wu**Humidity:** 56 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2470.000	-37.6	6.3	6.06	-37.84	-13.00	-24.84	V
4122.000	-42.75	8.47	9.5	-41.72	-13.00	-28.72	V
N/A							
2470.000	-35.04	6.3	6.06	-35.28	-13.00	-22.28	H
4122.000	-38.7	8.47	9.5	-37.67	-13.00	-24.67	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 850 / TX / CH 190

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2512.000	-41.18	6.37	6.13	-41.42	-13.00	-28.42	V
4185.000	-40.72	8.49	9.55	-39.66	-13.00	-26.66	V
N/A							
2512.000	-37.14	6.37	6.13	-37.38	-13.00	-24.38	H
4185.000	-38.01	8.49	9.55	-36.95	-13.00	-23.95	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 850 / TX / CH 251

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2547.000	-40.27	6.42	6.22	-40.47	-13.00	-27.47	V
4241.000	-39.35	8.54	9.59	-38.30	-13.00	-25.30	V
N/A							
2547.000	-36.82	6.42	6.22	-37.02	-13.00	-24.02	H
4241.000	-38.51	8.54	9.59	-37.46	-13.00	-24.46	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 850 / TX / CH 128

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1651.000	-44.03	5.05	6.03	-43.05	-13.00	-30.05	V
2470.000	-38.68	6.3	6.06	-38.92	-13.00	-25.92	V
N/A							
1651.000	-42.51	5.05	6.03	-41.53	-13.00	-28.53	H
2470.000	-34.91	6.3	6.06	-35.15	-13.00	-22.15	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 850 / TX / CH 190

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1672.000	-44.79	5.07	5.99	-43.87	-13.00	-30.87	V
2512.000	-39.57	6.37	6.13	-39.81	-13.00	-26.81	V
N/A							
2512.000	-37.99	6.37	6.13	-38.23	-13.00	-25.23	H
4185.000	-38.6	8.49	9.55	-37.54	-13.00	-24.54	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 850 / TX / CH 251

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2547.000	-42.86	6.42	6.22	-43.06	-13.00	-30.06	V
4241.000	-36.57	8.54	9.59	-35.52	-13.00	-22.52	V
N/A							
2547.000	-37.77	6.42	6.22	-37.97	-13.00	-24.97	H
4241.000	-35.36	8.54	9.59	-34.31	-13.00	-21.31	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 1900 / TX / CH 512

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-41.96	8.2	9.1	-41.06	-13.00	-28.06	V
5550.000	-43.1	10.06	10.81	-42.35	-13.00	-29.35	V
N/A							
3702.000	-35.12	8.2	9.1	-34.22	-13.00	-21.22	H
5550.000	-31.28	10.06	10.81	-30.53	-13.00	-17.53	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 1900 / TX / CH 661

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-38.94	8.23	9.16	-38.01	-13.00	-25.01	V
5641.000	-44.29	10.18	10.83	-43.64	-13.00	-30.64	V
N/A							
3758.000	-33.69	8.23	9.16	-32.76	-13.00	-19.76	H
5641.000	-31.49	10.18	10.83	-30.84	-13.00	-17.84	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GSM 1900 / TX / CH 810

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3821.000	-42.01	8.29	9.22	-41.08	-13.00	-28.08	V
5732.000	-45.82	10.24	10.85	-45.21	-13.00	-32.21	V
N/A							
3821.000	-31.08	8.29	9.22	-30.15	-13.00	-17.15	H
5732.000	-34.87	10.24	10.85	-34.26	-13.00	-21.26	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 1900 / TX / CH 512

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-42.69	8.2	9.1	-41.79	-13.00	-28.79	V
5550.000	-44.37	10.06	10.81	-43.62	-13.00	-30.62	V
N/A							
3702.000	-36.49	8.2	9.1	-35.59	-13.00	-22.59	H
5550.000	-32.31	10.06	10.81	-31.56	-13.00	-18.56	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 1900 / TX / CH 661

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-41.79	8.23	9.16	-40.86	-13.00	-27.86	V
5641.000	-45.37	10.18	10.83	-44.72	-13.00	-31.72	V
N/A							
3758.000	-35.12	8.23	9.16	-34.19	-13.00	-21.19	H
5641.000	-32.34	10.18	10.83	-31.69	-13.00	-18.69	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

Operation Mode: GPRS 1900 / TX / CH 810

Test Date: July 13, 2015

Temperature: 21°C

Tested by: Owen Wu

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3821.000	-45.05	8.29	9.22	-44.12	-13.00	-31.12	V
5732.000	-45.35	10.24	10.85	-44.74	-13.00	-31.74	V
N/A							
3821.000	-35.16	8.29	9.22	-34.23	-13.00	-21.23	H
5732.000	-34.89	10.24	10.85	-34.28	-13.00	-21.28	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.


7.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

LIMIT

According to FCC §2.1055, FCC §22.355, .FCC §24.235.

Frequency Tolerance: 2.5 ppm

Test Configuration

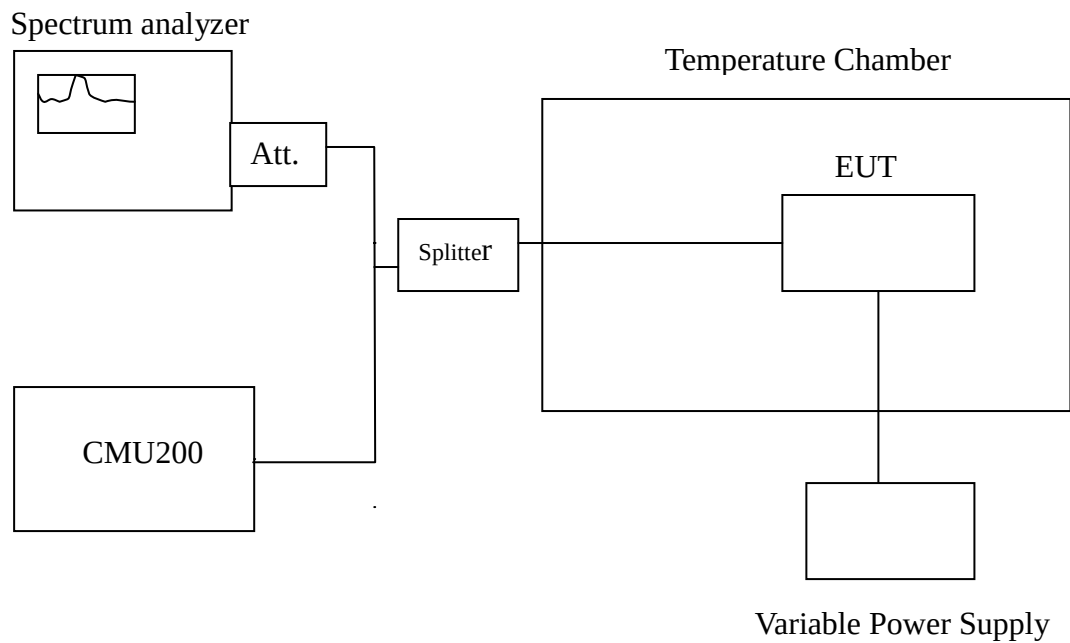

Remark: Measurement setup for testing on Antenna connector.

TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

No non-compliance noted.

Reference Frequency: GSM Mid Channel 836.6 MHz @ 20°C				
Limit: ± 2.5 ppm = 2090 Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
3.8	50	836600019	25	2091
	40	836600006	12	
	30	836599994	0	
	20	836599994	0	
	10	836600014	20	
	0	836600009	15	
	-10	836599992	-2	
	-20	836599981	-13	
	-30	836599979	-15	

Reference Frequency: GSM Mid Channel 1880 MHz @ 20°C				
Limit: ± 2.5 ppm = 4700 Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
3.8	50	1880000011	19	4700
	40	1879999991	-1	
	30	1879999996	4	
	20	1879999992	0	
	10	1879999998	6	
	0	1879999982	-10	
	-10	1880000023	31	
	-20	1880000012	20	
	-30	1879999980	-12	

Reference Frequency: GPRS Mid Channel 836.6 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2090 Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
3.8	50	836600021	24	2091
	40	836599993	-4	
	30	836599991	-6	
	20	836599997	0	
	10	836600002	5	
	0	836599981	-16	
	-10	836599991	-6	
	-20	836600000	3	
	-30	836599991	-6	


Reference Frequency: GPRS Mid Channel 1880 MHz @ 20°C				
Limit: ± 2.5 ppm = 4700 Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
3.8	50	1879999994	-4	4700
	40	1880000016	18	
	30	1880000016	18	
	20	1879999998	0	
	10	1879999990	-8	
	0	1880000019	21	
	-10	1879999988	-10	
	-20	1880000002	4	
	-30	1880000017	19	

7.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

LIMIT

According to FCC §2.1055, FCC §22.355, .FCC §24.235,

Test Configuration

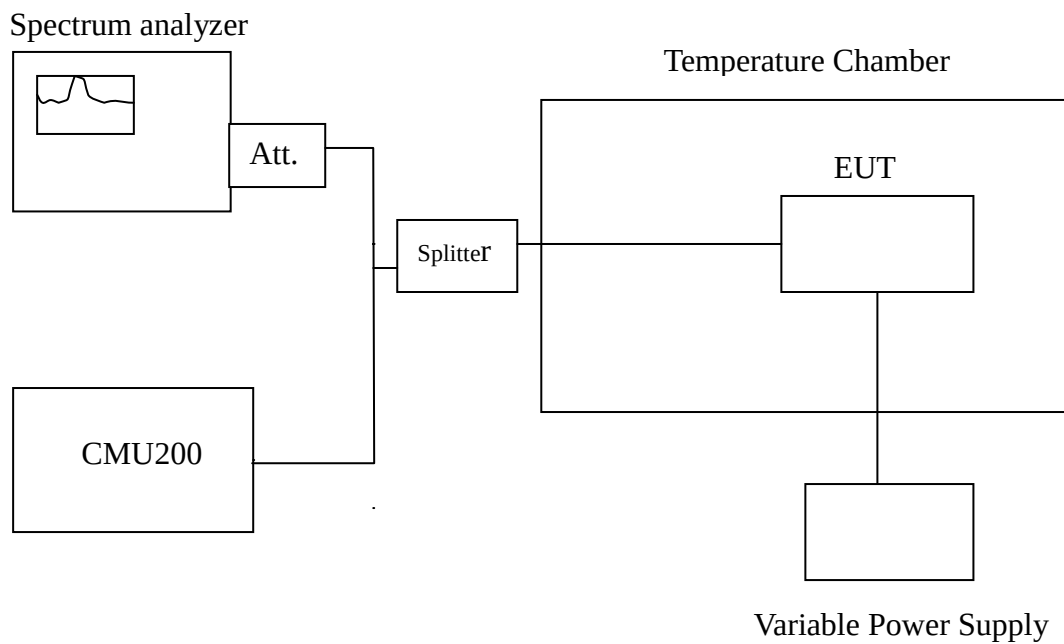

Remark: Measurement setup for testing on Antenna connector.

TEST PROCEDURE

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

No non-compliance noted.

Reference Frequency: GSM Mid Channel 836.6 MHz @ 20°C				
Limit: ± 2.5 ppm = 2090Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
4.37	20	836600017	25	2091
3.8		836599992	0	
3.23		836600006	14	

Reference Frequency: GSM Mid Channel 1880 MHz @ 20°C				
Limit: ± 2.5 ppm = 4700 Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
4.37	20	1880000012	17	4700
3.8		1879999995	0	
3.23		1879999996	1	

Reference Frequency: GPRS Mid Channel 836.6 MHz @ 20°C				
Limit: ± 2.5 ppm = 2090Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
4.37	20	836600008	3	2091
3.8		836600005	0	
3.23		836600019	14	

Reference Frequency: GPRS Mid Channel 1880 MHz @ 20°C				
Limit: ± 2.5 ppm = 4700 Hz				
Power Supply Vdc	Environment Temperature (°C)	Frequency (Hz)	Delta (Hz)	Limit (Hz)
4.37	20	1879999989	-12	4700
3.8		1880000001	0	
3.23		1879999981	-20	