

FCC PART 15.247 TEST REPORT

For

Shanghai HowayGIS Co., Ltd

RM230, Fawkes Building, No.1985, Road Chunshen, Shanghai, China

FCC ID: 2AAZDT1XN2017

Report Type: Original Report	Product Type: Industrial Data Controller/Collector
Test Engineer: Ada Yu <i>Ada Yu</i>	
Report Number: RKS170119001-00A	
Report Date: 2017-01-19	
Reviewed By: Oscar Ye RF Leader <i>Oscar Ye</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1310& §2.1093 –RF EXPOSURE	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	28

APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST DATA	53
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Manufacturer	Shanghai HowayGIS Co., Ltd
Tested Model	T17
Series Model	T17M, T17N, HC1
Product Type	Industrial Data Controller/Collector
Dimension	200 mm(L)×96 mm(W)×32 mm(H)
Power input	DC 3.7V from rechargeable battery or DC 5V supplied by adapter

Note: The difference between tested model and series model was explained in the declaration letter.

Adapter Information:

Model: PSAC10R-050

Input: AC 100-240V, 50/60 Hz, 0.3A, 23-32VA

Output: DC 5.0V, 2.0A

** All measurement and test data in this report was gathered from production sample serial number: 20161123001. (Assigned by BACL, Kunshan). The EUT was received on 2016-11-23.*

Objective

This test report is prepared on behalf of Shanghai HowayGIS Co., Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DTS and Part 22H24E PCB submissions with FCC ID: 2AAZDT1XN2017.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and DA 00-705 March 30, 2000.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.26 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6 GHz ~18 GHz	4.92dB
	18 GHz~40 GHz	4.88dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was controlled by the software.

EUT Exercise Software

Lab_tool

GFSK: Power level 3

$\pi/4$ -DQPSK: Power level 2

8DPSK: Power level 2

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
Howay	Adapter	PSM10R-050	N/A

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
USB Cable	Un-shielding	0.8	EUT	Notebook

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

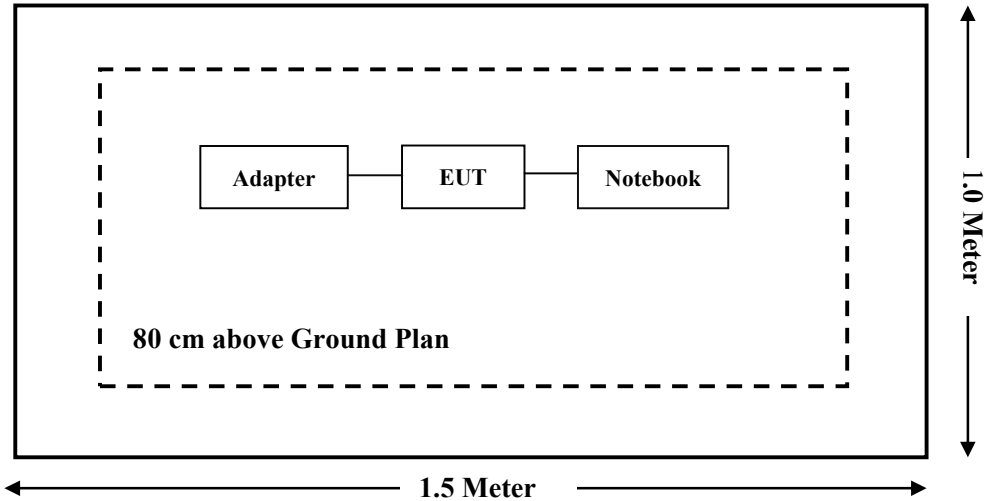

For Radiated Emissions (Above 1GHz):

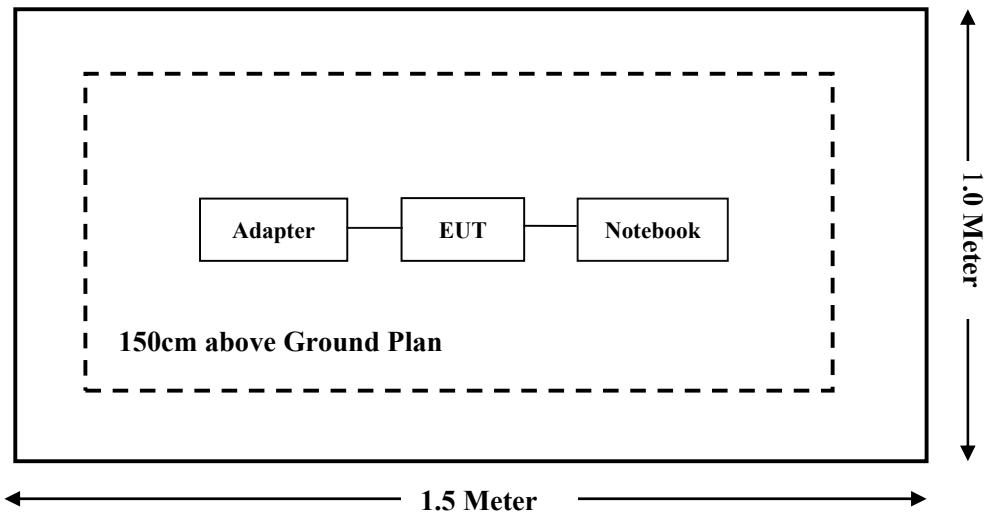

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1093	RF Exposure	Compliance*
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Compliance*, please refer to the SAR report: RKS161122011-20A.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Sonoma Instrument	Amplifier	330	171377	2016-12-12	2017-12-11
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
R&S	Auto test Software	EMC32	100361	/	/
Haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-11
RF Conducted Test					
Rohde & Schwarz	OSP120 Base Unit	OSP120	101247	2016-07-04	2017-07-03
BACL	EMC32 Version	EMC32	09106	--	--
Rohde & Schwarz	SMBV100A Vector Signal Generator	SMBV100A	261558	2016-07-04	2017-07-03
Rohde & Schwarz	SMB 100A Signal Generator	SMB100A	110390	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-20
BACL	Temperature & Humidity Chamber	BTH-150	30023	2016-10-10	2017-10-09
HowayGIS	RF Cable	N/A	N/A	2017-01-12	2018-01-11
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2016-11-25	2017-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-09
ROHDE&SCHWARZ	LISN	ENV216	3560655016	2016-11-25	2017-11-24
Rohde & Schwarz	CE Test software	EMC 32	100357	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2016-09-08	2017-09-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310& §2.1093 –RF EXPOSURE

Applicable Standard

According to§15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

Test Result

Compliance, please refer to the SAR report: RKS161122011-20A.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PIFA antenna arrangement for Bluetooth, which the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

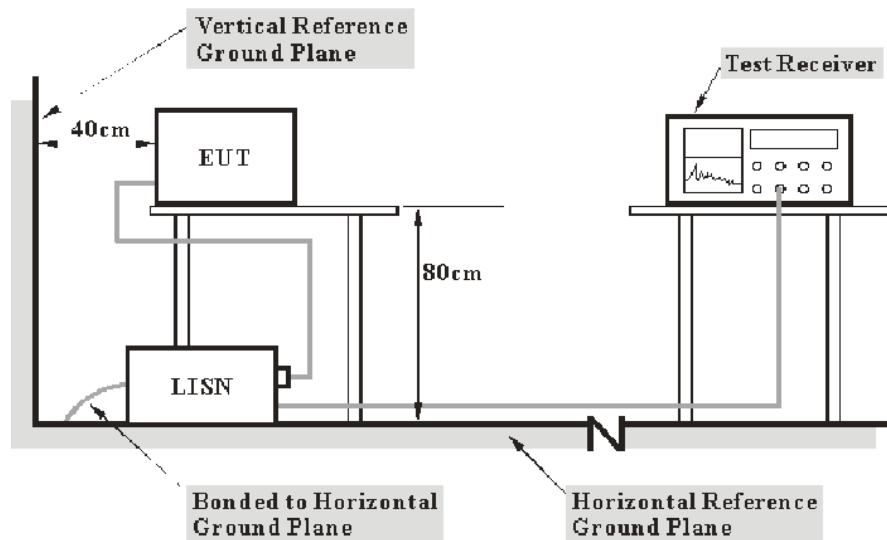

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	58 %
ATM Pressure:	101.3 kPa

The testing was performed by Ada Yu on 2017-01-17.

EUT operation mode: Transmitting

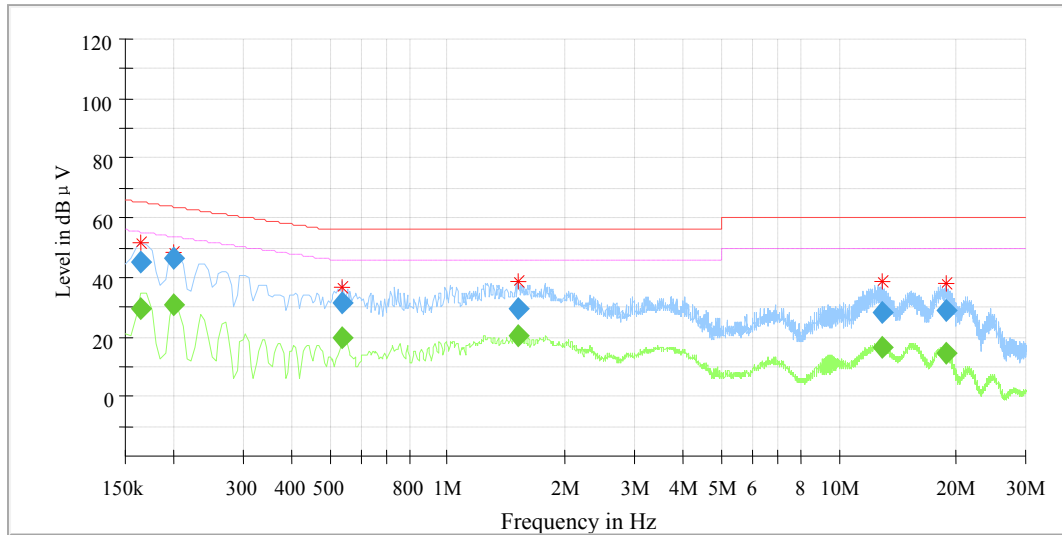AC 120V/60 Hz, Line

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.165000	---	29.46	9.000	L1	10.0	25.75	55.21	Compliance
0.165000	45.32	---	9.000	L1	10.0	19.89	65.21	Compliance
0.200000	---	30.80	9.000	L1	9.9	22.81	53.61	Compliance
0.200000	46.46	---	9.000	L1	9.9	17.15	63.61	Compliance
0.535000	---	19.62	9.000	L1	9.9	26.38	46.00	Compliance
0.535000	31.73	---	9.000	L1	9.9	24.27	56.00	Compliance
1.510000	---	20.33	9.000	L1	9.8	25.67	46.00	Compliance
1.510000	29.35	---	9.000	L1	9.8	26.65	56.00	Compliance
12.860000	---	16.52	9.000	L1	10.0	33.48	50.00	Compliance
12.860000	28.16	---	9.000	L1	10.0	31.84	60.00	Compliance
18.700000	---	14.59	9.000	L1	10.3	35.41	50.00	Compliance
18.700000	28.74	---	9.000	L1	10.3	31.26	60.00	Compliance

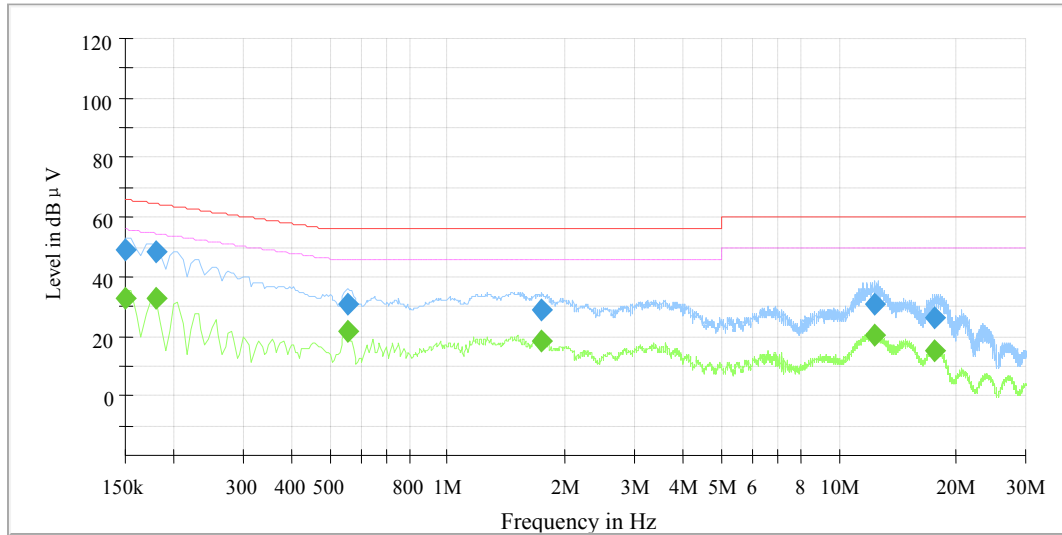AC 120V/60 Hz, Neutral



Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	---	32.54	9.000	N	10.0	23.46	56.00	Compliance
0.150000	48.70	---	9.000	N	10.0	17.30	66.00	Compliance
0.180000	---	32.87	9.000	N	10.0	21.62	54.49	Compliance
0.180000	48.17	---	9.000	N	10.0	16.32	64.49	Compliance
0.555000	---	21.98	9.000	N	9.9	24.02	46.00	Compliance
0.555000	30.83	---	9.000	N	9.9	25.17	56.00	Compliance
1.745000	---	18.62	9.000	N	9.8	27.38	46.00	Compliance
1.745000	28.92	---	9.000	N	9.8	27.08	56.00	Compliance
12.365000	---	20.29	9.000	N	9.9	29.71	50.00	Compliance
12.365000	30.55	---	9.000	N	9.9	29.45	60.00	Compliance
17.610000	---	15.08	9.000	N	10.1	34.92	50.00	Compliance
17.610000	26.35	---	9.000	N	10.1	33.65	60.00	Compliance

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

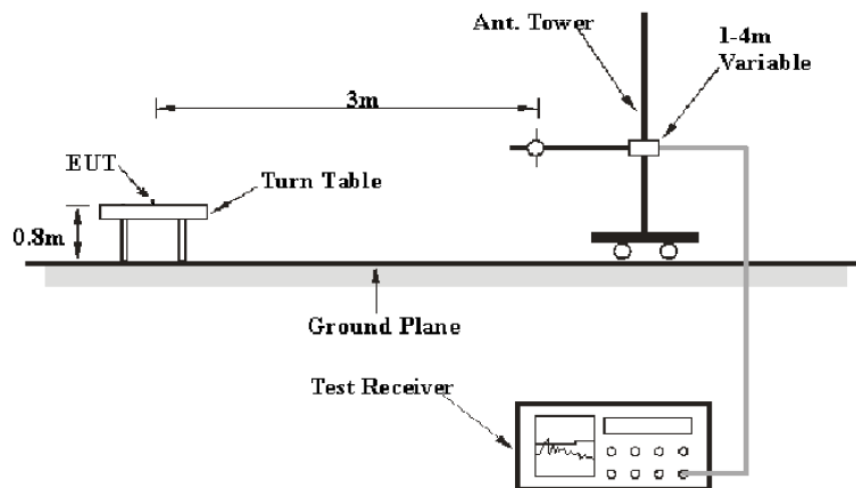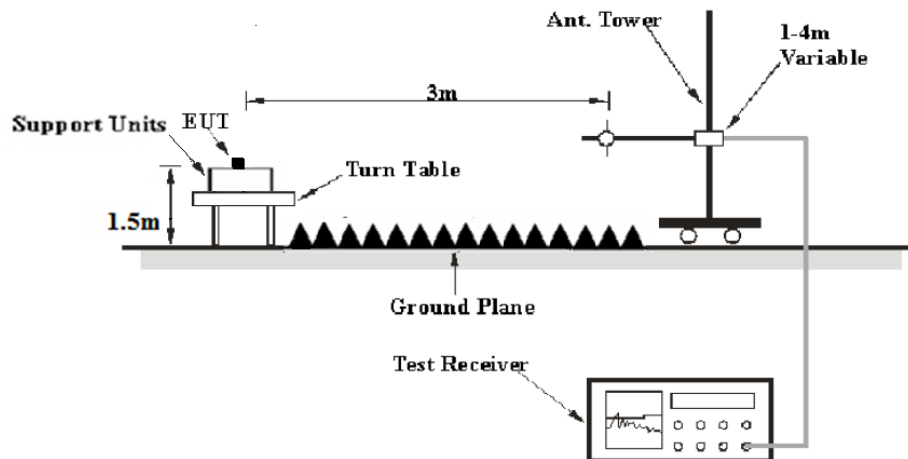EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Duty cycle	Detector
1GHz – 25GHz	1MHz	3 MHz	Any	PK
	1MHz	10 Hz	>98%	Ave.
	1MHz	1/T	<98%	

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cisp}$$

In BACL, $U_{(L_m)}$ is less than $+ U_{cisp}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	23.8 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Ada Yu on 2017-01-12 to 2017-01-13.

EUT operation mode: Transmitting

30MH -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is BDR Mode (GFSK))


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
72.00	44.03	QP	86	154	V	-16.93	27.10	40.00	12.90
263.79	50.58	QP	148	140	H	-6.00	44.58	46.00	7.42
2402.00	104.23	PK	328	233	V	-6.19	98.04	/	/
2402.00	95.34	Ave	328	233	V	-6.19	89.15	/	/
2402.00	102.15	PK	38	165	H	-6.19	95.96	/	/
2402.00	91.58	Ave	38	165	H	-6.19	85.39	/	/
2390.00	57.92	PK	63	167	H	-6.22	51.70	74.00	22.30
2390.00	51.26	Ave	63	167	H	-6.22	45.04	54.00	8.96
2400.00	71.99	PK	47	139	H	-6.19	65.80	74.00	8.20
2400.00	58.23	Ave	47	139	H	-6.19	52.04	54.00	1.96
4804.00	59.36	PK	122	226	H	1.61	60.97	74.00	13.03
4804.00	44.56	Ave	122	226	H	1.61	46.17	54.00	7.83
7206.00	58.69	PK	14	130	H	7.55	66.24	74.00	7.76
7206.00	43.39	Ave	28	217	H	7.55	50.94	54.00	3.06

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Middle Channel (2441 MHz)									
72.00	44.04	QP	331	114	V	-16.93	27.11	40.00	12.89
263.79	50.55	QP	98	168	H	-6.00	44.55	46.00	7.45
2441.00	103.84	PK	333	105	V	-6.10	97.83	/	/
2441.00	95.09	Ave	333	105	V	-6.10	89.08	/	/
2441.00	102.64	PK	301	127	H	-6.10	96.63	/	/
2441.00	91.53	Ave	301	127	H	-6.10	85.52	/	/
2208.41	66.55	PK	170	165	H	-6.62	59.93	74.00	14.07
2208.41	56.50	Ave	170	165	H	-6.62	49.88	54.00	4.12
4882.00	59.23	PK	11	249	V	1.79	61.02	74.00	12.98
4882.00	45.20	Ave	11	249	V	1.79	46.99	54.00	7.01
6306.12	52.92	PK	26	222	H	5.80	58.72	74.00	15.28
6306.12	41.33	Ave	26	222	H	5.80	47.13	54.00	6.87
7323.00	56.18	PK	247	203	H	7.67	63.85	74.00	10.15
7323.00	43.31	Ave	247	203	H	7.67	50.98	54.00	3.02


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
High Channel (2480MHz)									
72.00	44.06	QP	278	119	V	-16.93	27.13	40.00	12.87
263.79	50.56	QP	279	126	H	-6.00	44.56	46.00	7.44
2480.00	104.15	PK	246	114	V	-6.01	98.14	/	/
2480.00	96.19	Ave	246	114	V	-6.01	90.18	/	/
2480.00	103.01	PK	26	248	H	-6.01	97.00	/	/
2480.00	91.77	Ave	26	248	H	-6.01	85.76	/	/
2483.50	53.41	PK	152	184	H	-6.01	47.40	74.00	26.60
2483.50	47.00	Ave	152	184	H	-6.01	40.99	54.00	13.01
4960.00	59.25	PK	146	126	V	1.97	61.22	74.00	12.78
4960.00	44.26	Ave	146	126	V	1.97	46.23	54.00	7.77
6469.20	40.73	PK	80	220	H	5.80	46.53	74.00	27.47
6469.20	30.13	Ave	80	220	H	5.80	35.93	54.00	18.07
7440.00	58.26	PK	137	126	H	7.79	66.05	74.00	7.95
7440.00	43.12	Ave	137	126	H	7.79	50.91	54.00	3.09

Spurious Emissions at Antenna Port:


Low Channel

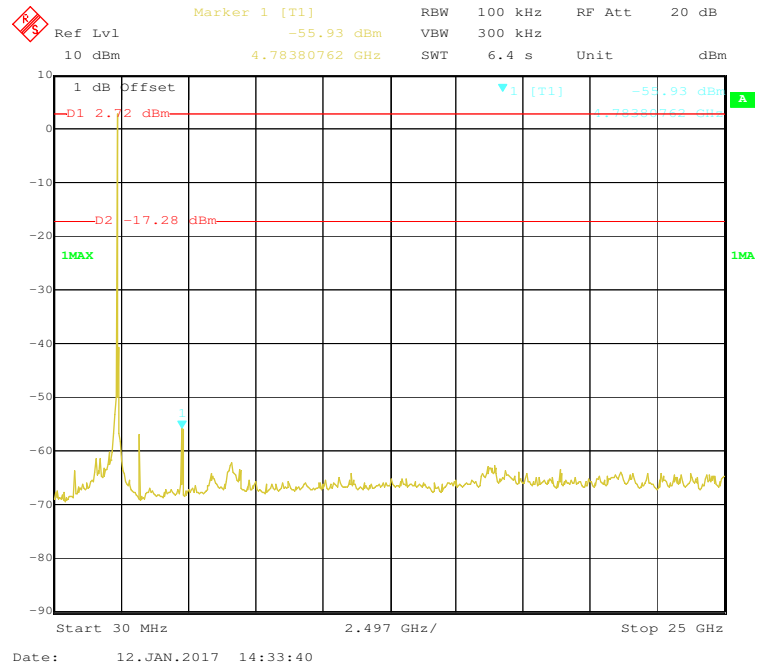

Middle Channel

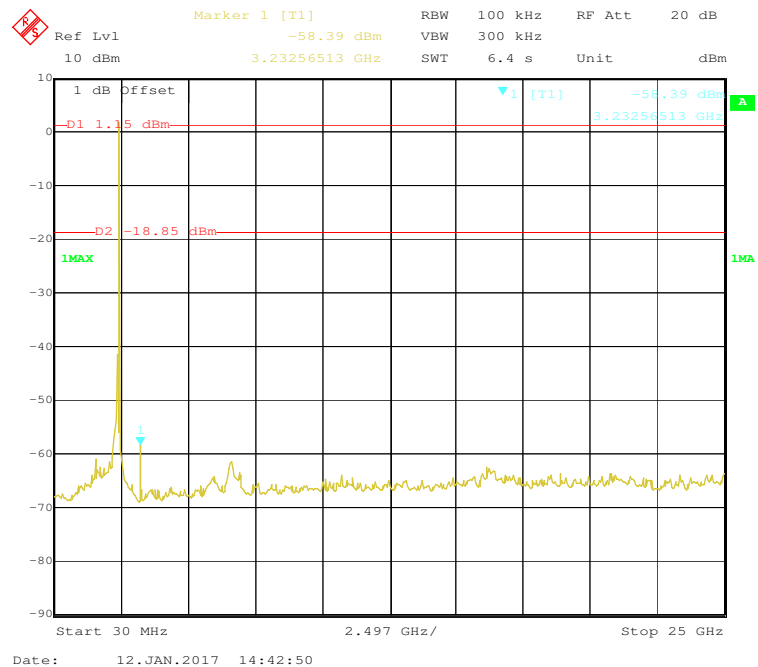

High Channel

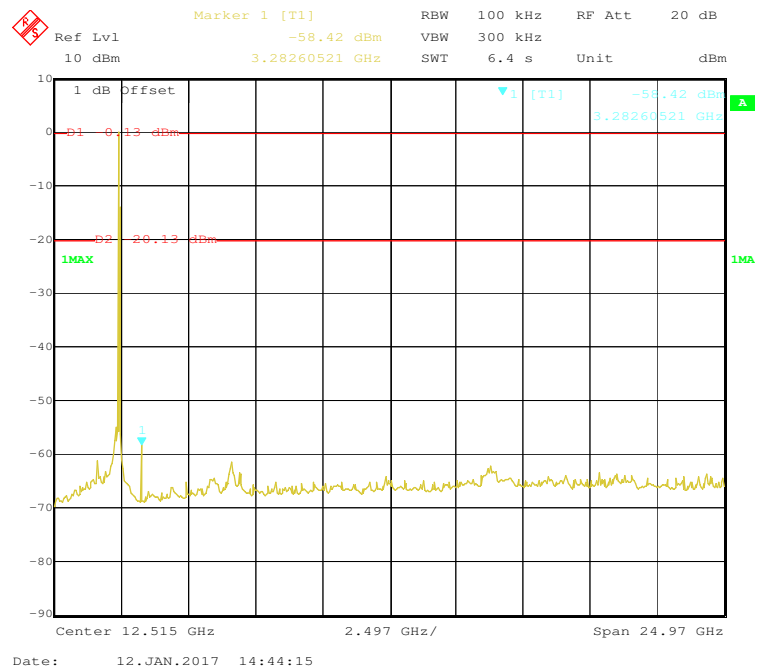

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Ada Yu on 2017-01-12 to 2017-01-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Result
BDR (GFSK)	Low	2402	1.004	Pass
	Adjacent	2403		
	Middle	2441	1.004	Pass
	Adjacent	2442		
	High	2480	1.004	Pass
	Adjacent	2479		
EDR ($\pi/4$ -DQPSK)	Low	2402	0.994	Pass
	Adjacent	2403		
	Middle	2441	0.994	Pass
	Adjacent	2442		
	High	2480	1.002	Pass
	Adjacent	2479		
EDR (8DPSK)	Low	2402	1.002	Pass
	Adjacent	2403		
	Middle	2441	0.994	Pass
	Adjacent	2442		
	High	2480	1.002	Pass
	Adjacent	2479		

Note: Limit = 20 dB bandwidth

BDR (GFSK): Low Channel

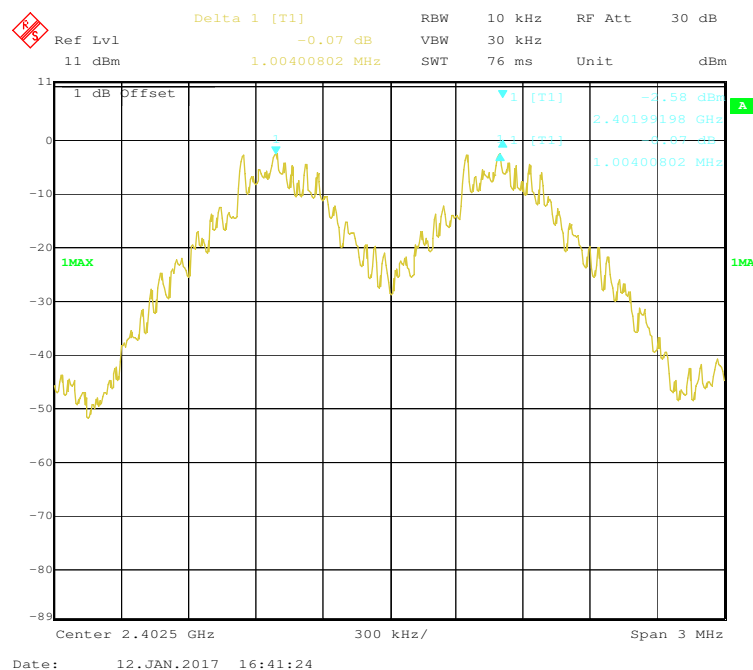

Delta 1 [T1]

Ref Lvl 11 dBm

11 dBm

1.00400802 MHz

RBW 10 kHz

VBW 30 kHz

SWT 76 ms

Unit dBm

30 dB

1 dB Offset

1 MAX

1 MIN

1 [T1] -0.70 dBm

2.44089770 GHz

-0.07 dB

1.00400802 MHz

Center 2.4415 GHz

300 kHz/

Span 3 MHz

Date: 12.JAN.2017 16:23:18

[illegible]

[illegible]


Delta 1 [T1] -0.12 dB
 RBW 30 kHz RF Att 30 dB
 Ref Lvl 11 dBm VBW 100 kHz
 11 dBm 993.98797595 kHz SWT 11.5 ms Unit dBm

1 dB Offset
 1MAX
 1 [T1] -1.97 dBm
 2.44099098 GHz
 993.98797595 kHz
 1 [T1] -2.12 dBm


Center 2.4415 GHz 400 kHz/
 Span 4 MHz

Date: 13.JAN.2017 17:20:55


EDR ($\pi/4$ -DQPSK): High Channel

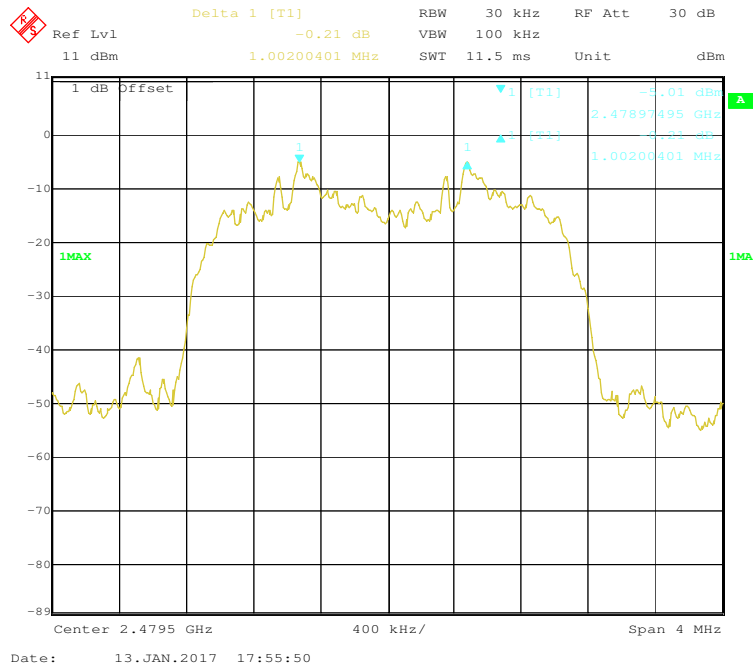


EDR (8DPSK): Low Channel

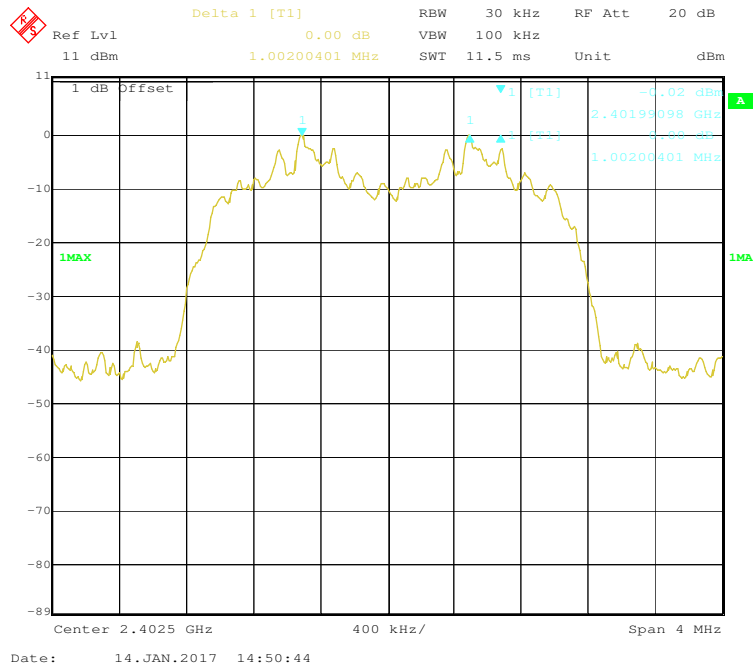

EDR (8DPSK): Middle Channel

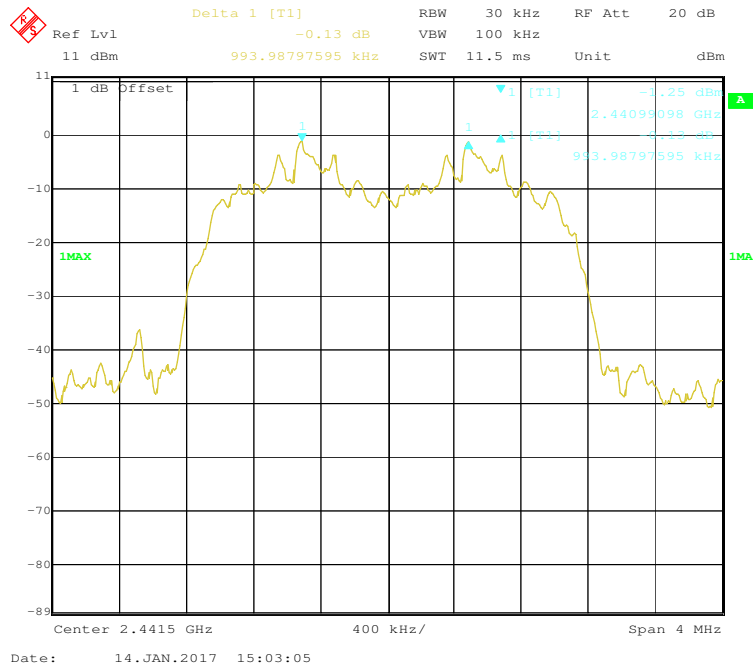

EDR (8DPSK): High Channel

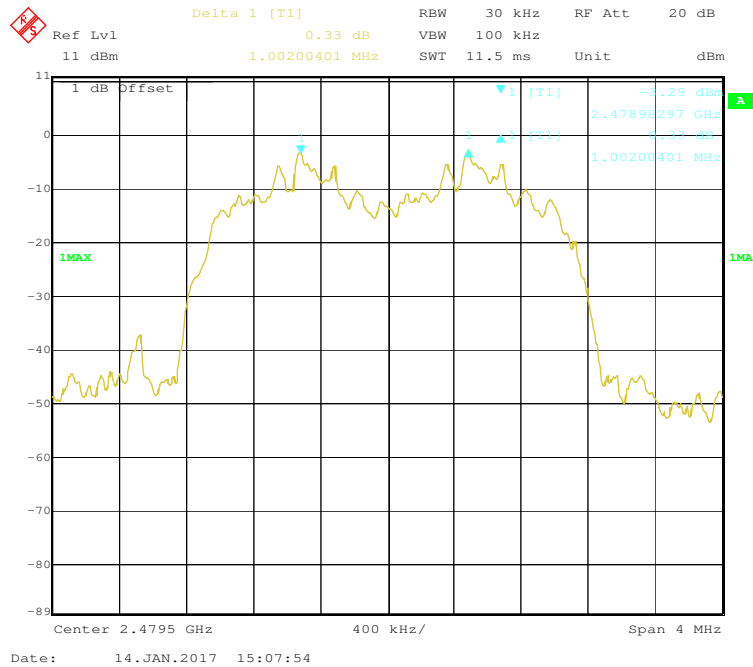

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	24.5 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Ada Yu on 2017-01-12 to 2017-01-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.941
	Middle	2441	0.934
	High	2480	0.942
EDR ($\pi/4$-DQPSK)	Low	2402	1.251
	Middle	2441	1.232
	High	2480	1.257
EDR (8DPSK)	Low	2402	1.226
	Middle	2441	1.232
	High	2480	1.226

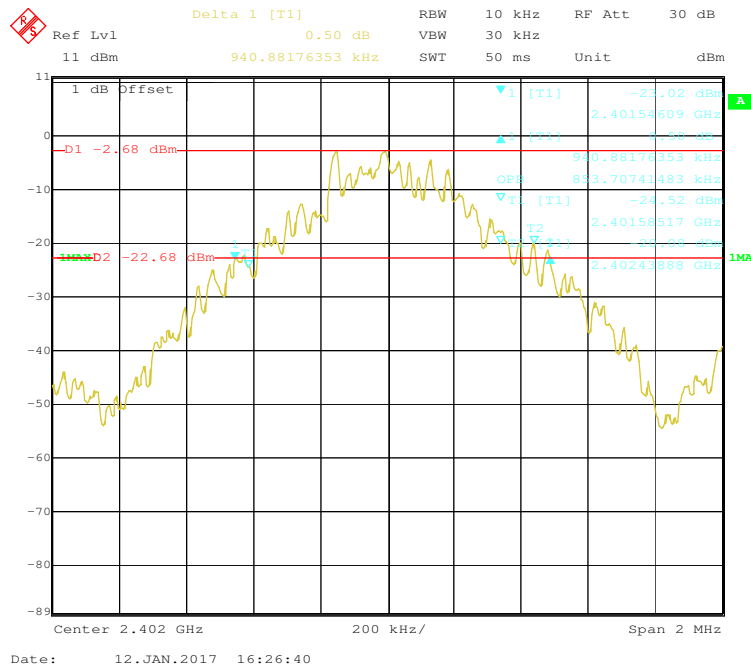BDR (GFSK): Low Channel



Delta 1 [T1] RBW 10 kHz RF Att 30 dB
 Ref Lvl -0.33 dB VBW 30 kHz
 11 dBm 933.86773547 kHz SWT 50 ms Unit dBm

1 dB Offset
 -D1 -3.59 dBm
 1MAX D2 -23.59 dBm
 1 [T1] -23.40 dBm
 2 [T1] -2.43 dBm
 3 [T1] -9.3.86773547 kHz
 4 [T1] -8.3.70741483 kHz
 5 [T1] -24.40 dBm
 6 [T1] 2.44058116 GHz
 7 [T1] -23.59 dBm
 8 [T1] 2.44143487 GHz

Center 2.441 GHz 200 kHz/ Span 2 MHz

Date: 12.JAN.2017 16:03:13

[illegible]

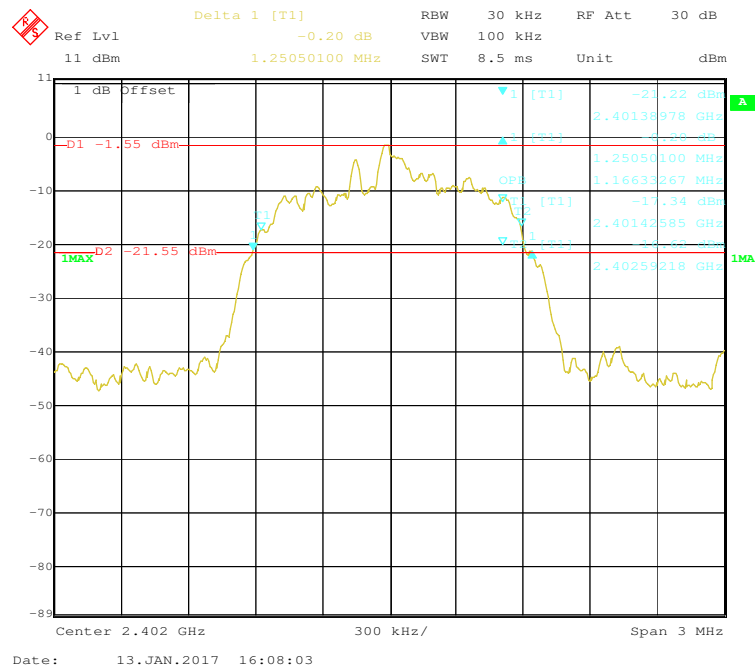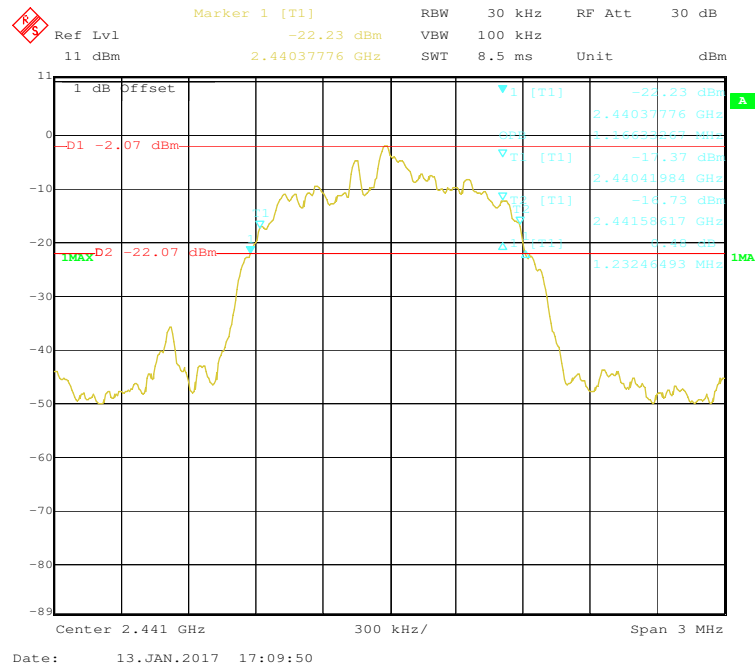EDR ($\pi/4$ -DQPSK): Low Channel**EDR($\pi/4$ -DQPSK): Middle Channel**

Delta 1 [T1] -0.35 dB RBW 30 kHz RF Att 30 dB

Ref Lvl 11 dBm 1.25651303 MHz VBW 100 kHz Unit dBm

1 dB Offset

D1 -3.74 dBm

1MAX D2 -23.74 dBm

Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 13.JAN.2017 17:35:19

Ref Lvl 11 dBm Delta 1 [T1] 0.17 dB RBW 30 kHz RF Att 20 dB
 1.22645291 MHz 1.14829659 MHz 2.40141984 GHz 2.40143591 GHz 2.40260421 GHz
 Unit dBm

Center 2.402 GHz 300 kHz/ Span 3 MHz

Date: 14. JAN. 2017 14:45:44

Marker 1 [T1] -21.59 dBm RBW 30 kHz RF Att 20 dB

Ref Lvl 11 dBm 2.44040782 GHz Unit dBm

1 dB Offset

D1 -1.37 dBm

D2 -21.37 dBm

1MAX

1.23246493 MHz

2.44040782 GHz

2.44159218 GHz

2.44044990 GHz

-21.59 dBm

-15.87 dBm

-18.30 dBm

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 14.JAN.2017 14:58:47

Delta 1 [T1] RBW 30 kHz RF Att 20 dB
 Ref Lvl -0.30 dB VBW 100 kHz
 11 dBm 1.22645291 MHz SWT 8.5 ms Unit dBm

1 dB Offset
 D1 -2.97 dBm
 D2 -22.97 dBm
 1MA

1 [T1] -22.98 dBm
 2.47941383 GHz
 1.22645291 MHz
 1.14228457 MHz
 T1 [T1] -17.52 dBm
 2.47944990 GHz
 T2 [T2] -17.51 dBm
 2.48055218 GHz

Center 2.48 GHz 300 kHz/
 Span 3 MHz

Date: 14.JAN.2017 15:09:20

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Ada Yu on 2017-01-13 to 2017-01-14.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15


BDR (GFSK): Number of Hopping Channels

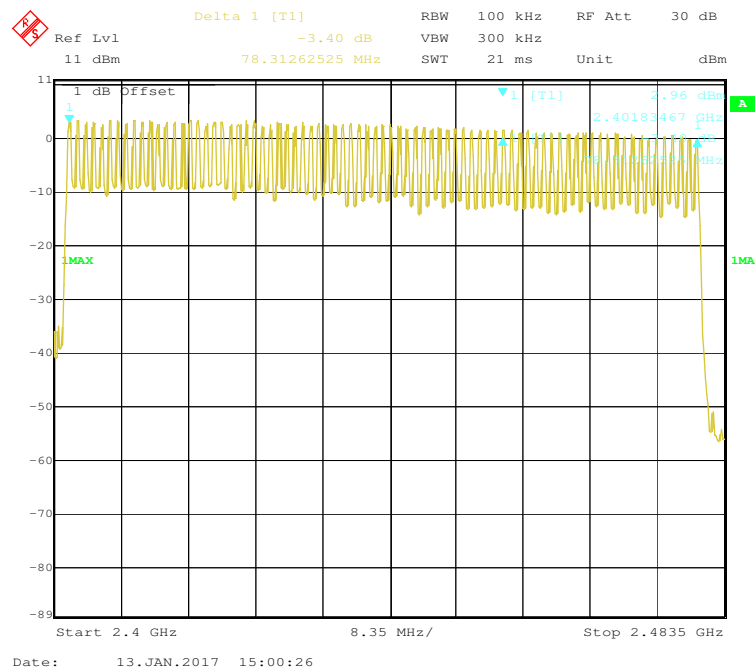

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

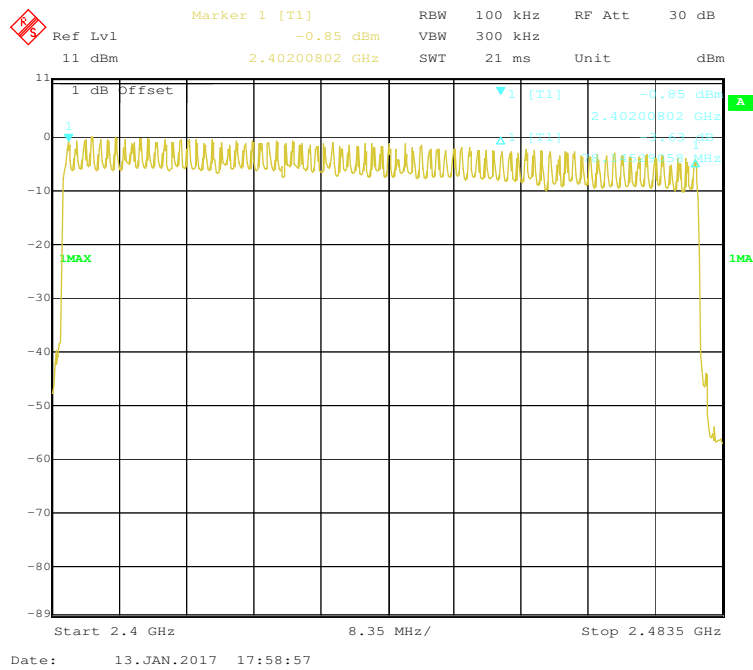

EDR (8DPSK): Number of Hopping Channels

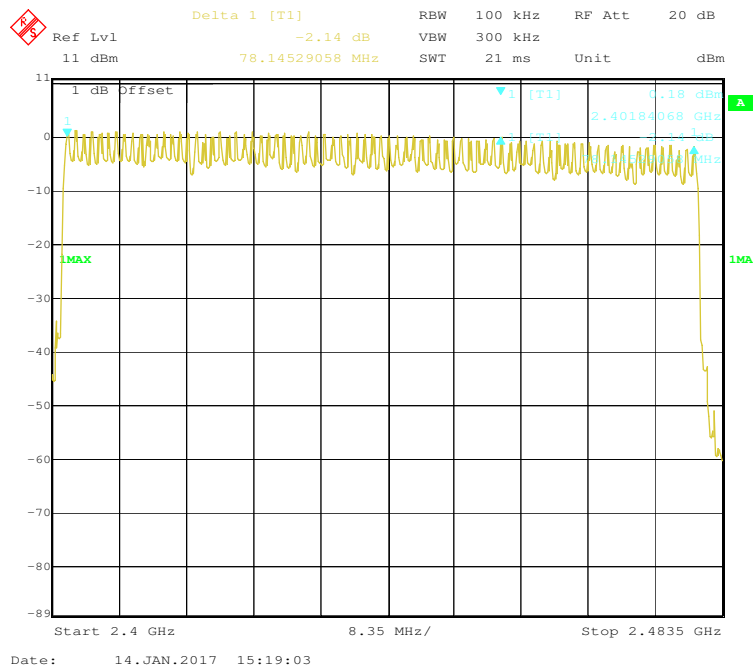

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data**Environmental Conditions**

Temperature:	24.2 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Ada Yu on 2017-01-14.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.536	0.172	0.4	Pass
		Middle	0.535	0.171	0.4	Pass
		High	0.544	0.174	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.813	0.290	0.4	Pass
		Middle	1.808	0.289	0.4	Pass
		High	1.803	0.288	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	3.074	0.328	0.4	Pass
		Middle	3.066	0.327	0.4	Pass
		High	3.106	0.331	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.549	0.176	0.4	Pass
		Middle	0.545	0.174	0.4	Pass
		High	0.549	0.176	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.813	0.290	0.4	Pass
		Middle	1.817	0.291	0.4	Pass
		High	1.817	0.291	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	3.074	0.328	0.4	Pass
		Middle	3.082	0.329	0.4	Pass
		High	3.090	0.330	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.548	0.175	0.4	Pass
		Middle	0.546	0.175	0.4	Pass
		High	0.548	0.175	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.803	0.288	0.4	Pass
		Middle	1.817	0.291	0.4	Pass
		High	1.808	0.289	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	3.074	0.328	0.4	Pass
		Middle	3.070	0.327	0.4	Pass
		High	3.074	0.328	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

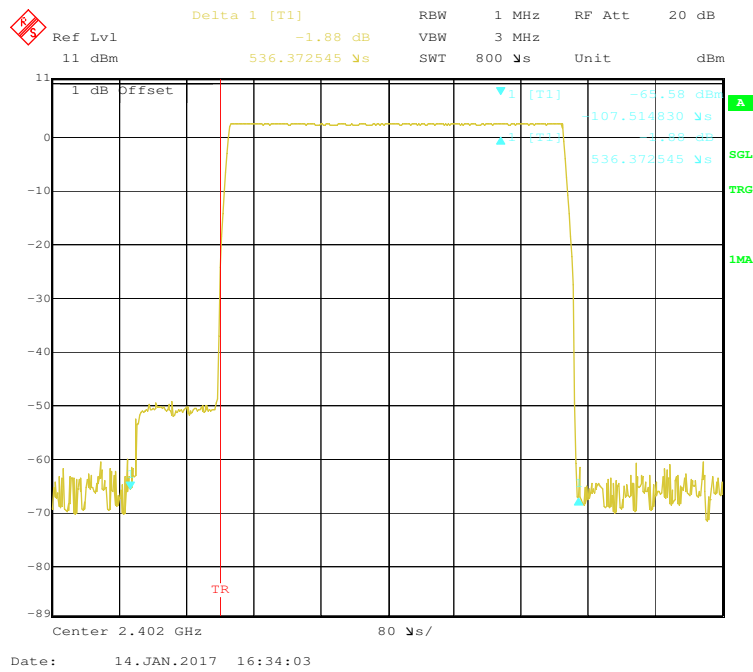


Pulse time, Middle Channel, DH1

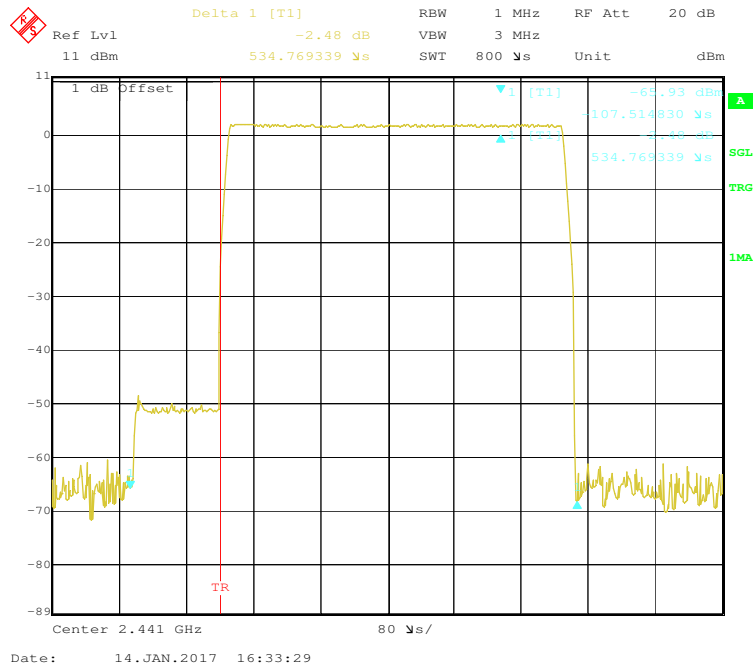

Pulse time, High Channel, DH1

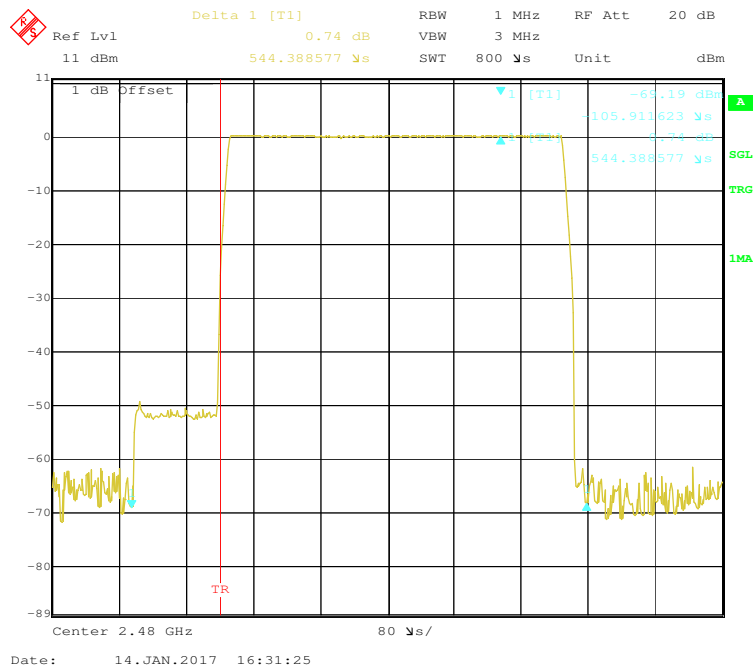

Pulse time, Low Channel, DH3

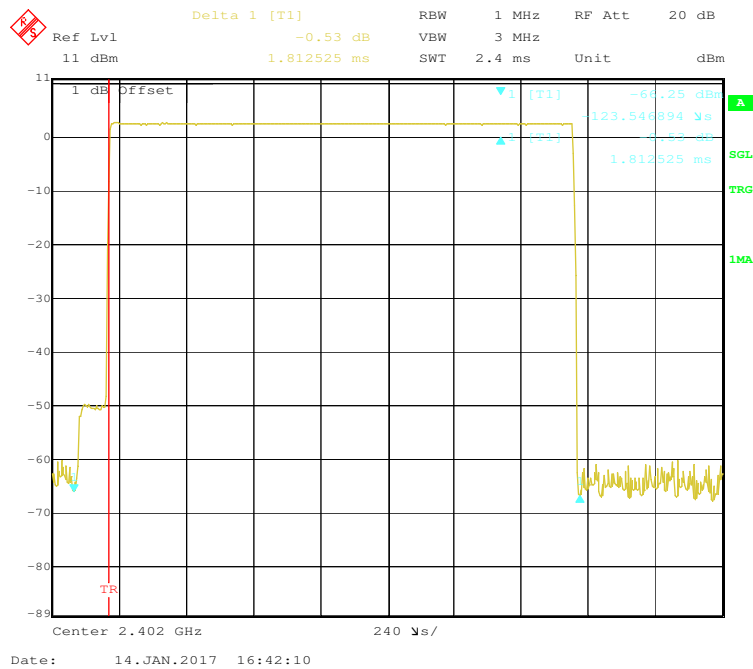

Delta 1 [T1] 0.80 dB RBW 1 MHz RF Att 20 dB
 Ref Lvl 11 dBm VBW 3 MHz
 1.807715 ms SWT 2.4 ms Unit dBm

1 dB Offset
 -51.57 dBm
 109.118036 μ s
 1.807715 ms

Center 2.441 GHz 240 μ s/

Date: 14.JAN.2017 16:42:45

Delta 1 [T1]

Ref Lvl 1.71 dB

11 dBm

1.802906 ms

RBW 1 MHz

VBW 3 MHz

SWT 2.4 ms

RF Att 20 dB

Unit dBm

1 dB Offset

1 (T1)

-51.39 dBm

-118.737275 μ s

-1.71 dB

1.802906 ms


TR

Center 2.48 GHz


240 μ s/



Date: 14.JAN.2017 16:43:18

Pulse time, Low Channel, DH5

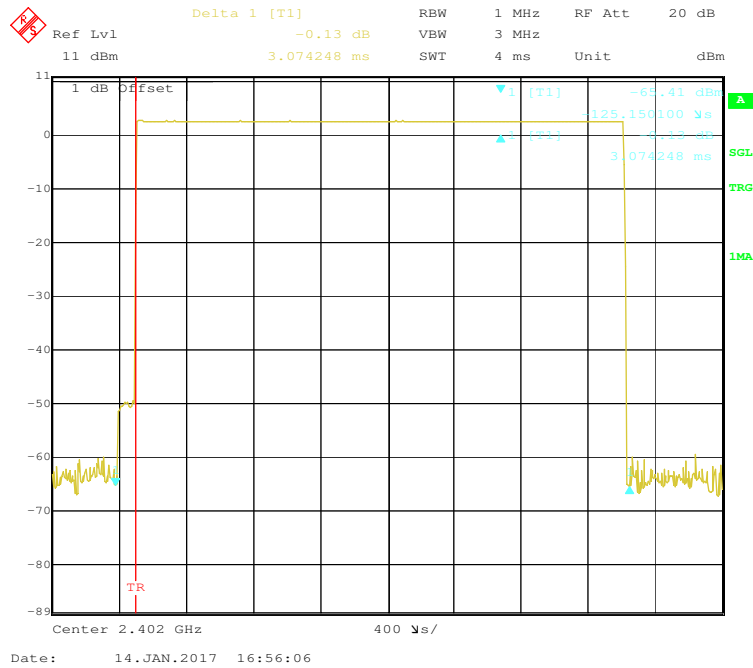


Pulse time, Middle Channel, DH5

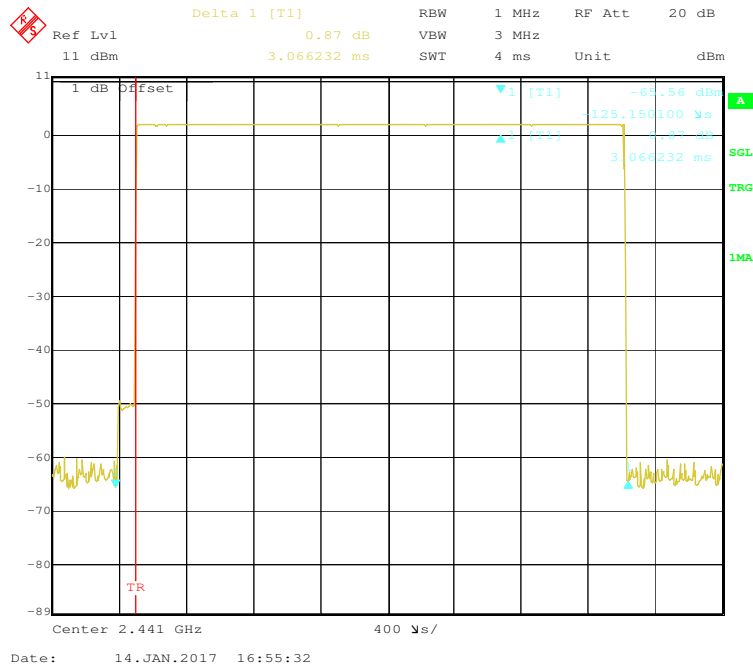


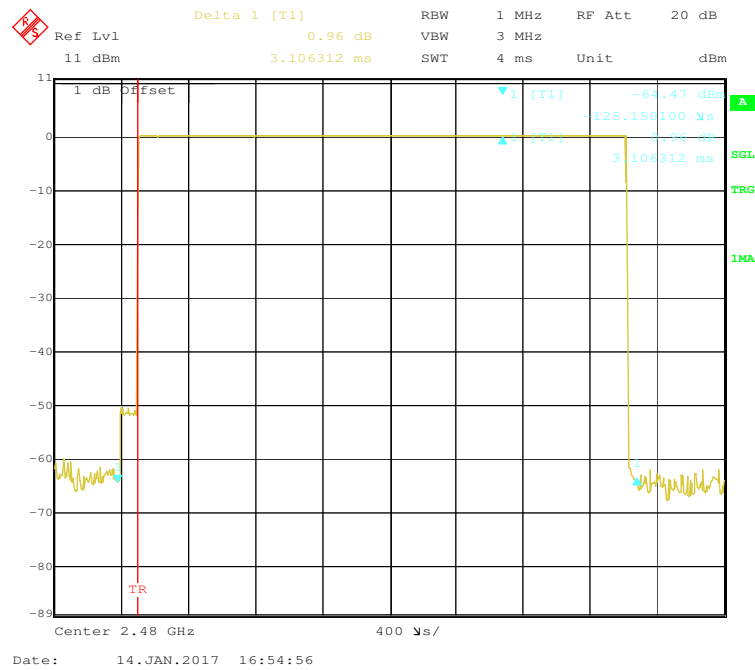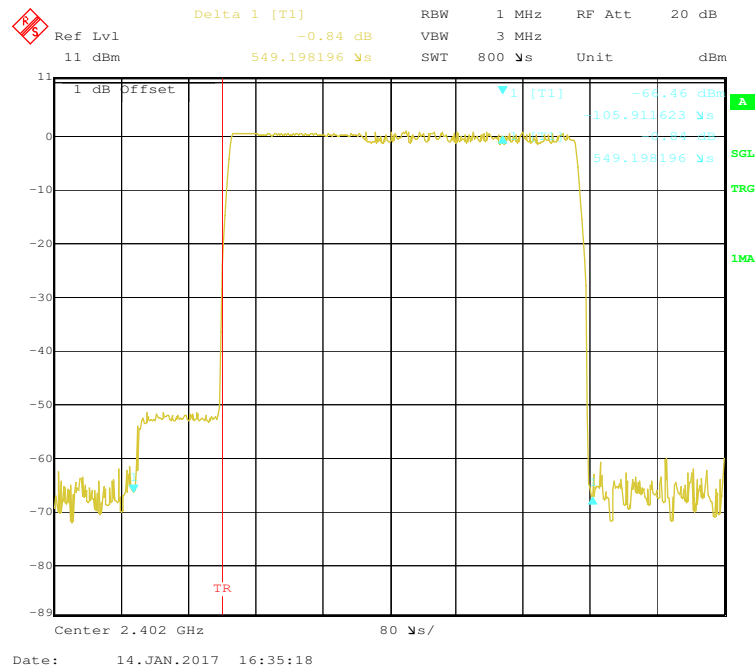Pulse time, High Channel, DH5**EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**


Pulse time, Middle Channel, 2DH1

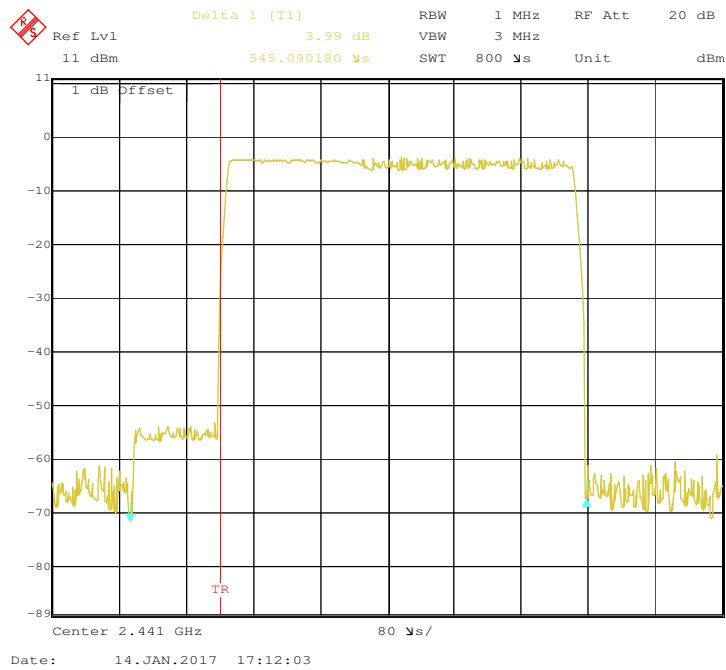


Pulse time, High Channel, 2DH1

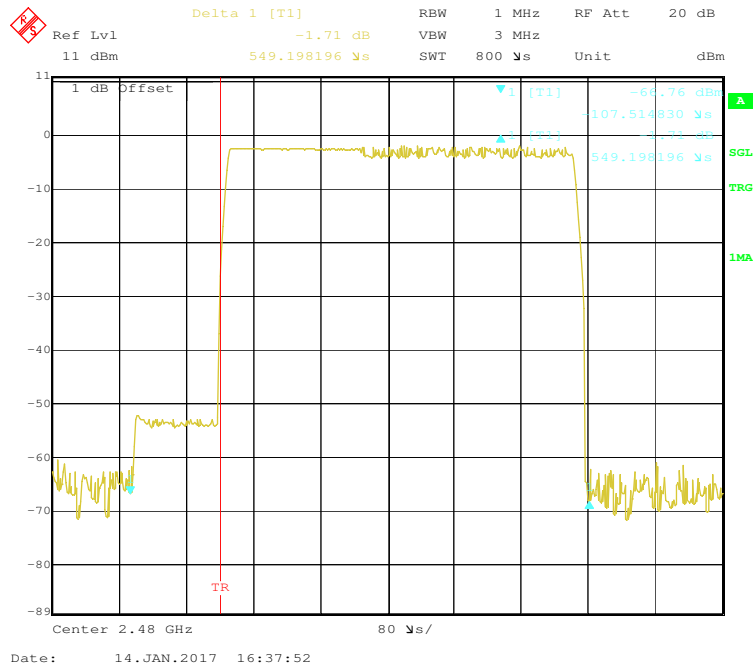



Pulse time, Low Channel, 2DH3

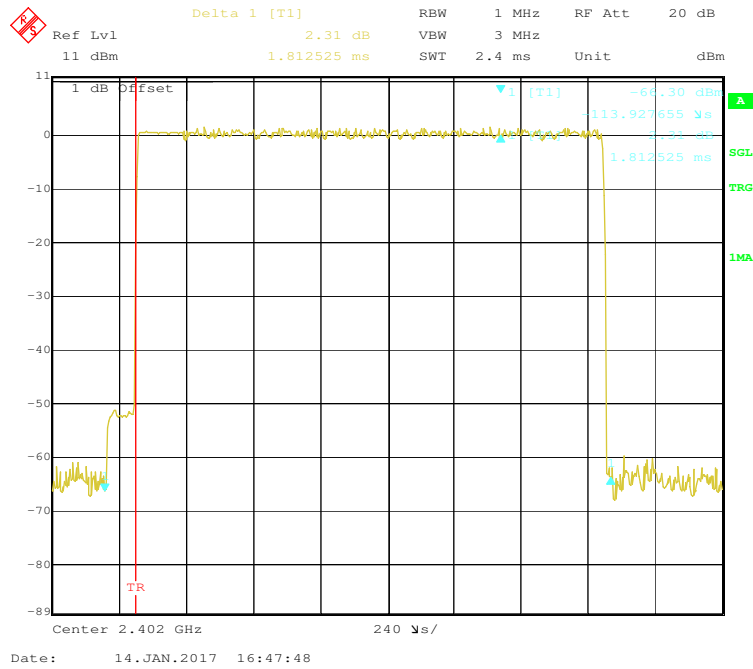


Pulse time, Middle Channel, 2DH3

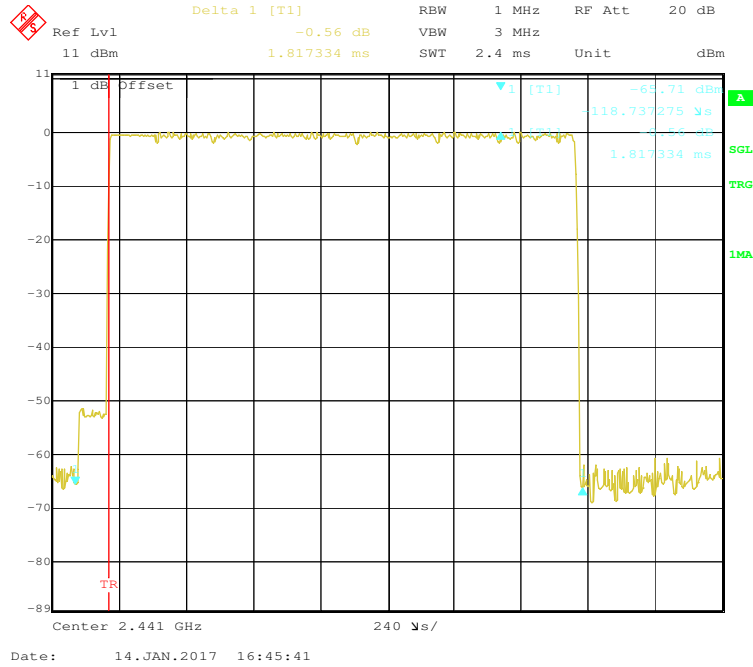


Pulse time, High Channel, 2DH3

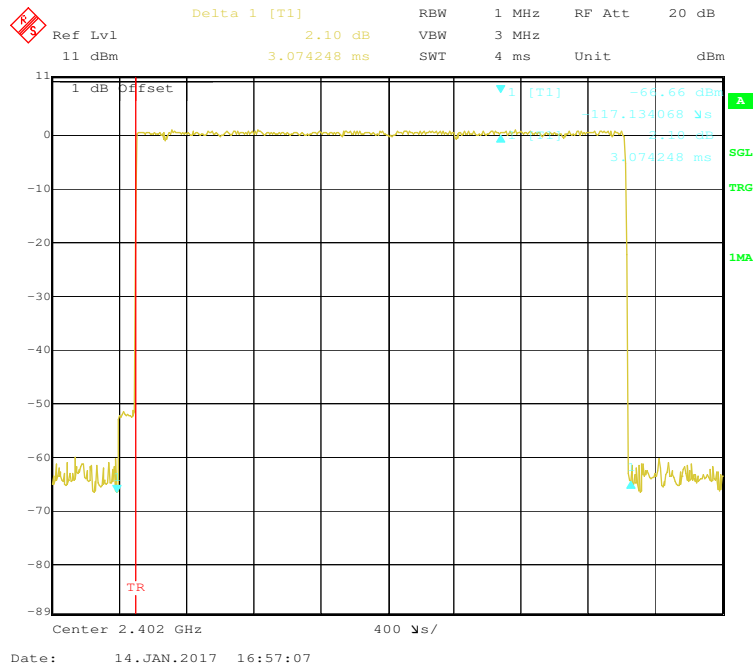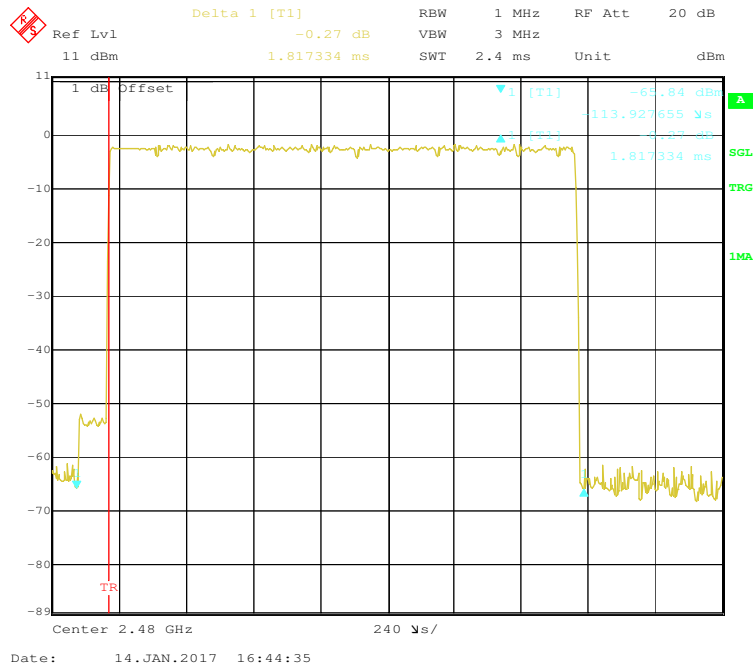

Pulse time, Middle Channel, 2DH5

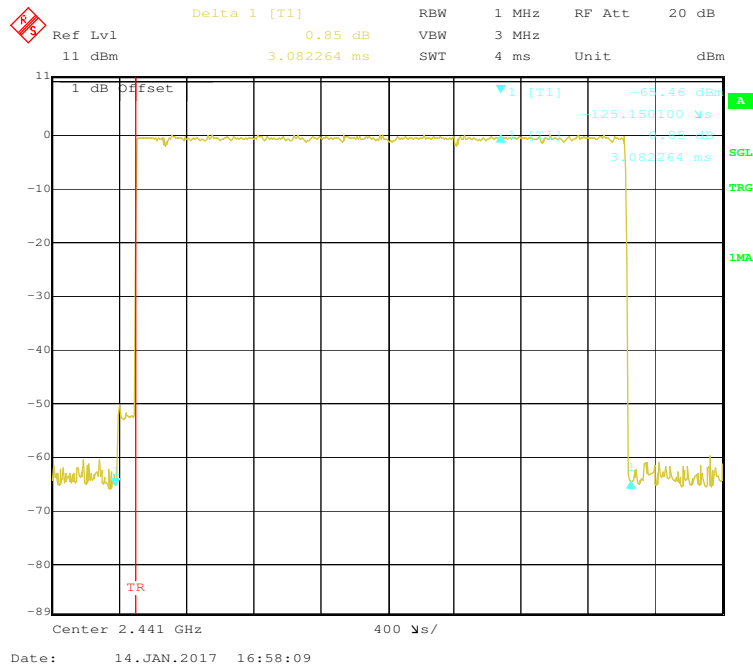

Pulse time, High Channel, 2DH5

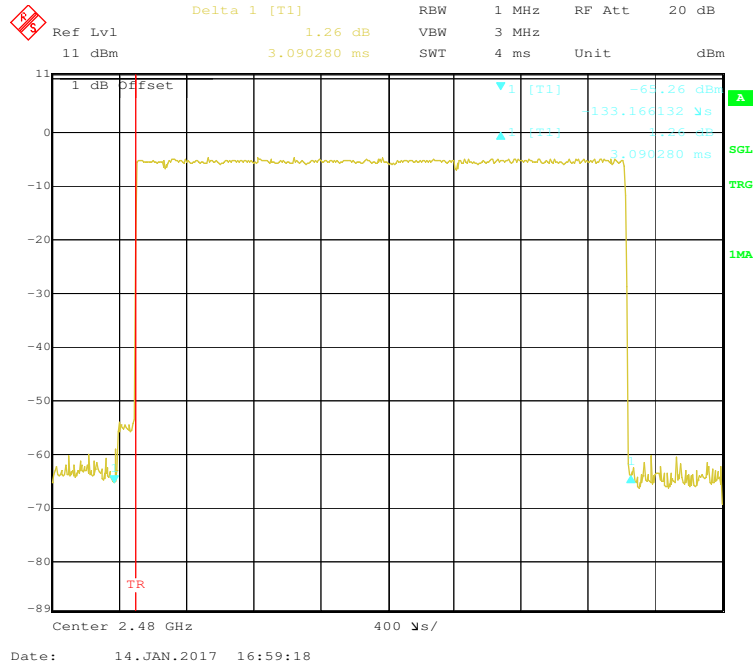

Delta 1 [T1] **-0.95 dB**

RBW	1 MHz	RF Att	20 dB
Ref Lvl	11 dBm	VBW	3 MHz
SWT	800 μ s	Unit	dBm

Center 2.402 GHz 80 μ s/

Date: 14.JAN.2017 16:40:48

Delta 1 [T1] -0.79 dB

RBW 1 MHz RF Att 20 dB

Ref Lvl 11 dBm VBW 3 MHz

11 dBm 545.991784 μ s SWT 800 μ s Unit dBm

1 dB Offset

1 [T1] -84.45 dBm


104.308417 μ s

545.991784 μ s


Center 2.441 GHz 80 μ s/

Date: 14.JAN.2017 16:40:17


Pulse time, High Channel, 3DH1

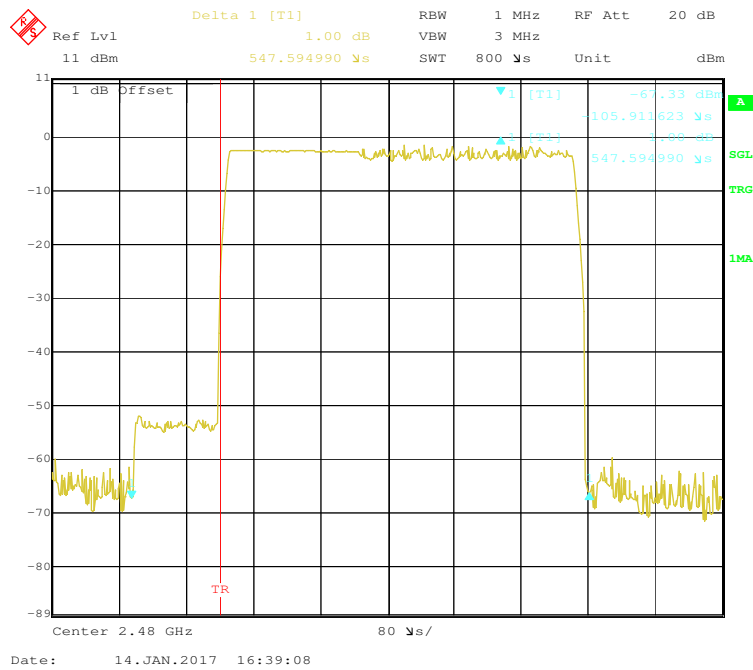


Pulse time, Low Channel, 3DH3

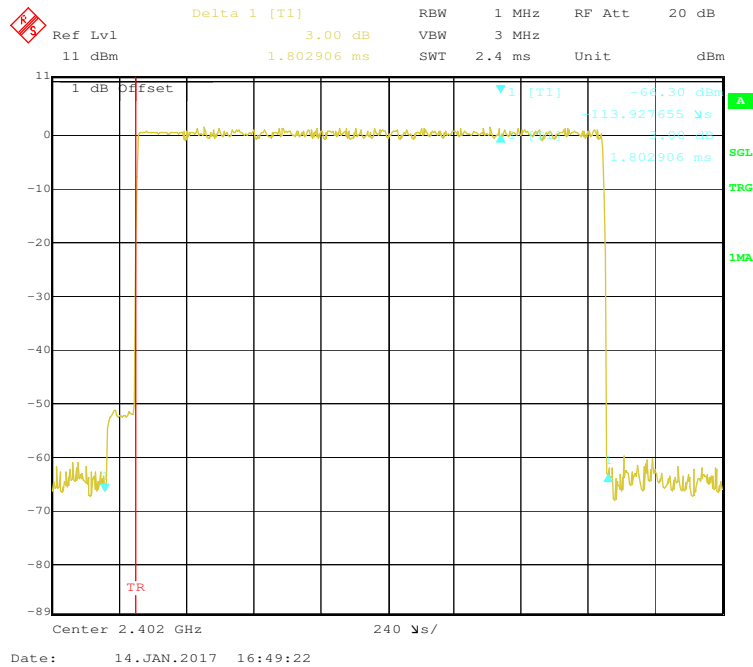


Pulse time, Middle Channel, 3DH3

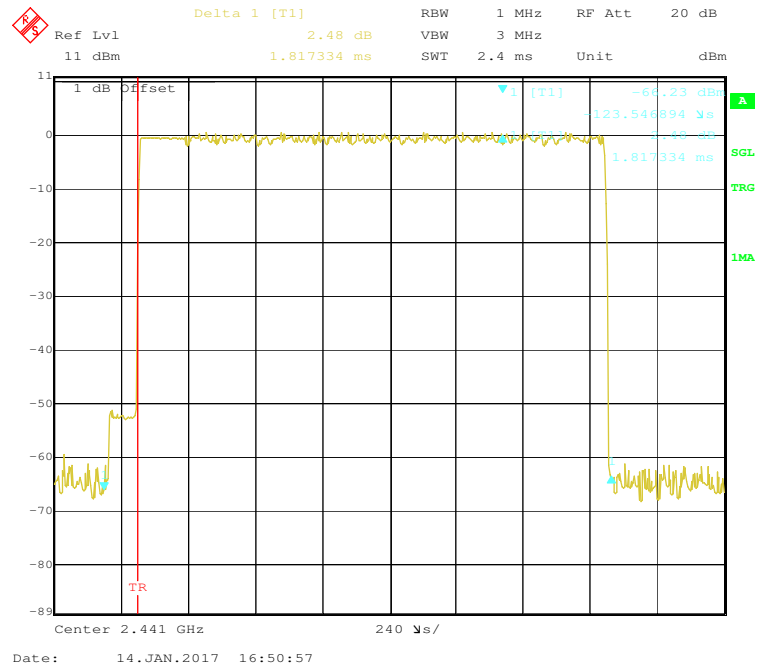


Pulse time, High Channel, 3DH3

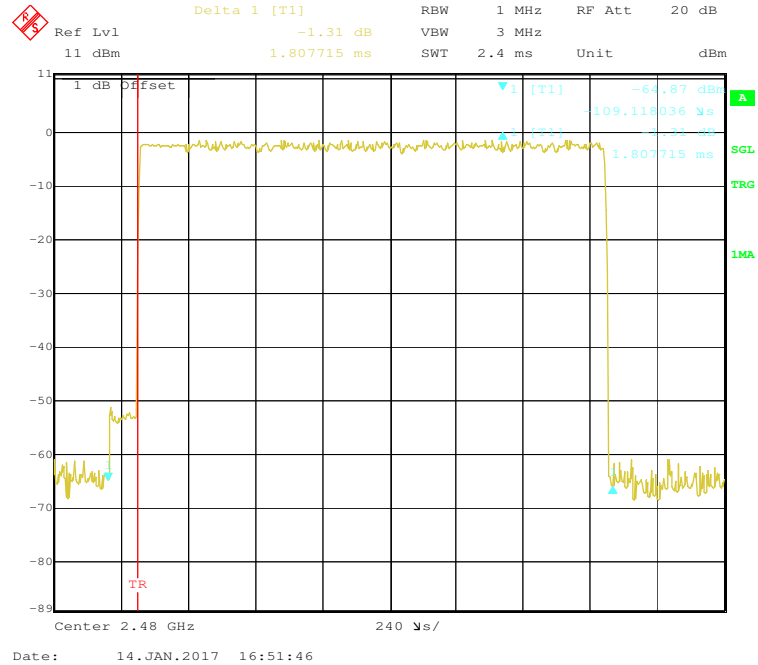


Pulse time, Low Channel, 3DH5

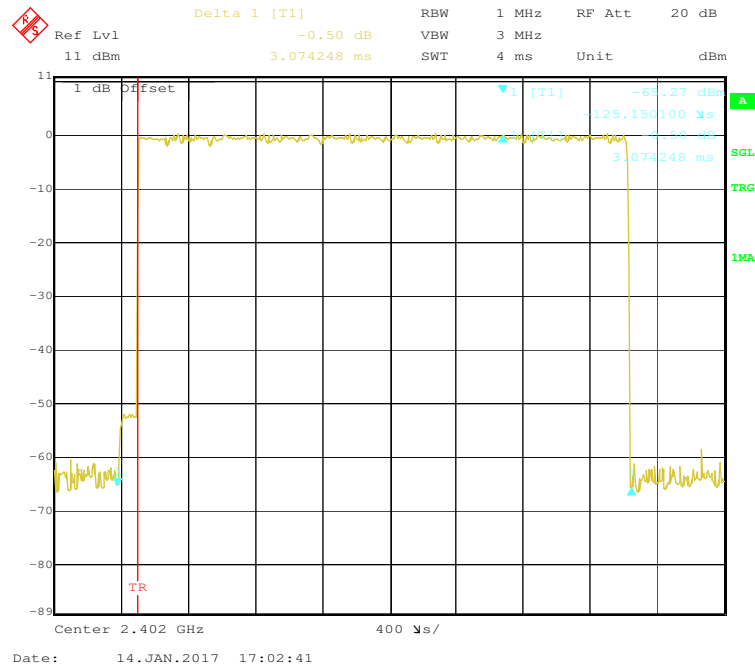

Pulse time, Middle Channel, 3DH5

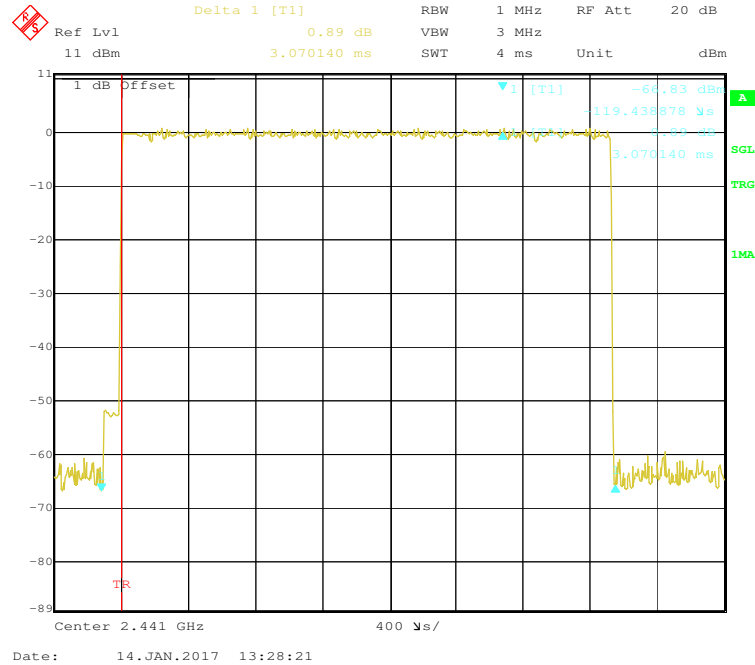

Pulse time, High Channel, 3DH5

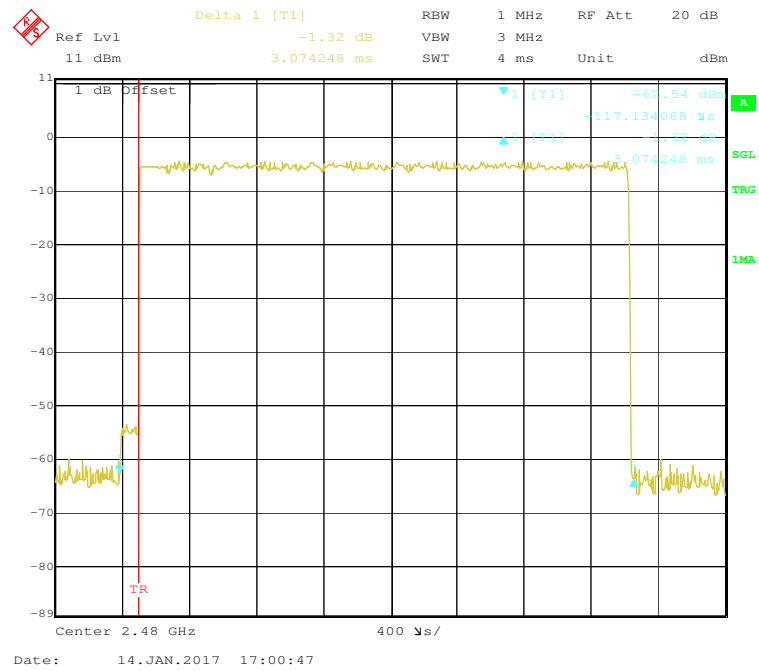

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Ada Yu on 2017-01-12 to 2017-01-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	3.54	2.26	1000
	Middle	2441	2.71	1.87	1000
	High	2480	0.58	1.14	1000
EDR ($\pi/4$-DQPSK)	Low	2402	1.70	1.48	1000
	Middle	2441	0.58	1.14	1000
	High	2480	-1.34	0.73	1000
EDR (8DPSK)	Low	2402	2.50	1.78	1000
	Middle	2441	1.53	1.42	1000
	High	2480	-0.21	0.95	1000

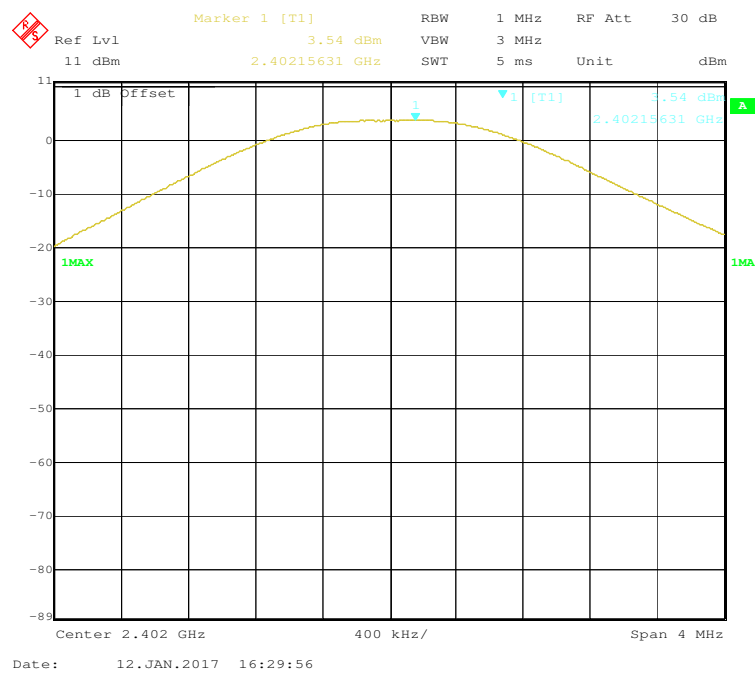BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

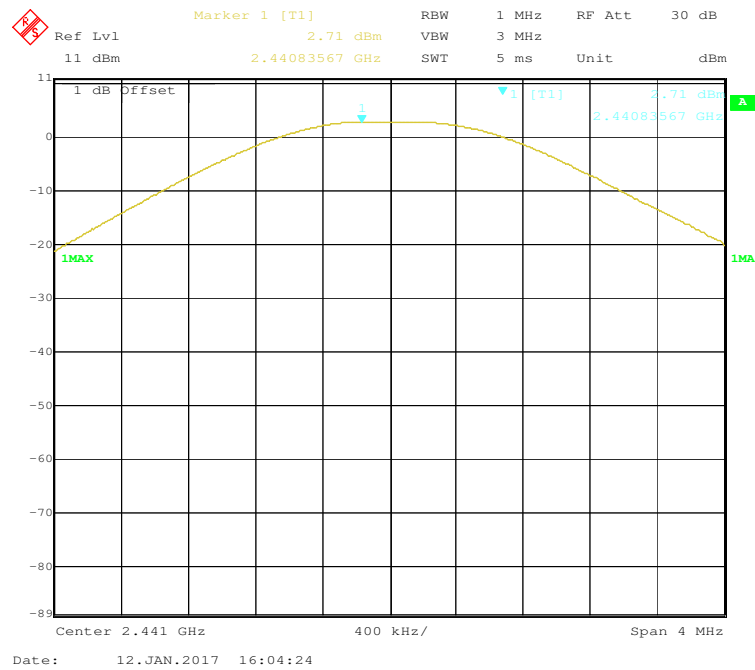


BDR (GFSK): High Channel

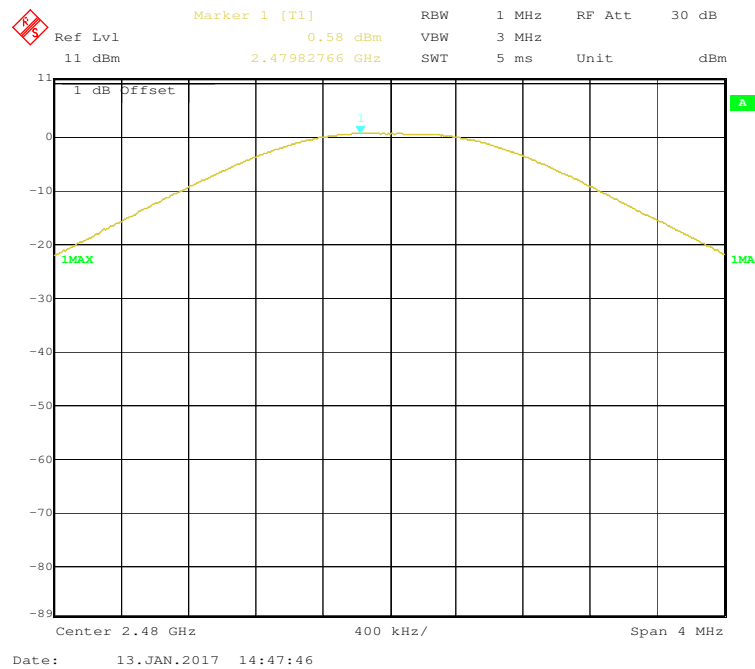


EDR($\pi/4$ -DQPSK): Low Channel

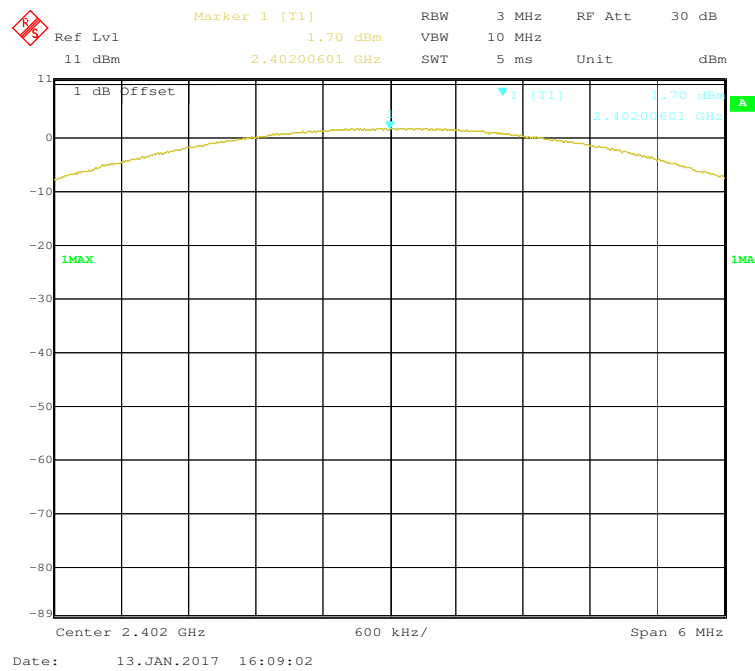


EDR($\pi/4$ -DQPSK): Middle Channel

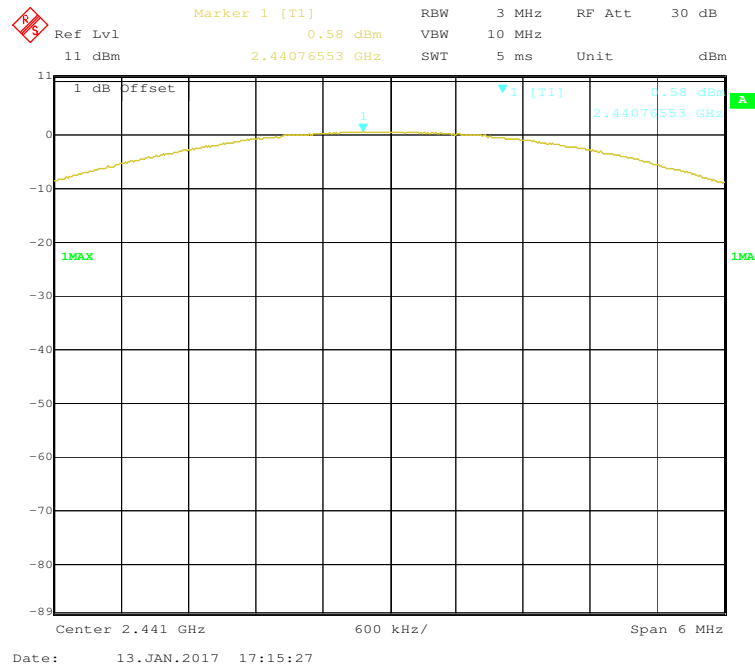


EDR($\pi/4$ -DQPSK): High Channel

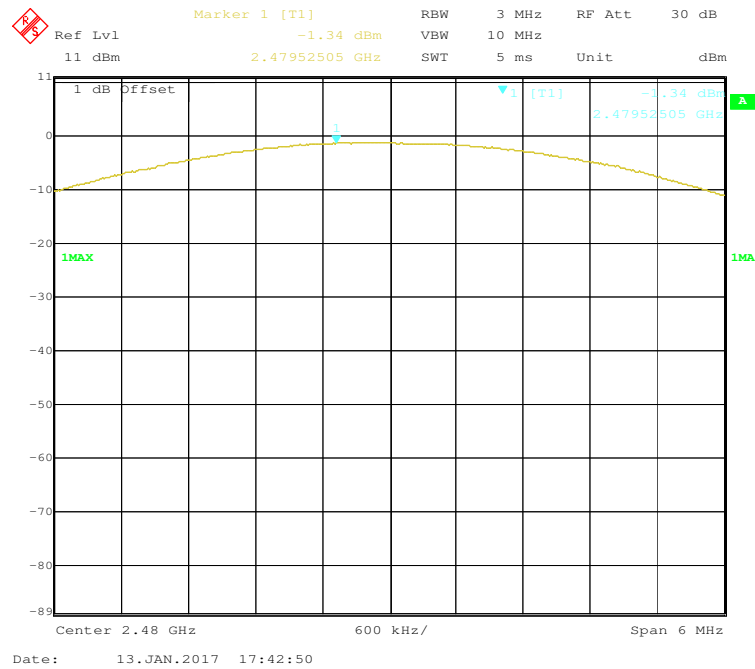


EDR(8DPSK): Low Channel

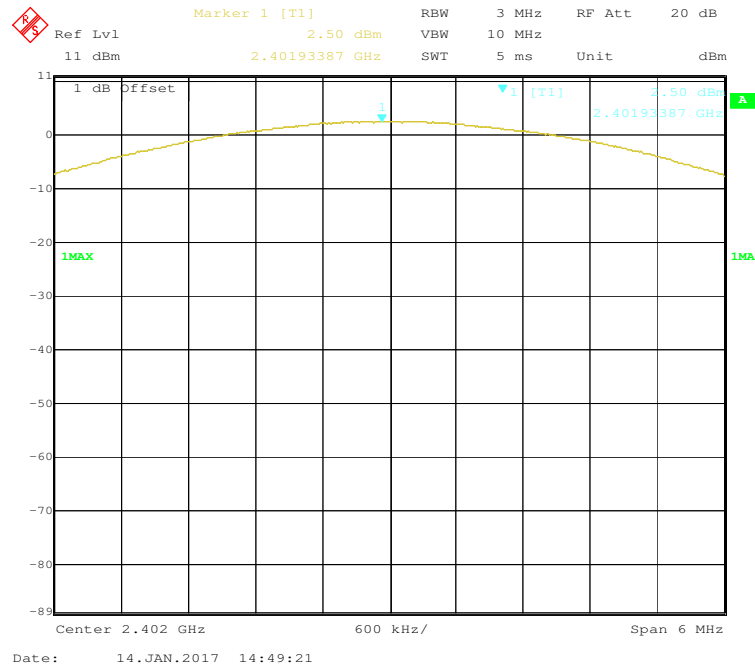

EDR(8DPSK): Middle Channel

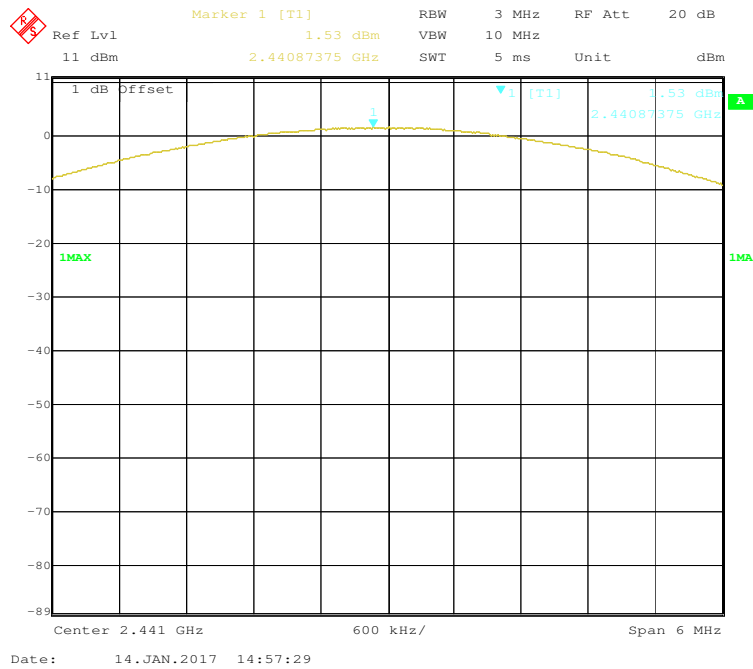

EDR(8DPSK): High Channel

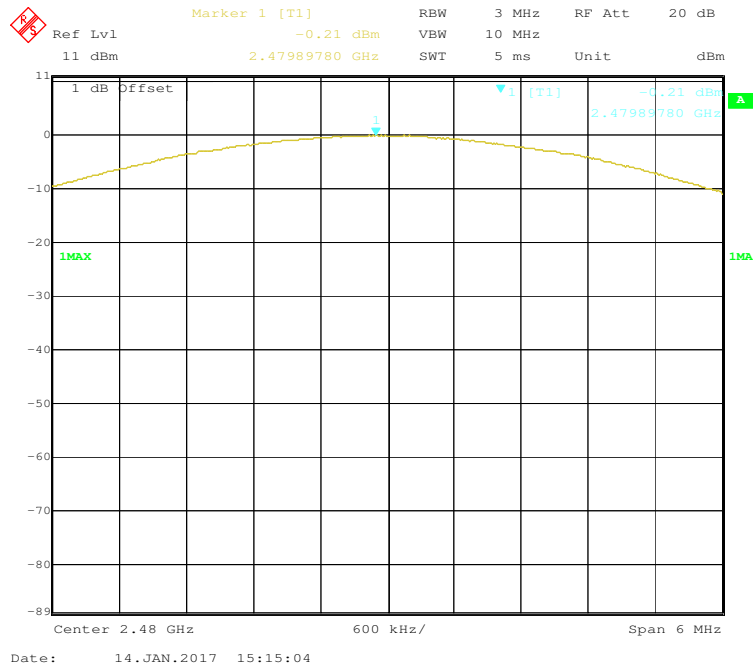

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.2 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Ada Yu on 2017-01-12 to 2017-01-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

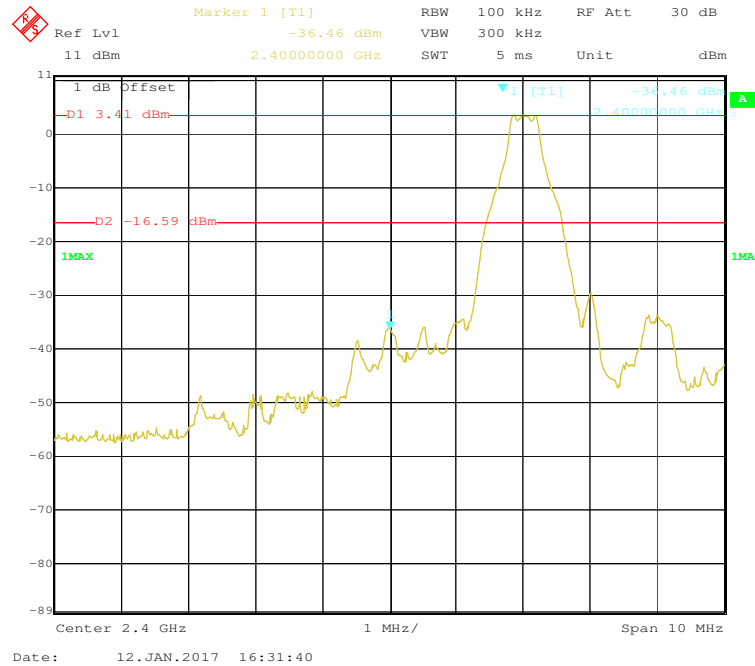


BDR (GFSK): Band Edge-Right Side

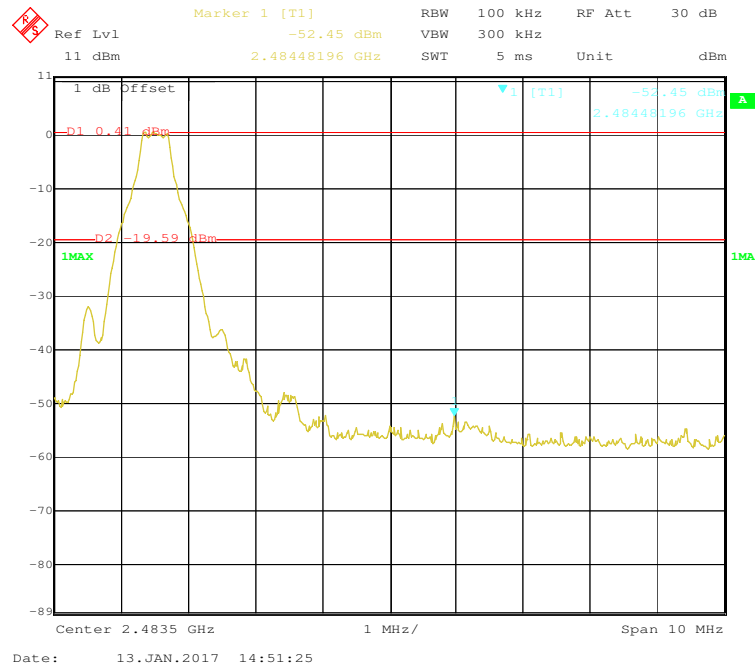


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

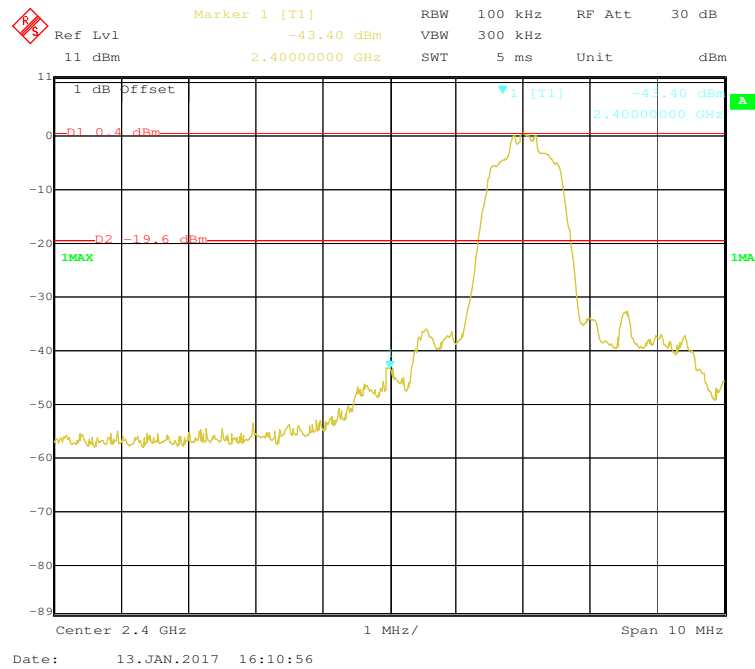


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

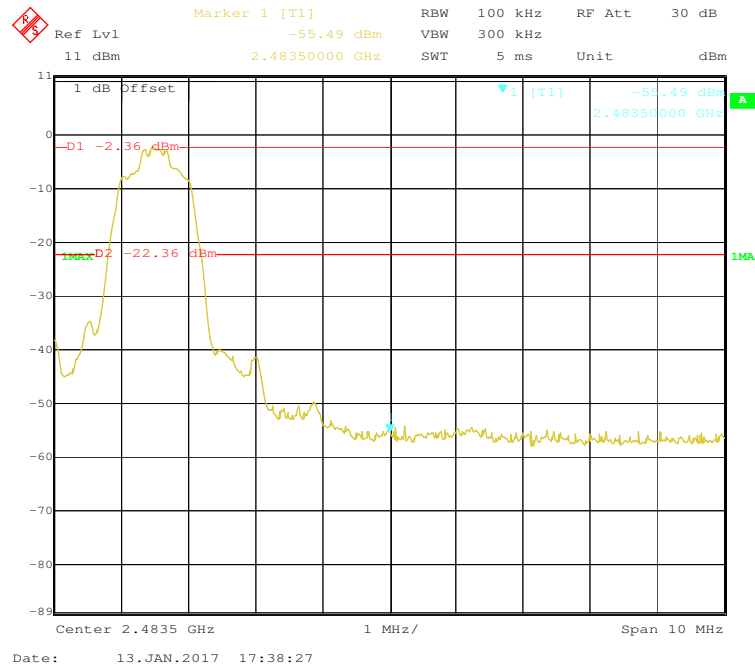

EDR (8DPSK): Band Edge-Left Side

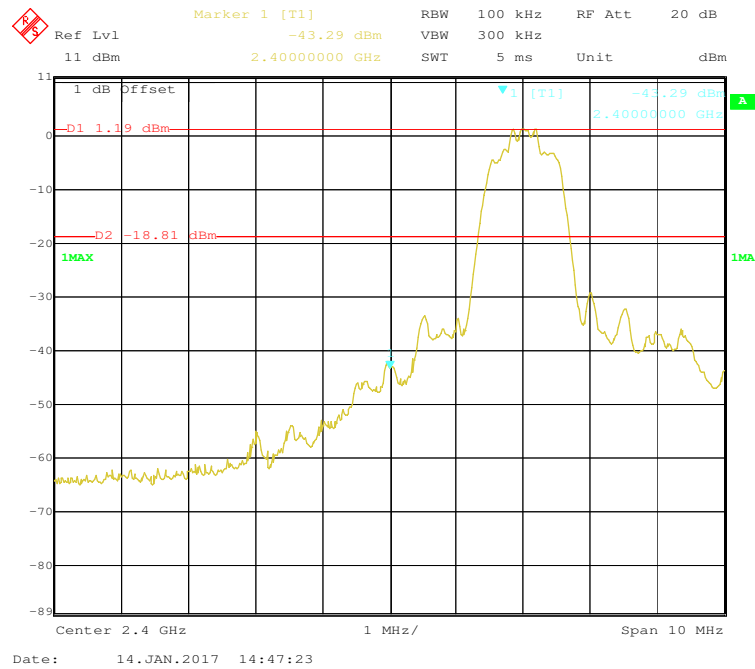

BDR (8DPSK): Band Edge-Right Side

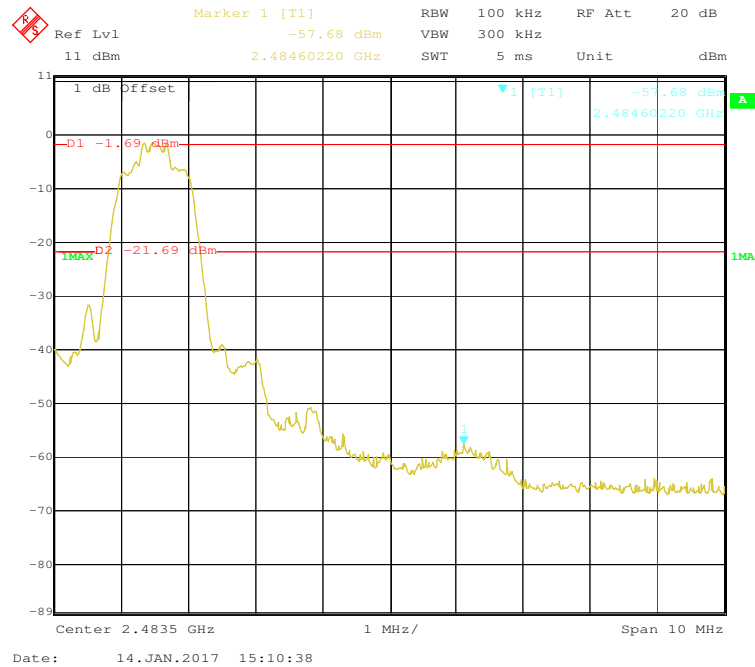

***** END OF REPORT *****